

Product Name: Gaming Mouse	Report No: FCC022022-5666RF0
Product Model: RZ01-0440	Security Classification: Open
Version: V1.0	Total Page:50

TIRT Testing Report



Prepared By:	Checked By:	Approved By:	A circular blue stamp with the text "TIRT Technology Service Co., Ltd." around the top and "Shenzhen" in the center.
Stone Tang	Randy Lv	Daniel Chen	
Stone Tang	Randy Lv	Daniel Chen	

FCC Radio Test Report

FCC ID: RWO-RZ010440

This report concerns: Original Grant

Project No. : 022022-5666
Equipment : Gaming Mouse
Brand Name : RAZER
Test Model : RZ01-0440
Series Model : RZ01-0440XXXX-XXXX(X can be 0-9 or A-Z)
Applicant : Razer Inc.
Address : 9 Pasteur, Suite 100, Irvine, CA92618, USA
Manufacturer : Razer (Asia-Pacific) Pte.,Ltd.
Address : 1 one-north Crescent, #02-01 Singapore 138538
Factory : RAZER TECHNOLOGY AND DEVELOPMENT (SHENZHEN) CO., LTD
Address : East Wing, 3rd Floor, Block 2, Phase 1 of Vision Shenzhen Business Park Keji South Road, Hi-Tech Industrial Park, Shenzhen 518057, China
Date of Receipt : 2022.10.08
Date of Test : 2022.10.10 ~ 2022.11.02
Issued Date : 2022.11.03
Report Version : V1.0
Test Sample : Engineering Sample No.: 20221008019070
Standard(s) : FCC CFR Title 47, Part 15, Subpart C
FCC KDB 558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10-2013

- The test result referred exclusively to the presented test model /sample.
- Without written approval of TIRT Inc. the test report shall not reproduced except in full.

Add: 101,3 # Factory Building, Gongjin Electronics Shatin Community, Kengzi Street, Pingshan District, Shenzhen, China

TEL: +86-0755-27087573

Table of Contents	Page
REPORT ISSUED HISTORY	5
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	10
2.3 PARAMETERS OF TEST SOFTWARE	10
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.5 SUPPORT UNITS	11
3 . AC POWER LINE CONDUCTED EMISSIONS	12
3.1 LIMIT	12
3.2 TEST PROCEDURE	12
3.3 DEVIATION FROM TEST STANDARD	12
3.4 TEST SETUP	13
3.5 EUT OPERATING CONDITIONS	13
3.6 TEST RESULTS	13
4 . RADIATED EMISSIONS	14
4.1 LIMIT	14
4.2 TEST PROCEDURE	15
4.3 DEVIATION FROM TEST STANDARD	16
4.4 TEST SETUP	16
4.5 EUT OPERATING CONDITIONS	17
4.6 TEST RESULT - 9 KHZ TO 30 MHZ	17
4.7 TEST RESULT - 30 MHZ TO 1000 MHZ	17
4.8 TEST RESULT - ABOVE 1000 MHZ	17
5 . BANDWIDTH	18
5.1 LIMIT	18
5.2 TEST PROCEDURE	18
5.3 DEVIATION FROM STANDARD	18
5.4 TEST SETUP	18

Table of Contents

	Page
5.5 EUT OPERATION CONDITIONS	18
5.6 TEST RESULTS	18
6 . MAXIMUM OUTPUT POWER	19
6.1 LIMIT	19
6.2 TEST PROCEDURE	19
6.3 DEVIATION FROM STANDARD	19
6.4 TEST SETUP	19
6.5 EUT OPERATION CONDITIONS	19
6.6 TEST RESULTS	19
7 . CONDUCTED SPURIOUS EMISSION	20
7.1 LIMIT	20
7.2 TEST PROCEDURE	20
7.3 DEVIATION FROM STANDARD	20
7.4 TEST SETUP	20
7.5 EUT OPERATION CONDITIONS	20
7.6 TEST RESULTS	20
8 . POWER SPECTRAL DENSITY	21
8.1 LIMIT	21
8.2 TEST PROCEDURE	21
8.3 DEVIATION FROM STANDARD	21
8.4 TEST SETUP	21
8.5 EUT OPERATION CONDITIONS	21
8.6 TEST RESULTS	21
9 . MEASUREMENT INSTRUMENTS LIST	22
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	23
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	26
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	27
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	30
APPENDIX E - BANDWIDTH	43
APPENDIX F - MAXIMUM OUTPUT POWER	45
APPENDIX G - CONDUCTED SPURIOUS EMISSION	47
APPENDIX H - POWER SPECTRAL DENSITY	49

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
FCC022022-5666RF0	V1.0	Original Report.	2022.11.03	Valid

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	-----
15.247(d)	Conducted Spurious Emission	APPENDIX G	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX H	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable to this device.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

1.1 TEST FACILITY

Company:	Beijing TIRT Technology Service Co.,Ltd Shenzhen
Address:	101, 3 # Factory Building, Gongjin Electronics Shatin Community, Kengzi Street, Pingshan District, Shenzhen, China
CNAS Registration Number:	CNAS L14158
A2LA Registration Number:	6049.01
FCC Accredited Lab. Designation Number:	CN1309
FCC Test Firm Registration Number:	825524
Telephone:	+86-0755-27087573

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))
The TIRT measurement uncertainty as below table:

Uncertainty	Parameter	Uncertainty
	Occupied Channel Bandwidth	±142.12 KHz
	RF power conducted	±0.74 dB
	RF power radiated	±3.25dB
	Spurious emissions, conducted	±1.78dB
	Spurious emissions, radiated (30MHz~1GHz)	±4.6dB
	Spurious emissions, radiated (1GHz ~ 18GHz)	±4.9dB
	Conduction Emissions(150kHz~30MHz)	±3.1 dB
	Humidity	±4.6%
	Temperature	±0.7°C
	Time	±1.25%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	22.2°C	51%	AC 120V/60Hz	Stone Tang
Radiated Emissions-9 kHz to 30 MHz	23.5°C	55%	DC 5V	Stone Tang
Radiated Emissions-30 MHz to 1000 MHz	23.5°C	52%	DC 5V	Stone Tang
Radiated Emissions-Above 1000 MHz	21°C	47%	DC 5V	Stone Tang
Bandwidth	20°C	55%	DC 5V	Stone Tang
Maximum Output Power	20°C	55%	DC 5V	Stone Tang
Conducted Spurious Emission	20°C	55%	DC 5V	Stone Tang
Power Spectral Density	20°C	55%	DC 5V	Stone Tang

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Gaming Mouse
Brand Name	RAZER
Test Model	RZ01-0440
Series Model	RZ01-0440XXXX-XXXX(X can be 0-9 or A-Z)
Model Difference(s)	The system's model name is RZ01-0440XXXX-XXXX (X: Can be 0-9, A-Z), and the system contains a Gaming Mouse (Model name: RZ01-0440) and USB Dongle (Model name: DGRFG7).
Power Source	1# Supplied from USB Port. 2# Supplied from battery. Model: PL803040
Power Rating	1# 5V---500mA 2# DC 3.7V, 1000mAh, 3.7Wh
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Type	GFSK
Bit Rate of Transmitter	2Mbps
Max. Output Power	2Mbps: 5.59 dBm (0.0036 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2402	28	2429	55	2456
02	2403	29	2430	56	2457
03	2404	30	2431	57	2458
04	2405	31	2432	58	2459
05	2406	32	2433	59	2460
06	2407	33	2434	60	2461
07	2408	34	2435	61	2462
08	2409	35	2436	62	2463
09	2410	36	2437	63	2464
10	2411	37	2438	64	2465
11	2412	38	2439	65	2466
12	2413	39	2440	66	2467
13	2414	40	2441	67	2468
14	2415	41	2442	68	2469
15	2416	42	2443	69	2470
16	2417	43	2444	70	2471
17	2418	44	2445	71	2472
18	2419	45	2446	72	2473
19	2420	46	2447	73	2474
20	2421	47	2448	74	2475
21	2422	48	2449	75	2476
22	2423	49	2450	76	2477
23	2424	50	2451	77	2478
24	2425	51	2452	78	2479
25	2426	52	2453	79	2480
26	2427	53	2454		
27	2428	54	2455		

3. Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	PCB	N/A	3.35

Note: The antenna gain is provided by the manufacturer.

2.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX Mode_2Mbps Channel 01/40/79
Mode 2	TX Mode_2Mbps Channel 01

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 2	TX Mode_2Mbps Channel 01

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 2	TX Mode_2Mbps Channel 01

Radiated emissions test - Above 1GHz	
Final Test Mode	Description
Mode 1	TX Mode_2Mbps Channel 01/40/79

Conducted test	
Final Test Mode	Description
Mode 1	TX Mode_2Mbps Channel 01/40/79


Note:

- (1) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (2) For AC power line conducted emissions and radiated emissions below 1 GHz test, the 2Mbps Channel 01 is found to be the worst case and recorded.

2.3 PARAMETERS OF TEST SOFTWARE

Setup is implemented with mouse buttons and has no specific parameter values

Test Software Version	N/A		
Frequency (MHz)	2402	2441	2480
2Mbps	N/A	N/A	N/A

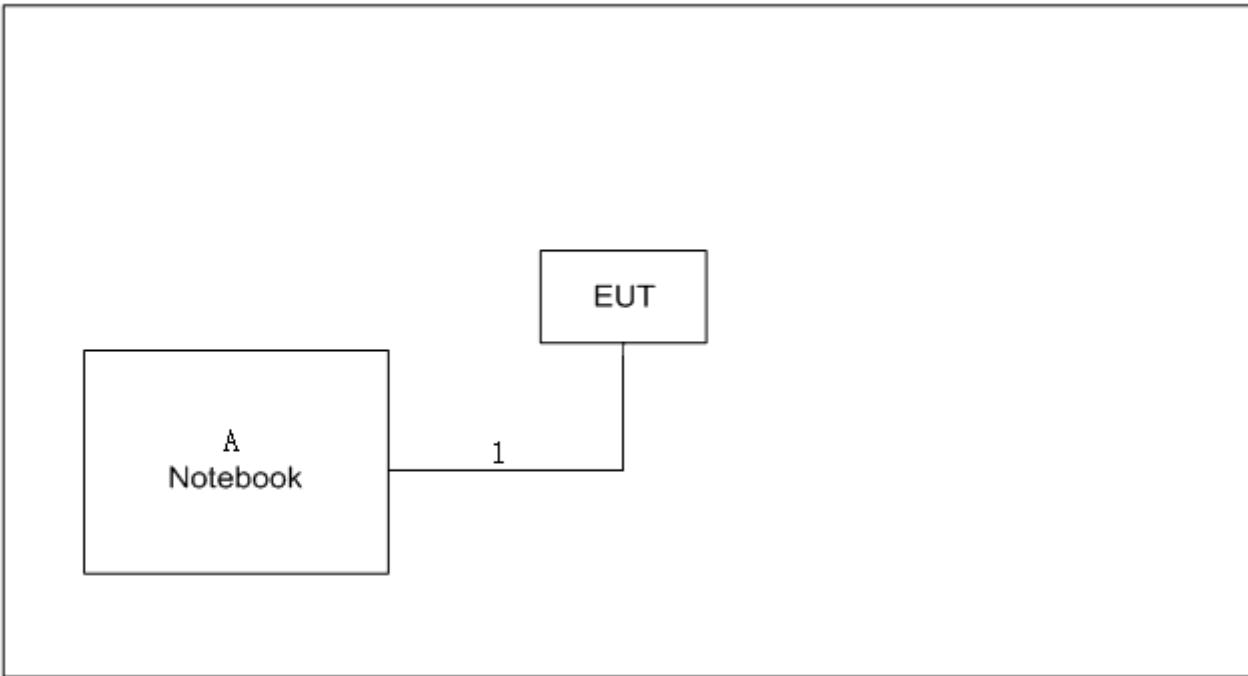2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED**2.5 SUPPORT UNITS**

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Lenovo	L450	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	USB Cable	NO	NO	1.5m

3. AC POWER LINE CONDUCTED EMISSIONS

3.1 LIMIT

Frequency of Emission (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameters	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

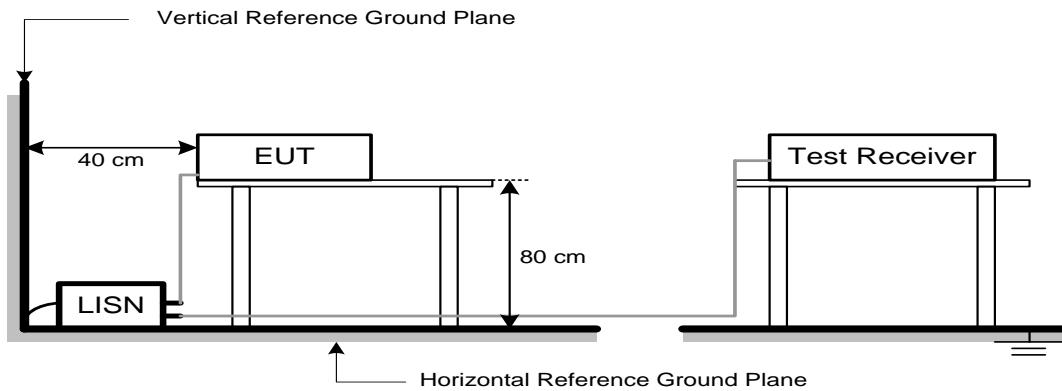

3.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』 . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150 kHz to 30 MHz.

4. RADIATED EMISSIONS

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

Note:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector

4.3 DEVIATION FROM TEST STANDARD


No deviation.


4.4 TEST SETUP

9 kHz to 30 MHz

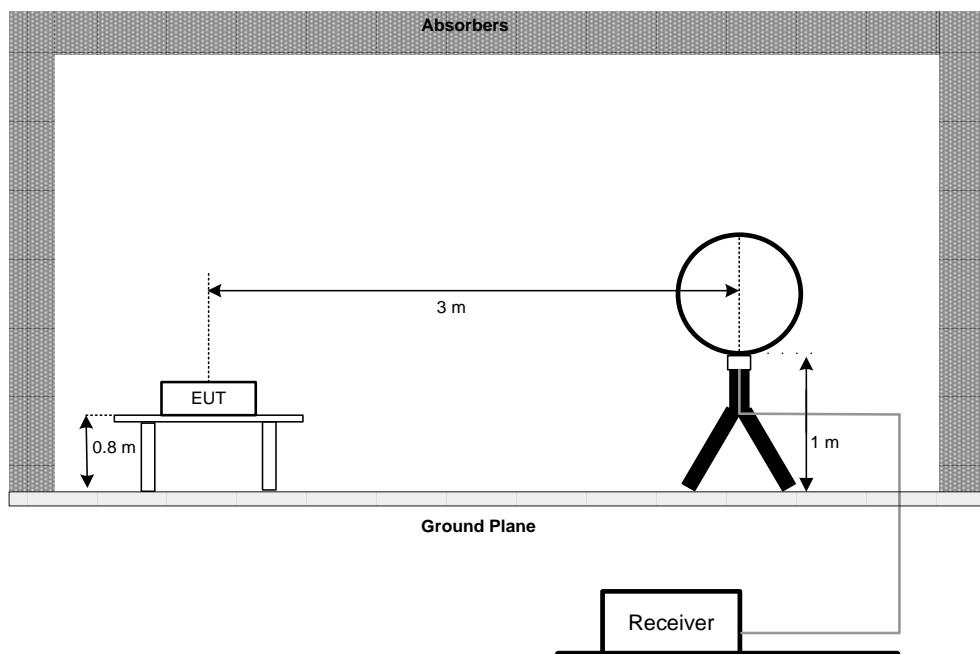

30 MHz to 1 GHz

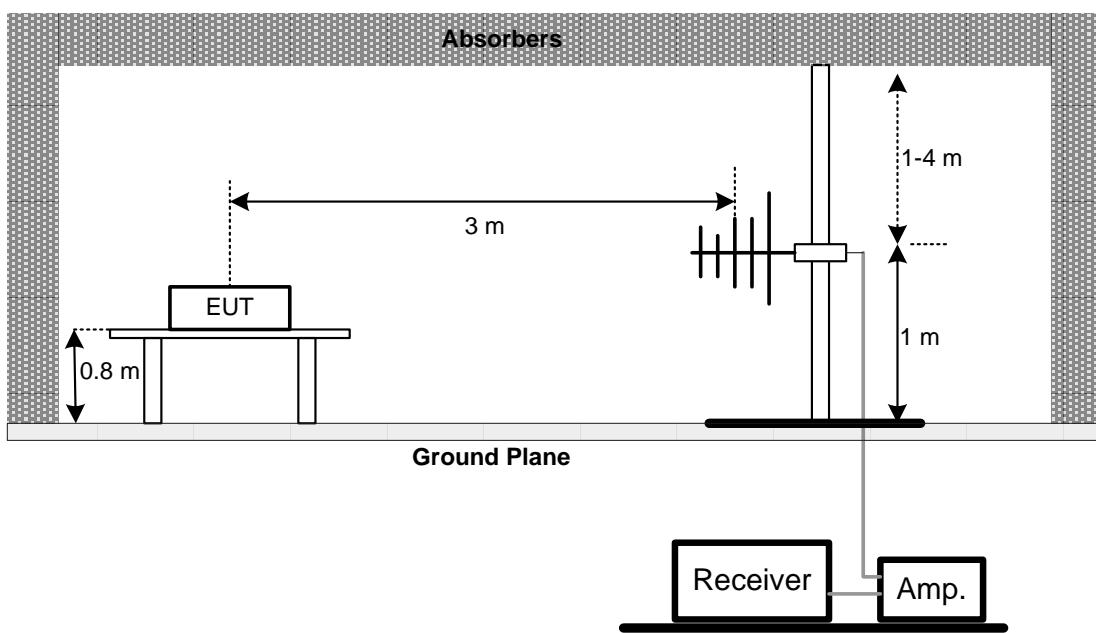

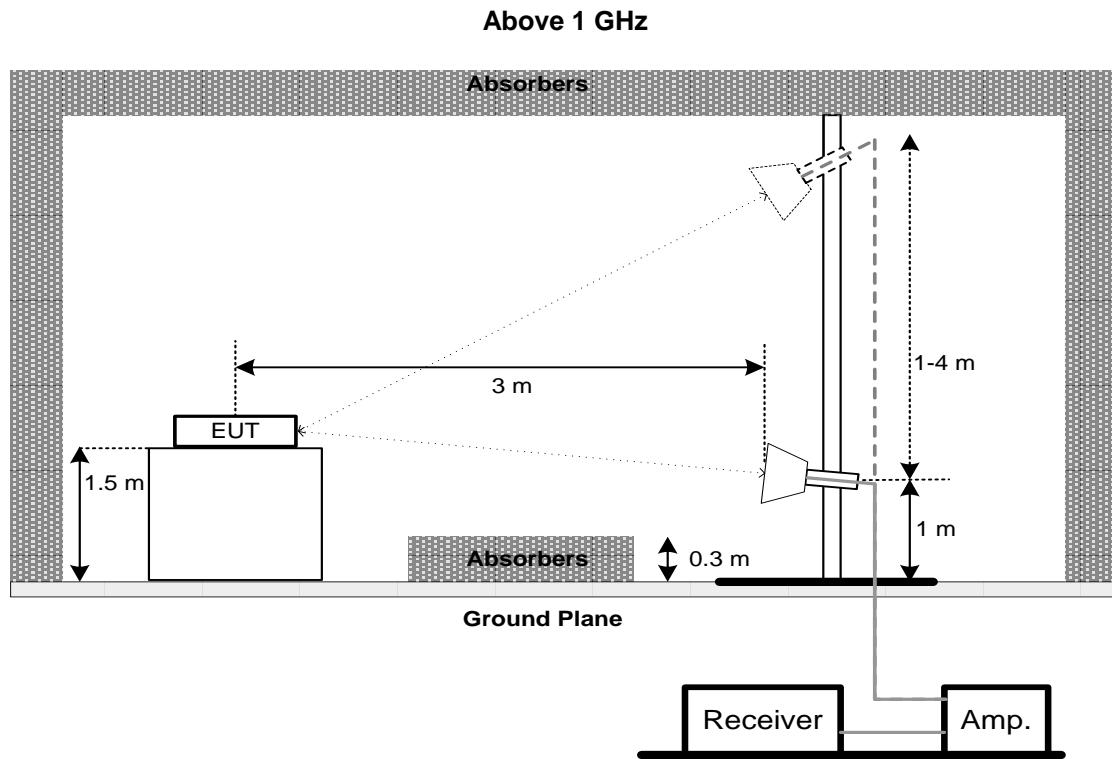

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT - 9 kHz TO 30 MHz

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.7 TEST RESULT - 30 MHz TO 1000 MHz

Please refer to the APPENDIX C.

4.8 TEST RESULT - ABOVE 1000 MHz

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH

5.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(2)	6 dB Bandwidth	>= 500 kHz
	99% Emission Bandwidth	-

5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For 6 dB Bandwidth:

Spectrum Parameters	Setting
Span Frequency	> Measurement Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Emission Bandwidth:

Spectrum Parameters	Setting
Span Frequency	Between 1.5 times and 5.0 times the OBW
RBW	30 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX E.

6. MAXIMUM OUTPUT POWER

6.1 LIMIT

Section	Test Item	Limit
FCC 15.247(b)(3)	Maximum Output Power	1.0000 watt or 30.00 dBm

6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	$\geq 3 \times \text{RBW}$
RBW	3 MHz
VBW	3 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX F.

7. CONDUCTED SPURIOUS EMISSION

7.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX G.

8. POWER SPECTRAL DENSITY

8.1 LIMIT

Section	Test Item	Limit
FCC 15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	2 MHz (1 Mbps) / 4 MHz (2 Mbps)
RBW	3 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX H.

9. MEASUREMENT INSTRUMENTS LIST

No.	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Receiver	Rohde&Schwarz	ESCI	1166.5950.03	2022/11/09
2	AMN	Rohde&Schwarz	ENV216	3560.6550.05	2022/11/09
3	AMN	Schwarzbeck	NSLK8127	#829	2022/11/09
4	ECSI RF IN RF Cable	Rohde&Schwarz	RP-X1	N/A	2022/11/09
5	ECSI RF IN RF Cable	Rohde&Schwarz	Sapre sm	N/A	2022/11/09
6	EMI Receiver	Rohde&Schwarz	ESR7	102013	2022/11/09
7	Spectrum analyzer	Rohde&Schwarz	FSV30	103741	2022/11/09
8	Spectrum analyzer	KEYSIGHT	N9010A-44	MY51440158	2022/11/09
9	Integral Antenna	Schwarzbeck	VULB 9163	VULB 9163-361	2022/11/20
10	Loop Antenna*	Schwarzbeck	FMZB1519B	00029	2025/07/03
11	Integral Antenna	Schwarzbeck	BBHA 9120D 9120D	BBHA 9120D 1201	2022/11/20
12	Integral Antenna	Schwarzbeck	BBHA 9170	9170#685	2022/11/20
13	Preamplifier	Schwarzbeck	BBV9745	#78	2022/11/09
14	Preamplifier	Schwarzbeck	BBV9721	9721-019	2022/11/09
15	Preamplifier	RF System/UK	TRLA-01018 0G50B	22062101	2023/07/20
16	ECSI RF IN RF Cable	Rohde&Schwarz	AP-X1	N/A	2022/11/09
17	ECSI RF IN RF Cable	HAOXUN	Z-108	N/A	2022/11/09
18	RF Cable	ZDECL	ZT40-2.92J- 2.92J-6M	18124358	2023/07/20
19	Spectrum Analyzer	Agilent	N9010A	MY51440158	2022/11/09
20	Spectrum Analyzer	Agilent	N9010A	MY52221119	2022/11/09
21	Spectrum Analyzer	KEYSIGHT	N9020B	MY57463781	2023/03/15
22	EMI Receiver	Rohde&Schwarz	ESU	100184	2023/07/20
23	Temp&Humidity Recorder	Anymetre	JR900	N/A	2022/11/03
24	Temp&Humidity Chamber	ETOMA	NTH1100-30 A	16080628	2022/11/03
25	Filter	STI	STI15-9845	N/A	N/A
26	Filter	STI	5.1G	N/A	N/A
27	Filter	STI	STI15-9845	N/A	N/A
28	Testing Software	EZ-EMC	TW-03A2	N/A	N/A


Remark "N/A" denotes no model name, serial no. or calibration specified.

"*" calibration period of equipment list is three year.

Except * item, all calibration period of equipment list is one year.

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX Mode_2Mbps Channel 00	Phase	Line
-----------	--------------------------	-------	------

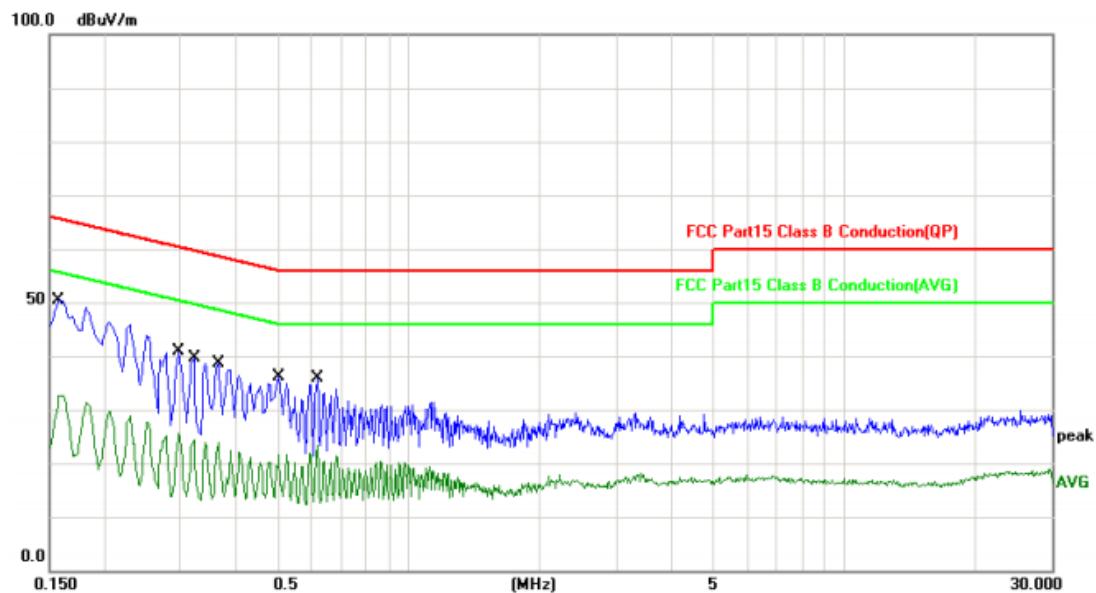


No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
			dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *		0.1580	29.07	19.51	48.58	65.57	-16.99	QP	
2		0.1580	13.18	19.51	32.69	55.57	-22.88	AVG	
3		0.2980	19.31	19.52	38.83	60.30	-21.47	QP	
4		0.2980	4.41	19.52	23.93	50.30	-26.37	AVG	
5		0.3220	17.52	19.52	37.04	59.66	-22.62	QP	
6		0.3220	2.43	19.52	21.95	49.66	-27.71	AVG	
7		0.3660	16.90	19.52	36.42	58.59	-22.17	QP	
8		0.3660	1.50	19.52	21.02	48.59	-27.57	AVG	
9		0.5060	11.82	19.53	31.35	56.00	-24.65	QP	
10		0.5060	-1.42	19.53	18.11	46.00	-27.89	AVG	
11		0.6180	14.28	19.53	33.81	56.00	-22.19	QP	
12		0.6180	3.22	19.53	22.75	46.00	-23.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_2Mbps Channel 00	Phase	Neutral
-----------	--------------------------	-------	---------

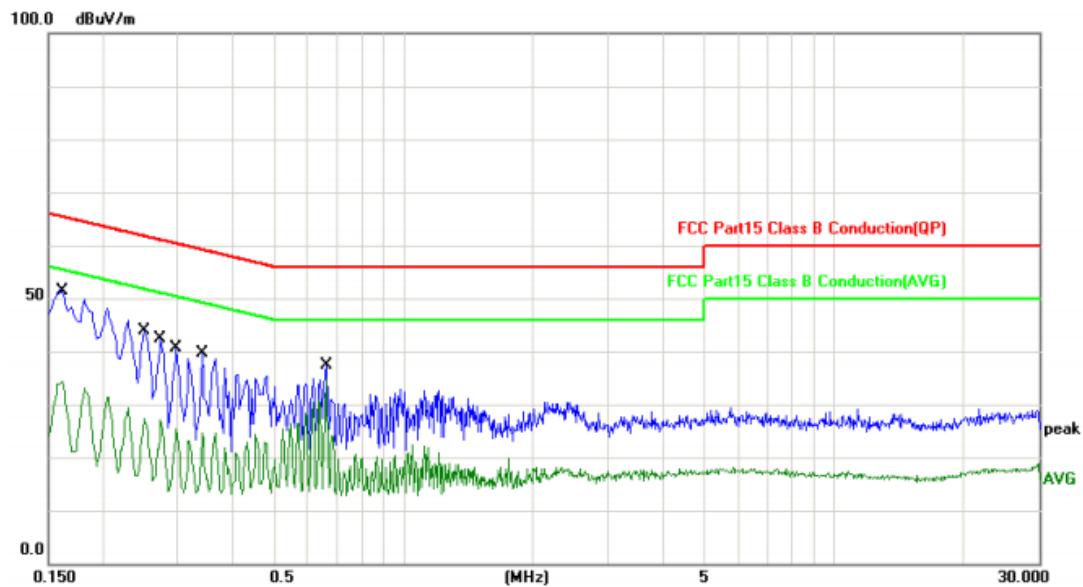

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Comment
			Level	Factor	ment			
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1		0.1620	29.99	19.70	49.69	65.36	-15.67	QP
2		0.1620	13.68	19.70	33.38	55.36	-21.98	AVG
3		0.2500	21.64	19.69	41.33	61.76	-20.43	QP
4		0.2500	6.58	19.69	26.27	51.76	-25.49	AVG
5		0.2740	20.25	19.69	39.94	61.00	-21.06	QP
6		0.2740	6.56	19.69	26.25	51.00	-24.75	AVG
7		0.2980	18.46	19.70	38.16	60.30	-22.14	QP
8		0.2980	4.93	19.70	24.63	50.30	-25.67	AVG
9		0.3420	16.99	19.70	36.69	59.15	-22.46	QP
10		0.3420	2.75	19.70	22.45	49.15	-26.70	AVG
11		0.6620	15.38	19.78	35.16	56.00	-20.84	QP
12 *		0.6620	14.66	19.78	34.44	46.00	-11.56	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ


Radiated emission: 9KHz-30MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX Mode_2Mbps Channel 00	Polarization	Vertical
-----------	--------------------------	--------------	----------

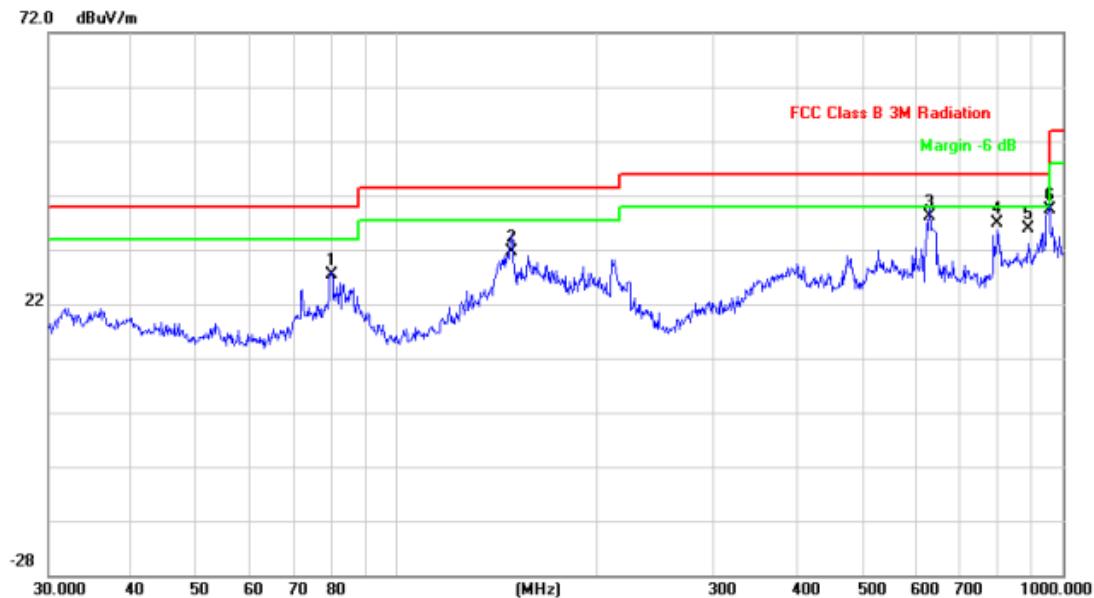


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	Degree	
			Level	Factor	ment						
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		79.8003	12.64	14.74	27.38	40.00	-12.62	QP	100	60	
2		148.4410	16.54	15.08	31.62	43.50	-11.88	QP	100	8	
3		629.4772	14.61	23.44	38.05	46.00	-7.95	QP	100	322	
4		796.1830	10.34	26.63	36.97	46.00	-9.03	QP	100	19	
5		884.5030	7.64	28.28	35.92	46.00	-10.08	QP	100	117	
6 *		952.0937	9.16	30.14	39.30	46.00	-6.70	QP	100	189	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_2Mbps Channel 00	Polarization	Horizontal
-----------	--------------------------	--------------	------------

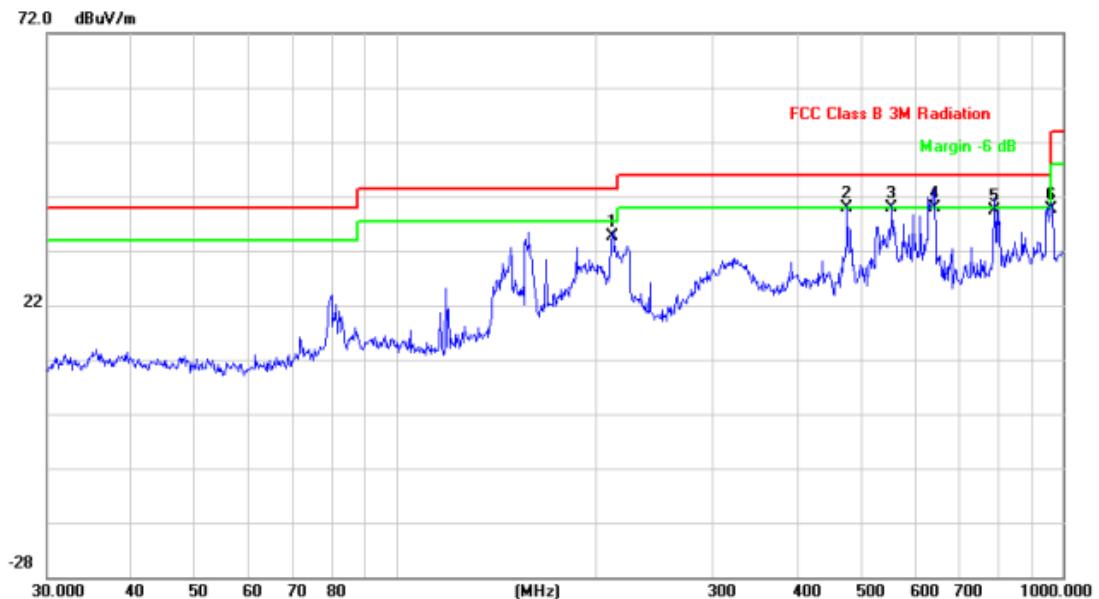


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table
			Level	Factor	ment				
MHz									
1		210.7860	18.78	15.78	34.56	43.50	-8.94	QP	200
2		473.8347	19.20	20.76	39.96	46.00	-6.04	QP	200
3 *		552.8832	18.03	21.94	39.97	46.00	-6.03	QP	200
4		640.6110	16.32	23.58	39.90	46.00	-6.10	QP	200
5		787.8513	13.28	26.14	39.42	46.00	-6.58	QP	200
6		958.7943	9.38	30.16	39.54	46.00	-6.46	QP	200
dBuV									
dB									
dBuV/m									
dB									

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode	TX 2402 MHz _CH01_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

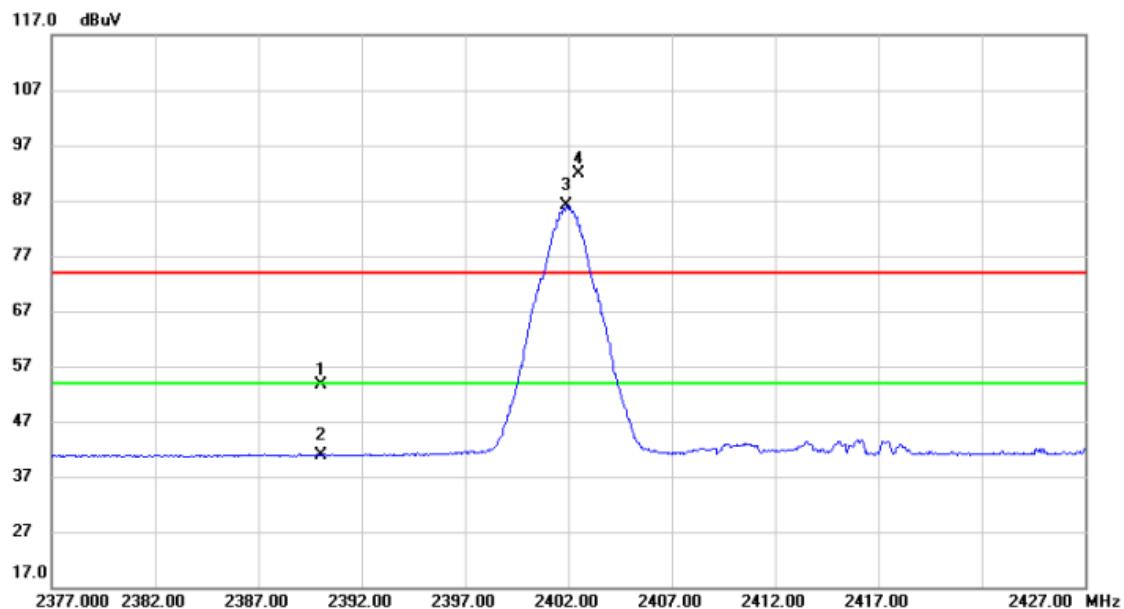


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dB	Margin Detector	Comment
1		2390.000	21.00	32.63	53.63	74.00	-20.37	peak
2		2390.000	8.13	32.63	40.76	54.00	-13.24	AVG
3	*	2401.900	53.39	32.67	86.06	54.00	32.06	AVG
4	X	2402.500	59.28	32.68	91.96	74.00	17.96	peak

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH01_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

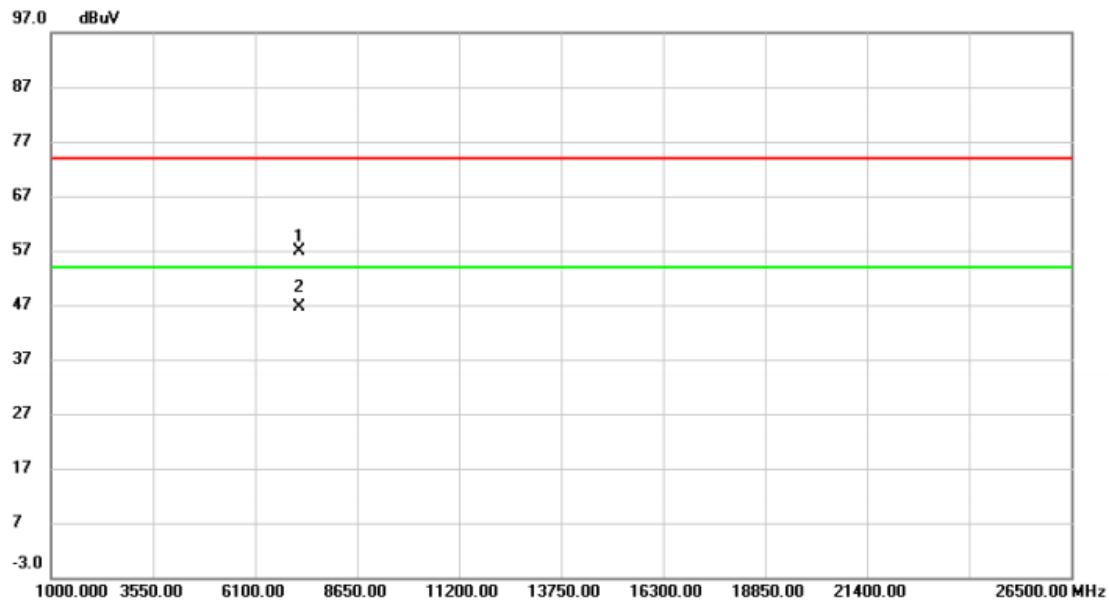


No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Detector	Comment
		dBuV	dB	dBuV	dBuV	dB		
1	7196.500	66.04	-9.08	56.96	74.00	-17.04	peak	
2 *	7196.500	55.79	-9.08	46.71	54.00	-7.29	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH01_2Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

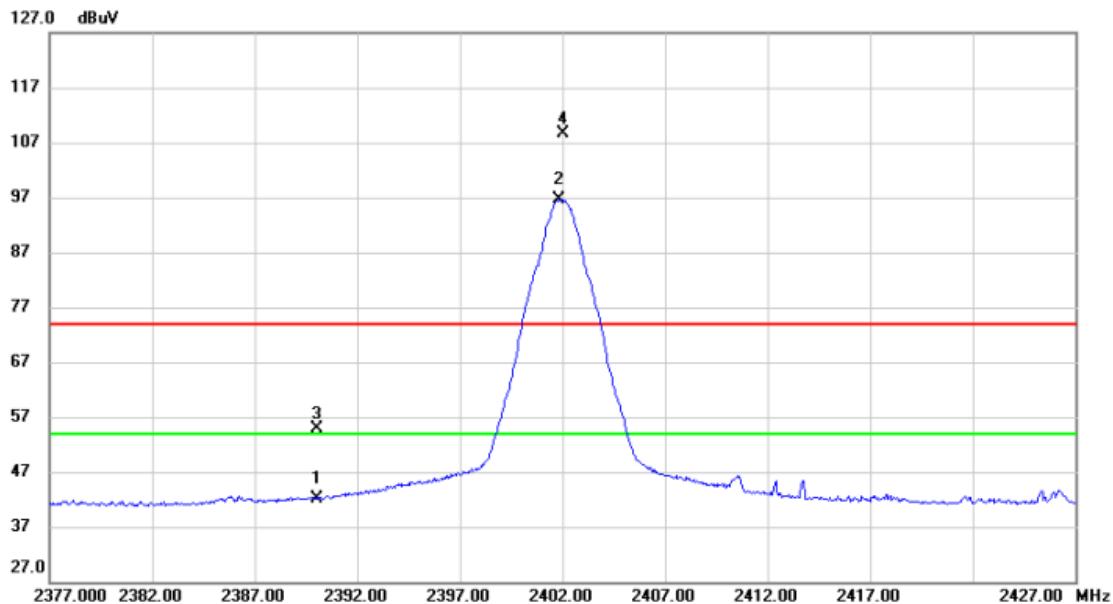


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		2390.000	9.53	32.63	42.16	54.00	-11.84	AVG	
2	*	2401.850	64.03	32.67	96.70	54.00	42.70	AVG	
3		2390.000	22.37	32.63	55.00	74.00	-19.00	peak	
4	X	2402.050	76.05	32.67	108.72	74.00	34.72	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH01_2Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

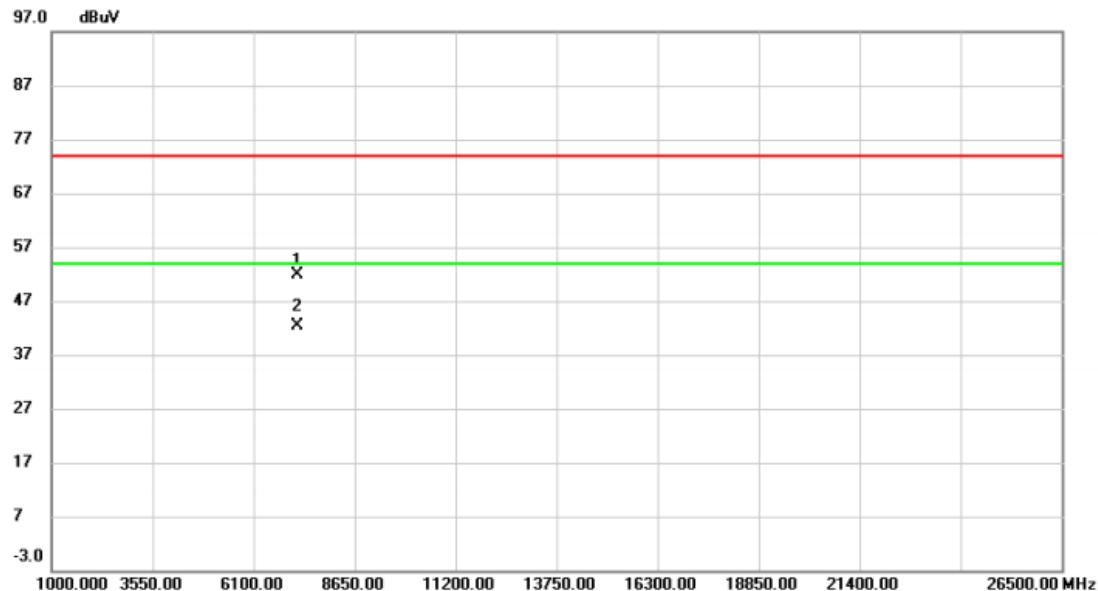


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV	dB	Detector	Comment
1		7196.500	60.88	-9.08	51.80	74.00	-22.20	peak
2	*	7196.500	51.51	-9.08	42.43	54.00	-11.57	AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2441 MHz _CH40_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

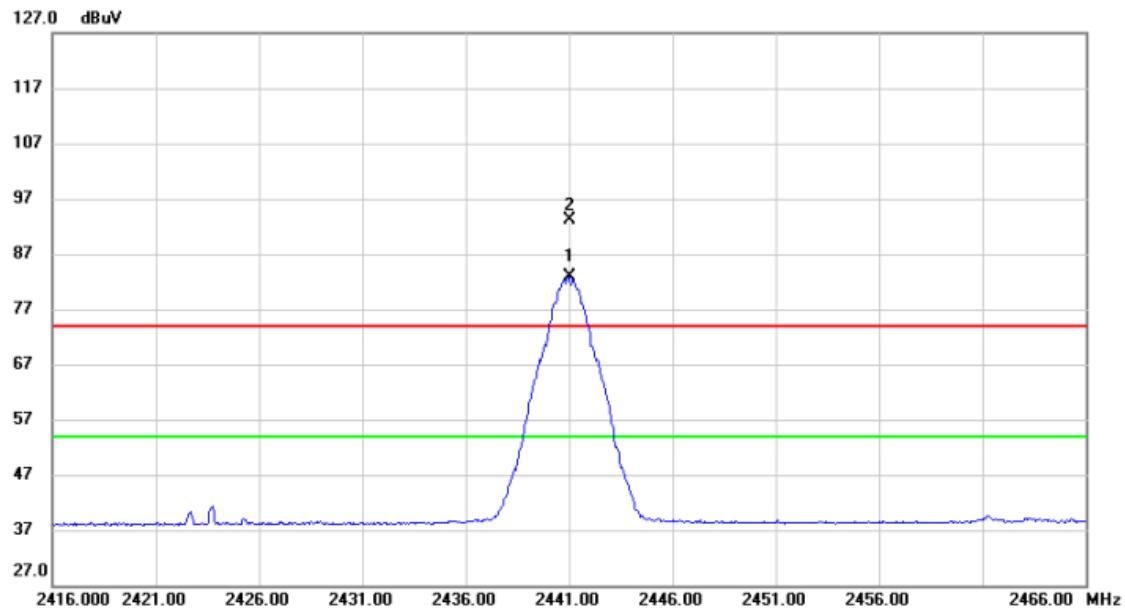


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector Comment
1	*	2441.000	50.04	32.82	82.86	54.00	28.86	AVG
2	X	2441.000	60.33	32.82	93.15	74.00	19.15	peak

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2441 MHz _CH40_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

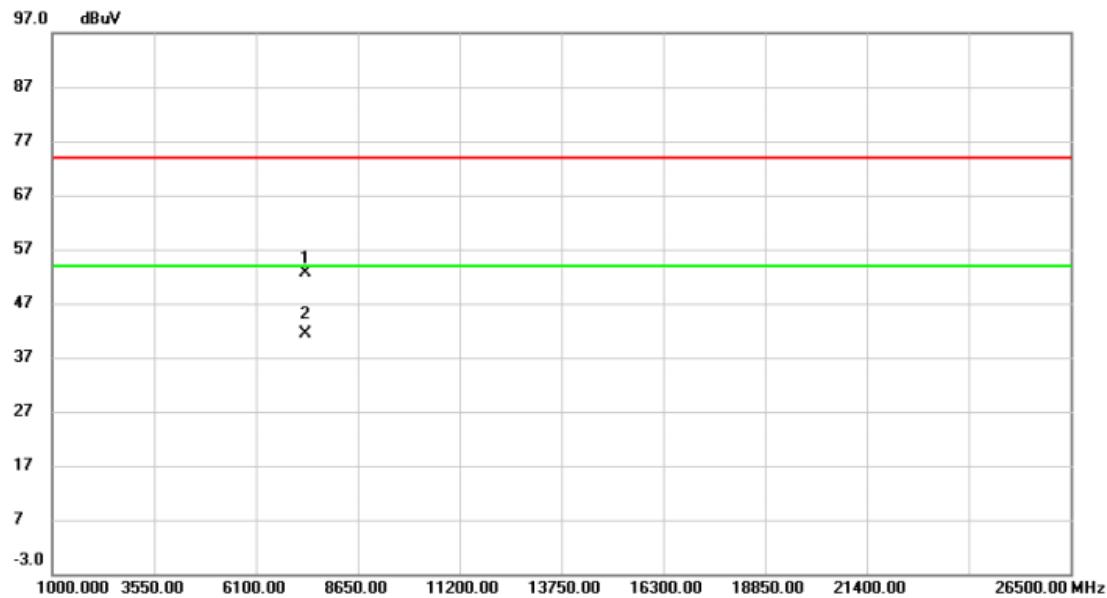


No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	7324.000	61.39	-8.68	52.71	74.00	-21.29	peak
2 *	7324.000	50.08	-8.68	41.40	54.00	-12.60	AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2441 MHz _CH40_2Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

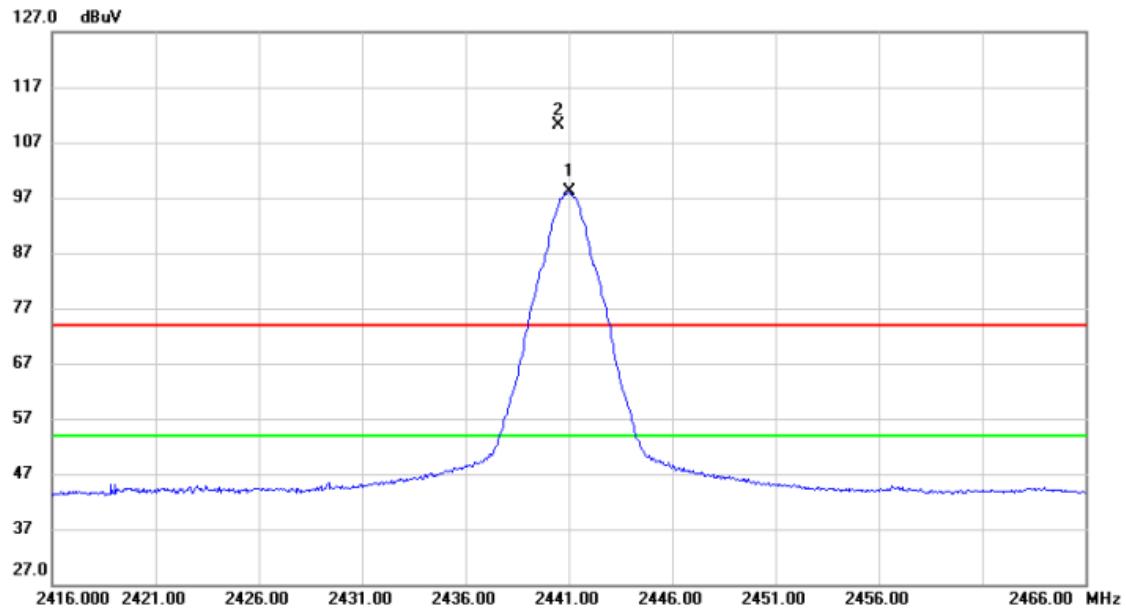


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV	dB	Detector	Comment
1	*	2441.050	65.32	32.82	98.14	54.00	44.14	AVG
2	X	2440.500	77.33	32.81	110.14	74.00	36.14	peak

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2441 MHz _CH40_2Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

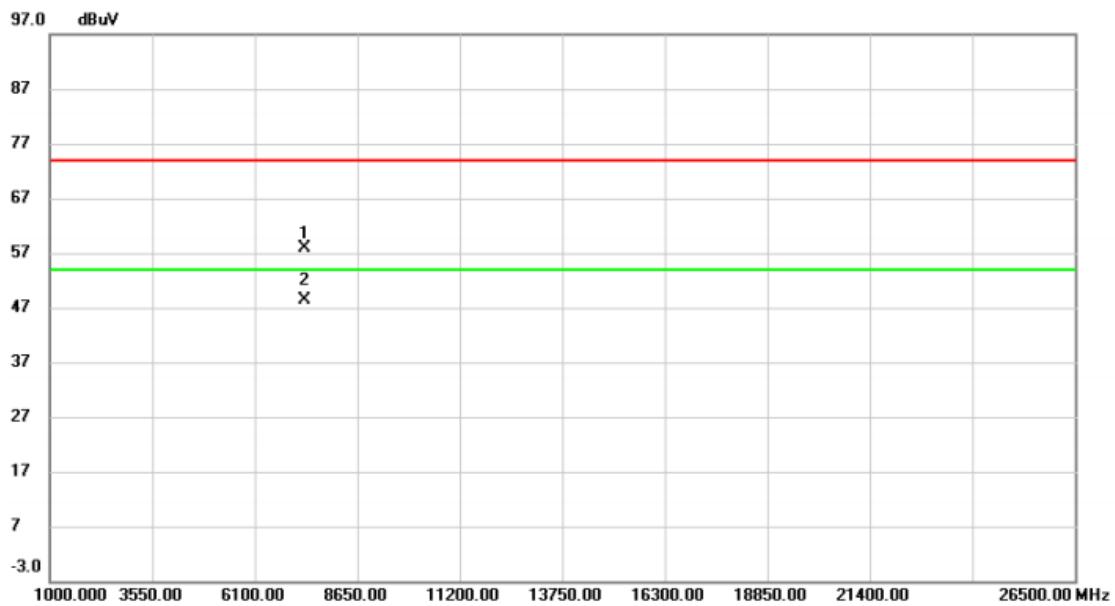


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV	dB	Detector	Comment
1		7324.000	66.65	-8.68	57.97	74.00	-16.03	peak
2	*	7324.000	57.01	-8.68	48.33	54.00	-5.67	AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH79_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

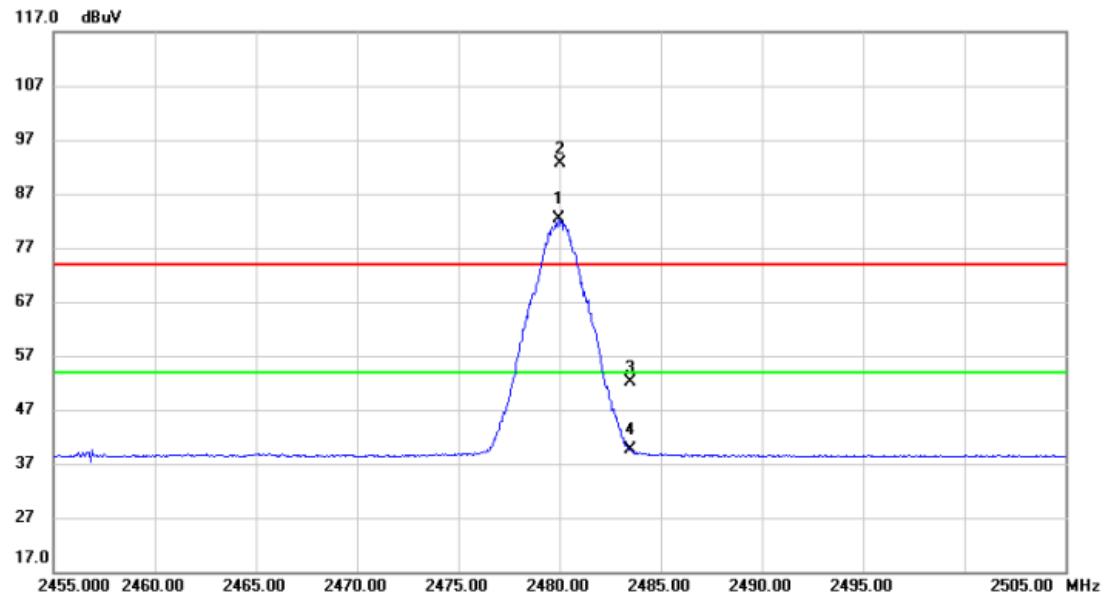


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dB	Margin	
								Detector
1	*	2479.950	49.32	32.96	82.28	54.00	28.28	AVG
2	X	2480.000	59.73	32.96	92.69	74.00	18.69	peak
3		2483.500	19.18	32.97	52.15	74.00	-21.85	peak
4		2483.500	6.66	32.97	39.63	54.00	-14.37	AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH79_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

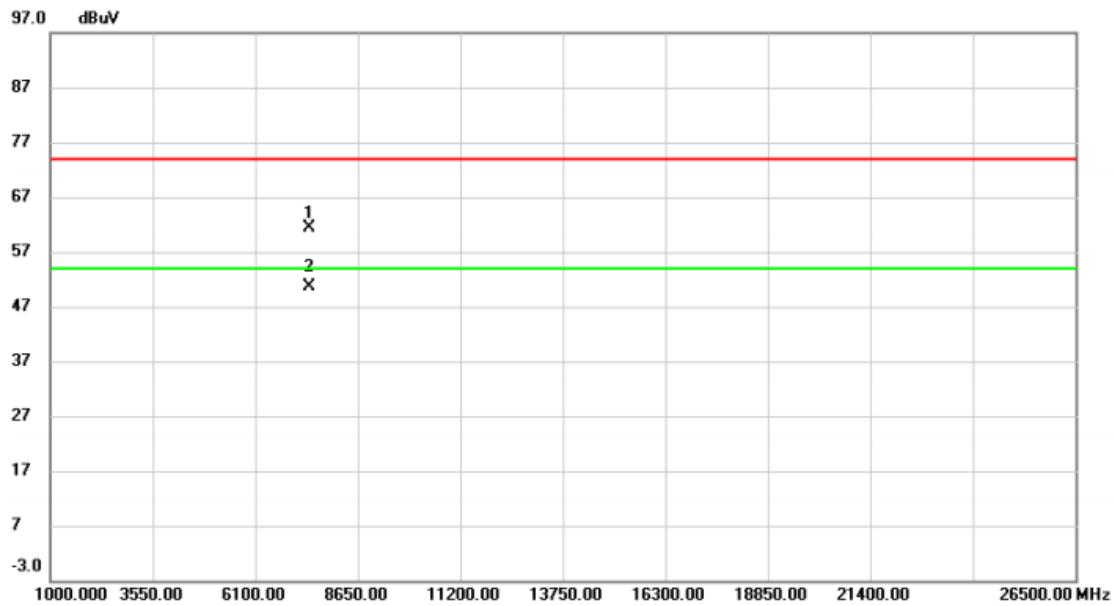


No. Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
		Level	Factor	ment		dB	Detector
1	7426.000	69.71	-8.36	61.35	74.00	-12.65	peak
2 *	7426.000	58.96	-8.36	50.60	54.00	-3.40	AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH79_2Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

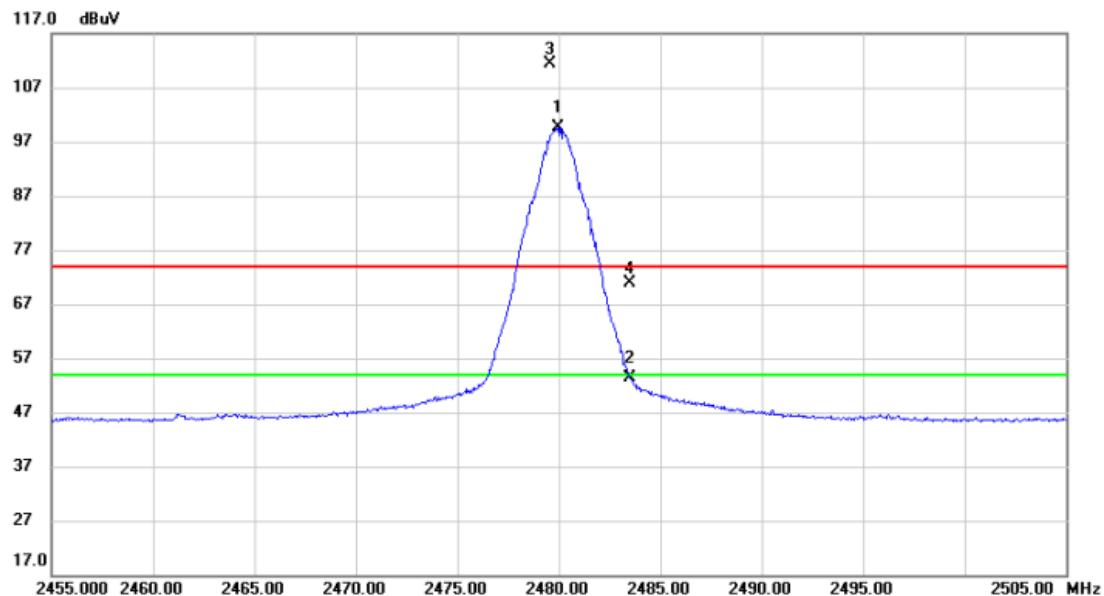


No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		dBuV	dB	dBuV	dBuV	dB	Detector
1 *	2479.950	66.66	32.96	99.62	54.00	45.62	AVG
2	2483.500	20.44	32.97	53.41	54.00	-0.59	AVG
3 X	2479.550	78.49	32.96	111.45	74.00	37.45	peak
4	2483.500	37.89	32.97	70.86	74.00	-3.14	peak

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH79_2Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

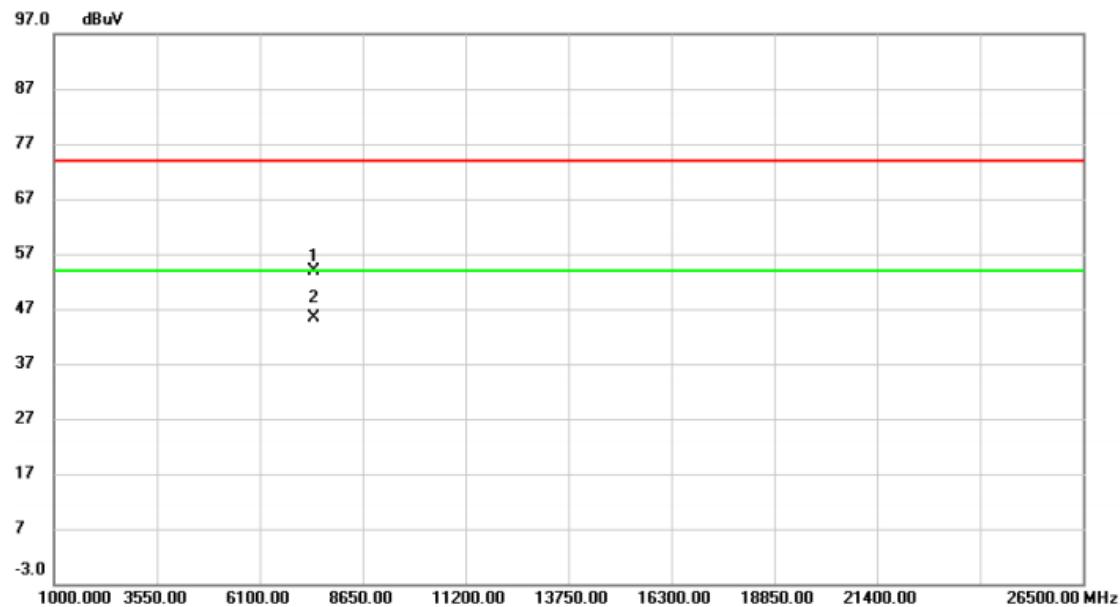

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		7426.000	62.23	-8.36	53.87	74.00	-20.13	peak	
2	*	7426.000	53.84	-8.36	45.48	54.00	-8.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode TX Mode _2Mbps

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Test Result
01	2402	1.068	2.060	0.5	Pass
40	2441	1.104	2.008	0.5	Pass
79	2480	1.112	2.031	0.5	Pass

CH01

CH40
6 dB Bandwidth

CH79



99 % Occupied Bandwidth



APPENDIX F - MAXIMUM OUTPUT POWER

Test Mode TX Mode _2Mbps

Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	5.59	0.0036	30.00	1.0000	Pass
2441	5.05	0.0032	30.00	1.0000	Pass
2480	4.85	0.0031	30.00	1.0000	Pass




APPENDIX G - CONDUCTED SPURIOUS EMISSION


Test Mode

TX Mode _2Mbps

Bandedge CH01 (Lower)

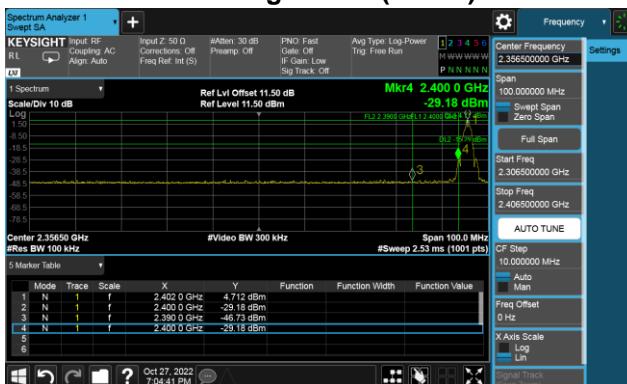

Bandedge CH79 (Upper)

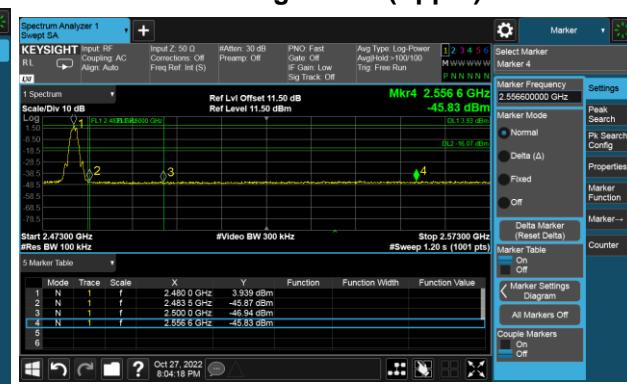

CH01 – 10th Harmonic of the fundamental frequency



CH40 – 10th Harmonic of the fundamental frequency



CH79 – 10th Harmonic of the fundamental frequency




APPENDIX H - POWER SPECTRAL DENSITY

Test Mode TX Mode _2Mbps

Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Max. Limit (dBm/3 kHz)	Test Result
01	2402	-12.44	8.00	Pass
40	2441	-12.79	8.00	Pass
79	2480	-12.66	8.00	Pass

CH01

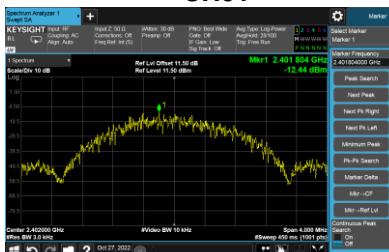

CH40



CH79



End of Test Report