

# FCC Radio Test Report

## FCC ID: RWO-RZ020248

This report concerns (check one): Original Grant Class II Change

**Project No.** : 1712C046  
**Equipment** : Gaming Mouse Mat  
**Test Model** : RZ02-0248  
**Series Model** : RZ02-0248XXXX-XXXX (X: Can be 0-9, A-Z)  
**Applicant** : Razer Inc.  
**Address** : 201 3rd Street, Suite 900, San Francisco, CA 94103, USA

**Date of Receipt** : Dec. 07, 2017  
**Date of Test** : Dec. 13, 2017 ~ Jan. 26, 2018  
**Issued Date** : Feb. 02, 2018  
**Tested by** : BTL Inc.

**Testing Engineer** : Welly Zhou  
(Welly Zhou)

**Technical Manager** : Shawn Xiao  
(Shawn Xiao)

**Authorized Signatory** : Steven Lu  
(Steven Lu)

## B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,  
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



## Declaration

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL**'s reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL**'s report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

**BTL**'s laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

## Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
<b>1 . CERTIFICATION</b>	<b>6</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>7</b>
<b>2.1 TEST FACILITY</b>	<b>8</b>
<b>2.2 MEASUREMENT UNCERTAINTY</b>	<b>8</b>
<b>3 . GENERAL INFORMATION</b>	<b>9</b>
<b>3.1 GENERAL DESCRIPTION OF EUT</b>	<b>9</b>
<b>3.2 DESCRIPTION OF TEST MODES</b>	<b>11</b>
<b>3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING</b>	<b>11</b>
<b>3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED</b>	<b>12</b>
<b>3.5 DESCRIPTION OF SUPPORT UNITS</b>	<b>12</b>
<b>4 . EMC EMISSION TEST</b>	<b>13</b>
<b>4.1 CONDUCTED EMISSION MEASUREMENT</b>	<b>13</b>
<b>4.1.1 POWER LINE CONDUCTED EMISSION LIMITS</b>	<b>13</b>
<b>4.1.2 TEST PROCEDURE</b>	<b>13</b>
<b>4.1.3 DEVIATION FROM TEST STANDARD</b>	<b>13</b>
<b>4.1.4 TEST SETUP</b>	<b>14</b>
<b>4.1.5 EUT OPERATING CONDITIONS</b>	<b>14</b>
<b>4.1.6 EUT TEST CONDITIONS</b>	<b>14</b>
<b>4.1.7 TEST RESULTS</b>	<b>14</b>
<b>4.2 RADIATED EMISSION MEASUREMENT</b>	<b>15</b>
<b>4.2.1 RADIATED EMISSION LIMITS</b>	<b>15</b>
<b>4.2.2 TEST PROCEDURE</b>	<b>16</b>
<b>4.2.3 DEVIATION FROM TEST STANDARD</b>	<b>16</b>
<b>4.2.4 TEST SETUP</b>	<b>17</b>
<b>4.2.5 EUT OPERATING CONDITIONS</b>	<b>18</b>
<b>4.2.6 EUT TEST CONDITIONS</b>	<b>18</b>
<b>4.2.7 TEST RESULTS (9KHZ TO 30MHZ)</b>	<b>18</b>
<b>4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)</b>	<b>19</b>
<b>4.2.9 TEST RESULTS (ABOVE 1000 MHZ)</b>	<b>19</b>
<b>5 . BANDWIDTH TEST</b>	<b>20</b>
<b>5.1 APPLIED PROCEDURES / LIMIT</b>	<b>20</b>
<b>5.1.1 TEST PROCEDURE</b>	<b>20</b>
<b>5.1.2 DEVIATION FROM STANDARD</b>	<b>20</b>
<b>5.1.3 TEST SETUP</b>	<b>20</b>
<b>5.1.4 EUT OPERATION CONDITIONS</b>	<b>20</b>
<b>5.1.5 EUT TEST CONDITIONS</b>	<b>20</b>
<b>5.1.6 TEST RESULTS</b>	<b>20</b>
<b>6 . CONDUCTED OUTPUT POWER TEST</b>	<b>21</b>

## Table of Contents

## Page

6.1 APPLIED PROCEDURES / LIMIT	21
6.1.1 TEST PROCEDURE	21
6.1.2 DEVIATION FROM STANDARD	21
6.1.3 TEST SETUP	21
6.1.4 EUT OPERATION CONDITIONS	21
6.1.5 EUT TEST CONDITIONS	21
6.1.6 TEST RESULTS	21
<b>7 . ANTENNA CONDUCTED SPURIOUS EMISSION</b>	<b>22</b>
7.1 APPLIED PROCEDURES / LIMIT	22
7.1.1 TEST PROCEDURE	22
7.1.2 DEVIATION FROM STANDARD	22
7.1.3 TEST SETUP	22
7.1.4 EUT OPERATION CONDITIONS	22
7.1.5 EUT OPERATION CONDITIONS	22
7.1.6 TEST RESULTS	22
<b>8 . POWER SPECTRAL DENSITY TEST</b>	<b>23</b>
8.1 APPLIED PROCEDURES / LIMIT	23
8.1.1 TEST PROCEDURE	23
8.1.2 DEVIATION FROM STANDARD	23
8.1.3 TEST SETUP	23
8.1.4 EUT OPERATION CONDITIONS	23
8.1.5 EUT TEST CONDITIONS	23
8.1.6 TEST RESULTS	23
<b>9 . MEASUREMENT INSTRUMENTS LIST</b>	<b>24</b>
<b>APPENDIX A - CONDUCTED EMISSION</b>	<b>26</b>
<b>APPENDIX B - RADIATED EMISSION (9KHZ TO 30MHZ)</b>	<b>29</b>
<b>APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)</b>	<b>34</b>
<b>APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)</b>	<b>41</b>
<b>APPENDIX E - BANDWIDTH</b>	<b>54</b>
<b>APPENDIX F - CONDUCTED POWER TEST</b>	<b>57</b>
<b>APPENDIX G - ANTENNA CONDUCTED SPURIOUS EMISSION</b>	<b>60</b>
<b>APPENDIX H - POWER SPECTRAL DENSITY TEST</b>	<b>64</b>

## REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1712C046	Original Issue.	Feb. 02, 2018
MDG1802004	Date rate change from 1Mbps to 2Mbps	Feb. 06, 2018

## 1. CERTIFICATION

Equipment : Gaming Mouse Mat  
Brand Name : RAZER  
Test Model : RZ02-0248  
Series Model : RZ02-0248XXXX-XXXX (X: Can be 0-9, A-Z)  
Applicant : Razer Inc.  
Manufacturer : Razer (Asia-Pacific) Pte.,Ltd.  
Address : 514 Chai Chee Lane #07-01 ~ 06 Singapore 469029  
Factory : RAZER TECHNOLOGY AND DEVELOPMENT (SHENZHEN) CO., LTD  
Address : East Wing, 3rd Floor, Block 2, Phase 1 of Vision Shenzhen Business Park Keji South Road, Hi-Tech Industrial Park, Shenzhen 518057, China  
Date of Test : Dec. 13, 2017 ~ Jan. 26, 2018  
Test Sample : Engineering Sample  
Standard(s) : FCC Part15, Subpart C (15.247) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1712C046) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C			
Standard(s) Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247(d)	Antenna conducted Spurious Emission	PASS	
15.247(a)(2)	6dB Bandwidth	PASS	
15.247(b)(3)	AVG Power	PASS	
15.247(e)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	
15.209/15.205	Transmitter Radiated Emissions	PASS	
15.209/15.205	Band Edge Emissions	PASS	

### NOTE:

(1)" N/A" denotes test is not applicable to this device.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 854385

BTL's designation number for FCC: CN5020

## 2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty figures shall be calculated according the methods described in the ETSI TR 100 028 and shall correspond to an expansion factor (coverage factor)  $k=1.96$  or  $k=2$ (which provide confidence levels of respectively 90% and 95.45% in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)).

Measurement Uncertainty for a Level of Confidence of 95 %,  $U=2xU_{C}(y)$ .

The BTL measurement uncertainty as below table:

### A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 KHz ~ 30MHz	2.32

### B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9KHz~30MHz	V	3.79
		9KHz~30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06
		1GHz~18GHz	V	3.12
		1GHz~18GHz	H	3.68
		18GHz~40GHz	V	4.15
		18GHz~40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	Gaming Mouse Mat	
Brand Name	RAZER	
Test Model	RZ02-0248	
Series Model	RZ02-0248XXXX-XXXX (X: Can be 0-9, A-Z)	
Model Difference	<p>It is the same as the basic model and X is used to define which country it is for under the same family series.</p> <p>The system's model is RZ84-0248, and the system contains of Gaming Mouse (Model: RZ01-0248) and Gaming Mouse Mat (Model: RZ02-0248).</p>	
Product Description	Operation Frequency	2402-2480 MHz
	Modulation Technology	GFSK
	Bit Rate of Transmitter	2 Mbps
	Output Power (Max.)	6.18dBm
Power Source	Supplied from USB Port	
Power Rating	DC 5V 900mA	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

## 2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2402	28	2429	55	2456
02	2403	29	2430	56	2457
03	2404	30	2431	57	2458
04	2405	31	2432	58	2459
05	2406	32	2433	59	2460
06	2407	33	2434	60	2461
07	2408	34	2435	61	2462
08	2409	35	2436	62	2463
09	2410	36	2437	63	2464
10	2411	37	2438	64	2465
11	2412	38	2439	65	2466
12	2413	39	2440	66	2467
13	2414	40	2441	67	2468
14	2415	41	2442	68	2469
15	2416	42	2443	69	2470
16	2417	43	2444	70	2471
17	2418	44	2445	71	2472
18	2419	45	2446	72	2473
19	2420	46	2447	73	2474
20	2421	47	2448	74	2475
21	2422	48	2449	75	2476
22	2423	49	2450	76	2477
23	2424	50	2451	77	2478
24	2425	51	2452	78	2479
25	2426	52	2453	79	2480
26	2427	53	2454		
27	2428	54	2455		

## 3. Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Chip	N/A	0.50

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode <b>NOTE (1)</b>

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 1	TX Mode

<b>For Radiated Test</b>	
<b>Final Test Mode</b>	<b>Description</b>
Mode 1	TX Mode <b>NOTE (1)</b>

Note:-


(1) The measurements are performed at the high, middle, low available channels.

### 3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test Software Version	N/A		
Frequency (MHz)	2402	2440	2480
-	N/A	N/A	N/A

### 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

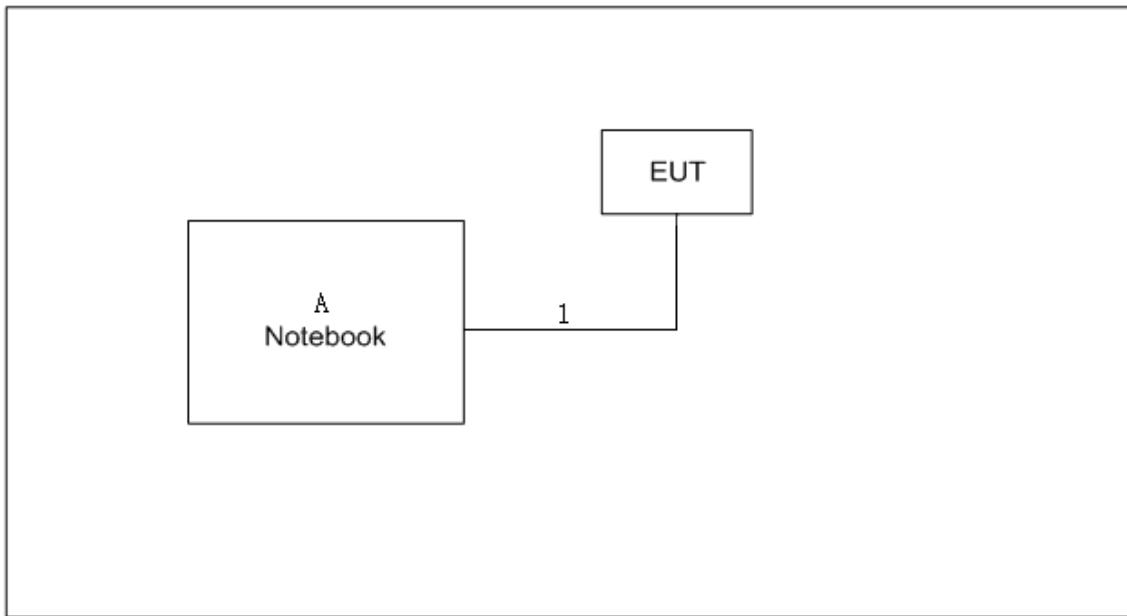

### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.
A	Notebook	Lenovo	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	YES	1.8m	USB CABLE

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 -0.5	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

(1) The limit of " \* " decreases with the logarithm of the frequency

(2) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


#### 4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

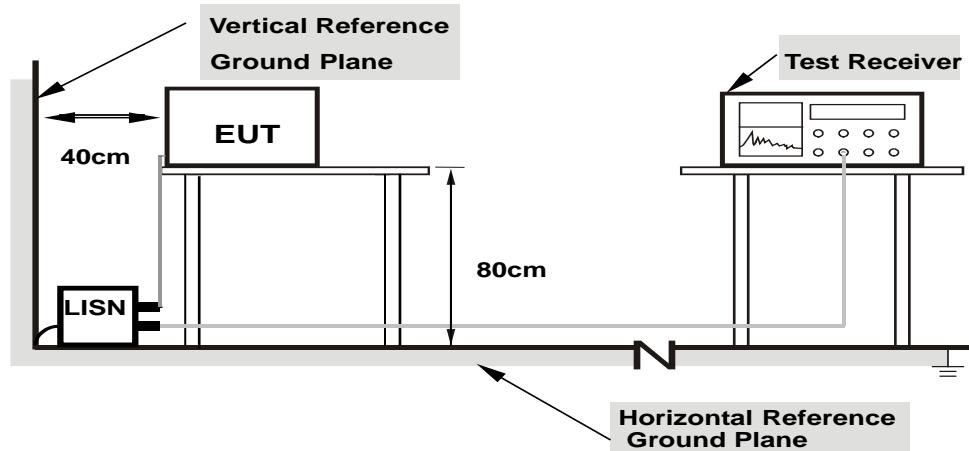

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

#### 4.1.6 EUT TEST CONDITIONS

Temperature: 25°C    Relative Humidity: 53%    Test Voltage: AC 120V/60Hz

#### 4.1.7 TEST RESULTS

Please refer to the Appendix A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “\*” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.
- (3) “N/A” denotes test is not applicable to this device.

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

#### LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

#### Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
 Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	RBW 1MHz VBW 3MHz peak detector for Pk value RMS detector for AV value

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

#### 4.2.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.2.3 DEVIATION FROM TEST STANDARD


No deviation

#### 4.2.4 TEST SETUP


##### (A) Radiated Emission Test Set-Up Frequency Below 1 GHz

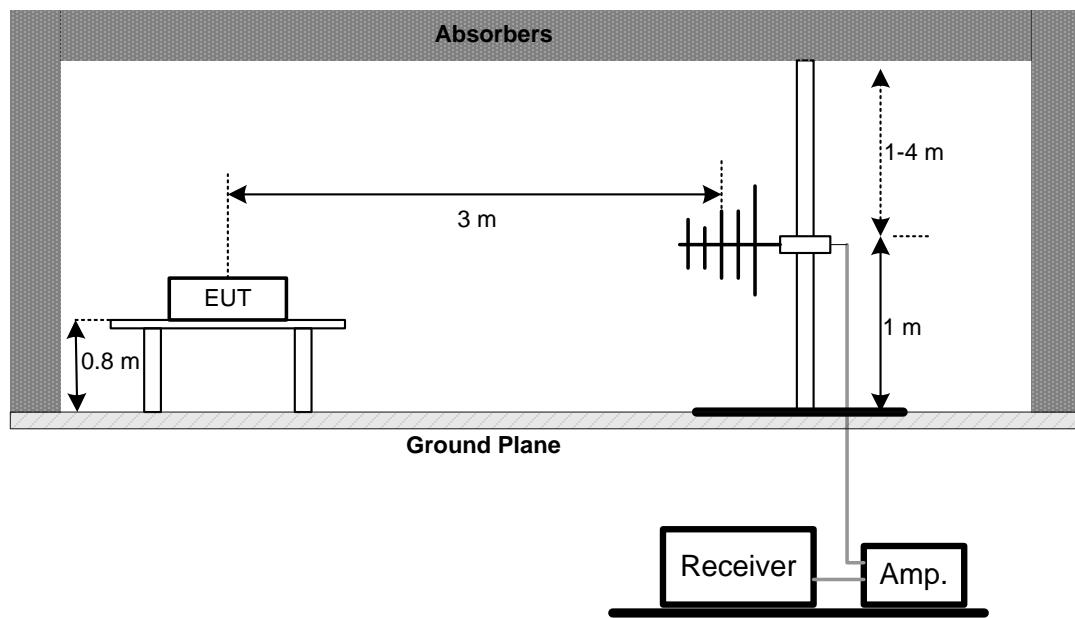

##### (B) Radiated Emission Test Set-Up Frequency Above 1 GHz

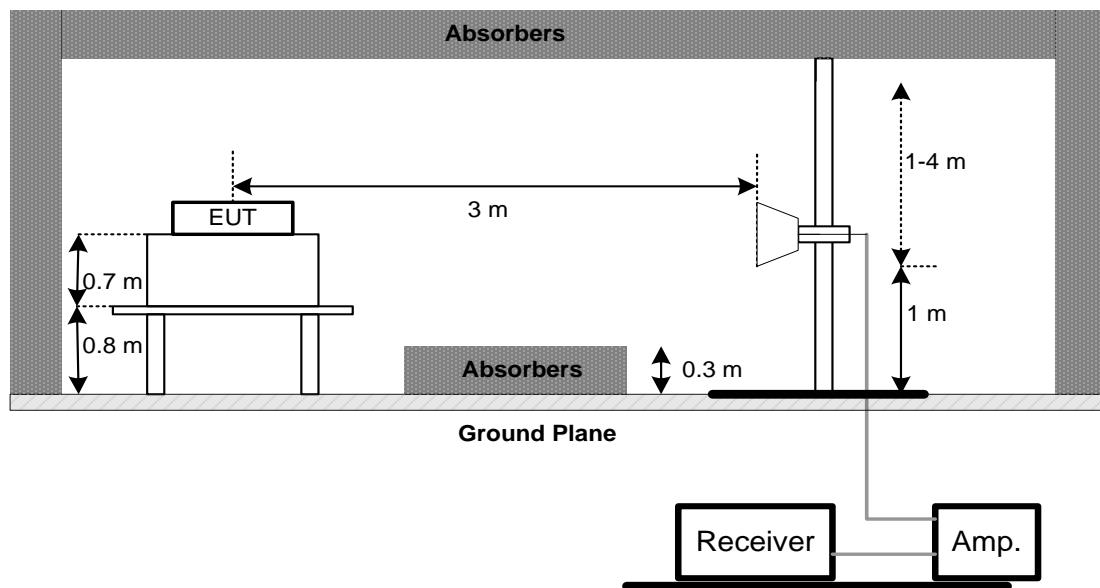

(C) For radiated emissions below 30MHz

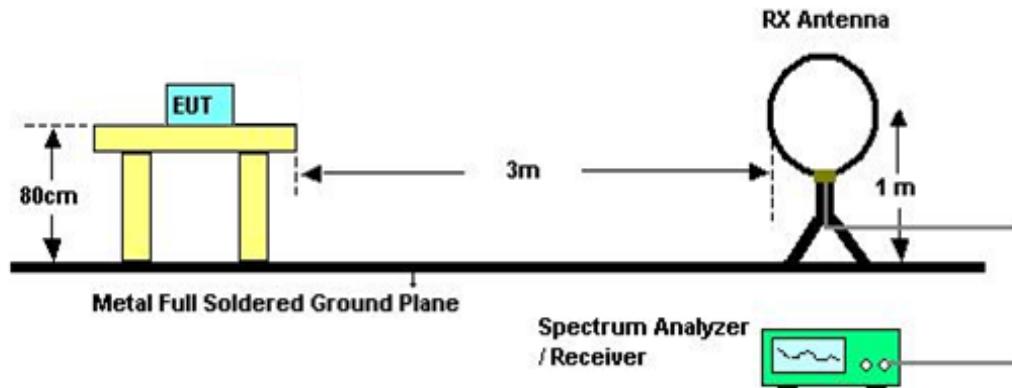

#### 4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### 4.2.6 EUT TEST CONDITIONS

Temperature: 25°C    Relative Humidity: 60%    Test Voltage: DC 5V

#### 4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Appendix B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

#### 4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)

Please refer to the Appendix C.

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz.
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

#### 4.2.9 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Appendix D.

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (3) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (4) EUT Orthogonal Axis:  
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (5) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (6) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 5. BANDWIDTH TEST

### 5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

#### 5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

#### 5.1.2 DEVIATION FROM STANDARD

No deviation.

#### 5.1.3 TEST SETUP



#### 5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### 5.1.5 EUT TEST CONDITIONS

Temperature: 25°C    Relative Humidity: 60%    Test Voltage: DC 5V

#### 5.1.6 TEST RESULTS

Please refer to the Appendix E.

## 6. CONDUCTED OUTPUT POWER TEST

### 6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Output Power	1 watt or 30dBm	2400-2483.5	PASS

#### 6.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- The maximum conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance v03r05.

#### 6.1.2 DEVIATION FROM STANDARD

No deviation.

#### 6.1.3 TEST SETUP



#### 6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### 6.1.5 EUT TEST CONDITIONS

Temperature: 25°C    Relative Humidity: 60%    Test Voltage: DC 5V

#### 6.1.6 TEST RESULTS

Please refer to the Appendix F.

## 7. ANTENNA CONDUCTED SPURIOUS EMISSION

### 7.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

#### 7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 10 ms.
- c. Offset=antenna gain+cable loss

#### 7.1.2 DEVIATION FROM STANDARD

No deviation.

#### 7.1.3 TEST SETUP



#### 7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### 7.1.5 EUT OPERATION CONDITIONS

Temperature: 25°C    Relative Humidity: 60%    Test Voltage: DC 5V

#### 7.1.6 TEST RESULTS

Please refer to the Appendix G.

## 8. POWER SPECTRAL DENSITY TEST

### 8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


#### 8.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW=3KHz, VBW=10 KHz, Sweep time = auto.

#### 8.1.2 DEVIATION FROM STANDARD

No deviation.

#### 8.1.3 TEST SETUP

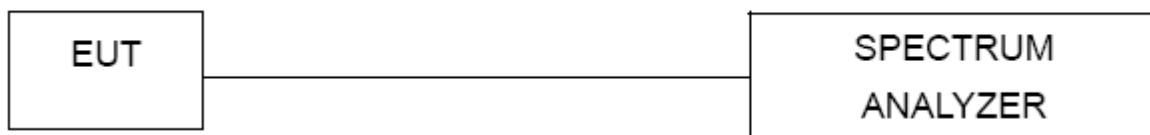

#### 8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### 8.1.5 EUT TEST CONDITIONS

Temperature: 25°C    Relative Humidity: 60%    Test Voltage: DC 5V

#### 8.1.6 TEST RESULTS

Please refer to the Appendix H.

## 9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Mar. 26, 2018
2	LISN	EMCO	3816/2	52765	Mar. 26, 2018
3	50Ω Terminator	SHX	TF2-3G-A	8122901	Mar. 26, 2018
4	TWO-LINE V-NETWORK	R&S	ENV216	101447	Mar. 26, 2018
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Oct. 19, 2018

Radiated Emission Below 1GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 26, 2018
2	Amplifier	HP	8447D	2944A09673	Oct. 19, 2018
3	Receiver	Agilent	N9038A	MY52130039	Aug. 20, 2018
4	Cable	emci	LMR-400(30MHz-1 GHz)(8m+5m)	N/A	Jun. 26, 2018
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	Antenna	EM	EM-6876-1	230	Mar. 06, 2018

**Radiated Emission Above 1GHz**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	Mar. 26, 2018
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jun. 08, 2018
3	Amplifier	Agilent	8449B	3008A02274	May. 16, 2018
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 26, 2018
5	Receiver	Agilent	N9038A	MY52130039	Aug. 20, 2018
6	Antenna	EM	EM-6876-1	230	Mar. 06, 2018
7	Controller	CT	SC100	N/A	N/A
8	Controller	MF	MF-7802	MF780208416	N/A
9	Cable	emci	EMC104-SM-SM-1 2000(12m)	N/A	Jun. 26, 2018
10	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

**6dB Bandwidth Measurement**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

**Conducted Output Power Measurement**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

**Antenna Conducted Spurious Emission Measurement**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

**Power Spectral Density Measurement**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018


Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

## APPENDIX A - CONDUCTED EMISSION

Test Mode: TX Mode


## Line

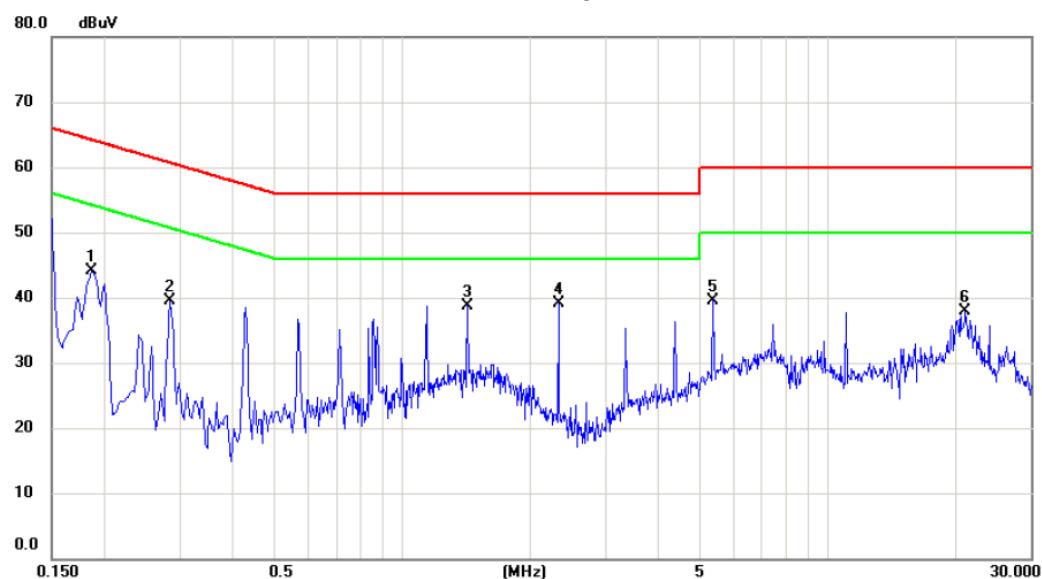

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1860	34.33	9.77	44.10	64.21	-20.11	peak	
2		0.2850	29.66	9.76	39.42	60.67	-21.25	peak	
3		1.4235	28.76	9.90	38.66	56.00	-17.34	peak	
4	*	2.3280	29.06	9.95	39.01	56.00	-16.99	peak	
5		5.3835	29.49	10.11	39.60	60.00	-20.40	peak	
6		21.0660	27.27	10.68	37.95	60.00	-22.05	peak	

Test Mode: TX Mode

## Neutral

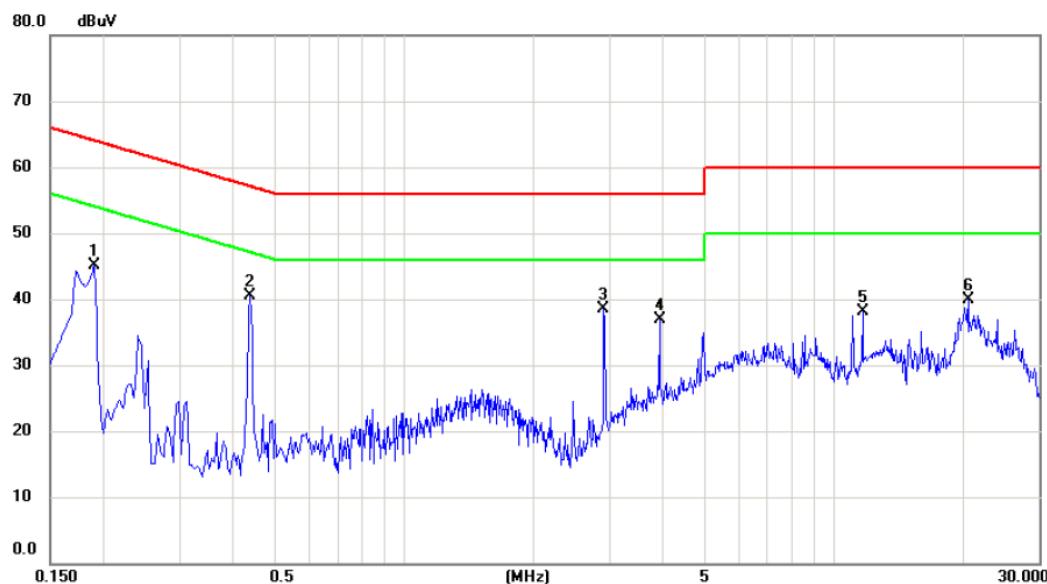


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dB	Margin Detector	Comment
1		0.1905	35.50	9.69	45.19	64.01	-18.82	peak
2	*	0.4380	30.85	9.69	40.54	57.10	-16.56	peak
3		2.9130	28.51	9.90	38.41	56.00	-17.59	peak
4		3.9345	26.93	9.95	36.88	56.00	-19.12	peak
5		11.6565	27.69	10.39	38.08	60.00	-21.92	peak
6		20.5620	29.09	10.77	39.86	60.00	-20.14	peak

## APPENDIX B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode: TX Mode


Ant 0°

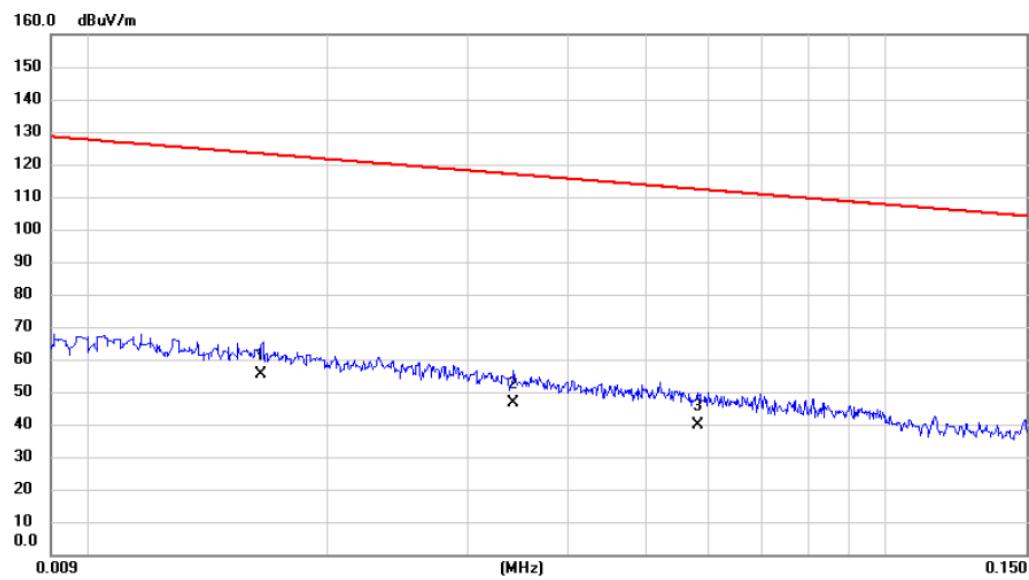

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1	*	0.017	35.36	20.07	55.43	123.26	-67.83	AVG
2		0.034	27.50	19.19	46.69	116.92	-70.23	AVG
3		0.058	21.08	18.57	39.65	112.32	-72.67	AVG

Test Mode: TX Mode


Ant 0°

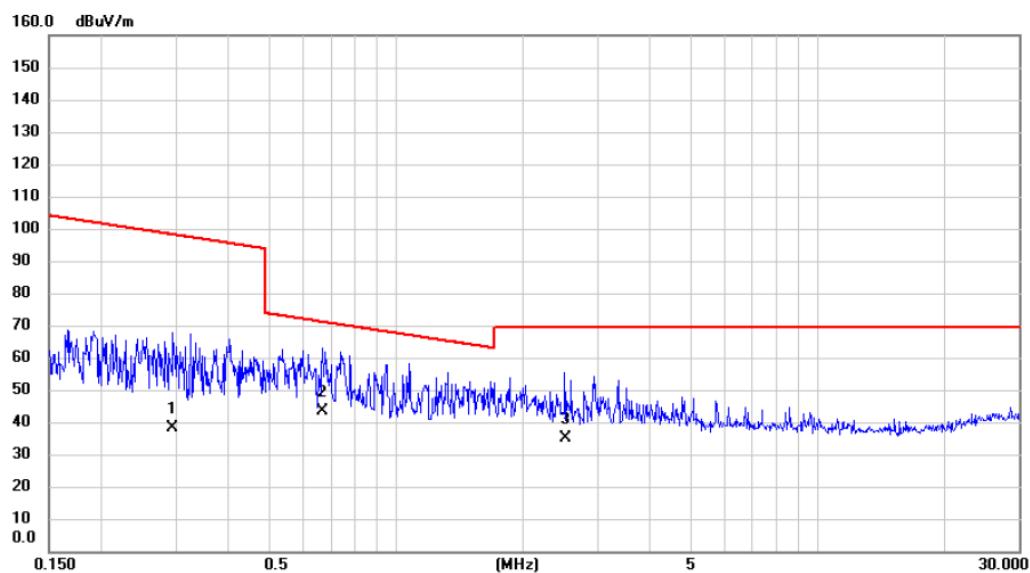

No. Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
		Level	Factor	ment				
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	0.294	21.50	16.62	38.12	98.24	-60.12	AVG	
2 *	0.668	27.00	16.28	43.28	71.10	-27.82	QP	
3	2.513	19.80	15.37	35.17	69.54	-34.37	QP	

Test Mode: TX Mode


Ant 90°

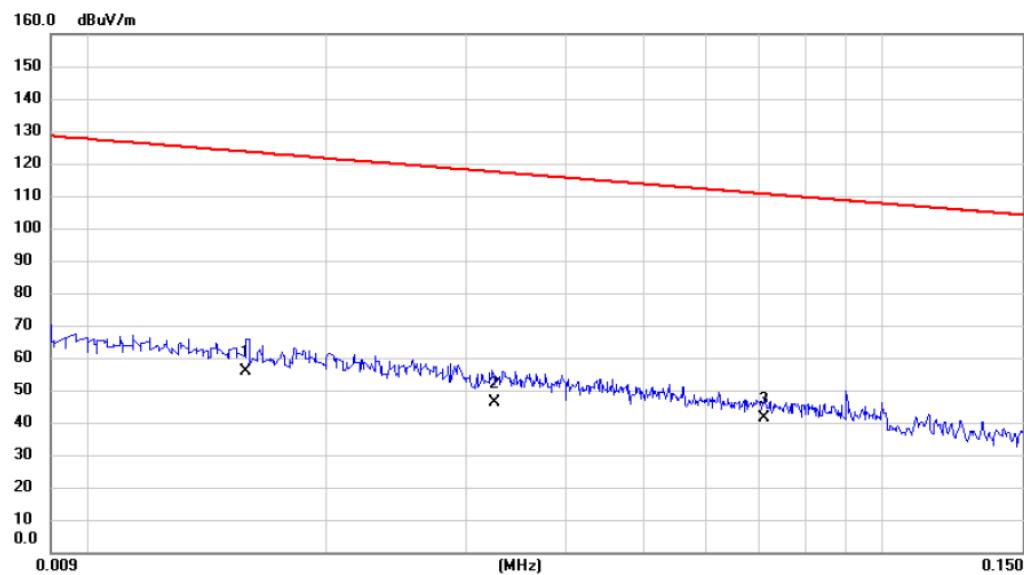

No.	Mk.	Reading	Correct	Measure-	Limit	Margin	Comment	
		Freq.	Level	Factor				
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1	*	0.016	35.69	20.17	55.86	123.63	-67.77	AVG
2		0.033	27.02	19.25	46.27	117.37	-71.10	AVG
3		0.071	22.95	18.31	41.26	110.58	-69.32	AVG

Test Mode: TX Mode

Ant 90°

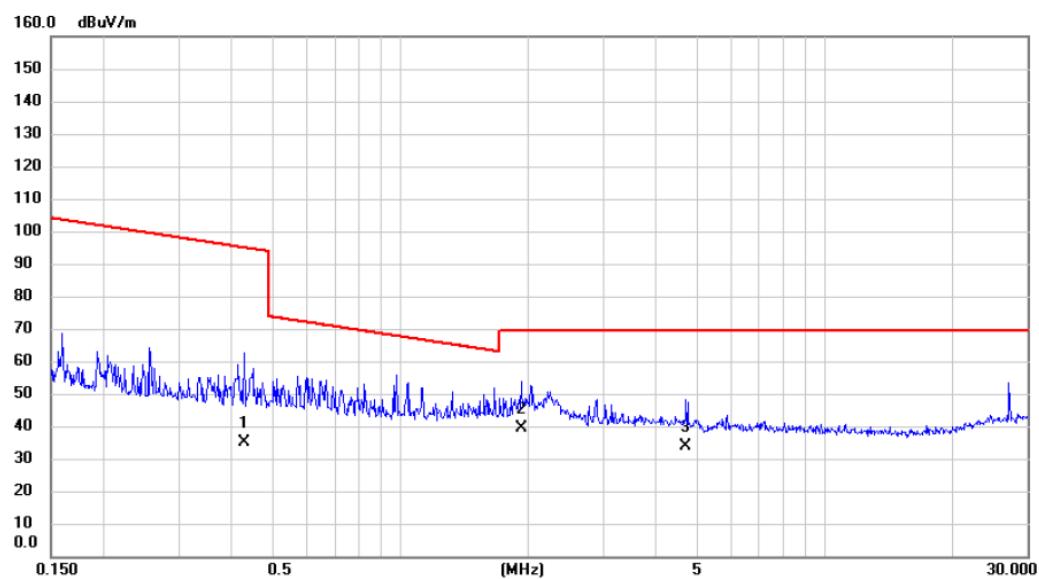


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1		0.428	18.40	16.53	34.93	94.97	-60.04	AVG
2	*	1.928	23.80	15.54	39.34	69.54	-30.20	QP
3		4.696	19.40	14.54	33.94	69.54	-35.60	QP

## APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)


Test Mode: TX 2402MHz

## Vertical

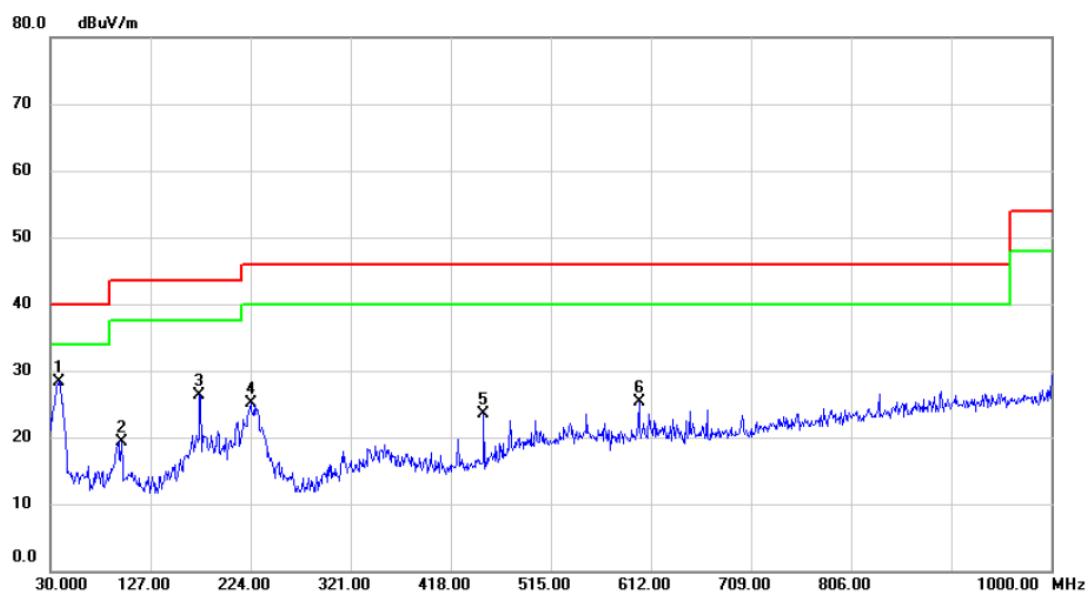

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB	Margin Detector	Comment
1	*	38.730	43.05	-14.74	28.31	40.00	-11.69	peak
2		98.870	37.92	-18.70	19.22	43.50	-24.28	peak
3		174.530	39.89	-13.53	26.36	43.50	-17.14	peak
4		224.000	40.67	-15.59	25.08	46.00	-20.92	peak
5		450.010	36.21	-12.69	23.52	46.00	-22.48	peak
6		600.360	35.13	-9.82	25.31	46.00	-20.69	peak


Test Mode: TX 2402MHz

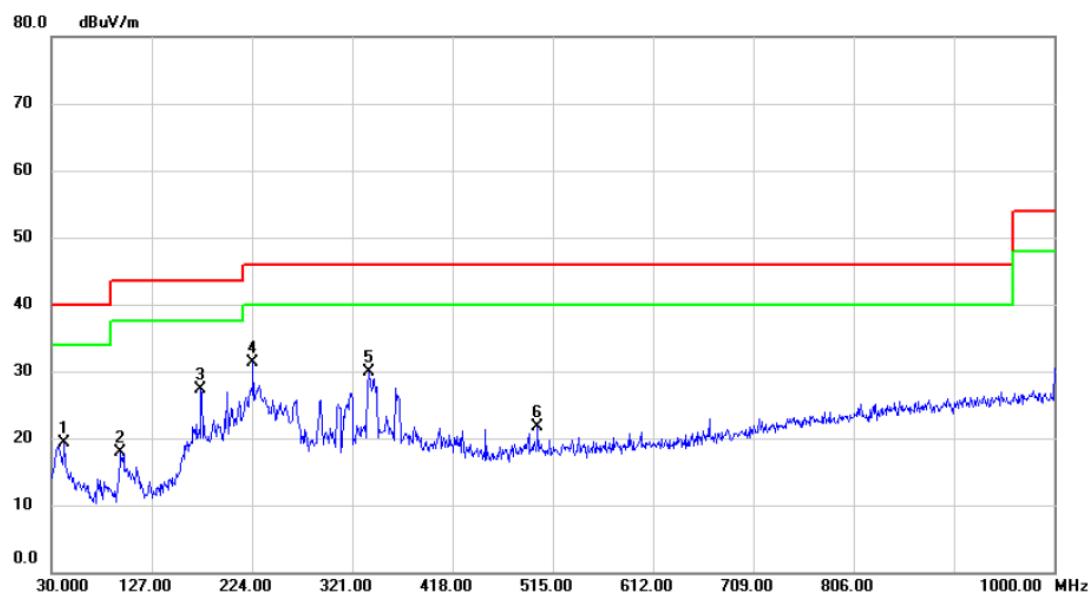**Horizontal**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dB			
1		42.610	33.46	-14.21	19.25	40.00	-20.75	peak	
2		96.930	37.18	-19.22	17.96	43.50	-25.54	peak	
3		174.530	40.88	-13.53	27.35	43.50	-16.15	peak	
4 *		224.970	47.02	-15.62	31.40	46.00	-14.60	peak	
5		337.490	44.17	-14.36	29.81	46.00	-16.19	peak	
6		500.450	33.36	-11.69	21.67	46.00	-24.33	peak	


Test Mode: TX 2440MHz

## Vertical

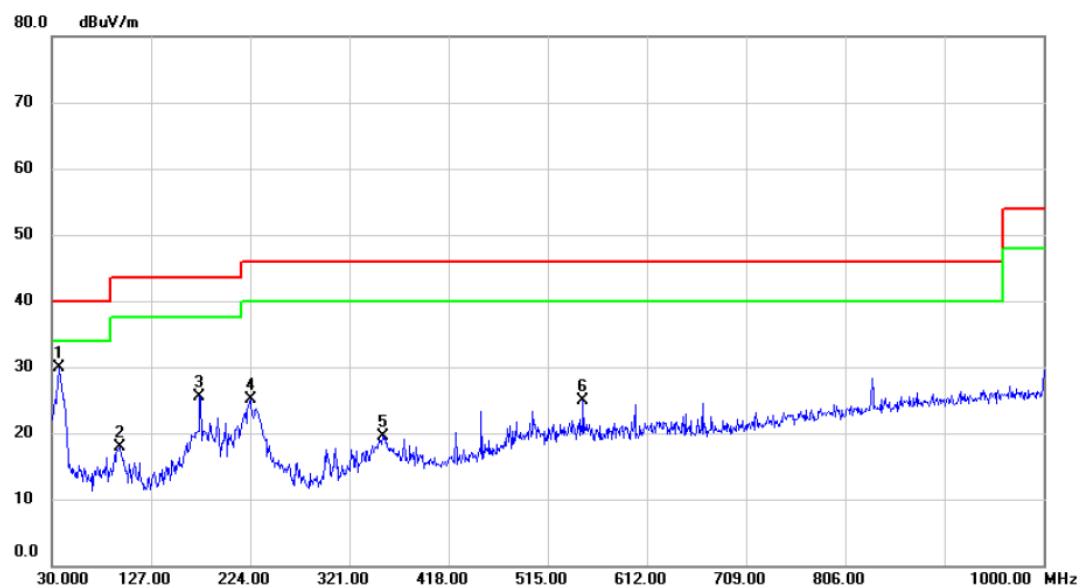

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	36.790	44.78	-14.97	29.81	40.00	-10.19	peak
2		95.960	37.41	-19.47	17.94	43.50	-25.56	peak
3		174.530	39.09	-13.53	25.56	43.50	-17.94	peak
4		224.000	40.60	-15.59	25.01	46.00	-20.99	peak
5		353.980	33.74	-14.17	19.57	46.00	-26.43	peak
6		549.920	35.80	-10.91	24.89	46.00	-21.11	peak


Test Mode: TX 2440MHz

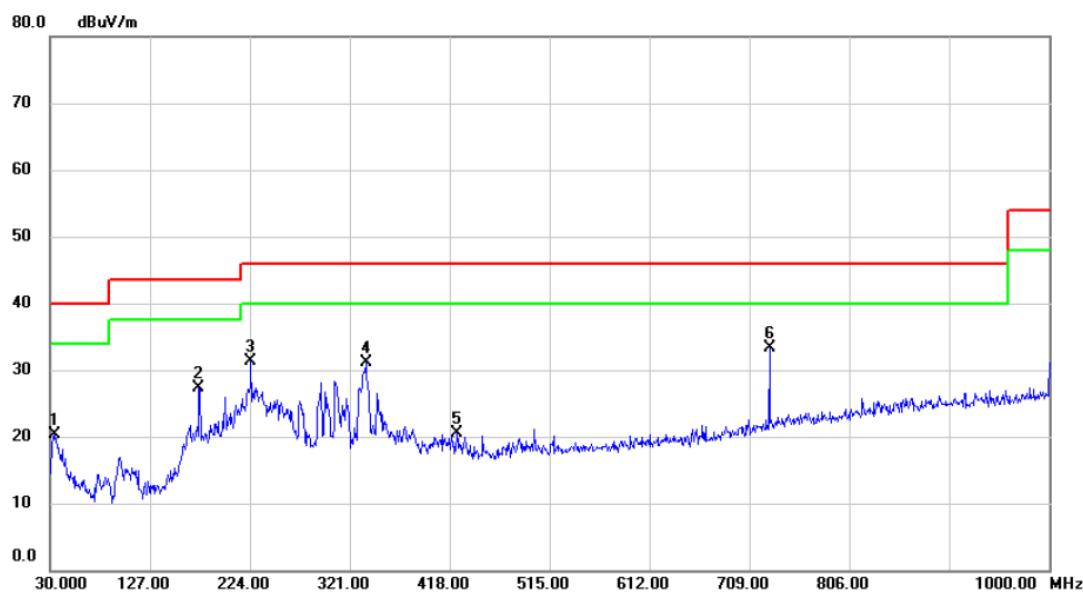**Horizontal**

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB	Margin Detector	Comment
1		33.880	35.57	-15.27	20.30	40.00	-19.70	peak
2		174.530	40.74	-13.53	27.21	43.50	-16.29	peak
3		224.970	47.01	-15.62	31.39	46.00	-14.61	peak
4		336.520	45.39	-14.37	31.02	46.00	-14.98	peak
5		424.790	33.70	-13.29	20.41	46.00	-25.59	peak
6 *		728.400	40.32	-7.08	33.24	46.00	-12.76	peak


Test Mode: TX 2480MHz

## Vertical

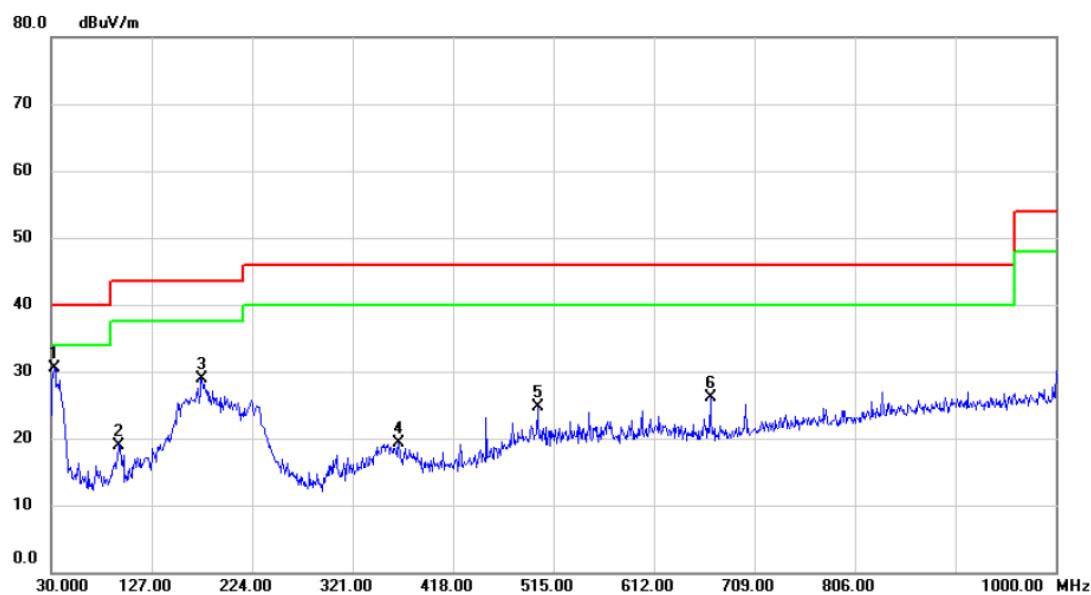

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB	Margin	Detector	Comment
1 *		32.910	45.88	-15.42	30.46	40.00	-9.54	peak	
2		94.990	38.72	-19.72	19.00	43.50	-24.50	peak	
3		175.500	42.37	-13.51	28.86	43.50	-14.64	peak	
4		365.620	33.40	-14.10	19.30	46.00	-26.70	peak	
5		499.480	36.44	-11.71	24.73	46.00	-21.27	peak	
6		666.320	34.71	-8.69	26.02	46.00	-19.98	peak	

Test Mode: TX 2480MHz

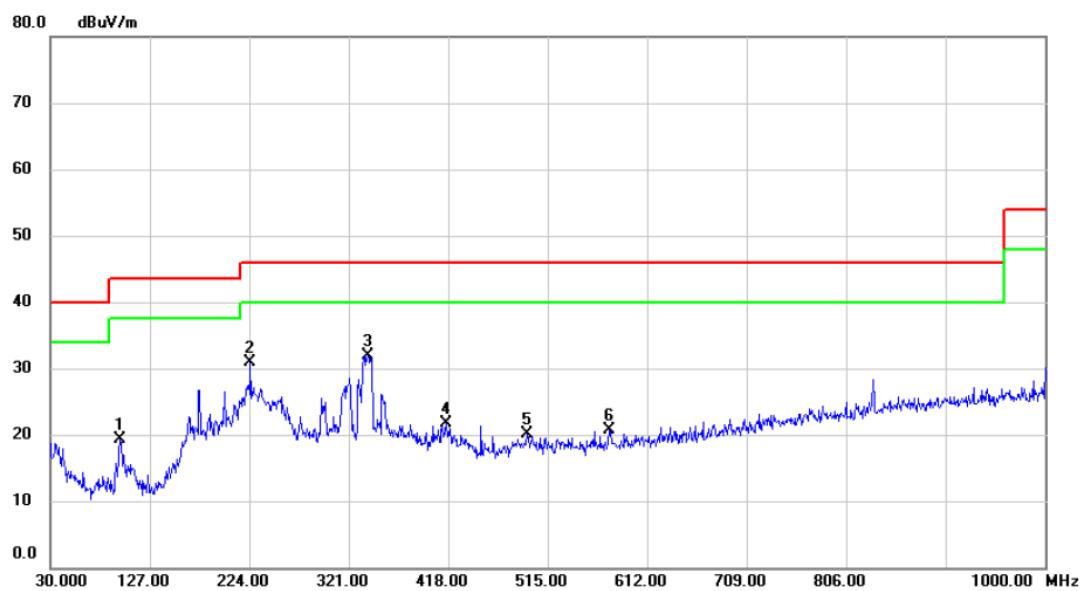
**Horizontal**

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		97.900	38.36	-18.97	19.39	43.50	-24.11	peak	
2		224.970	46.49	-15.62	30.87	46.00	-15.13	peak	
3 *		339.430	46.28	-14.34	31.94	46.00	-14.06	peak	
4		416.060	35.25	-13.50	21.75	46.00	-24.25	peak	
5		494.630	31.94	-11.81	20.13	46.00	-25.87	peak	
6		575.140	31.12	-10.37	20.75	46.00	-25.25	peak	

## APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)

Test Mode TX Mode\_2402 MHz


## Vertical

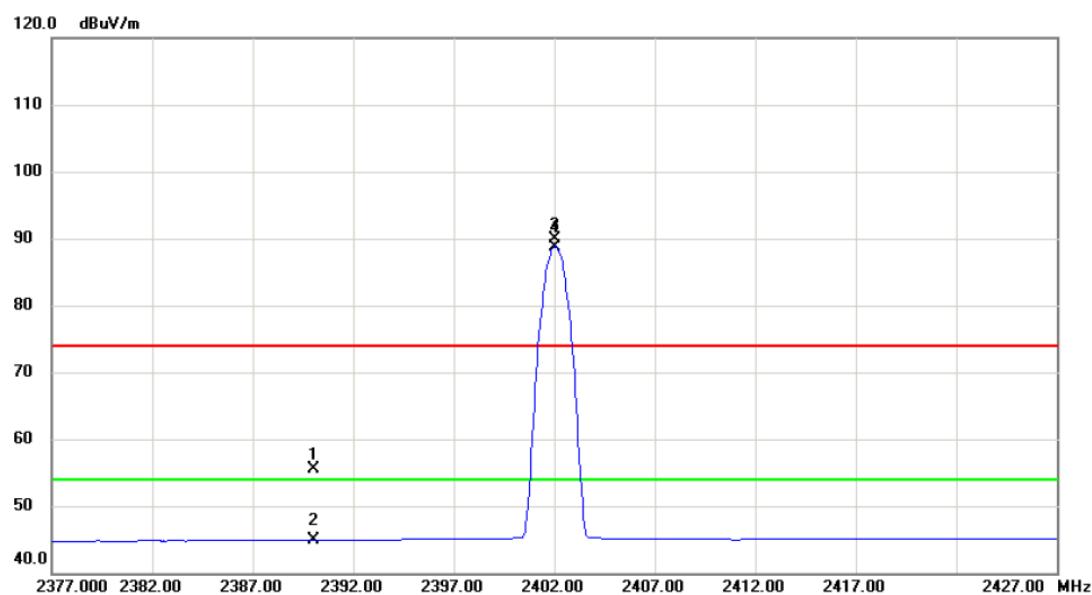

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		2390.000	22.58	32.99	55.57	74.00	-18.43	peak
2		2390.000	11.96	32.99	44.95	54.00	-9.05	AVG
3	X	2402.050	56.90	33.05	89.95	74.00	15.95	peak No Limit
4	*	2402.050	55.75	33.05	88.80	54.00	34.80	AVG No Limit

Test Mode TX Mode\_2402 MHz


## Vertical

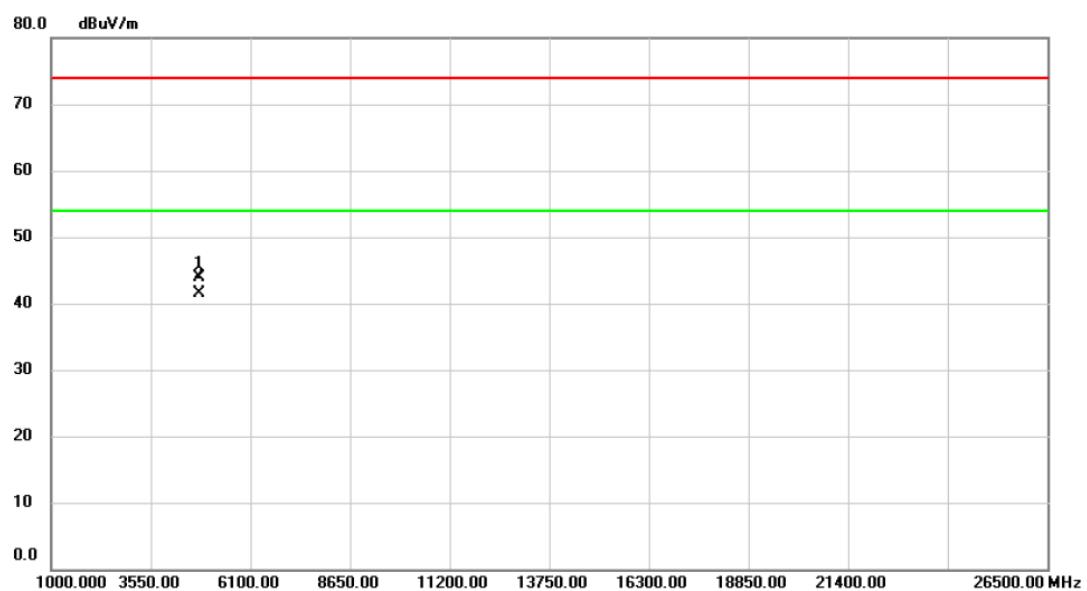

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		4804.000	38.35	5.57	43.92	74.00	-30.08	peak
2	*	4804.060	35.97	5.57	41.54	54.00	-12.46	AVG

Test Mode TX Mode\_2402 MHz


## Horizontal

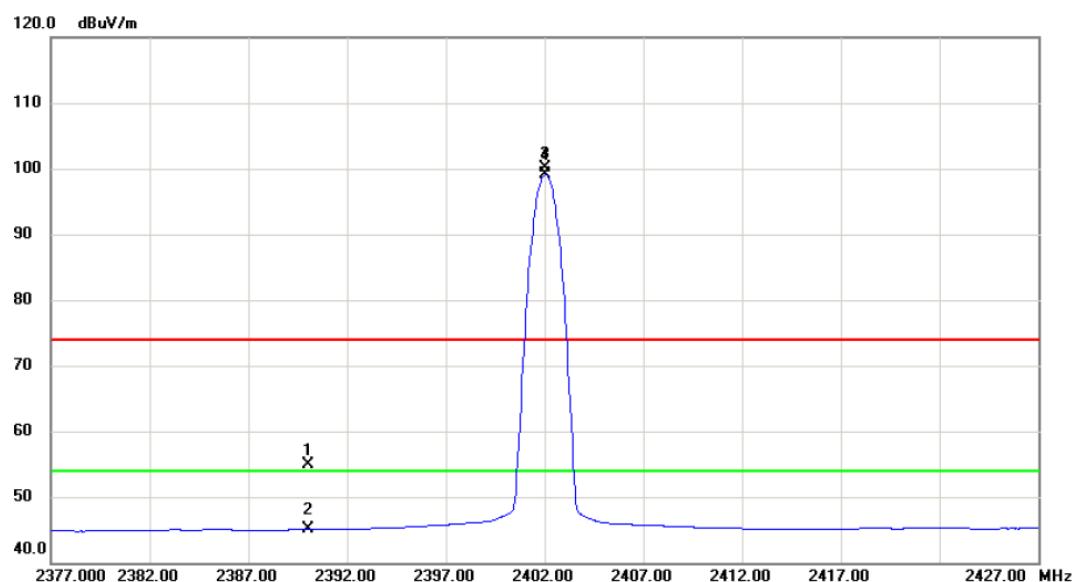

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		2390.000	22.00	32.99	54.99	74.00	-19.01	peak
2		2390.000	12.04	32.99	45.03	54.00	-8.97	AVG
3	X	2402.050	67.14	33.05	100.19	74.00	26.19	peak No Limit
4	*	2402.050	66.08	33.05	99.13	54.00	45.13	AVG No Limit

Test Mode TX Mode\_2402 MHz


## Horizontal

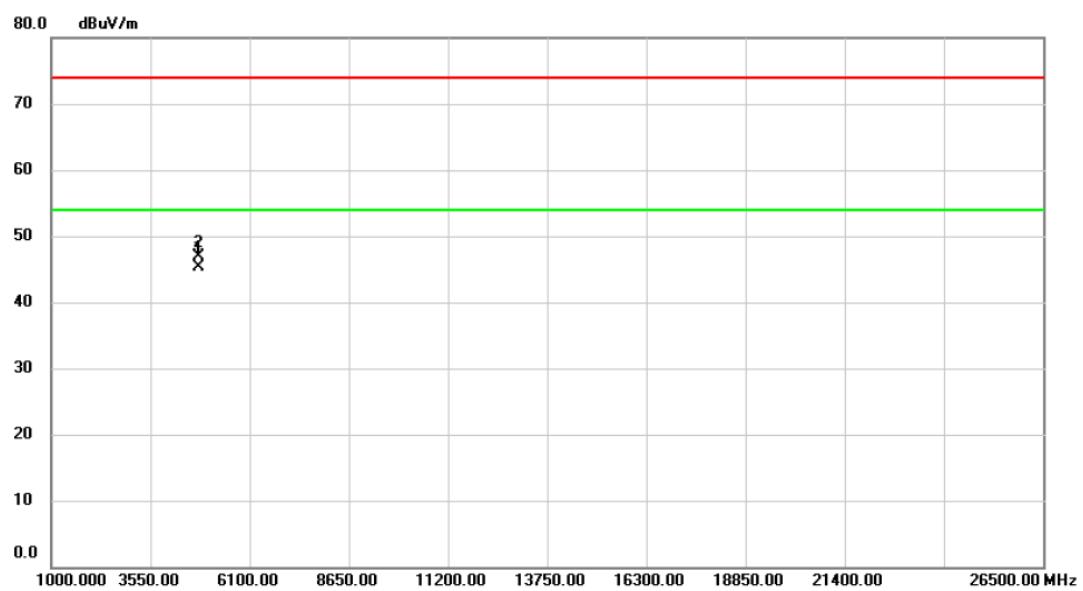

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1	*	4804.020	39.64	5.57	45.21	54.00	-8.79	AVG
2		4804.140	41.43	5.57	47.00	74.00	-27.00	peak

Test Mode TX Mode\_2440 MHz


## Vertical

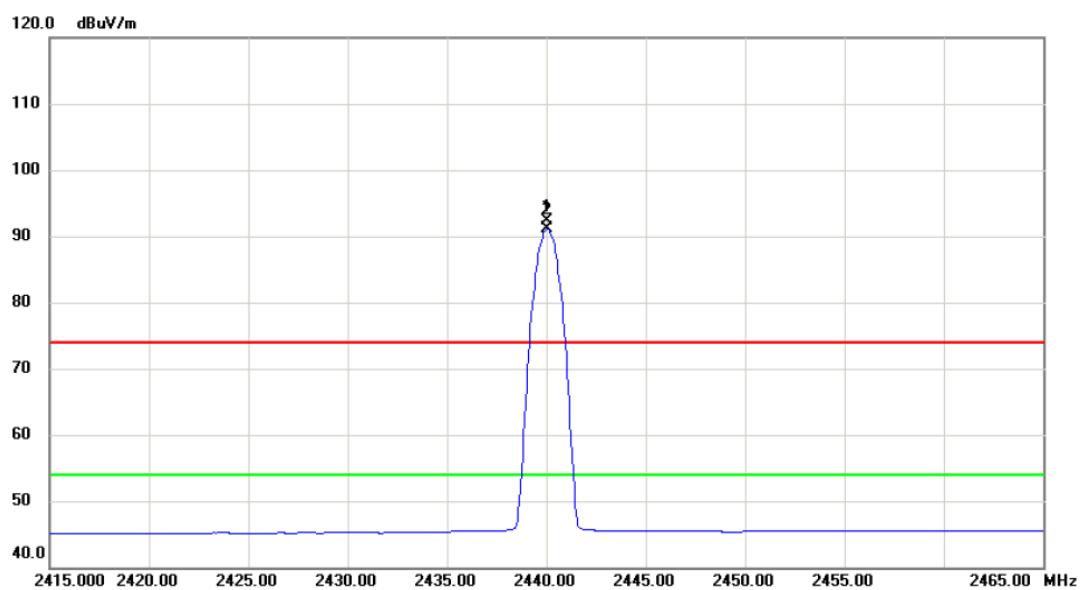

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1	X	2440.050	59.03	33.24	92.27	74.00	18.27	peak No Limit
2	*	2440.050	57.81	33.24	91.05	54.00	37.05	AVG No Limit

Test Mode | TX Mode\_2440 MHz


## Vertical

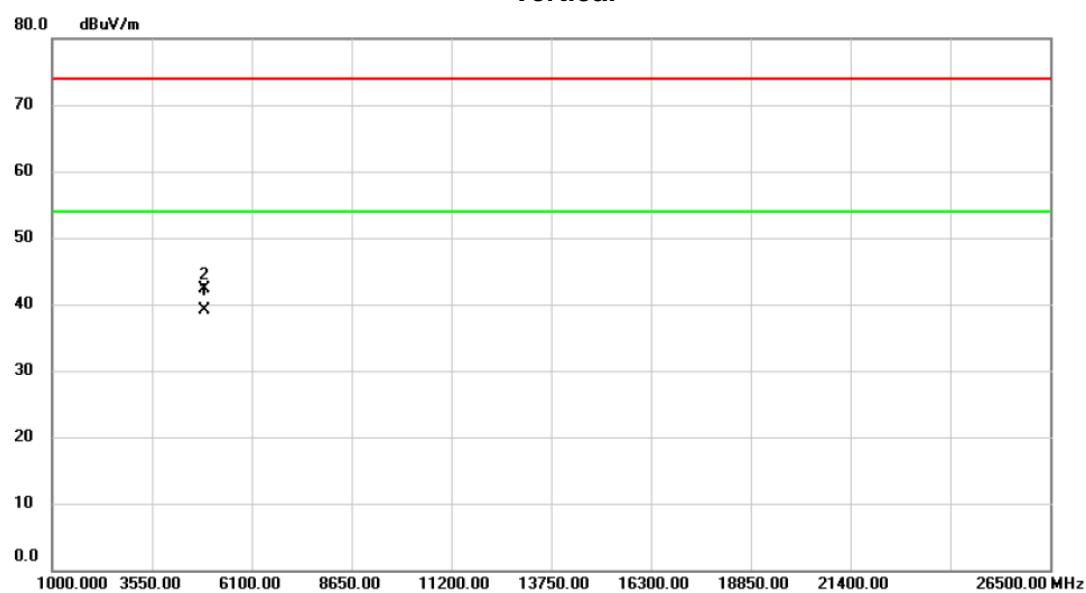

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4880.020	33.37	5.83	39.20	54.00	-14.80	AVG	
2		4880.060	36.56	5.83	42.39	74.00	-31.61	peak	


Test Mode TX Mode\_2440 MHz

## Horizontal

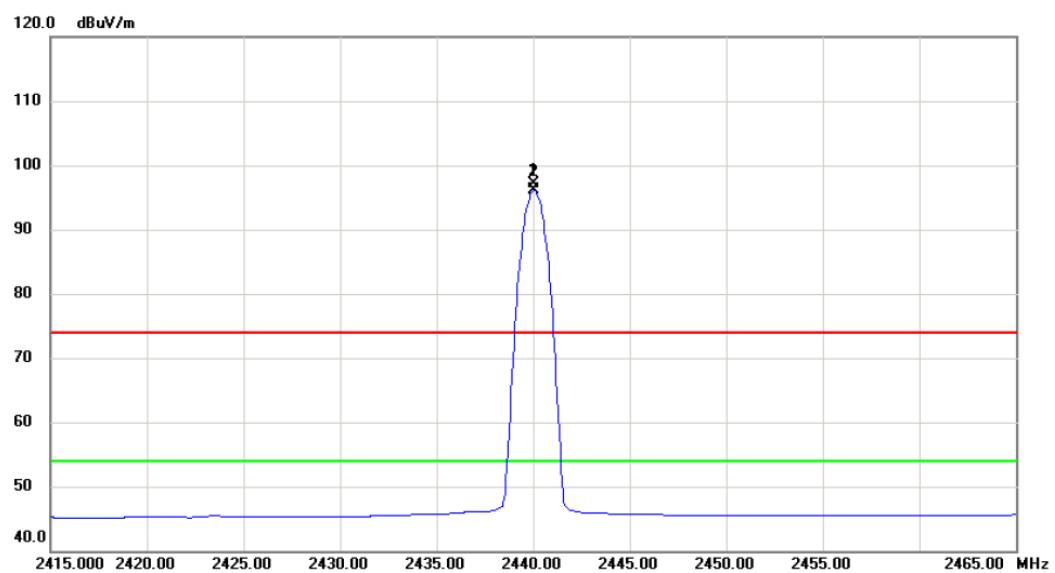

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1	X	2440.050	63.90	33.24	97.14	74.00	23.14	peak No Limit
2	*	2440.050	62.80	33.24	96.04	54.00	42.04	AVG No Limit


Test Mode | TX Mode\_2440 MHz

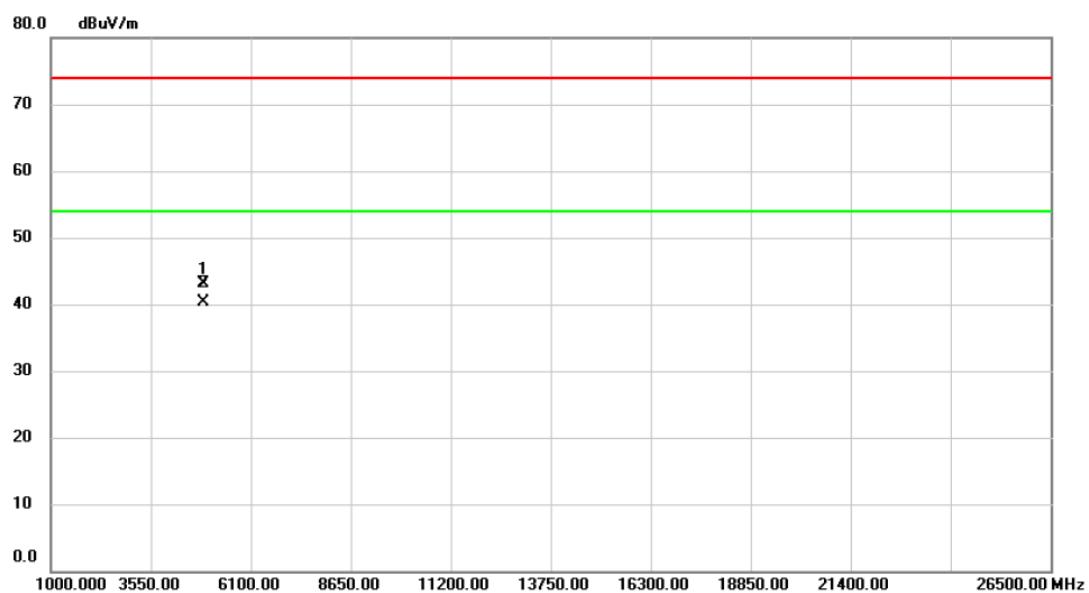**Horizontal**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dB			
1		4879.980	37.27	5.83	43.10	74.00	-30.90	peak	
2 *		4880.040	34.48	5.83	40.31	54.00	-13.69	AVG	


Test Mode TX Mode\_2480 MHz

## Vertical

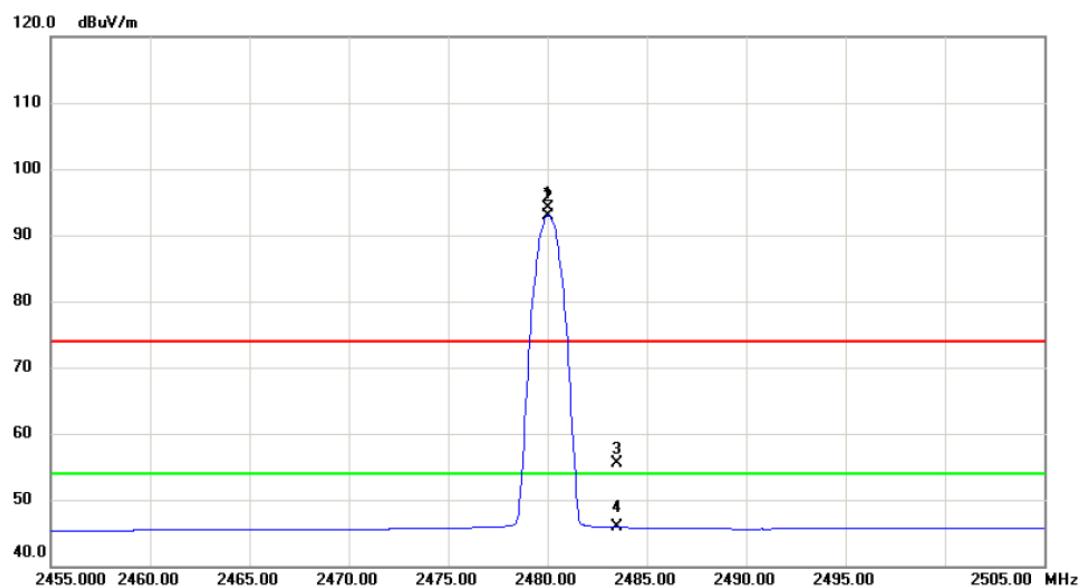

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	X	2480.000	60.64	33.44	94.08	74.00	20.08	peak No Limit
2	*	2480.050	59.56	33.44	93.00	54.00	39.00	AVG No Limit
3		2483.500	22.02	33.45	55.47	74.00	-18.53	peak
4		2483.500	12.41	33.45	45.86	54.00	-8.14	AVG


Test Mode | TX Mode\_2480 MHz

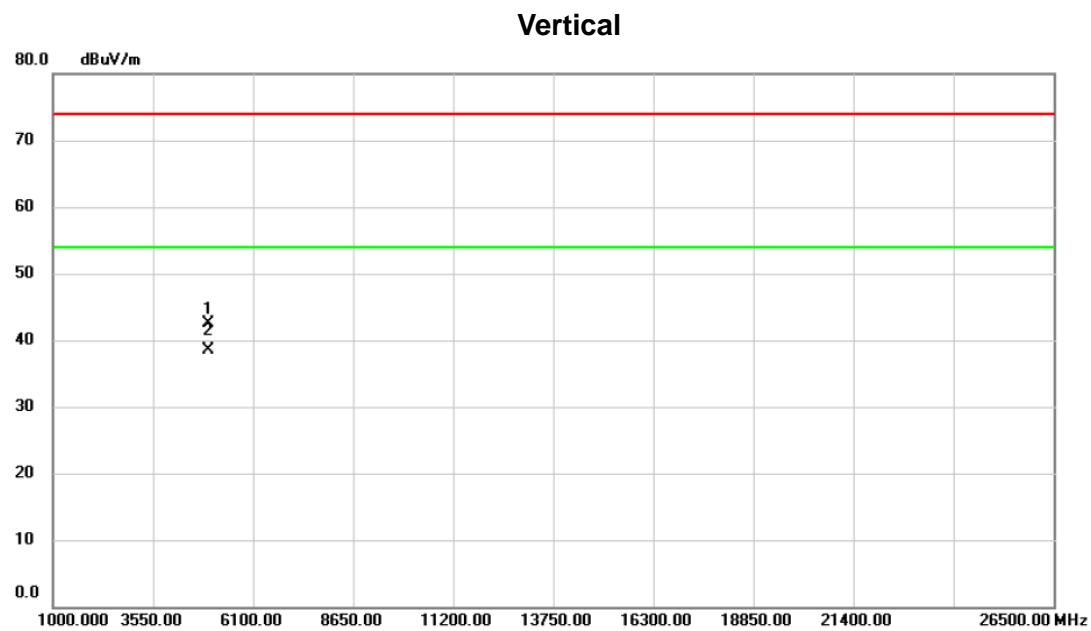

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		4959.900	36.34	6.10	42.44	74.00	-31.56	peak
2 *		4959.980	32.42	6.10	38.52	54.00	-15.48	AVG


Test Mode TX Mode\_2480 MHz

## Horizontal

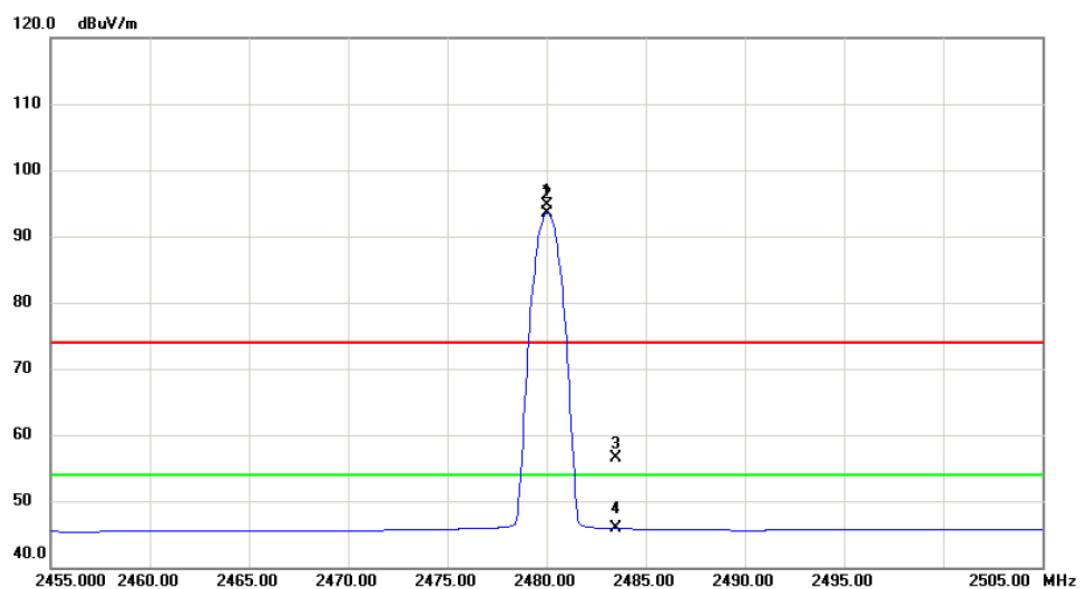

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2480.050	61.21	33.44	94.65	74.00	20.65	peak	No Limit
2	*	2480.050	60.11	33.44	93.55	54.00	39.55	AVG	No Limit
3		2483.500	23.05	33.45	56.50	74.00	-17.50	peak	
4		2483.500	12.41	33.45	45.86	54.00	-8.14	AVG	

Test Mode | TX Mode\_2480 MHz

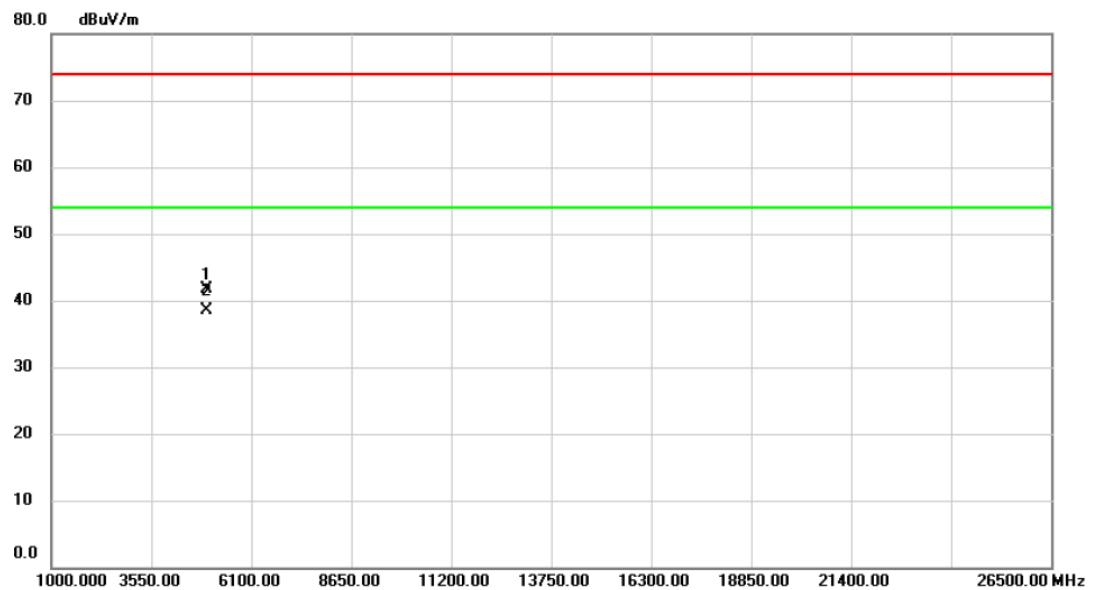**Horizontal**


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		4959.980	35.55	6.10	41.65	74.00	-32.35	peak
2 *		4960.020	32.38	6.10	38.48	54.00	-15.52	AVG

## APPENDIX E - BANDWIDTH

Test Mode: TX Mode


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2402	0.79	1.88	500	Complies
2440	0.83	1.83	500	Complies
2480	0.79	1.90	500	Complies

## TX CH01

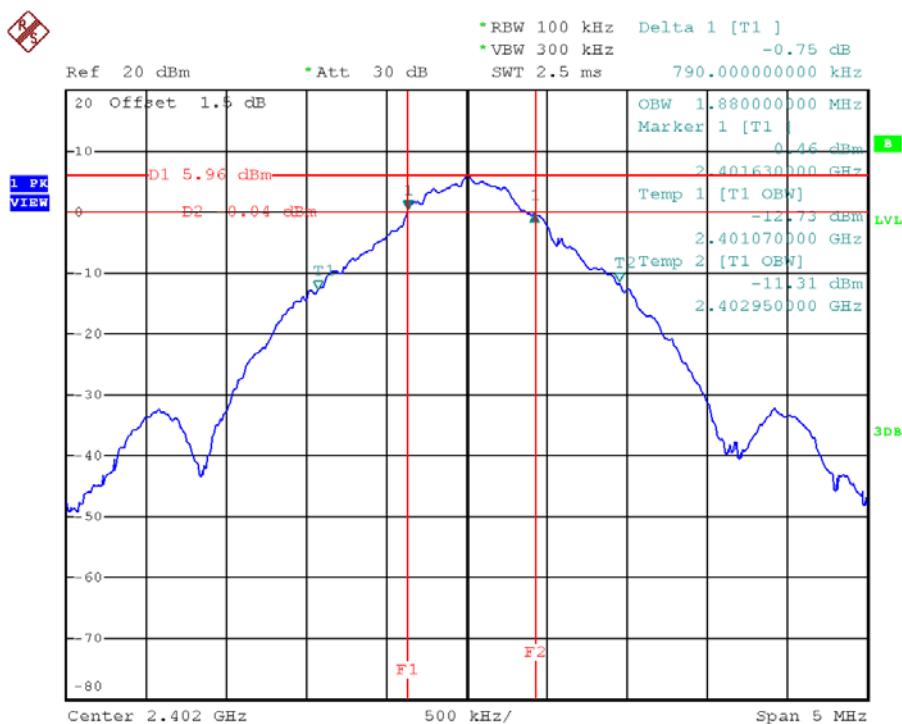


Date: 16.JAN.2018 19:11:31

## TX CH39

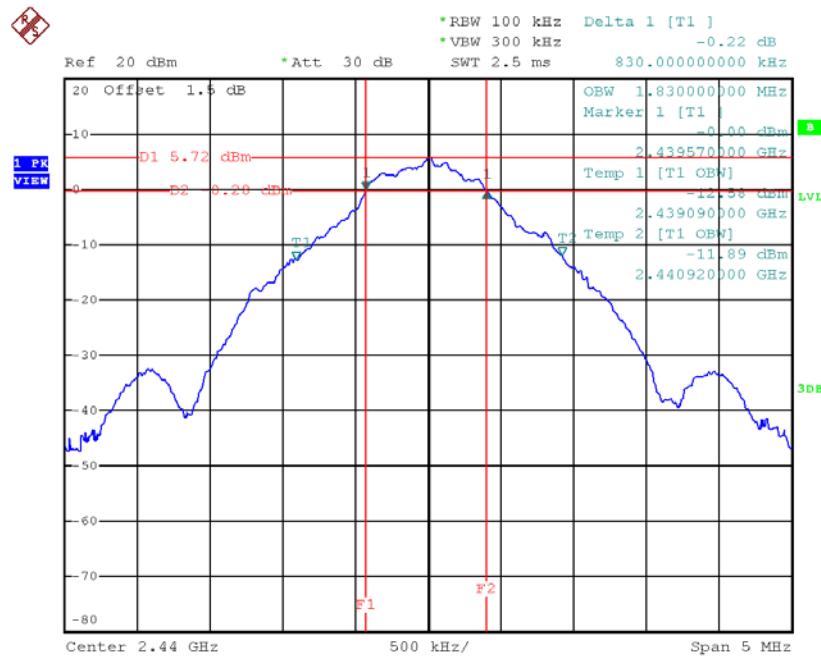

Date: 16.JAN.2018 19:19:44

## TX CH79

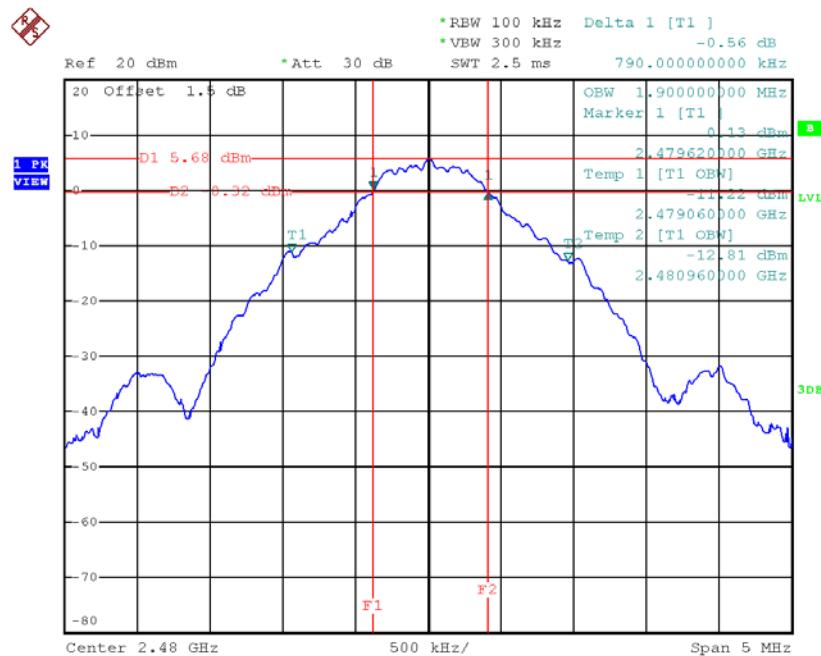


Date: 16.JAN.2018 19:23:37

## APPENDIX F - CONDUCTED POWER TEST


Test Mode					
Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
2402	6.18	0.0041	30.00	1.00	Complies
2440	5.91	0.0039	30.00	1.00	Complies
2480	5.83	0.0038	30.00	1.00	Complies

## TX CH01

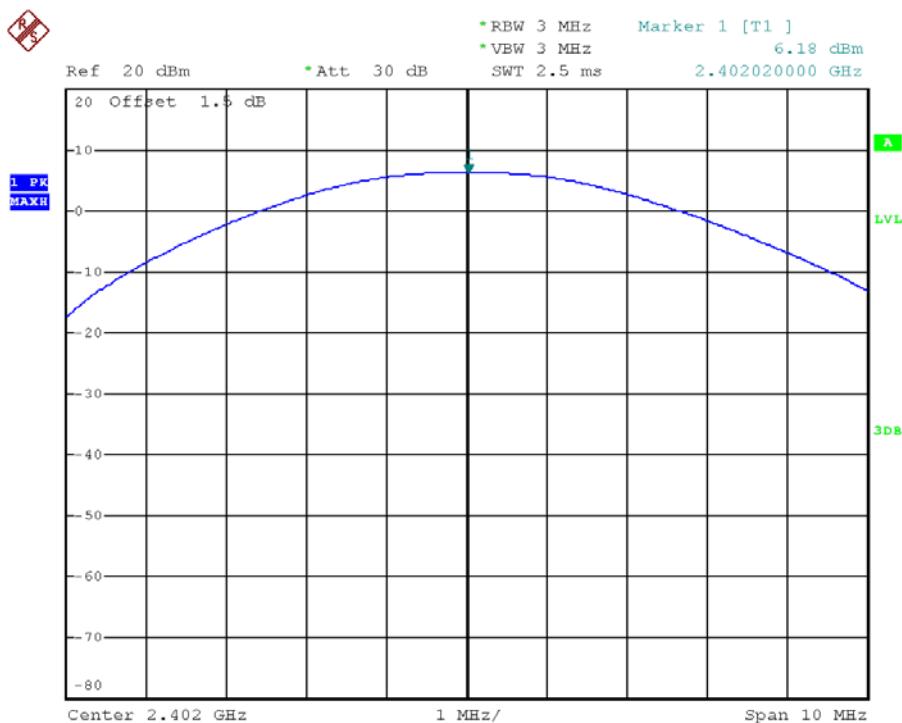


Date: 16.JAN.2018 19:01:01

## TX CH39

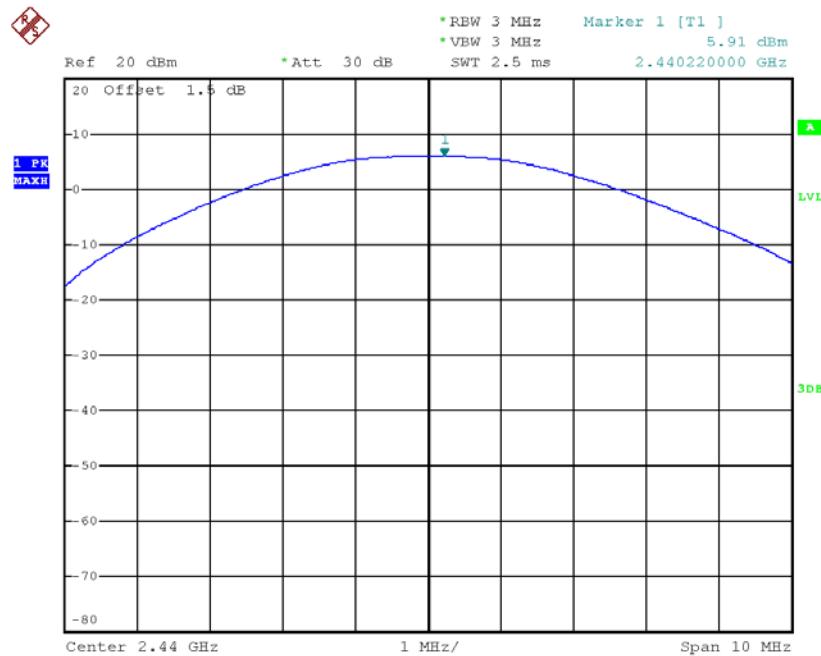

Date: 16.JAN.2018 19:16:12

## TX CH79

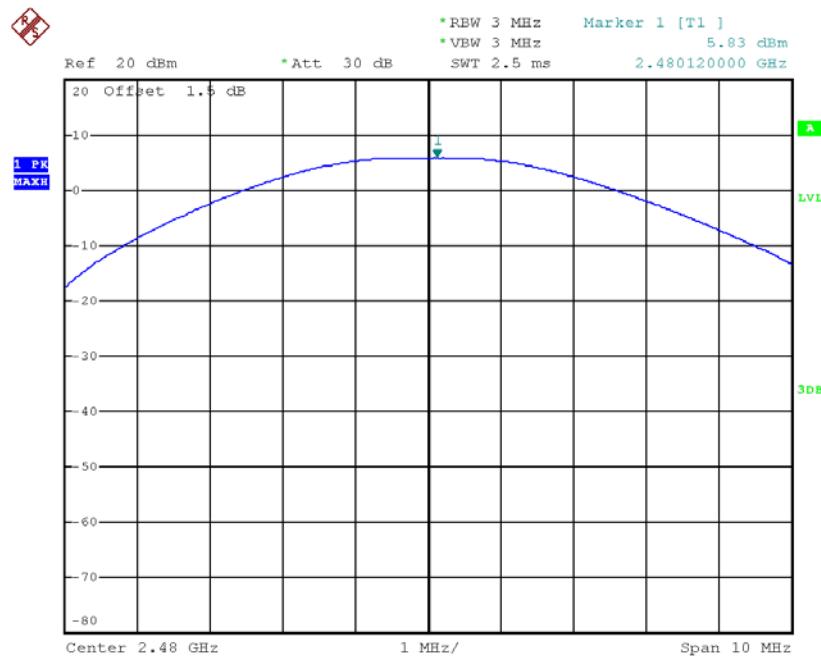


Date: 16.JAN.2018 19:21:09

## APPENDIX G - ANTENNA CONDUCTED SPURIOUS EMISSION


Test Mode : CH01, CH39 , CH79

## CH01 (Lower)

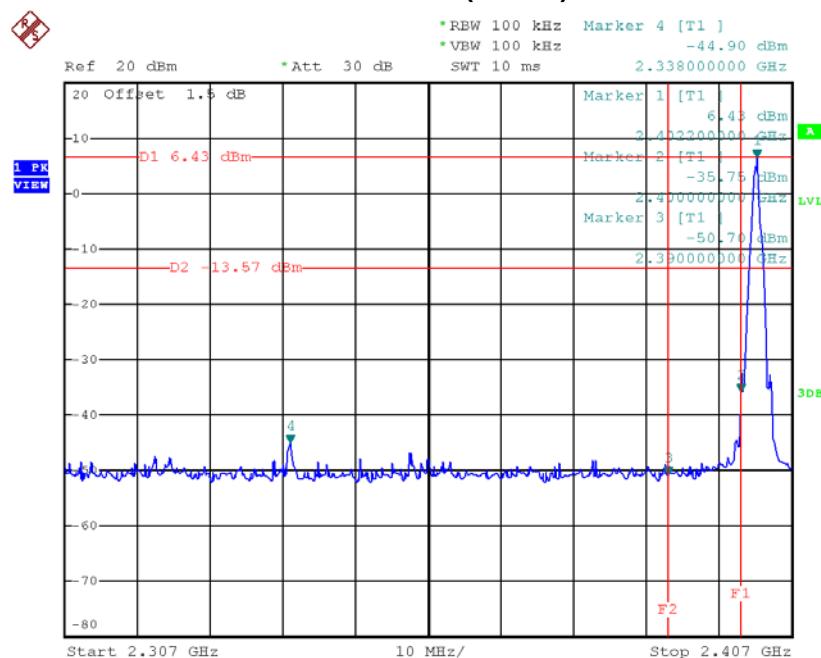


Date: 16.JAN.2018 19:42:29

### CH79 (upper)

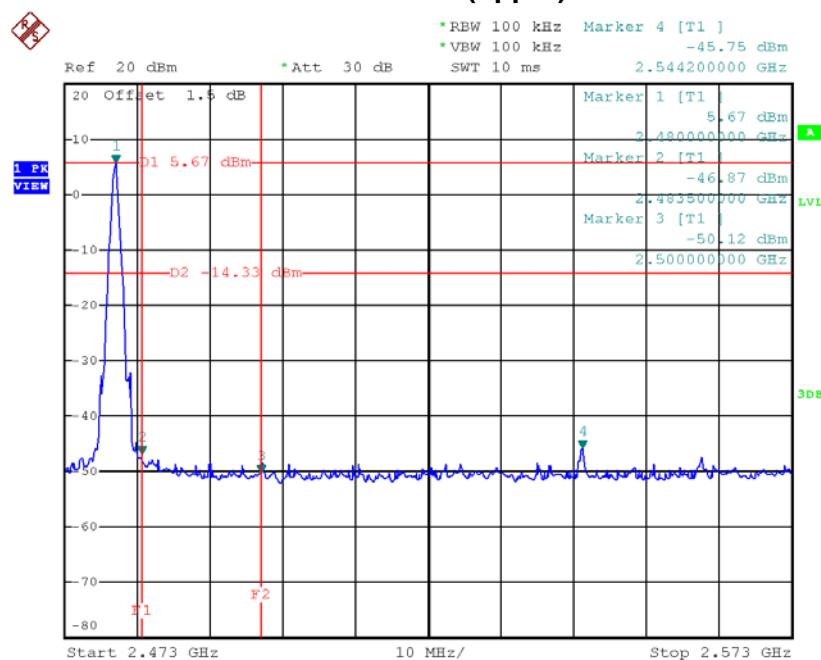


Date: 16.JAN.2018 19:30:17

## CH01 (10 Harmonic of the frequency)

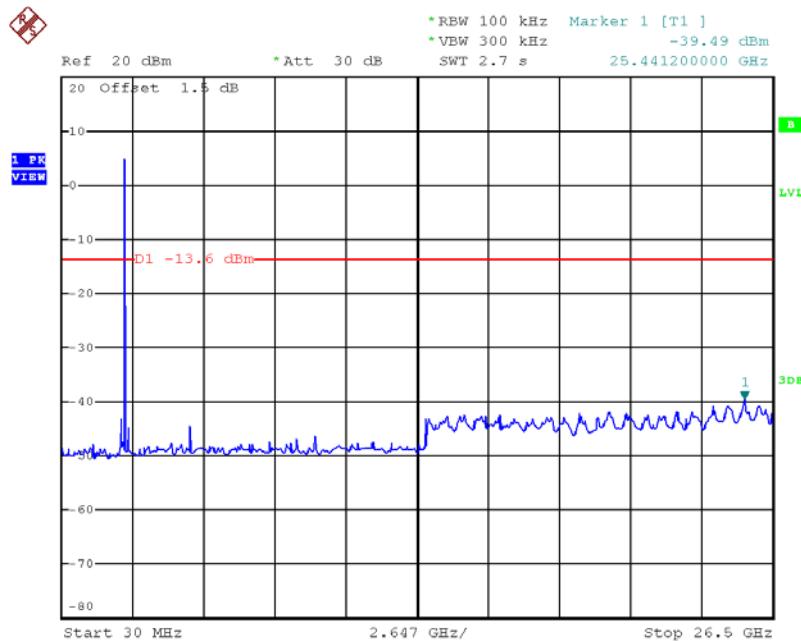


Date: 16.JAN.2018 19:38:06

## CH39 (10 Harmonic of the frequency)

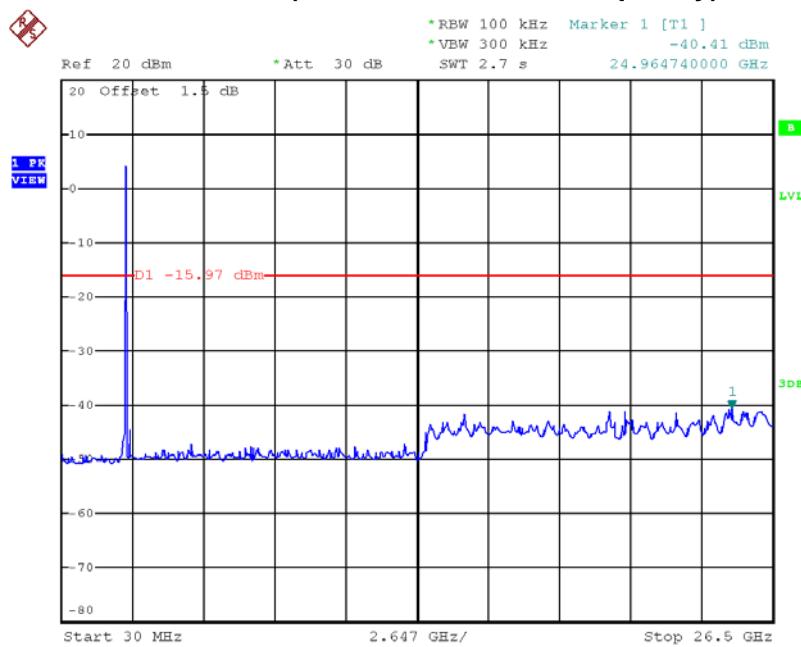

Date: 16.JAN.2018 19:50:56

## CH79 (10 Harmonic of the frequency)

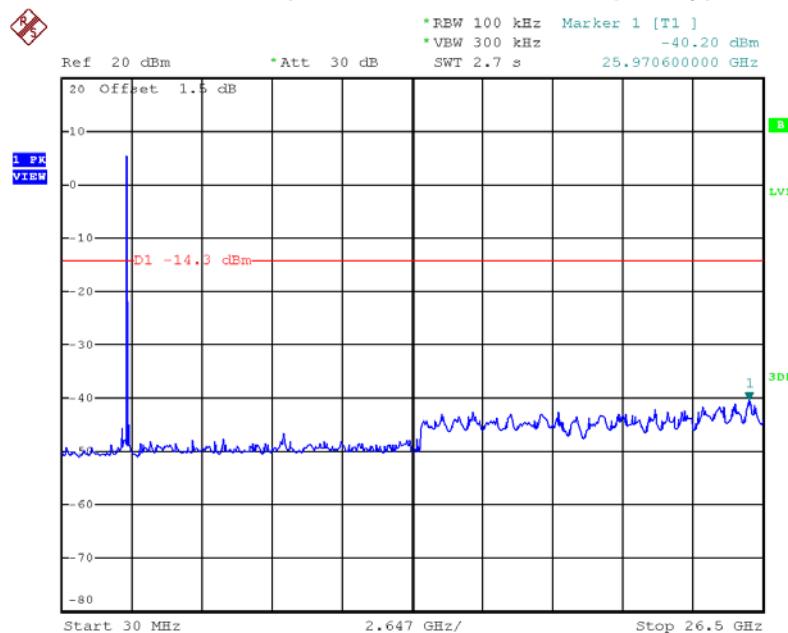


Date: 16.JAN.2018 19:34:21

## APPENDIX H - POWER SPECTRAL DENSITY TEST

Test Mode: TX Mode


Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Result
2402	-6.99	0.0001	8.00	Complies
2440	-6.65	0.0001	8.00	Complies
2480	-7.80	0.0001	8.00	Complies

## TX CH01

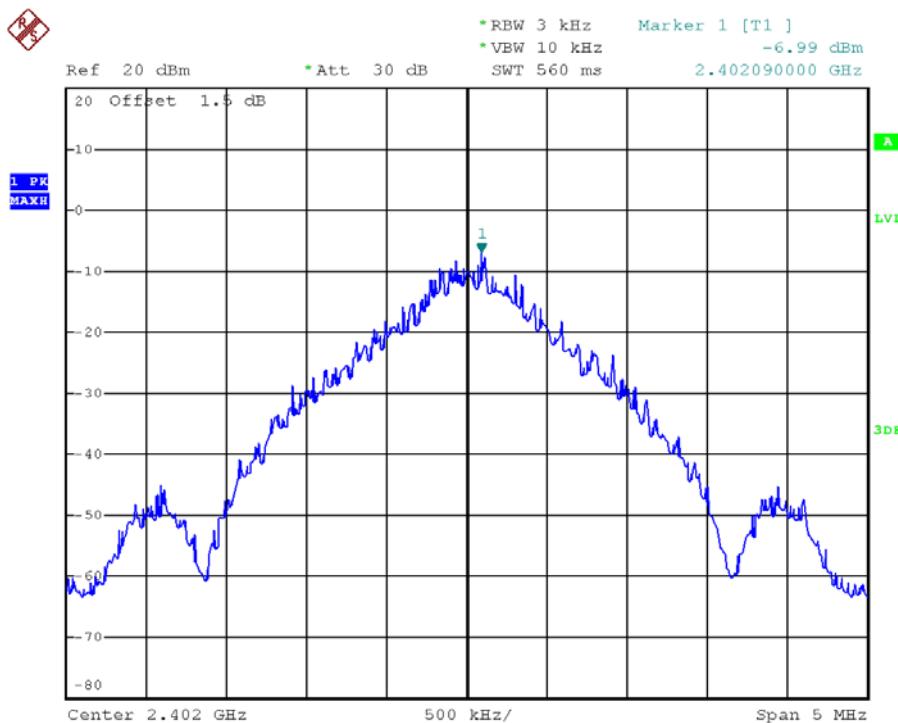


Date: 16.JAN.2018 19:45:49

## TX CH39

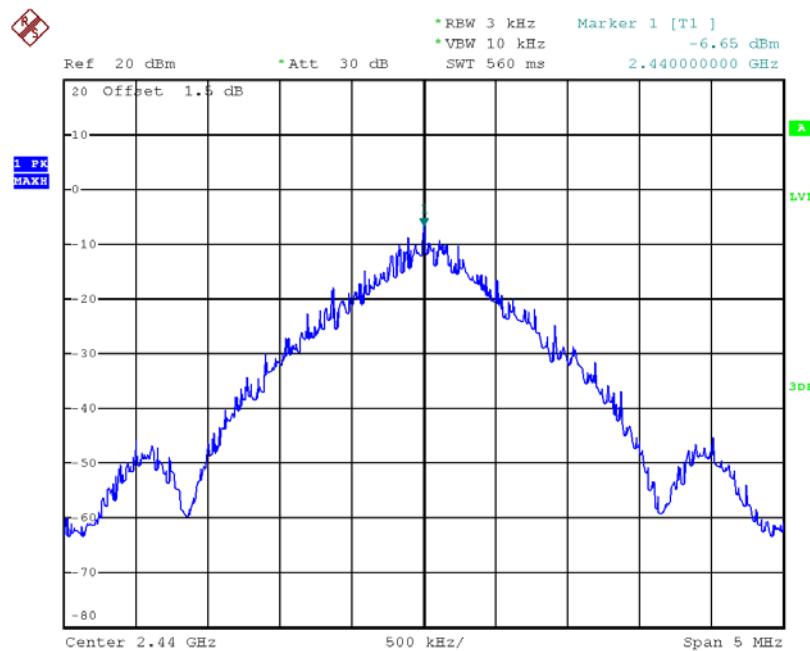

Date: 16.JAN.2018 19:49:10

## TX CH79

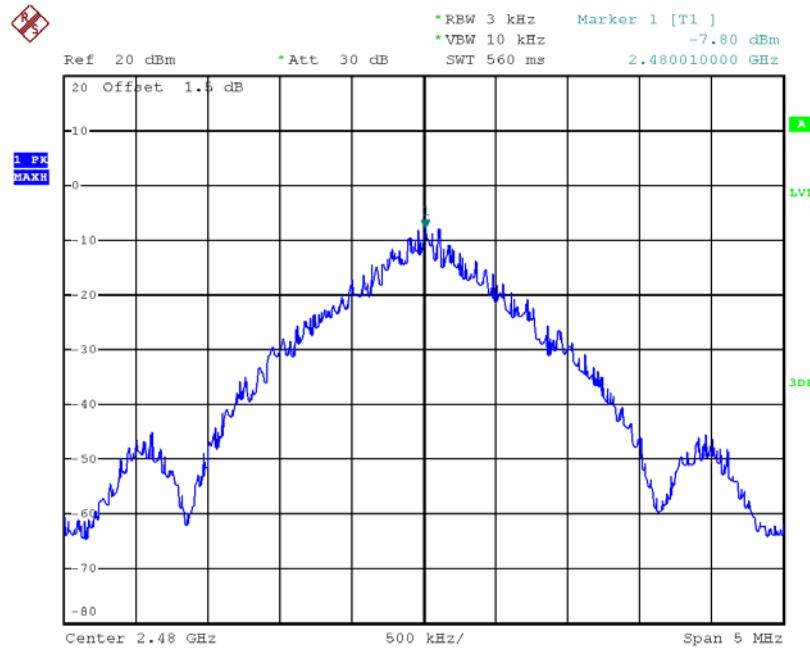

Date: 16.JAN.2018 19:52:03