

Test Laboratory: BTL Inc.

Date: 2021/5/29

W02_802.11b_CH6_Back of Keyboard_0cm_Ant A

DUT: Notebook;

Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps);

Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.779$ S/m; $\epsilon_r = 39.792$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN3974; ConvF(7.98, 7.98, 7.98) @ 2437 MHz; Calibrated: 2020/12/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1423; Calibrated: 2020/12/11
- Phantom: ELI V5.0; Type: QD OVA 001 BB; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (12x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.556 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.893 W/kg

SAR(1 g) = 0.421 W/kg; SAR(10 g) = 0.211 W/kg

Maximum value of SAR (measured) = 0.685 W/kg

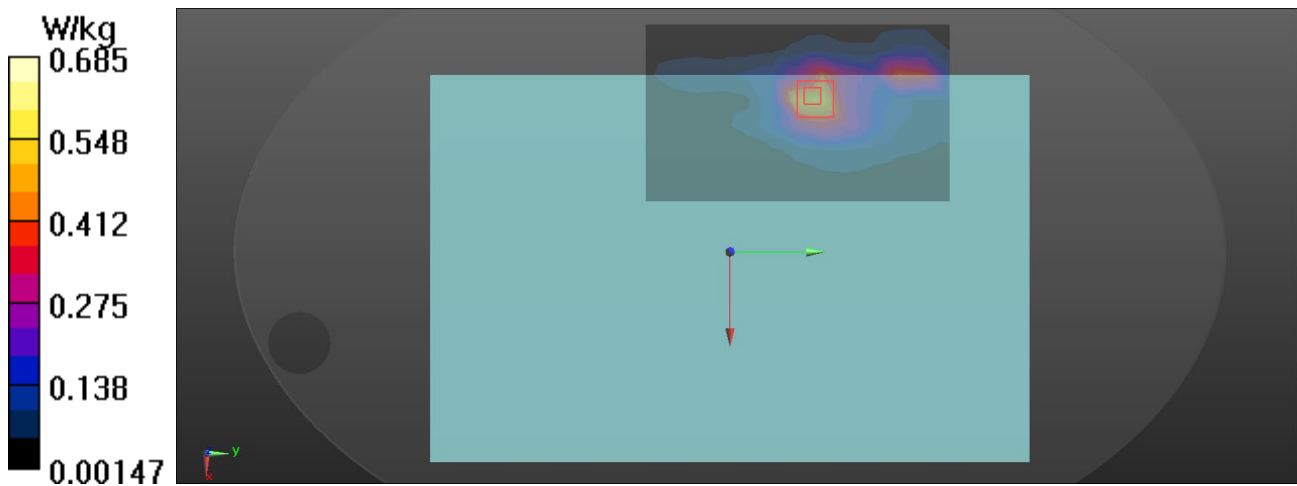

Test Laboratory: BTL Inc.

Date: 2021/5/29

W09_802.11b_CH11_Back of Keyboard_0cm_Ant B_1

DUT: Notebook;


Communication System: UID 10012 - CAB, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps);
Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.807$ S/m; $\epsilon_r = 39.694$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN3974; ConvF(7.98, 7.98, 7.98) @ 2462 MHz; Calibrated: 2020/12/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1423; Calibrated: 2020/12/11
- Phantom: ELI V5.0; Type: QD OVA 001 BB; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (12x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.480 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.626 W/kg
SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.146 W/kg
Maximum value of SAR (measured) = 0.492 W/kg

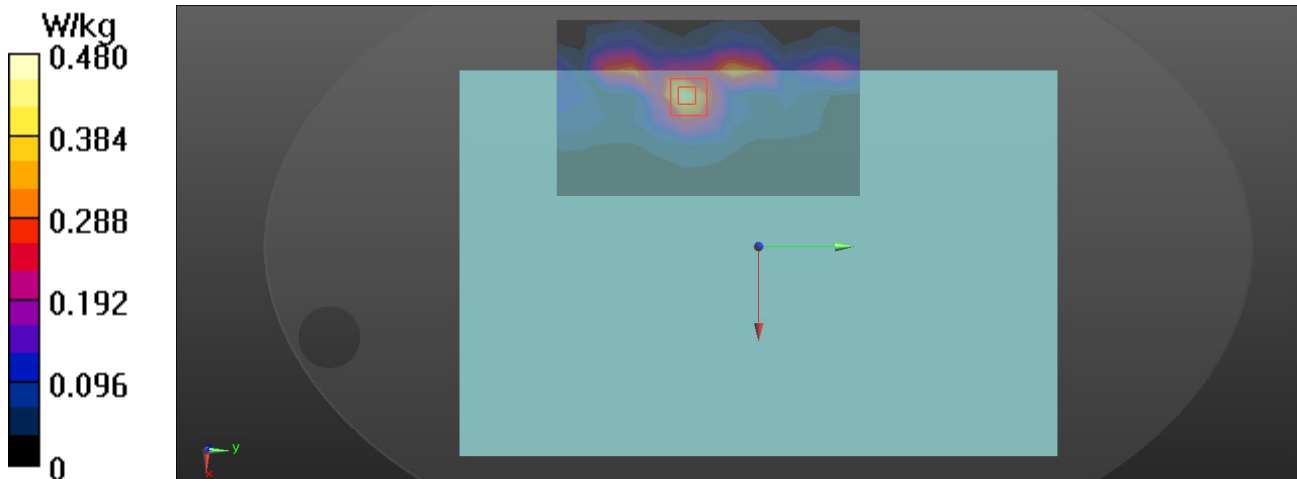

Test Laboratory: BTL Inc.

Date: 2021/5/29

B03_BT DH5_CH39_Back of Keyboard_0cm_Ant A

DUT: Notebook;

Communication System: UID 0, Bluetooth (0);

Frequency: 2441 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.784$ S/m; $\epsilon_r = 39.775$; $\rho = 1000$ kg/m³


Ambient Temperature: 23.2 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN3974; ConvF(7.98, 7.98, 7.98) @ 2441 MHz; Calibrated: 2020/12/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1423; Calibrated: 2020/12/11
- Phantom: ELI V5.0; Type: QD OVA 001 BB; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (10x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.0397 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.0620 W/kg
SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.00953 W/kg
Maximum value of SAR (measured) = 0.0434 W/kg

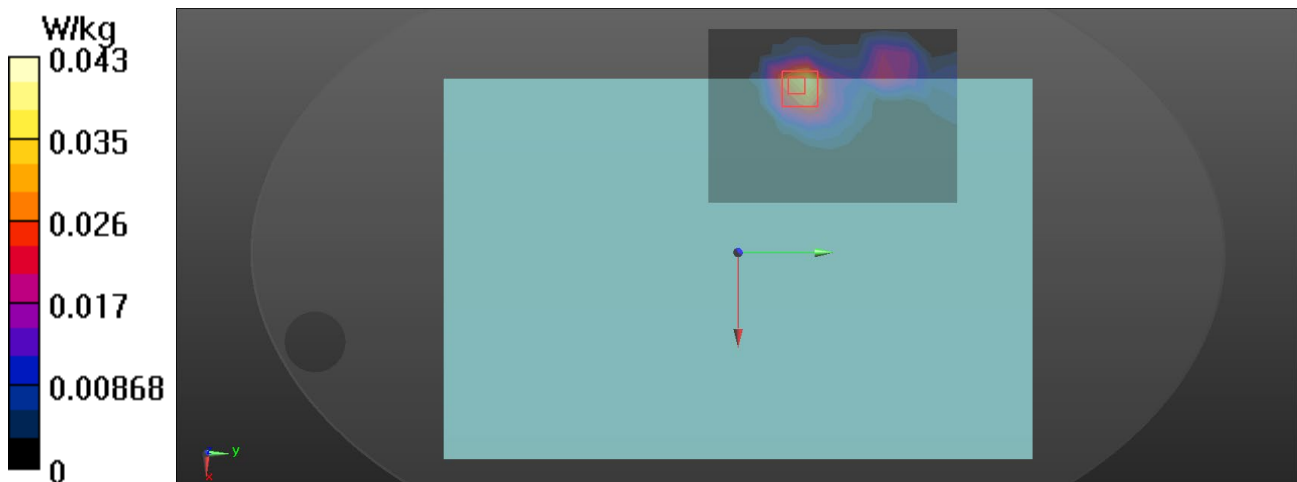

Test Laboratory: BTL Inc.

Date: 2021/5/27

W17_802.11a_CH52_Back of Keyboard_0cm_Ant A

DUT: Notebook;


Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0);
Frequency: 5260 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5260$ MHz; $\sigma = 4.846$ S/m; $\epsilon_r = 35.732$; $\rho = 1000$ kg/m³
Ambient Temperature: 23.4 °C; Liquid Temperature: 22.2 °C

DASY Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.55, 5.55, 5.55) @ 5260 MHz; Calibrated: 2020/12/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1423; Calibrated: 2020/12/11
- Phantom: ELI V5.0; Type: QD OVA 001 BB; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (13x17x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 1.83 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 0.6050 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 3.32 W/kg
SAR(1 g) = 0.861 W/kg; SAR(10 g) = 0.313 W/kg
Maximum value of SAR (measured) = 2.01 W/kg

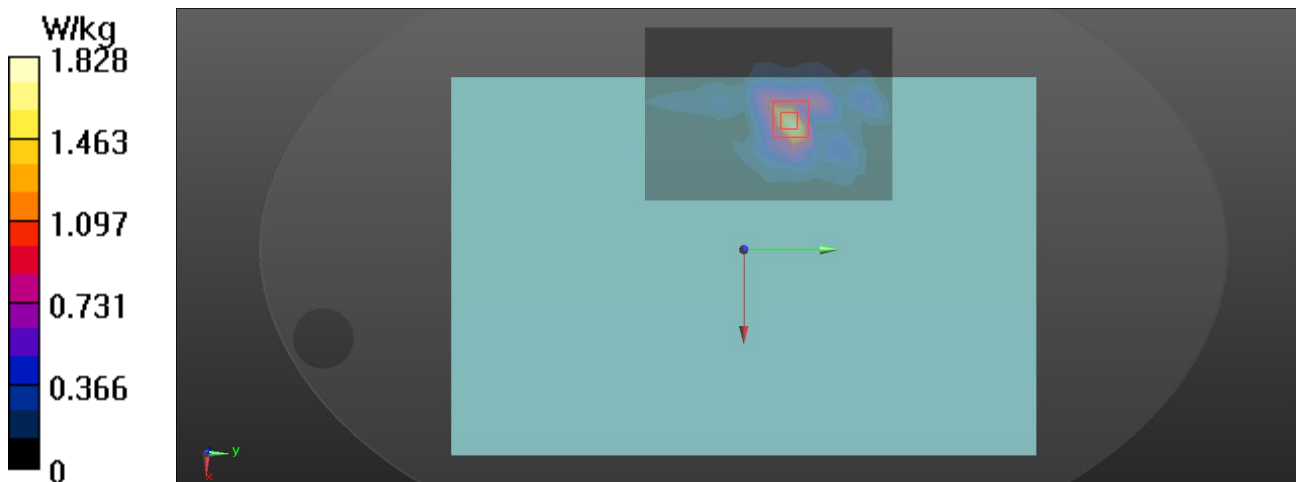

Test Laboratory: BTL Inc.

Date: 2021/5/27

W24_802.11a_CH56_Back of Keyboard_0cm_Ant B

DUT: Notebook;

Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0);

Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5280$ MHz; $\sigma = 4.868$ S/m; $\epsilon_r = 35.694$; $\rho = 1000$ kg/m³


Ambient Temperature: 23.4 °C; Liquid Temperature: 22.2 °C

DASY Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.55, 5.55, 5.55) @ 5280 MHz; Calibrated: 2020/12/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1423; Calibrated: 2020/12/11
- Phantom: ELI V5.0; Type: QD OVA 001 BB; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (13x17x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 2.15 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 3.90 W/kg
SAR(1 g) = 1 W/kg; SAR(10 g) = 0.344 W/kg
Maximum value of SAR (measured) = 2.30 W/kg

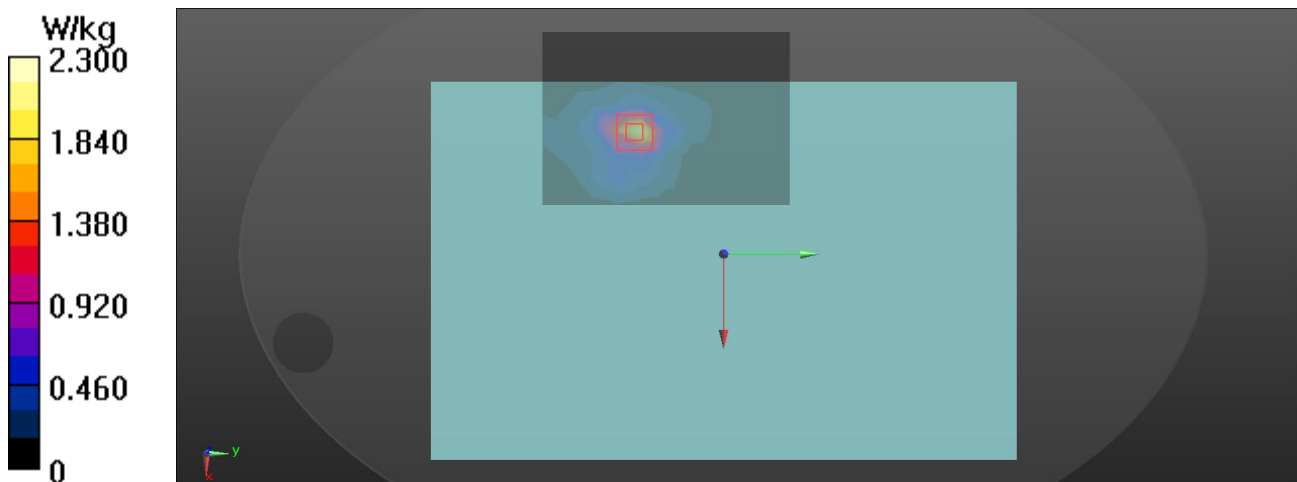

Test Laboratory: BTL Inc.

Date: 2021/5/27

W28_802.11a_CH124_Back of Keyboard_0cm_Ant A

DUT: Notebook;


Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0);
Frequency: 5620 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5620$ MHz; $\sigma = 5.275$ S/m; $\epsilon_r = 34.841$; $\rho = 1000$ kg/m³
Ambient Temperature: 23.4 °C; Liquid Temperature: 22.2 °C

DASY Configuration:

- Probe: EX3DV4 - SN3974; ConvF(4.94, 4.94, 4.94) @ 5620 MHz; Calibrated: 2020/12/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1423; Calibrated: 2020/12/11
- Phantom: ELI V5.0; Type: QD OVA 001 BB; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (13x17x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 2.59 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 5.42 W/kg
SAR(1 g) = 1.28 W/kg; SAR(10 g) = 0.438 W/kg
Maximum value of SAR (measured) = 3.10 W/kg

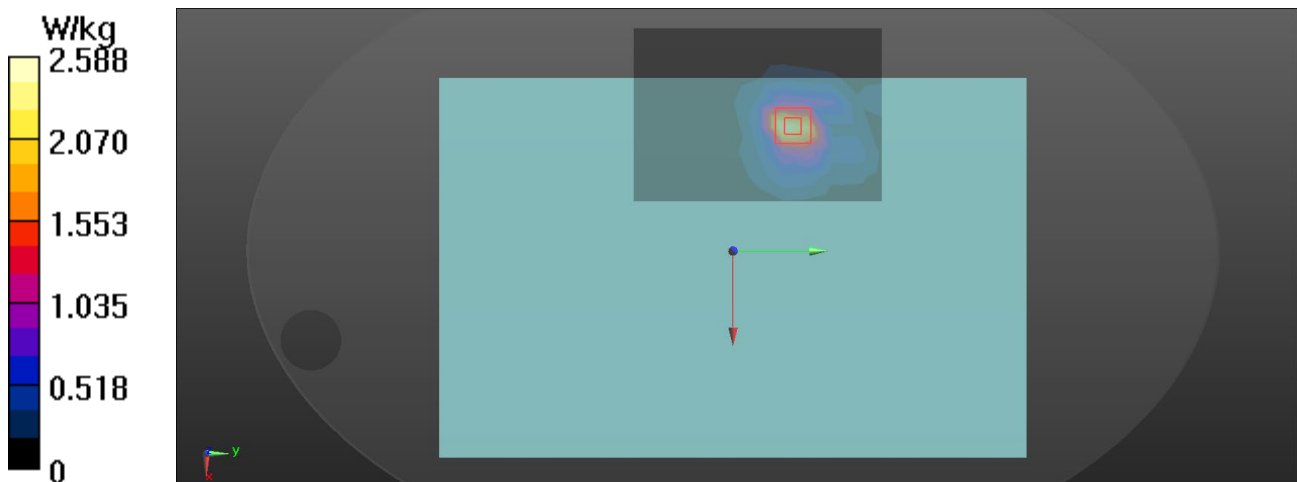

Test Laboratory: BTL Inc.

Date: 2021/5/27

W33_802.11a_CH128_Back of Keyboard_0cm_Ant B

DUT: Notebook;


Communication System: UID 0, IEEE 802.11a WiFi 5G(OFDM, 6 Mbps,) (0);
Frequency: 5640 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5640$ MHz; $\sigma = 5.299$ S/m; $\epsilon_r = 34.792$; $\rho = 1000$ kg/m³
Ambient Temperature: 23.4 °C; Liquid Temperature: 22.2 °C

DASY Configuration:

- Probe: EX3DV4 - SN3974; ConvF(4.94, 4.94, 4.94) @ 5640 MHz; Calibrated: 2020/12/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1423; Calibrated: 2020/12/11
- Phantom: ELI V5.0; Type: QD OVA 001 BB; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (13x17x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 2.84 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 5.90 W/kg
SAR(1 g) = 1.4 W/kg; SAR(10 g) = 0.481 W/kg
Maximum value of SAR (measured) = 3.33 W/kg

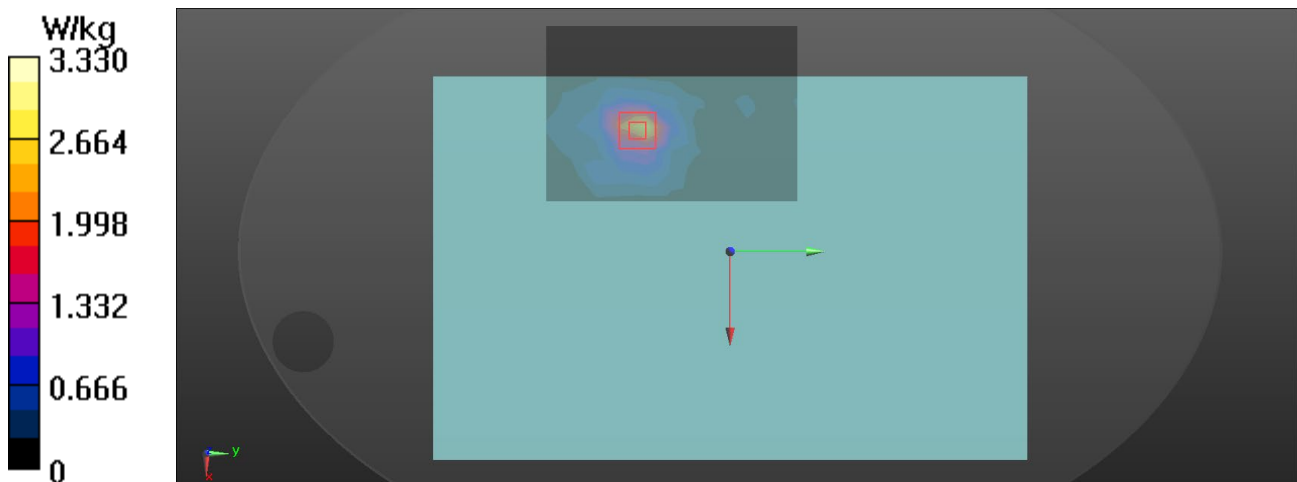

Test Laboratory: BTL Inc.

Date: 2021/5/27

W37_802.11ac VHT80_CH138_Back of Keyboard_0cm_Ant A

DUT: Notebook;

Communication System: UID 10626 - AAB, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle);

Frequency: 5690 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5690$ MHz; $\sigma = 5.32$ S/m; $\epsilon_r = 34.678$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.4 °C; Liquid Temperature: 22.2 °C

DASY Configuration:

- Probe: EX3DV4 - SN3974; ConvF(4.94, 4.94, 4.94) @ 5690 MHz; Calibrated: 2020/12/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1423; Calibrated: 2020/12/11
- Phantom: ELI V5.0; Type: QD OVA 001 BB; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (13x17x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 2.36 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 5.18 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.386 W/kg

Maximum value of SAR (measured) = 2.81 W/kg

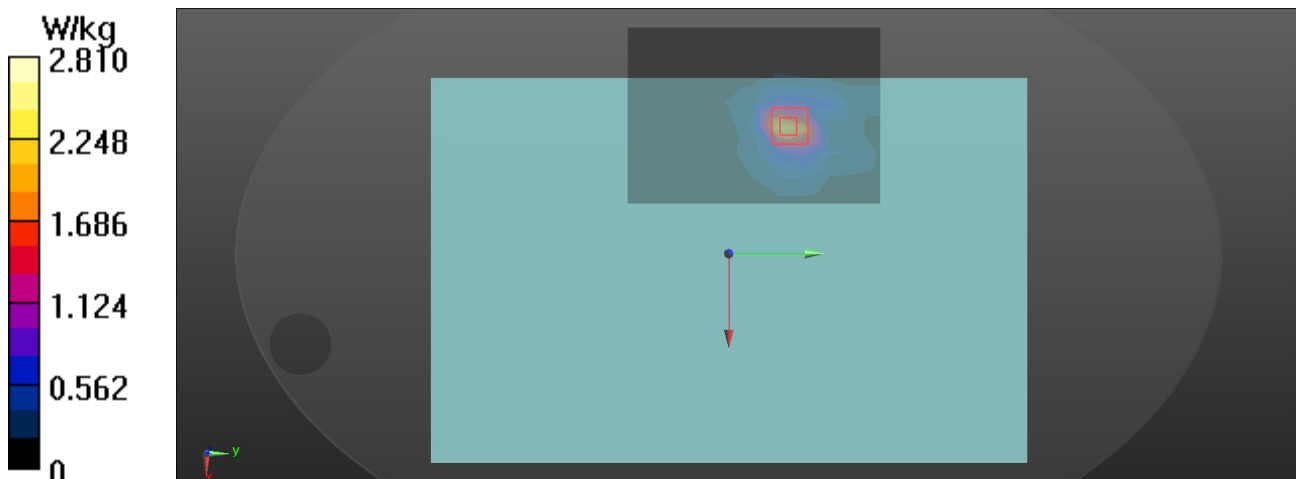

Test Laboratory: BTL Inc.

Date: 2021/5/27

W41_802.11ac VHT80_CH138_Back of Keyboard_0cm_Ant B

DUT: Notebook;

Communication System: UID 10626 - AAB, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle);
Frequency: 5690 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5690$ MHz; $\sigma = 5.32$ S/m; $\epsilon_r = 34.678$; $\rho = 1000$ kg/m³
Ambient Temperature: 23.4 °C; Liquid Temperature: 22.2 °C

DASY Configuration:

- Probe: EX3DV4 - SN3974; ConvF(4.94, 4.94, 4.94) @ 5690 MHz; Calibrated: 2020/12/18
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1423; Calibrated: 2020/12/11
- Phantom: ELI V5.0; Type: QD OVA 001 BB; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (13x17x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 2.85 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 0.5530 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 6.11 W/kg
SAR(1 g) = 1.22 W/kg; SAR(10 g) = 0.403 W/kg
Maximum value of SAR (measured) = 3.42 W/kg

