

Test Laboratory: BTL Inc.

Date: 2023/12/14

W02_802.11b_CH7_Back of Keyboard_0cm_Ant Main_MB 1

DUT: Note Book;


Communication System: UID 10415 - AAA, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle);
Frequency: 2442 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 39.977$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.9 °C; Liquid Temperature : 22.6°C

DASY Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8.04, 8.04, 8.04) @ 2442 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1423; Calibrated: 2023/3/17
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1128
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (9x13x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.513 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.612 W/kg
SAR(1 g) = 0.304 W/kg; SAR(10 g) = 0.158 W/kg
Maximum value of SAR (measured) = 0.517 W/kg

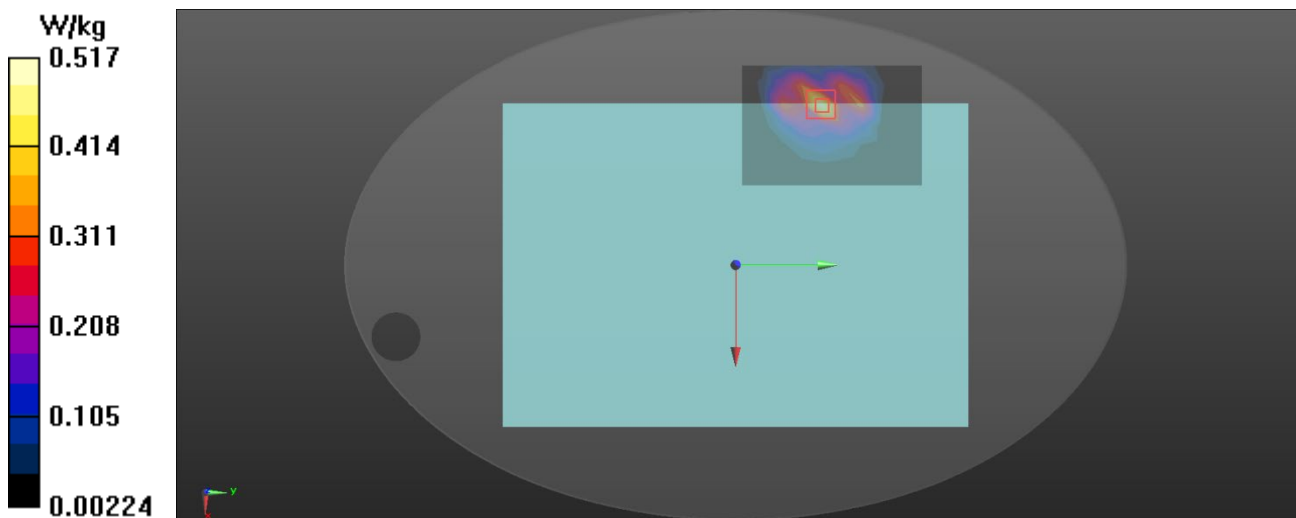

Test Laboratory: BTL Inc.

Date: 2023/12/14

W10_802.11b_CH 11_Back of Keyboard_0cm_Ant Aux_MB 1

DUT: Note Book;


Communication System: UID 10415 - AAA, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle);
Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.811$ S/m; $\epsilon_r = 39.892$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.9 °C; Liquid Temperature : 22.6°C

DASY Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8.04, 8.04, 8.04) @ 2462 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1423; Calibrated: 2023/3/17
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1128
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (9x13x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.636 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 0.1790 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 1.15 W/kg
SAR(1 g) = 0.470 W/kg; SAR(10 g) = 0.226 W/kg
Maximum value of SAR (measured) = 0.949 W/kg

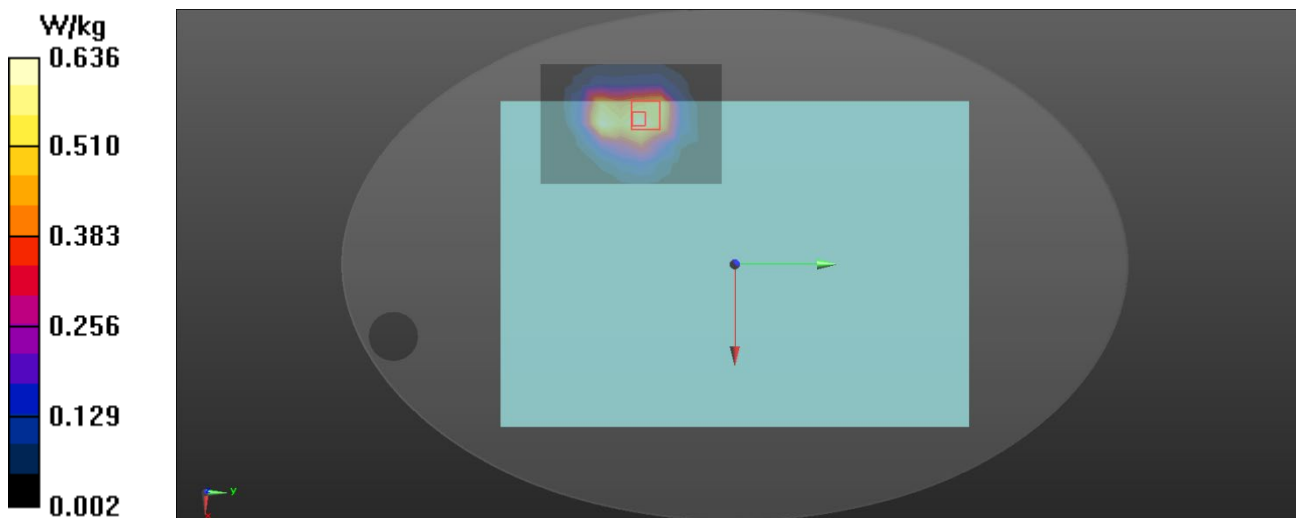

Test Laboratory: BTL Inc.

Date: 2023/12/14

B02_BT DH5_CH78_Back of Keyboard_0cm_Ant Main_MB 1

DUT: Note Book;


Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2480$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 39.831$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.9 °C; Liquid Temperature : 22.6 °C

DASY Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8.04, 8.04, 8.04) @ 2480 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1423; Calibrated: 2023/3/17
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1128
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (9x13x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.0407 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.0670 W/kg
SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.011 W/kg
Maximum value of SAR (measured) = 0.0359 W/kg

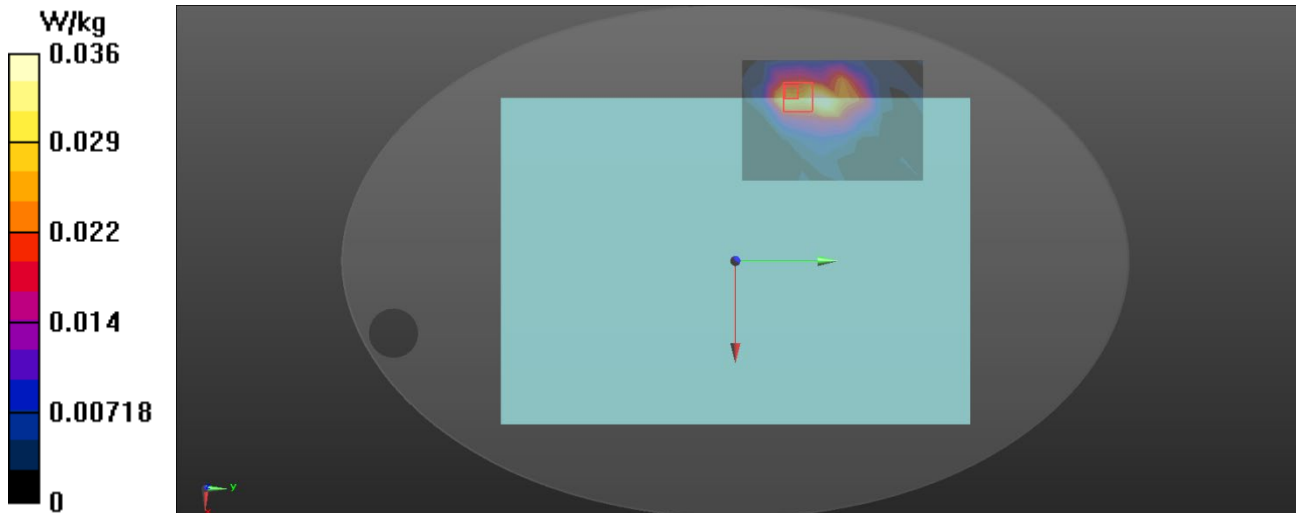

Test Laboratory: BTL Inc.

Date: 2023/12/15

W19_802.11n HT20_CH48_Back of Keyboard_0cm_Ant Main_MB 1

DUT: Note Book;

Communication System: UID 10591 - AAC, IEEE 802.11n (HT Mixed, 20MHz, MCS0, 99pc duty cycle); Frequency: 5240 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5240$ MHz; $\sigma = 4.733$ S/m; $\epsilon_r = 35.528$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.0 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(5.35, 5.35, 5.35) @ 5240 MHz; Calibrated: 2023/2/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1717; Calibrated: 2023/4/10
- Phantom: ELI V5.0; Type: QD OVA 001 BB; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (7x10x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.65 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 3.10 W/kg

SAR(1 g) = 0.833 W/kg; SAR(10 g) = 0.320 W/kg

Maximum value of SAR (measured) = 1.74 W/kg

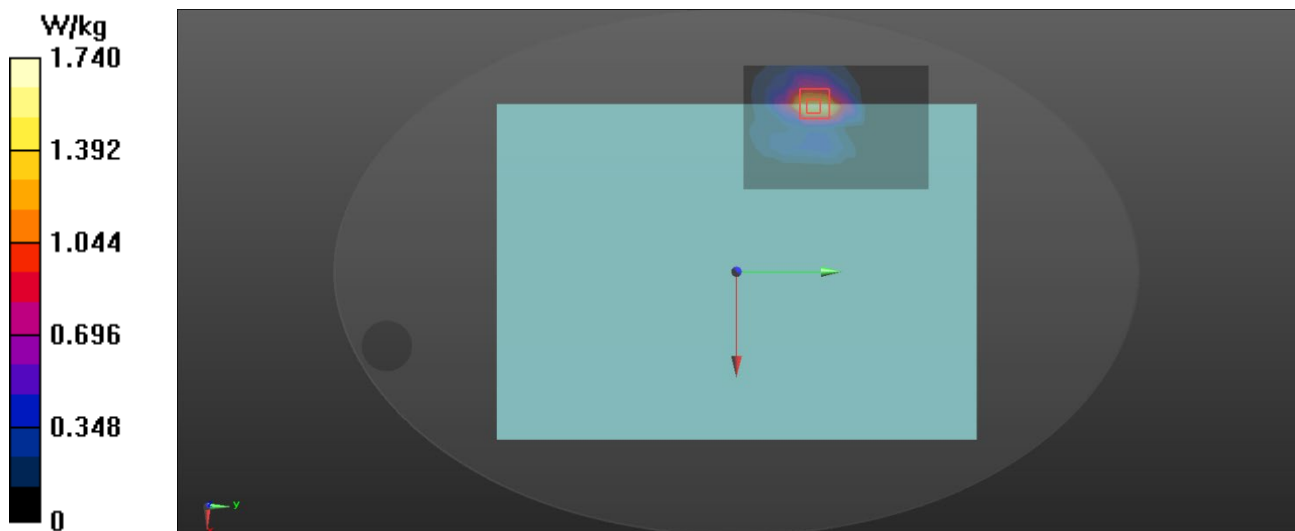

Test Laboratory: BTL Inc.

Date: 2023/12/15

W26_802.11n HT20_CH48_Back of Keyboard_0cm_Ant Aux_MB 2

DUT: Note Book;

Communication System: UID 10591 - AAC, IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle); Frequency: 5240 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5240$ MHz; $\sigma = 4.733$ S/m; $\epsilon_r = 35.528$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.0 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(5.35, 5.35, 5.35) @ 5240 MHz; Calibrated: 2023/2/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1717; Calibrated: 2023/4/10
- Phantom: ELI V5.0; Type: QD OVA 001 BB; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (7x10x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.25 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.095 V/m; Power Drift = 0 dB

Peak SAR (extrapolated) = 2.75 W/kg

SAR(1 g) = 0.707 W/kg; SAR(10 g) = 0.275 W/kg

Maximum value of SAR (measured) = 1.60 W/kg

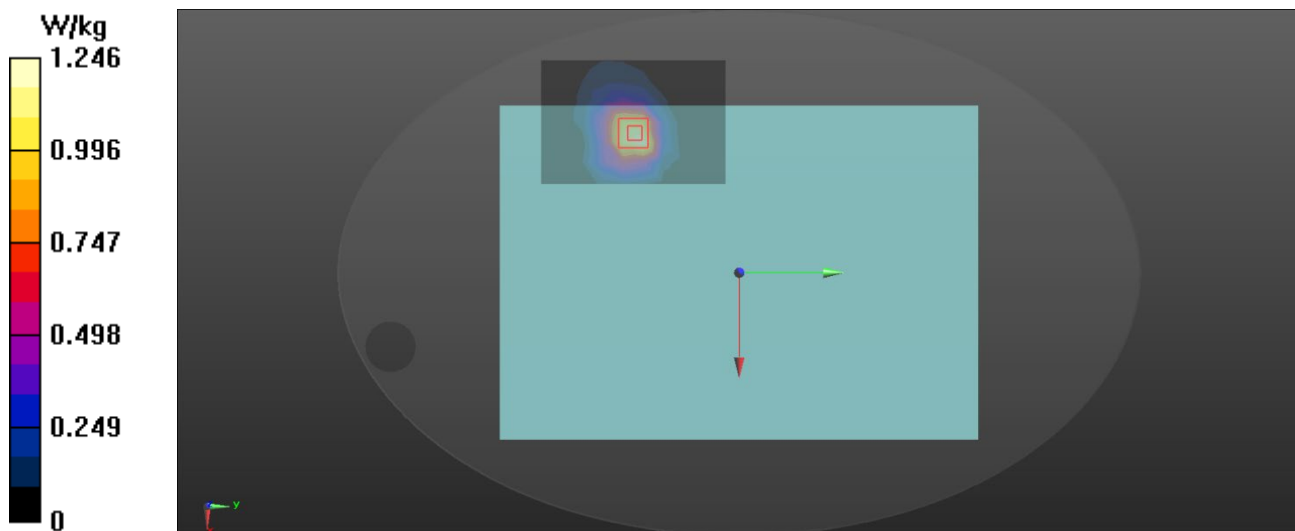

Test Laboratory: BTL Inc.

Date: 2023/12/15

W32_802.11n HT40_CH134_Back of Keyboard_0cm_Ant Main_MB 2

DUT: Note Book;

Communication System: UID 10599 - AAC, IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle); Frequency: 5670 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5670$ MHz; $\sigma = 5.205$ S/m; $\epsilon_r = 34.448$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.0 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(4.8, 4.8, 4.8) @ 5670 MHz; Calibrated: 2023/2/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1717; Calibrated: 2023/4/10
- Phantom: ELI V5.0; Type: QD OVA 001 BB; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (7x10x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.45 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 4.35 W/kg

SAR(1 g) = 0.684 W/kg; SAR(10 g) = 0.248 W/kg

Maximum value of SAR (measured) = 1.48 W/kg

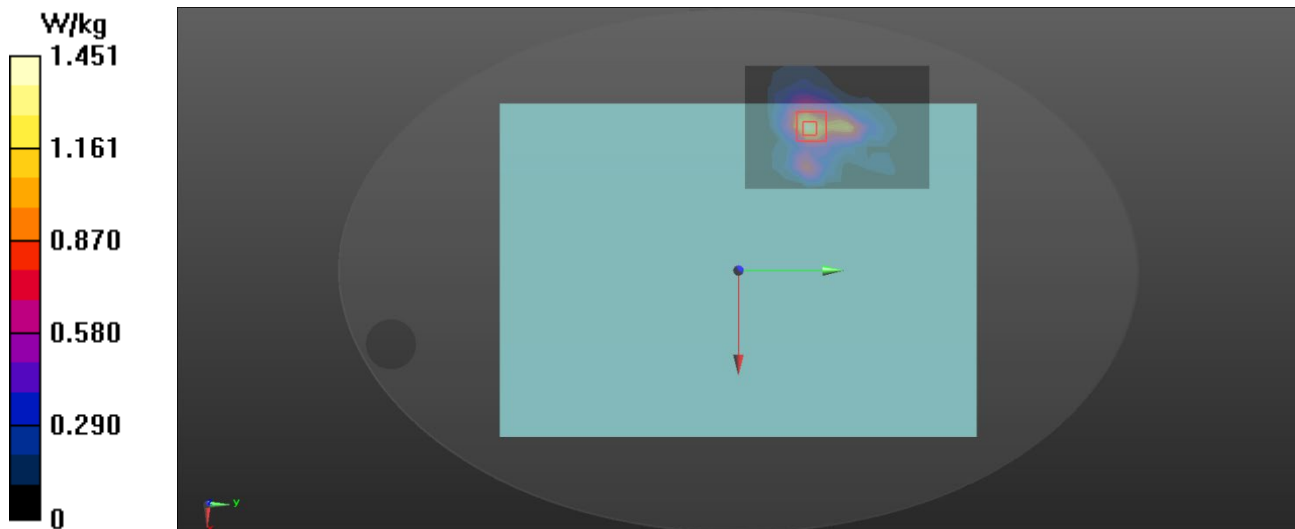

Test Laboratory: BTL Inc.

Date: 2023/12/15

W35_802.11n HT40_CH118_Back of Keyboard_0cm_Ant Aux_MB 1

DUT: Note Book;

Communication System: UID 10599 - AAC, IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle); Frequency: 5590 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5590$ MHz; $\sigma = 5.114$ S/m; $\epsilon_r = 34.646$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.0 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(4.8, 4.8, 4.8) @ 5590 MHz; Calibrated: 2023/2/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1717; Calibrated: 2023/4/10
- Phantom: ELI V5.0; Type: QD OVA 001 BB; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (7x10x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 1.30 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 3.296 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 2.67 W/kg
SAR(1 g) = 0.685 W/kg; SAR(10 g) = 0.252 W/kg
Maximum value of SAR (measured) = 1.52 W/kg

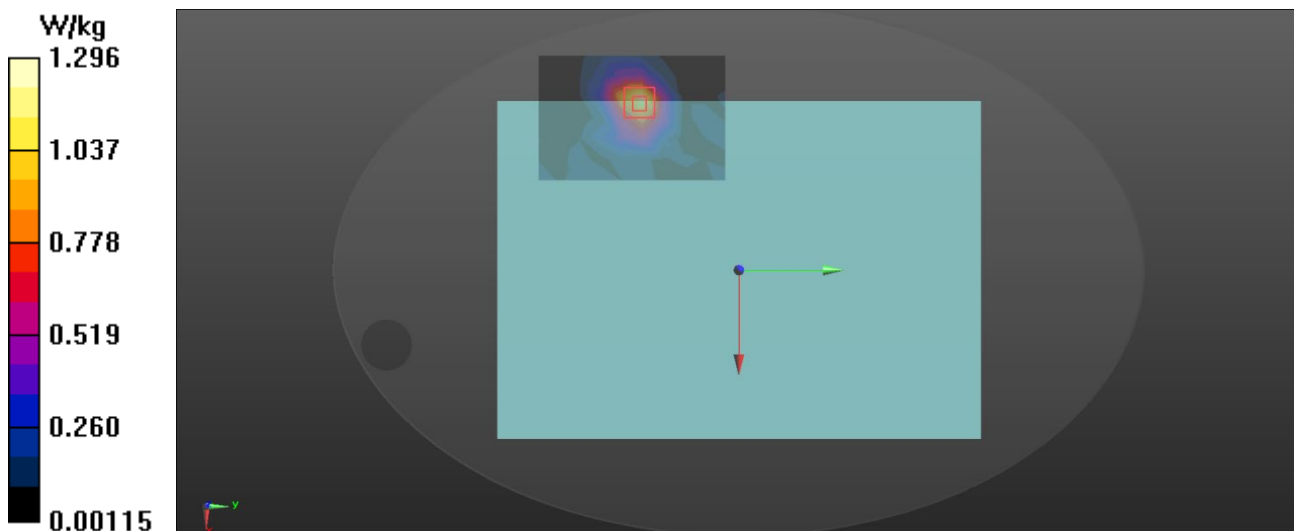

Test Laboratory: BTL Inc.

Date: 2023/12/15

W44_802.11a_CH149_Back of Keyboard_0cm_Ant Main_MB 2

DUT: Note Book;

Communication System: UID 10317 - AAD, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle); Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 5.288$ S/m; $\epsilon_r = 34.267$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.0 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(4.87, 4.87, 4.87) @ 5745 MHz; Calibrated: 2023/2/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1717; Calibrated: 2023/4/10
- Phantom: ELI V5.0; Type: QD OVA 001 BB; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (7x10x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.52 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.51 W/kg

SAR(1 g) = 0.581 W/kg; SAR(10 g) = 0.200 W/kg

Maximum value of SAR (measured) = 1.43 W/kg

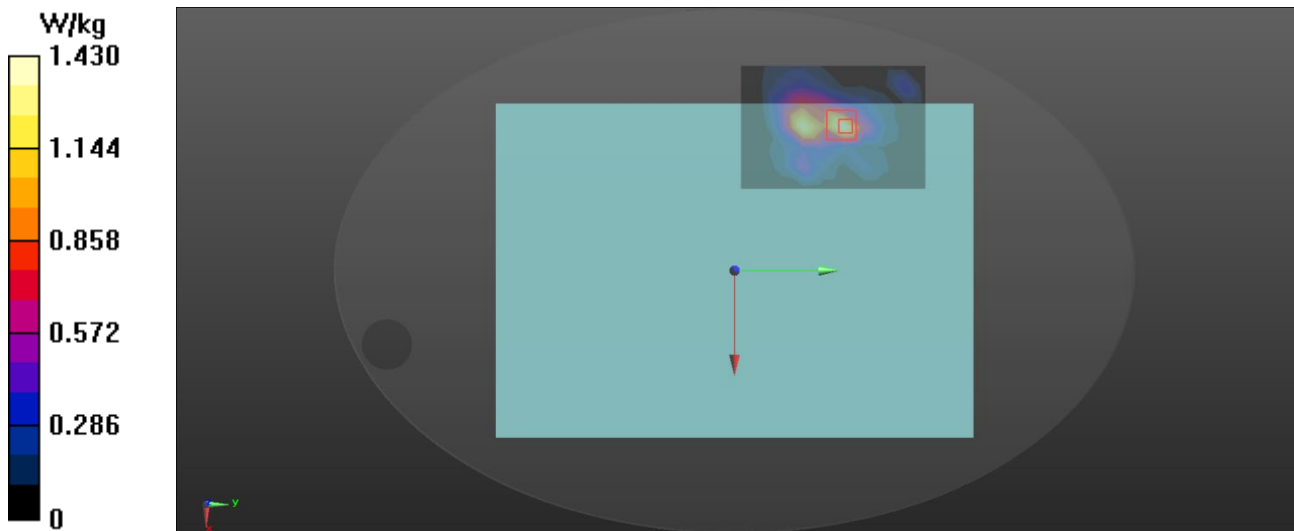

Test Laboratory: BTL Inc.

Date: 2023/12/15

W50_802.11a_CH157_Back of Keyboard_0cm_Ant Aux_MB 2

DUT: Note Book;

Communication System: UID 10317 - AAD, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.329$ S/m; $\epsilon_r = 34.169$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.0 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(4.87, 4.87, 4.87) @ 5785 MHz; Calibrated: 2023/2/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1717; Calibrated: 2023/4/10
- Phantom: ELI V5.0; Type: QD OVA 001 BB; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (7x10x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 1.24 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 2.875 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 2.54 W/kg
SAR(1 g) = 0.544 W/kg; SAR(10 g) = 0.202 W/kg
Maximum value of SAR (measured) = 1.33 W/kg

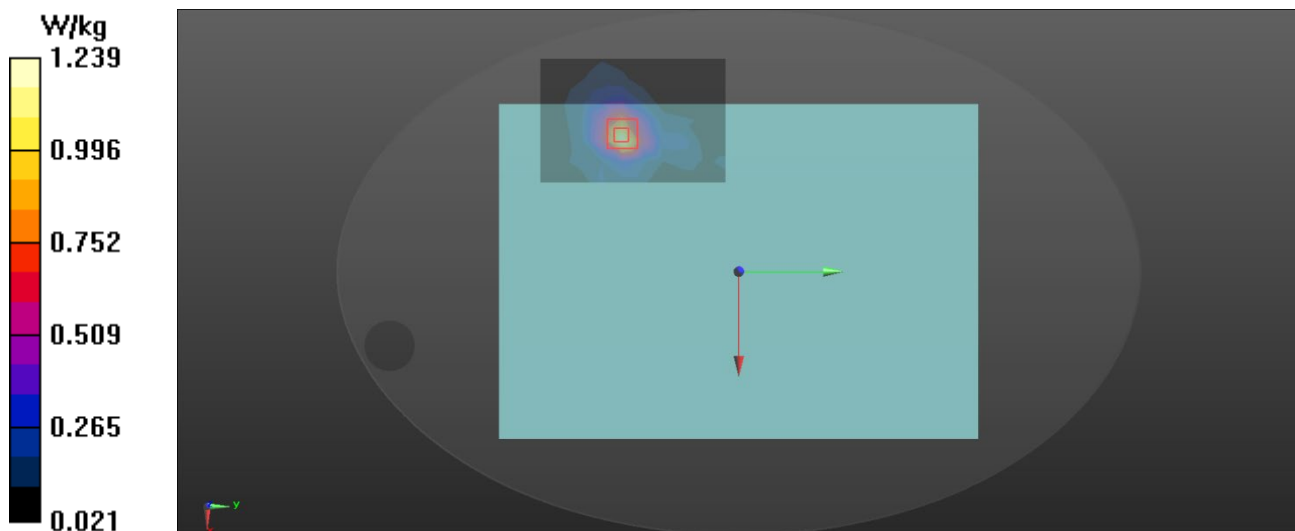

Test Laboratory: BTL Inc.

Date: 2023/12/15

W55_802.11ax HE40_CH175_Back of Keyboard_0cm_Ant Main_MB 2

DUT: Note Book;

Communication System: UID 10707 - AAC, IEEE 802.11ax (40MHz, MCS0, 99pc duty cycle); Frequency: 5875 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5875$ MHz; $\sigma = 5.412$ S/m; $\epsilon_r = 33.993$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.0 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(4.87, 4.87, 4.87) @ 5875 MHz; Calibrated: 2023/2/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1717; Calibrated: 2023/4/10
- Phantom: ELI V5.0; Type: QD OVA 001 BB; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (7x10x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 2.00 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 2.455 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 4.56 W/kg
SAR(1 g) = 0.903 W/kg; SAR(10 g) = 0.315 W/kg
Maximum value of SAR (measured) = 2.18 W/kg

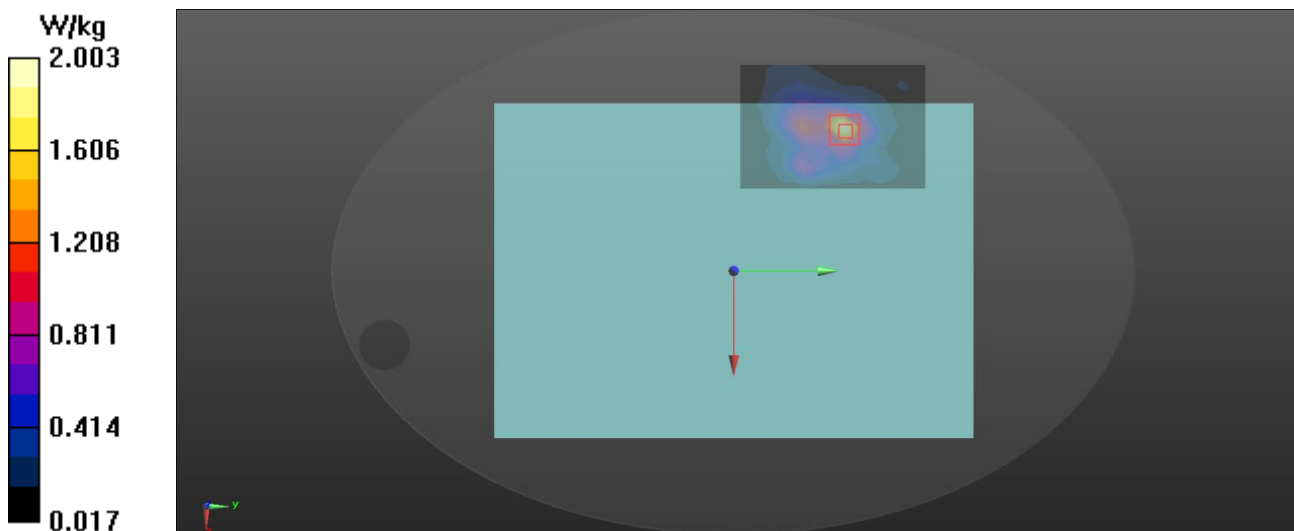

Test Laboratory: BTL Inc.

Date: 2023/12/15

W60_802.11ax HE40_CH175_Back of Keyboard_0cm_Ant Aux_MB 2

DUT: Note Book;

Communication System: UID 10707 - AAC, IEEE 802.11ax (40MHz, MCS0, 99pc duty cycle); Frequency: 5875 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5875$ MHz; $\sigma = 5.412$ S/m; $\epsilon_r = 33.993$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.0 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(4.87, 4.87, 4.87) @ 5875 MHz; Calibrated: 2023/2/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1717; Calibrated: 2023/4/10
- Phantom: ELI V5.0; Type: QD OVA 001 BB; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (7x10x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.969 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 1.264 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 2.34 W/kg
SAR(1 g) = 0.501 W/kg; SAR(10 g) = 0.181 W/kg
Maximum value of SAR (measured) = 1.25 W/kg

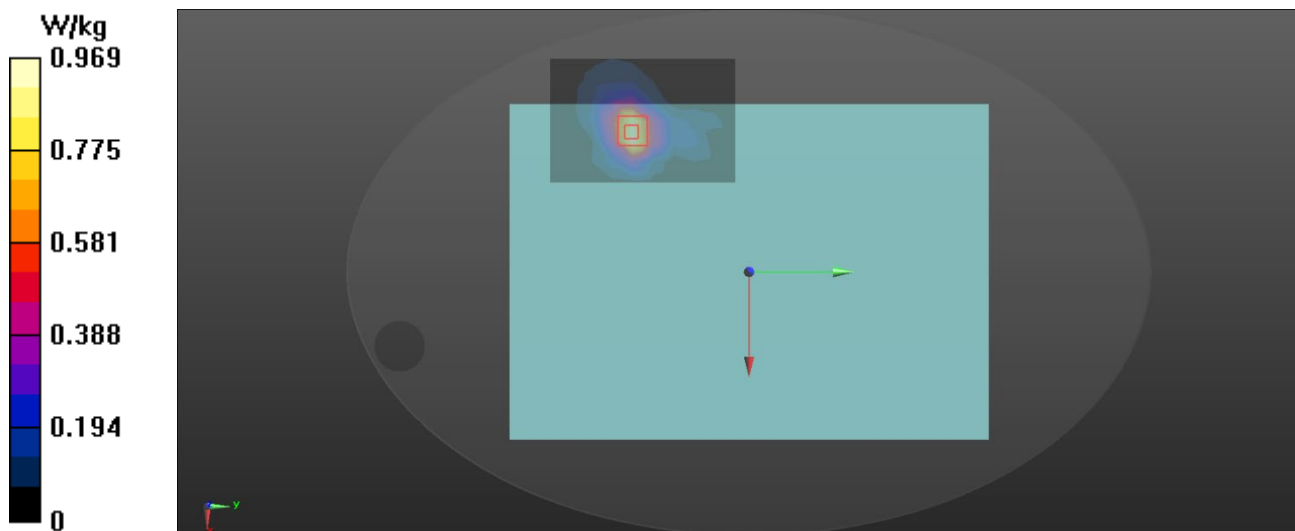

Measurement Report for Device, BACK, U-NII-5, UID 10755 AAC, Channel 31 (6105.0MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	350.0 x 244.0 x 23.0		Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	U-NII-5	WLAN, 10755-AAC	6105.0, 31	5.8	5.35	34.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2081	HBBL-695-10000 Charge:xxxx, --	EX3DV4 - SN7693, 2023-10-31	DAE4 Sn1423, 2023-03-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 119.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured


Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-16	2023-12-16
psSAR1g [W/kg]	0.235	0.247
psSAR10g [W/kg]	0.082	0.085
Power Drift [dB]	-0.06	-0.08
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		58.0
Dist 3dB Peak [mm]		8.8

Warning(s) / Error(s)

Details Area Scan
Warning(s)
Error(s)

Zoom Scan

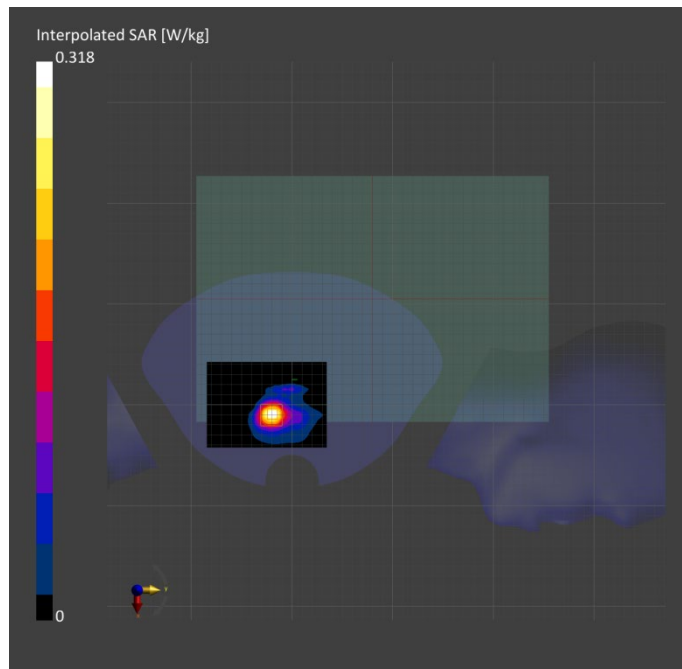

Measurement Report for Device, BACK, U-NII-5, UID 10755 AAC, Channel 31 (6105.0MHz)

Device under Test Properties

Model, Manufacturer Device,	Dimensions [mm] 350.0 x 244.0 x 23.0	IMEI	DUT Type Laptop
---------------------------------------	--	-------------	---------------------------

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	U-NII-5	WLAN, 10755-AAC	6105.0, 31	5.8	5.35	34.4

Hardware Setup

Phantom Twin-SAM V8.0 (30deg probe tilt) - 2081	TSL, Measured Date HBBL-695-10000 Charge:xxxx, --	Probe, Calibration Date EX3DV4 - SN7693, 2023-10-31	DAE, Calibration Date DAE4 Sn1423, 2023-03-17
---	---	---	---

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 119.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured


Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-16	2023-12-16
psSAR1g [W/kg]	0.248	0.247
psSAR10g [W/kg]	0.089	0.087
Power Drift [dB]	0.03	-0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		60.9
Dist 3dB Peak [mm]		8.4

Warning(s) / Error(s)

Details Area Scan
Warning(s)
Error(s)

Zoom Scan

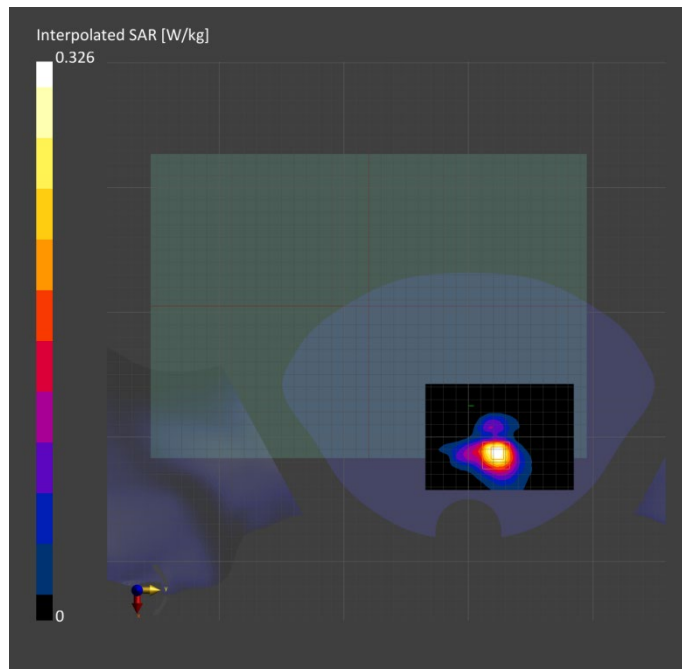

Measurement Report for Device, BACK, U-NII-5, UID 10743 AAC, Channel 63 (6265.0MHz)

Device under Test Properties

Model, Manufacturer Device	Dimensions [mm]	IMEI	DUT Type
	350.0 x 244.0 x 23.0		Laptop

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	BACK, 2.00	U-NII-5	WLAN, 10743-AAC	6105.0, 31	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- xxxx	--Air	EUmmWV4 - SN9626_F1-55GHz, 2023-05-17	DAE4 Sn1423, 2023-03-17

Scan Setup


	5G Scan	
Grid Extents [mm]	25.0 x	75.0
Grid Steps [lambda]	0.0625 x	0.0625
Sensor Surface [mm]		2.0
MAIA		Y

Measurement Results

	5G Scan
Date	2023-12-16
Avg.Area [cm ²]	4.00
psPDn+ [W/m ²]	2.56
psPDtot+ [W/m ²]	4.21
psPDmod+ [W/m ²]	4.75
E _{max} [V/m]	57.9
Power Drift [dB]	0.01

Warning(s) / Error(s)

Details	5G Scan
Warning(s)	
Error(s)	

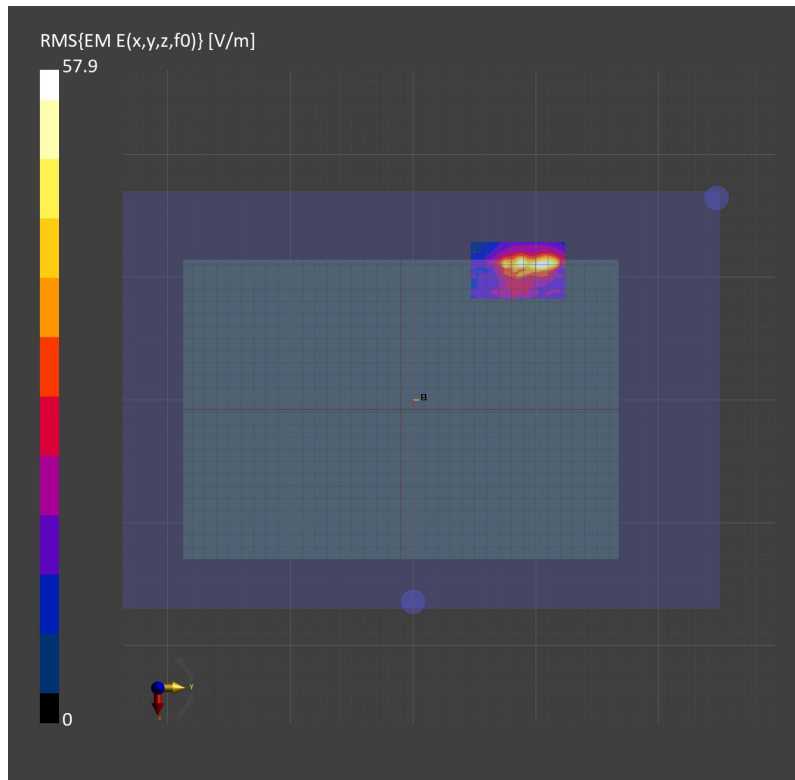

Measurement Report for Device, BACK, U-NII-5, UID 10743 AAC, Channel 63 (6265.0MHz)

Device under Test Properties

Model, Manufacturer Device	Dimensions [mm]	IMEI	DUT Type
	350.0 x 244.0 x 23.0		Laptop

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	BACK, 2.00	U-NII-5	WLAN, 10743-AAC	6105.0, 31	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- xxxx	--Air	EUmmWV4 - SN9626_F1-55GHz, 2023-05-17	DAE4 Sn1423, 2023-03-17

Scan Setup

	5G Scan	
Grid Extents [mm]	25.0 x	25.0
Grid Steps [lambda]	0.0625 x	0.0625
Sensor Surface [mm]		2.0
MAIA		Y

Measurement Results

	5G Scan
Date	2023-12-16
Avg.Area [cm ²]	4.00
psPDn+ [W/m ²]	3.57
psPDtot+ [W/m ²]	4.46
psPDmod+ [W/m ²]	4.95
E _{max} [V/m]	63.2
Power Drift [dB]	0.02

Warning(s) / Error(s)

Details	5G Scan
Warning(s)	
Error(s)	

