



InterLab®

FCC Measurement/Technical Report on

Bluetooth transceiver C1L

Report Reference: MDE_FAKT_0905_FCCa

Test Laboratory:

7 layers AG
Borsigstrasse 11
40880 Ratingen
Germany
email: info@7Layers.de



DGA-PL-192/99-02

Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the testing laboratory.

7 layers AG
Borsigstrasse 11
40880 Ratingen, Germany
Phone: +49 (0) 2102 749 0
Fax: +49 (0) 2102 749 350
www.7Layers.com

Aufsichtsratsvorsitzender •
Chairman of the Supervisory Board:
Markus Becker
Vorstand • Board:
Dr. H.-J. Meckelburg
Wilfried Klassmann

Registergericht • registered in:
Düsseldorf, HRB 44096
UST-IdNr • VAT No.:
DE 203159652
TAX No. 147/5869/0385



Table of Contents

0 Summary	3
0.1 Technical Report Summary	3
0.2 Measurement Summary	4
1 Administrative Data	7
1.1 Testing Laboratory	7
1.2 Project Data	7
1.3 Applicant Data	7
1.4 Manufacturer Data	7
2 Test object Data	8
2.1 General EUT Description	8
2.2 EUT Main components	9
2.3 Ancillary Equipment	9
2.4 Auxiliary Equipment	9
2.5 EUT Setups	10
2.6 Operating Modes	10
2.7 Product labelling	10
3 Test Results	11
3.1 Occupied bandwidth	11
3.2 Peak power output	14
3.3 Spurious RF conducted emissions	17
3.4 Spurious radiated emissions	20
3.5 Band edge compliance	26
3.6 Dwell time	30
3.7 Channel separation	32
3.8 Number of hopping frequencies	34
4 Test Equipment	35
5 Setup Drawings	44
6 Annex measurement plots	45
6.1 Occupied bandwidth	45
6.2 Peak power output	54
6.3 Band edge compliance conducted and Spurious RF conducted emissions	63
6.4 Band edge compliance radiated	81
6.5 Radiated emissions (f < 30 MHz)	84
6.6 Dwell time	88
6.7 Channel separation	89
6.8 Number of hopping frequencies	90



0 Summary

0.1 Technical Report Summary

Type of Authorization

Certification for an Intentional Radiator (Frequency Hopping Spread Spectrum).

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 (10-1-09 Edition) and 15 (10-1-09 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz

Note:

The tests were selected and performed with reference to the FCC Public Notice DA 00-705, released March 30, 2000.

Instead of applying ANSI C63.4-1992 which is referenced in the FCC Public Note, the newer ANSI C63.4-2003 is applied.

Summary Test Results:

The EUT complied with all performed tests as listed in chapter 0.2 Measurement Summary.



0.2 Measurement Summary

FCC Part 15, Subpart C

§ 15.207

Conducted emissions (AC power line)

The measurement was performed according to ANSI C63.4

2003

OP-Mode

op-mode 5

Setup

Setup_a01

Port

AC Port (power line)

Final Result

N/A

FCC Part 15, Subpart C

§ 15.247 (a) (1)

Occupied bandwidth

The measurement was performed according to FCC § 15.31

10-1-09 Edition

OP-Mode

op-mode 1

Setup

Setup_b01

Port

Temp ant.connector

Final Result

passed

op-mode 2

Setup_b01

Temp ant.connector

passed

op-mode 3

Setup_b01

Temp ant.connector

passed

op-mode 6

Setup_b01

Temp ant.connector

passed

op-mode 7

Setup_b01

Temp ant.connector

passed

op-mode 8

Setup_b01

Temp ant.connector

passed

op-mode 10

Setup_b01

Temp ant.connector

passed

op-mode 11

Setup_b01

Temp ant.connector

passed

op-mode 12

Setup_b01

Temp ant.connector

passed

FCC Part 15, Subpart C

§ 15.247 (b) (1)

Peak power output

The measurement was performed according to FCC § 15.31

10-1-09 Edition

OP-Mode

op-mode 1

Setup

Setup_b01

Port

Temp ant.connector

Final Result

passed

op-mode 2

Setup_b01

Temp ant.connector

passed

op-mode 3

Setup_b01

Temp ant.connector

passed

op-mode 6

Setup_b01

Temp ant.connector

passed

op-mode 7

Setup_b01

Temp ant.connector

passed

op-mode 8

Setup_b01

Temp ant.connector

passed

op-mode 10

Setup_b01

Temp ant.connector

passed

op-mode 11

Setup_b01

Temp ant.connector

passed

op-mode 12

Setup_b01

Temp ant.connector

passed

FCC Part 15, Subpart C

§ 15.247 (d)

Spurious RF conducted emissions

The measurement was performed according to FCC § 15.31

10-1-09 Edition

OP-Mode

op-mode 1

Setup

Setup_b01

Port

Temp ant.connector

Final Result

passed

op-mode 2

Setup_b01

Temp ant.connector

passed

op-mode 3

Setup_b01

Temp ant.connector

passed

op-mode 6

Setup_b01

Temp ant.connector

passed

op-mode 7

Setup_b01

Temp ant.connector

passed

op-mode 8

Setup_b01

Temp ant.connector

passed

op-mode 10

Setup_b01

Temp ant.connector

passed

op-mode 11

Setup_b01

Temp ant.connector

passed

op-mode 12

Setup_b01

Temp ant.connector

passed



FCC Part 15, Subpart C**§ 15.247 (d), § 15.35 (b), § 15.209**

Spurious radiated emissions

The measurement was performed according to ANSI C63.4

2003

OP-Mode	Setup	Port	Final Result
op-mode 1	Setup_a01	Enclosure	passed
op-mode 2	Setup_a01	Enclosure	passed
op-mode 3	Setup_a01	Enclosure	passed
op-mode 6	Setup_a01	Enclosure	passed
op-mode 7	Setup_a01	Enclosure	passed
op-mode 8	Setup_a01	Enclosure	passed
op-mode 10	Setup_a01	Enclosure	passed
op-mode 11	Setup_a01	Enclosure	passed
op-mode 12	Setup_a01	Enclosure	passed

FCC Part 15, Subpart C**§ 15.247 (d)**

Band edge compliance

The measurement was performed according to FCC § 15.31 /

10-1-09 Edition /

ANSI C63.4

2003

OP-Mode	Setup	Port	Final Result
op-mode 1	Setup_b01	Temp ant.connector	passed
op-mode 3	Setup_b01	Temp ant.connector	passed
op-mode 3	Setup_a01	Enclosure	passed
op-mode 6	Setup_b01	Temp ant.connector	passed
op-mode 8	Setup_b01	Temp ant.connector	passed
op-mode 8	Setup_a01	Enclosure	passed
op-mode 10	Setup_b01	Temp ant.connector	passed
op-mode 12	Setup_b01	Temp ant.connector	passed
op-mode 12	Setup_a01	Enclosure	passed

**FCC Part 15, Subpart C****§ 15.247 (a) (1) (iii)****Dwell time**

The measurement was performed according to FCC § 15.31 10-1-09 Edition
OP-Mode **Setup** **Port** **Final Result**
op-mode 2 Setup_b01 Temp ant.connector passed

FCC Part 15, Subpart C**§ 15.247 (a) (1)****Channel separation**

The measurement was performed according to FCC § 15.31 10-1-09 Edition
OP-Mode **Setup** **Port** **Final Result**
op-mode 4 Setup_b01 Temp ant.connector passed

FCC Part 15, Subpart C**§ 15.247 (a) (iii)****Number of hopping frequencies**

The measurement was performed according to FCC § 15.31 10-1-09 Edition
OP-Mode **Setup** **Port** **Final Result**
op-mode 4 Setup_b01 Temp ant.connector passed

N/A not applicable (the EUT is powered by DC)



7 layers AG, Borsigstr. 11
40880 Ratingen, Germany
Phone +49 (0)2102 749 0

Responsible for
Accreditation Scope:

Responsible
for Test Report:



1 Administrative Data

1.1 Testing Laboratory

Company Name: 7 Layers AG
Address: Borsigstr. 11
40880 Ratingen
Germany

This facility has been fully described in a report submitted to the FCC and accepted under the registration number 96716.

The test facility is also accredited by the following accreditation organisation:

- Deutscher Akkreditierungs Rat DAR- Registration no. DGA-PL-192/99-02

Responsible for Accreditation Scope: Dipl.-Ing. Bernhard Retka
Dipl.-Ing. Robert Machulec
Dipl.-Ing. Thomas Hoell
Dipl.-Ing. Andreas Petz

Report Template Version: 2010-05-07

1.2 Project Data

Responsible for testing and report: Dipl.-Ing. Andreas Petz
Date of Test(s): 2010-06-02 to 2010-06-04
Date of Report: 2010-06-08

1.3 Applicant Data

Company Name: FAKT s.r.l
Address: Via Lithos, 53
20086 Rezzato (BS)
Italy
Contact Person: Mr. Nicola Scartapacchio

1.4 Manufacturer Data

Company Name: Magneti Marelli S.p.A.
Address: Viale A. Borletti, 61/63
20010 Corbetta (MI)
Italy
Contact Person: Mr. Ing. Franco Schinco



2 Test object Data

2.1 General EUT Description

Equipment under Test	Bluetooth transceiver
Type Designation:	C1L
Kind of Device:	OEM Bluetooth Vehicular Device
(optional)	
Voltage Type:	DC
Voltage level:	12 V (Pb re-chargeable)
Modulation Type:	GFSK, 8DPSK, $\pi/4$ DQPSK

General product description:

Bluetooth is a short-range radio link intended to be a cable replacement between portable and/or fixed electronic devices.

Bluetooth operates in the unlicensed ISM Band at 2.4 GHz. In the US a band of 83.5 MHz width is available. In this band, the Bluetooth technology defines 79 RF channels spaced 1 MHz (2402 - 2480 MHz). The actual RF channel is chosen from a pseudo-random hopping sequence through the 79 channels. A channel is occupied for a defined amount of time slots, with a nominal slot length of 625 μ s. The maximum time slot length on one channel is defined by the packet type and is 0.625 ms for DH1 packets, 1.875 ms for DH3 and 3.125 ms for DH5. The nominal hop rate is 1600 hops/s for DH1, 1600/3 for DH3 and 1600/5 for DH5. All frequencies are equally used. The maximum nominal average time of occupancy is 0.4 s within a period of 79*0.4 seconds.

The basic data rate of 1 Mbps uses GFSK modulation and the enhanced data rate uses PSK modulation. For the enhanced data rate of 3 Mbps 8DPSK modulation and of 2 Mbps $\pi/4$ DQPSK modulation is used.

Specific product description for the EUT:

The EUT is a handsfree application which uses Bluetooth technology to be connected to e.g. a mobile phone, multimedia devices, Apple iPod, etc. which is built-in vehicles (cars).

The EUT provides the following ports:

Ports

Temp antenna connector
Enclosure
DC Port (power line, system connector)

The main components of the EUT are listed and described in Chapter 2.2.



2.2 EUT Main components

Type, S/N, Short Descriptions etc. used in this Test Report

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status	Date of Receipt
EUT A (Code: DA060a01) Remark: EUT A is equipped with an integral antenna (gain = 0.0 dBi).	Bluetooth transceiver	C1L	23/10/EMC	PS	B155	2010-06-02
EUT B (Code: DA060b01) Remark: EUT B is equipped with a temporary antenna connector.	Bluetooth transceiver	C1L	21/10/EMC	PS	B155	2010-06-02

NOTE: The short description is used to simplify the identification of the EUT in this test report.

2.3 Ancillary Equipment

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial no.	HW Status	SW Status	FCC ID
—	—	—	—	—	—	—

2.4 Auxiliary Equipment

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial no.	HW Status	SW Status	FCC ID
AUX 1	cable harness	—	—	—	—	—



2.5 EUT Setups

This chapter describes the combination of EUTs and ancillary equipment used for testing.

Setup No.	Combination of EUTs	Description
Setup_a01	EUT A + AUX 1	setup for radiated measurements
Setup_b01	EUT B + AUX 1	setup for conducted measurements

2.6 Operating Modes

This chapter describes the operating modes of the EUTs used for testing.

Op. Mode	Description of Operating Modes	Remarks
op-mode 1	The EUT transmits on 2402 MHz	Loopback mode, basic data rate 1 Mbps
op-mode 2	The EUT transmits on 2441 MHz	Loopback mode, basic data rate 1 Mbps
op-mode 3	The EUT transmits on 2480 MHz	Loopback mode, basic data rate 1 Mbps
op-mode 4	The EUT is in Hopping mode	The EUT is hopping on 79 channels, basic data rate 1 Mbps
op-mode 5	not used	–
op-mode 6	The EUT transmits on 2402 MHz	Loopback mode, enhanced data rate 3 Mbps
op-mode 7	The EUT transmits on 2441 MHz	Loopback mode, enhanced data rate 3 Mbps
op-mode 8	The EUT transmits on 2480 MHz	Loopback mode, enhanced data rate 3 Mbps
op-mode 9	not used	–
op-mode 10	The EUT transmits on 2402 MHz	Loopback mode, enhanced data rate, 2 Mbps
op-mode 11	The EUT transmits on 2441 MHz	Loopback mode, enhanced data rate, 2 Mbps
op-mode 12	The EUT transmits on 2480 MHz	Loopback mode, enhanced data rate, 2 Mbps
op-mode 13	not used	–

2.7 Product labelling

2.7.1 FCC ID label

Please refer to the documentation of the applicant.

2.7.2 Location of the label on the EUT

Please refer to the documentation of the applicant.



3 Test Results

3.1 Occupied bandwidth

Standard FCC Part 15, 10-1-09 Edition Subpart C

The test was performed according to: FCC §15.31

3.1.1 Test Description

The Equipment Under Test (EUT) was setup to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produces the worst-case (widest) occupied bandwidth. The resolution bandwidth for measuring the reference level and the occupied bandwidth was 30 kHz.

The EUT was connected to the spectrum analyzer via a short coax cable.

3.1.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Implication by the test laboratory:

Since the Bluetooth technology defines a fixed channel separation of 1 MHz this design parameter defines the maximum allowed occupied bandwidth depending on the EUT's output power:

1. Under the provision that the system operates with an output power not greater than 125 mW (21.0 dBm):
Implicit Limit: Max. 20 dB BW = $1.0 \text{ MHz} / 2/3 = 1.5 \text{ MHz}$
2. If the system output power exceeds 125 mW (21.0 dBm):
Implicit Limit: Max. 20 dB BW = 1.0 MHz

Used conversion factor: Output power (dBm) = $10 \log (\text{Output power (W)} / 1\text{mW})$

The measured output power of the system is below 125 mW (21.0 dBm).

For the results, please refer to the related chapter of this report.

Therefore the limit is determined as 1.5 MHz.



3.1.3 Test Protocol

Temperature: 23 °C
Air Pressure: 1016 hPa
Humidity: 32 %

Op. Mode	Setup	Port
op-mode 1	Setup_b01	Temp ant.connector

20 dB bandwidth MHz	Remarks
0.950	–

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 2	Setup_b01	Temp ant.connector

20 dB bandwidth MHz	Remarks
0.944	–

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 3	Setup_b01	Temp ant.connector

20 dB bandwidth MHz	Remarks
0.944	–

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 6	Setup_b01	Temp ant.connector

20 dB bandwidth MHz	Remarks
1.246	–

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 7	Setup_b01	Temp ant.connector

20 dB bandwidth MHz	Remarks
1.252	–

Remark: Please see annex for the measurement plot.



Op. Mode	Setup	Port
op-mode 8	Setup_b01	Temp ant.connector

20 dB bandwidth MHz	Remarks
1.258	-

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 10	Setup_b01	Temp ant.connector

20 dB bandwidth MHz	Remarks
1.300	-

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 11	Setup_b01	Temp ant.connector

20 dB bandwidth MHz	Remarks
1.336	-

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 12	Setup_b01	Temp ant.connector

20 dB bandwidth MHz	Remarks
1.336	-

Remark: Please see annex for the measurement plot.

3.1.4 Test result: Occupied bandwidth

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1	passed
	op-mode 2	passed
	op-mode 3	passed
	op-mode 6	passed
	op-mode 7	passed
	op-mode 8	passed
	op-mode 10	passed
	op-mode 11	passed
	op-mode 12	passed



3.2 Peak power output

Standard FCC Part 15, 10-1-09 Edition Subpart C

The test was performed according to: FCC §15.31

3.2.1 Test Description

The Equipment Under Test (EUT) was set up to perform the output power measurements. The resolution bandwidth for measuring the output power was set to 3 MHz. The reference level of the spectrum analyzer was set higher than the output power of the EUT. The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

3.2.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (b) (1)

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW)

==> Maximum Output Power: 30 dBm



3.2.3 Test Protocol

Temperature: 23 °C
Air Pressure: 1016 hPa
Humidity: 32 %

Op. Mode	Setup	Port
op-mode 1	Setup_b01	Temp.ant.connector

Output power dBm	Remarks
4.6	The EIRP is equal to the output power including antenna gain of 0.0 dBi.

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 2	Setup_b01	Temp.ant.connector

Output power dBm	Remarks
4.4	The EIRP is equal to the output power including antenna gain of 0.0 dBi.

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 3	Setup_b01	Temp.ant.connector

Output power dBm	Remarks
4.1	The EIRP is equal to the output power including antenna gain of 0.0 dBi.

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 6	Setup_b01	Temp.ant.connector

Output power dBm	Remarks
4.7	The EIRP is equal to the output power including antenna gain of 0.0 dBi.

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 7	Setup_b01	Temp.ant.connector

Output power dBm	Remarks
4.5	The EIRP is equal to the output power including antenna gain of 0.0 dBi.

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 8	Setup_b01	Temp.ant.connector

Output power dBm	Remarks
4.2	The EIRP is equal to the output power including antenna gain of 0.0 dBi.

Remark: Please see annex for the measurement plot.



Op. Mode	Setup	Port
op-mode 10	Setup_b01	Temp.ant.connector

Output power dBm	Remarks
4.3	The EIRP is equal to the output power including antenna gain of 0.0 dBi.

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 11	Setup_b01	Temp.ant.connector

Output power dBm	Remarks
4.1	The EIRP is equal to the output power including antenna gain of 0.0 dBi.

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 12	Setup_b01	Temp.ant.connector

Output power dBm	Remarks
3.8	The EIRP is equal to the output power including antenna gain of 0.0 dBi.

Remark: Please see annex for the measurement plot.

3.2.4 Test result: Peak power output

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1	passed
	op-mode 2	passed
	op-mode 3	passed
	op-mode 6	passed
	op-mode 7	passed
	op-mode 8	passed
	op-mode 10	passed
	op-mode 11	passed
	op-mode 12	passed



3.3 Spurious RF conducted emissions

Standard FCC Part 15, 10-1-09 Edition Subpart C

The test was performed according to: FCC §15.31

3.3.1 Test Description

The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Detector: Peak-Maxhold
- Frequency range: 30 – 25000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweep Time: 330 s

The reference value for the measurement of the spurious RF conducted emissions is determined during the test "band edge compliance" (cf. chapter 3.5). This value is used to calculate the 20 dBc limit.

3.3.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

3.3.3 Test Protocol

Temperature: 23 °C
 Air Pressure: 1016 hPa
 Humidity: 32 %

Op. Mode	Setup	Port		
op-mode 1	Setup_b01	Temp ant.connector		
Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Delta to limit dB
-	-	-	-	-

Remark: No (further) spurious emissions in the range 20 dB below the limit found.
 Please see annex for the measurement plot.

Op. Mode	Setup	Port		
op-mode 2	Setup_b01	Temp ant.connector		
Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Delta to limit dB
4884	-35.3	4.1	-15.9	19.4

Remark: No (further) spurious emissions in the range 20 dB below the limit found.
 Please see annex for the measurement plot.

Op. Mode	Setup	Port		
op-mode 3	Setup_b01	Temp ant.connector		
Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Delta to limit dB
4934	-35.2	3.7	-16.3	18.9

Remark: No (further) spurious emissions in the range 20 dB below the limit found.
 Please see annex for the measurement plot.

Op. Mode	Setup	Port		
op-mode 6	Setup_b01	Temp ant.connector		
Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Delta to limit dB
-	-	-	-	-

Remark: No (further) spurious emissions in the range 20 dB below the limit found.
 Please see annex for the measurement plot.

Op. Mode	Setup	Port		
op-mode 7	Setup_b01	Temp ant.connector		
Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Delta to limit dB
4884	-36.5	2.7	-17.3	19.2

Remark: No (further) spurious emissions in the range 20 dB below the limit found.
 Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 8	Setup_b01	Temp ant.connector

Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Delta to limit dB
4934	-36.1	2.4	-17.6	18.5

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 10	Setup_b01	Temp ant.connector

Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Delta to limit dB
-	-	-	-	-

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 11	Setup_b01	Temp ant.connector

Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Delta to limit dB
4884	-37.1	2.7	-17.3	19.8

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 12	Setup_b01	Temp ant.connector

Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Delta to limit dB
4934	-36.4	2.4	-17.6	18.8

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Please see annex for the measurement plot.

3.3.4 Test result: Spurious RF conducted emissions

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1	passed
	op-mode 2	passed
	op-mode 3	passed
	op-mode 6	passed
	op-mode 7	passed
	op-mode 8	passed
	op-mode 10	passed
	op-mode 11	passed
	op-mode 12	passed



3.4 Spurious radiated emissions

Standard FCC Part 15, 10-1-09 Edition Subpart C

The test was performed according to: ANSI C 63.4, 2003

3.4.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2003. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The radiated emissions measurements were made in a typical installation configuration. The measurement procedure is implemented into the EMI test software ES-K1 from R&S.

1. Measurement up to 30 MHz

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2003. The Equipment Under Test (EUT) was set up on a non-conductive table in the anechoic chamber.

The radiated emissions measurements were made in a typical installation configuration. The measurement procedure is implemented into the EMI test software ES-K1 from R&S. The Loop antenna HFH2-Z2 is used.

Step 1: pre-measurement

- Anechoic chamber
- Antenna distance: 10 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 and 0.15 – 30 MHz
- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 100 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 200 Hz - 10 kHz
- Measuring time / Frequency step: 100 ms

2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 µs (BT Timing 1.25 ms)

- Turntable angle range: -180 to 180°
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: second measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -180 to 180°
- Turntable step size: 45°
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0.5 m

Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by +/- 22.5° around this value.

During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by +/- 25 cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -22.5° to + 22.5 ° around the determined value
- Height variation range: -0.25 m to + 0.25 m around the determined value

Step 4: final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18-25 GHz) are used, the steps 2-4 are omitted. Step 1 was performed with one height of the receiving antenna only.

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

For the enhanced data rate packets the test is performed as worst-case-check in order to verify that emissions have a comparable level as found at basic data rate. Typically, the measurement for these packets is performed in the frequency range 1 to 8 GHz but it depends on the emissions found during the test for the basic data rate. Please refer to the results for the used frequency range.

3.4.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (μ V/m)	Measurement distance (m)	Limit(dB μ V/m @10m)
0.009 – 0.49	2400/F(kHz)	300	Limit (dB μ V/m) +30dB
0.49 – 1.705	24000/F(kHz)	30	Limit (dB μ V/m) +10dB
1.705 - 30	30	30	Limit (dB μ V/m) +10dB

Frequency in MHz	Limit (μ V/m)	Measurement distance (m)	Limit (dB μ V/m)
30 - 88	100	3	40.0
88 - 216	150	3	43.5
216 - 960	200	3	46.0
above 960	500	3	54.0

§15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dB μ V/m) = 20 log (Limit (μ V/m)/1 μ V/m)

3.4.3 Test Protocol

Temperature: 25 °C
 Air Pressure: 1013 – 1016 hPa
 Humidity: 32 – 35 %

3.4.3.1 Measurement up to 30 MHz

Op. Mode	Setup	Port							
op-mode 1	Setup_a01	Enclosure							
Polarisation	Frequency MHz	Corrected value dB μ V/m			Limit dB μ V/m	Limit dB μ V/m	Limit dB μ V/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
0°	-	-	-	-	-	-	-	-	-
90°	-	-	-	-	-	-	-	-	-

Remark: No (further) spurious emissions in the range 20 dB below the limit found therefore step 2 was not performed. The found peaks at 91.2 and 99.2 kHz are emissions from loop antenna power supply.

3.4.3.2 Measurement above 30 MHz

Op. Mode	Setup	Port							
op-mode 1	Setup_a01	Enclosure							
Polarisation	Frequency MHz	Corrected value dB μ V/m			Limit dB μ V/m	Limit dB μ V/m	Limit dB μ V/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vert. + Hor.	2389	-	52.8	37.8	-	74.0	54.0	21.2	16.3
Vert. + Hor.	4804	-	48.0	35.8	-	74.0	54.0	26.0	18.2

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Op. Mode	Setup	Port							
op-mode 2	Setup_a01	Enclosure							
Polarisation	Frequency MHz	Corrected value dB μ V/m			Limit dB μ V/m	Limit dB μ V/m	Limit dB μ V/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vert. + Hor.	4882	-	53.3	39.9	-	74.0	54.0	20.7	14.1
Vert. + Hor.	7323	-	48.0	35.7	-	74.0	54.0	26.0	18.3

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Op. Mode	Setup	Port
op-mode 3	Setup_a01	Enclosure

Polarisation	Frequency MHz	Corrected value dB μ V/m			Limit dB μ V/m	Limit dB μ V/m	Limit dB μ V/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vert. + Hor.	2484	-	55.1	37.6	-	74.0	54.0	18.9	16.4
Vert. + Hor.	4960	-	55.4	41.7	-	74.0	54.0	18.6	12.3
Vert. + Hor.	7440	-	47.3	34.8	-	74.0	54.0	26.7	19.2

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Op. Mode	Setup	Port
op-mode 6	Setup_a01	Enclosure

Polarisation	Frequency MHz	Corrected value dB μ V/m			Limit dB μ V/m	Limit dB μ V/m	Limit dB μ V/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vert. + Hor.	4804	-	49.6	36.5	-	74.0	54.0	24.4	17.5

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

The measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in op-mode 1, 2 and 3.

Op. Mode	Setup	Port
op-mode 7	Setup_a01	Enclosure

Polarisation	Frequency MHz	Corrected value dB μ V/m			Limit dB μ V/m	Limit dB μ V/m	Limit dB μ V/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vert. + Hor.	4882	-	52.3	38.3	-	74.0	54.0	21.7	15.7

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

The measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in op-mode 1, 2 and 3.

Op. Mode	Setup	Port
op-mode 8	Setup_a01	Enclosure

Polarisation	Frequency MHz	Corrected value dB μ V/m			Limit dB μ V/m	Limit dB μ V/m	Limit dB μ V/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vert. + Hor.	2486	-	52.7	37.4	-	74.0	54.0	21.3	16.6 -
Vert. + Hor.	4960	-	54.1	39.9	-	74.0	54.0	19.9	14.1

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

The measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in op-mode 1, 2 and 3.

Op. Mode	Setup	Port
op-mode 10	Setup_a01	Enclosure

Polarisation	Frequency MHz	Corrected value dB μ V/m			Limit dB μ V/m	Limit dB μ V/m	Limit dB μ V/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vert. + Hor.	2389	-	52.0	37.4	-	74.0	54.0	22.0	16.6
Vert. + Hor.	4804	-	49.4	36.2	-	74.0	54.0	24.6	17.8

Remark: No (further) spurious emissions in the range 20 dB below the limit found.
 The measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in op-mode 1, 2 and 3.

Op. Mode	Setup	Port
op-mode 11	Setup_a01	Enclosure

Polarisation	Frequency MHz	Corrected value dB μ V/m			Limit dB μ V/m	Limit dB μ V/m	Limit dB μ V/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vert. + Hor.	4882	-	51.4	38.2	-	74.0	54.0	22.6	15.8

Remark: No (further) spurious emissions in the range 20 dB below the limit found.
 The measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in op-mode 1, 2 and 3.

Op. Mode	Setup	Port
op-mode 12	Setup_a01	Enclosure

Polarisation	Frequency MHz	Corrected value dB μ V/m			Limit dB μ V/m	Limit dB μ V/m	Limit dB μ V/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vert. + Hor.	2484	-	53.7	37.7	-	74.0	54.0	20.3	16.3
Vert. + Hor.	4960	-	53.8	39.9	-	74.0	54.0	20.3	14.1

Remark: No (further) spurious emissions in the range 20 dB below the limit found.
 The measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in op-mode 1, 2 and 3.

3.4.4 Test result: Spurious radiated emissions

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1	passed
	op-mode 2	passed
	op-mode 3	passed
	op-mode 6	passed
	op-mode 7	passed
	op-mode 8	passed
	op-mode 10	passed
	op-mode 11	passed
	op-mode 12	passed



3.5 Band edge compliance

Standard FCC Part 15, 10-1-09 Edition Subpart C

The test was performed according to: ANSI C 63.4, 2003 FCC §15.31

3.5.1 Test Description

The procedure to show compliance with the band edge requirement is divided into two measurements: 1. Show compliance of the lower band edge by a conducted measurement and 2. show compliance of the higher band edge by a radiated and conducted measurement.

For the first measurement the EUT is set to transmit on the lowest channel (2402 MHz). The lower band edge is 2400 MHz.

Analyzer settings:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

For the second measurement the EUT is set to transmit on the highest channel (2480 MHz). The higher band edge is 2483.5 MHz.

Analyzer settings for conducted measurement:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

3.5.2 Test Requirements / Limits

FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

...

Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."

For the measurement of the **lower band edge** the RF power at the band edge shall be "at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power..."

For the measurement of the **higher band edge** the limit is "specified in Section 15.209(a)".



3.5.3 Test Protocol

3.5.3.1 Lower band edge

Conducted measurement

Temperature: 23 °C
Air Pressure: 1016 hPa
Humidity: 32 %

Op. Mode	Setup	Port		
op-mode 1	Setup_b01	Temp ant.connector		
Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Delta to limit dB
2400.00	-53.9	4.4	-15.6	38.3

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port		
op-mode 6	Setup_b01	Temp ant.connector		
Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Delta to limit dB
2400.00	-53.6	2.8	-17.2	36.4

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port		
op-mode 10	Setup_b01	Temp ant.connector		
Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Delta to limit dB
2400.00	-54.7	2.8	-17.2	37.5

Remark: Please see annex for the measurement plot.



3.5.3.2 Higher band edge

Conducted measurement

Temperature: 23 °C
Air Pressure: 1016 hPa
Humidity: 32 %

Op. Mode	Setup	Port		
op-mode 3	Setup_b01	Temp ant.connector		
Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Delta to limit dB
2483.50	-59.2	3.7	-16.3	42.9

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port		
op-mode 8	Setup_b01	Temp ant.connector		
Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Delta to limit dB
2483.50	-59.9	2.4	-17.6	42.3

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port		
op-mode 12	Setup_b01	Temp ant.connector		
Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Delta to limit dB
2483.50	-59.0	2.4	-17.6	41.4

Remark: Please see annex for the measurement plot.

Radiated measurement

Temperature: 25 °C
 Air Pressure: 1013 hPa
 Humidity: 35 %

Op. Mode	Setup	Port
op-mode 3	Setup_a01	Enclosure

Frequency MHz	Polarisation	Corrected value dB μ V/m		Limit Peak dB μ V/m	Limit AV dB μ V/m	Delta to Peak limit/dB	Delta to AV limit dB
		Peak	AV				
2483.50	Vert. + Hor.	55.1	37.6	74.0	54.0	18.9	16.4

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 8	Setup_a01	Enclosure

Frequency MHz	Polarisation	Corrected value dB μ V/m		Limit Peak dB μ V/m	Limit AV dB μ V/m	Delta to Peak limit/dB	Delta to AV limit dB
		Peak	AV				
2483.50	Vert. + Hor.	52.7	37.4	74.0	54.0	21.3	16.6

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 12	Setup_a01	Enclosure

Frequency MHz	Polarisation	Corrected value dB μ V/m		Limit Peak dB μ V/m	Limit AV dB μ V/m	Delta to Peak limit/dB	Delta to AV limit dB
		Peak	AV				
2483.50	Vert. + Hor.	53.7	37.7	74.0	54.0	20.3	16.3

Remark: Please see annex for the measurement plot.

3.5.4 Test result: Band edge compliance

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1	passed
	op-mode 3	passed
	op-mode 6	passed
	op-mode 8	passed
	op-mode 10	passed
	op-mode 12	passed



3.6 Dwell time

Standard FCC Part 15, 10-1-09 Edition Subpart C

The test was performed according to: FCC §15.31

3.6.1 Test Description

The Equipment Under Test (EUT) was set up to perform the dwell time measurements. The EUT was connected to the spectrum analyzer via a short coax cable. The dwell time is calculated by:

Dwell time = time slot length * hop rate / number of hopping channels * 31.6 s

with:

- hop rate = $1600 * 1/s$ for DH1 packets = 1600 s^{-1}
- hop rate = $1600/3 * 1/s$ for DH3 packets = 533.33 s^{-1}
- hop rate = $1600/5 * 1/s$ for DH5 packets = 320 s^{-1}
- number of hopping channels = 79
- $31.6 \text{ s} = 0.4 \text{ seconds multiplied by the number of hopping channels} = 0.4 \text{ s} * 79$

The highest value of the dwell time is reported.

3.6.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Since the Bluetooth technology uses 79 channels this period is calculated to be 31.6 seconds.



3.6.3 Test Protocol

Temperature: 23 °C
Air Pressure: 1016 hPa
Humidity: 32 %

Op. Mode		Port	
op-mode 2		Temp ant.connector	
Packet type	Time slot length ms	Dwell time	Dwell time ms
DH5	2.866	time slot length * 1600/5 /79 * 31.6	366.85

Remark: Please see annex for the measurement plots.

3.6.4 Test result: Dwell time

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 2	passed



3.7 Channel separation

Standard FCC Part 15, 10-1-09 Edition Subpart C

The test was performed according to: FCC §15.31

3.7.1 Test Description

The Equipment Under Test (EUT) was set up to perform the channel separation measurements. The channel separation is independent from the modulation pattern. The EUT was connected to spectrum analyzer via a short coax cable.

Analyzer settings:

- Detector: Peak-Maxhold
- Span: 3 MHz
- Centre Frequency: a mid frequency of the 2.4 GHz ISM band
- Resolution Bandwidth (RBW): 30 kHz
- Video Bandwidth (VBW): 100 kHz
- Sweep Time: Coupled

3.7.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.



3.7.3 Test Protocol

Temperature: 23 °C
Air Pressure: 1016 hPa
Humidity: 32 %

Op. Mode	Setup	Port
op-mode 4	Setup_b01	Temp ant.connector
Channel separation		Remarks
MHz		-
1.000		-

Remark: Please see annex for the measurement plot.

3.7.4 Test result: Channel separation

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 4	passed



3.8 Number of hopping frequencies

Standard FCC Part 15, 10-1-09 Edition Subpart C

The test was performed according to: FCC §15.31

3.8.1 Test Description

The Equipment Under Test (EUT) was set up to perform the number of hopping frequencies measurement. The number of hopping frequencies is independent from the modulation pattern.

The EUT was connected to spectrum analyzer via a short coax cable.

Analyzer settings:

- Detector: Peak-Maxhold
- Centre frequency: 2442 MHz
- Frequency span: 84 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweep Time: Coupled

3.8.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

3.8.3 Test Protocol

Temperature: 23 °C

Air Pressure: 1016 hPa

Humidity: 32 %

Op. Mode	Setup	Port
op-mode 4	Setup_b01	Temp ant.connector
Number of hopping channels		Remarks
79		-

Remark: Please see annex for the measurement plot.

3.8.4 Test result: Number of hopping frequencies

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 4	passed

4 Test Equipment

Test Equipment Details

List of Used Test Equipment

The calibration, hardware and software states are shown for the testing period.

Test Equipment Anechoic Chamber

Lab ID:	Lab 3		
Manufacturer:	Frankonia		
Description:	Anechoic Chamber for radiated testing		
Type:	10.58x6.38x6		
	<i>Calibration Details</i>	<i>Last Execution</i>	<i>Next Exec.</i>
	IC renewal	2009/01/21	2011/01/20
	FCC renewal	2009/01/07	2011/01/06

Single Devices for Anechoic Chamber

Single Device Name	Type	Serial Number	Manufacturer
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6	none	Frankonia
	<i>Calibration Details</i>	<i>Last Execution</i>	<i>Next Exec.</i>
	FCC listing 96716 3m Part15/18	2009/01/07	2011/01/06
	ANSI C64.3 NSA	2009/01/21	2011/01/20
Controller Innco 2000	CO 2000	CO2000/328/12470 406/L	Innco innovative constructions GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita

Test Equipment Auxiliary Equipment for Conducted emissions

Lab ID:	Lab 1		
Manufacturer:	Rohde & Schwarz GmbH & Co.KG		
Description:	EMI Conducted Auxiliary Equipment		

Single Devices for Auxiliary Equipment for Conducted emissions

Single Device Name	Type	Serial Number	Manufacturer
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber&Suhner
Coupling-Decoupling-Network	CDN ENY41	100002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>	<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration	2008/03/06	2011/03/05
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz GmbH & Co. KG
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>	<i>Last Execution</i>	<i>Next Exec.</i>
	DKD calibration	2008/10/13	2011/10/12

Test Equipment Auxiliary Equipment for Radiated emissions

Lab ID:
Lab 3
Description:

Equipment for emission measurements

Serial Number:

see single devices

Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer	
Antenna mast	AS 620 P		HD GmbH	
Biconical dipole	VUBA 9117	9117108	Schwarzbeck	<i>Last Execution</i> <i>Next Exec.</i>
	<i>Calibration Details</i>			
Broadband Amplifier 18MHz-26GHz	Standard Calibration		2008/10/27	2013/10/26
Broadband Amplifier 1GHz-4GHz	JS4-18002600-32-5P	849785	Miteq	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
Broadband Amplifier 1GHz-4GHz	Path Calibration		2010/05/10	2010/11/09
Broadband Amplifier 30MHz-18GHz	AFS4-01000400-1Q-10P-4	-	Miteq	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
Broadband Amplifier 30MHz-18GHz	Path Calibration		2010/05/10	2010/11/09
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2+W38.01 - Kabel Kusch 2	Last Execution Next Exec.	
	<i>Calibration Details</i>			
Cable "ESI to Horn Antenna"	Path Calibration		2010/05/10	2010/11/09
Double -ridged horn	UFB311A+UFB293C	W18.02-2+W38.02 - Rosenberger Micro-Coax 2	Last Execution Next Exec.	
	<i>Calibration Details</i>			
Double -ridged horn	Path Calibration		2010/05/10	2010/11/09
Double -ridged horn	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
Double -ridged horn	Standard Calibration		2009/04/16	2012/04/15
Double -ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
Double -ridged horn	Standard Calibration		2009/04/28	2012/04/27
Dreheinheit	DE 325		HD GmbH	
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
High Pass Filter	Path Calibration		2010/05/10	2010/11/09
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
High Pass Filter	Path Calibration		2010/05/10	2010/11/09
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
High Pass Filter	Path Calibration		2010/05/10	2010/11/09
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
Log.-per. Antenna	Standard Calibration		2009/05/27	2012/05/26

Single Devices for Auxiliary Equipment for Radiated emissions (continued)

Single Device Name	Type	Serial Number	Manufacturer
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DKD calibration		2008/10/07 2011/10/06
Pyramidal Horn Antenna 3160-09 26,5 GHz		00083069	EMCO Elektronik GmbH
Pyramidal Horn Antenna 3160-10 40 GHz		00086675	EMCO Elektronik GmbH

Test Equipment Auxiliary Test Equipment

Lab ID: Lab 3, Lab 4
Manufacturer: see single devices
Description: Single Devices for various Test Equipment
Type: various
Serial Number: none

Single Devices for Auxiliary Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
AC Power Source	Chroma 6404	64040001304	Chroma ATE INC.
Broadband Power Divider1506A / 93459 N (Aux)		LM390	Weinschel Associates
Broadband Power DividerWA1515 SMA		A855	Weinschel Associates
Digital Multimeter 01 (Multimeter)	Voltcraft M-3860M	IJ096055	Conrad Electronics
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2009/10/07 2011/10/06
Digital Oscilloscope [SA2] (Aux)	TDS 784C	B021311	Tektronix GmbH
Fibre optic link Satellite	FO RS232 Link	181-018	Pontis
(Aux)			
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH
Notch Filter Ultra Stable	WRCA800/960-6EEK (Aux)	24	Wainwright
Spectrum Analyser	FSP3	836722/011	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DKD calibration		2008/10/06 2011/10/05
Vector Signal Generator	SMIQ B3	832492/061	



Test Equipment Digital Signalling Devices

Lab ID:**Lab 1, Lab 3, Lab 4****Description:**

Signalling equipment for various wireless technologies.

Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer
Bluetooth Signalling Unit CBT CBT		100589	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2008/08/14 2011/08/13
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2008/10/07 2010/10/06
Digital Radio Test Set	6103E	2359	Racal Instruments, Ltd.
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2009/02/16 2011/02/15
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Hardware: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04		2007/07/16
	Software: K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22		
	Firmware: μP1 8v50 02.05.06		

Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2008/12/01 2011/11/30
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02		2007/01/02
	SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10,		
	Firmware: μP1 8v40 01.12.05		

	SW: K62, K69		2008/11/03
Vector Signal Generator	SMU200A	100912	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2008/10/28 2011/10/27

Test Equipment Emission measurement devices

Lab ID: **Lab 1, Lab 3**
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Emission measurement devices

Single Device Name	Type	Serial Number	Manufacturer
Personal Computer	Dell	30304832059	Dell
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2007/12/05 2010/12/04
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2009/12/03 2011/12/02

Test Equipment Multimeter 12

Lab ID: **Lab 5, Lab 6**
Description: Ex-Tech 520
Serial Number: 05157876

Single Devices for Multimeter 12

Single Device Name	Type	Serial Number	Manufacturer
Digital Multimeter 12 (Multimeter)	EX520	05157876	Extech Instruments Corp.
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2009/10/07 2010/10/06
	Standard calibration		2009/10/07 2011/10/06

Test Equipment Radio Lab Test Equipment

Lab ID: Lab 4
Description: Radio Lab Test Equipment

Single Devices for Radio Lab Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
Broadband Power Divider SMA	WA1515	A856	Weinschel Associates
Coax Attenuator 10dB SMA 2W	4T-10	F9401	Weinschel Associates
Coax Attenuator 10dB SMA 2W	56-10	W3702	Weinschel Associates
Coax Attenuator 10dB SMA 2W	56-10	W3711	Weinschel Associates
Coax Cable Huber&Suhner	Sucotest 2,0m		Rosenberger Micro-Coax
Coax Cable Rosenberger FA210A0010003030 Micro Coax FA210A0010003030 SMA/SMA 1,0m		54491-2	Rosenberger Micro-Coax
Power Sensor	NRV-Z1	836219/005	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2009/10/20 2011/10/19
Powermeter	NRVS	836333/064	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2009/10/15 2011/10/14
RF Step Attenuator RSP	RSP	833695/001	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2008/06/18 2011/06/17
Rubidium Frequency Standard	Datum, Model: MFL	2689/001	Datum-Beverly
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2009/06/23 2010/06/22
Signal Generator	SMY02	829309/018	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	standard calibration		2008/10/07 2011/10/06
Signal Generator SMP	SMP02	836402/008	Rohde & Schwarz GmbH & Co. KG
Spectrum Analyser	FSIQ26	840061/005	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	calibration		2008/10/02 2010/10/01
Temperature Chamber Vötsch 05	VT 4002	58566080550010	Vötsch
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Specific calibration		2010/03/16 2011/03/15
Vector Signal Generator	SMIQ 03B	837747/020	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard/DKD Calibration		2008/10/09 2011/10/08



Test Equipment Regulatory Bluetooth RF Test Solution

Lab ID: Lab 5
Description: Regulatory Bluetooth RF Tests
Type: Bluetooth RF
Serial Number: 001

Single Devices for Regulatory Bluetooth RF Test Solution

Single Device Name	Type	Serial Number	Manufacturer
ADU 200 Relay Box 7	Relay Box	A04380	Ontrak Control Systems Inc.
Bluetooth Signalling Unit 1153.9000.35 CBT		100302	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2009/08/06 2010/08/05
Power Meter NRV	857.8008.02	832025/059	
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2009/06/23 2010/06/22
Power Sensor NRV Z1 A	828.3018.03	832279/013	
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2009/06/23 2010/06/22
Power Supply	NGSM 32/10	2725	
Rubidium Frequency Normal MFS	828.3018.03	002	Datum GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2009/06/23 2010/06/22
Signal Analyser FSIQ26	1119.6001.26	832695/007	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2009/06/24 2011/06/23
Signal Generator	SMP03	833680/003	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2009/06/23 2012/06/22
Vector Signal Generator SMIQ03B B	1125.5555.03	832870/017	

Test Equipment Shielded Room 02

Lab ID: Lab 1
Manufacturer: Frankonia
Description: Shielded Room for conducted testing
Type: 12 qm
Serial Number: none

Test Equipment Shielded Room 07

Lab ID: Lab 5, Lab 6
Description: Shielded Room 4m x 6m



Test Equipment T/H Logger 04

Lab ID: Lab 5, Lab 6
Description: Lufft Opus10
Serial Number: 7481

Single Devices for T/H Logger 04

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro DataloggerOpus10 THI (8152.00) 04 (Environ)		7481	Lufft Mess- und Regeltechnik GmbH
<i>Calibration Details</i>			
	Standard calibration	2009/01/23	2011/01/22

Test Equipment Temperature Chamber 01

Lab ID: Lab 5, Lab 6
Manufacturer: see single devices
Description: Temperature Chamber KWP 120/70
Type: Weiss
Serial Number: see single devices

Single Devices for Temperature Chamber 01

Single Device Name	Type	Serial Number	Manufacturer
Temperature Chamber Weiss 01	KWP 120/70	59226012190010	Weiss Umwelttechnik GmbH
<i>Calibration Details</i>			
	Specific calibration	2010/03/16	2011/03/15




Test Equipment WLAN RF Test Solution

Lab ID: **Lab 6**
Manufacturer: 7 layers AG
Description: Regulatory WLAN RF Tests
Type: WLAN RF
Serial Number: 001

Single Devices for WLAN RF Test Solution

Single Device Name	Type	Serial Number	Manufacturer
Arbitrary Waveform Generator	TGA12101	284482	
Power Meter NRV	857.8008.02	832025/059	
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2009/06/23 2010/06/22
Power Sensor NRV Z1 A	828.3018.03	832279/013	
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2009/06/23 2010/06/22
Power Supply	NGSM 32/10	2725	
Rubidium Frequency Normal MFS	828.3018.03	002	Datum GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2009/06/23 2010/06/22
Signal Analyser FSIQ26	1119.6001.26	832695/007	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2009/06/24 2011/06/23
Signal Generator	SMP03	833680/003	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2009/06/23 2012/06/22
TOCT Switching Unit	Switching Unit	030106	7 layers, Inc.
Vector Signal Generator SMIQ03B B	1125.5555.03	832870/017	

5 Setup Drawings

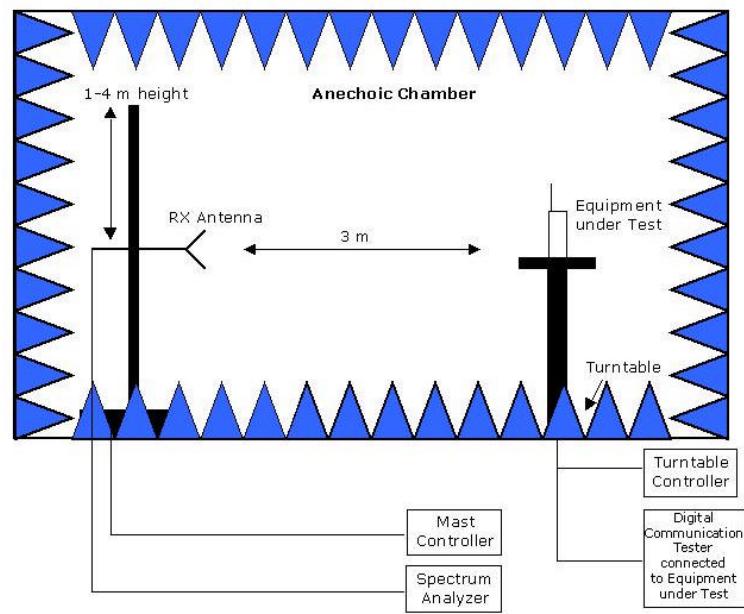

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Drawing 1: Setup in the Anechoic chamber:

Measurements below 1 GHz: Semi-anechoic, conducting ground plane.
Measurements above 1 GHz: Fully-anechoic, absorbers on all surfaces


6 Annex measurement plots

6.1 Occupied bandwidth

6.1.1 Occupied bandwidth operating mode 1

Op. Mode


op-mode 1

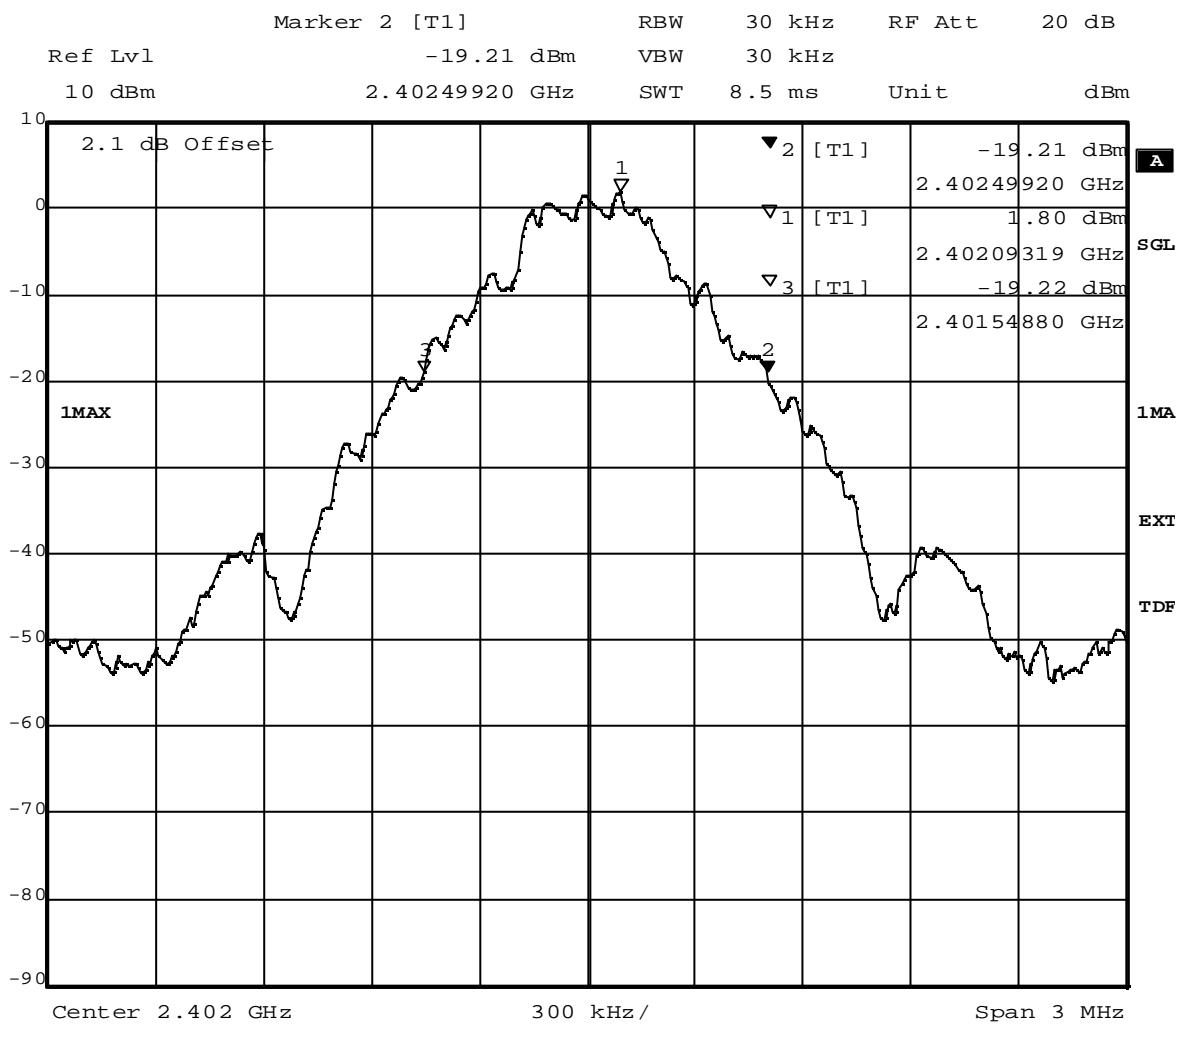

6.1.2 Occupied bandwidth operating mode 2

Op. Mode

op-mode 2

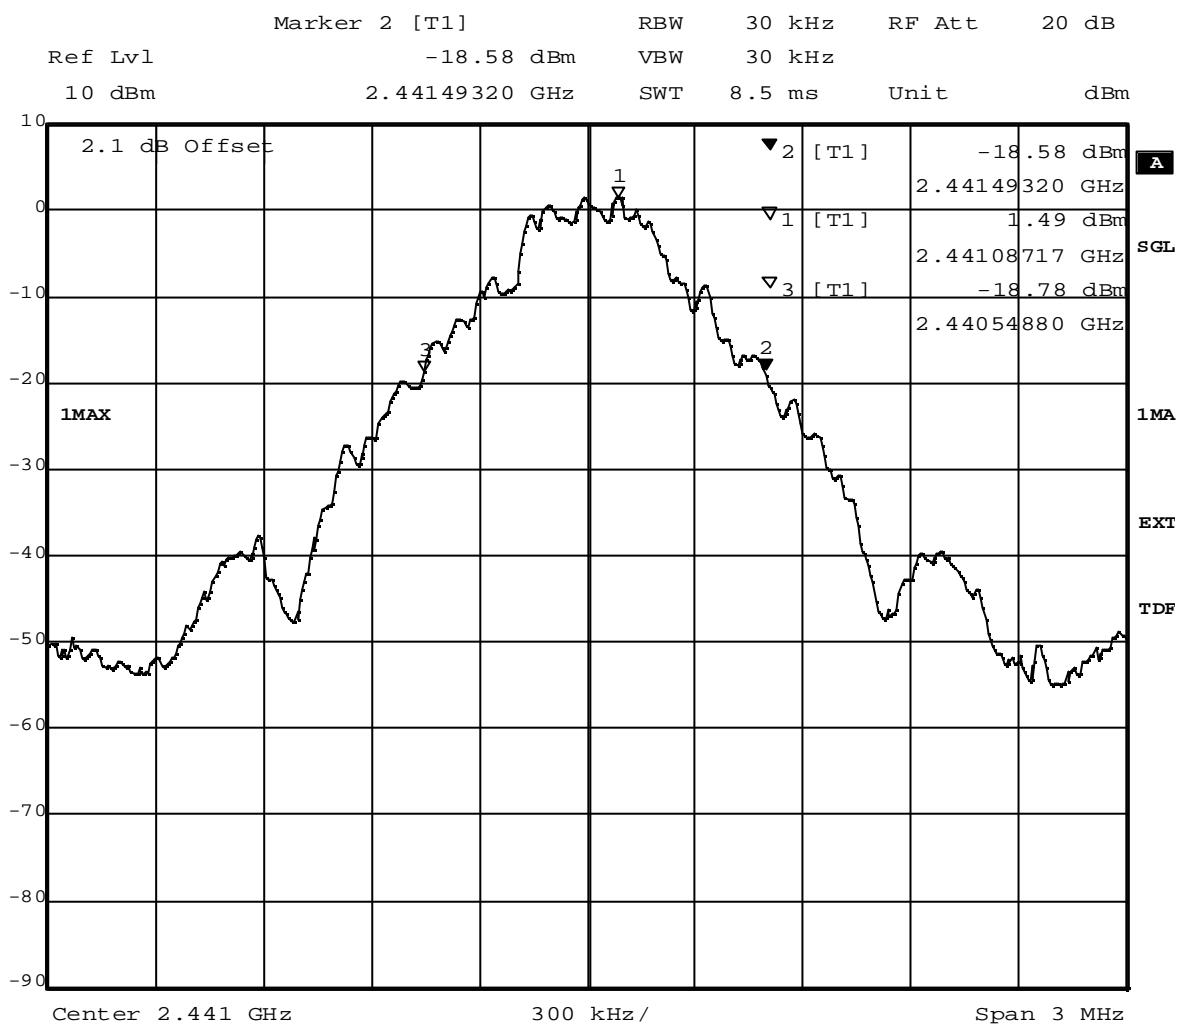


Title: 20dB Bandwidth
 Comment A: CH M: 2441 MHz; 20dB bandwidth (kHz): 944.4
 Date: 2.JUN.2010 11:04:11

6.1.3 Occupied bandwidth operating mode 3

Op. Mode

op-mode 3

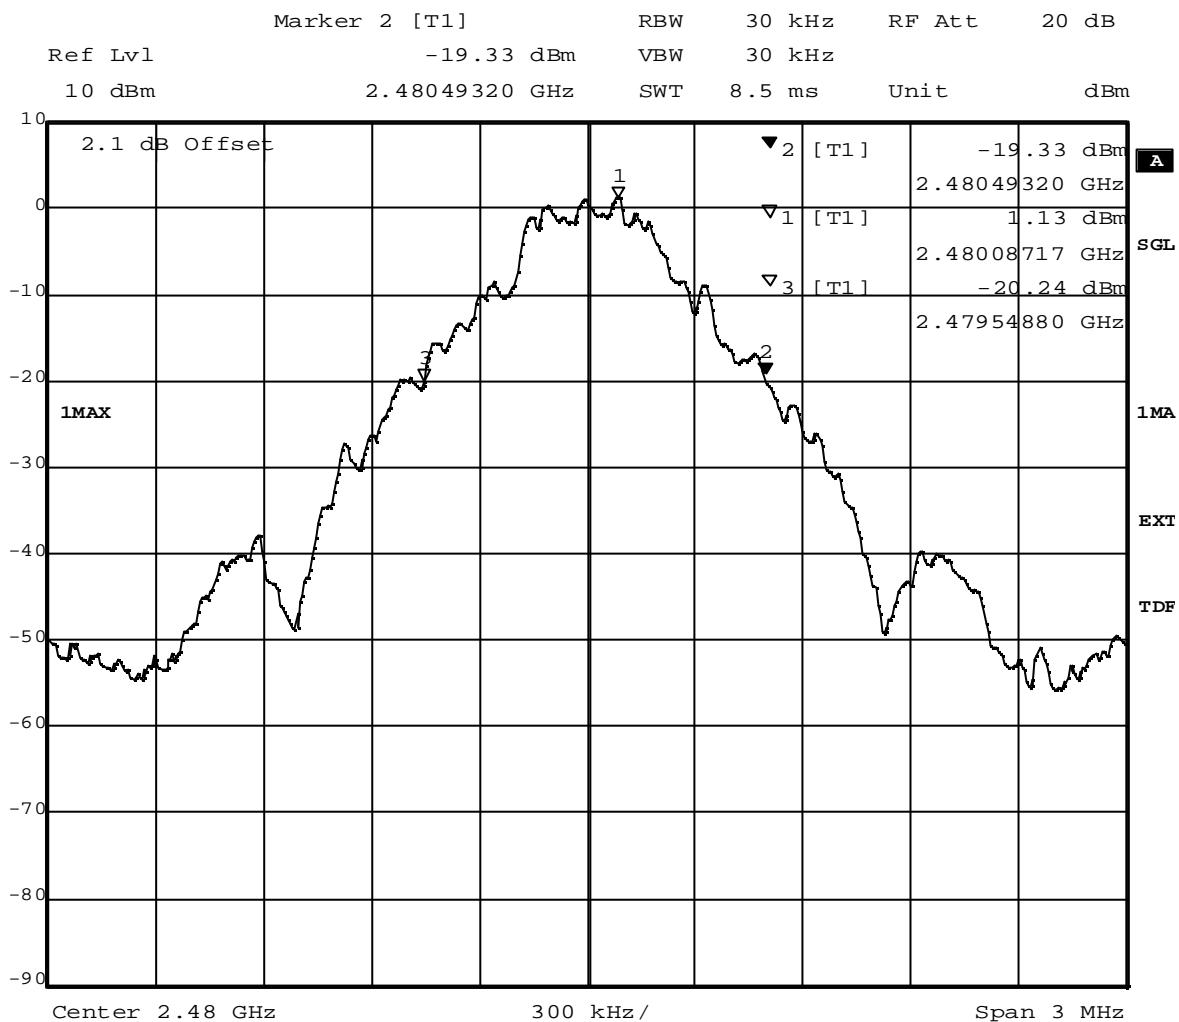


Title: 20dB Bandwidth
 Comment A: CH T: 2480 MHz; 20dB bandwidth (kHz): 944.4
 Date: 2.JUN.2010 11:46:23

6.1.4 Occupied bandwidth operating mode 6

Op. Mode

op-mode 6

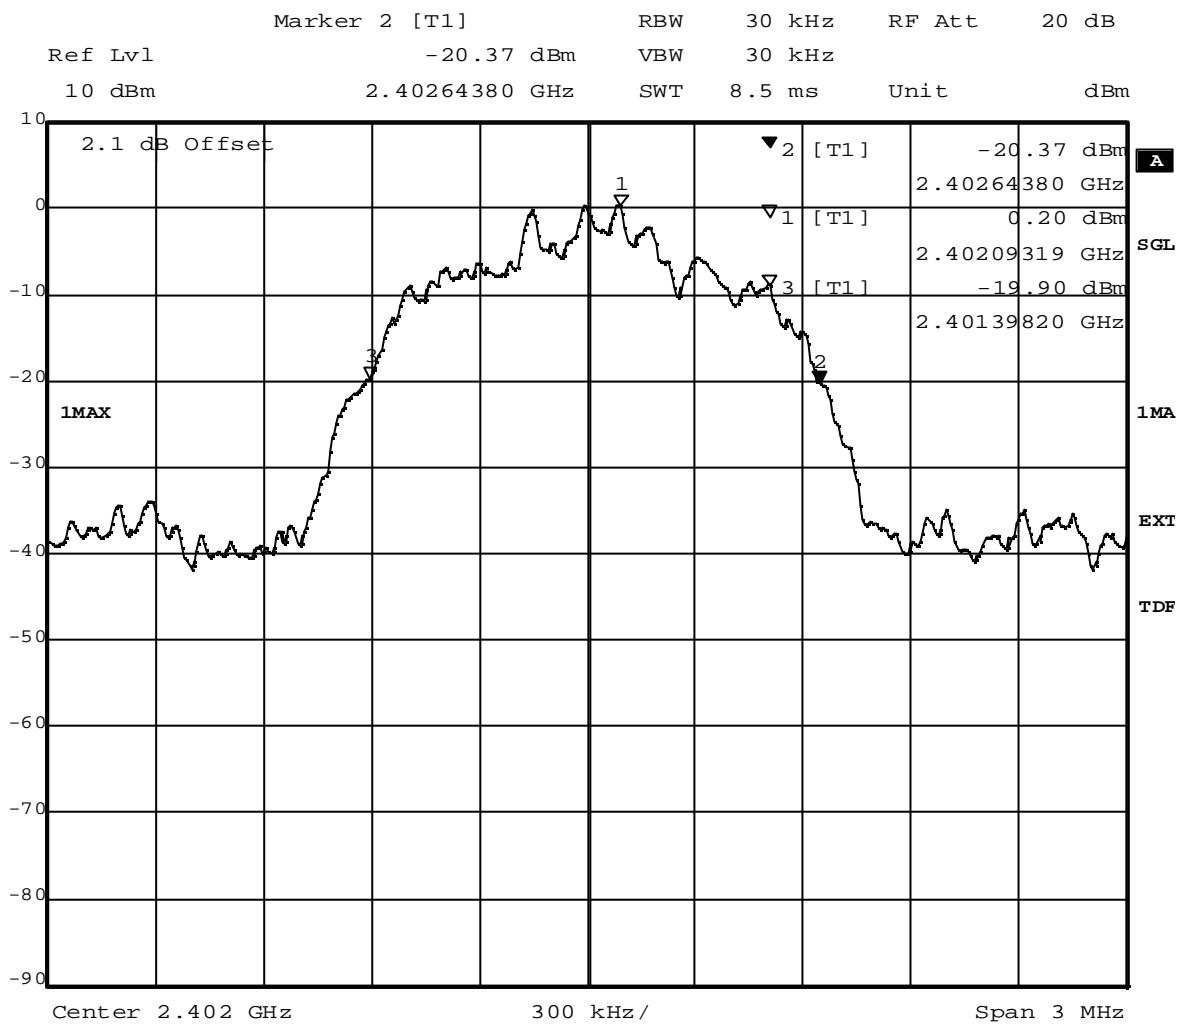


Title: 20dB Bandwidth
 Comment A: CH B: 2402 MHz; 20dB bandwidth (kHz):1245.6
 Date: 2.JUN.2010 13:35:56

6.1.5 Occupied bandwidth operating mode 7

Op. Mode

op-mode 7

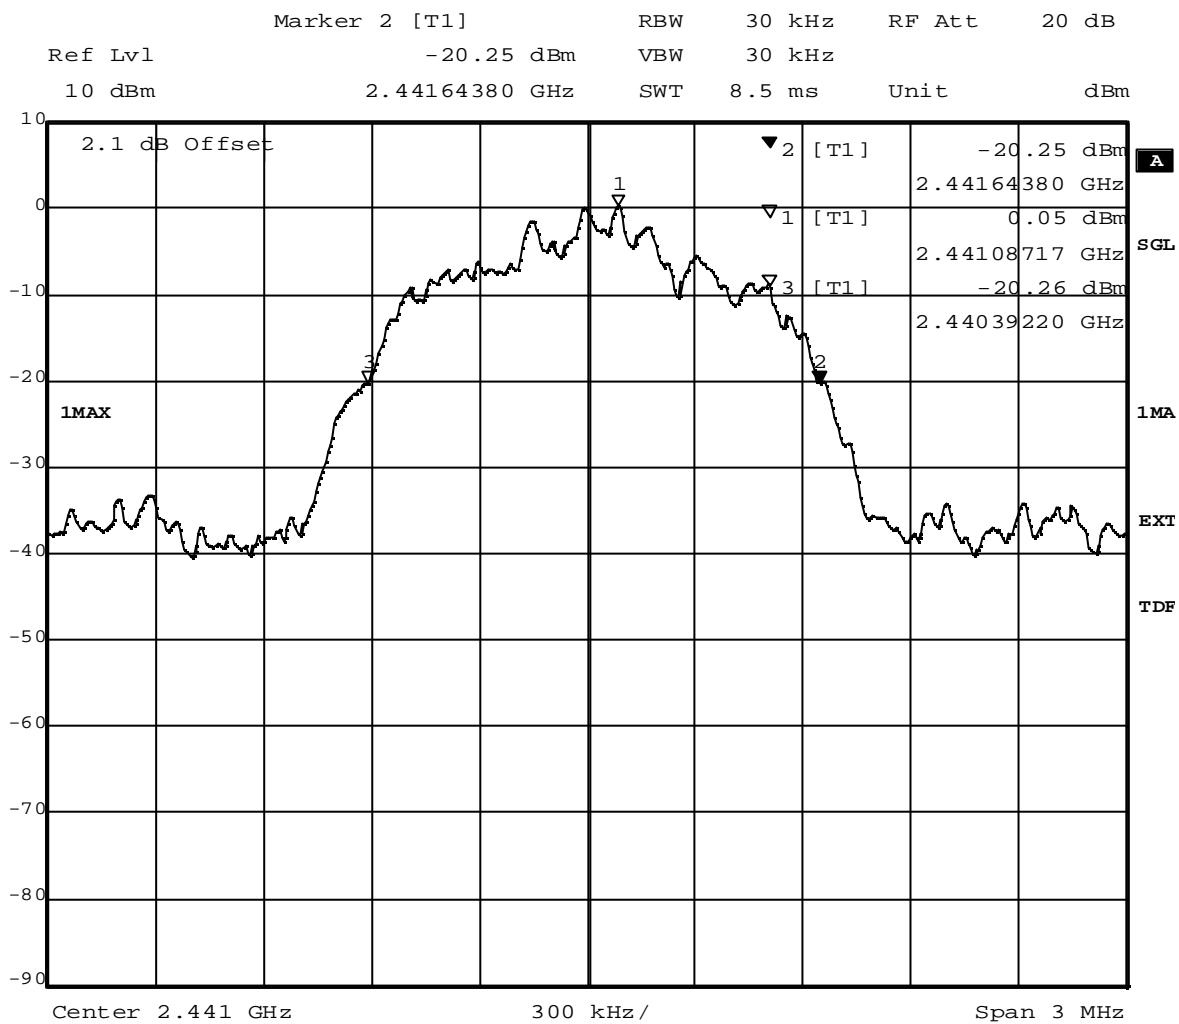


Title: 20dB Bandwidth
 Comment A: CH M: 2441 MHz; 20dB bandwidth (kHz):1251.6
 Date: 2.JUN.2010 13:53:26

6.1.6 Occupied bandwidth operating mode 8

Op. Mode

op-mode 8

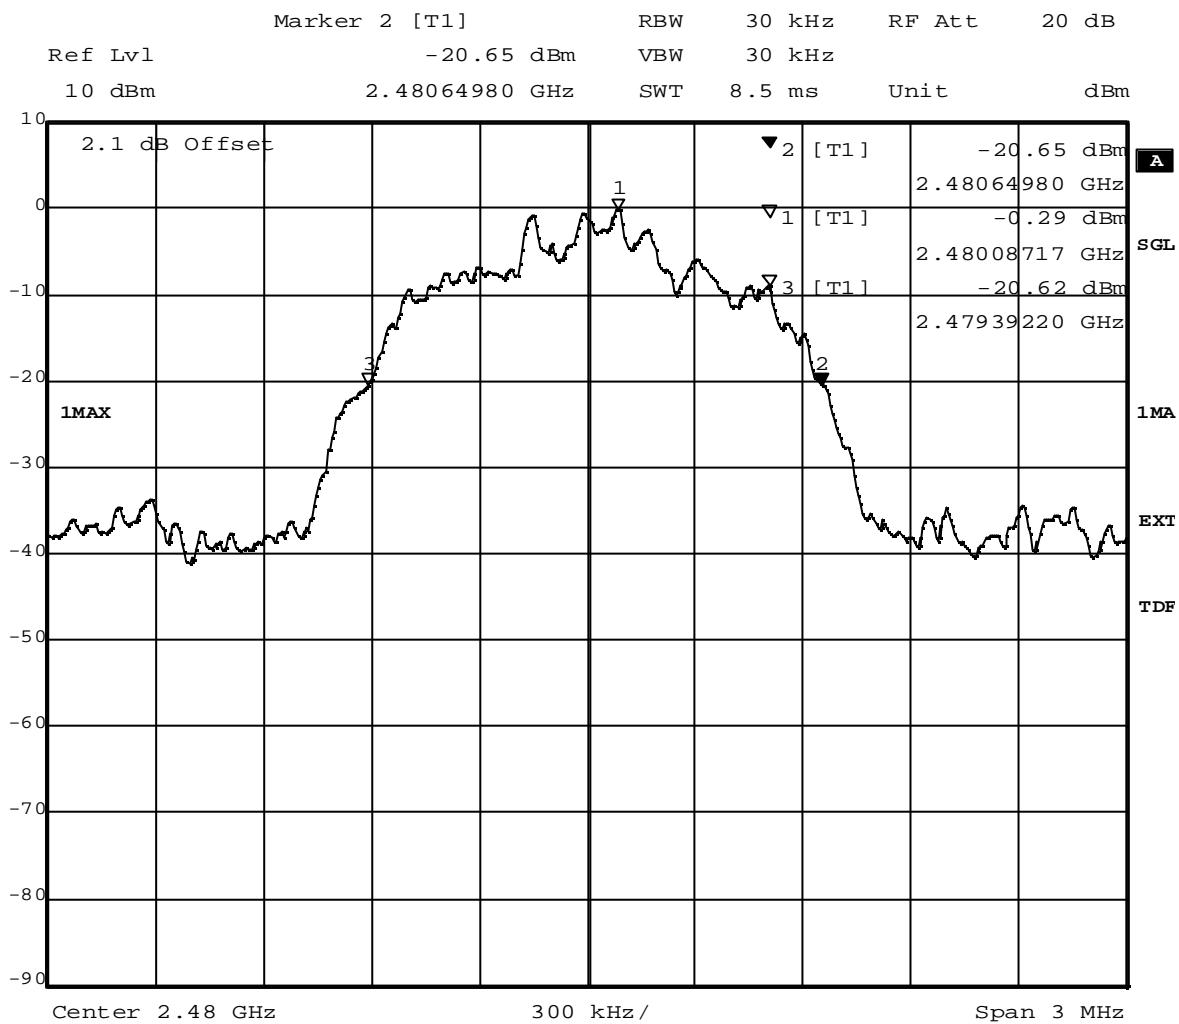


Title: 20dB Bandwidth
 Comment A: CH T: 2480 MHz; 20dB bandwidth (kHz):1257.6
 Date: 2.JUN.2010 14:51:07

6.1.7 Occupied bandwidth operating mode 10

Op. Mode

op-mode 10

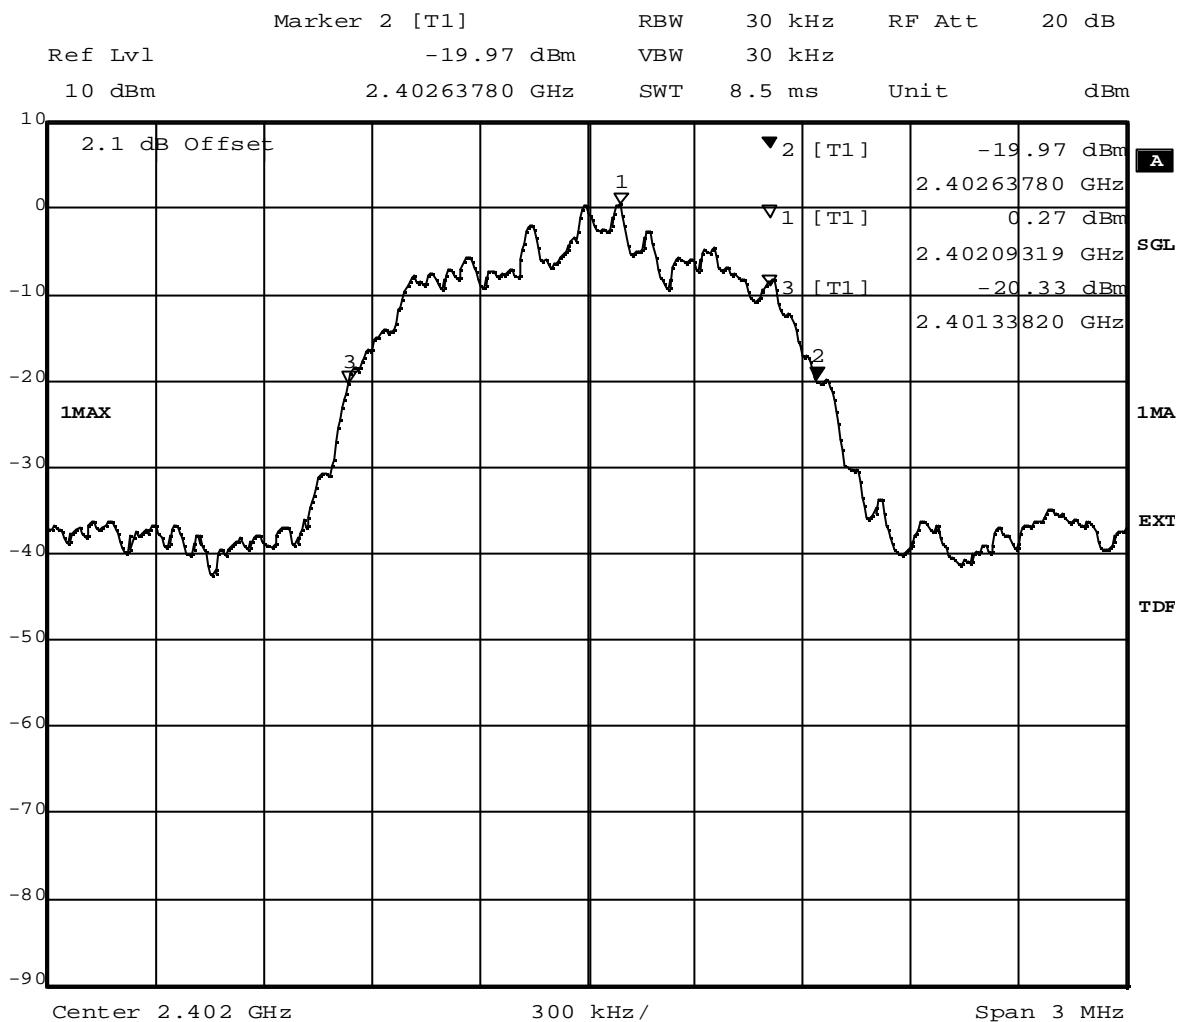


Title: 20dB Bandwidth
 Comment A: CH B: 2402 MHz; 20dB bandwidth (kHz):1299.6
 Date: 2.JUN.2010 12:29:13

6.1.8 Occupied bandwidth operating mode 11

Op. Mode

op-mode 11

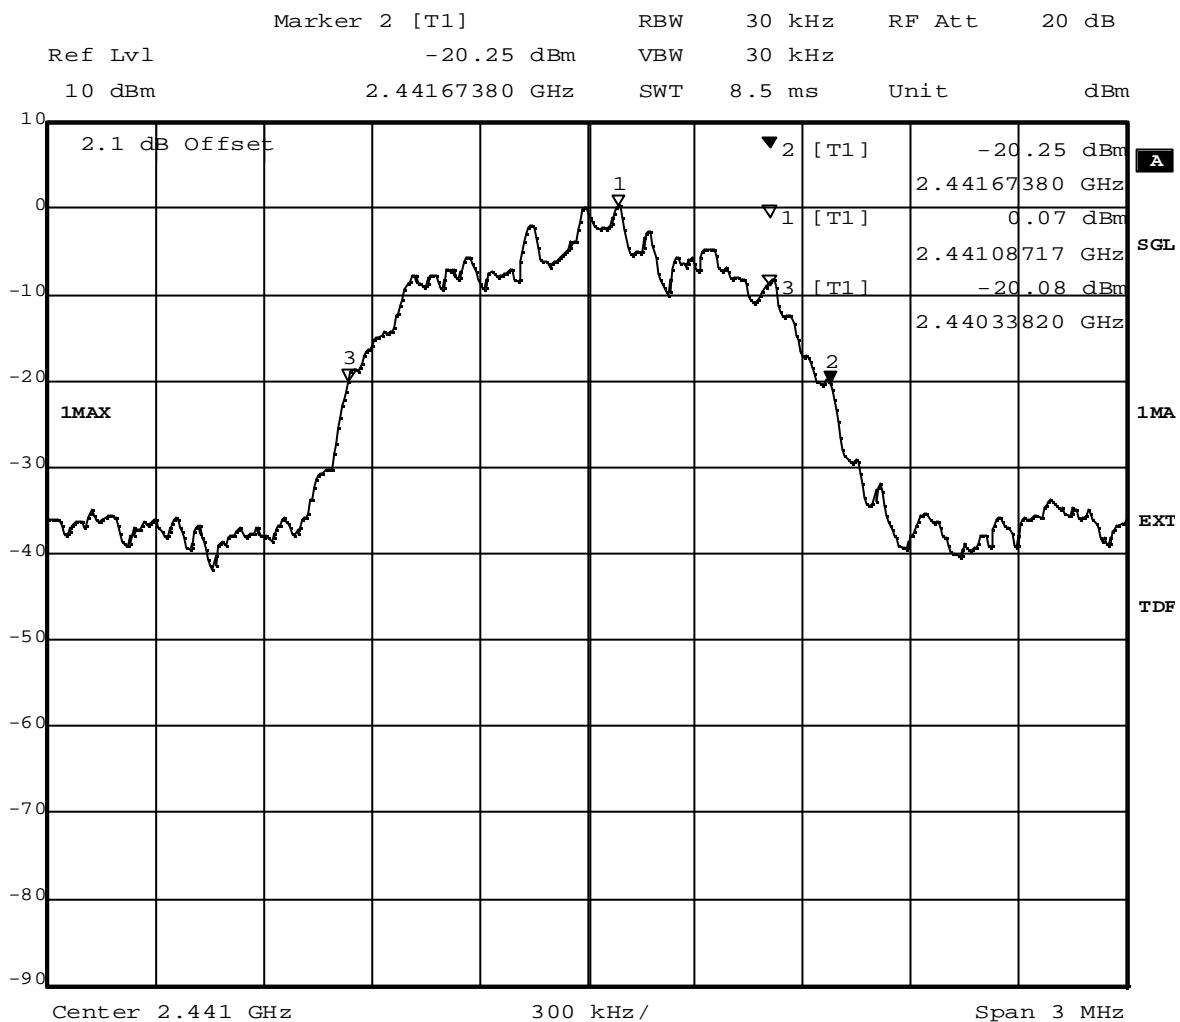


Title: 20dB Bandwidth
 Comment A: CH M: 2441 MHz; 20dB bandwidth (kHz):1335.6
 Date: 2.JUN.2010 12:51:57

6.1.9 Occupied bandwidth operating mode 12

Op. Mode

op-mode 12

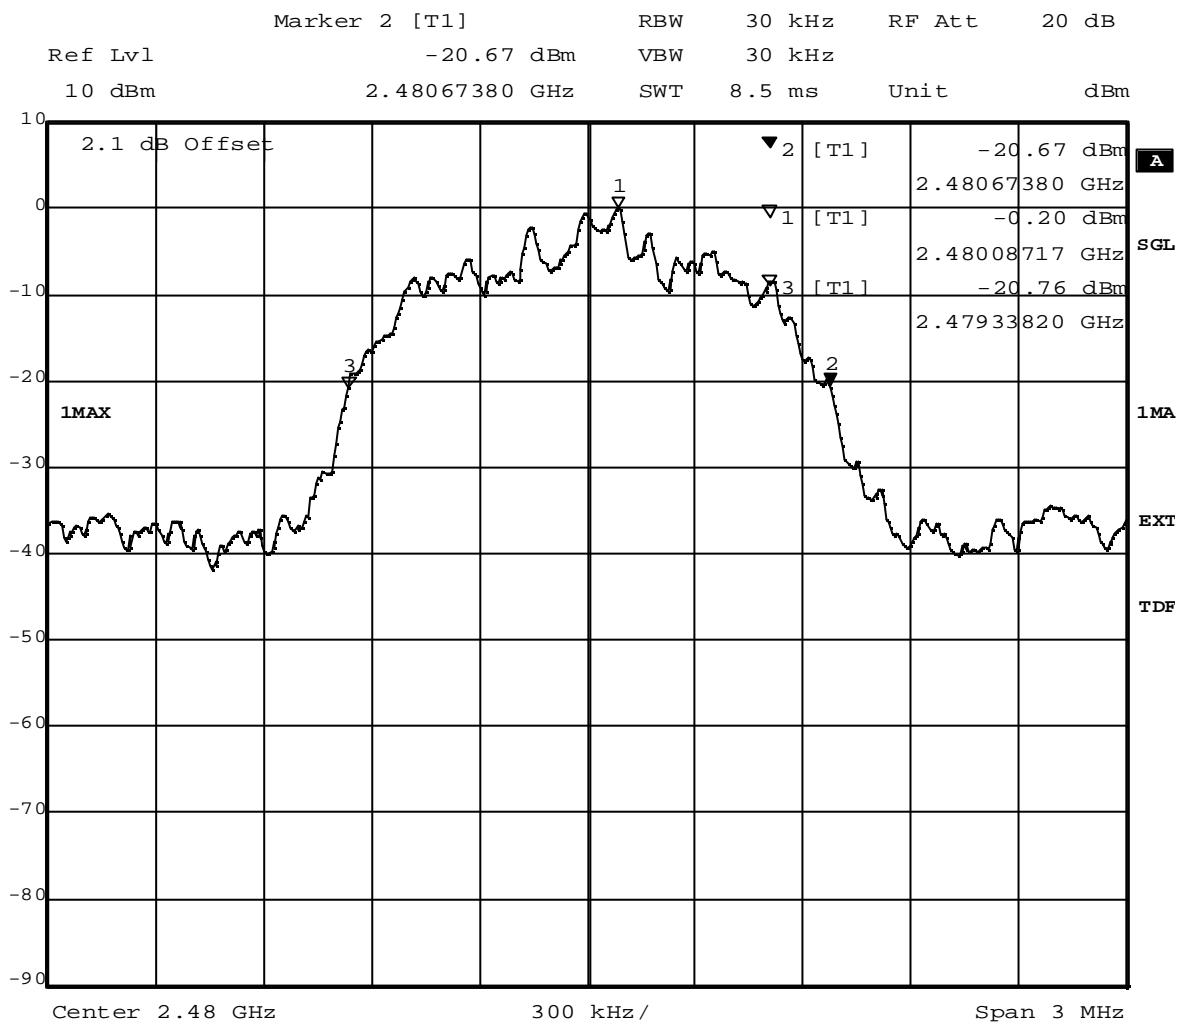


Title: 20dB Bandwidth
 Comment A: CH T: 2480 MHz; 20dB bandwidth (kHz):1335.6
 Date: 2.JUN.2010 13:10:27

6.2 Peak power output

6.2.1 Peak power output operating mode 1

Op. Mode


op-mode 1

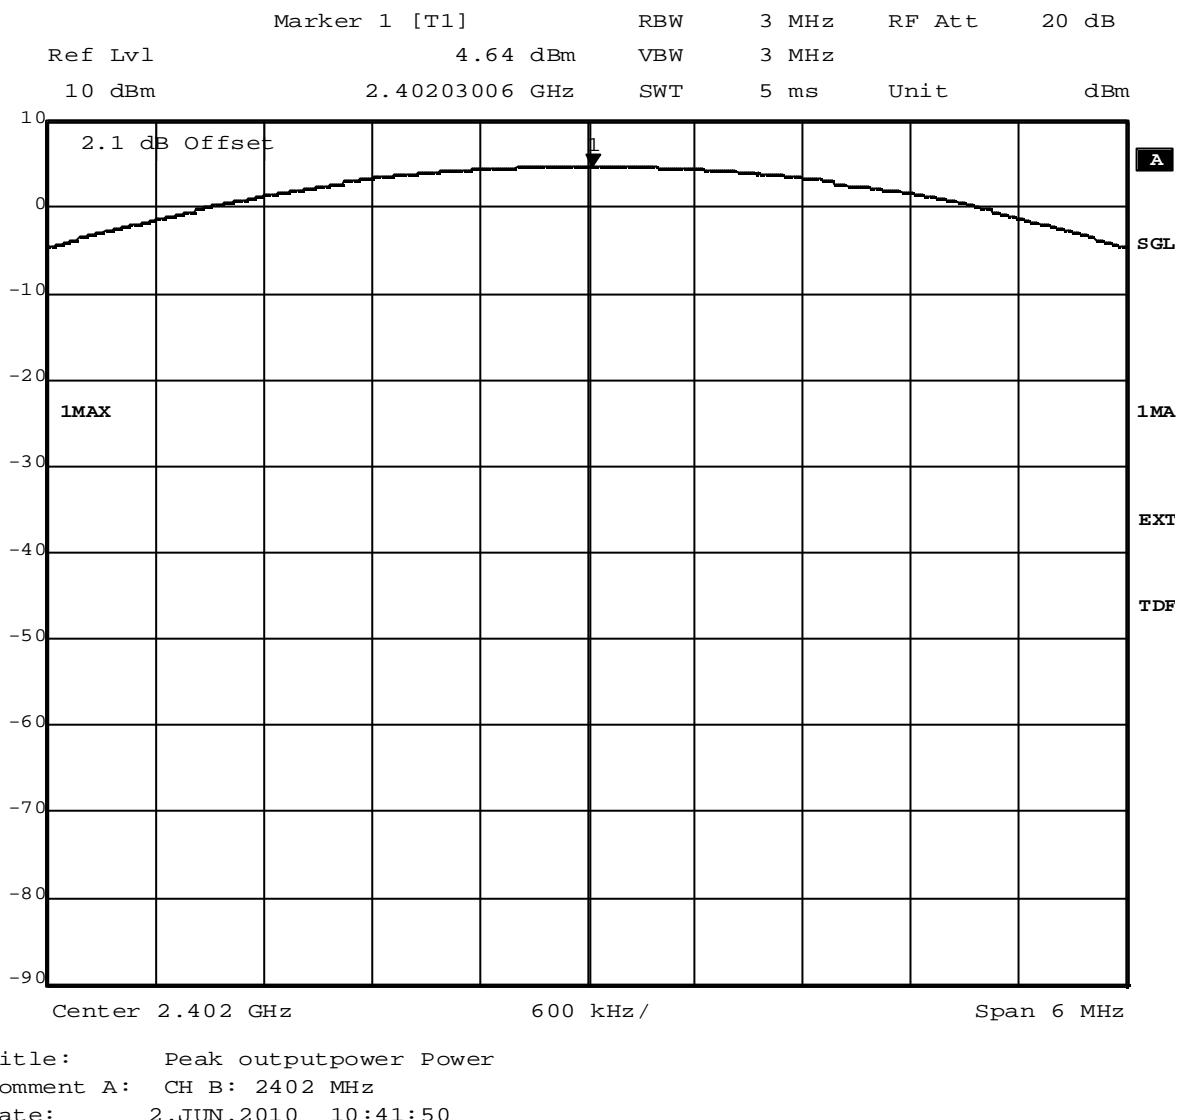

6.2.2 Peak power output operating mode 2

Op. Mode

op-mode 2

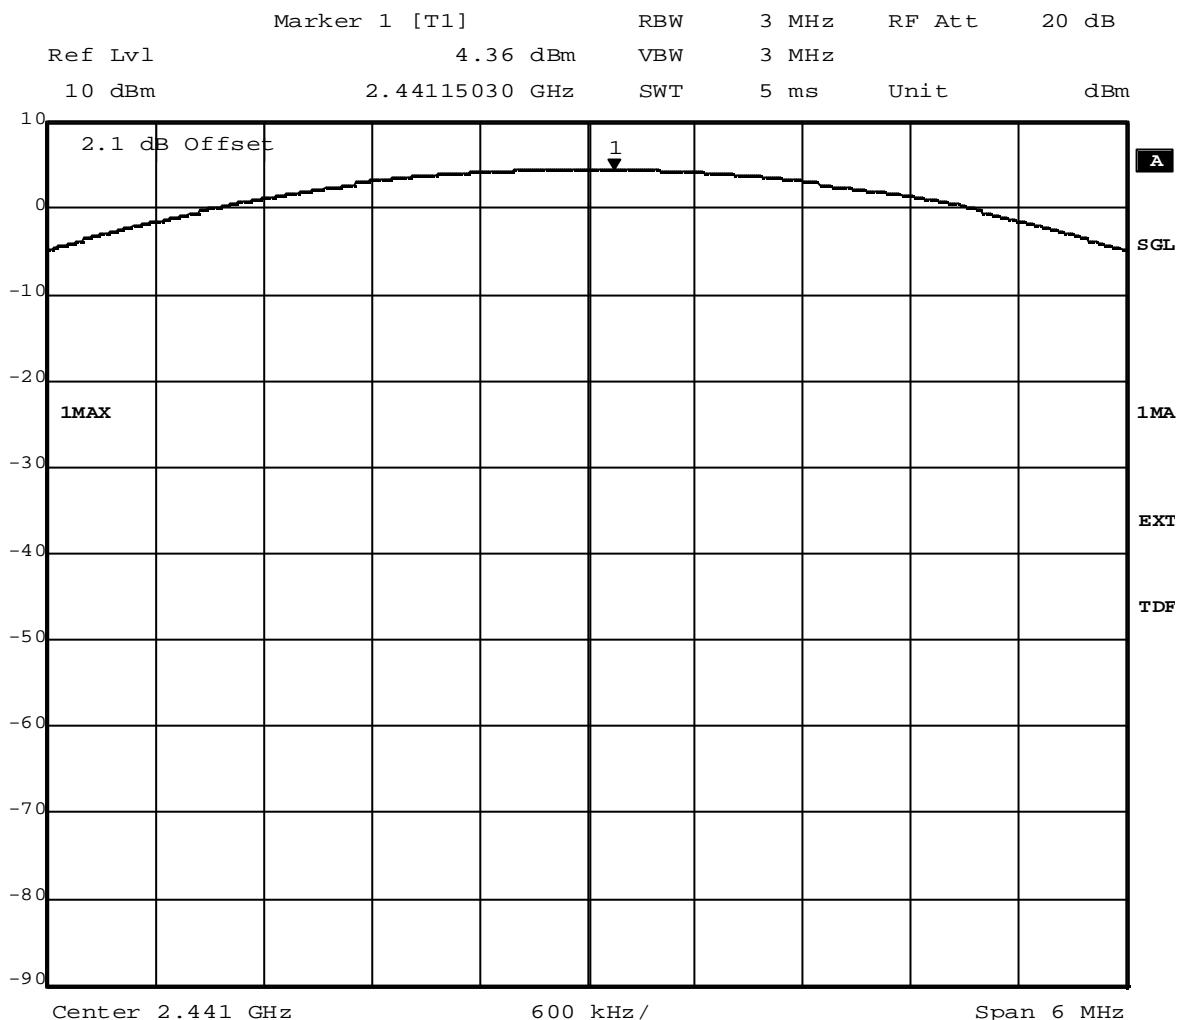


Title: Peak outputpower Power
 Comment A: CH M: 2441 MHz
 Date: 2.JUN.2010 11:04:38

6.2.3 Peak power output operating mode 3

Op. Mode

op-mode 3

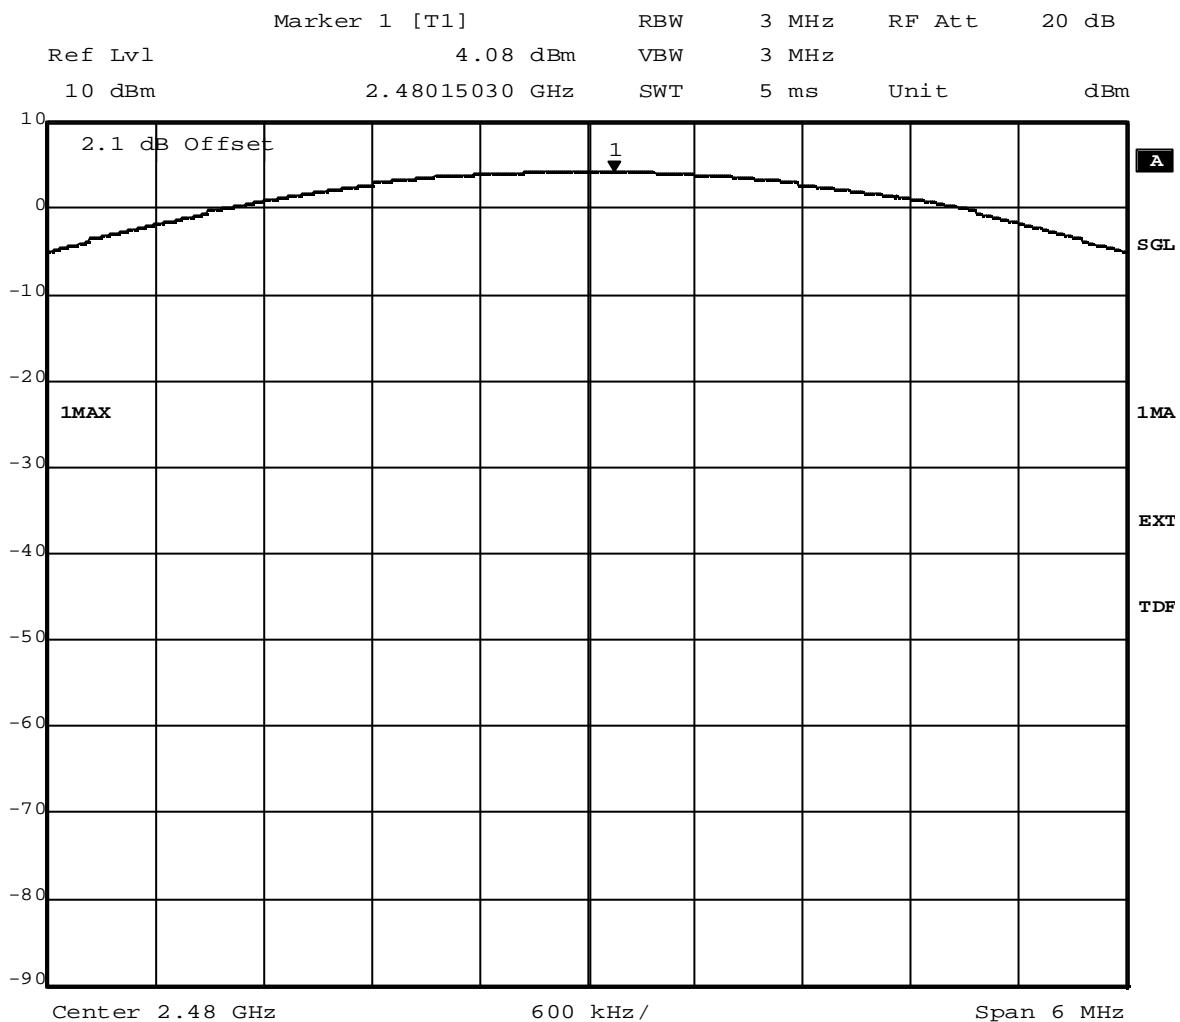


Title: Peak outputpower Power
 Comment A: CH T: 2480 MHz
 Date: 2.JUN.2010 11:46:50

6.2.4 Peak power output operating mode 6

Op. Mode

op-mode 6

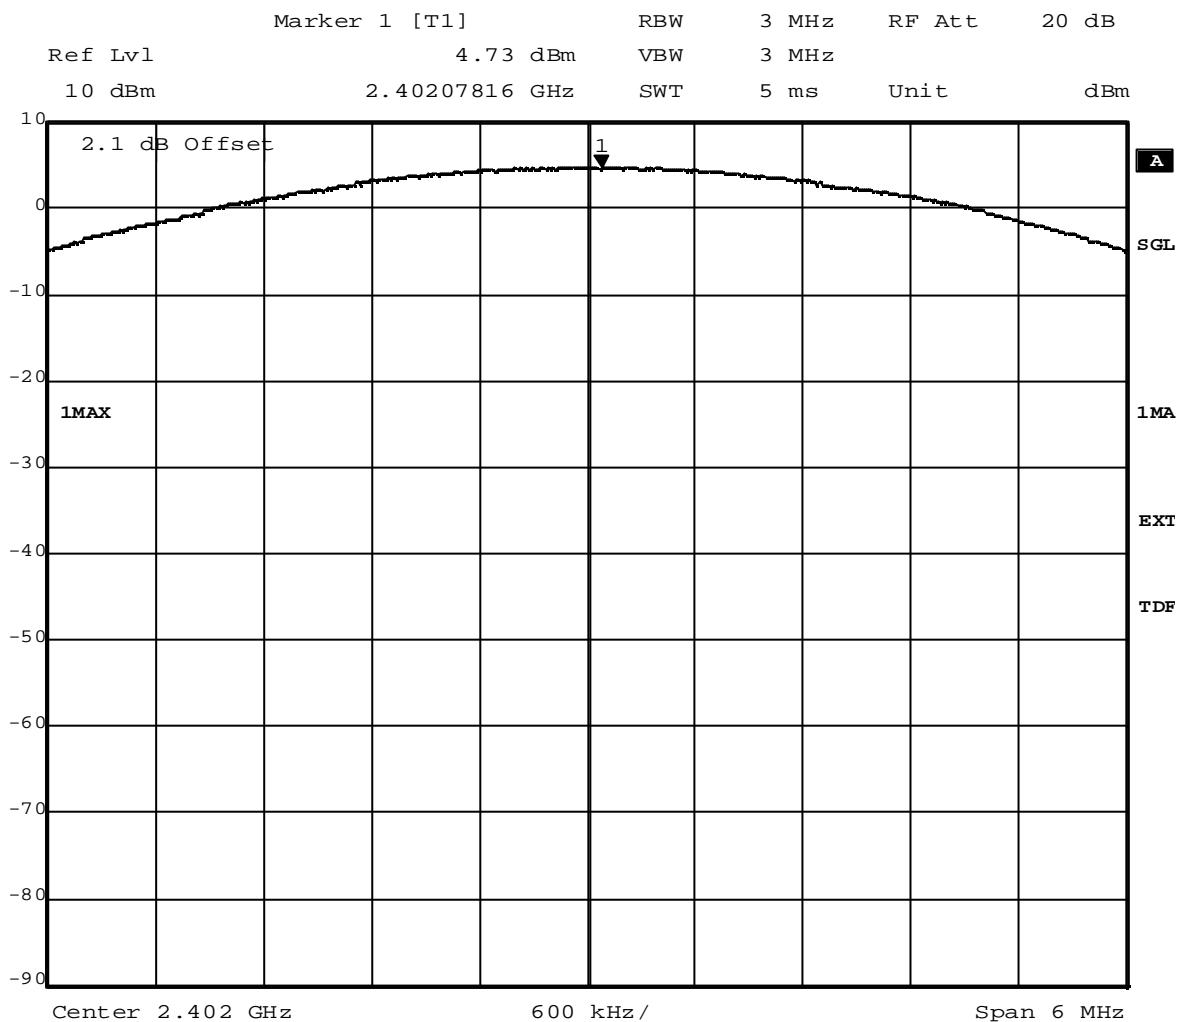


Title: Peak output power Power
 Comment A: CH B: 2402 MHz
 Date: 2.JUN.2010 13:36:23

6.2.5 Peak power output operating mode 7

Op. Mode

op-mode 7

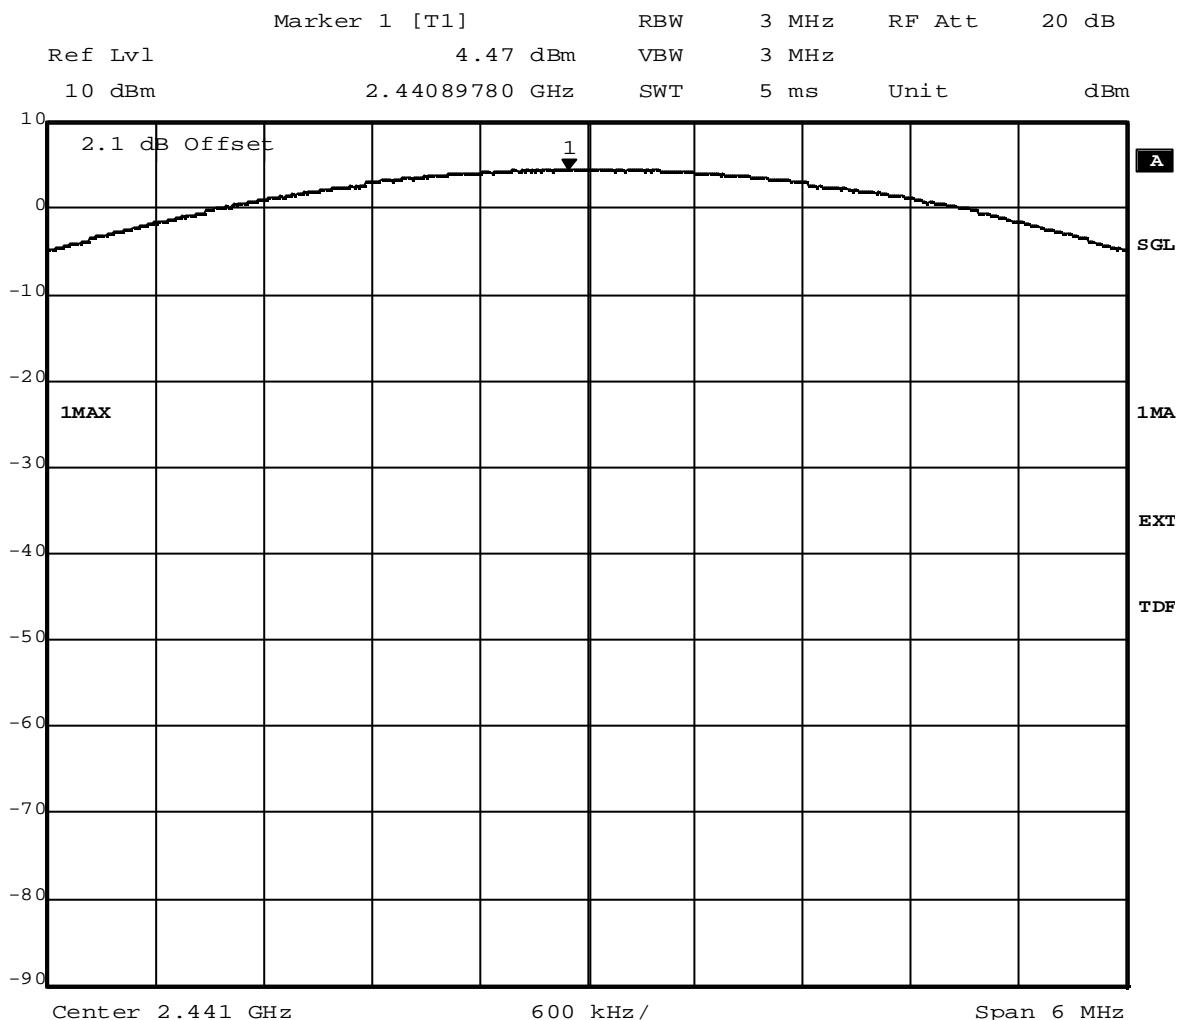


Title: Peak outputpower Power
 Comment A: CH M: 2441 MHz
 Date: 2.JUN.2010 13:53:53

6.2.6 Peak power output operating mode 8

Op. Mode

op-mode 8

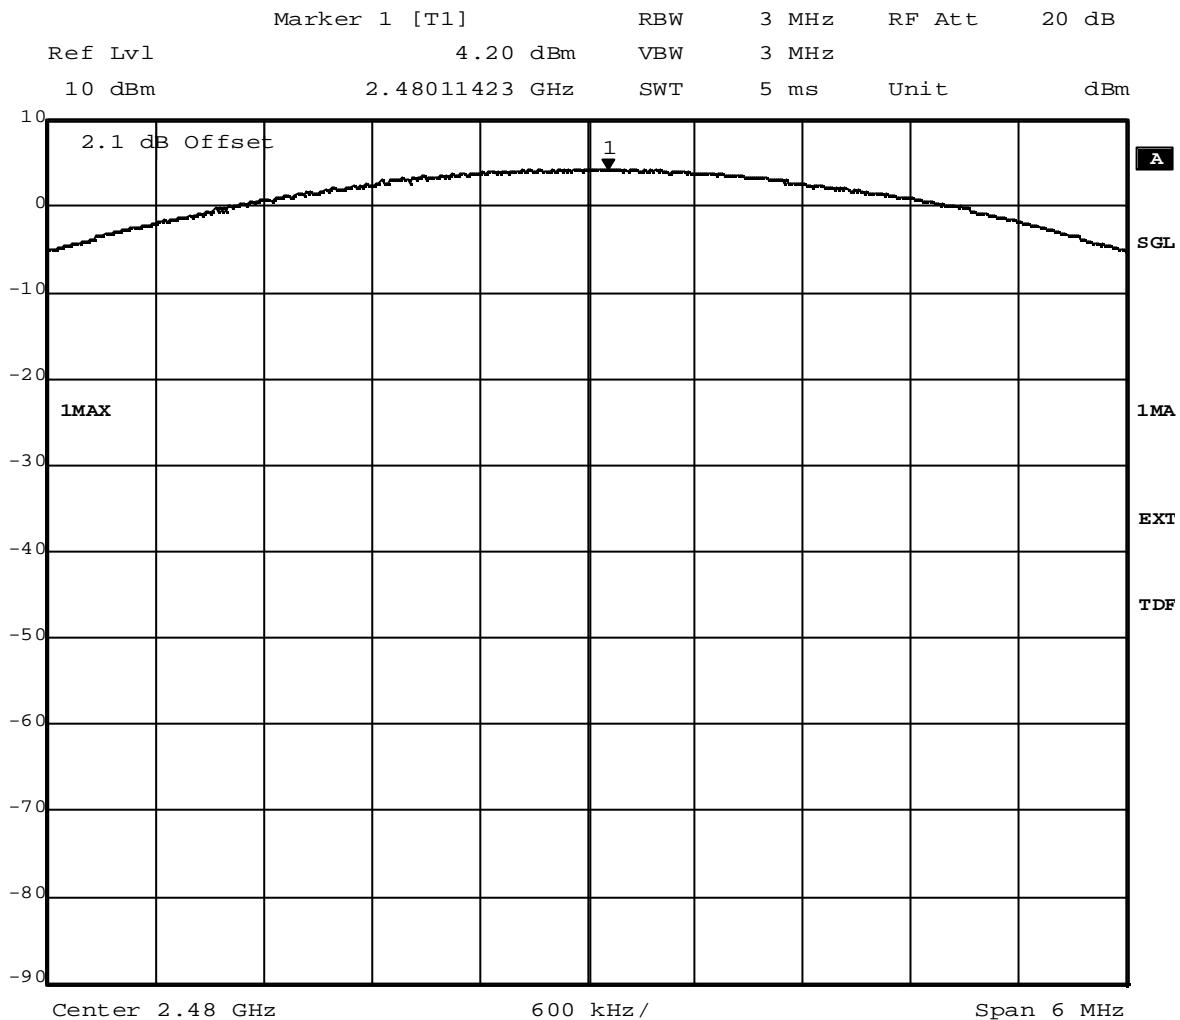


Title: Peak outputpower Power
 Comment A: CH T: 2480 MHz
 Date: 2.JUN.2010 14:51:34

6.2.7 Peak power output operating mode 10

Op. Mode

op-mode 10

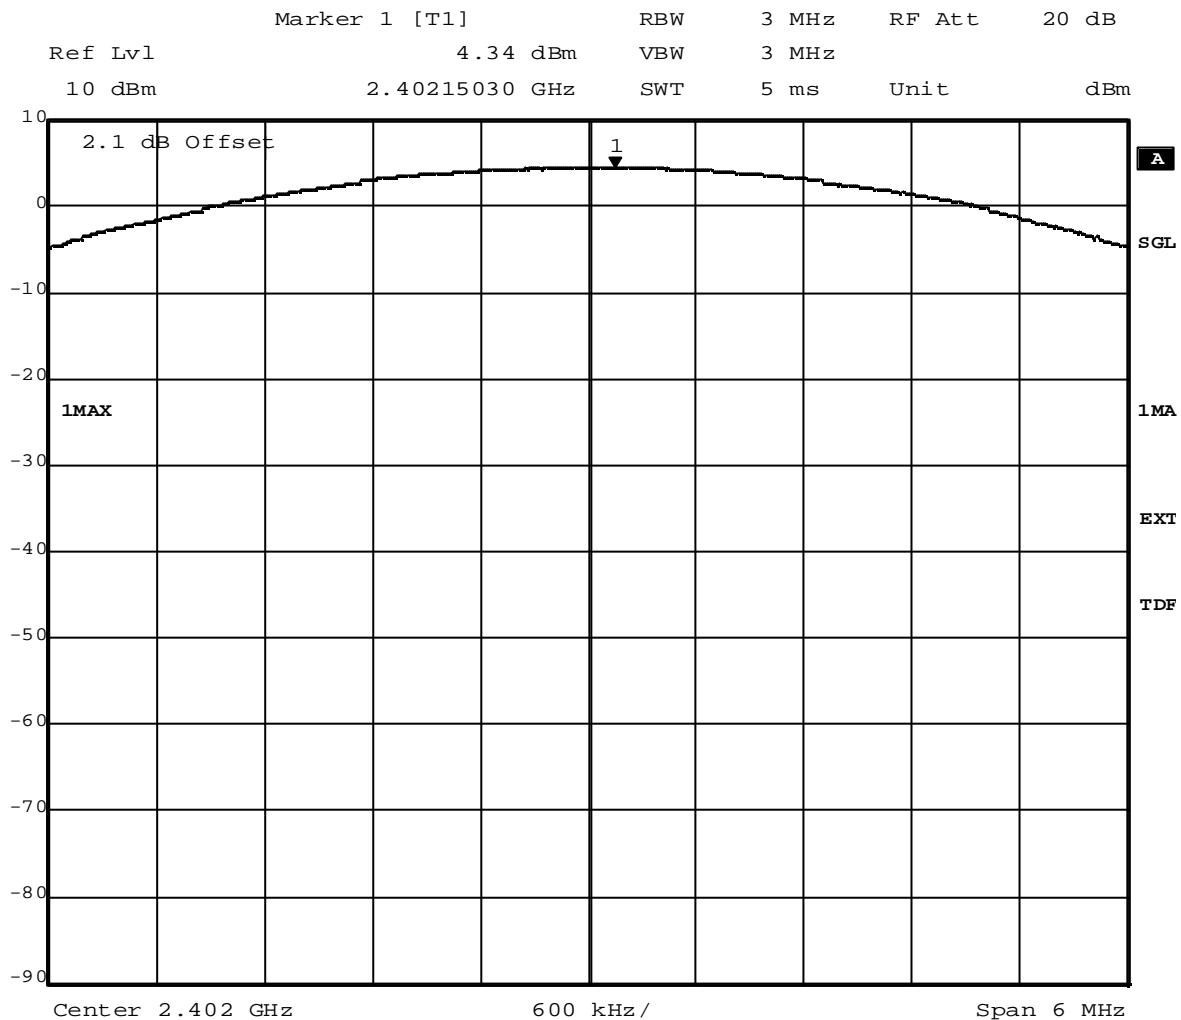


Title: Peak outputpower Power
 Comment A: CH B: 2402 MHz
 Date: 2.JUN.2010 12:29:39

6.2.8 Peak power output operating mode 11

Op. Mode

op-mode 11

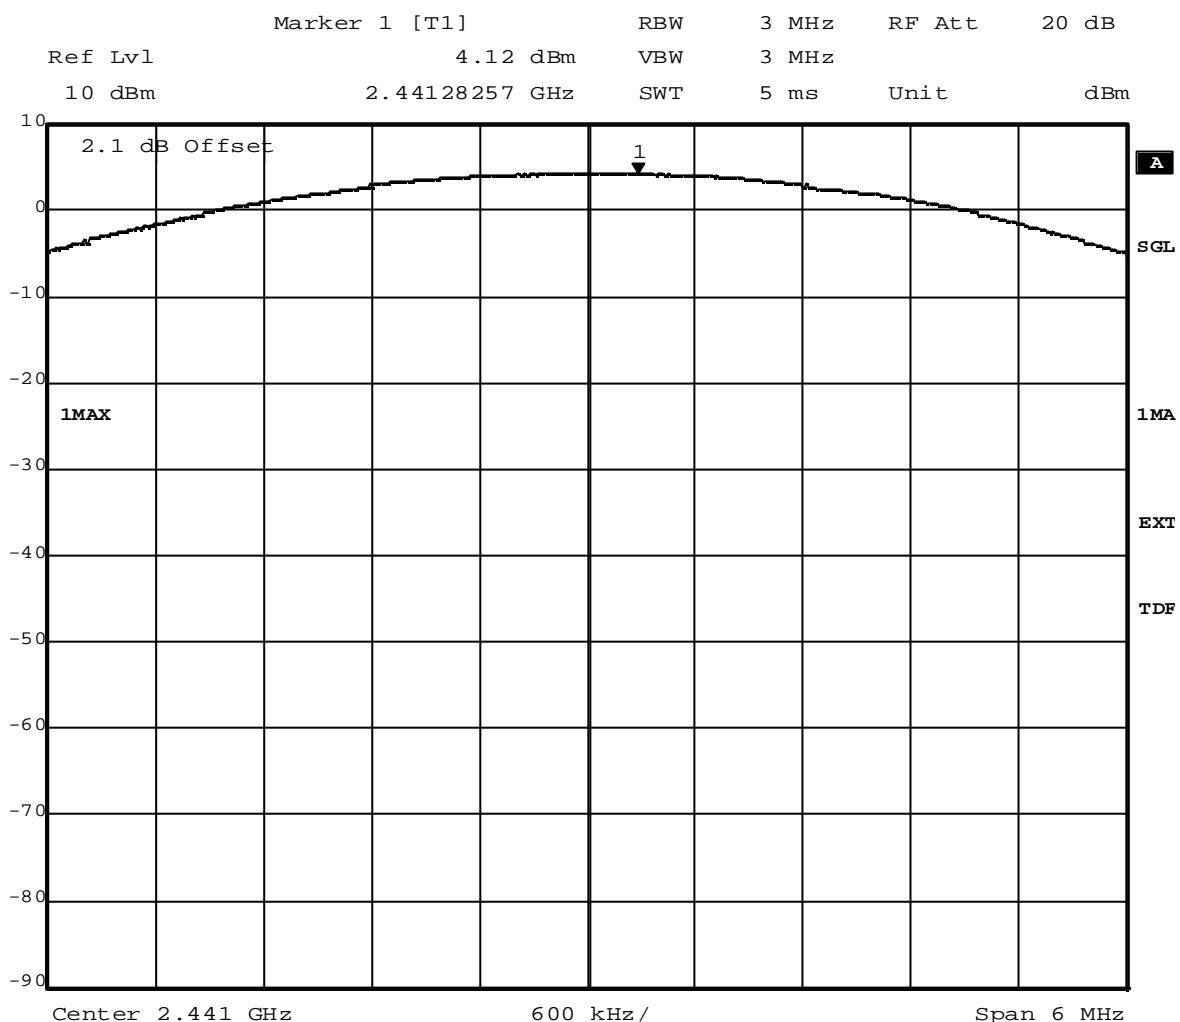


Title: Peak outputpower Power
 Comment A: CH M: 2441 MHz
 Date: 2.JUN.2010 12:52:24

6.2.9 Peak power output operating mode 12

Op. Mode

op-mode 12

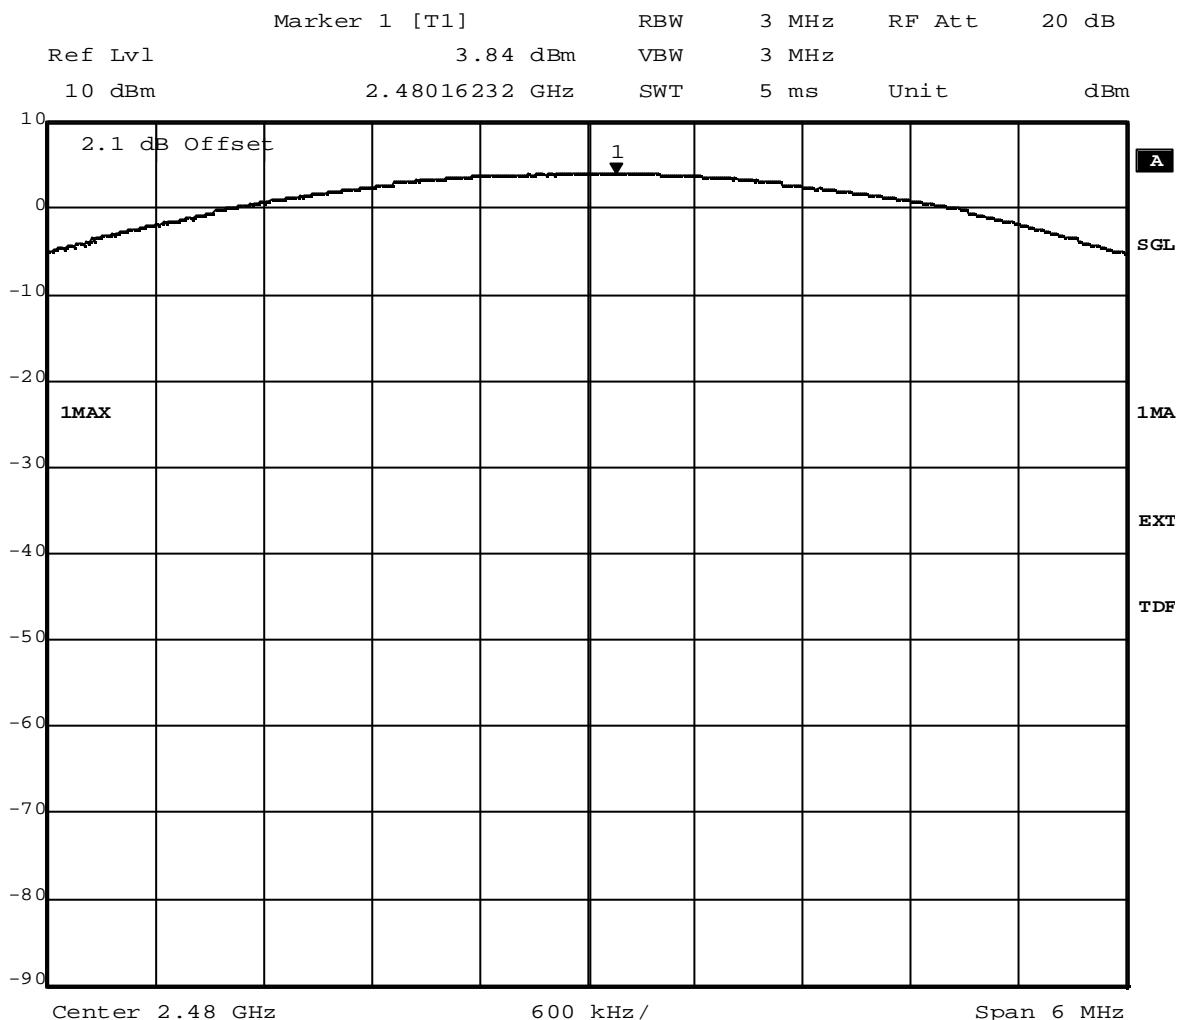


Title: Peak outputpower Power
 Comment A: CH T: 2480 MHz
 Date: 2.JUN.2010 13:12:40

6.3 Band edge compliance conducted and Spurious RF conducted emissions

6.3.1 Band edge compliance conducted operating mode 1

Op. Mode

op-mode 1

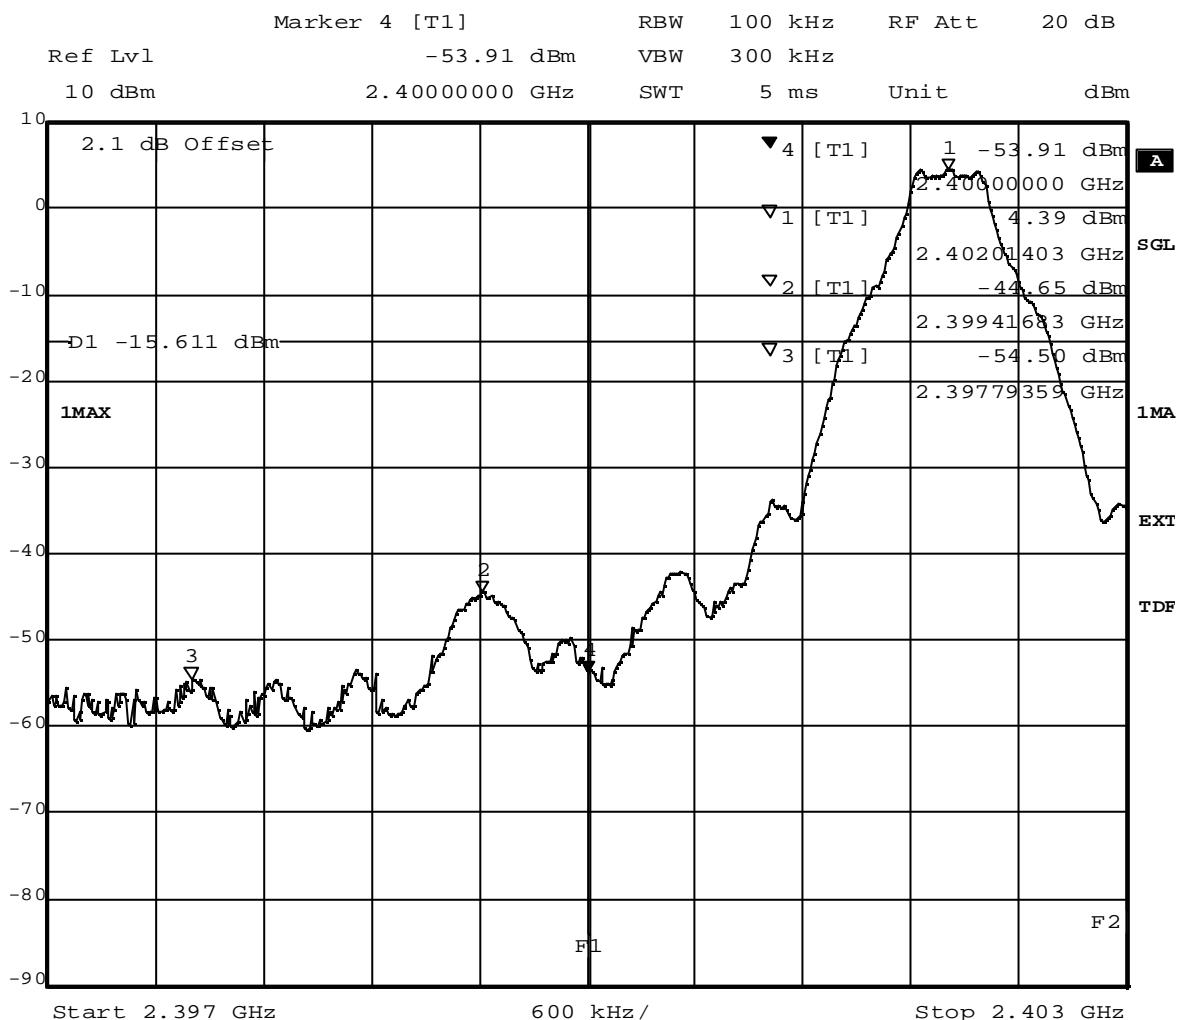


Title: Band Edge Compliance
 Comment A: CH B: 2402 MHz
 Date: 2.JUN.2010 10:26:22

(determination of reference value for spurious emissions measurement)

6.3.2 Spurious RF conducted emissions operating mode 1

Op. Mode

op-mode 1

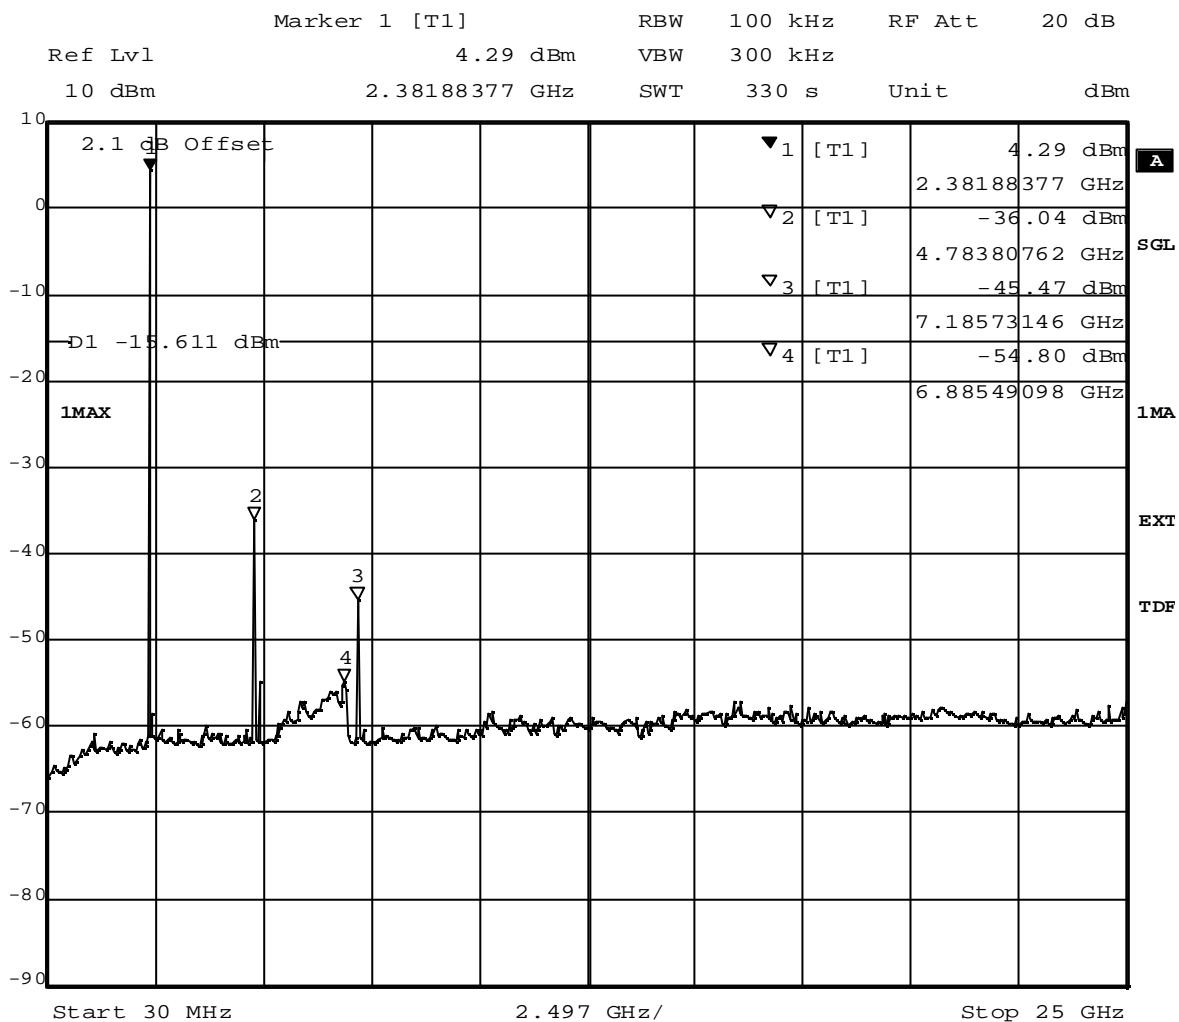


Title: spurious emissions
 Comment A: CH B: 2402 MHz
 Date: 2.JUN.2010 10:38:01

(spurious emissions measurement)

6.3.3 Spurious RF conducted emissions operating mode 2


Op. Mode

op-mode 2

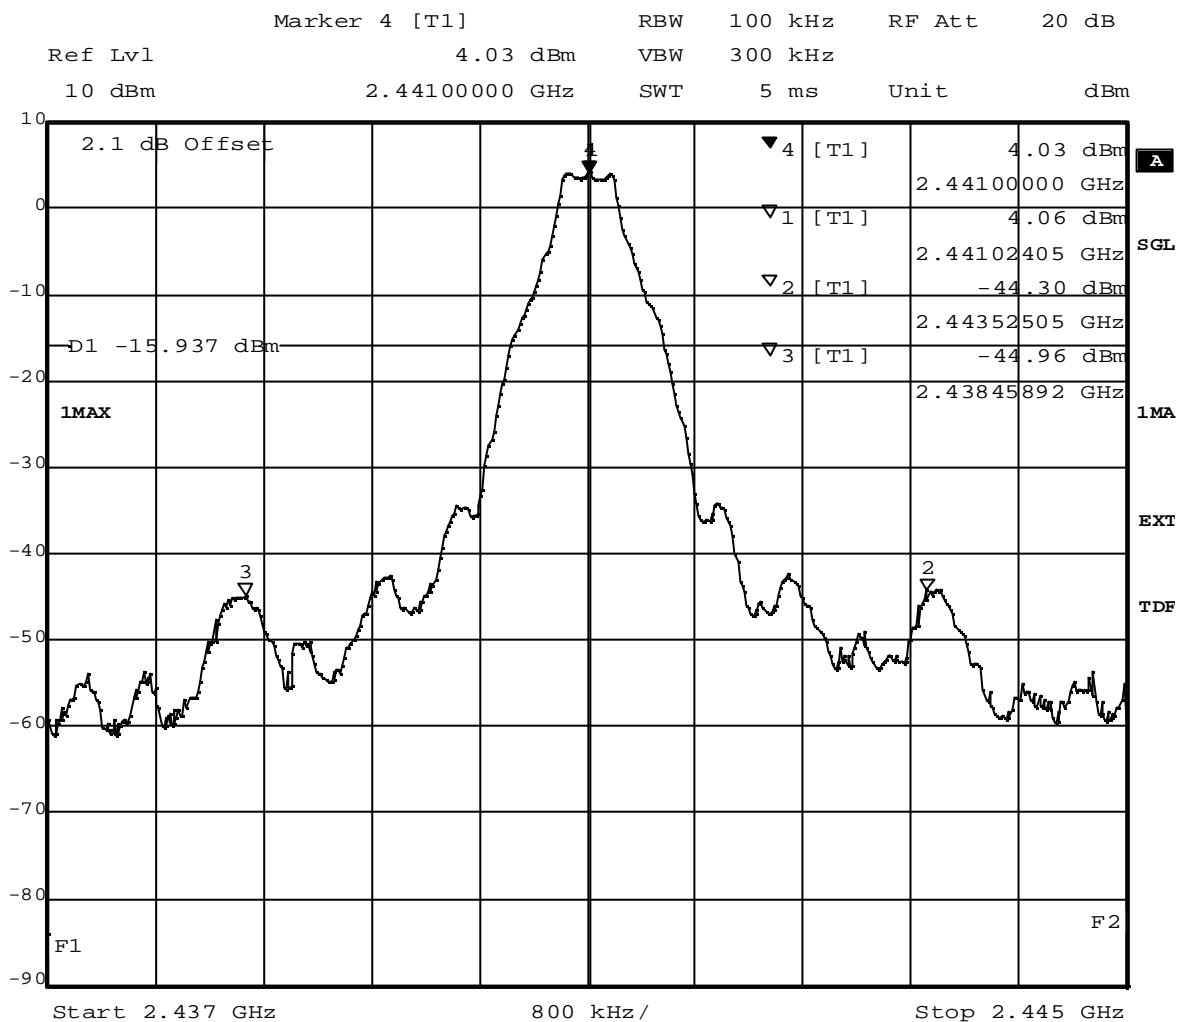

Title: Band Edge Compliance
 Comment A: CH M: 2441 MHz
 Date: 2.JUN.2010 10:49:18

(determination of reference value for spurious emissions measurement)

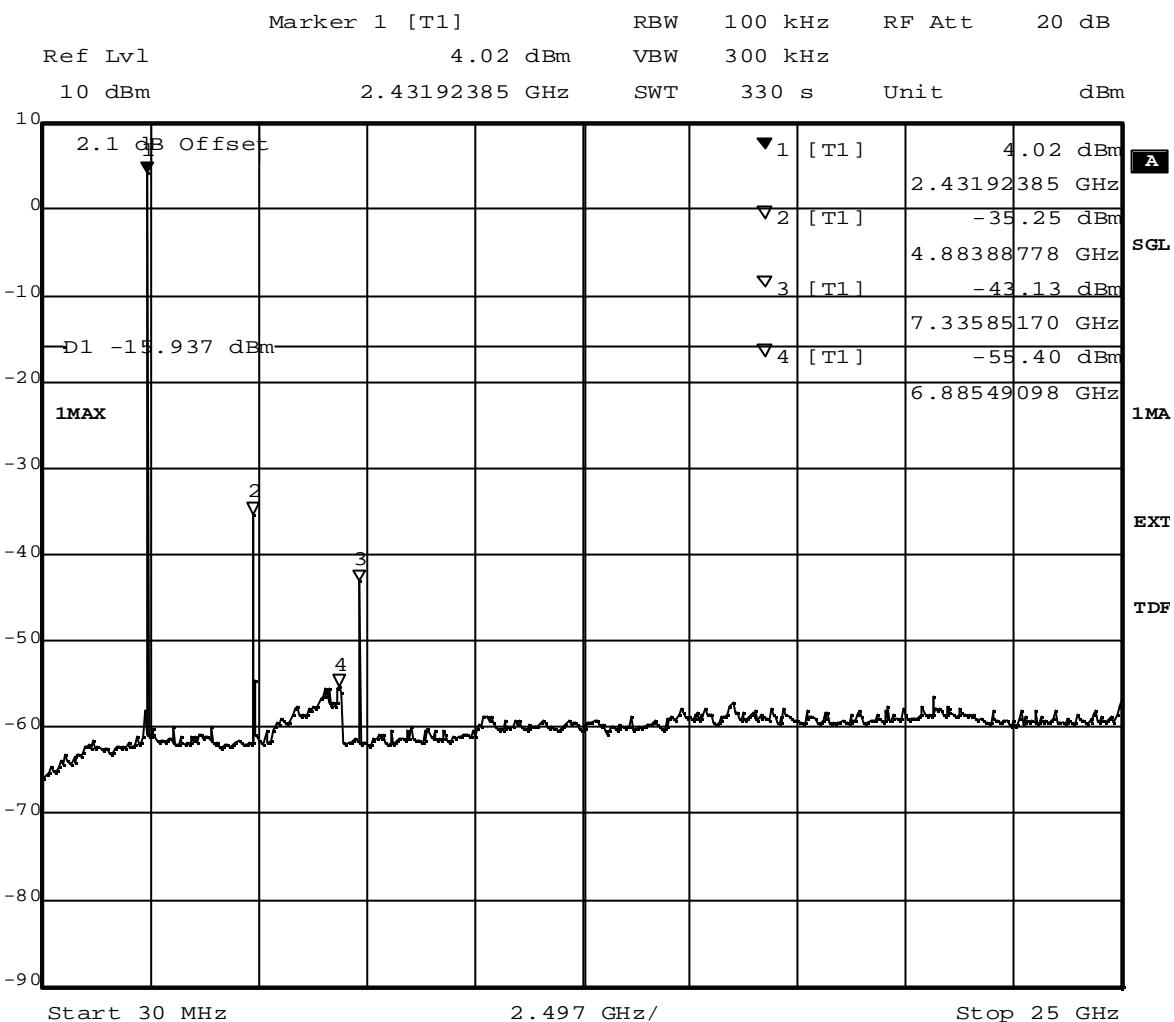


Title: spurious emissions
 Comment A: CH M: 2441 MHz
 Date: 2.JUN.2010 11:00:57

(spurious emissions measurement)

6.3.4 Band edge compliance conducted operating mode 3

Op. Mode

op-mode 3

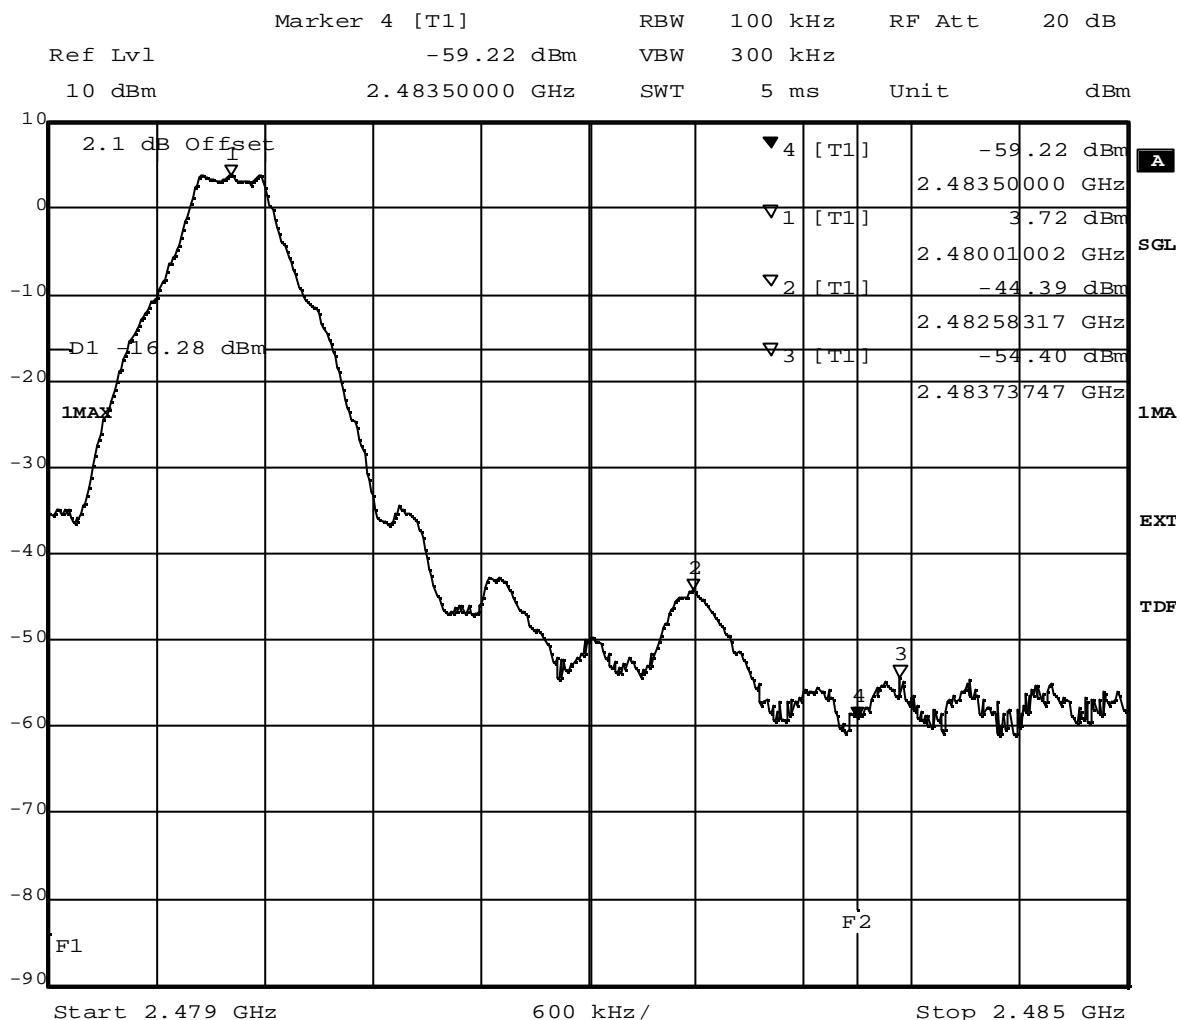


Title: Band Edge Compliance
 Comment A: CH T: 2480 MHz
 Date: 2.JUN.2010 11:31:25

(determination of reference value for spurious emissions measurement)

6.3.5 Spurious RF conducted emissions operating mode 3

Op. Mode

op-mode 3

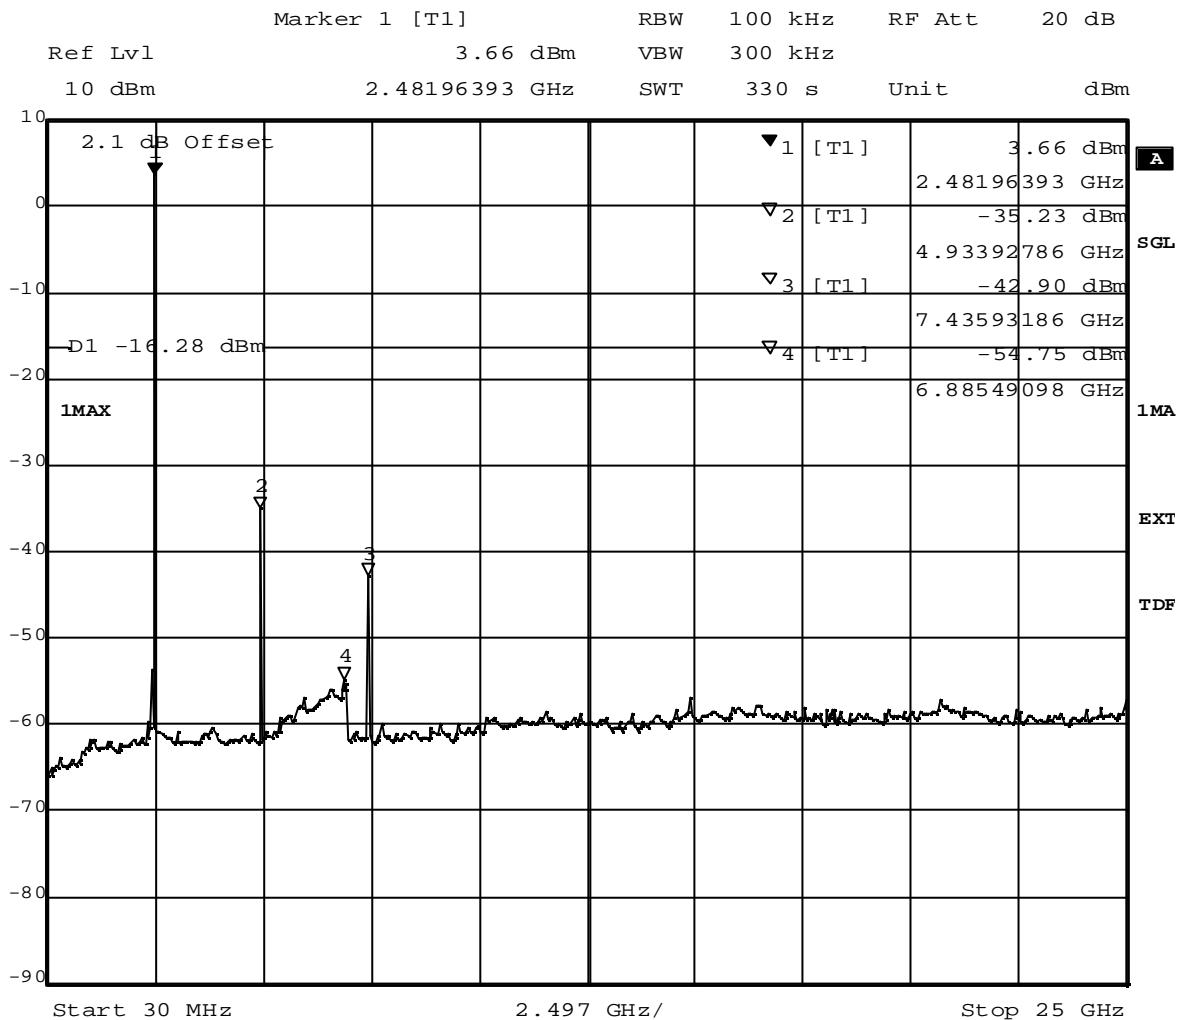


Title: spurious emissions
 Comment A: CH T: 2480 MHz
 Date: 2.JUN.2010 11:43:04

(spurious emissions measurement)

6.3.6 Band edge compliance conducted operating mode 6

Op. Mode

op-mode 6

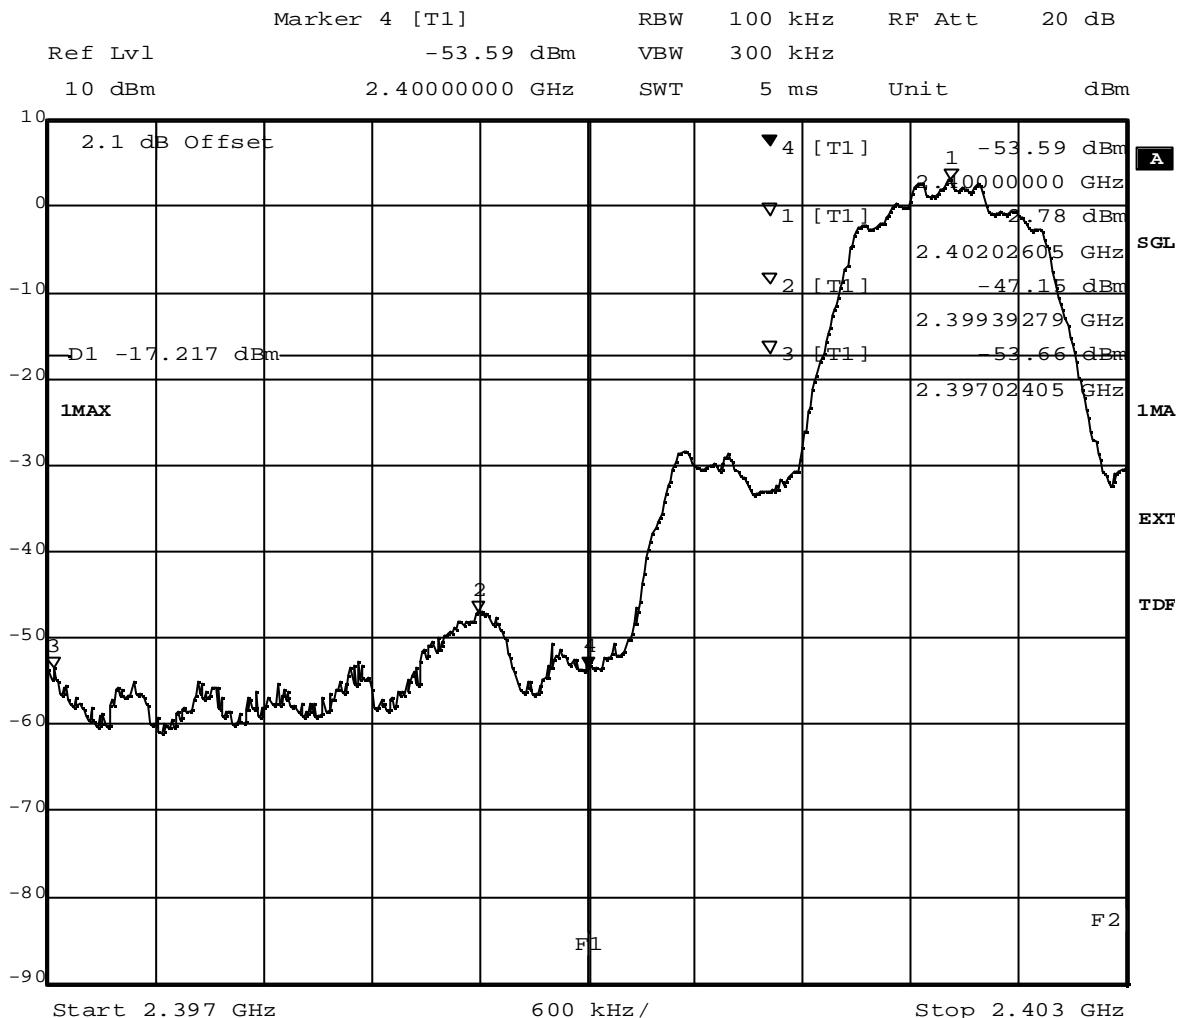


(determination of reference value for spurious emissions measurement)

6.3.7 Spurious RF conducted emissions operating mode 6

Op. Mode

op-mode 6

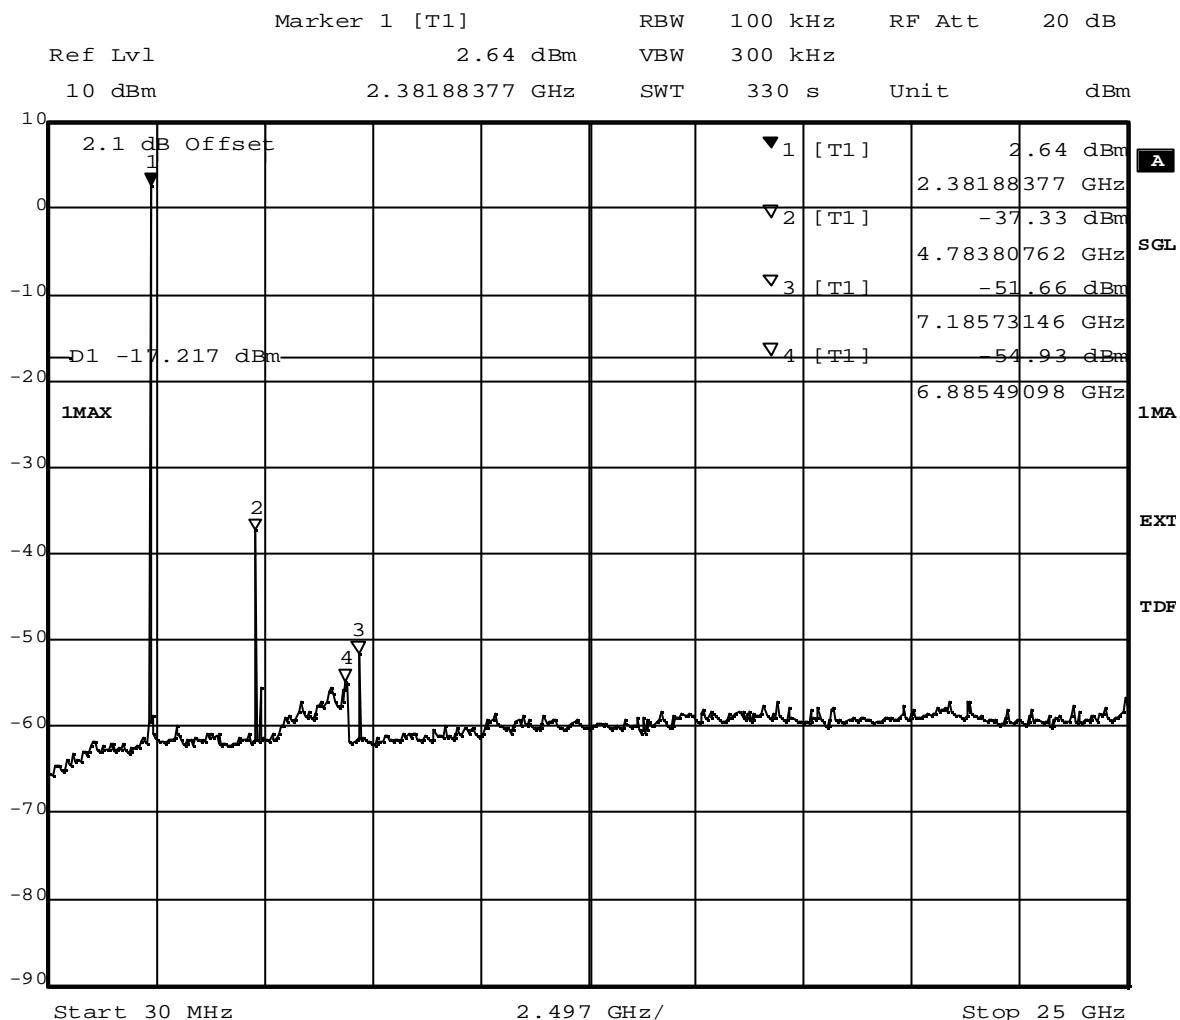


Title: spurious emissions
 Comment A: CH B: 2402 MHz
 Date: 2.JUN.2010 13:32:50

(spurious emissions measurement)

6.3.8 Spurious RF conducted emissions operating mode 7


Op. Mode

op-mode 7

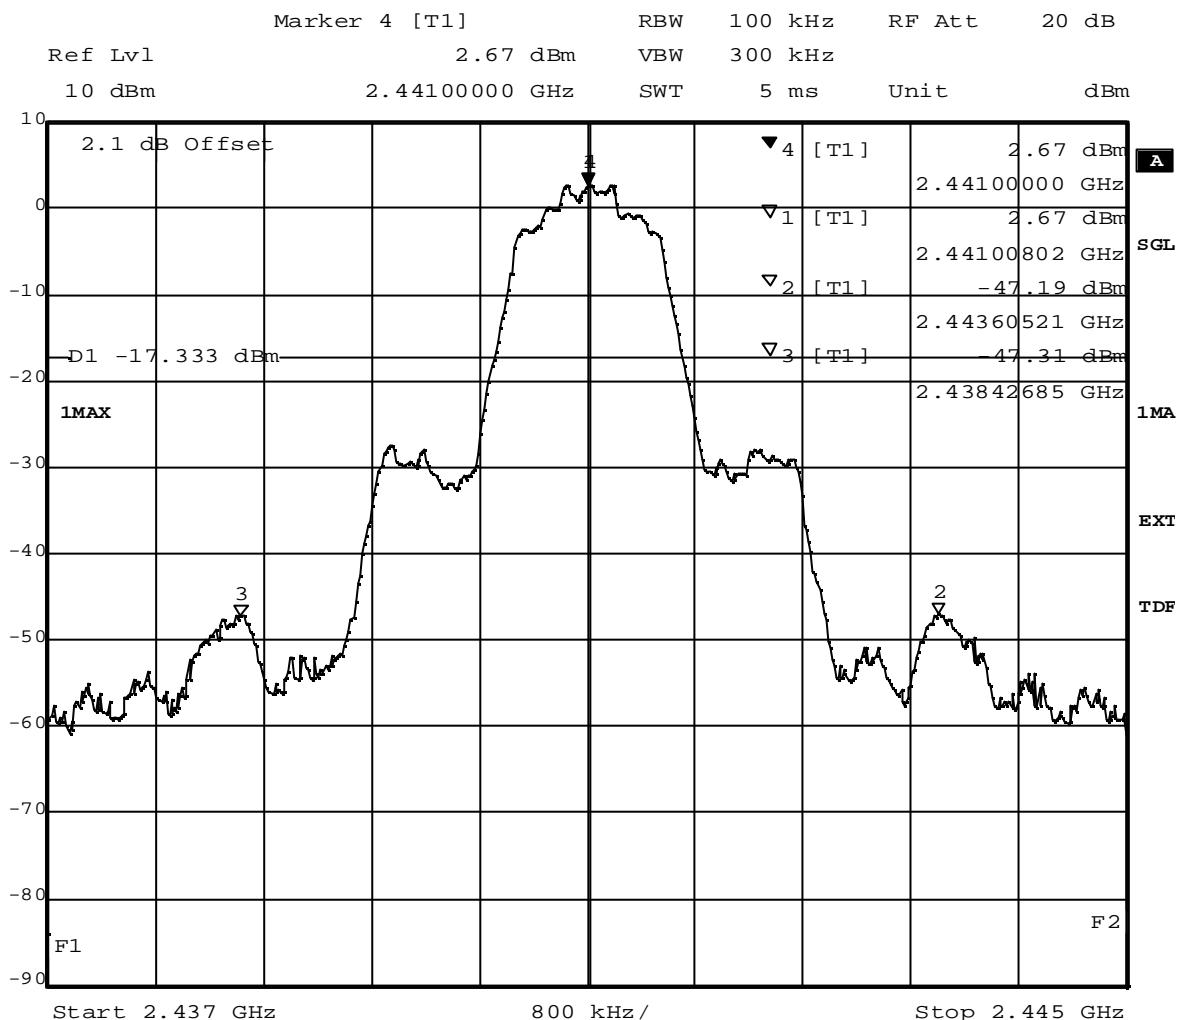

Title: Band Edge Compliance
 Comment A: CH M: 2441 MHz
 Date: 2.JUN.2010 13:38:49

(determination of reference value for spurious emissions measurement)

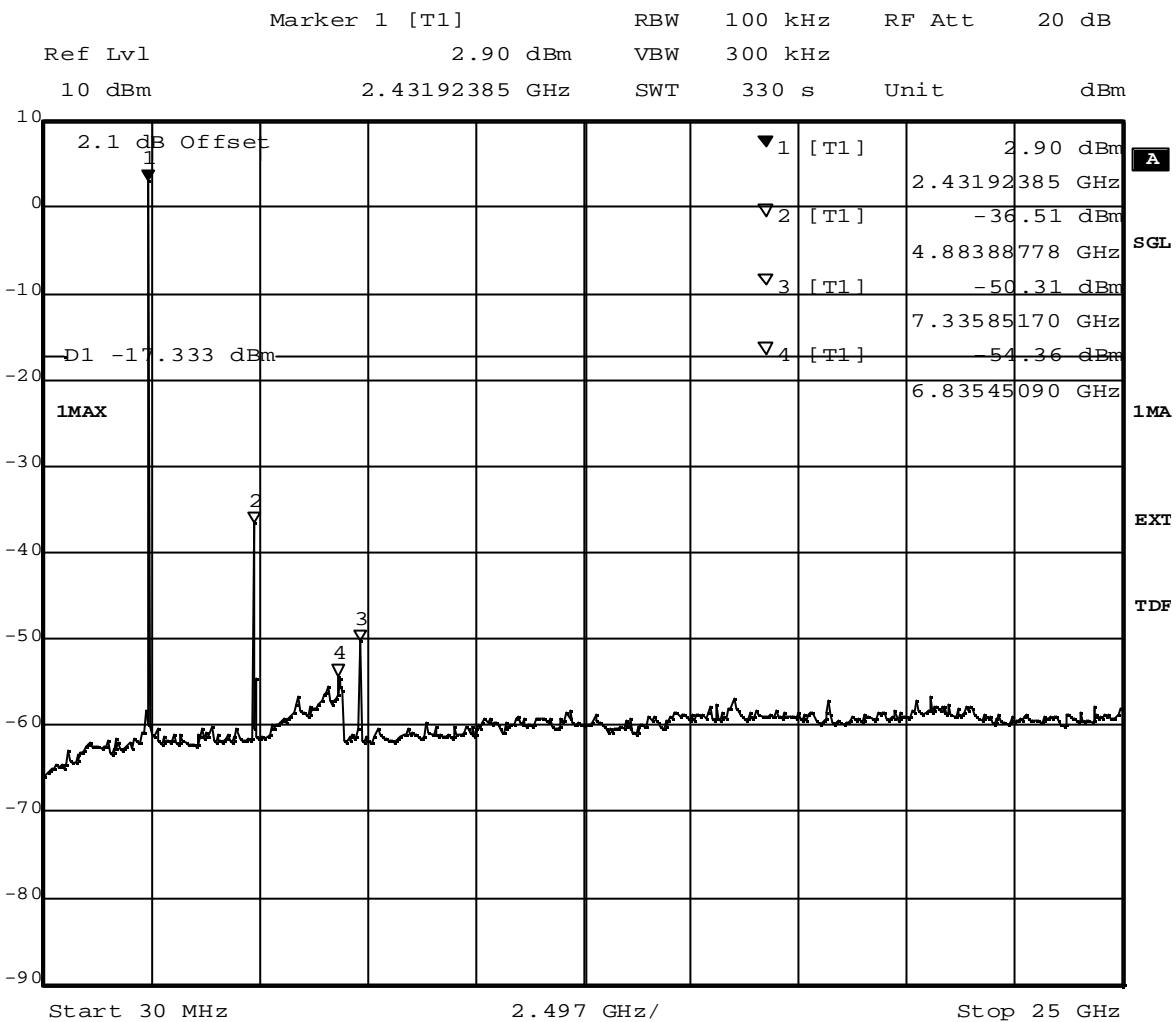


Title: spurious emissions
Comment A: CH M: 2441 MHz
Date: 2.JUN.2010 13:50:28

(spurious emissions measurement)

6.3.9 Band edge compliance conducted operating mode 8

Op. Mode

op-mode 8

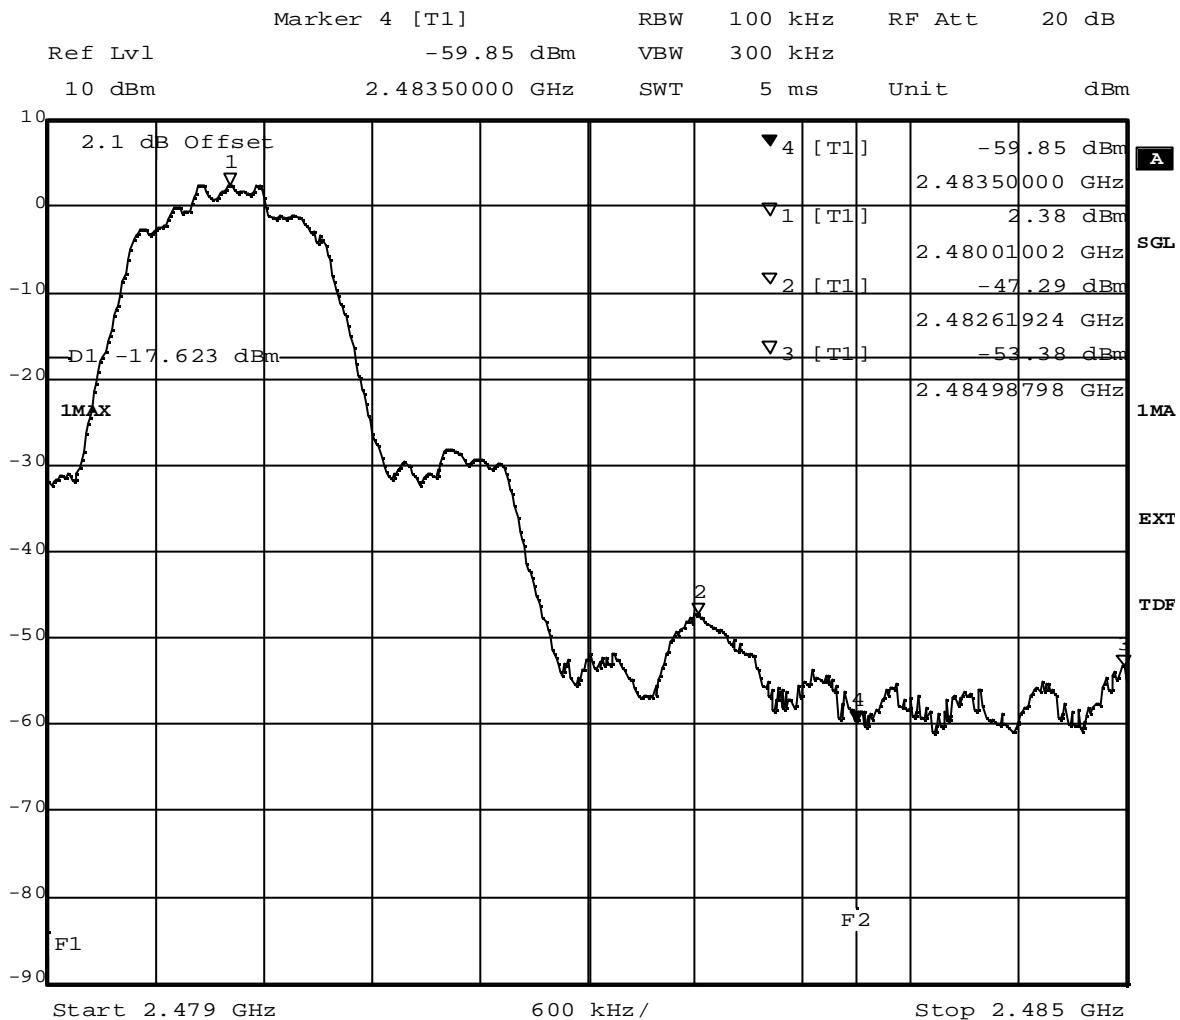


Title: Band Edge Compliance
 Comment A: CH T: 2480 MHz
 Date: 2.JUN.2010 14:36:27

(determination of reference value for spurious emissions measurement)

6.3.10 Spurious RF conducted emissions operating mode 8

Op. Mode

op-mode 8

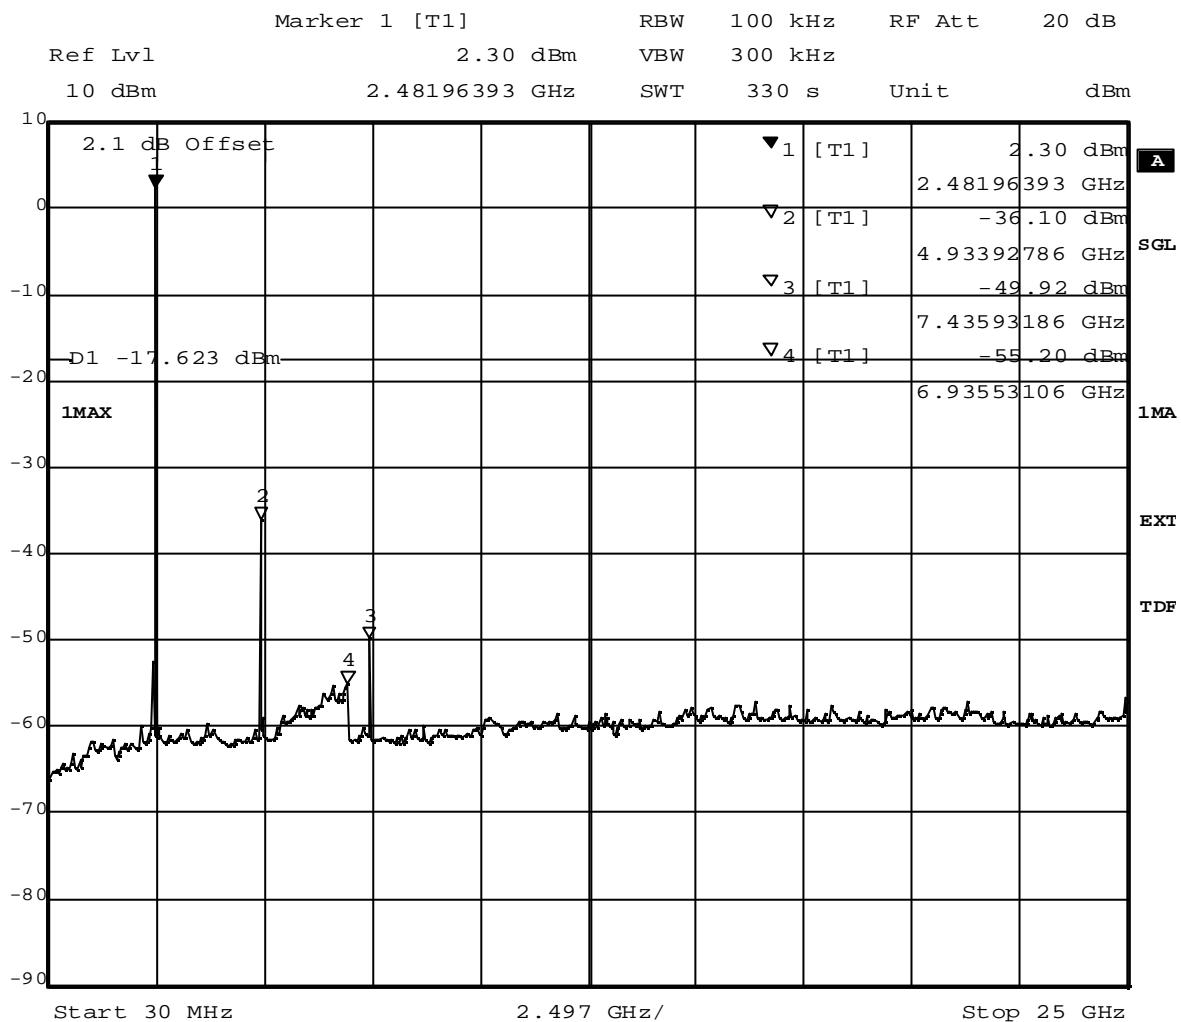


Title: spurious emissions
 Comment A: CH T: 2480 MHz
 Date: 2.JUN.2010 14:48:06

(spurious emissions measurement)

6.3.11 Band edge compliance conducted operating mode 10

Op. Mode

op-mode 10

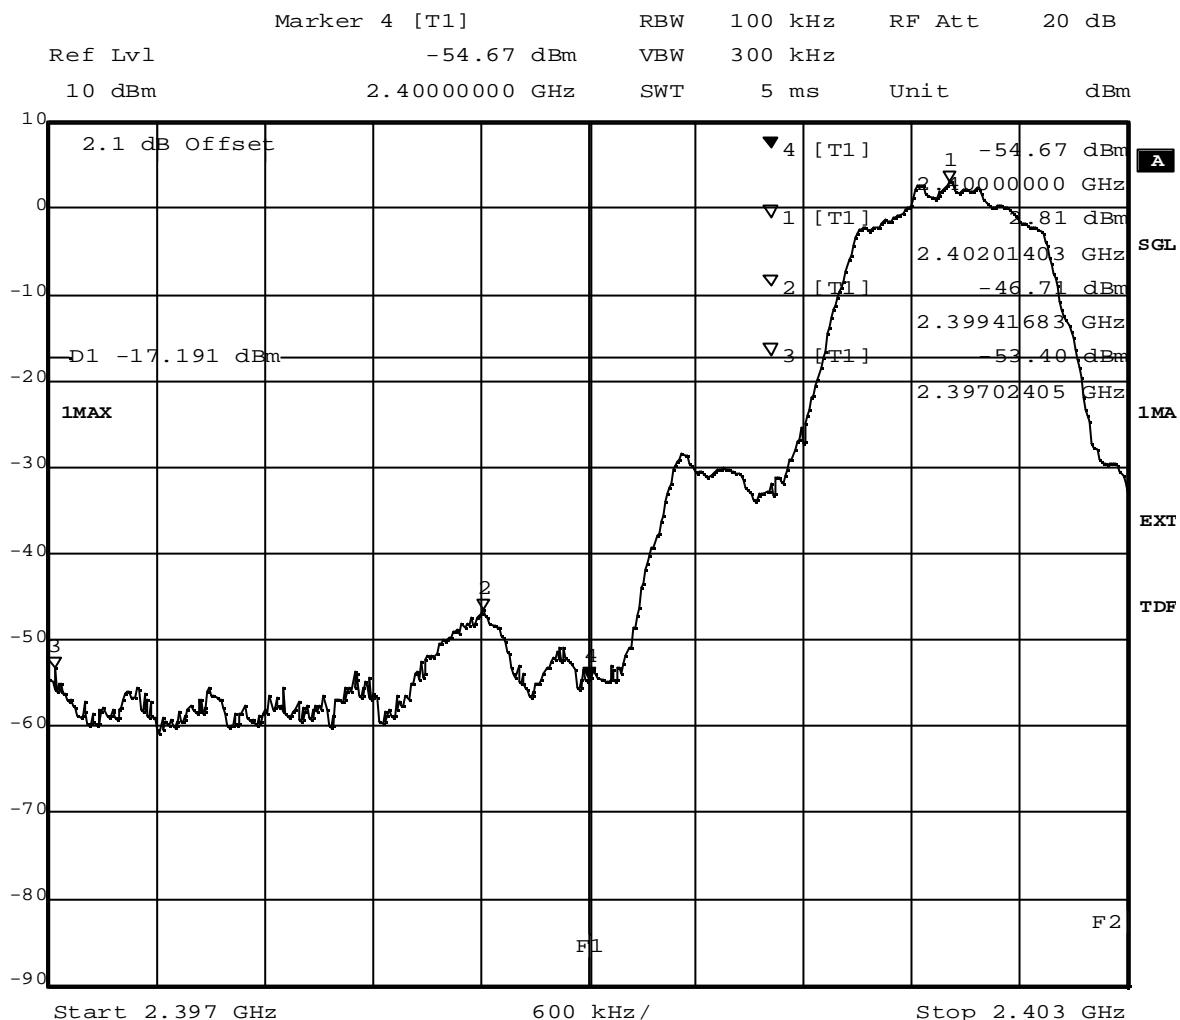


Title: Band Edge Compliance
 Comment A: CH B: 2402 MHz
 Date: 2.JUN.2010 12:14:31

(determination of reference value for spurious emissions measurement)

6.3.12 Spurious RF conducted emissions operating mode 10

Op. Mode

op-mode 10

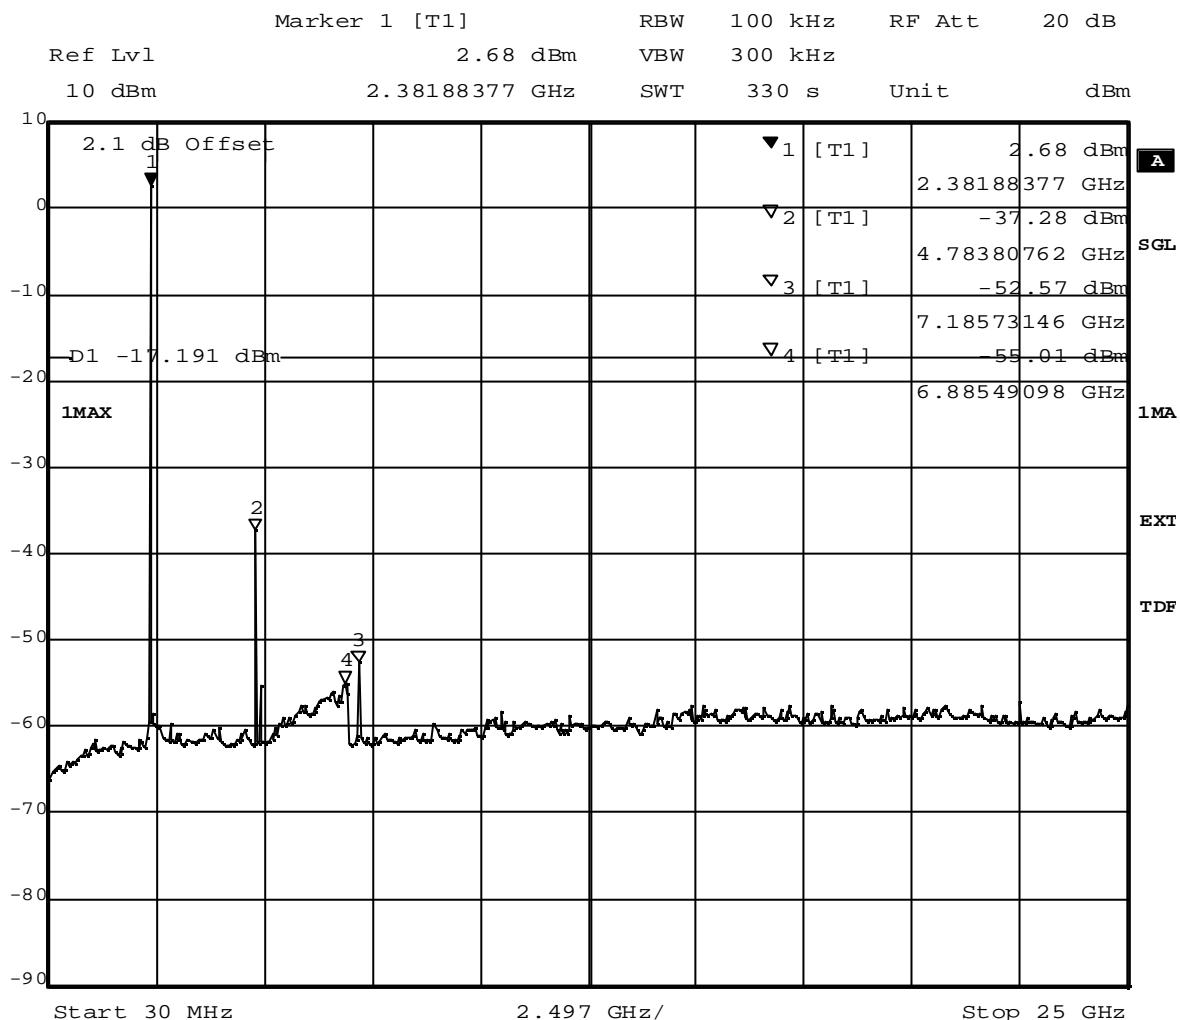


Title: spurious emissions
 Comment A: CH B: 2402 MHz
 Date: 2.JUN.2010 12:26:09

(spurious emissions measurement)

6.3.13 Spurious RF conducted emissions operating mode 11


Op. Mode

op-mode 11

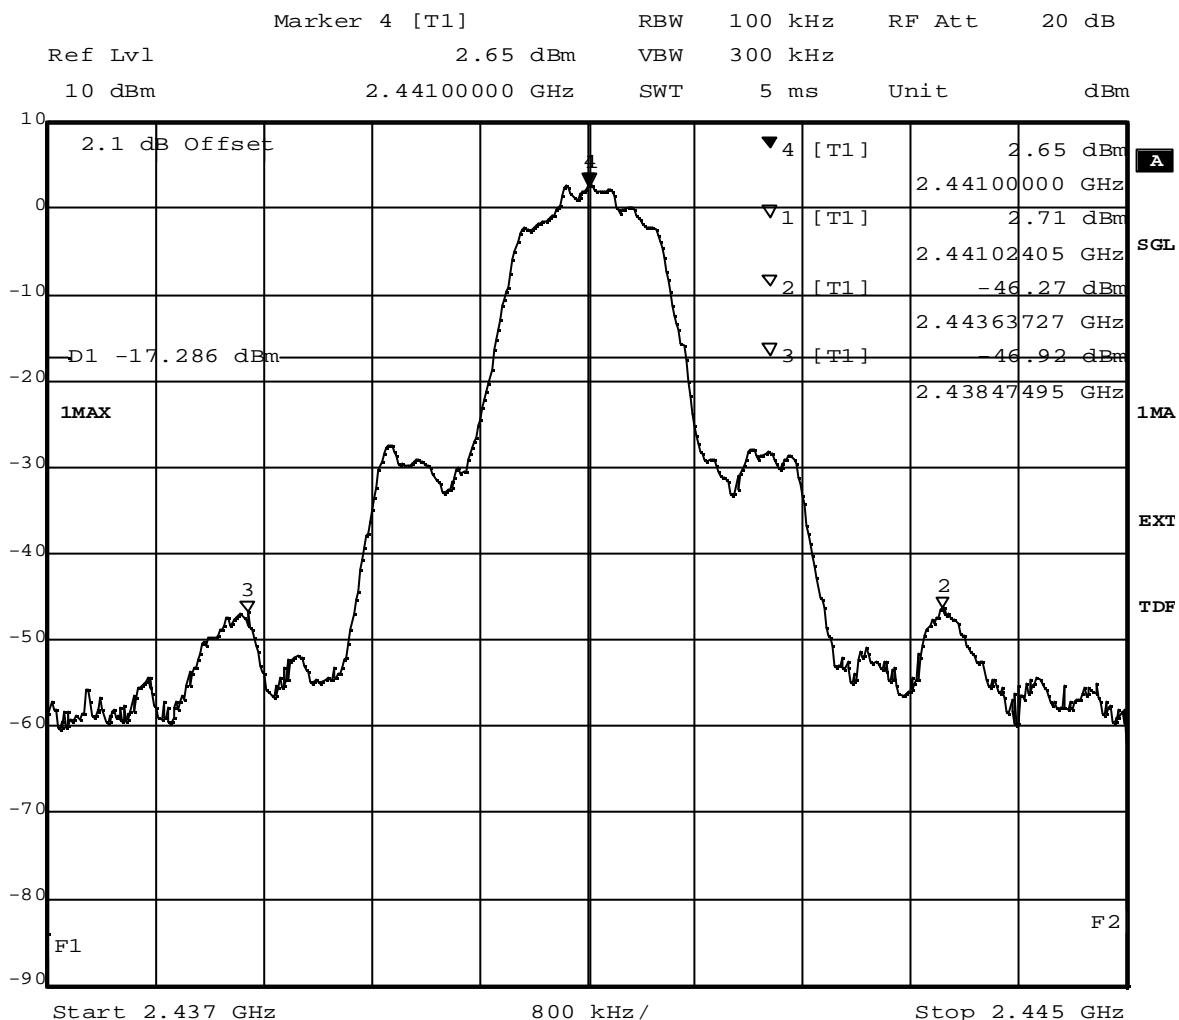

Title: Band Edge Compliance
 Comment A: CH M: 2441 MHz
 Date: 2.JUN.2010 12:37:25

(determination of reference value for spurious emissions measurement)

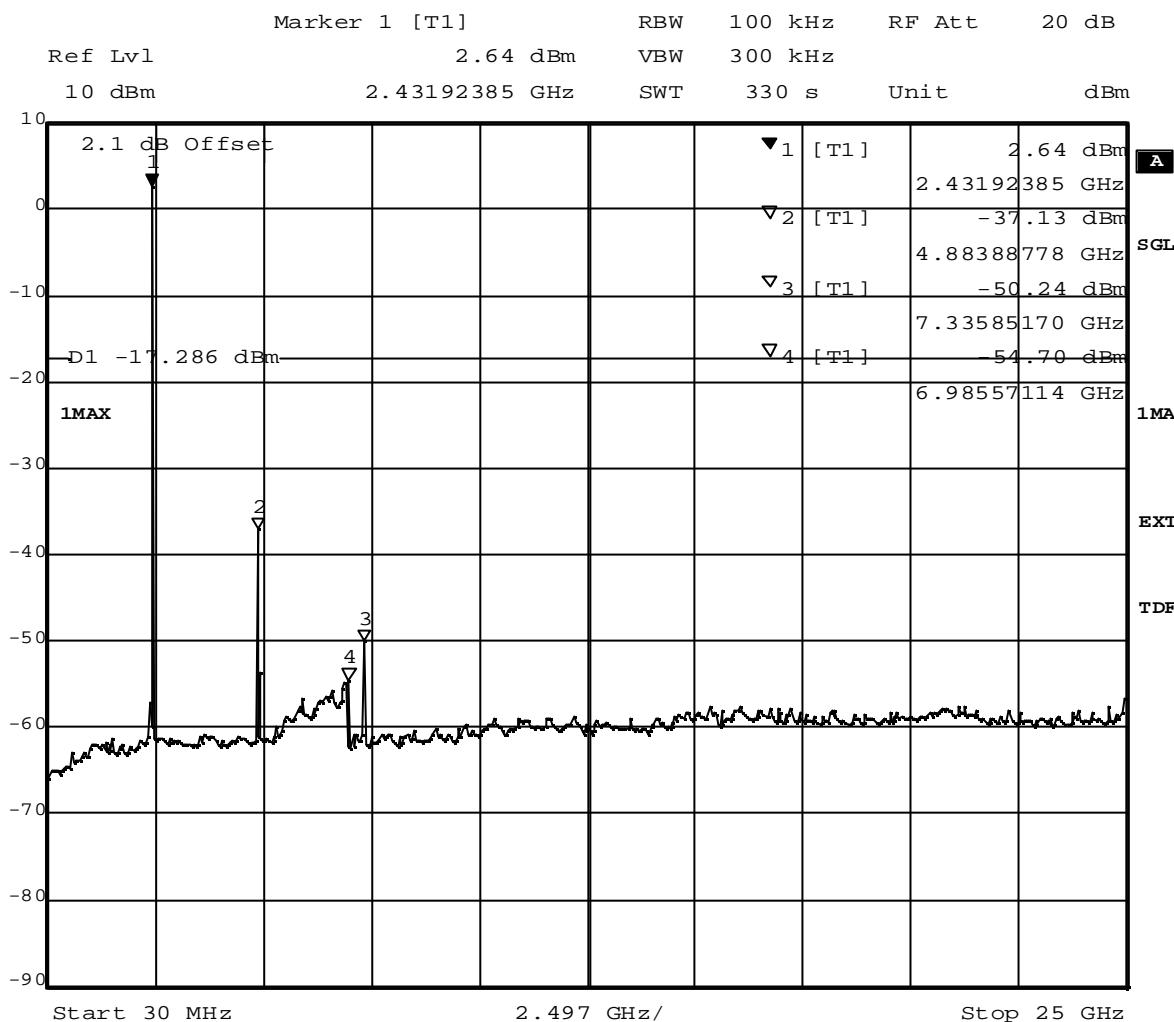


Title: spurious emissions
 Comment A: CH M: 2441 MHz
 Date: 2.JUN.2010 12:49:04

(spurious emissions measurement)

6.3.14 Band edge compliance conducted operating mode 12

Op. Mode

op-mode 12

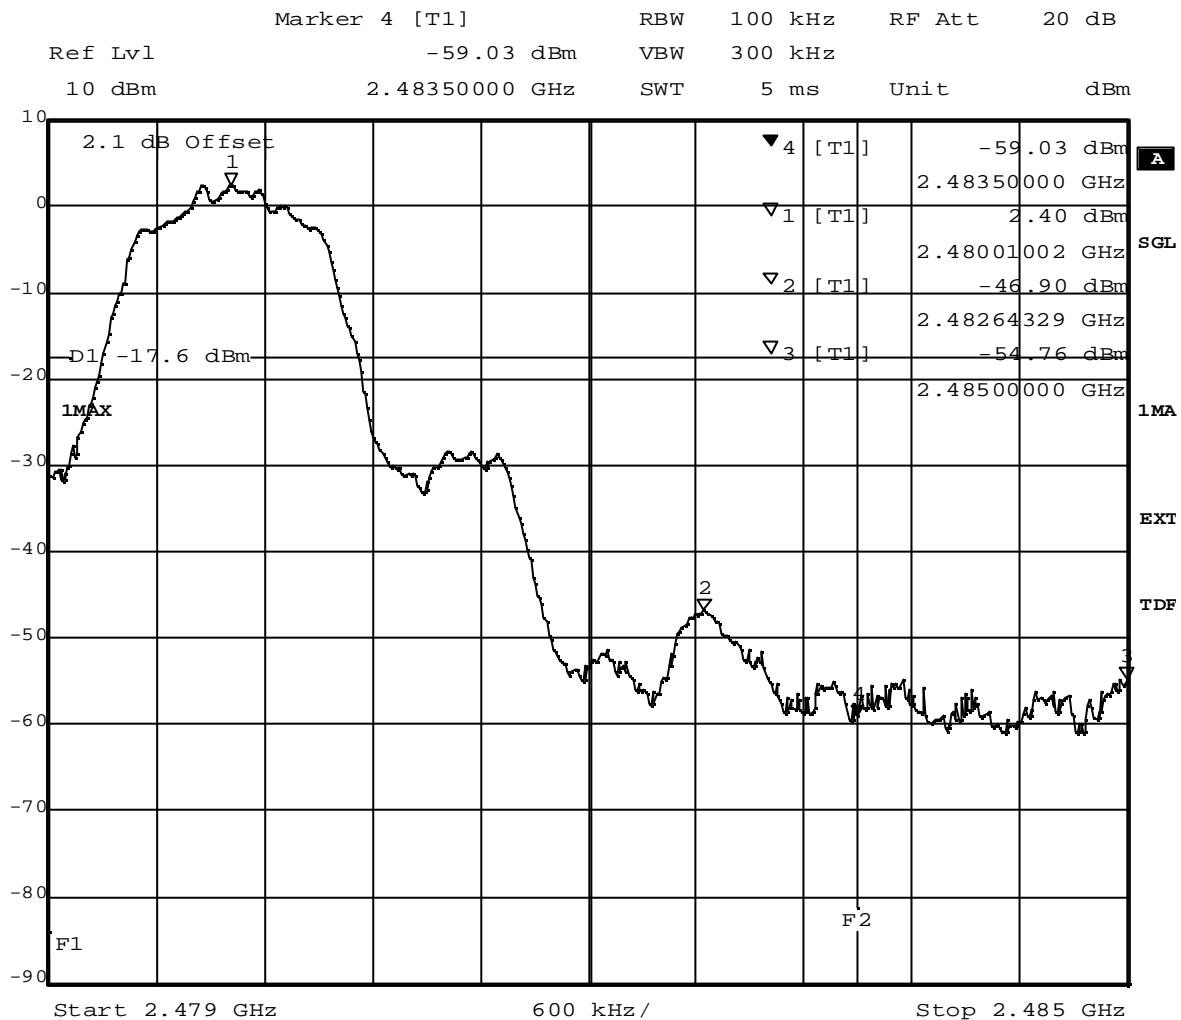


Title: Band Edge Compliance
 Comment A: CH T: 2480 MHz
 Date: 2.JUN.2010 12:55:50

(determination of reference value for spurious emissions measurement)

6.3.15 Spurious RF conducted emissions operating mode 12

Op. Mode

op-mode 12

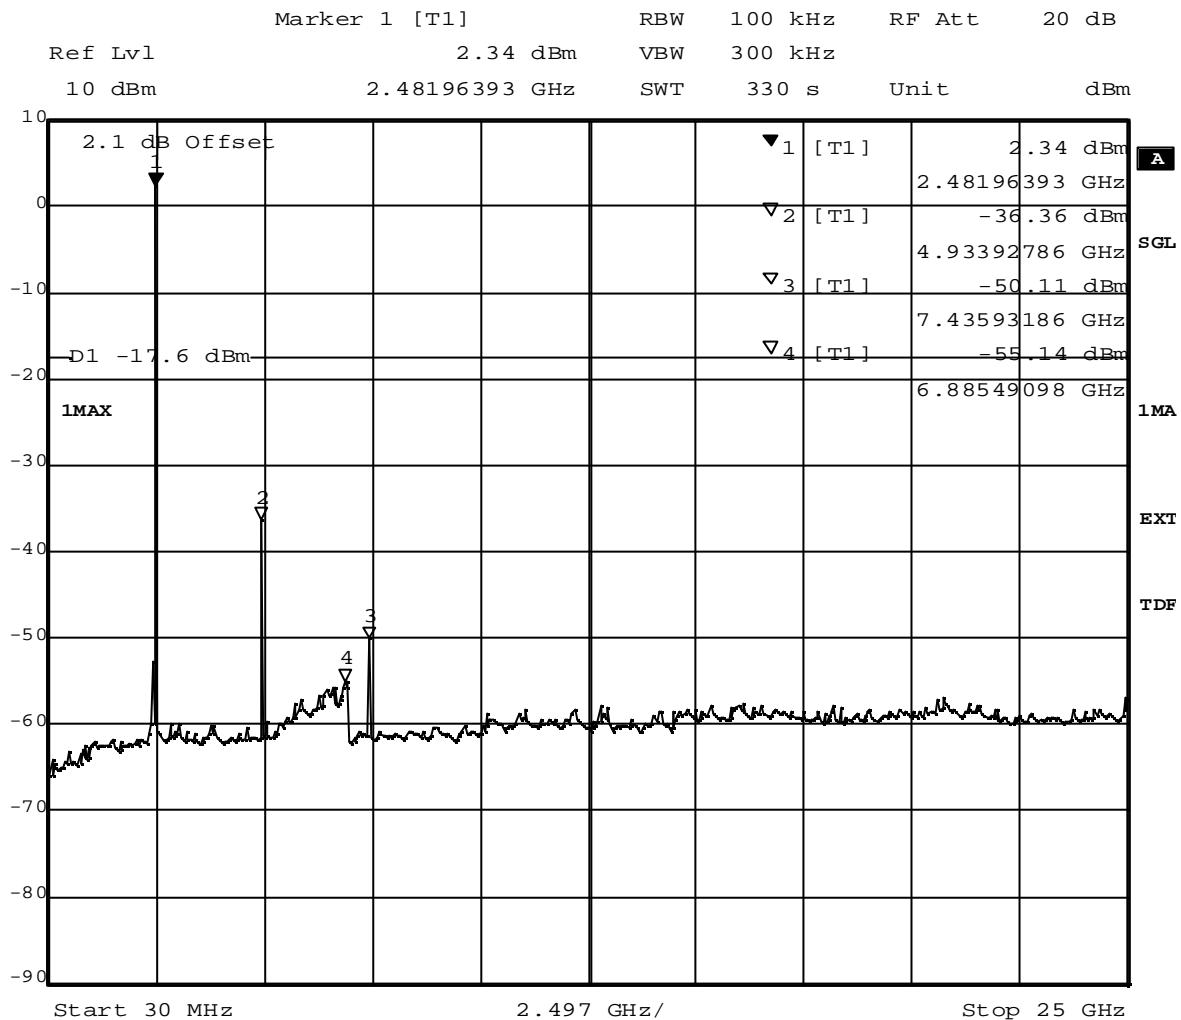

Title: spurious emissions
Comment A: CH T: 2480 MHz
Date: 2.JUN.2010 13:07:29


(spurious emissions measurement)

6.4 Band edge compliance radiated

6.4.1 Band edge compliance radiated operating mode 3

Op. Mode

op-mode 3

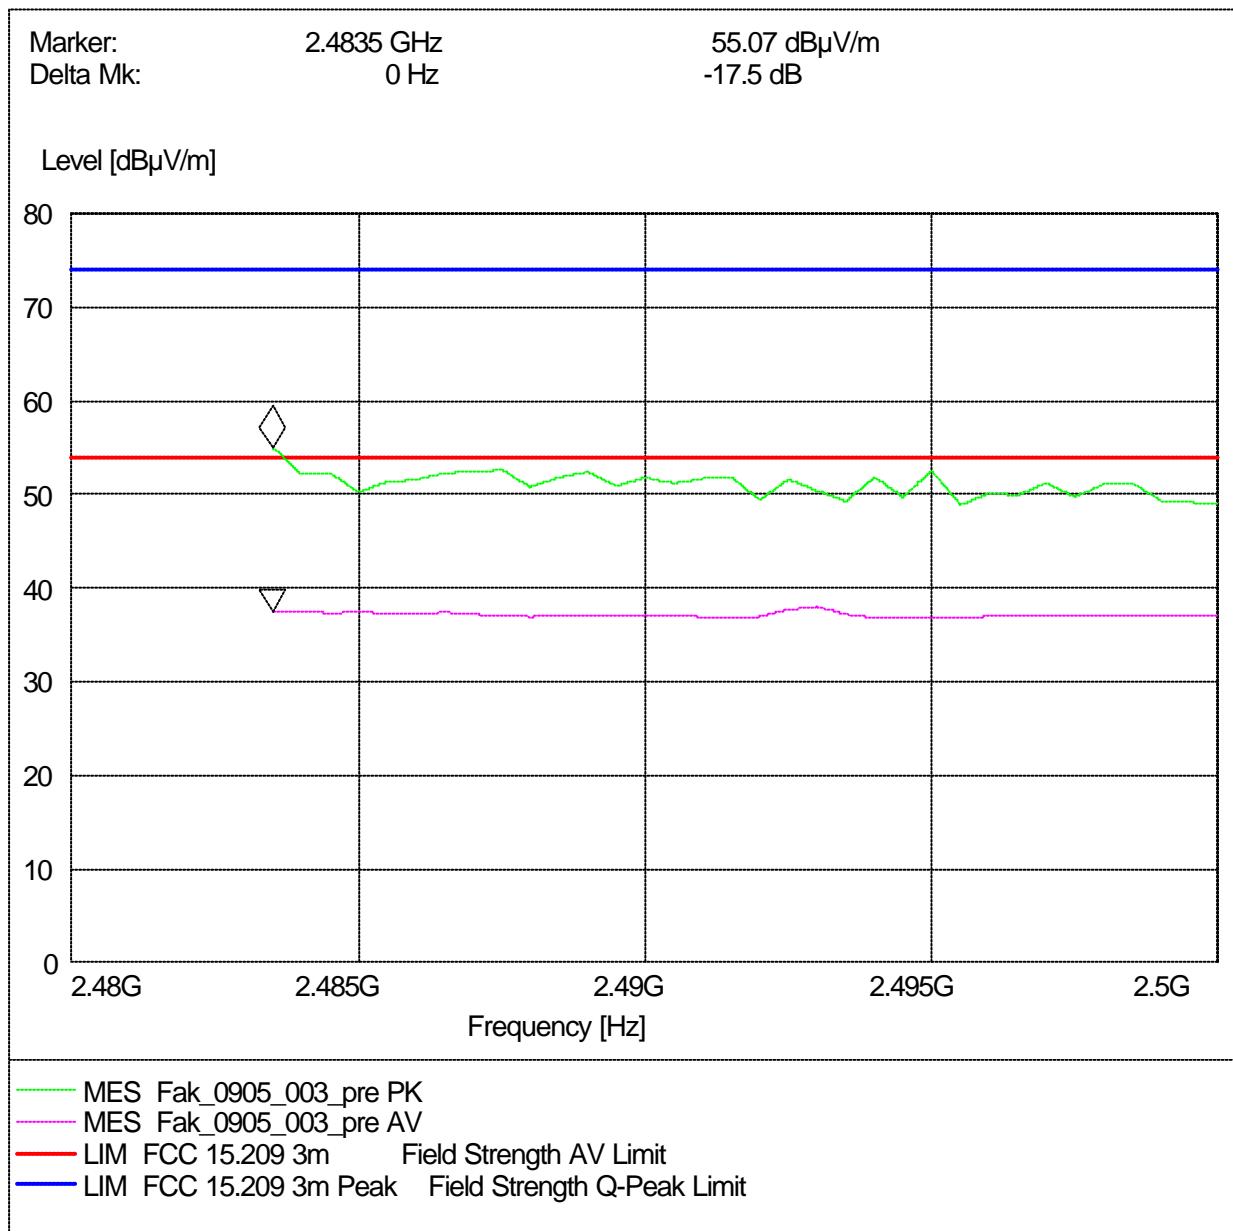


Radiated measurement (higher band edge)

6.4.2 Band edge compliance radiated operating mode 8

Op. Mode

op-mode 8

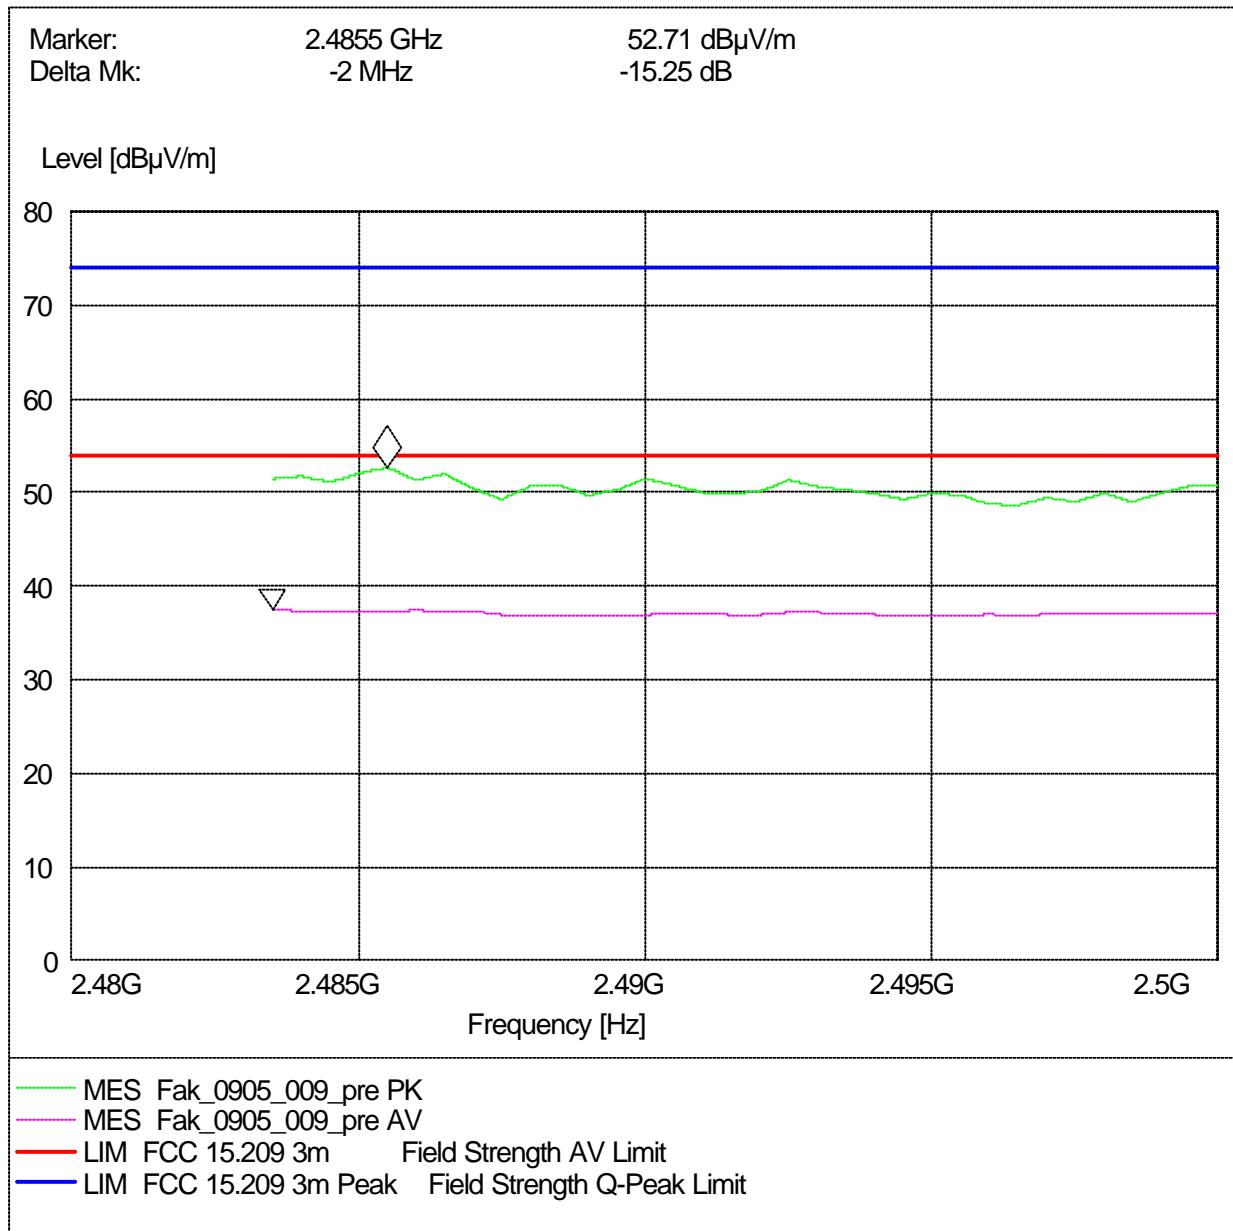


Radiated measurement (higher band edge)

6.4.3 Band edge compliance radiated operating mode 12

Op. Mode

op-mode 12

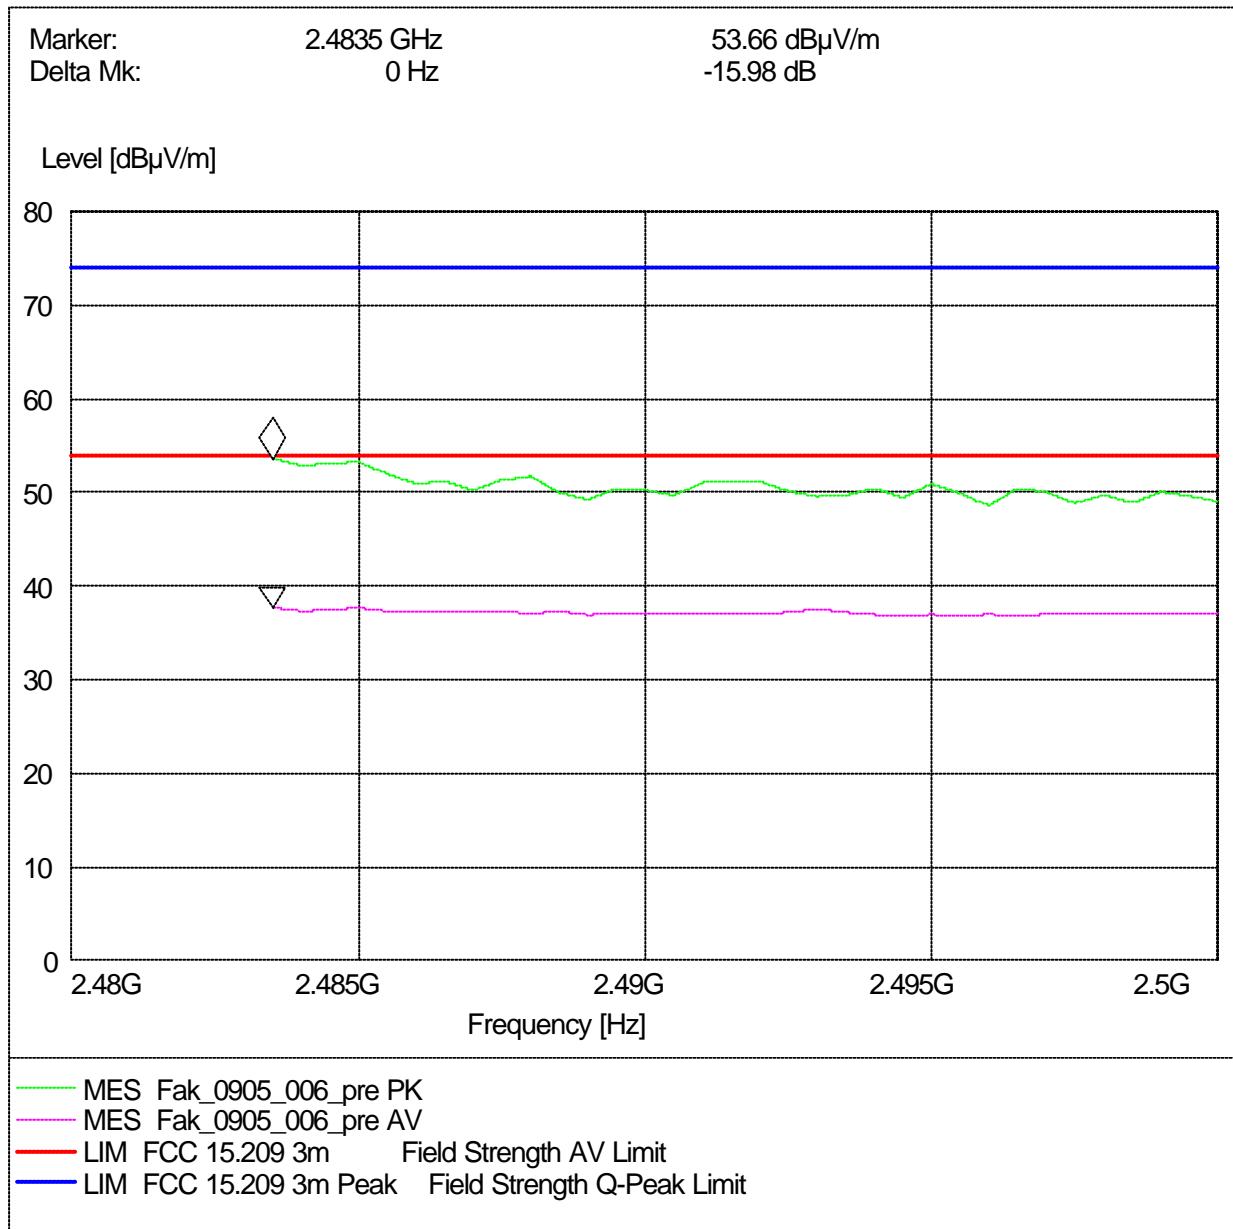


Radiated measurement (higher band edge)

6.5 Radiated emissions (f < 30 MHz)


Op. Mode

op-mode 1

Antenna position 90°
EUT position front side

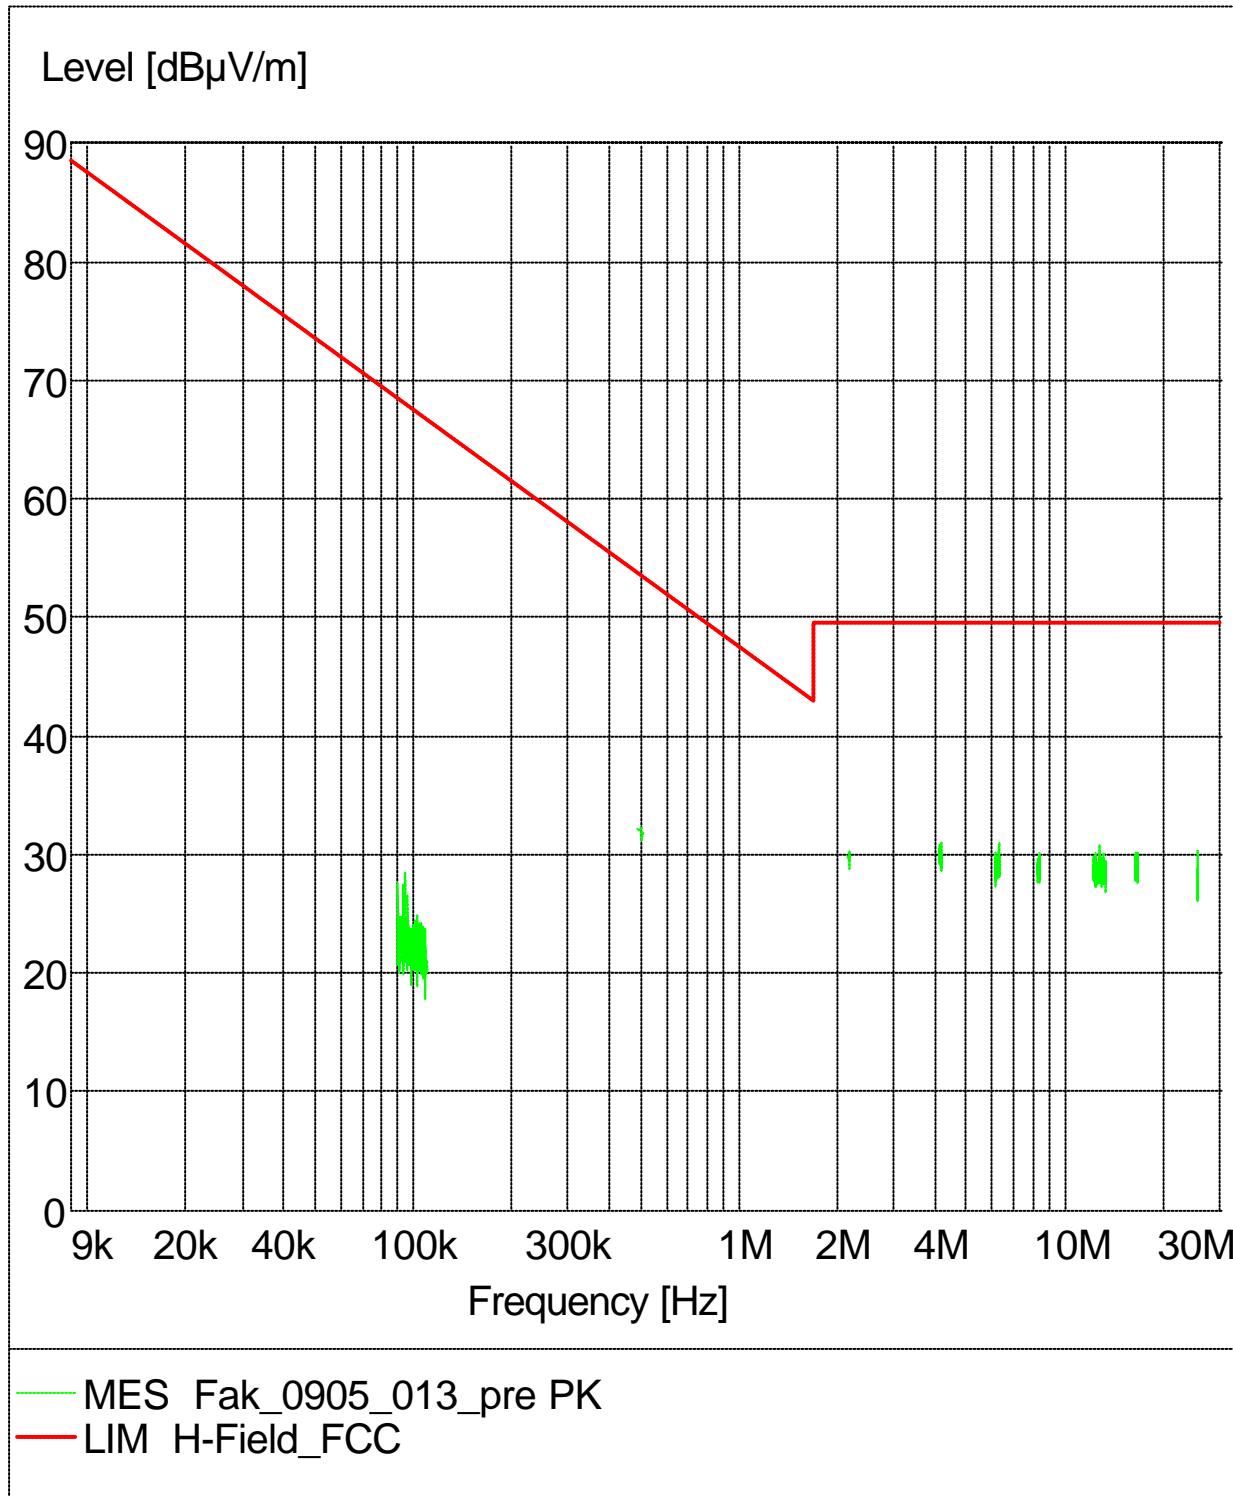


Antenna position 90°
EUT position right side

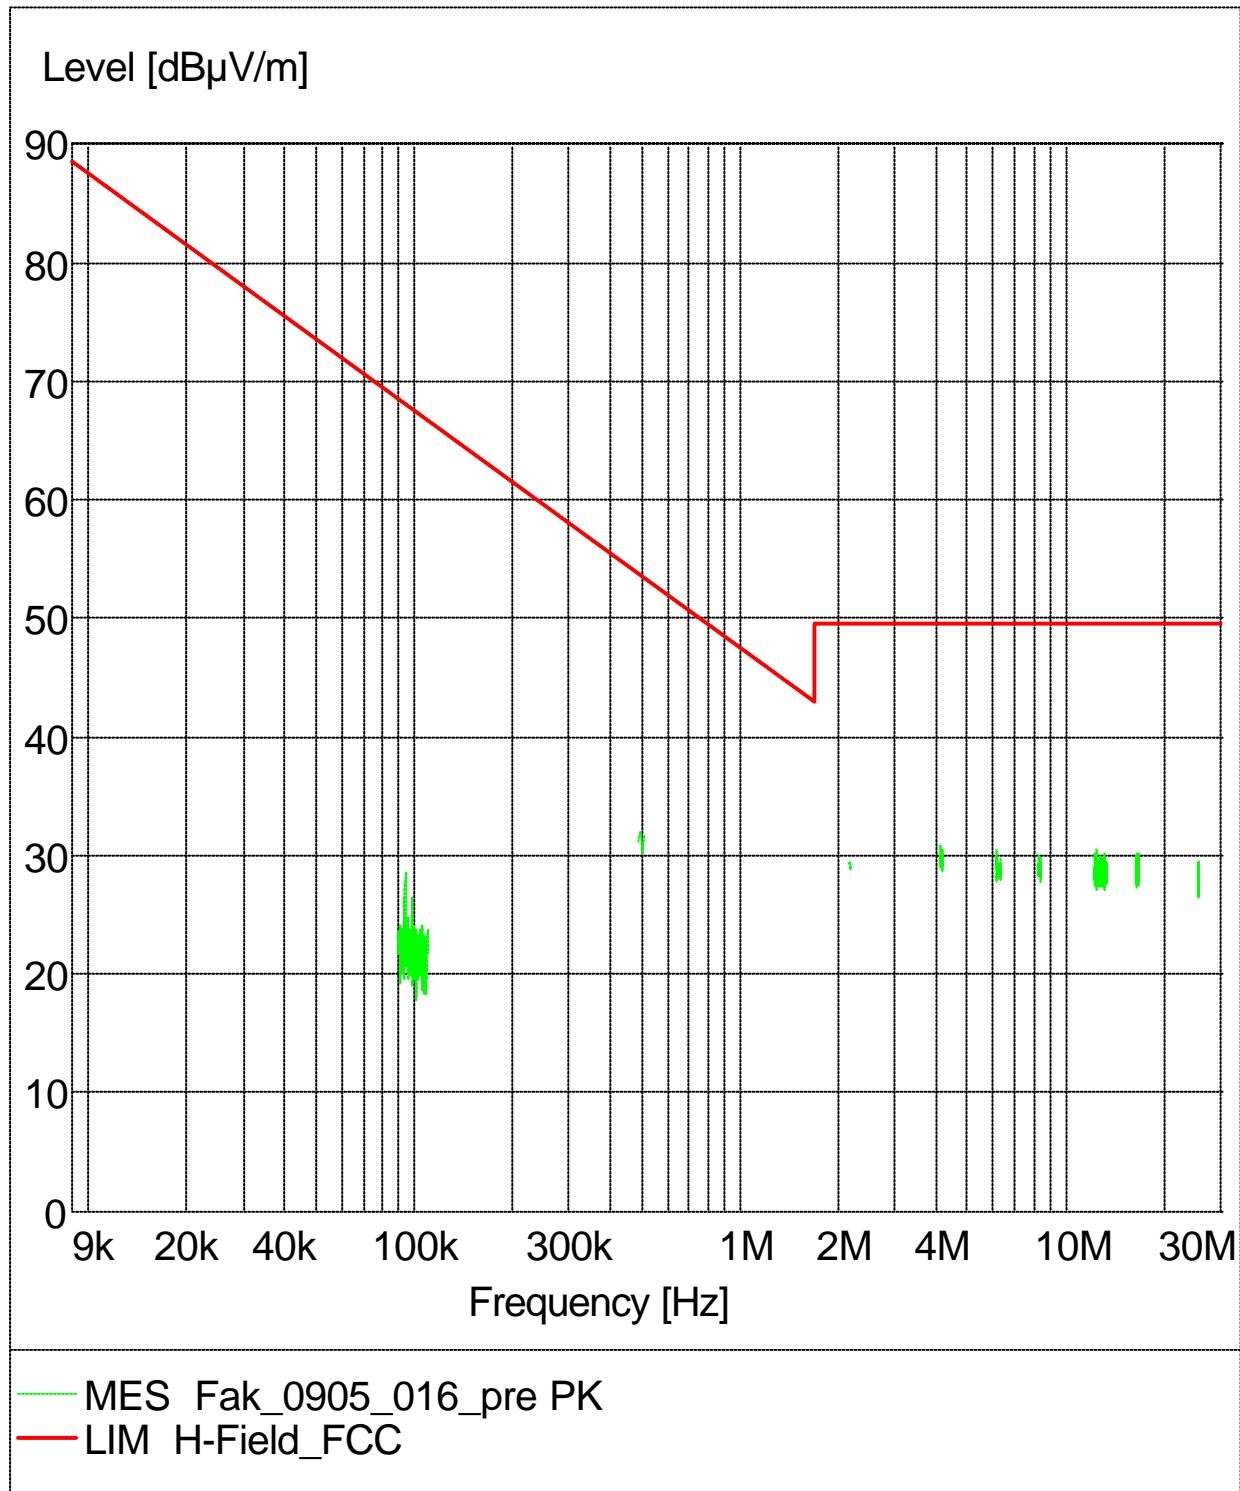


Op. Mode

op-mode 1

Antenna position 0°
EUT position front side

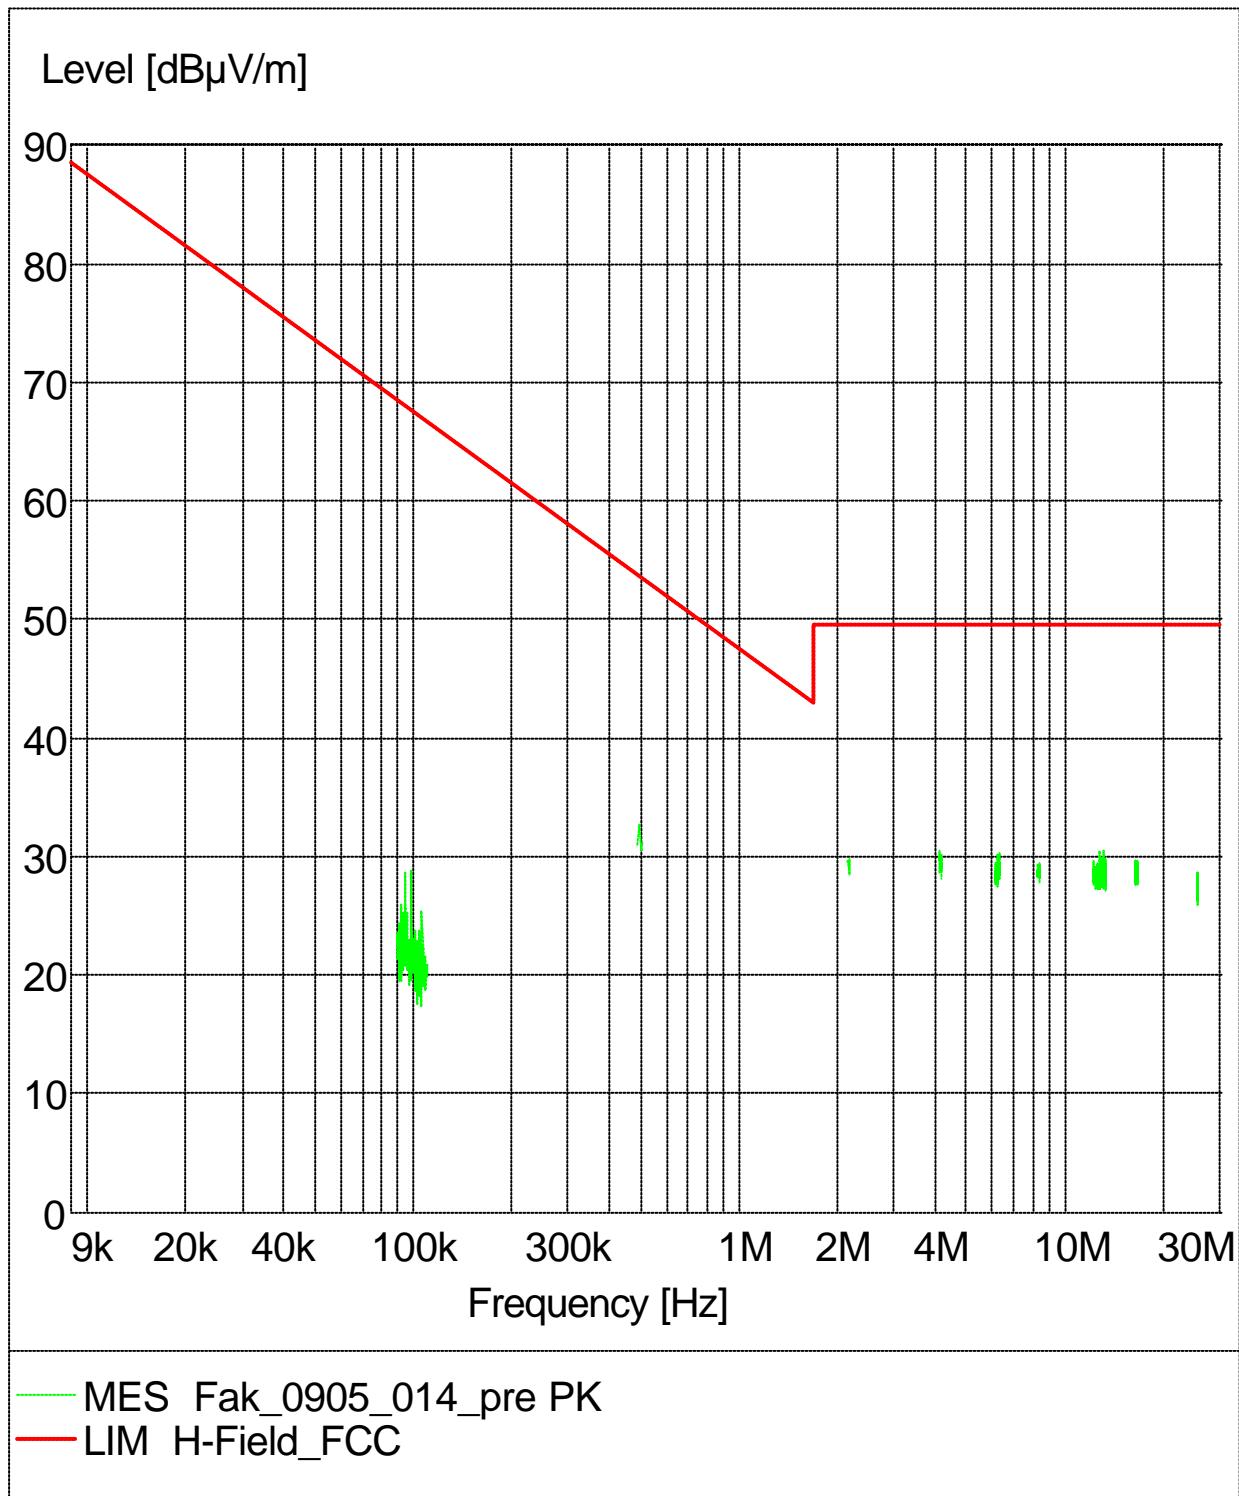


Antenna position 0°
EUT position right side

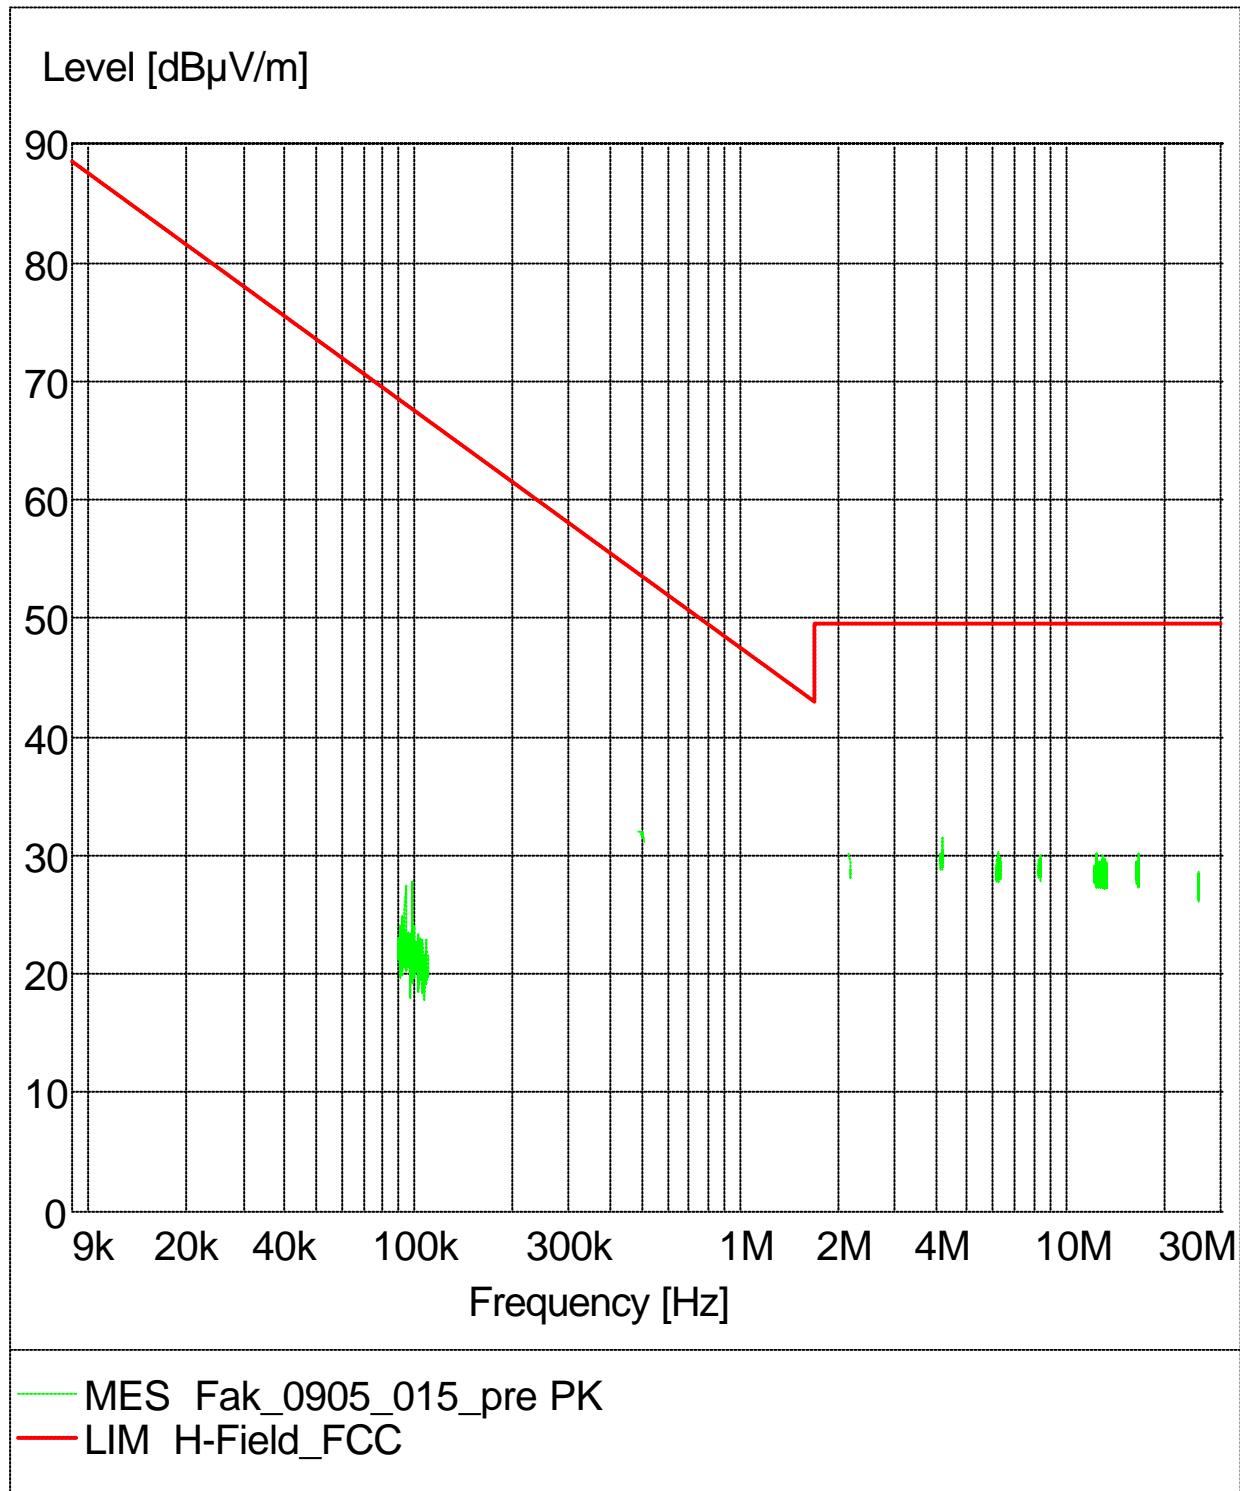

6.6 Dwell time

Op. Mode

Op-mode 2 Time slot measurement of a DH5 packet

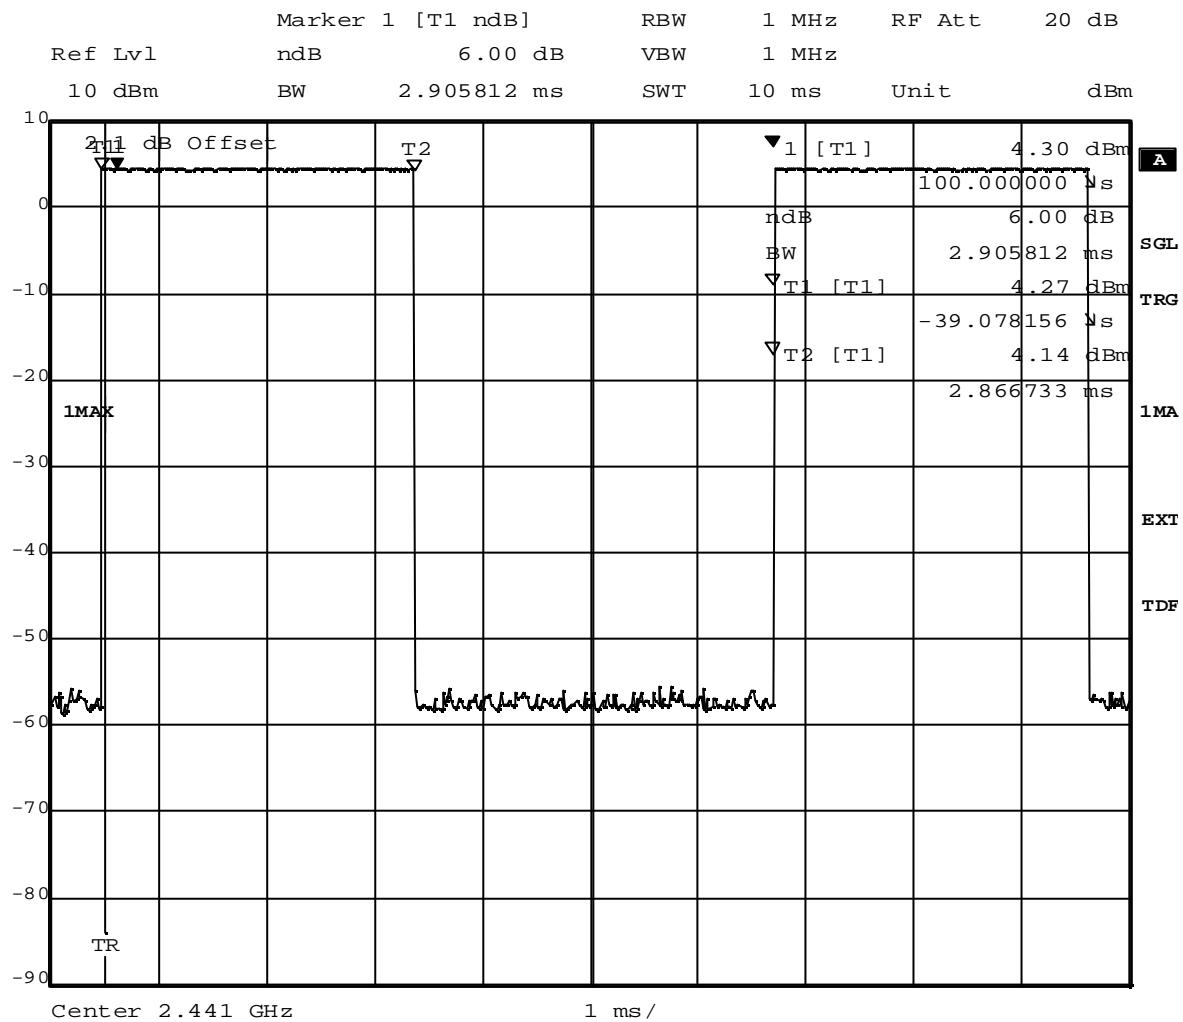


Title: Dwell time
 Comment A: CH M: 2441 MHz
 Date: 2.JUN.2010 12:13:24

6.7 Channel separation

Op. Mode

op-mode 4

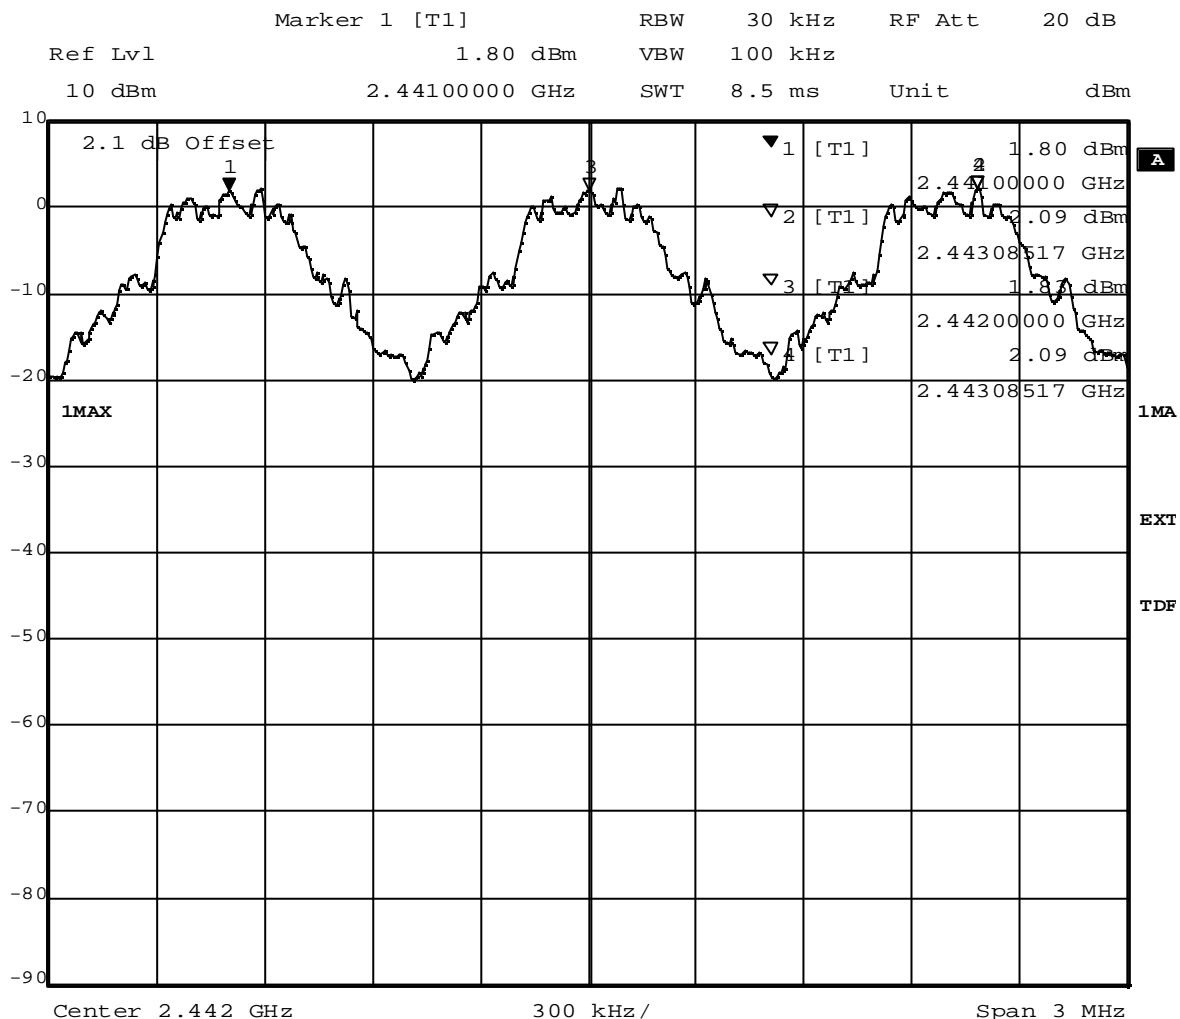


Title: Number of hopping frequencies
 Comment A: CH H: Hopping
 Date: 2.JUN.2010 12:08:58

6.8 Number of hopping frequencies

Op. Mode

op-mode 4

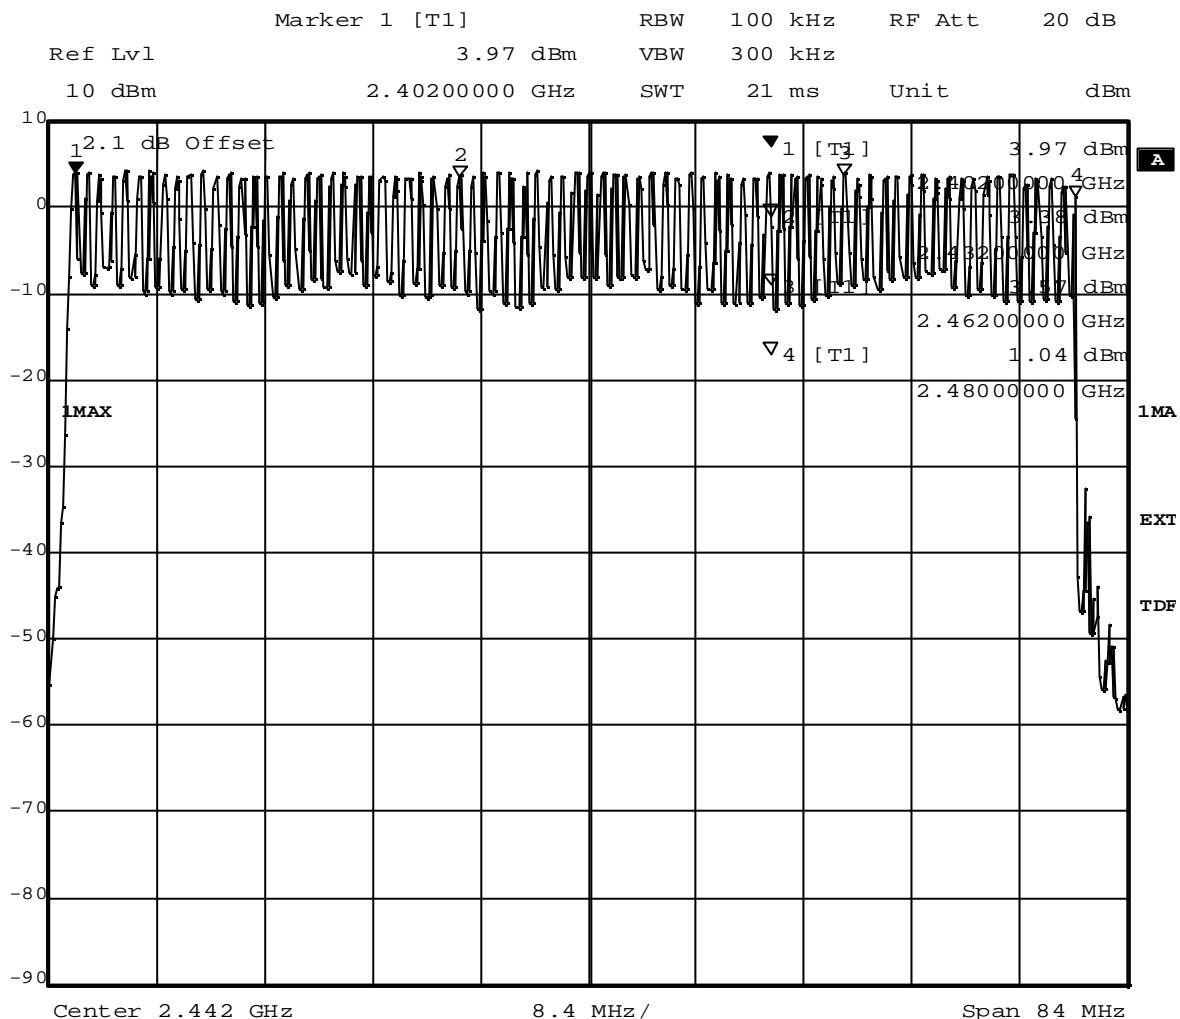

Title: Number of hopping frequencies
 Comment A: CH H: Hopping
 Date: 2.JUN.2010 12:11:57