



Test report No:
2032140R-RF-US-P06V01

FCC TEST REPORT

Product Name	Remote Controller
Trademark	SHARP
FCC ID	RX3-GB346WJSA
Model and /or type reference	GB346WJSA
Applicant's name / address	Hon Hai Precision Industry Co., Ltd. No.151, Sec. 1, Nankan Rd., Lujhu Taoyuan County Taiwan 33859
Test method requested, standard	FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10: 2013 KD558074 D01 15.247 Meas Guidance v05r02
Verdict Summary	IN COMPLIANCE
Documented by (name / position & signature)	Kitty Li/Project Assistant 
Reviewed by (name / position & signature)	Frank He/ Technical Supervisor 
Approved by (name / position & signature)	Jack Zhang/ Supervisor 
Date of issue	2020-08-26
Report template No	2032140R-RF-US-P06V01

INDEX

	page
General conditions	4
Environmental conditions	4
Possible test case verdicts	5
Abbreviations.....	5
Document History.....	6
Remarks and Comments	6
Used Equipment.....	7
Uncertainty	9
1 General Information	10
1.1 General Description of the Item(s).....	10
1.2 Antenna Information	11
1.3 Channel List.....	12
2 Description of Test Setup.....	13
2.1 Operating mode(s) used for tests	13
2.2 Auxiliary equipment / Test software for the EUT	13
2.3 Test Configuration / Block diagram used for tests.....	14
2.4 Testing process	15
3 Verdict summary section.....	16
3.1 Standards	16
3.2 Deviation(s) from the Standard(s) / Test Specification(s).....	16
3.3 Overview of results	17
3.4 Test Facility.....	17
4 Test Results	18
4.1 AC Power Line Conducted Emission.....	18
4.1.1 Limit	18
4.1.2 Test Setup	18
4.1.3 Test Procedure	18
4.1.4 Test Data	19
4.2 Emissions in restricted frequency bands	20
4.2.1 Limit	20
4.2.2 Test Setup	22
4.2.3 Test Procedure	23
4.2.4 Test Data	24
4.3 Emissions in non-restricted frequency band	32

4.3.1	Limit	32
4.3.2	Test Setup	32
4.3.3	Test Procedure	32
4.3.4	Test Data	33
4.4	Duty cycle	34
4.4.1	Limit	34
4.4.2	Test Setup	34
4.4.3	Test Procedure	34
4.4.4	Test Data	35
4.5	Radiated Emission Band Edge	36
4.5.1	Limit	36
4.5.2	Test Setup	36
4.5.3	Test Procedure	36
4.5.4	Test Data	37
4.6	DTS Bandwidth	45
4.6.1	Limit	45
4.6.2	Test Setup	45
4.6.3	Test Procedure	45
4.6.4	Test Data	46
4.7	Fundamental emission output power	49
4.7.1	Limit	49
4.7.2	Test Setup	49
4.7.3	Test Procedure	50
4.7.4	Test Data	51
4.8	Power Density	52
4.8.1	Limit:	52
4.8.2	Test Setup	52
4.8.3	Test Procedure	52
4.8.4	Test Data	53
4.9	Antenna Requirement	55
4.9.1	Limit:	55
4.9.2	Antenna Connector Construction:	55
4.10	Test setup photo and EUT Photo	56

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Date(receive sample)	Mar. 24, 2020
Date (start test)	Mar. 25, 2020
Date (finish test)	Apr. 15, 2020

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
Tx	: Transmitter
Rx	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
2032140R-RF-US-P06V01	V1.0	Initial issue of report.	2020-08-26

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with Part 15 Subpart C Paragraph 15.247.
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result, unless the specification, standard or customer have special requirements.
4. The test results presented in this report relate only to the object tested.
5. The test results relate only to the samples tested.
6. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
7. This report will not be used for social proof function in China market.
8. DEKRA declines any responsibility with the following test data provided by customer that may affect the validity of result:
 - Chapter 1.1 General Description of the Item(s);
 - Chapter 1.2 Antenna Informaion;
 - Chapter 1.3 Channel List.

USED EQUIPMENT

AC Power Line Conducted Emission / TR1

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100906	2019.04.18	2020.04.17
Two-Line V-Network	R&S	ENV216	101189	2019.08.15	2020.08.14
Two-Line V-Network	R&S	ENV216	101044	2019.04.18	2020.04.17
50ohm Termination	SHX	TF2	7081402	2019.09.02	2020.09.01
50ohm Termination	SHX	TF2	7081403	2019.09.02	2020.09.01
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
Coaxial Cable	Huber+Suhner	RG 223	TR1-C1	2019.09.27	2020.09.26
Temperature/Humidity Meter	RTS	RTS-8S	TR1-TH	2019.08.23	2020.08.22
Dekra test software	Dekra	-	-	-	-

Emissions in non-restricted frequency bands/ Occupied Bandwidth/ Fundamental emission output power Power Spectral Density / TR8

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2019.08.15	2020.08.14
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2019.04.17	2020.04.16
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2019.08.15	2020.08.14
Temperature/Humidity Meter	Zhichen	ZC1-2	TR8-TH	2019.09.02	2020.09.01
Dekra test software	Dekra	-	-	-	-

Radiated Emission(30MHz-1GHz) / AC3

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100573	2019.12.28	2020.12.27
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2019.09.23	2020.09.22
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2020.04.05	2021.04.04
Temperature/Humidity Meter	RTS	RTS-8S	AC2-TH	2019.08.13	2020.08.12
Dekra test software	Dekra	-	-	-	-

Radiated Emission (1GHz-40GHz)/ AC5

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2019.04.17	2020.04.16
low Noise Amplifier	BXT	NA2651D	LNA17040209	2019.04.12	2020.04.11
Pre-Amplifier	EMCI	EMC184045SE	980263	2019.05.24	2020.05.23
DRG Horn Antenna	ETS-Lindgren	3117	167055	2019.08.06	2020.08.05
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2019.03.23	2021.03.22
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2020.04.05	2021.04.04
Coaxial Cable	ROSENBERGER	LA1-C011- 2000/3000	AC5-40G	2019.04.18	2020.04.17
Temperature/Humidity Meter	RTS	RTS-8S	AC5-TH	2019.08.13	2020.08.12
Dekra test software	Dekra	-	-	-	-

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%. The Uncertainties is comply with standard required as below.

Test item	Uncertainty
AC Power Line Conducted Emission	9kHz~150kHz: 2.80 dB 150kHz~30MHz: 2.40dB
Peak Power Output	± 1.27 dB
Radiated Emission(30MHz~1GHz)	Horizontal: 30MHz~200MHz: 3.50 dB 300MHz~1GHz: 3.60 dB Vertical: 30MHz~200MHz: 3.60 dB 300MHz~1GHz: 3.50 dB
Radiated Emission(1GHz~26.5GHz)	Horizontal: 1GHz~18GHz: 5.00 dB Vertical: 1GHz~18GHz: 4.80 dB
RF antenna conducted test	± 1.27 dB
Radiated Emission Band Edge	± 3.9 dB
DTS Bandwidth	± 150 Hz
Occupied Bandwidth	± 1 kHz
Power Density	± 1.27 dB

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

Product Name	Remote Controller
Model No.	GB346WJSA
Trademark	SHARP
Manufacturer	Yan Tai FuHuaDa Precision Electronics Co., Ltd.
Manufacturer Address	A-7 Section, Yantai Economic & Technological Development Area, Shan Dong

Wireless specification	Bluetooth 5.0				
Operating frequency range(s)	2400~2480 MHz				
Type of Modulation	GFSK				
Number of channel	40				
Channel Separation	2 MHz				
PHYs	☒	LE 1M	☐	LE 2M	☐ LE Coded S=2/8
Data Rate	☒	1 Mbps	☐	2 Mbps	☐ 500/125 Kbps

Rated power supply	Voltage and Frequency	
	☐	AC: 220 – 240 V, 50/60 Hz
	☐	AC: 100 – 120 V, 50/60 Hz
	☐	DC: 15~24Vdc
	☒	Battery: 3 Vdc
Mounting position	☐	Table top equipment
	☐	Wall/Ceiling mounted equipment
	☐	Floor standing equipment
	☒	Hand-held equipment
	☐	Other: Outdoor equipment

1.2 Antenna Information

Antenna model / type number	N/A			
Antenna serial number	N/A			
Antenna Delivery	☒	1TX + 1RX		
	☐	2TX + 2RX		
Antenna technology.....	☒	SISO		
	☐	MIMO	☐	CDD
			☐	Beam-forming
Antenna Type	☐	External	☐	Dipole
			☐	Sectorized
	☒	Internal	☐	PIFA
			☒	PCB
			☐	Ceramic Chip
			☐	Others.....
Antenna Gain	0.72 dBi			

1.3 Channel List

Bluetooth Working Frequency of Each Channel:							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz	03	2408 MHz
04	2410 MHz	05	2412 MHz	06	2414 MHz	07	2416 MHz
08	2418 MHz	09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz	15	2432 MHz
16	2434 MHz	17	2436 MHz	18	2438 MHz	19	2440 MHz
20	2442 MHz	21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz	27	2456 MHz
28	2458 MHz	29	2460 MHz	30	2462 MHz	31	2464 MHz
32	2466 MHz	33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz	39	2480 MHz

Note: The general description of the Item(s), antenna information and channel list in clause 1 are provided and confirmed by the client.

2 DESCRIPTION OF TEST SETUP

2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.


Test Mode For Bluetooth	Mode 1: Transmit by LE_1Mbps
-------------------------	------------------------------

2.2 Auxiliary equipment / Test software for the EUT

Auxiliary equipment	Type / Version	Manufacturer	Supplied by
-	-	-	-
software	Type / Version	Manufacturer	Supplied by
-	-	-	-

2.3 Test Configuration / Block diagram used for tests

Test setup Diagram- Radiated test

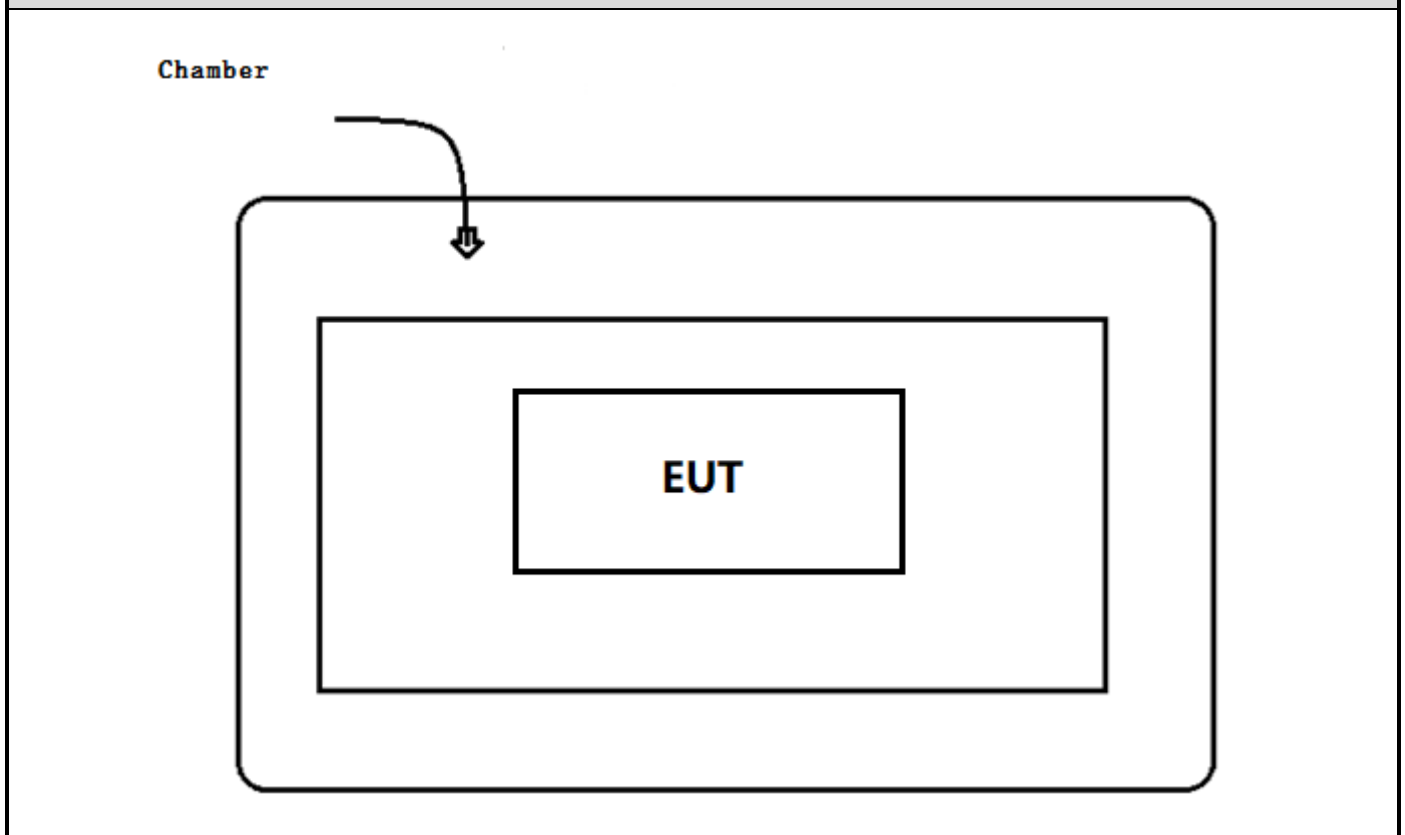

2.4 Testing process

1	Setup the EUT as shown in Section 2.3.
2	Configure the test channel.
3	Verify that the EUT works properly.

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
FCC CFR Title 47 Part 15 Subpart C Section 15.247	2020	Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 v05r02	2019	Guidance for performing compliance measurements on Digital Transmission System (DTS) operating under section 15.247

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

(Please define the deviations from the standard(s) if applicable)

3.3 Overview of results

Requirement – Test case	Basic standard(s)	Verdict	Remark
AC Power Line Conducted Emission	FCC 15.207	N/A	
Emissions in restricted frequency bands	FCC 15.247(b)(3)	PASS	---
Emissions in non-restricted frequency bands	FCC 15.247(d), FCC 15.209	PASS	---
Radiated Emission Band Edge	FCC 15.247(d)	PASS	---
Fundamental emission output power	FCC 15.247(d), FCC 15.209	PASS	---
DTS Bandwidth	FCC 15.247(a)(2)	PASS	---
Power Spectral Density	FCC 15.247(e)	PASS	---
Antenna Requirement	FCC 15.203	PASS	---

3.4 Test Facility

USA : FCC Designation Number: CN1199

4 TEST RESULTS

4.1 AC Power Line Conducted Emission

VERDICT: N/A

4.1.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.207	
Frequency range [MHz]	Limit: QP [dB(μV) ¹⁾]	Limit: AV [dB(μV) ¹⁾]
0,15 - 0,50	66 - 56 ²⁾	56 - 46 ²⁾
0,50 - 5,0	56	46
5,0 - 30	60	50


¹⁾ At the transition frequency, the lower limit applies.

²⁾ The limit decreases linearly with the logarithm of the frequency.

NOTE 1: The exclusion band for transmitters shall be considered for transmitters operating at frequencies below 30 MHz.

NOTE 2: Where the AC output port is directly connected (or via a circuit breaker) to the AC power input port of the EUT the AC power output port need not to be tested.

4.1.2 Test Setup

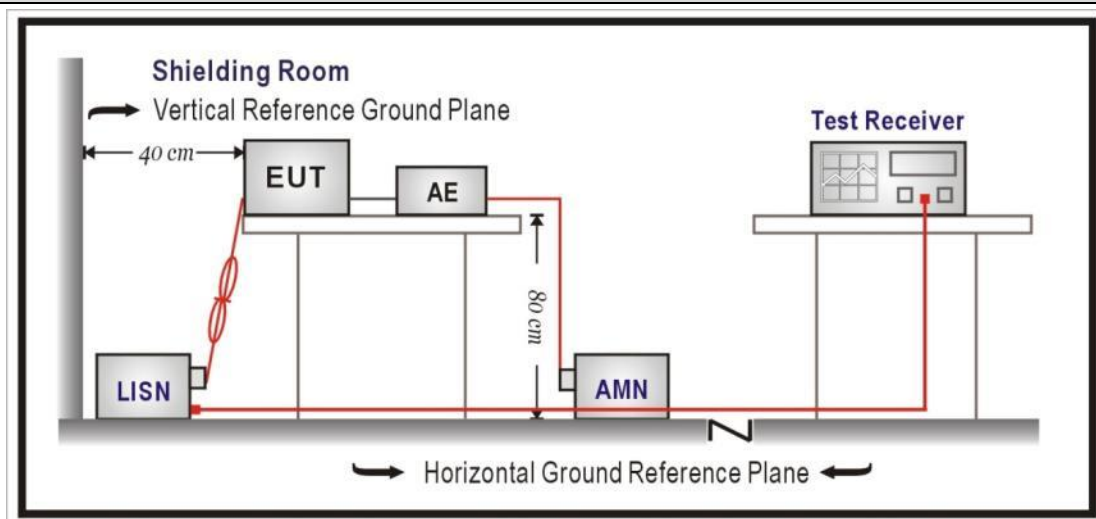

4.1.3 Test Procedure

	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices

4.1.4 Test Data

Note: The EUT is powered by battery, so this test item is not applicable.

4.2 Emissions in restricted frequency bands**VERDICT: PASS****4.2.1 Limit****Standard**

FCC Part 15 Subpart C Paragraph 15.209

Restricted Bands of operation

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

Restricted Band Emissions Limit

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Field strength (dB $\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)


Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment.


Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.2.2 Test Setup


Below 30MHz Test Setup:

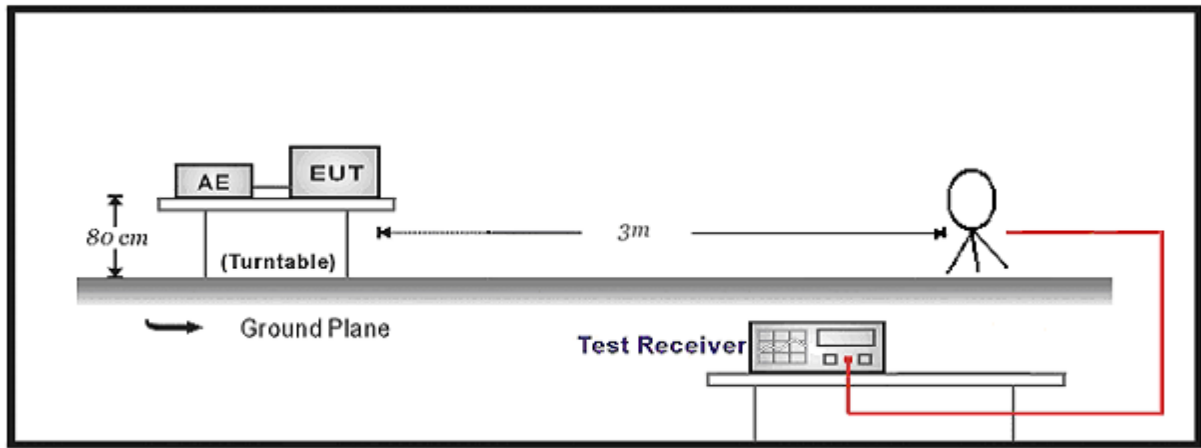

30MHz-1GHz Test Setup:

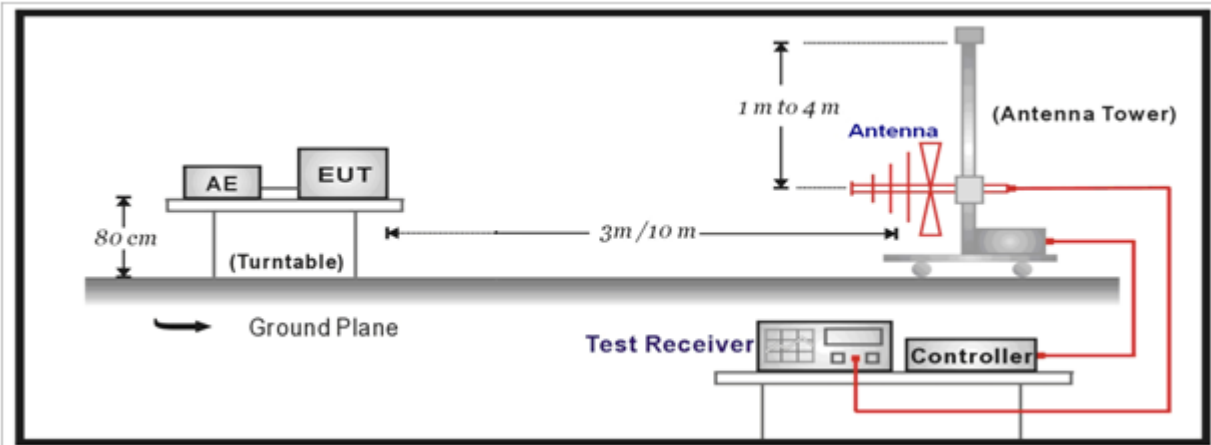

Above 1GHz Test Setup:

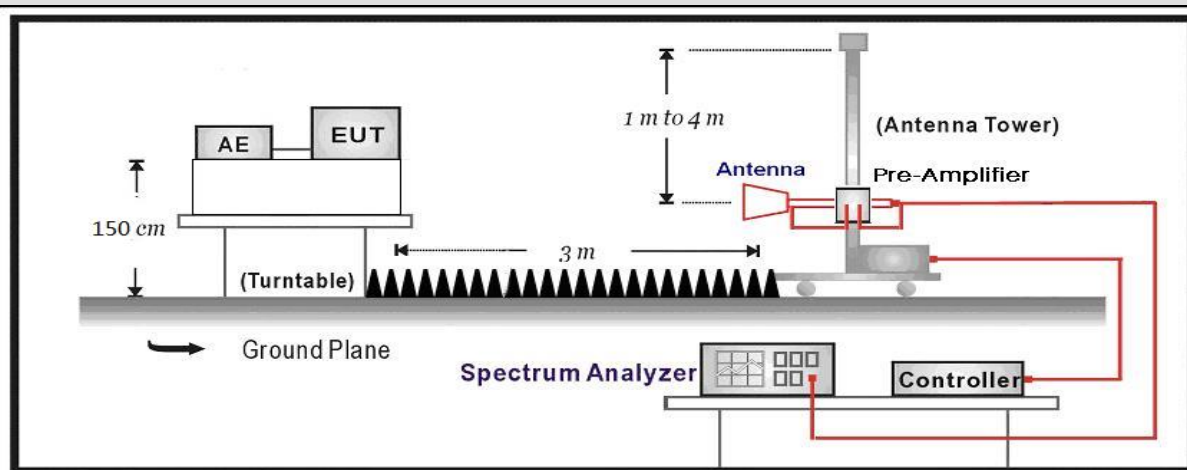

4.2.3 Test Procedure

	References Rule		Chapter	Description
☒	ANSI C63.10		11.12	Emissions in restricted frequency bands
	☒	ANSI C63.10	11.12.1	Radiated emission measurements
	☒	ANSI C63.10	11.12.2.7	Radiated spurious emission test
	☒	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
	☒	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
	☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz

4.2.4 Test Data

Engineer: Pawn

Site: AC5

Time: 2020/04/08 - 21:05

Limit: FCC_Part15.209_RE(3m)

Margin: 0


Probe: Horn_3117_00167055(1-18GHz)

Polarity: Horizontal

EUT: Remote Controller

Power: DC 3V

Note: Mode1:Transmit at 2402MHz

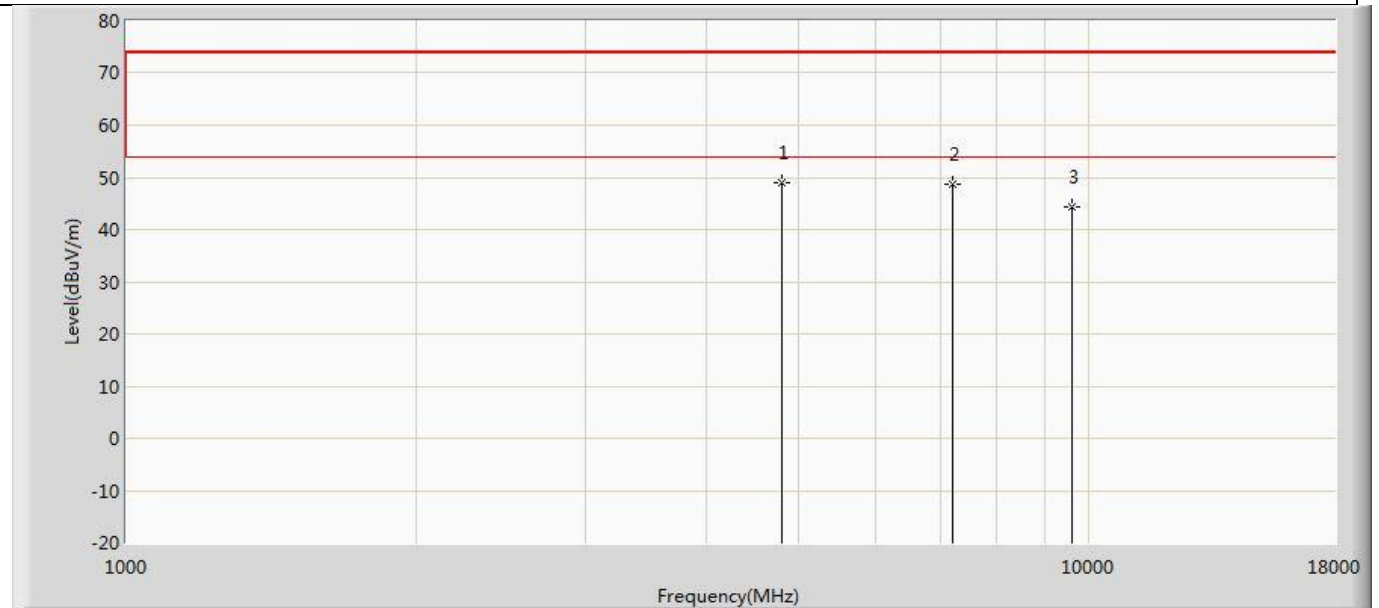

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	4804.000	49.110	44.190	-24.890	74.000	4.920	PK
2		7206.000	48.766	41.447	-25.234	74.000	7.319	PK
3		9608.000	44.391	35.735	-29.609	74.000	8.657	PK

Engineer: Pawn

Site: AC5

Time: 2020/04/08 - 21:05

Limit: FCC_Part15.209_RE(3m)

Margin: 0


Probe: Horn_3117_00167055(1-18GHz)

Polarity: Vertical

EUT: Remote Controller

Power: DC 3V

Note: Mode1:Transmit at 2402MHz

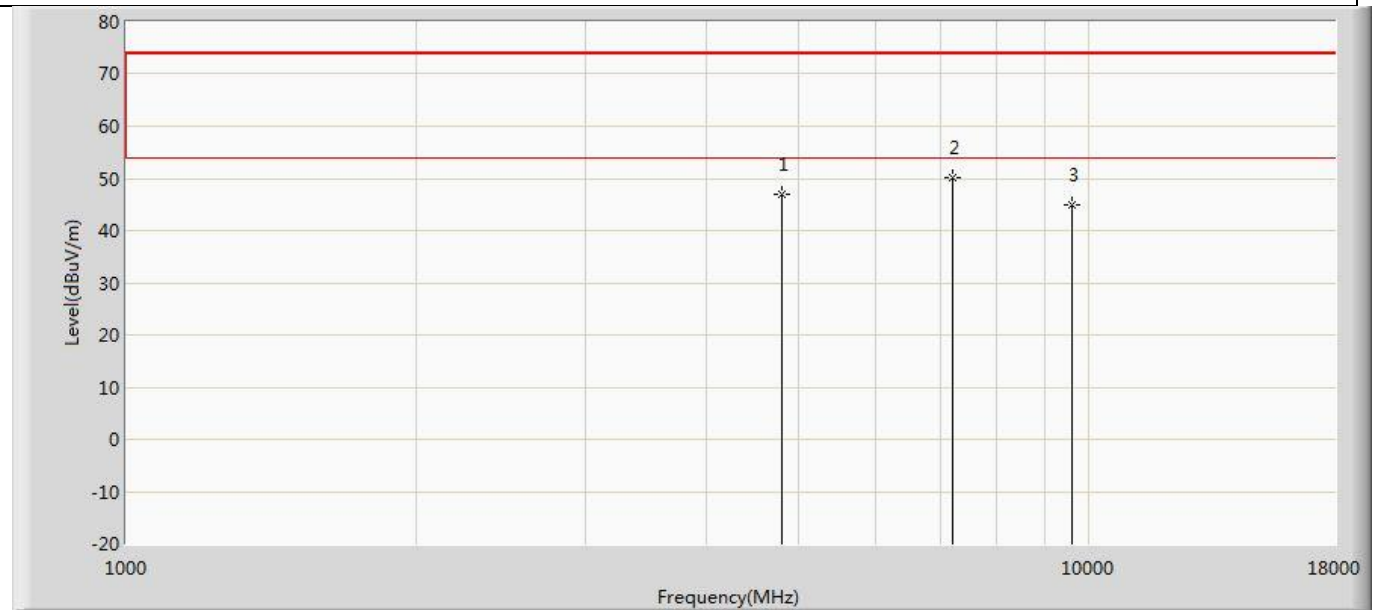

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	47.080	42.160	-26.920	74.000	4.920	PK
2	*	7206.000	50.141	42.822	-23.859	74.000	7.319	PK
3		9608.000	45.023	36.367	-28.977	74.000	8.657	PK

Engineer: Pawn

Site: AC5

Time: 2020/04/08 - 21:05

Limit: FCC_Part15.209_RE(3m)

Margin: 0


Probe: Horn_3117_00167055(1-18GHz)

Polarity: Horizontal

EUT: Remote Controller

Power: DC 3V

Note: Mode1:Transmit at 2440MHz

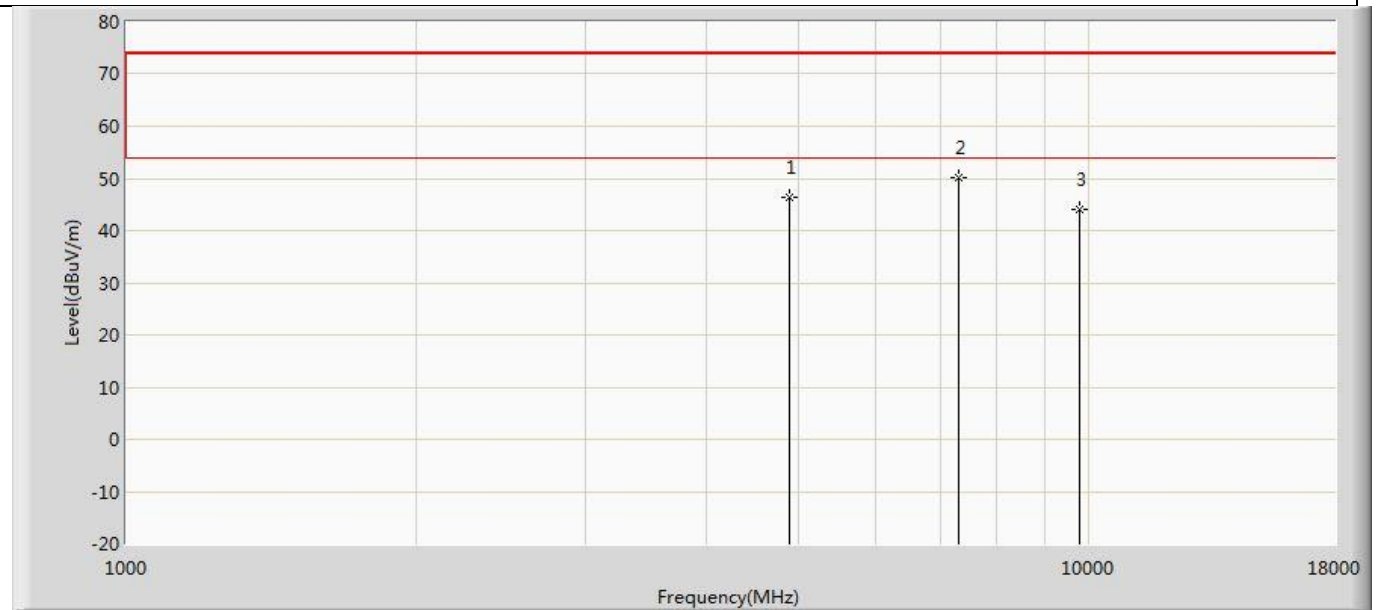

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	46.309	41.449	-27.691	74.000	4.859	PK
2	*	7320.000	50.076	42.578	-23.924	74.000	7.499	PK
3		9760.000	44.202	36.117	-29.798	74.000	8.085	PK

Engineer: Pawn

Site: AC5

Time: 2020/04/08 - 21:05

Limit: FCC_Part15.209_RE(3m)

Margin: 0


Probe: Horn_3117_00167055(1-18GHz)

Polarity: Vertical

EUT: Remote Controller

Power: DC 3V

Note: Mode1:Transmit at 2440MHz

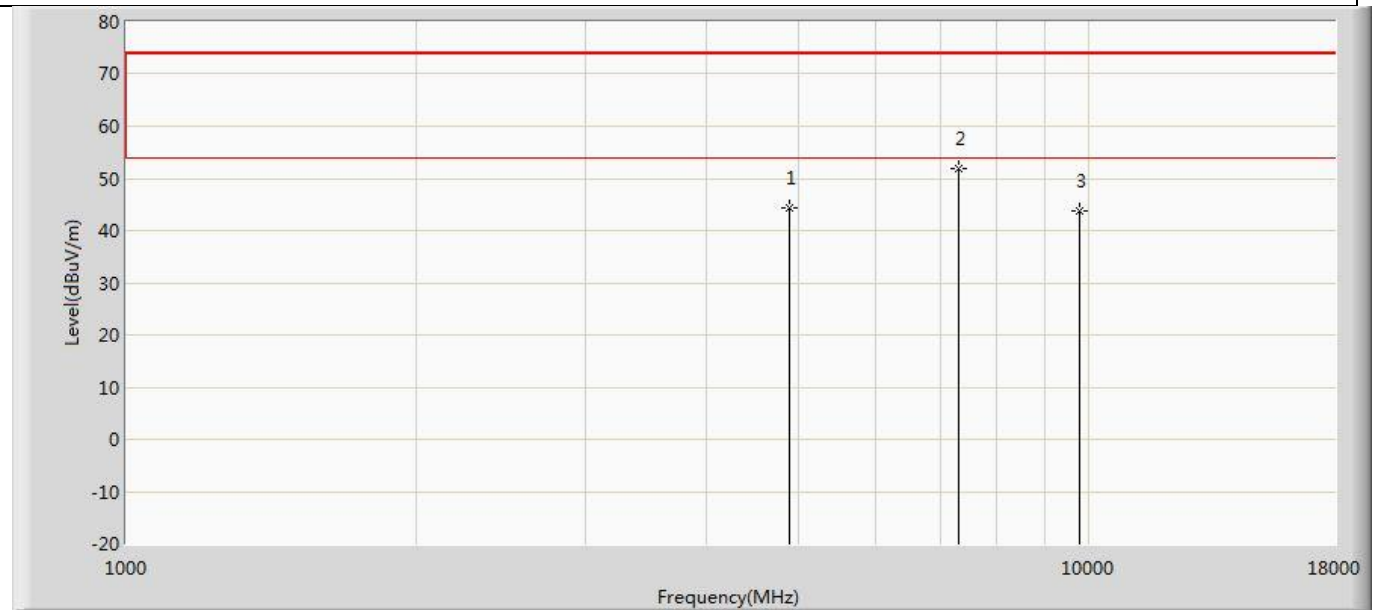

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	44.371	39.511	-29.629	74.000	4.859	PK
2	*	7320.000	51.841	44.343	-22.159	74.000	7.499	PK
3		9760.000	43.770	35.685	-30.230	74.000	8.085	PK

Engineer: Pawn

Site: AC5

Time: 2020/04/08 - 21:05

Limit: FCC_Part15.209_RE(3m)

Margin: 0


Probe: Horn_3117_00167055(1-18GHz)

Polarity: Horizontal

EUT: Remote Controller

Power: DC 3V

Note: Mode1:Transmit at 2480MHz

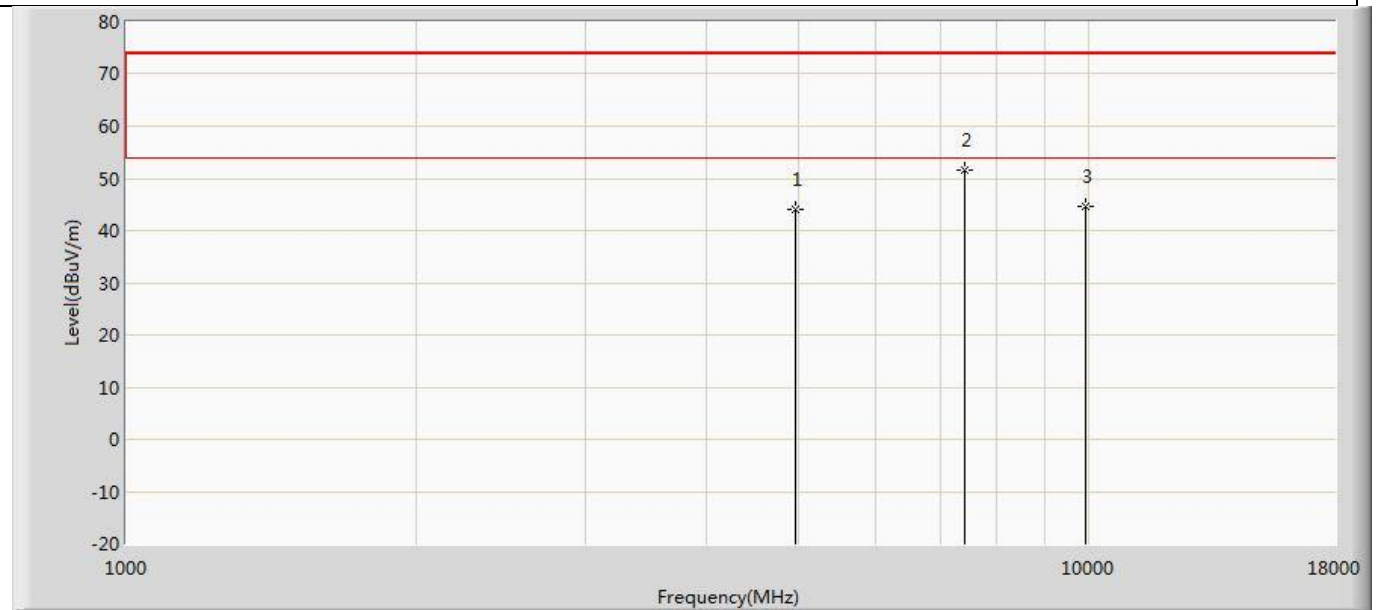

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	43.915	39.219	-30.085	74.000	4.695	PK
2	*	7440.000	51.509	43.425	-22.491	74.000	8.085	PK
3		9920.000	44.691	35.850	-29.309	74.000	8.840	PK

Engineer: Pawn

Site: AC5

Time: 2020/04/08 - 21:05

Limit: FCC_Part15.209_RE(3m)

Margin: 0


Probe: Horn_3117_00167055(1-18GHz)

Polarity: Vertical

EUT: Remote Controller

Power: DC 3V


Note: Mode1:Transmit at 2480MHz

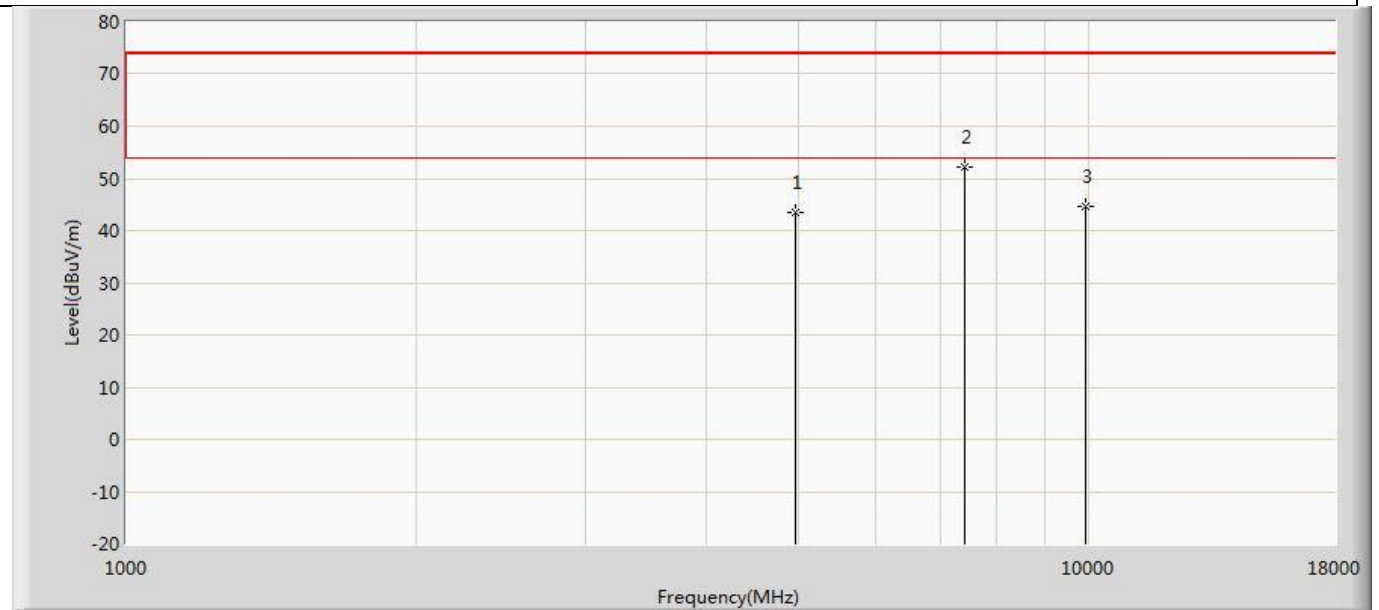

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	43.608	38.912	-30.392	74.000	4.695	PK
2	*	7440.000	52.305	44.221	-21.695	74.000	8.085	PK
3		9920.000	44.646	35.805	-29.354	74.000	8.840	PK

The worst case of Radiated Emission below 1GHz:

Engineer: Pawn	
Site: AC3	Time: 2020/04/08 - 20:00
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC3_3m (30-1000MHz)	Polarity: Horizontal
EUT: Remote Controller	Power: DC 3V
Note: Mode1:Transmit	

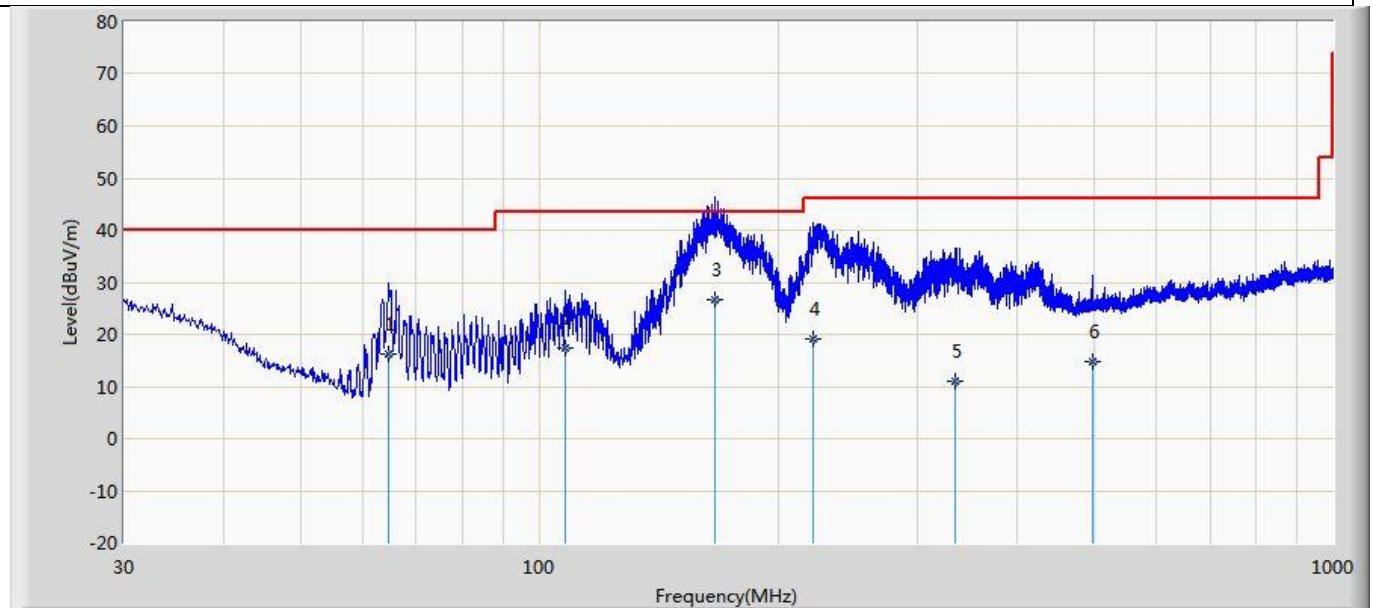

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		64.677	16.334	6.510	-23.666	40.000	9.824	QP
2		107.721	17.443	1.380	-26.057	43.500	16.063	QP
3	*	166.649	26.653	9.170	-16.847	43.500	17.483	QP
4		221.454	19.049	0.886	-26.951	46.000	18.164	QP
5		334.823	11.117	-11.980	-34.883	46.000	23.097	QP
6		497.540	14.716	-12.100	-31.284	46.000	26.816	QP

Engineer: Pawn

Site: AC3

Time: 2020/04/08 - 20:03

Limit: FCC_Part15.209_RE(3m)

Margin: 0


Probe: AC3_3m (30-1000MHz)

Polarity: Vertical

EUT: Remote Controller

Power: DC 3V

Note: Mode1:Transmit

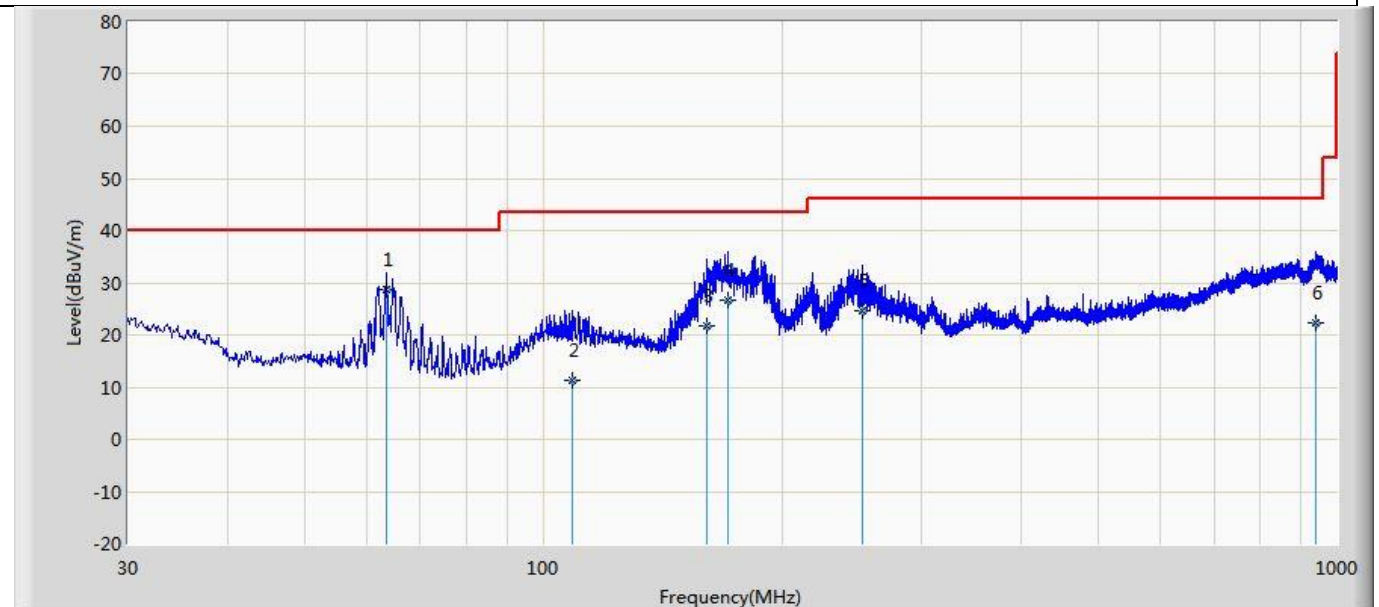

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	63.465	28.617	12.730	-11.383	40.000	15.887	QP
2		109.055	11.316	-10.220	-32.184	43.500	21.535	QP
3		160.829	21.877	3.250	-21.623	43.500	18.627	QP
4		170.893	26.648	8.710	-16.852	43.500	17.938	QP
5		252.736	24.600	1.380	-21.400	46.000	23.220	QP
6		942.164	22.213	-12.080	-23.787	46.000	34.293	QP

Note:


1. " * ", means this data is the worst emission level.
2. Measured Level = Reading Level + Factor(Probe+Cable-Amp).
3. The test frequency range, 9kHz~30MHz, 18GHz~26GHz, both of the worst case are at least 20dB below the limits, therefore no data appear in the report.
4. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
5. As the radiated emission was performed, so conducted emission was not tested.

4.3 Emissions in non-restricted frequency band**VERDICT: PASS****4.3.1 Limit**

Standard	FCC Part 15 Subpart C Paragraph 15.247(d)
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30dBc(Note1)
RF Output power(PK detector)	20dBc(Note2)

Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).

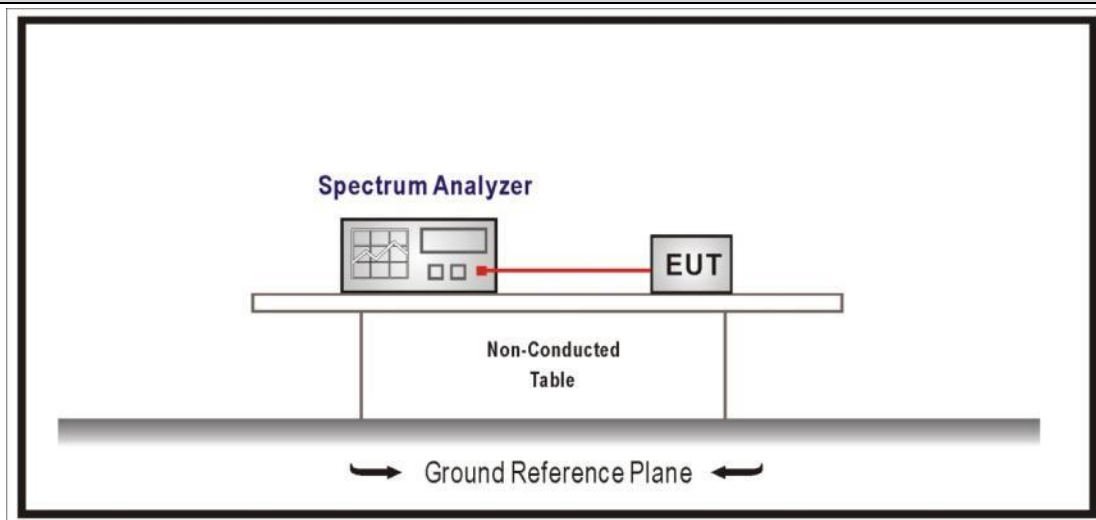
4.3.2 Test Setup**4.3.3 Test Procedure**

References Rule	Chapter	Description
☒ ANSI C63.10	11.11	Emissions in non-restricted frequency bands
☒ ANSI C63.10	11.11.1	General
☒ ANSI C63.10	11.11.2	Reference level measurement
☒ ANSI C63.10	11.11.3	Emission level measurement


4.3.4 Test Data

Mode	Channel	Test Frequency (MHz)	Maximum In-Band PSD[a] (dBm/100kHz)	Frequency (MHz)	Out-Band PSD[b] (dBm/100kHz)	[a]-[b] (dB)	Limit (dB)	Result
Mode 1	00	2402	4.612	2400	-42.837	47.449	>20	Pass
	39	2480	4.907	2500	-55.312	60.219	>20	Pass

CH00(2402MHz)

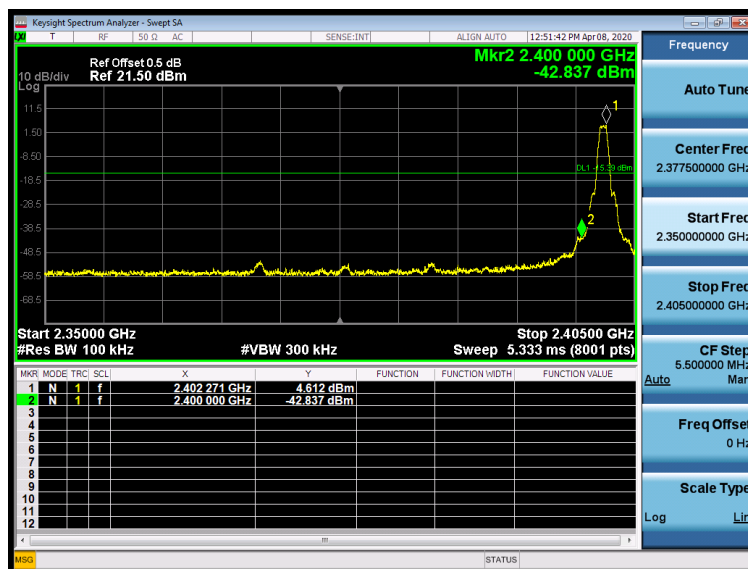


CH39(2480MHz)

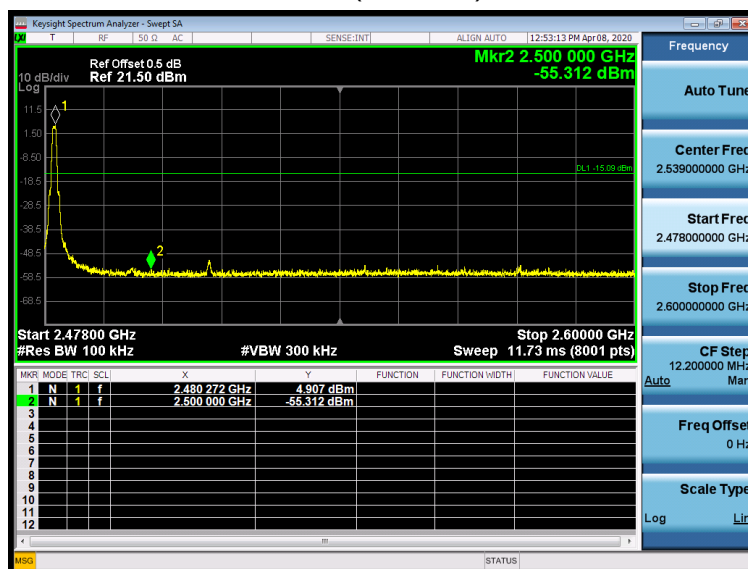

4.4 Duty cycle**VERDICT:** N/A**4.4.1 Limit**

N/A

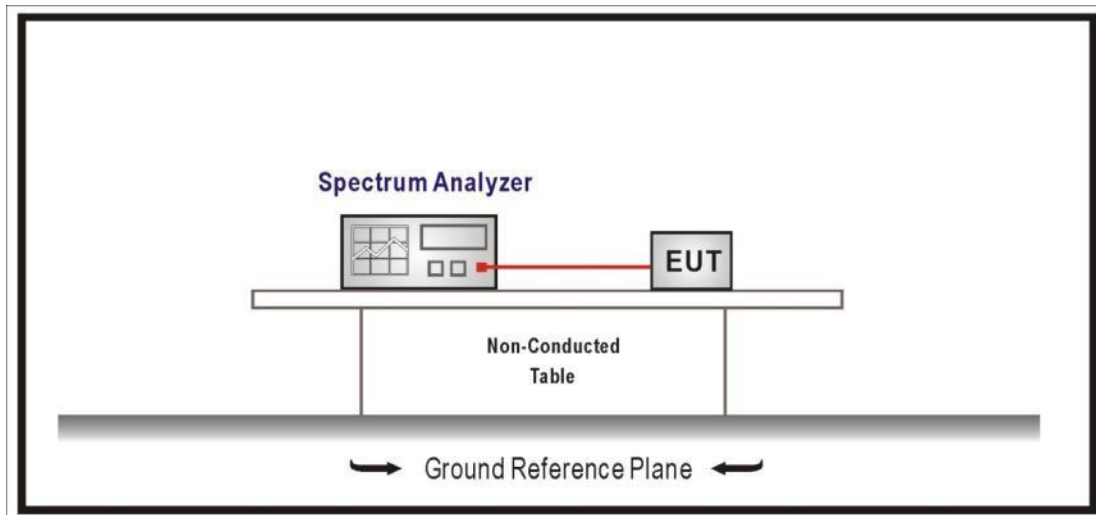4.4.2 Test Setup**4.4.3 Test Procedure**

References Rule		Chapter	Description
☒	ANSI C63.10	11.6	Duty cycle (D), transmission duration (T), and maximum power control level


4.4.4 Test Data

Test Mode	Tx On (ms)	Tx Off (ms)	VBW	Tx On + Tx Off (ms)	Duty Cycle
Mode 1	N/A	N/A	10 Hz	N/A	100%

Note 1: T means the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Note 2: According to KDB 558074, when test for Radiated Emission Band Edge and Radiated Emission, for average detector set: $VBW \geq 1/T$ will be used.

Mode 1

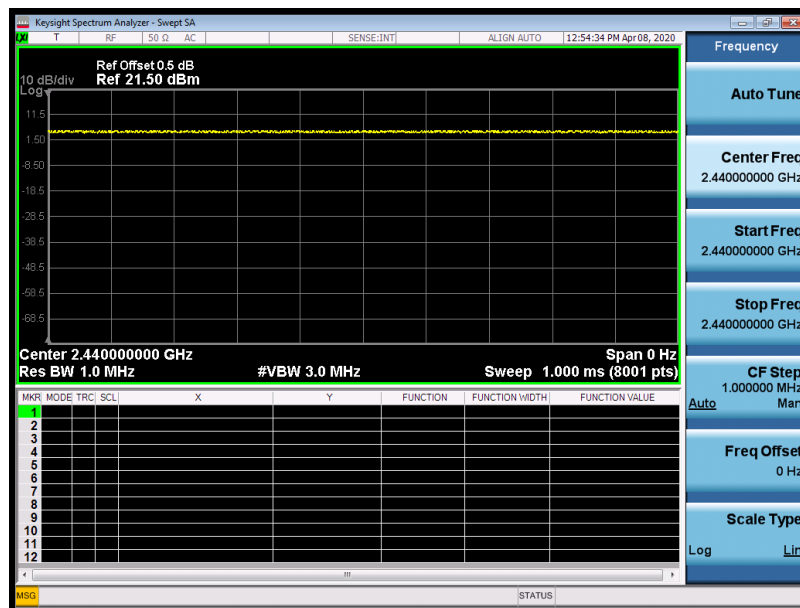


4.5 Radiated Emission Band Edge**VERDICT: PASS****4.5.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.247(d) , 15.209		
Frequency bands (MHz)	Detector	Limit (dB μ V/m)	RBW (MHz)	Distance (m)
2310-2390	PK	74	1	3
2483.5-2500	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

4.5.2 Test Setup

Above 1GHz Test Setup:

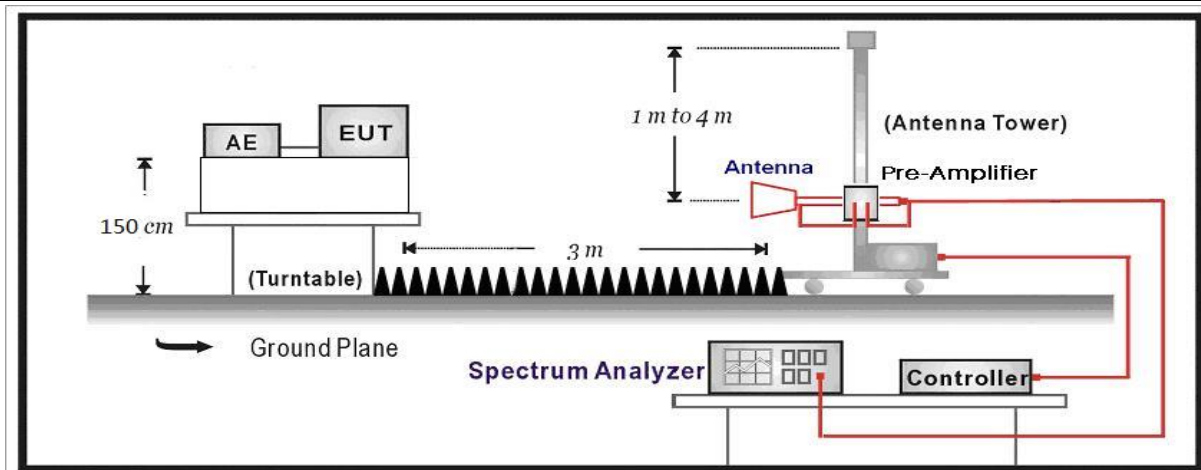**4.5.3 Test Procedure**

	References Rule	Chapter	Description
☒	ANSI C63.10	6.10	Band-edge testing
☒	☒ ANSI C63.10	6.10.5	Restricted-band band-edge measurements
☐	☐ ANSI C63.10	6.10.6	Marker-delta method
☒	ANSI C63.10	11.12	Emissions in restricted frequency bands
☒	☒ ANSI C63.10	11.12.1	Radiated emission measurements
☒	☒ ANSI C63.10	11.12.2.7	Radiated spurious emission test
☐	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
☐	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz

4.5.4 Test Data

Engineer: Pawn

Site: AC5

Time: 2020/04/08 - 20:17

Limit: FCC_Part15.209_RE(3m)

Margin: 0


Probe: Horn_3117_00167055(1-18GHz)

Polarity: Horizontal

EUT: Remote Controller

Power: DC 3V

Note: Mode1:Transmit at 2402MHz

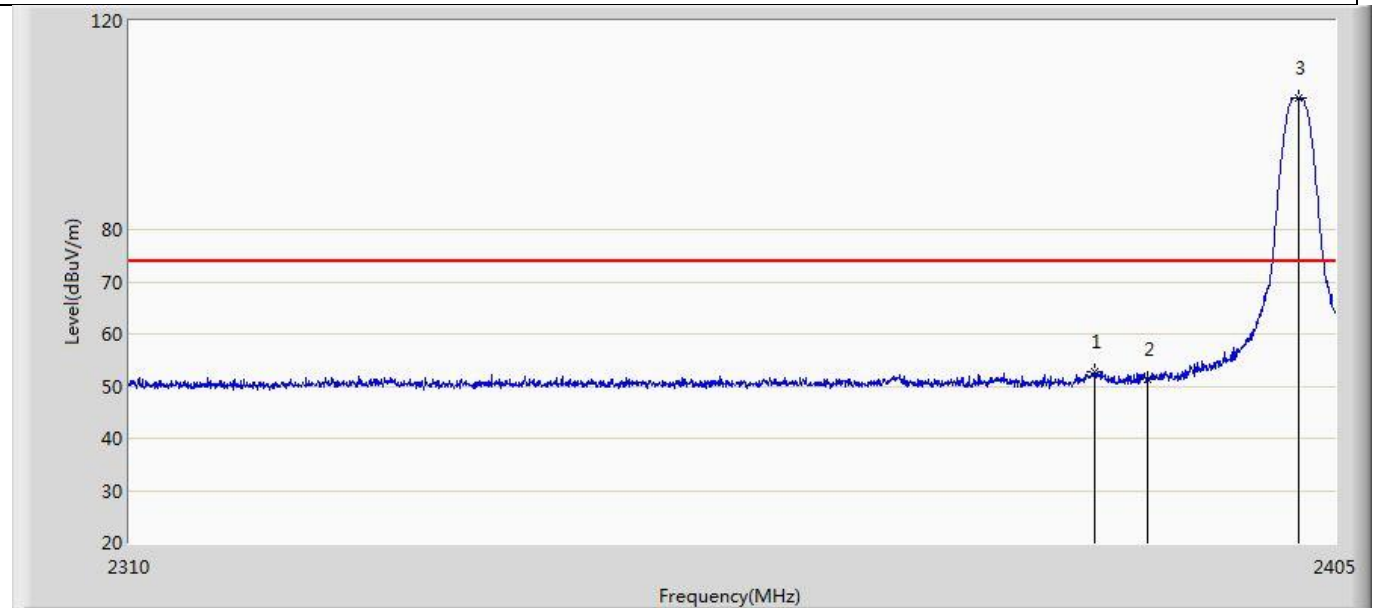

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2385.715	52.773	17.318	-21.227	74.000	35.454	PK
2		2390.000	51.205	15.748	-22.795	74.000	35.458	PK
3	*	2402.055	105.079	69.609	31.079	74.000	35.469	PK

Engineer: Pawn

Site: AC5

Time: 2020/04/08 - 20:30

Limit: FCC_Part15.209_RE(3m)

Margin: 0


Probe: Horn_3117_00167055(1-18GHz)

Polarity: Horizontal

EUT: Remote Controller

Power: DC 3V

Note: Mode1:Transmit at 2402MHz

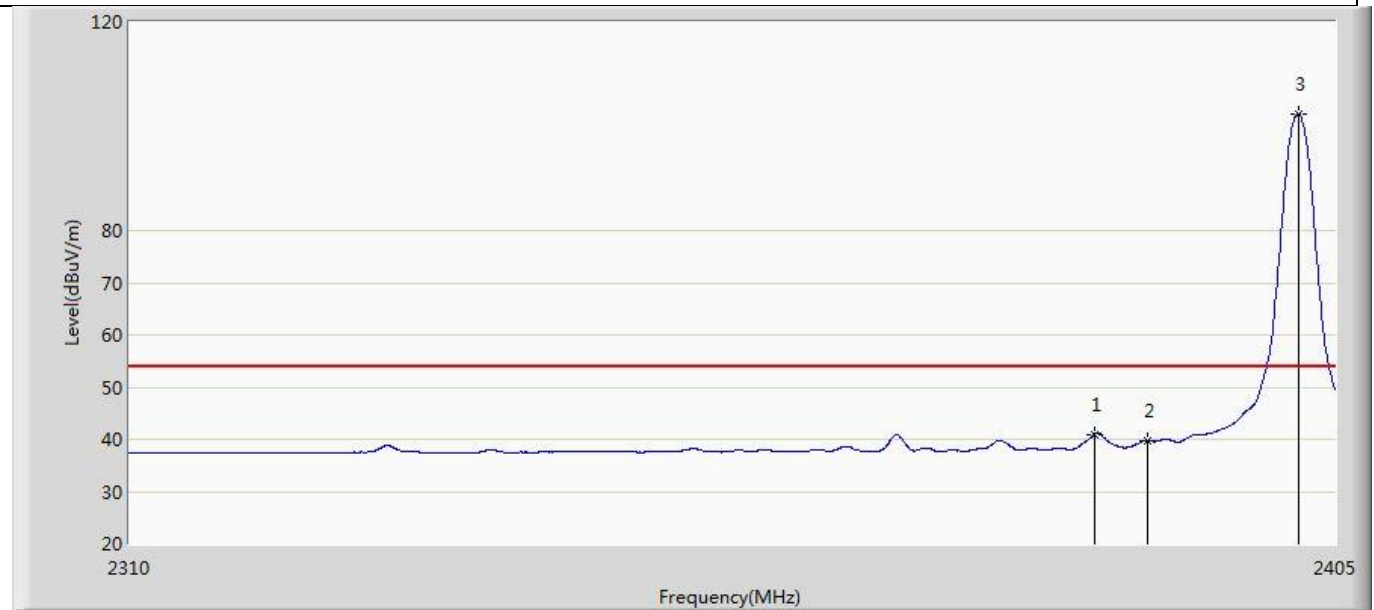

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2385.762	40.998	5.543	-13.002	54.000	35.455	AV
2		2390.000	39.734	4.277	-14.266	54.000	35.458	AV
3	*	2402.055	102.332	66.862	48.332	54.000	35.469	AV

Engineer: Pawn

Site: AC5

Time: 2020/04/08 - 20:33

Limit: FCC_Part15.209_RE(3m)

Margin: 0


Probe: Horn_3117_00167055(1-18GHz)

Polarity: Vertical

EUT: Remote Controller

Power: DC 3V

Note: Mode1:Transmit at 2402MHz

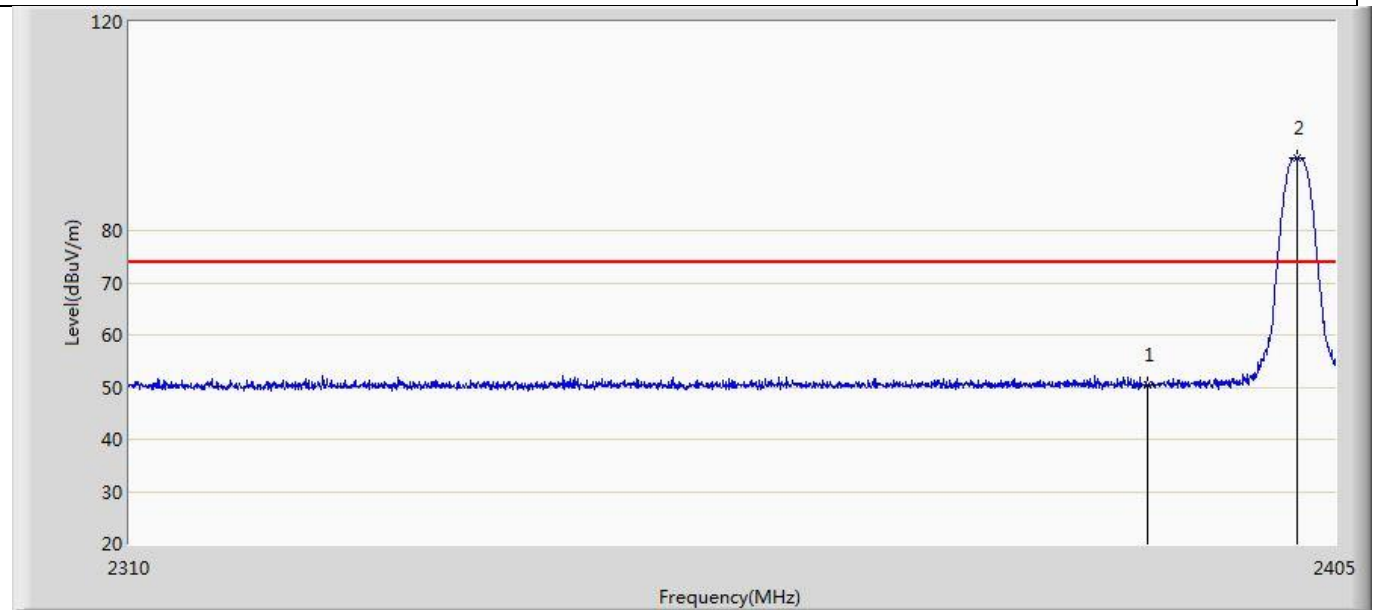

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.311	14.854	-23.689	74.000	35.458	PK
2	*	2401.913	93.796	58.327	19.796	74.000	35.469	PK

Engineer: Pawn

Site: AC5

Time: 2020/04/08 - 20:35

Limit: FCC_Part15.209_RE(3m)

Margin: 0


Probe: Horn_3117_00167055(1-18GHz)

Polarity: Vertical

EUT: Remote Controller

Power: DC 3V

Note: Mode1:Transmit at 2402MHz

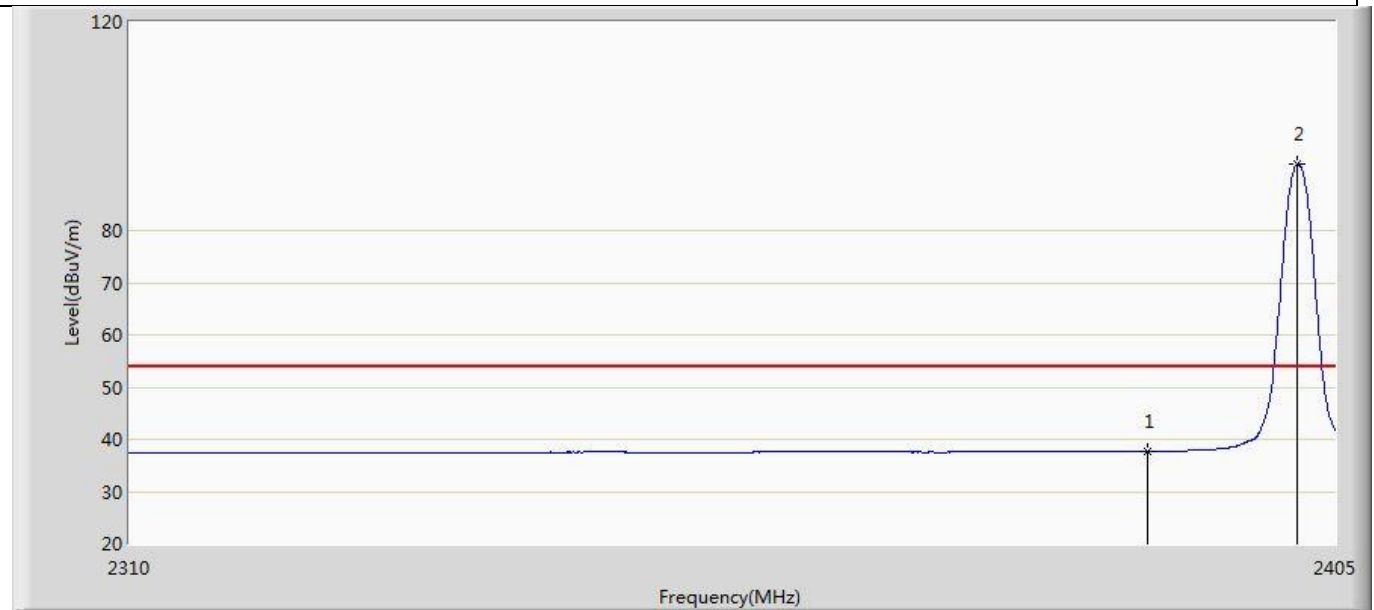

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	37.709	2.252	-16.291	54.000	35.458	AV
2	*	2401.913	92.680	57.211	38.680	54.000	35.469	AV

Engineer: Pawn

Site: AC5

Time: 2020/04/08 - 20:37

Limit: FCC_Part15.209_RE(3m)

Margin: 0


Probe: Horn_3117_00167055(1-18GHz)

Polarity: Horizontal

EUT: Remote Controller

Power: DC 3V

Note: Mode1:Transmit at 2480MHz

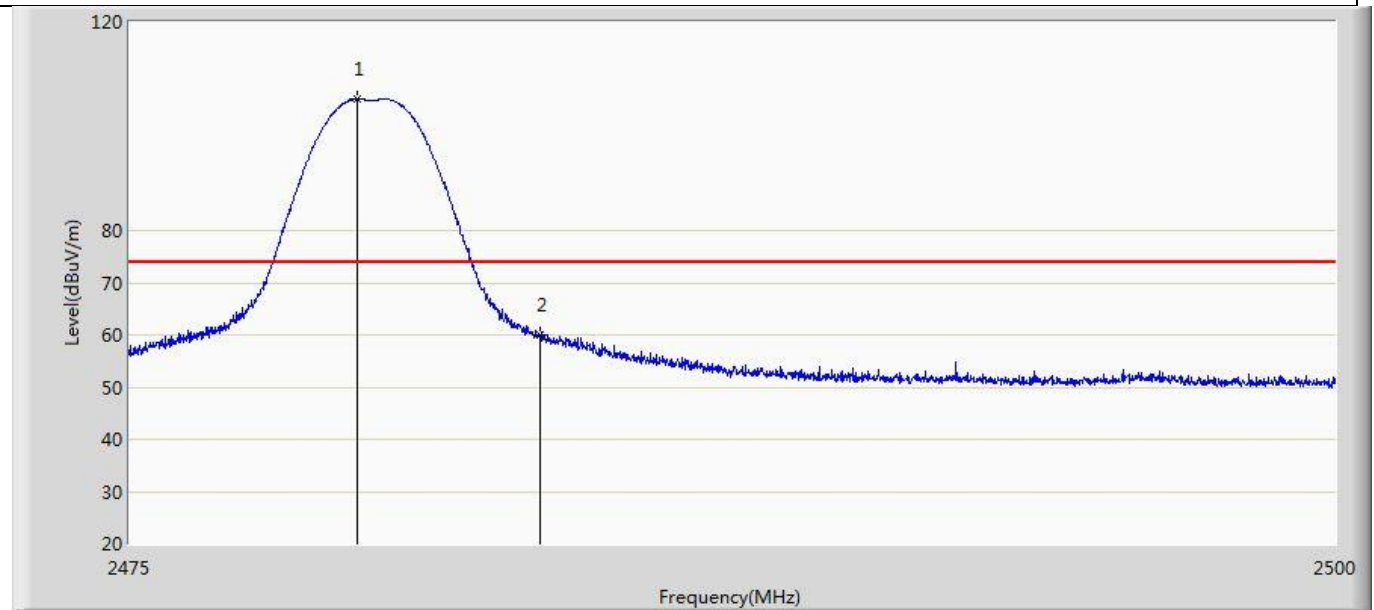

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.700	105.123	69.627	31.123	74.000	35.496	PK
2		2483.500	59.860	24.342	-14.140	74.000	35.517	PK

Engineer: Pawn

Site: AC5

Time: 2020/04/08 - 20:40

Limit: FCC_Part15.209_RE(3m)

Margin: 0


Probe: Horn_3117_00167055(1-18GHz)

Polarity: Horizontal

EUT: Remote Controller

Power: DC 3V

Note: Mode1:Transmit at 2480MHz

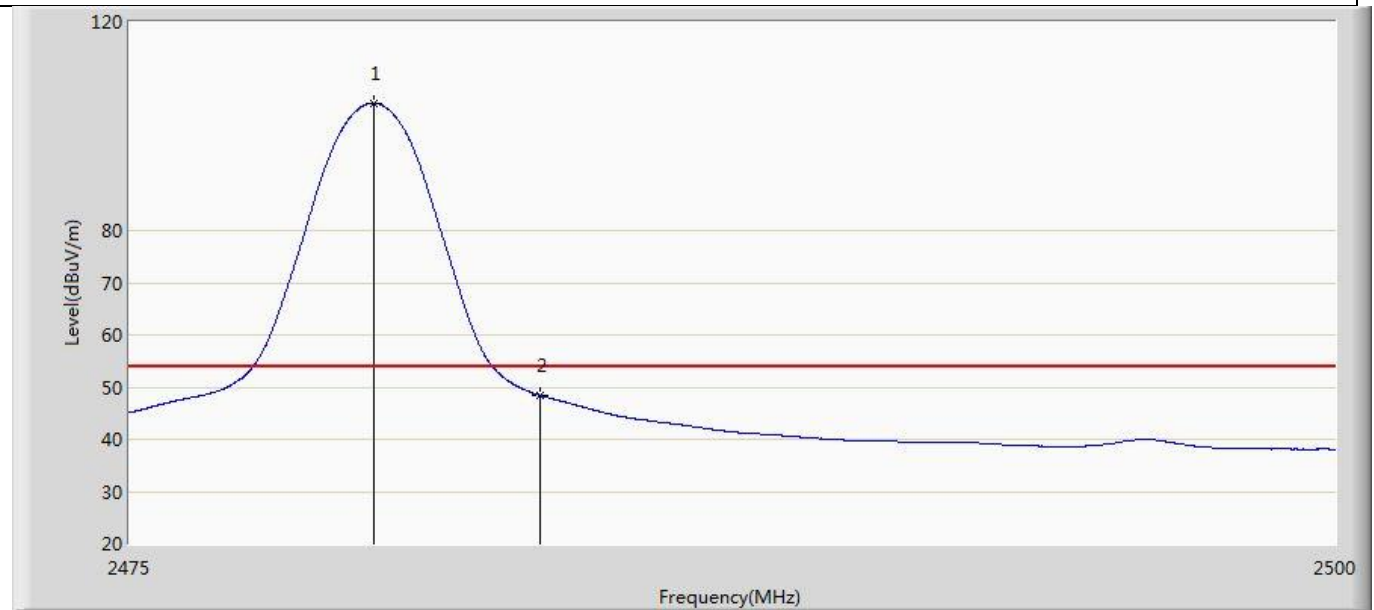

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.050	104.402	68.904	50.402	54.000	35.498	AV
2		2483.500	48.399	12.881	-5.601	54.000	35.517	AV

Engineer: Pawn

Site: AC5

Time: 2020/04/08 - 20:42

Limit: FCC_Part15.209_RE(3m)

Margin: 0


Probe: Horn_3117_00167055(1-18GHz)

Polarity: Vertical

EUT: Remote Controller

Power: DC 3V

Note: Mode1:Transmit at 2480MHz

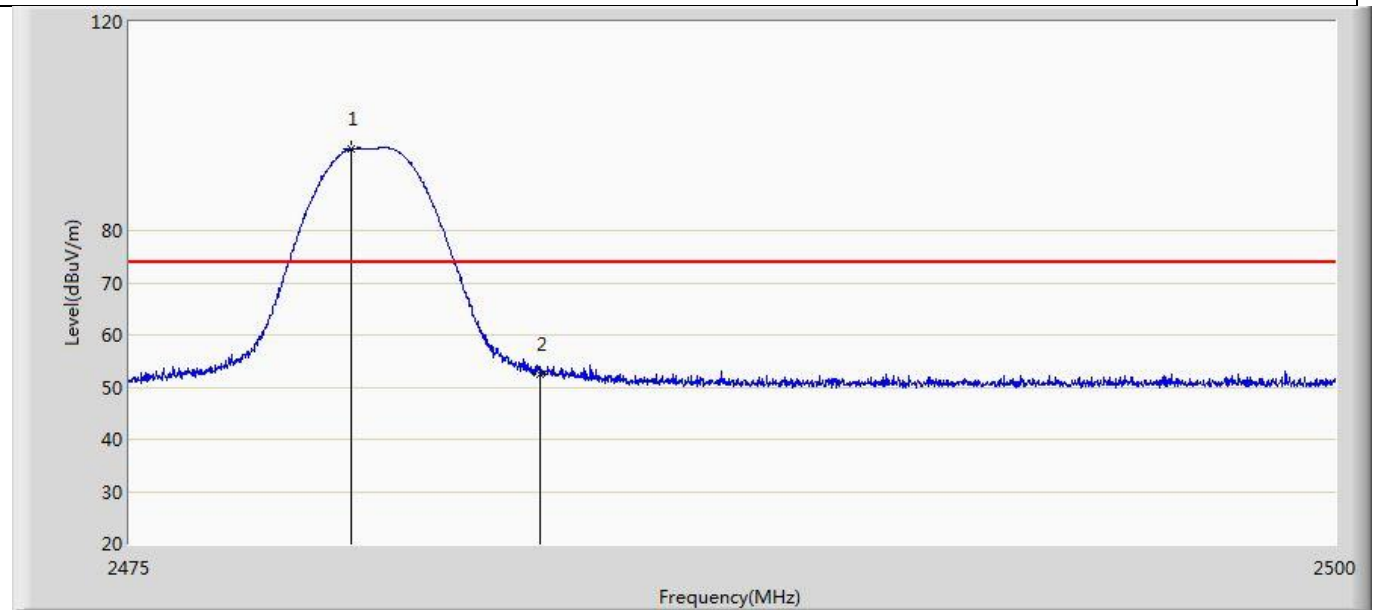

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.587	95.628	60.133	21.628	74.000	35.496	PK
2		2483.500	52.578	17.060	-21.422	74.000	35.517	PK

Engineer: Pawn

Site: AC5

Time: 2020/04/08 - 20:45

Limit: FCC_Part15.209_RE(3m)

Margin: 0


Probe: Horn_3117_00167055(1-18GHz)

Polarity: Vertical

EUT: Remote Controller

Power: DC 3V

Note: Mode1:Transmit at 2480MHz

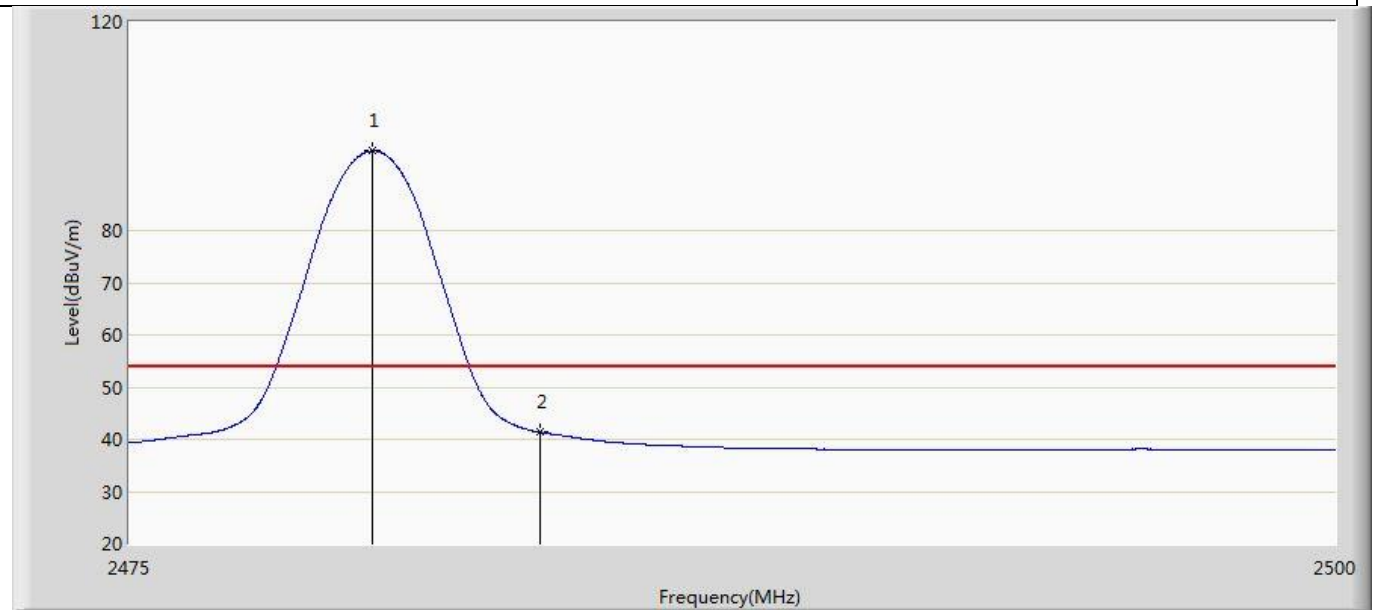

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.012	95.244	59.746	41.244	54.000	35.498	AV
2		2483.500	41.326	5.808	-12.674	54.000	35.517	AV


Note:

1. Measured Level = Reading Level + Factor.
2. As the radiated emission was performed, so conducted emission was not tested.

4.6 DTS Bandwidth**VERDICT: PASS****4.6.1 Limit****Standard**

FCC Part 15 Subpart C Paragraph 15.247 (a)(2)

Systems using digital modulation techniques operate in the 2400-2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz

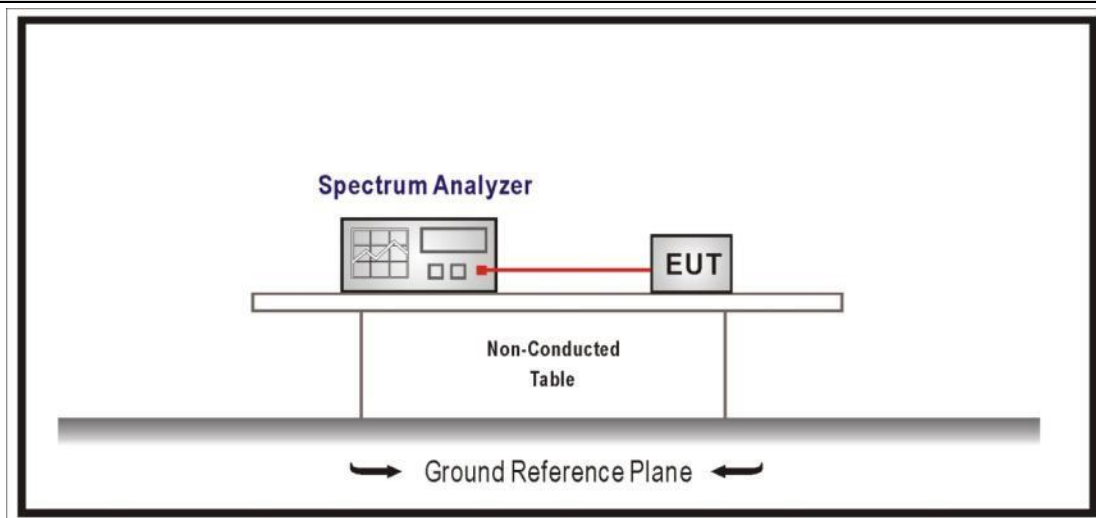
4.6.2 Test Setup**4.6.3 Test Procedure**

	Reference Rule	Chapter	Description
☒	ANSI C63.10	11.8	DTS bandwidth
☐	ANSI C63.10	11.8.1	Option 1
☒	ANSI C63.10	11.8.2	Option 2


4.6.4 Test Data

Mode	CH.	Test Freq. (MHz)	6dB Occupied Bandwidth (kHz)	Limit (kHz)	Result
Mode 1	00	2402	753.1	>500	Pass
	19	2440	762.1	>500	Pass
	39	2480	757.1	>500	Pass


CH00 (2402MHz)

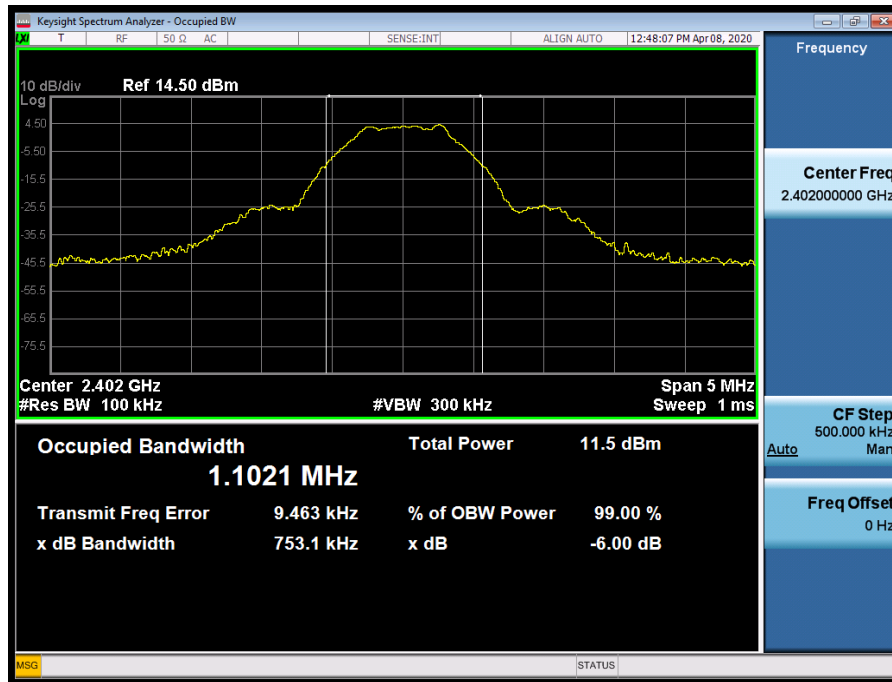

CH19 (2440MHz)

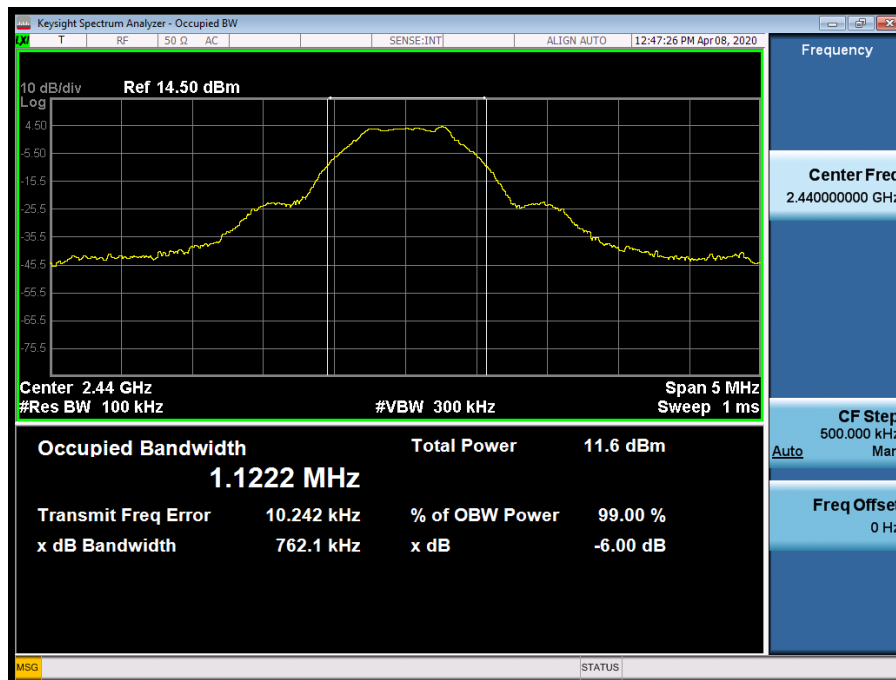

CH39 (2480MHz)

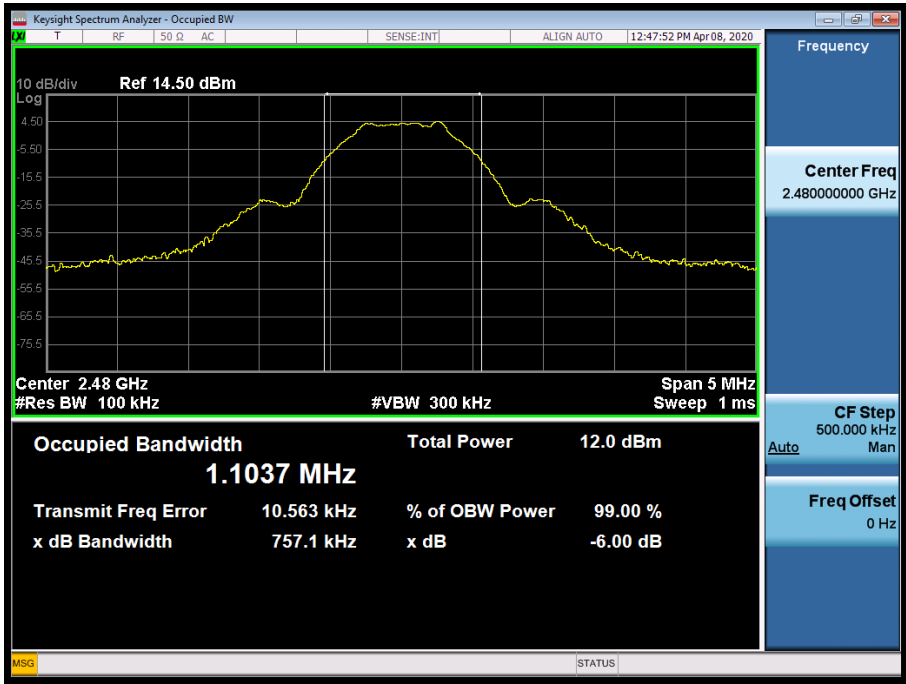

4.7 Fundamental emission output power

VERDICT: PASS


4.7.1 Limit

Standard		FCC Part 15 Subpart C Paragraph 15.247 (b)(3)
☒	GTX < 6dBi	$P_{out} \leq 30\text{dBm}$
☐	GTX > 6dBi	
☐	Non-Fix point-point	$P_{out} \leq 30 - (GTX - 6)$
☐	Fix point-point	$P_{out} \leq 30 - [(GTX - 6)]/3$
☐	Point-to-multipoint	$P_{out} \leq 30 - (GTX - 6)$
☐	Overlap Beams	$P_{out} \leq 30 - [(GTX - 6)]/3$
☐	Aggregate power transmitted simultaneously on all beams	$P_{out} \leq 30 - [(GTX - 6)]/3$
☐	single directional beam	$P_{out} \leq 30 - [(GTX - 6)]/3 + 8\text{dB}$

Note 1 : GTX directional gain of transmitting antennas.

Note 2 : P_{out} is maximum peak conducted output power .

4.7.2 Test Setup

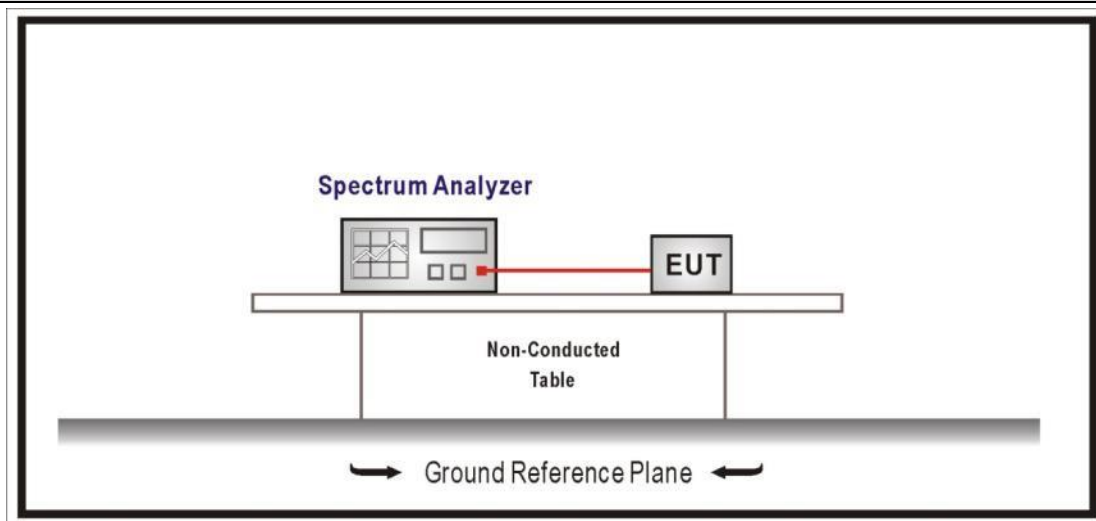

4.7.3 Test Procedure


	References Rule		Chapter	Description
☒	ANSI C63.10		11.9	Fundamental emission output power
	☒	ANSI C63.10		11.9.1 Maximum peak conducted output power
		☒	ANSI C63.10	11.9.1.1 RBW $\geq$ DTS bandwidth
		☐	ANSI C63.10	11.9.1.2 Integrated band power method
		☐	ANSI C63.10	11.9.1.3 PKPM1 Peak power meter method
	☐	ANSI C63.10		11.9.2 Maximum conducted (average) output power
		☐	ANSI C63.10	11.9.2.2 Measurement using a spectrum analyzer (SA)
		☐	ANSI C63.10	11.9.2.2.2 Method AVGSA-1(Duty cycle $\geq 98\%$)
		☐	ANSI C63.10	11.9.2.2.3 Method AVGSA-1A(Duty cycle $\geq 98\%$)
		☐	ANSI C63.10	11.9.2.2.4 Method AVGSA-2(Duty cycle $\leq 98\%$)
		☐	ANSI C63.10	11.9.2.2.5 Method AVGSA-2A(Duty cycle $\leq 98\%$)
		☐	ANSI C63.10	11.9.2.2.4 Method AVGSA-3
		☐	ANSI C63.10	11.9.2.2.5 Method AVGSA-3A
		☐	ANSI C63.10	11.9.2.3 Measurement using a power meter (PM)
		☐	ANSI C63.10	11.9.2.3.1 Method AVGPM
		☐	ANSI C63.10	11.9.2.3.2 Method AVGPM-G

4.7.4 Test Data

Mode	Channel	Test Frequency (MHz)	Power Output (dBm)	Limit (dBm)	Result
Mode 1	00	2402	5.17	≤ 30	Pass
	19	2440	4.81	≤ 30	Pass
	39	2480	5.22	≤ 30	Pass

4.8 Power Density**VERDICT: PASS****4.8.1 Limit:****Standard**

FCC Part 15 Subpart C Paragraph 15.247 (b)(3)

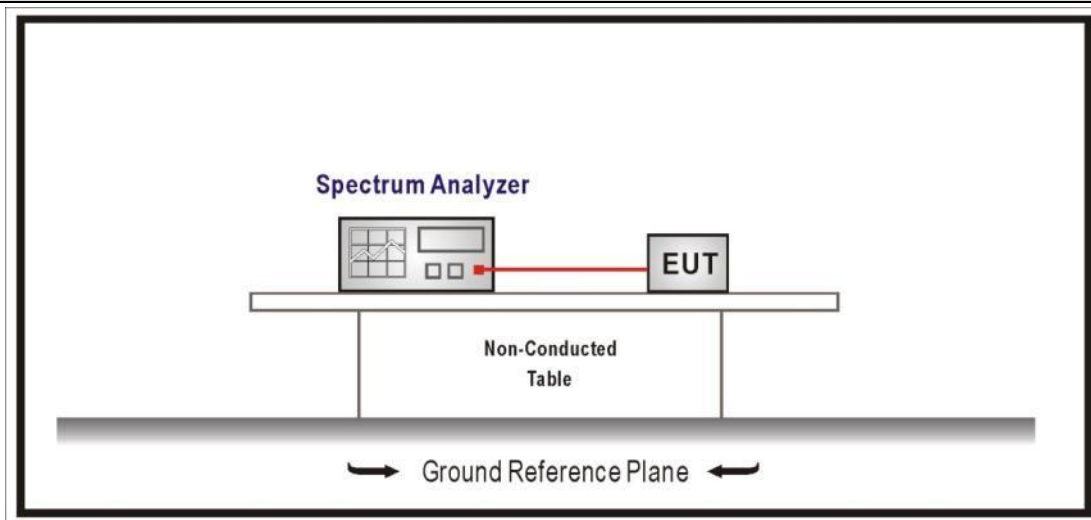Power Spectral Density $\leq 8\text{dBm}/3\text{kHz}$ **4.8.2 Test Setup****4.8.3 Test Procedure**

	References Rule		Chapter	Description
☒	ANSI C63.10		11.10	Maximum power spectral density level in the fundamental emission
	☒	ANSI C63.10	11.10.2	Method PKPSD (peak PSD)
	☐	ANSI C63.10	11.10.3	Method AVGPSD-1(Duty cycle $\geq 98\%$)
	☐	ANSI C63.10	11.10.4	Method AVGPSD-1A(Duty cycle $\geq 98\%$)
	☐	ANSI C63.10	11.10.5	Method AVGPSD-2(Duty cycle $< 98\%$)
	☐	ANSI C63.10	11.10.6	Method AVGPSD-2A(Duty cycle $< 98\%$)
	☐	ANSI C63.10	11.10.7	Method AVGPSD-3
	☐	ANSI C63.10	11.10.8	Method AVGPSD-3A


4.8.4 Test Data

Mode	Channel	Test Frequency (MHz)	Measurement PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
Mode 1	00	2402	-11.288	≤ 8	Pass
	19	2440	-11.116	≤ 8	Pass
	39	2480	-10.996	≤ 8	Pass


CH00(2402MHz)



CH19(2440MHz)

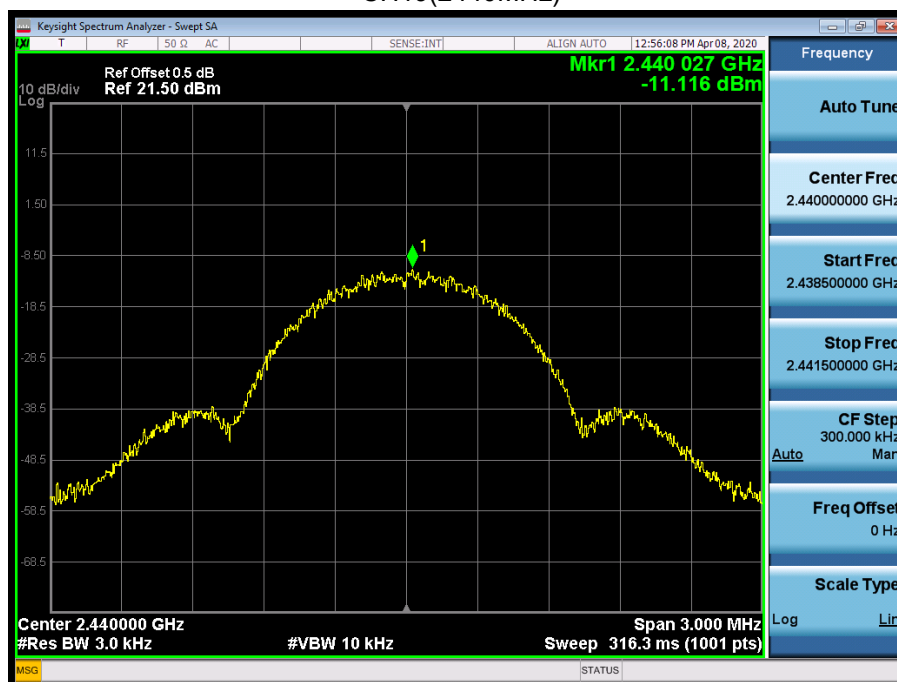

CH39(2480MHz)

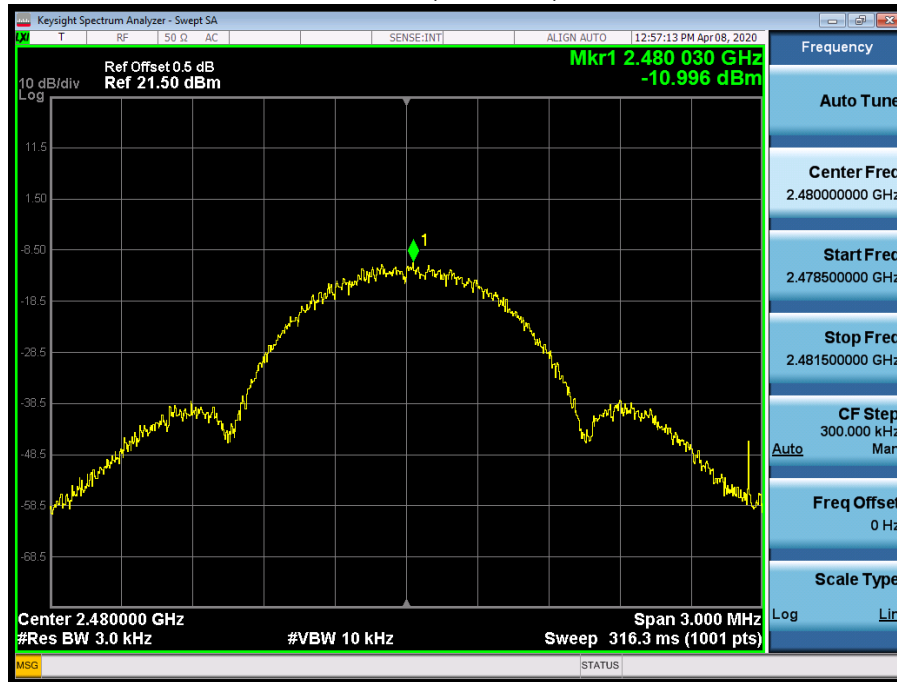

4.9 Antenna Requirement**VERDICT: PASS****4.9.1 Limit:****Standard**

FCC Part 15 Subpart C Paragraph 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.9.2 Antenna Connector Construction:

The use of a permanently attached antenna



The antenna use of a unique coupling to the intentional radiator



The use of a nonstandard antenna jack or electrical connector

Please refer to the attached document "Internal Photograph" to show the antenna connector.



4.10 Test setup photo and EUT Photo	VERDICT: PASS
-------------------------------------	---------------

Remark: The test setup photo and EUT Photo please see appendix.

_____ The End _____