

Prüfbericht-Nr.: <i>Test Report No.:</i>	50241450 001	Auftrags-Nr.: <i>Order No.:</i>	238100183	Seite 1 von 44 <i>Page 1 of 44</i>
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	14-Jan-2019	
Auftraggeber: <i>Client:</i>	Hon Hai Precision Industry Co., Ltd. No. 151, Sec. 1, Nankan Rd., Lujhu Dist., Taoyuan City 33859, Taiwan (R.O.C)			
Prüfgegenstand: <i>Test item:</i>	IEEE 802.11 a/b/g/n/ac 2x2 + BT combo module			
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	WBU042-IG5V, WBU042-IG			
Auftrags-Inhalt: <i>Order content:</i>	FCC Part 15C, FCC Part 2, IC RSS-247 Issue 2, IC RSS-102 Issue 5			
Prüfgrundlage: <i>Test specification:</i>	FCC 47CFR Part 15: Subpart C Section 15.247(FHSS) FCC 47CFR Part 2: Subpart J Section 2.1091 RSS-247 Issue 2 Feb 2017 RSS-102 Issue 5 Mar 2015			
Wareneingangsdatum: <i>Date of receipt:</i>	14-Feb-2019			
Prüfmuster-Nr.: <i>Test sample No.:</i>	A000877050-008, 009			
Prüfzeitraum: <i>Testing period:</i>	14-Feb-2019 ~ 15-Mar-2019			
Ort der Prüfung: <i>Place of testing:</i>	EMC/RF Laboratory Taipei			
Prüflaboratorium: <i>Testing laboratory:</i>	TUV Rheinland Taiwan Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von / tested by:		kontrolliert von / reviewed by:		
2019-05-24 Mars Y.J. Lin/Project Engineer		2019-05-24 Arvin Ho / Vice General Manager		
Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>
Sonstiges / Other: WBU042-IG and WBU042-IG5V use the same RF chip and the same PCB layout, the difference between WBU042-IG5V and WBU042-IG is: WBU042-IG5V more WBU042-IG one Regulator.				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT*RESULT: Passed***5.1.2 PEAK OUTPUT POWER***RESULT: Passed***5.1.3 20dB BANDWIDTH***RESULT: Passed***5.1.4 99% BANDWIDTH***RESULT: Passed***5.1.5 CONDUCTED SPURIOUS EMISSIONS AND FREQUENCY BAND EDGE MEASURED IN 100kHz BANDWIDTH***RESULT: Passed***5.1.6 SPURIOUS EMISSION***RESULT: Passed***5.1.7 FREQUENCY SEPARATION***RESULT: Passed***5.1.8 NUMBER OF HOPPING FREQUENCY***RESULT: Passed***5.1.9 TIME OF OCCUPANCY***RESULT: Passed***5.2.1 MAINS CONDUCTED EMISSIONS***RESULT: Passed***6.1.1 ELECTROMAGNETIC FIELDS***RESULT: Passed*

Contents

1.	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS.....	5
1.2	COMPLEMENTARY MATERIALS.....	5
2.	TEST SITES	6
2.1	TEST LABORATORY	6
2.2	TEST FACILITY.....	6
2.3	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	7
2.4	TRACEABILITY	8
2.5	CALIBRATION	8
2.6	MEASUREMENT UNCERTAINTY	8
3.	GENERAL PRODUCT INFORMATION.....	9
3.1	PRODUCT FUNCTION AND INTENDED USE	9
3.2	SYSTEM DETAILS AND RATINGS.....	9
3.3	INDEPENDENT OPERATION MODES.....	11
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	11
3.5	SUBMITTED DOCUMENTS.....	11
4.	TEST SET-UP AND OPERATION MODES.....	12
4.1	PRINCIPLE OF CONFIGURATION SELECTION	12
4.2	TEST OPERATION AND TEST SOFTWARE.....	12
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	12
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	13
4.5	TEST SETUP DIAGRAM	13
5.	TEST RESULTS	15
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	15
5.1.1	Antenna Requirement	15
5.1.2	Peak Output Power	16
5.1.3	20dB Bandwidth	17
5.1.4	99% Bandwidth	21
5.1.5	Conducted spurious emissions and Frequency Band Edge measured in 100kHz Bandwidth.....	23
5.1.6	Spurious Emission	31
5.1.7	Frequency Separation.....	32
5.1.8	Number of hopping frequency.....	34
5.1.9	Time of Occupancy	36

Prüfbericht - Nr.: 50241450 001

Test Report No.

Seite 4 von 44

Page 4 of 44

5.2	MAINS EMISSIONS.....	39
5.2.1	Mains Conducted Emissions.....	39
6.	SAFETY HUMAN EXPOSURE	40
6.1	RADIO FREQUENCY EXPOSURE COMPLIANCE	40
6.1.1	Electromagnetic Fields.....	40
7.	PHOTOGRAPHS OF THE TEST SET-UP.....	41
8.	LIST OF TABLES	44
9.	LIST OF PHOTOGRAPHS.....	44

1. General Remarks

1.1 Complementary Materials

The following attachments are integral parts of this test report:

Appendix P: Photo Documentation

(File Name: 50241450 001APPENDIX P)

Appendix D: Test Result of Radiated Emissions

(File Name: 50241450 001APPENDIX D)

Test Specifications

The following standards were applied

Table 1: Applied Standard and Test Levels

Radio
FCC CFR47 Part 15: Subpart C Section 15.247 FCC 47CFR Part 2: Subpart J Section 2.1091 ANSI C63.10:2013 KDB558074 D01 DTS Meas Guidance v05 RSS-247 Issue 2 Feb 2017 RSS-102 Issue 5 Mar 2015 RSS-Gen Issue 5 Apr 2018

1.2 Complementary Materials

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

2. Test Sites

2.1 Test Laboratory

TUV Rheinland Taiwan Ltd.
Taichung Branch Office

No.9, Lane 36, Minsheng Rd., Sec. 3, Daya District,
Taichung City 428
Taiwan (R.O.C.)

2.2 Test Facility

TUV Rheinland Taiwan Ltd.
Taipei Office

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

FCC RegistrationNo.: 340738
IC Canada Registration No.: 9465A-1
TAF Accredited NCC Test Lab. No.:0759
TAF ISO17025 Certification effective periods: 2016-Jul-1st to 2019-Jun-30th



Testing Laboratory
0759

2.3 List of Test and Measurement Instruments

Table 2: List of Test and Measurement Equipment

Kind of Equipment	Manu-facturer	Type	S/N	Last Calibration	Next Calibration
Test Software	Farad	EZ_EMC	Ver. TUV3A1	N/A	N/A
Spectrum Analyzer	R&S	FSV 40	100921	2018/05/02	2019/05/02
EXA Signal Analyzer	KEYSIGHT	N9010A	MY52221334	2019/02/05	2020/02/04
Preamplifier (30MHz -1GHz)	HP	8447F	2805A03335	2018/08/14	2019/08/14
Preamplifier (18 GHz -40 GHz)	COM-POWER	PAM-840	461257	2019/01/18	2020/01/18
Pre-Amplifier (1GHz~18GHz)	EM Electronics	EM01G18G	60558	2018/11/21	2019/11/21
Bilog Antenna	TESEQ	CBL6111D	29804	2018/08/18	2019/08/18
Horn Antenna	ETS-Lindgren	3117	201918	2018/08/18	2019/08/18
Horn Antenna (18GHz~40GHz)	COM-POWER	AH-840	101029	2018/11/28	2019/11/28
Loop Antenna	Schwarzbeck	FMZB 1513	1513-076	2018/06/14	2019/06/14
LISN (1 phase)	R&S	ENV216	101243	2018/06/18	2019/06/17
LISN	R&S	ENV216	101262	2018/06/22	2019/06/21
EMI Test Receiver	R&S	ESR 7	101549	2018/11/10	2019/11/10
Spectrum Analyzer	R&S	FSL3	101943	2018/09/07	2019/09/07
Temp. & Humid. Chamber	Giant Force	GCT-099-40-S	MAF0103-007	2019/03/09	2021/03/09

2.4 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.5 Calibration

requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.6 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements:

Table 3: Emission Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	± 0.1 ppm
RF power, conducted	± 1.5 dB
Adjacent channel power	± 3 dB
Radiated emission of transmitter, valid up to 26 GHz	± 6 dB
Radiated emission of receiver, valid up to 26 GHz	± 6 dB
Temperature	± 2 °C
Humidity	± 10 %

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a WiFi 802.11 a/b/g/n/ac + Bluetooth 5.0 Combo module. It contains a Bluetooth compatible module enabling the user to communicate data through a Wireless interface. For details refer to the User Guide, Data Sheet and Block Diagram.

3.2 System Details and Ratings

Table 4: Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	IEEE 802.11 a/b/g/n/ac 2x2 + BT combo module
Type Identification	WBU042-IG5V, WBU042-IG
FCC ID	RX3-WBU042IG
IC ID	2878F-WBU042IG
HVIN	WBU042-IG

Table 5: Technical Specification of EUT

Technical Specification	Value
Operating Frequency	2402 MHz ~ 2480 MHz
Channel Spacing	1 MHz
Channel number	79
Operation Voltage	5Vdc for WBU042-IG5V 3.3Vdc for WBU042-IG
Modulation	GFSK, $\pi/4$ DQPSK, 8 DPSK
Antenna gain	2.1 dBi

Table 6: Frequency hopping information

Technical Specification	Description
Hopping Range	Hereby we declare that the maximum frequency of this device is: 2402-2480MHz. This is according the Bluetooth Core Specification V2.1+EDR for devices which will be operated in the USA. This was checked during the Bluetooth Qualification tests (Test Case: TRM/CA/04).
Hopping Sequence	Example of a 79 hopping sequence in data mode: 33,04,21,44,23,42,53,46,55,48,40,59,72,29,76,31,08,73,07,75,09,45,60,39,58,13,47,11,77,52,35,50,65,54,67,56,69,62,71,64, 7,25,27,66,57,70,74,61,78,63,10,41,05,43,15,44,64,68,02,70,06,01,51,03,55,05,03,66,53,49,36,47,
Receiver input bandwidth	The input bandwidth of the receiver is 1MHz. In every connection one Bluetooth device is the master and the other one is the slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings. Repeating of a packer has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

3.3 Independent Operation Modes

The basic operation modes are:

- A. Transmitting
 - 1. Low channel
 - 2. Middle channel
 - 3. High channel
- B. Receiving
 - 1. Low channel
 - 2. Middle channel
 - 3. High channel
- C. Hopping

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Block Diagram.

3.5 Submitted Documents

- Block Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Setup for testing: Test samples are provided with a USB interface which makes it possible to control them through a test software installed on a notebook computer.

This software MediaTek BT Tool was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed in section 3.3 as appropriate.

The samples were used as follows:
A000877050-008 for Conducted test
A000877050-009 for Radiated test

Full test was applied on all test modes, but only worst case was shown.

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:


Kind of Equipment	Manufacturer	Model Name	S/N
Notebook(EMC-05)	Lenovo	TP00048A	PB-0F8B2

4.4 Countermeasures to achieve EMC Compliance

The test sample which has been tested containing the noise suppression parts as in the Photo Appendix and the Test Setup Photos. No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

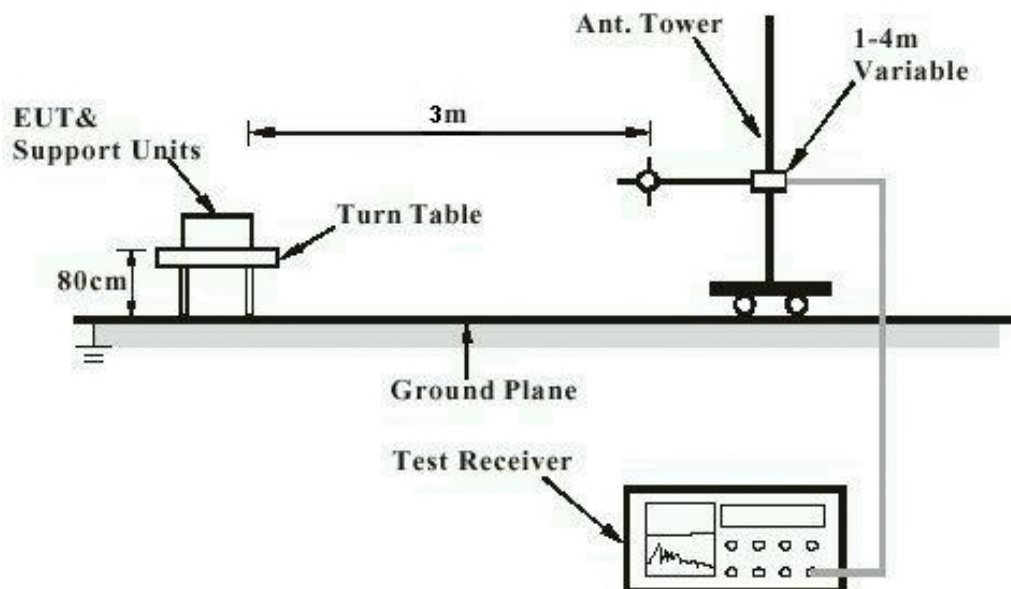

Note: Measurements above 1 GHz are done with a table height of 1.5m

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement


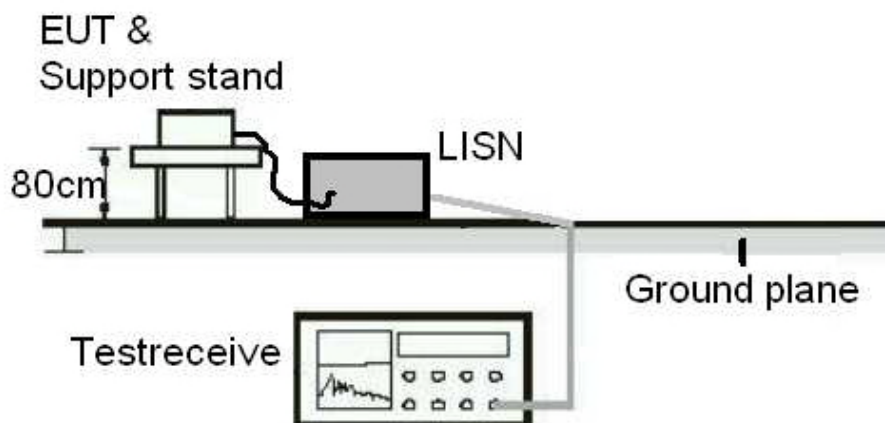


Diagram of Measurement Equipment Configuration for Conducted Transmitter Measurement

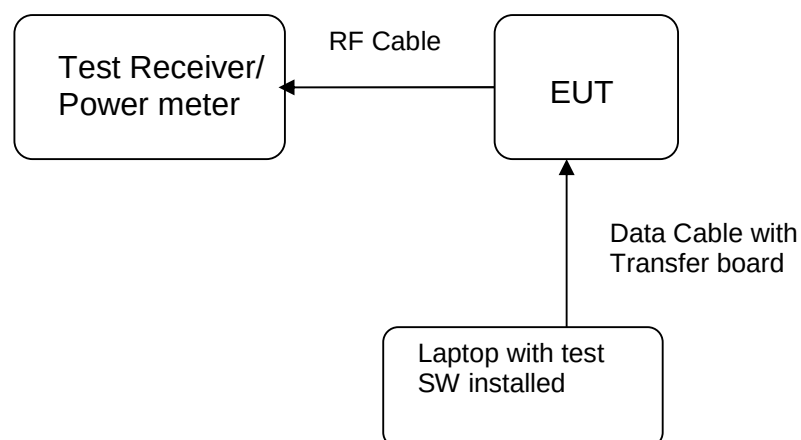

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT: **Passed**

Test standard : FCC Part 15.247(b)(4), Part 15.203 and RSS-Gen 6.8

Requirement : use of approved antennas only with directional gains that do not exceed 6 dBi

According to the manufacturer declaration, the EUT has an antenna with a directional gain of 2.01 dBi . The antenna is a Pifa Antenna with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.

Refer to EUT photo for details.

5.1.2 Peak Output Power

RESULT:
Passed

Test standard : FCC Part 15.247(b)(1),
 RSS-247 5.4(b)
 Basic standard : ANSI C63.10 (2013)
 Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A
 Ambient temperature : 22-26 °C
 Relative humidity : 50-65 %
 Atmospheric pressure : 100-103 kPa

Table 7: Test result of Peak Output Power, GFSK modulation

Channel	Channel Frequency	Peak Output Power		Limit
	(MHz)	(dBm)	(W)	(W)
Low Channel	2402	3.40	0.00219	0.125
Middle Channel	2441	3.72	0.00236	0.125
High Channel	2480	3.38	0.00218	0.125

Table 8: Test result of Peak Output Power, 8DPSK modulation

Channel	Channel Frequency	Peak Output Power		Limit
	(MHz)	(dBm)	(W)	(W)
Low Channel	2402	6.28	0.00425	0.125
Middle Channel	2441	6.36	0.00433	0.125
High Channel	2480	6.21	0.00418	0.125

Pmax: 4.3251mW

5.1.3 20dB Bandwidth

RESULT:
Passed

Test standard : FCC Part 15.247(a)(1),
 RSS-247 5.1(a)
 Basic standard : ANSI C63.10 (2013)
 Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A
 Ambient temperature : 22-26°C
 Relative humidity : 50-65%
 Atmospheric pressure : 100-103kPa

Table 9: Test result of 20dB Bandwidth, GFSK modulation

Channel	Channel Frequency (MHz)	20dB Bandwidth (kHz)	Limit (MHz)	Result
Low Channel	2402	960.1	1.5	Pass
Mid Channel	2441	960.2	1.5	Pass
High Channel	2480	960.3	1.5	Pass

Note: Limit is for Channel Separation of 1 MHz and a power limit of 125 mW.

Table 10: Test result of 20dB Bandwidth, 8DPSK modulation


Channel	Channel Frequency (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Result
Low Channel	2402	1.298	1.5	Pass
Mid Channel	2441	1.298	1.5	Pass
High Channel	2480	1.298	1.5	Pass

Note: Limit is for Channel Separation of 1 MHz and a power limit of 125 mW.

If the carrier separation frequency of a Bluetooth Device is set at 1 MHz due to the firmware setting and the Bluetooth Standard, then for power <125 mW the limit for the 20 dB Bandwidth, becomes 1 MHz / 0.66666 = 1.5 MHz.

Test Plot of 20dB Bandwidth, GFSK modulation


Low Channel

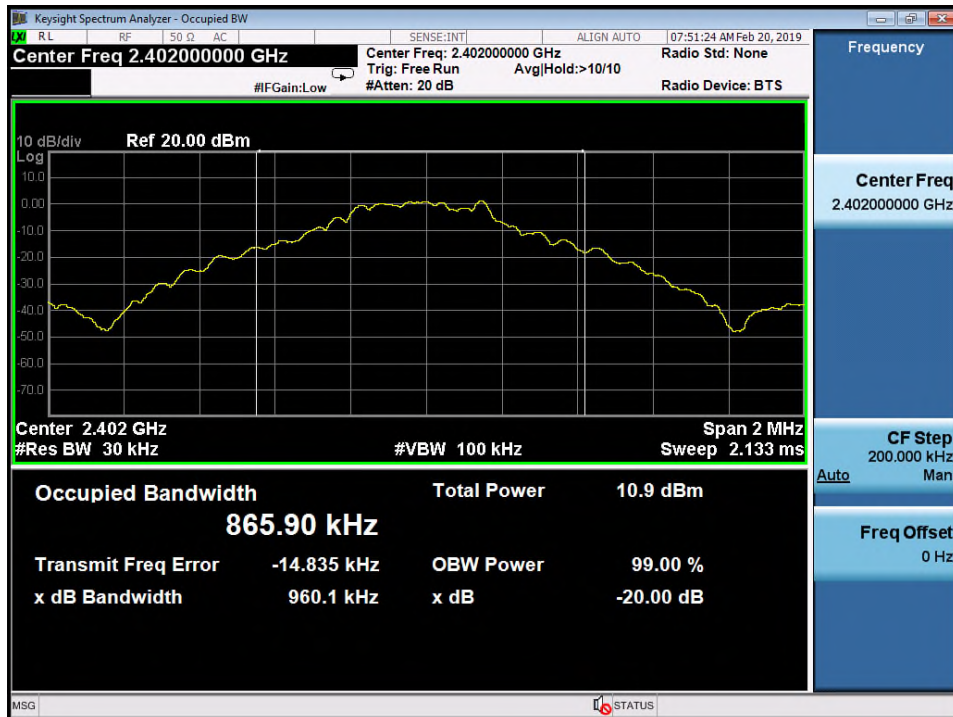

Middle Channel






High Channel

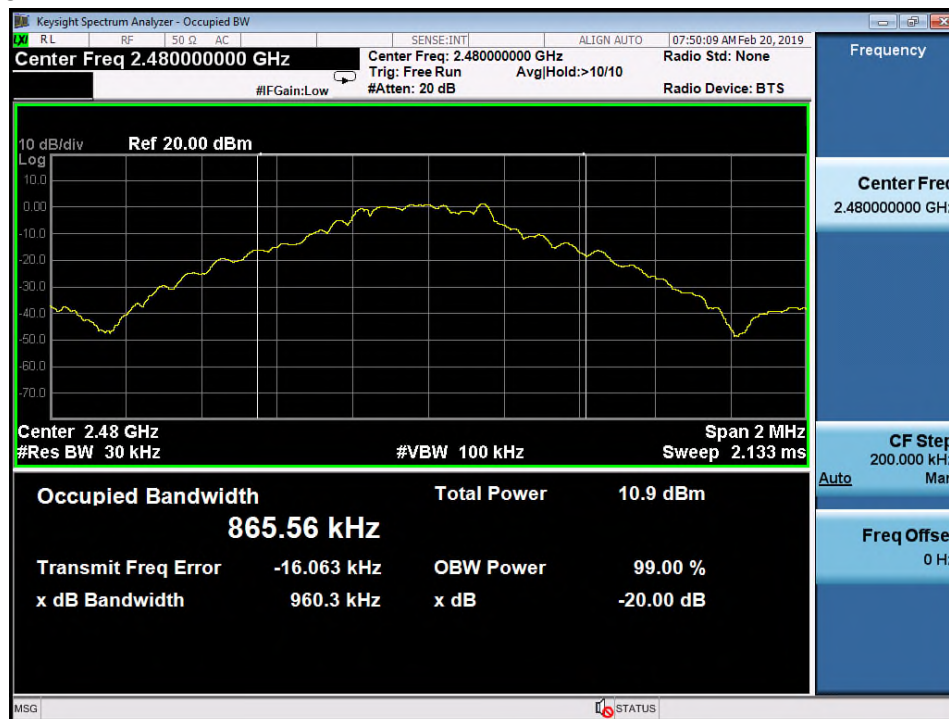

Test Plot of 20dB Bandwidth, 8DPSK modulation

Low Channel

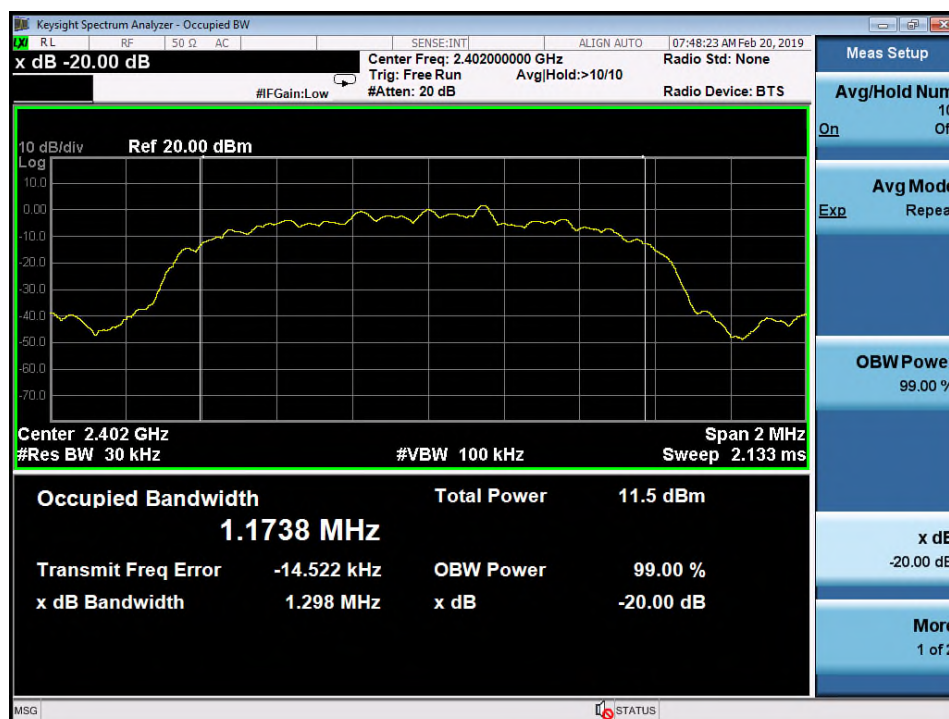

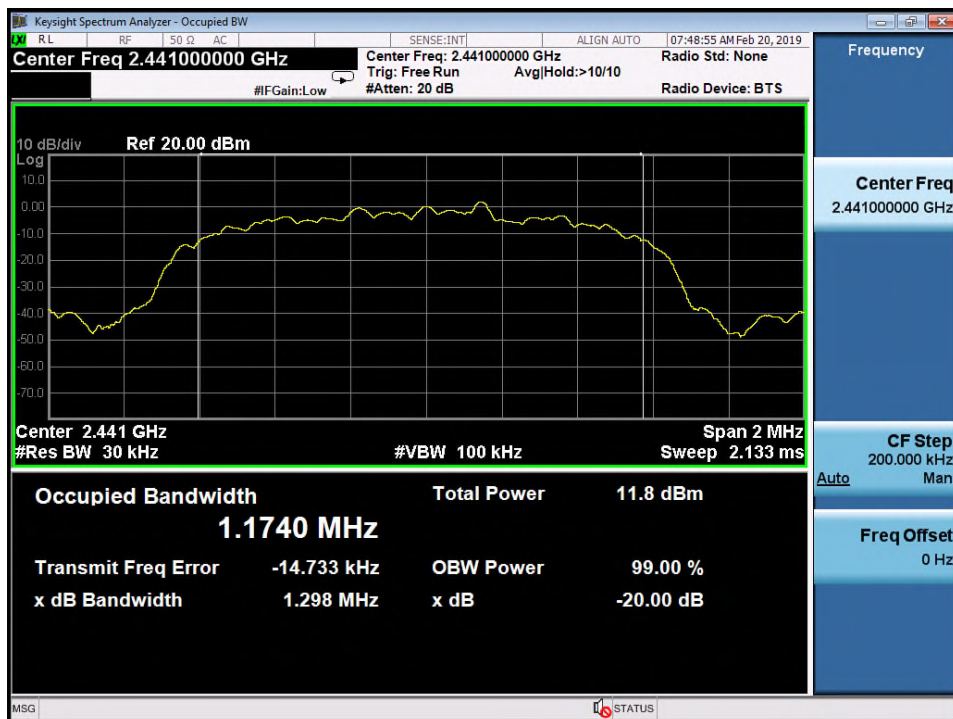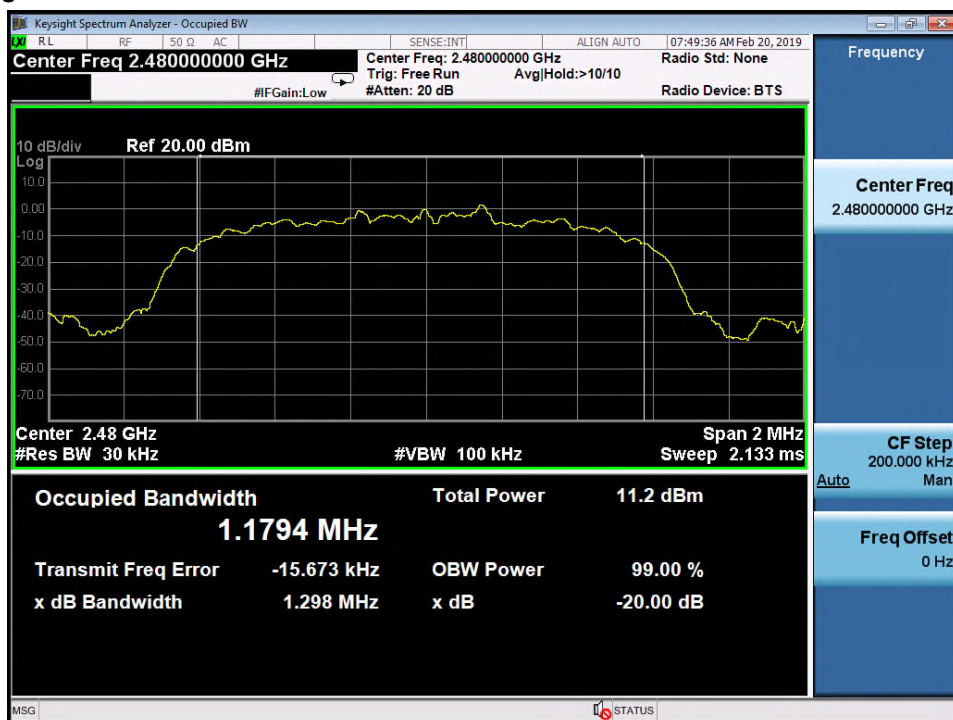Middle Channel

High Channel


5.1.4 99% Bandwidth**RESULT:****Passed**

Test standard : RSS-Gen
Basic standard : RSS-Gen
Kind of test site : Shielded room

Test setup

Test Channel : Middle
Operation Mode : A

Ambient temperature : 22-26°C
Relative humidity : 50-65%
Atmospheric pressure : 100-103kPa

Table 11: Test result of 99% Bandwidth, GFSK modulation


Channel	Channel Frequency (MHz)	99% Bandwidth (kHz)
Mid Channel	2441	867.6

Table 12: Test result of 99% Bandwidth, PSK modulation

Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Mid Channel	2441	1.1753


Test Plot of 99% Bandwidth, GFSK modulation

Middle Channel

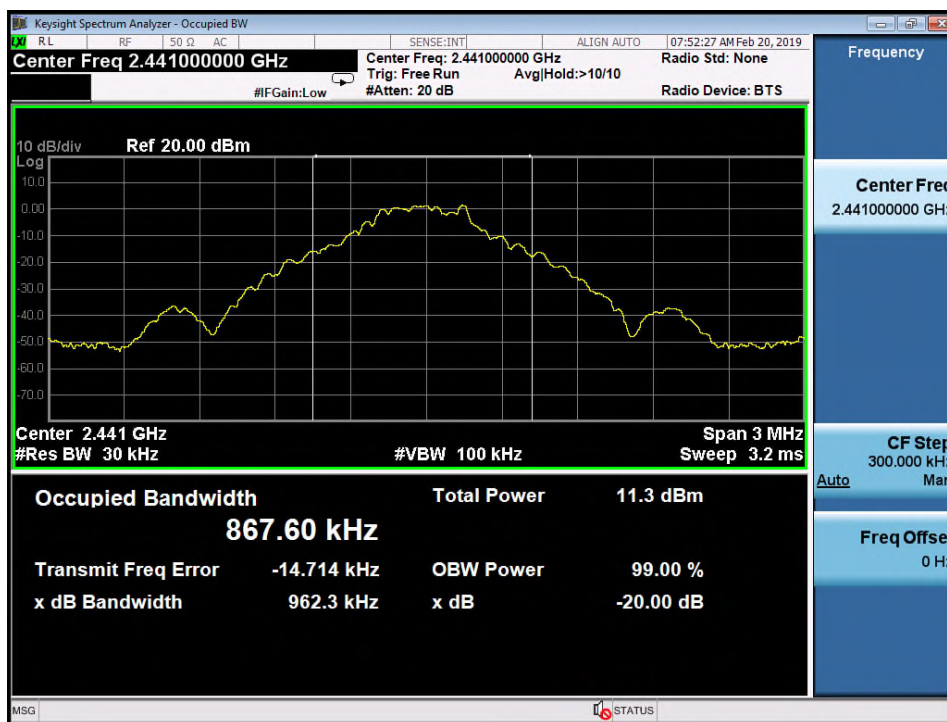

Test Plot of 99% Bandwidth, 8DPSK modulation

Middle Channel

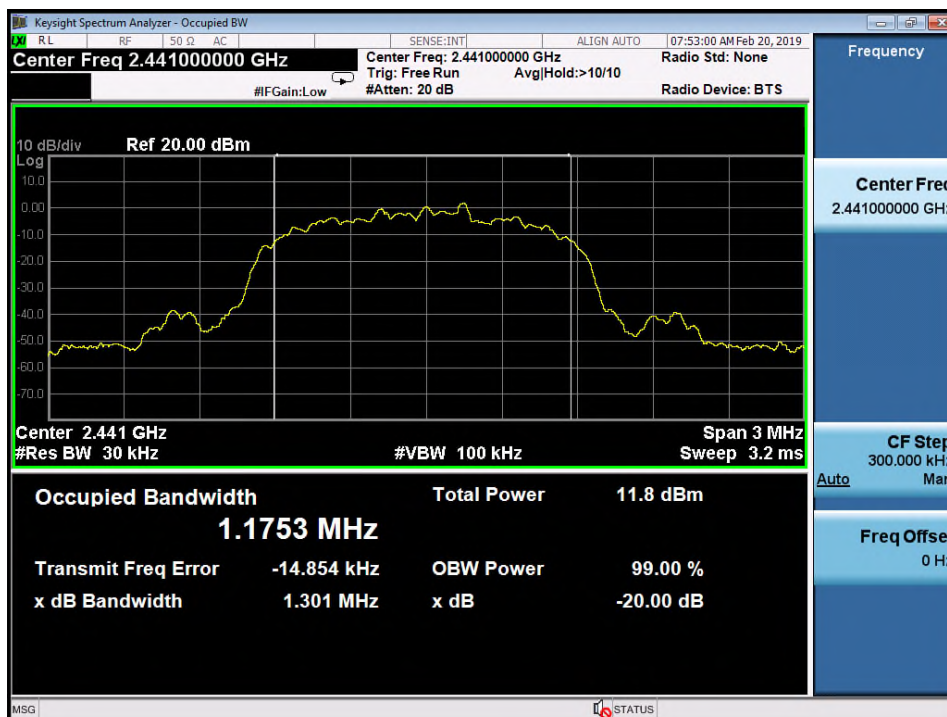

5.1.5 Conducted spurious emissions and Frequency Band Edge measured in 100kHz Bandwidth

RESULT:**Passed**

Test standard	:	FCC part 15.247(d), RSS-247 5.5
Basic standard	:	ANSI C63.10:2013, KDB558074
Limit	:	20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power)
Kind of test site	:	Shielded room

Test setup


Test Channel	:	Low/ Middle/ High for Conducted Spurious Emissions Low/ High/ Hopping on for Frequency Band Edge
Operation Mode	:	A
Ambient temperature	:	22-26°C
Relative humidity	:	50-65%
Atmospheric pressure	:	100-103 kPa

All emissions are more than 20dB below fundamental, details refer to following test plot, and compliance is achieved as well.


Due to the small size of the product and that there are no inductive components of significant size, 9kHz to 30MHz frequency range is not tested based on technical judgment.

Test Plot of 100kHz Conducted Emissions, GFSK modulation


Low Channel

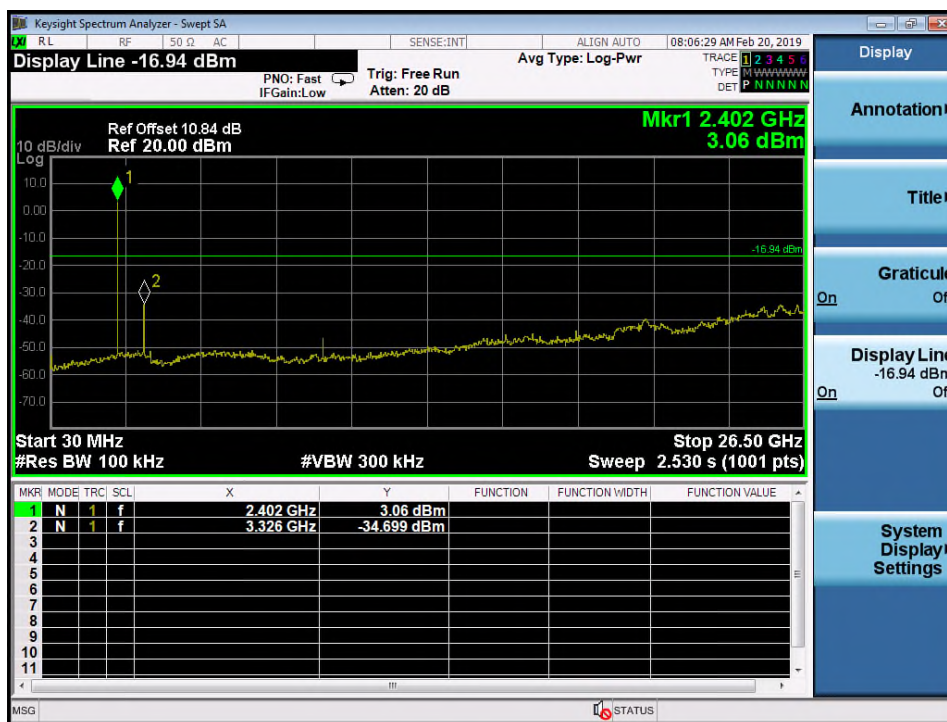

Middle Channel

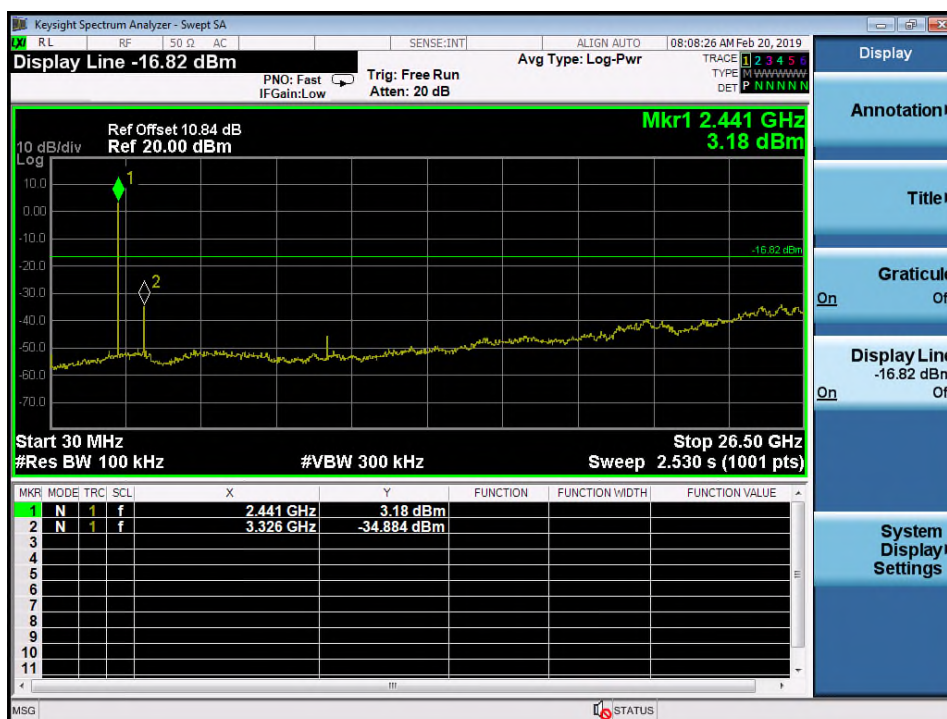


High Channel

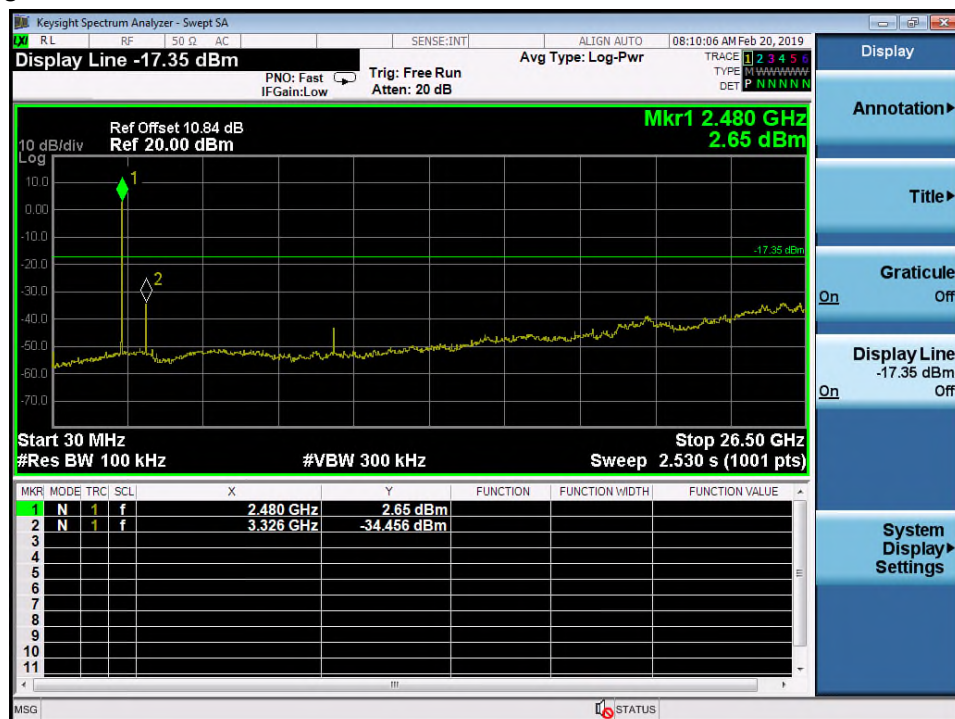


Test Plot of 100kHz Conducted Emissions, 8DPSK modulation


Low Channel

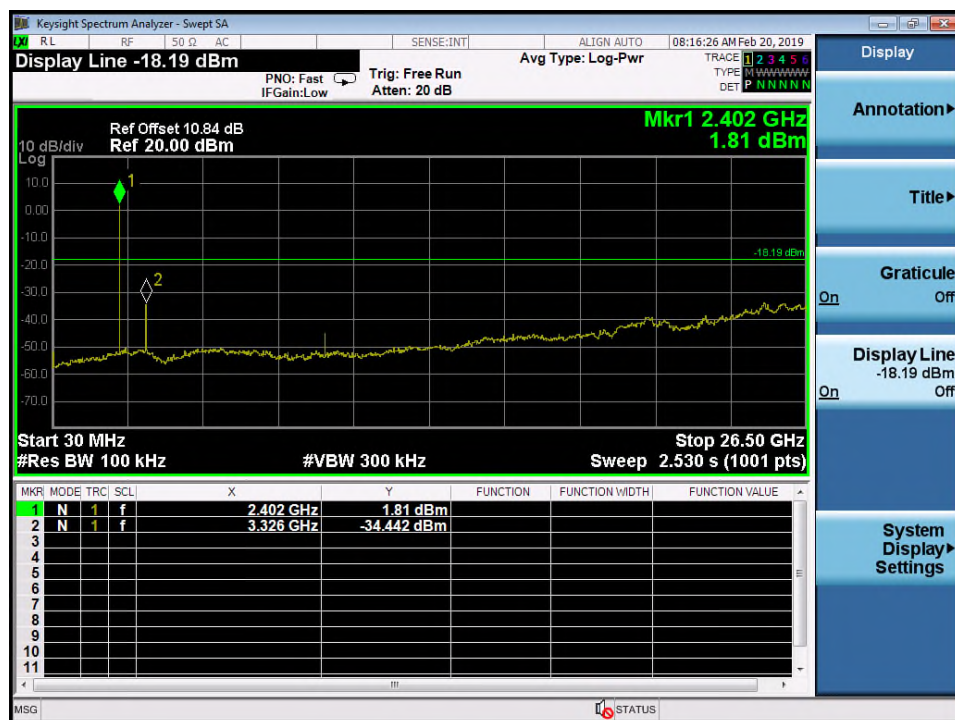

Middle Channel

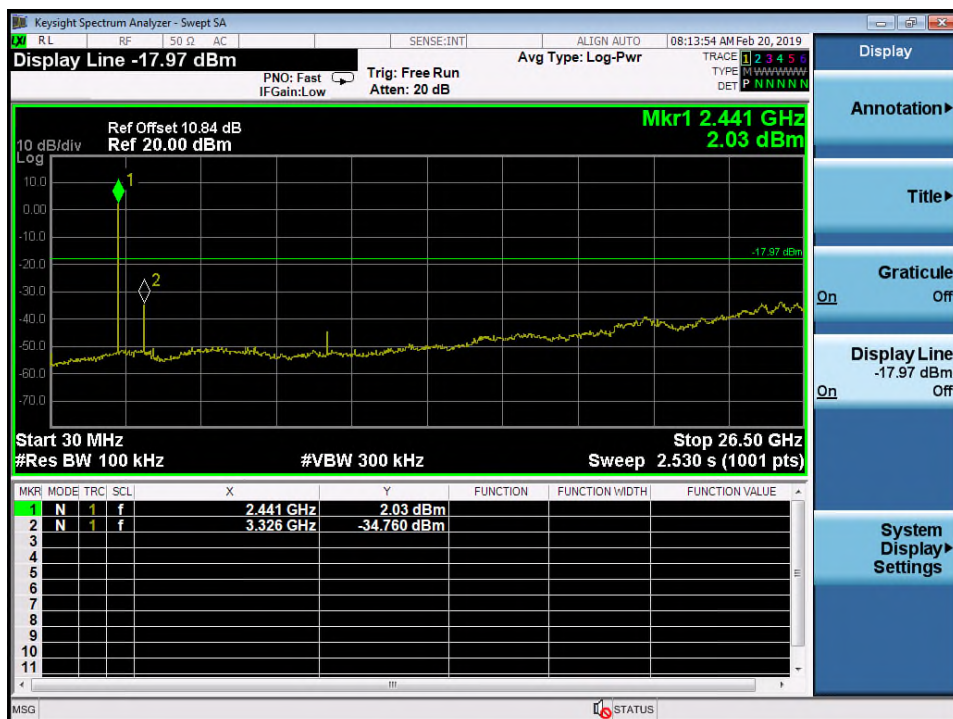


High Channel

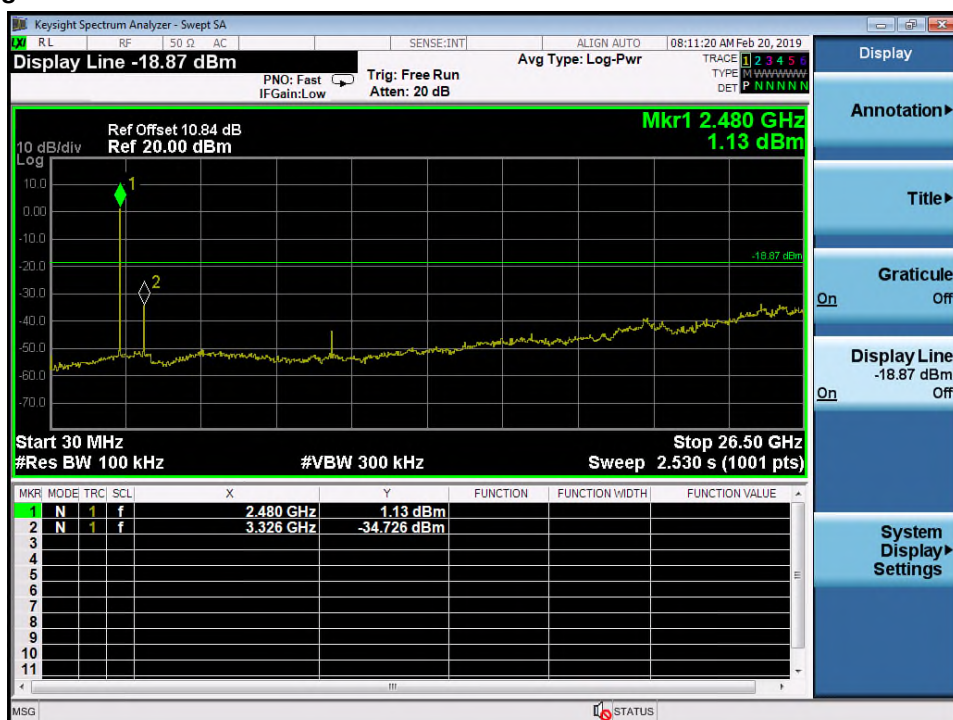



Test Plot of 100kHz Bandwidth of Frequency Band Edge, GFSK modulation

Low Channel

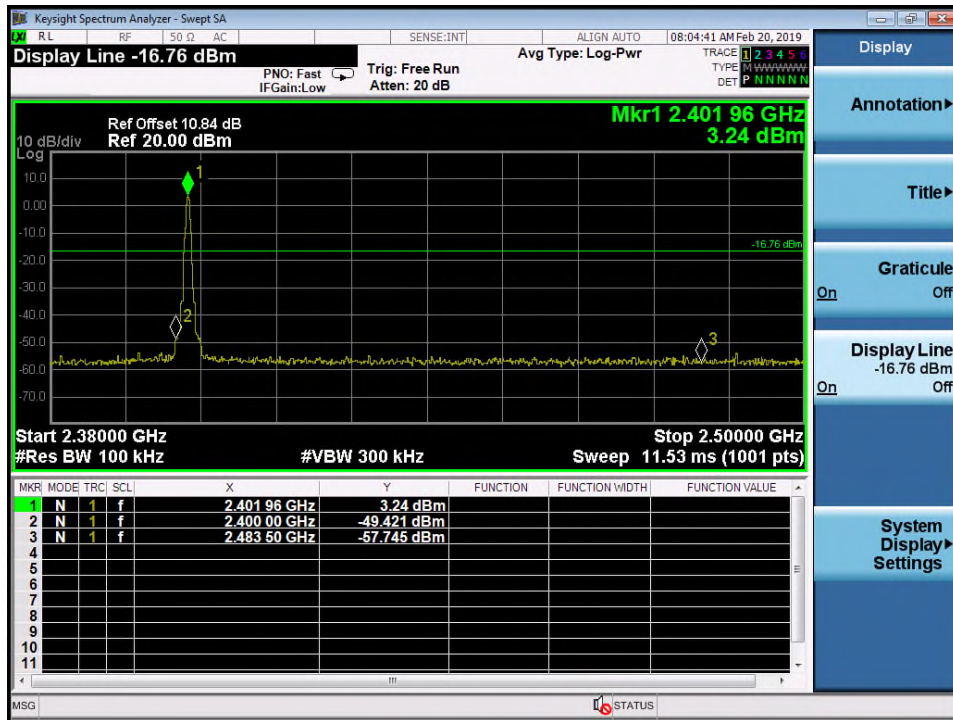


High Channel

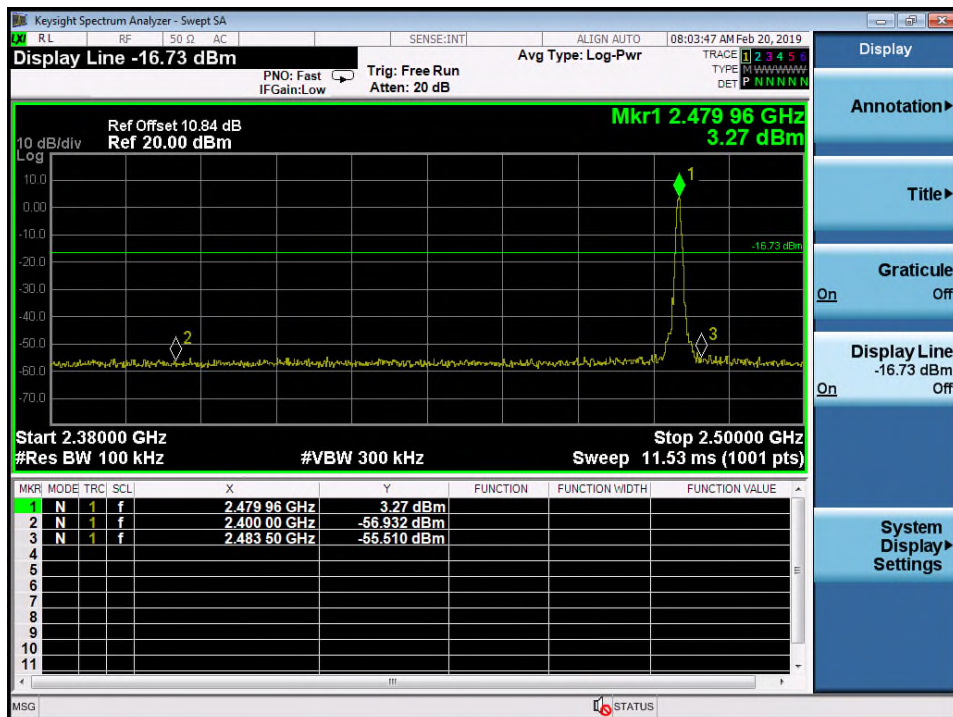

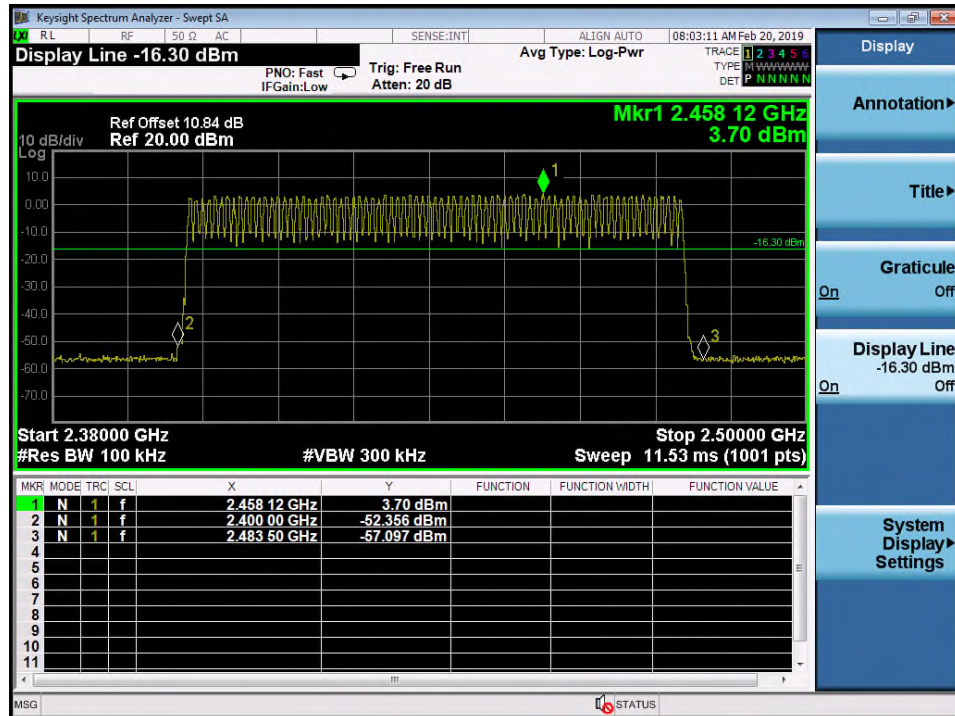


Test Plot of 100kHz Bandwidth of Frequency Band Edge, 8DPSK modulation


Low Channel

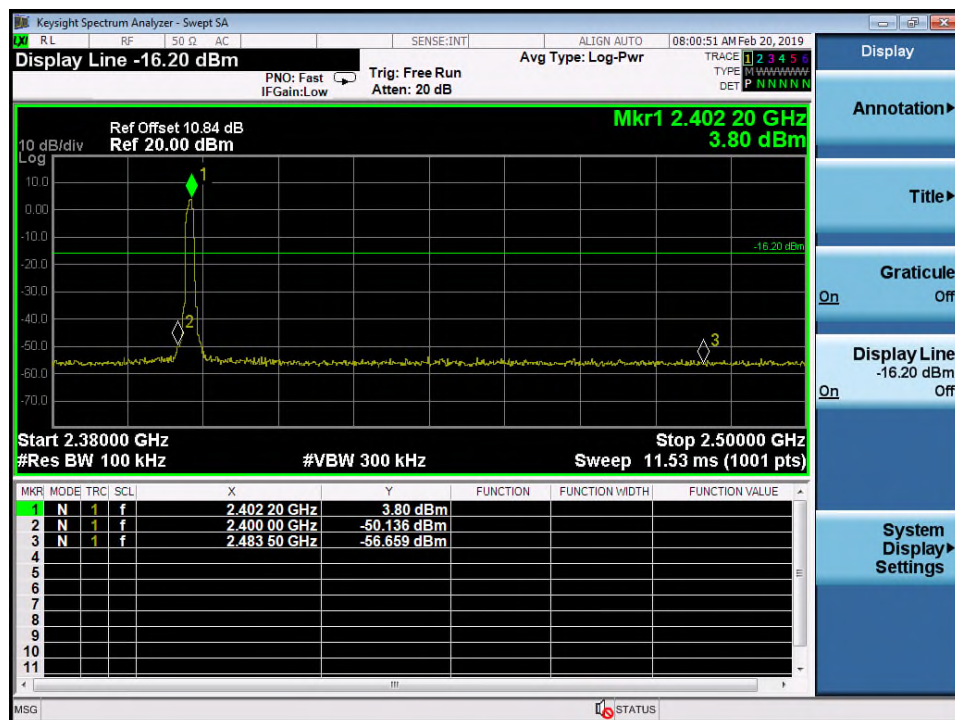

High Channel

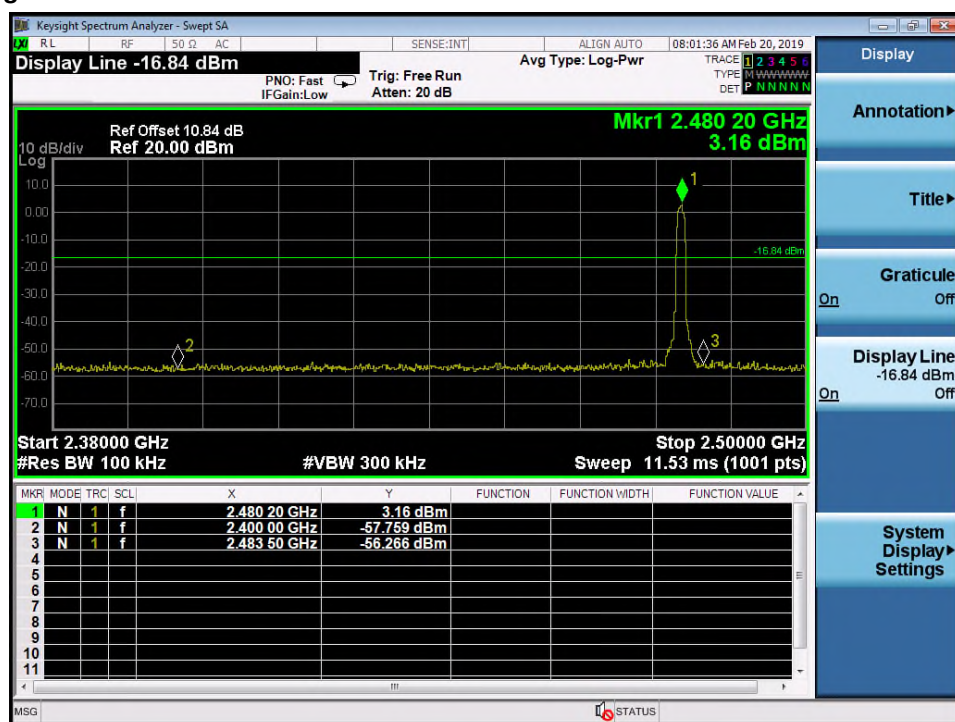

Hopping ON

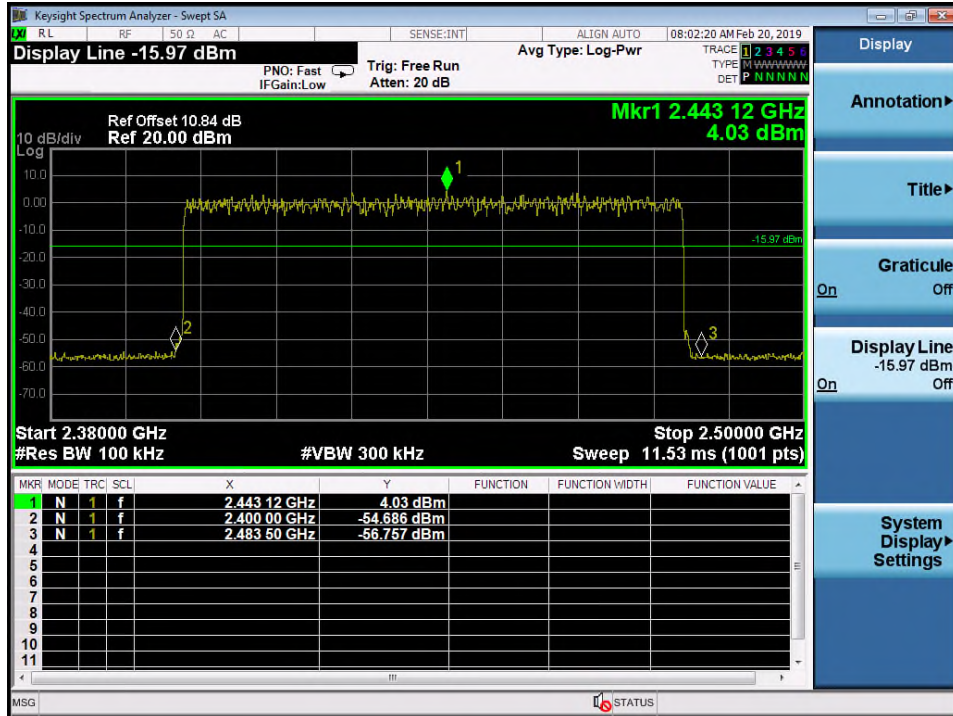

5.1.6 Spurious Emission

RESULT:

Passed

Test standard	:	FCC part 15.247(d), FCC 15.205, FCC 15.209, RSS-Gen 8.9 and RSS-Gen 8.10
Basic standard	:	ANSI C63.10: 2013
Limits	:	Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a) and RSS-Gen i5, 8.10 (Table 7), must comply with the radiated emission limits specified in FCC 15.209(a) and RSS-Gen 5, 8.9 (Table 5 and 6). Emission radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in FCC15.247(d) and RSS-247 i2, 5.5
Kind of test site	:	3m Semi-Anechoic Chamber

Test setup

Test Channel	:	Low/ Middle/ High
Operation Mode	:	A
Ambient temperature	:	22-26°C
Relative humidity	:	50-65%
Atmospheric pressure	:	100-103 kPa

Factor (dB/m)=Antenna Factor(dB/m)+Cable loss (dB)

Level(dBuV/m)=Reading(dBuV)+ Factor(dB/m)

Remark: Testing was carried out within frequency range 9kHz to the tenth harmonic. For details refer to Appendix D. The Radiated Emissions testing was performed in the X, Y and Z axis orientation. The worst-case Axis orientation is recorded in this test report.

5.1.7 Frequency Separation

RESULT:
Passed

Test standard : FCC part 15.247(a)(1)
RSS-247 5.1(b)

Basic standard : ANSI C63.10 (2013)

Limit : $\geq 25\text{kHz}$ or $2/3$ of 20dB bandwidth, whichever is greater

Kind of test site : Shielded room

Test setup

Test Channel : Hopping On

Operation Mode : C

Ambient temperature : $22\text{-}26^{\circ}\text{C}$

Relative humidity : $50\text{-}65\%$


Atmospheric pressure : $100\text{-}103\text{ kPa}$

Table 13: Test result of Frequency Separation

Channel	Channel Frequency (MHz)	Measured Channel Separation (MHz)	Limit (kHz)	Result
Record Channel	2441	1	$\geq 25\text{kHz}$ or $2/3$ of 20dB bandwidth	Pass
Record Channel adj 1	2440			
Record Channel adj 2	2442			

Test Plot of Frequency Separation

GFSK

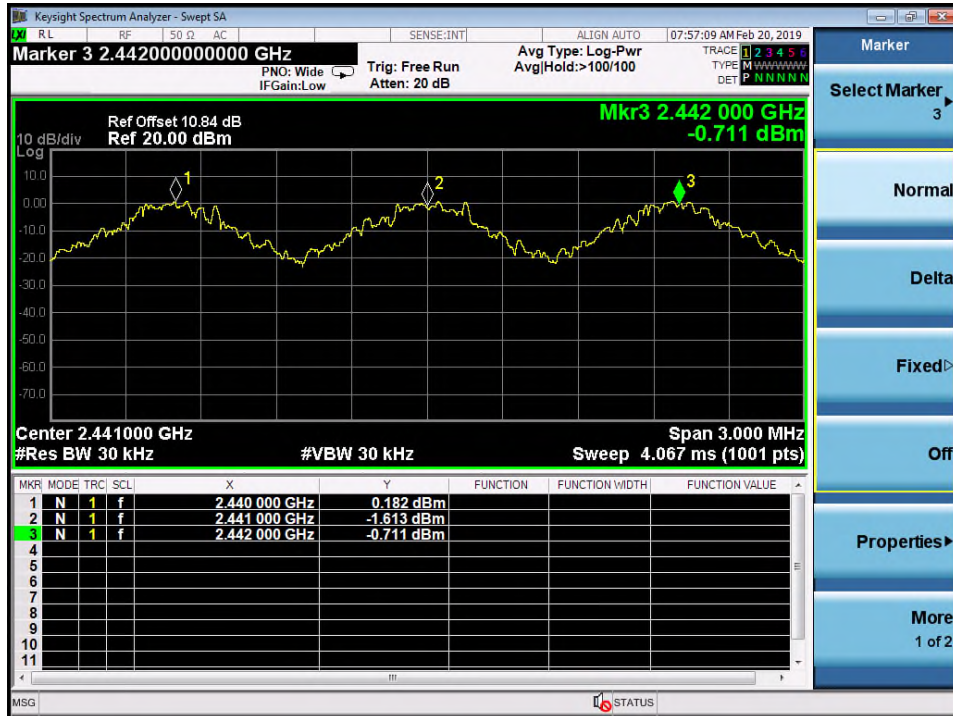

5.1.8 Number of hopping frequency**RESULT:****Passed**

Test standard : FCC part 15.247(a)(1)(iii)
RSS-247 5.1(e)

Basic standard : ANSI C63.10 (2013)

Kind of test site : Shielded room

Test setup

Test Channel : Hopping On
Operation Mode : C

Ambient temperature : 22-26°C
Relative humidity : 50-65%
Atmospheric pressure : 100-103 kPa

Table 14: Test result of Number of hopping frequency

Frequency Range	Measured Quantity of Hopping Channel	Limit	Result
<u>2400</u> to <u>2483.5</u> MHz	79	≥15	Pass

Test Plot of Number of hopping frequencies



5.1.9 Time of Occupancy

RESULT:
Passed

Test standard : FCC part 15.247(a)(1)(iii)
 RSS-247 5.1(e)

Basic standard : ANSI C63.10 (2013)
 LP0002(2018) Appendix II

Limits : 0.4s
 Kind of test site : Shield room

Test setup

Test Channel : Low
 Operation Mode : A

Ambient temperature : 22-26°C
 Relative humidity : 50-65%
 Atmospheric pressure : 100-103 kPa

Table 15: Test result of Time of Occupancy

Data Mode	Captured Burst (s)	Dwell time (s)	On+Off time (s)	Limit (s)	Result
DH5	0.0029	0.2315	0.00501	0.4	Pass
3DH5	0.0029	0.2325	0.00499	0.4	Pass

Note:

Dwell time = Pulse width x (Hopping rate / Number of channels) x Period

Period = 0.4 (seconds/ channel) x 79 (channel) = 31.6 seconds.

Hopping rate = 1 / (On+Off time) = 266 Hz

Test Plot of Time of Occupancy, GFSK modulation



Test Plot of Time of Occupancy, 8DPSK modulation



5.2 Mains Emissions

5.2.1 Mains Conducted Emissions

RESULT:**Passed**

Test standard : FCC Part 15.207
FCC Part 15.107
RSS-Gen 8.8

Limits : Mains Conducted emissions as defined in
above test standards must comply with the
mains conducted emission limits specified

Kind of test site : Shielded Room

Test setup

Test Channel : Middle
Operation mode : A

Ambient temperature : 22-26°C
Relative humidity : 50-65%
Atmospheric pressure : 100-103 kPa

Factor (dB/m)=Antenna Factor(dB/m)+Cable loss (dB)

Level(dBuV/m)=Reading(dBuV)+ Factor(dB/m)

Remark: For details refer to Appendix D.

6. Safety Human exposure

6.1 Radio Frequency Exposure Compliance

6.1.1 Electromagnetic Fields

RESULT:
Passed

 Test standard : FCC CFR 47 Part 2 Subpart J Section 2.1091
 RSS-102 Issue 5, Table 4

Separation distance is more than 20 cm, thus mobile device exposure limits can be applied.

FCC Maximum Exposure:

Mode	Frequency (MHz)	Antenna Gain (dBi)	Antenna Gain (numeric)	Maximum Output Power (dBm)	Output Power (mW)	Power Density (S)(mW/cm ²)	Test Result
8DPSK	2441	2.10	1.6218	6.36	4.3251	0.001396	Pass

Limit FCC: 1500-100,000 MHz 1.0 mW/cm²
IC Maximum Exposure:

Mode	Frequency (MHz)	Antenna Gain (dBi)	Antenna Gain (numeric)	Maximum Output Power (dBm)	Output Power (mW)	Power Density (S)(mW/cm ²)	Test Result
8DPSK	2402	2.10	1.6218	6.28	4.2462	0.001371	Pass

Limit Canada: 0.535 mW/cm²

 Table 4: RF Field Strength Limits for Devices Used by the General Public
 (Uncontrolled Environment)

Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m ²)	Reference Period (minutes)
0.003-10 ²¹	83	90	-	Instantaneous*
0.1-10	-	0.73/ f	-	6**
1.1-10	87/ $f^{0.5}$	-	-	6**
10-20	27.46	0.0728	2	6
20-48	58.07/ $f^{0.25}$	0.1540/ $f^{0.25}$	8.944/ $f^{0.5}$	6
48-300	22.06	0.05852	1.291	6
300-6000	3.142 $f^{0.3417}$	0.008335 $f^{0.3417}$	0.02619 $f^{0.6834}$	6
6000-15000	61.4	0.163	10	6
15000-150000	61.4	0.163	10	616000/ $f^{1.2}$
150000-300000	0.158 $f^{0.5}$	4.21 x 10 ⁻⁴ $f^{0.5}$	6.67 x 10 ⁻⁵ f	616000/ $f^{1.2}$

Note: f is frequency in MHz.
 *Based on nerve stimulation (NS).
 ** Based on specific absorption rate (SAR).


$$f = 2402, 0.02619 f^{0.6834} = 0.535$$

7. Photographs of the Test Set-Up


Photograph 1: Set-up for Spurious Emissions (Front View)



Photograph 2: Set-up for Spurious Emissions (Back View 1)

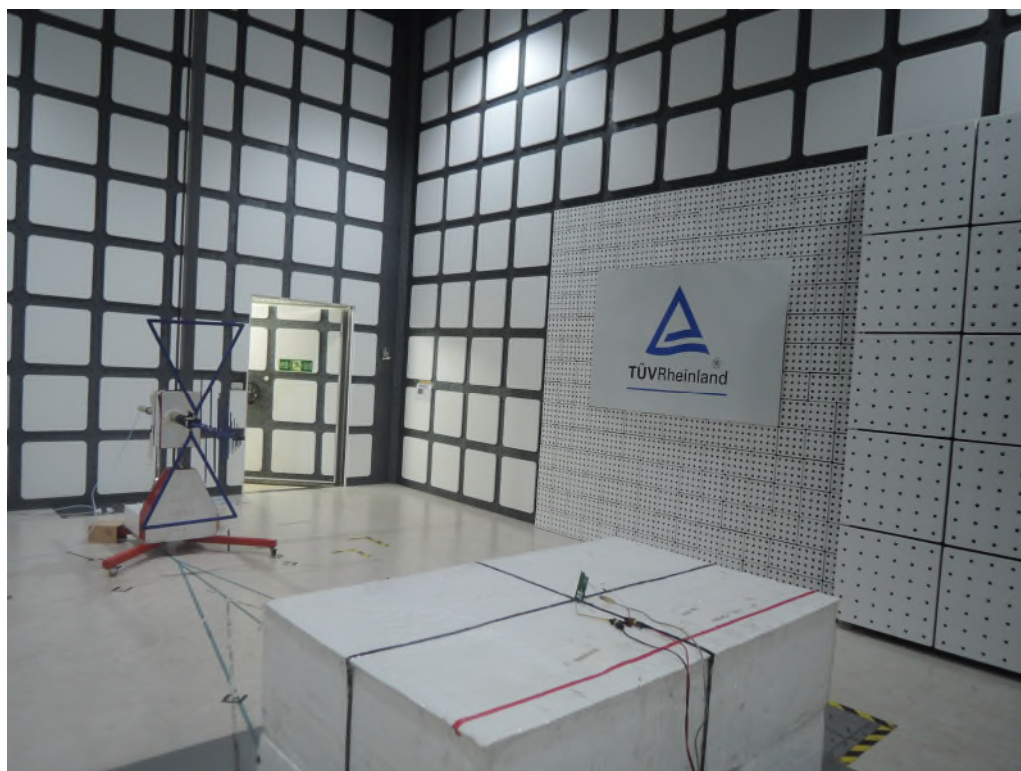


Photograph 3: Set-up for Spurious Emissions (Back View 2)

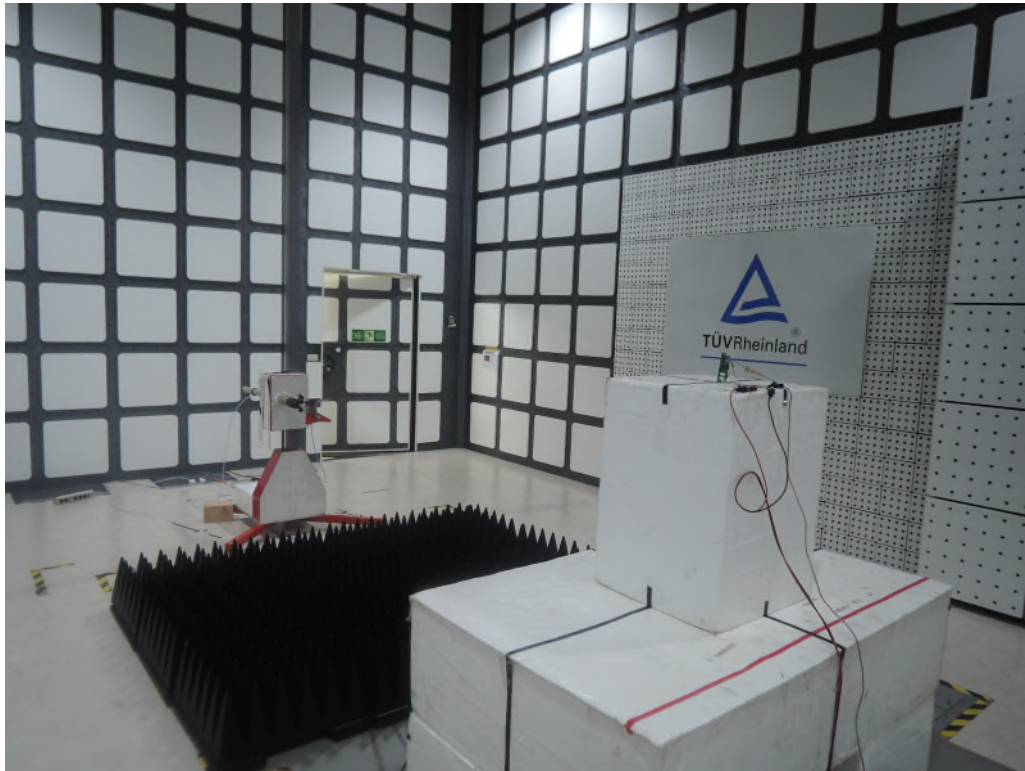


Photograph 4: Set-up for Conducted testing



Photograph 5: Set-up for for Mains Conducted testing Back

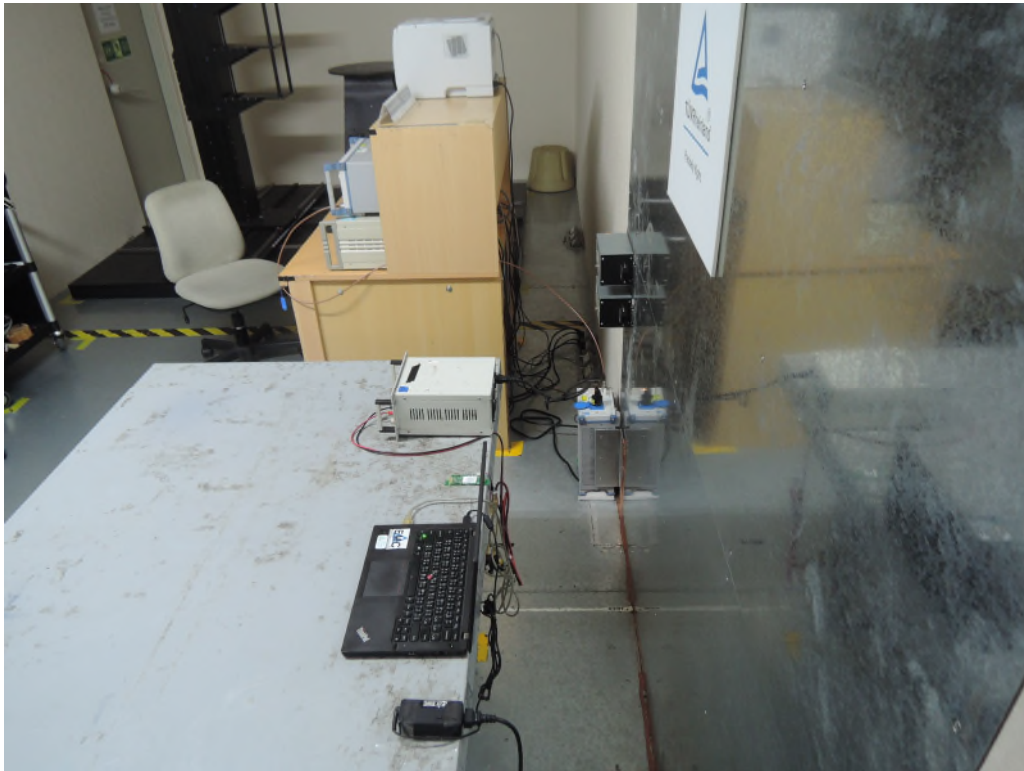

Photograph 6: Set-up for for Mains Conducted testing Front

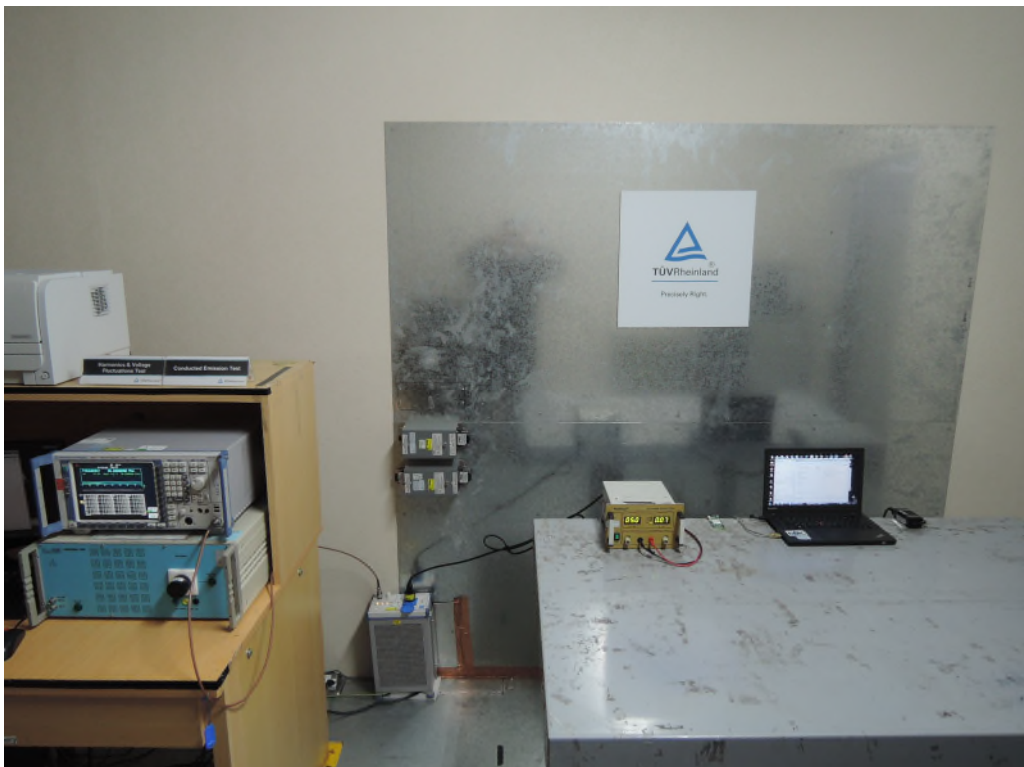

8. List of Tables

Table 1: Applied Standard and Test Levels	5
Table 2: List of Test and Measurement Equipment	7
Table 3: Emission Measurement Uncertainty.....	8
Table 4: Basic Information of EUT	9
Table 5: Technical Specification of EUT	9
Table 6: Frequency hopping information.....	10
Table 7: Test result of Peak Output Power, GFSK modulation.....	16
Table 8: Test result of Peak Output Power, 8DPSK modulation.....	16
Table 9: Test result of 20dB Bandwidth, GFSK modulation.....	17
Table 10: Test result of 20dB Bandwidth, 8DPSK modulation.....	17
Table 11: Test result of 99% Bandwidth, GFSK modulation	21
Table 12: Test result of 99% Bandwidth, PSK modulation.....	21
Table 11: Test result of Frequency Separation	32
Table 12: Test result of Number of hopping frequency	34
Table 13: Test result of Time of Occupancy.....	36

9. List of Photographs

Photograph 1: Set-up for Spurious Emissions (Front View).....	41
Photograph 2: Set-up for Spurious Emissions (Back View 1)	41
Photograph 3: Set-up for Spurious Emissions (Back View 2)	42
Photograph 4: Set-up for Conducted testing	42
Photograph 5: Set-up for for Mains Conducted testing Back.....	43
Photograph 6: Set-up for for Mains Conducted testing Front.....	43