

FCC / INDUSTRY CANADA MEASUREMENT REPORT

CERTIFICATION OF COMPLIANCE FCC PART90 & INDUSTRY CANADA RSS-119 CERTIFICATION

PRODUCT : Two Way Radio Land Mobile Service (LMR)
MODEL/TYPE NO : SM2102
FCC ID : RXUSM2102
TRADE NAME : 
APPLICANT : Maxon CIC Corp.
Chongho Building, #7-61 Yangjae-Dong, Seocho-Gu, Seoul, 137-130, Korea
Attn. : Hyun Koo Kang / Senior Manager
CLASSIFICATION : TNF Licensed Non-Broadcast Station Transmitter
FCC Part 90 Private land mobile radio services
RULE PART(S) : RSS-119 Land Mobile and Fixed Radio Transmitters and Receivers,
Issue 9 27.4 MHz to 960 MHz
FCC PROCEDURE : Certification
DATES OF TEST : October 20, 2008 to November 21, 2008
DATES OF ISSUE : November 21, 2008
TEST REPORT No. : BWS-08-RF-0016
TEST LAB. : BWS TECH Inc.(FCC Registration Number : 553281)

This Two Way Radio SM2102 has been tested in accordance with the measurement procedures specified in ANSI C63.4-2003 and ANSI/TIA-603-B-2002 at the BWS TECH/EMC Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part 90 and Industry Canada RSS-119.

I attest to the accuracy of data. All measurement herein was performed by me or were made under my supervision. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. The results of testing in this report apply to the product/system, which was tested only. Other similar equipment may not necessarily produce the same results due to production tolerance and measurement uncertainties.

November 21, 2008
(Date)



Tested by **Hyunsup, Jin**

November 21, 2008
(Date)



Reviewed by **TaeHyun, Nam**

BWS TECH Inc.

www.bws.co.kr

#611-1 Maesan-Ri, Mohyeon-Myeon, Yongin-Si, Gyeonggi-Do, 449-853 Korea
TEL: +82 31 333 5997 FAX: +82 31 333 0017

TABLE OF CONTENTS

	Pages
1. General Information	3
2. Description of Test Facility	4
3. Product Information	5
4. Summary of Test Results	7
5. Test Data	8
5.1. Power Line Conducted Emission	10
5.2. RF Power Output (Conducted)	12
5.3. Modulation Characteristics – Audio Frequency Response	14
5.4. Modulation Characteristics – Audio Lowpass Filter Response	18
5.5. Modulation Characteristics – Modulation Limiting	20
5.6. Occupied Bandwidth	29
5.7. Spurious Emissions at Antenna Terminals	43
5.8. Field Strength of Spurious Radiation	70
5.9. Frequency Stability/Temperature Variation	73
5.10. Transient Frequency Behavior	113
6. Test Equipment List	127
Appendix 1. Test Setup Photos	
Appendix 2. FCC ID Label and location	
Appendix 3. External Photos of EUT	
Appendix 4. Internal Photos of EUT	
Appendix 5. Block Diagram	
Appendix 6. Schematics	
Appendix 7. Theory of Operation	
Appendix 8. Part List / Tune up Procedure	
Appendix 9. User Manual	

FCC / INDUSTRY CANADA TEST REPORT

Scope – Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)

1. General Information

Applicant

Company Name Maxon CIC Corp.
Company Address Chongho Building, #7-61 Yangjea-Dong, Seocho-Gu, Seoul, 137-130, Korea
Phone/Fax Phone : +82-2-3498-3060 Fax : 02-3498-3115

Manufacturer

Company Name Maxon CIC Thailand Co., Ltd(MCTL)
Company Address 40/23 Moo 5 Rojana Industrial Park Tambol U-Thai, Amphur U-Thai Ayutthaya 13210 Thailand
Phone/Fax Tel No. : +66-(0)35-719-498~501 Fax No. : +66-(0)35-719-492

- **EUT Type** Two Way Radio (LMR)
- **Model Number** SM2102
- **FCC Identifier** RXUSM2102
- **S/N** Proto Type
- **FCC Rule Part(s)** FCC Part 90 Private land mobile radio services
RSS-119 Issue 9 Land Mobile and Fixed Radio Transmitters
and Receivers, 27.4 MHz to 960 MHz
- **FCC Classification** TNF : Licensed Non-Broadcast Station Transmitter
- **Freq. Range** 148 MHz ~ 174 MHz
- **Channel** 208 Channels
- **Modulation Method** FM
- **Emission Designator** 11K0F3E / 16K0F3E
- **RF Power Output** 2/25 Watt
- **Test Procedure** ANSI C63.4-2003 and ANSI/TIA-603-B-2002
- **Dates of Tests** October 27, 2008 to November 24, 2008
- **Place of Tests** BWS TECH Inc.(FCC Registration Number : 553281)
#611-1 Maesan-Ri, Mohyeon-Myeon, Yongin-Si, Gyeonggi-Do, 449-853 Korea
TEL: +82 31 333 5997 FAX: +82 31 333 0017
- **Test Report No.** BWS-08-RF-0016

2. Description of Test Facility

The measurement for radiated and conducted emission test were conducted at the open area test site of BWS TECH Inc. facility located at #611-1 Maesan-Ri, Mohyeon-Myeon, Yongin-Si, Gyeonggi-Do, 449-853 Korea. The site is constructed in conformance with the requirements of the ANSI C63.4-2000 and CISPR Publication 16. The BWS TECH measurement facility has been filed to the Commission with the FCC for 3 and 10-meter site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-2000 and registered to the Federal Communications Commission (Registration Number : 553281).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C.63.4-2000) was used in determining radiated and conducted emissions from the Maxon CIC Corp. Two Way Radio Model : SM2102.

3. Product Information

The Equipment Under Test (EUT) is the MAXON CIC CO LTD Two Way Radio model: SM2102(FCC ID: RXUSM2102).

SM2102 is FM transceiver operating between 148 ~ 174 MHz with an output power of 25 W (2 W at low power).

The SM2102 offers many advanced features found in more expensive Land Mobile Radios.

SM2102 is 208 channel portable FM transceiver constructed with a microprocessor controlled, temperature compensated Phase Locked Loop (PLL) frequency synthesizer. The radio features a double conversion receiver and a direct FM transmitter modulator.

3.1 Technical specification of EUT

Equipment Type	: Hand-portable
Performance Specifications	: FCC PART90 & INDUSTRY CANADA RSS-119 CERTIFICATION
Band	: VHF (148 ~ 174 MHz)
Channel Spacings	: 12.5 kHz / 25 kHz
RF Output Power	: 25 / 2 Watt
Modulation Type	: 11KOF3E /16KOF3E (FM)
Audio Power	: 4 W (INT with 16 Ω)
Intermediate Frequencies	: 1 st 45.1 MHz 2 nd 455 kHz
Channels	: 208 Channel
Frequency Source	: PLL Synthesizer
Inter-modulation	: +/- 25/50kHz Better than 65dB : +/- 50/100kHz Better than 65dB
Power Supply	: 13.8 Vdc NOMIN
AF Power	: 4W max
Audio Distortion	: less than 5%

3.2 EUT operating conditions & test configuration

3.2.1 Client Condition

Temperature : -30 °C ~ +60 °C

Humidity : 95 %

3.2.2 EUT Operating Condition

Operating Mode : Transmitter was operated in a continues transmission mode with the carrier modulated as specified in the test data.

Special test Software : Not Used.

Special test Hardware : Not Used.

TX Frequency Band : 148 MHz ~ 174 MHz

Test Frequencies :	1st	148.025 MHz
	2nd	161.025 MHz
	3rd	173.975 MHz

Modulation : FM Modulation

Modulation Signal Source : External Source

4. Summary of Test Results

TEST REQUIREMENTS	FCC Paragraph	IC Paragraph	Result
Power Line Conducted Emission	§15.207	RSS-Gen §7.2.2	Pass
RF Power Output (Conducted)	§2.1046	RSS-Gen §6	Pass
Audio Frequency Response	§2.1047(A)	RSS-119 Issue 9 §5.2	Pass
Audio Low pass Filter Response	§2.1047(A)	RSS-119 Issue 9 §5.5	Pass
Modulation Limiting	§2.1047(B)	RSS-119 Issue 9 §5.2	Pass
Occupied Bandwidth	§2.1049	RSS-119 Issue 9 §5.5	Pass
Spurious Emissions at Antenna Terminals	§2.1051	RSS-119 Issue 9 §5.8	Pass
Field Strength of Spurious Radiation	§2.1053	RSS-119 Issue 9 §5.8	Pass
Frequency Stability/Temperature Variation	§2.1055	RSS-119 Issue 9 §5.3	Pass
Transient Frequency Behavior	§90.214	RSS-119 Issue 9 §5.9	Pass

5. TEST DATA

5.1 Power Line Conducted Emission

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 kHz on the 230V AC power and return leads of the EUT according to the methods defined in FCC Part 15.207. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 3.1.5. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position producing maximum conducted emissions.

5.1.1 Test Condition

Frequency Range of Test : 150 kHz to 30 MHz

Test Standard : FCC Part 15.207

Test Date : October 29, 2008

Temperature/Humidity : 26 °C/ 42 %

5.1.2 Test Standard

Item	Frequency Range (MHz)	Limit (dBuV)	
		Quasi-Peak	Average-Peak
☐ Class A	0.15 ~ 0.5	79	66
	0.5 ~ 30	73	60
☒ Class B	0.15 ~ 0.5	66 – 56	56 – 46
	0.5 ~ 5	56	46
	5 ~ 30	60	50

5.1.3 Test Equipment List

Equipment Type	Model	Manufacture	Serial No	Cal Due Date
TEST RECEIVER	ESPI	ROHDE & SCHWARZ	100063	11. 19. 2009
Conducted Cable	N/A	N/A	N/A	N/A
LISN	FCC-LISN-50-50-2-02	FCC	03074	11. 02. 2009

5.1.4 Test Result of Power Line Conducted Emission

EUT : SM2102
Input Voltage : 230V, 50Hz

Power Line Conducted Emission Test Results : **PASS**

Test data sheets follow.

Freq [MHz]	Correction		Phase [H/N]	Quasi-Peak Mode				Average Mode			
	AMN	C.L		Limit	Reading	Emission Level	Margin	Limit	Reading	Emission Level	Margin
				[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]
0.186	0.06	0.03	H	65.00	46.24	46.33	18.67	57.71	35.76	35.85	21.86
0.250	0.07	0.16	H	63.10	44.57	44.80	18.30	55.30	39.65	39.88	15.42
0.378	0.08	0.24	H	59.60	41.73	42.05	17.55	50.67	35.72	36.04	14.63
0.626	0.07	0.30	N	56.00	38.47	38.84	17.16	46.00	31.70	32.07	13.93
2.246	0.03	0.56	H		49.44	50.03	5.97		40.57	41.16	4.84
2.518	0.03	0.57	H		41.35	41.95	14.05		31.97	32.57	13.43
10.258	0.07	1.04	H	60.00	45.08	46.19	9.81	50.00	44.07	45.18	4.82
14.510	0.07	1.22	H		41.71	43.00	17.00		39.63	40.92	9.08
29.770	0.27	1.67	N		24.02	25.96	34.04		19.90	21.84	28.16

Notes:

1. All modes of operation were investigated and the worst-case emissions are reported. See the plots in next 2 pages.
2. Line N = (Neutral), Line H = (Hot)
3. Measurement uncertainty estimated at ± 1.38 dB.
The measurement uncertainty is given with a confidence of 95.45 % with the coverage factor, k=2


PLOTS OF EMISSIONS



RBW 9 kHz

MT 20 ms

Att 0 dB AUTO PREAMP OFF

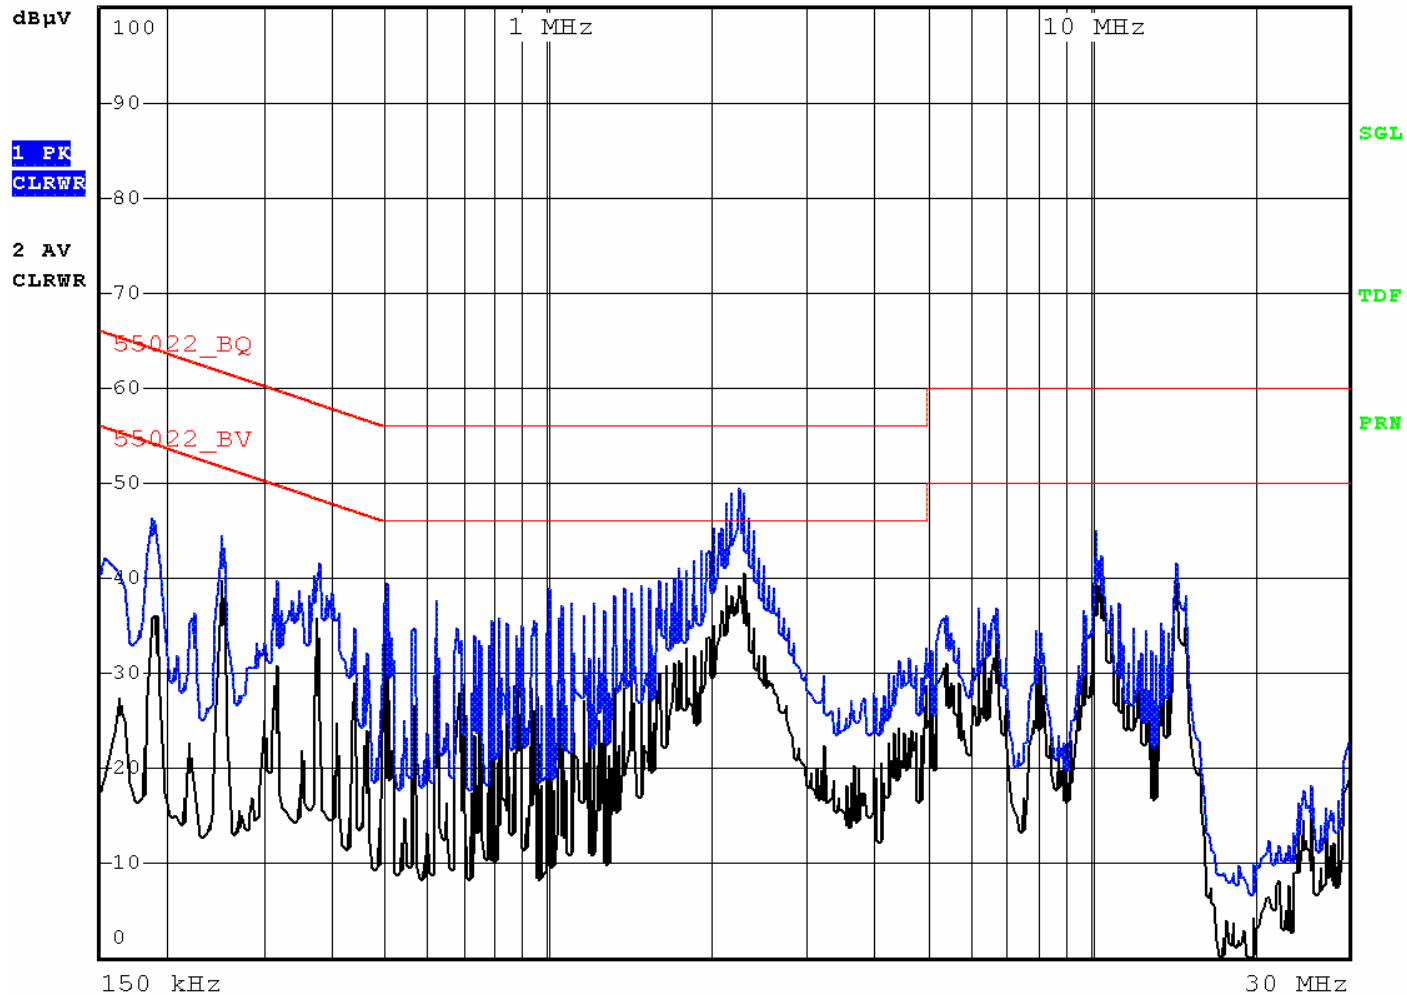

Test Model: SM2102
Test Mode: HOT
Classification: FCC Part 15.207


PLOTS OF EMISSIONS



RBW 9 kHz

MT 20 ms

Att 0 dB AUTO PREAMP OFF

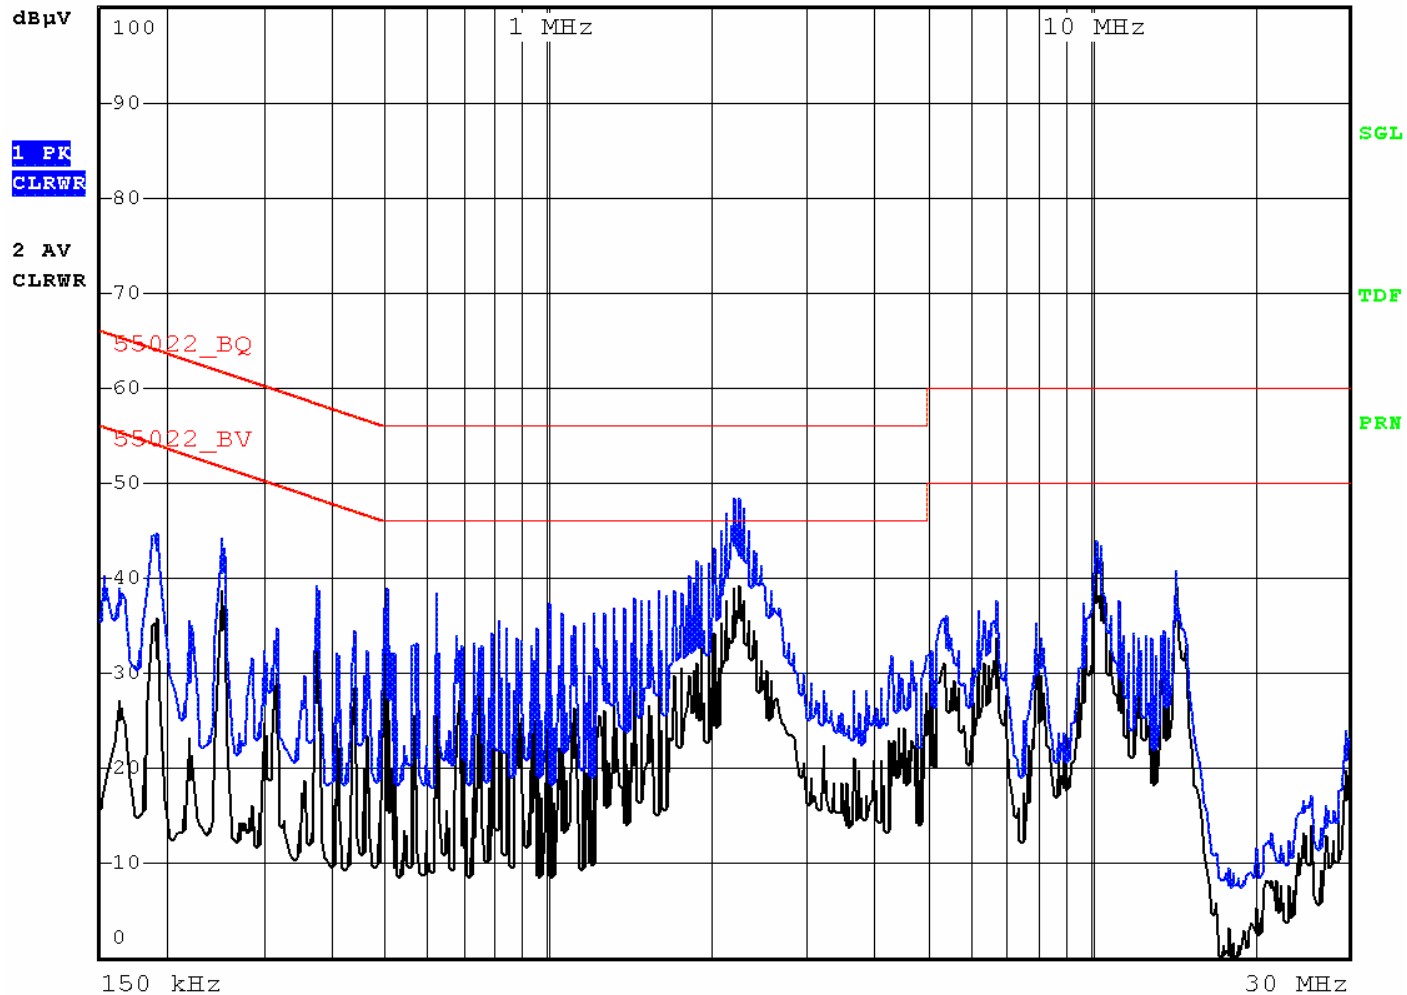

Test Model: SM2102
Test Mode: NEUTRAL
Classification: FCC Part 15.207

5.2 RF Power Output (Conducted)

5.2.1 Specification

FCC Rules Part 2, Section 2.1046
FCC Rules Part 90, Section 90.205(d)
Industry Canada, RSS-119 Issue 9 Section 5.4

5.2.2 Method of Measurement

ANSI/TIA-603-B-2002 Section 2.2.1

5.2.3 Measurement Set-Up

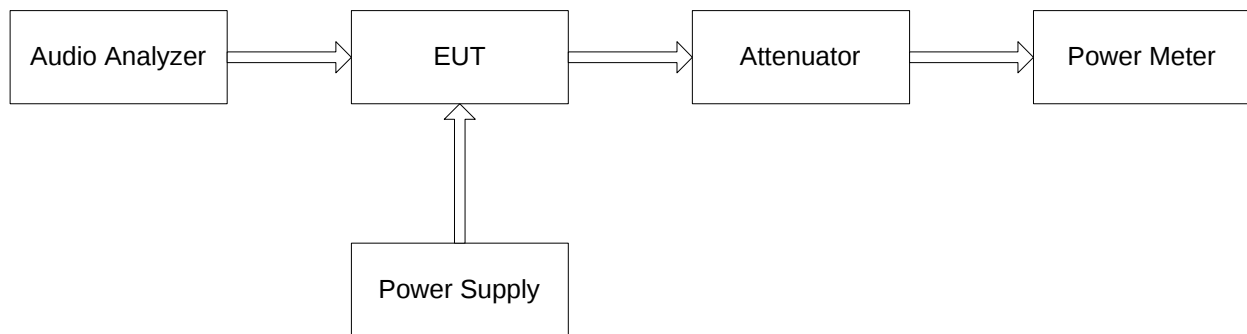


Fig.1

5.2.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SM2102	Maxon CIC Corp.
Power Supply	IPS-30B03DD	INTERACT
Audio Analyzer	8903B	Agilent
Attenuator	33-30-33	WEINSCHEL
Power Sensor	8481A	Agilent
Power Meter	E4418A	Agilent

5.2.5 Test Procedure

- The unit was turn-up in accordance with the alignment procedure stated in the FIG. 1 , and was loaded into a 50 ohm resistive termination.
- The unit was powered though its normally accompanied power cord by a DC power supply.
- Power supply voltage was set to nominal voltage at the power supply terminals with transmitter off.
- The unit was operated for three consecutive test cycles of 15 minutes standby and 5 minutes in transmitting.
- The EUT was aligned for transmitter operation on three frequencies(F_o) at full rated power per the tune-up procedure outlined in the Product Specification. This represents frequencies at the 1st, 2nd, 3rd and 4th end of the EUT operating frequency band.

5.2.6 Test Result

Test Mode	Frequency (MHz)	Measured Power Output (dBm)	Rated Power (Watts)	FCC Limit (Watts)
Low Power (2W)	148.025	34.23	2.65	Varies
	161.025	34.34	2.72	Varies
	173.975	34.19	2.62	Varies
High Power (25W)	148.025	43.29	21.33	Varies
	161.025	43.58	22.80	Varies
	173.975	43.41	21.93	Varies

5.3 Modulation Characteristics – Audio Frequency Response

5.3.1 Specification

FCC Rules Part 2, Section 2.1047(a)
FCC Rules Part 90, Section 90.207 & 90.242(b)(8)
Industry Canada, RSS-119 Issue 9 Section 5.2

5.3.2 Method of Measurement

ANSI/TIA-603-B-2002 Section 2.2.6

5.3.3 Measurement Set-Up

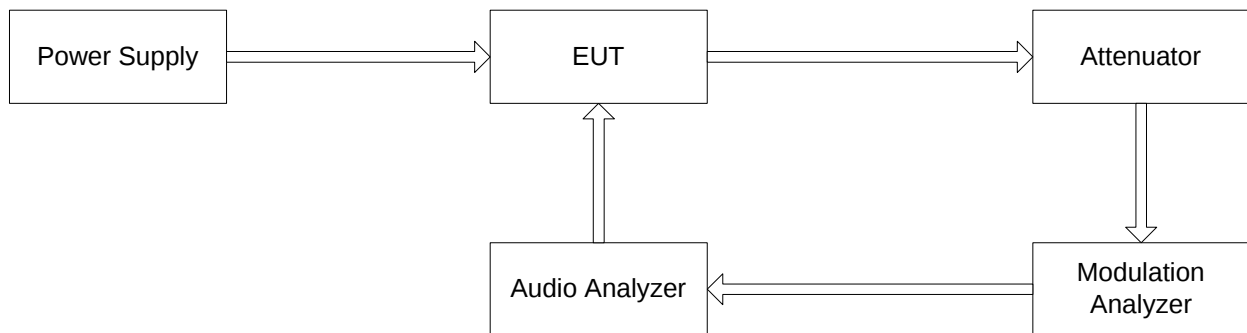


Fig.2

5.3.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SM2102	Maxon CIC Corp.
Power Supply	IPS-30B03DD	INTERACT
Audio Analyzer	8903B	Agilent
Modulation Analyzer	8901B	Agilent
Attenuator	33-30-33	WEINSCHEL

5.3.5 Test Procedure

- The unit was turn-up in accordance with the alignment procedure stated in the FIG. 2 , and was loaded into a 50 ohm resistive termination.
- The audio analyzer was connected to the audio input circuit/microphone of the EUT.
- The audio signal input was adjusted to obtain 20% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
- With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 10 kHz.
- The response in dB relative to 1 kHz was then measured, using the HP 8901A Modulation Analyzer.
- No limit is required by the FCC for audio frequency response. The measured audio response data shows the roll-off curve at 3 kHz.


5.3.6 Test Results

5.3.6.1 Test Data 1

FCC Rules :	Part 2 §2.1047(a) & §90.242(b)(8)
IC Rules :	RSS-119 Issue 9 Section 5.2
Operating Frequency :	148.025 MHz
Channel :	1st Channel
Reference Voltage :	13.8 VDC
Power Output :	25 Watts

Audio Input Frequency (Hz)	Attenuation (dB)	
	Channel Spacing : 12.5 kHz	Channel Spacing : 25 kHz
100	-32.34	-19.51
200	-32.27	-19.11
300	-12.56	-11.55
400	-8.52	-8.27
500	-6.32	-6.19
600	-4.65	-4.50
700	-3.22	-3.16
800	-2.00	-1.96
900	-0.94	-0.99
1000	0.00	0.00
1500	3.40	3.33
2000	5.56	5.49
2500	6.31	7.70
3000	5.24	8.29
4000	-32.13	-18.31
5000	-31.96	-18.95
6000	-32.11	-19.46
7000	-32.11	-19.48
8000	-32.51	-19.48
9000	-32.51	-19.48
10000	-32.51	-19.48

5.3.6.2 Graph

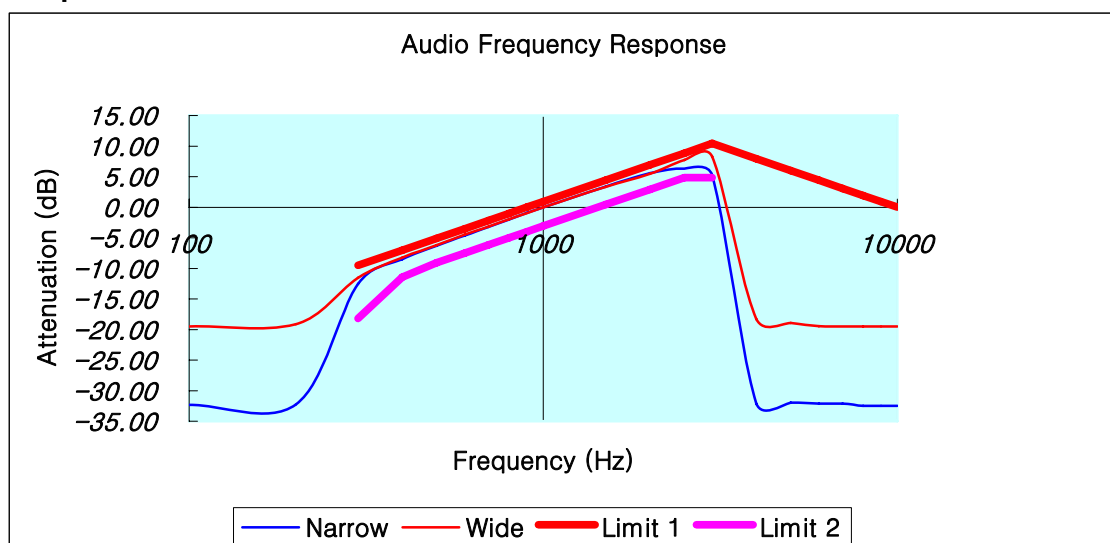


5.3.6.3 Test Data 2

FCC Rules :	Part 2 §2.1047(a) & §90.242(b)(8)
IC Rules :	RSS-119 Issue 9 Section 5.2
Operating Frequency :	161.025 MHz
Channel :	2nd Channel
Reference Voltage :	13.8 VDC
Power Output :	25 Watts

Audio Input Frequency (Hz)	Attenuation (dB)	
	Channel Spacing : 12.5 kHz	Channel Spacing : 25 kHz
100	-31.96	-17.90
200	-31.66	-17.64
300	-12.35	-10.70
400	-8.55	-8.19
500	-6.40	-6.18
600	-4.68	-4.49
700	-3.26	-2.93
800	-2.02	-1.84
900	-0.95	-0.96
1000	0.00	0.00
1500	3.42	3.40
2000	5.67	5.61
2500	6.55	7.83
3000	4.45	8.43
4000	-31.13	-15.71
5000	-31.84	-17.44
6000	-31.84	-18.04
7000	-32.07	-18.43
8000	-32.07	-18.43
9000	-32.07	-18.48
10000	-32.07	-18.48

5.3.6.4 Graph 2

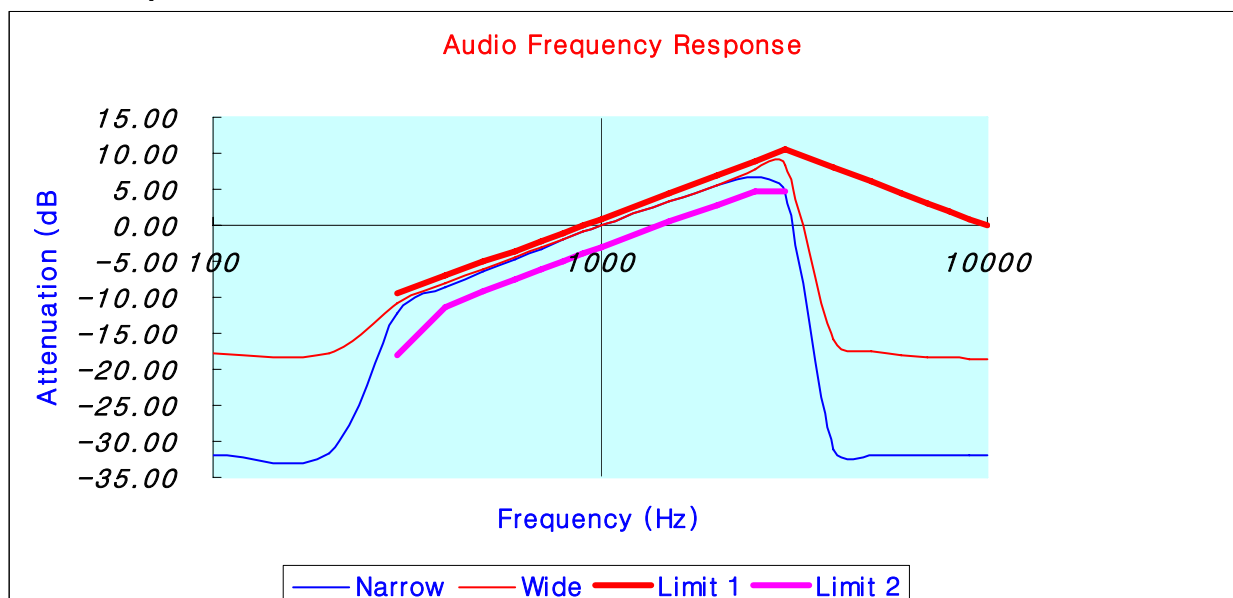


5.3.6.5 Test Data 3

FCC Rules :	Part 2 §2.1047(a) & §90.242(b)(8)
IC Rules :	RSS-119 Issue 9 Section 5.2
Operating Frequency :	173.975 MHz
Channel :	3rd Channel
Reference Voltage :	13.8 VDC
Power Output :	25 Watts

Audio Input Frequency (Hz)	Attenuation (dB)	
	Channel Spacing : 12.5 kHz	Channel Spacing : 25 kHz
100	-31.12	-18.59
200	-30.57	-18.21
300	-12.03	-9.96
400	-8.50	-7.58
500	-6.42	-5.95
600	-4.72	-4.49
700	-3.27	-3.18
800	-2.04	-1.97
900	-0.96	-1.89
1000	0.00	0.00
1500	3.40	3.47
2000	5.58	5.71
2500	6.77	7.97
3000	4.65	8.55
4000	-30.53	-18.49
5000	-30.79	-19.00
6000	-30.79	-19.37
7000	-30.79	-19.37
8000	-30.79	-19.44
9000	-30.79	-19.44
10000	-30.79	-19.44

5.3.6.6 Graph 3

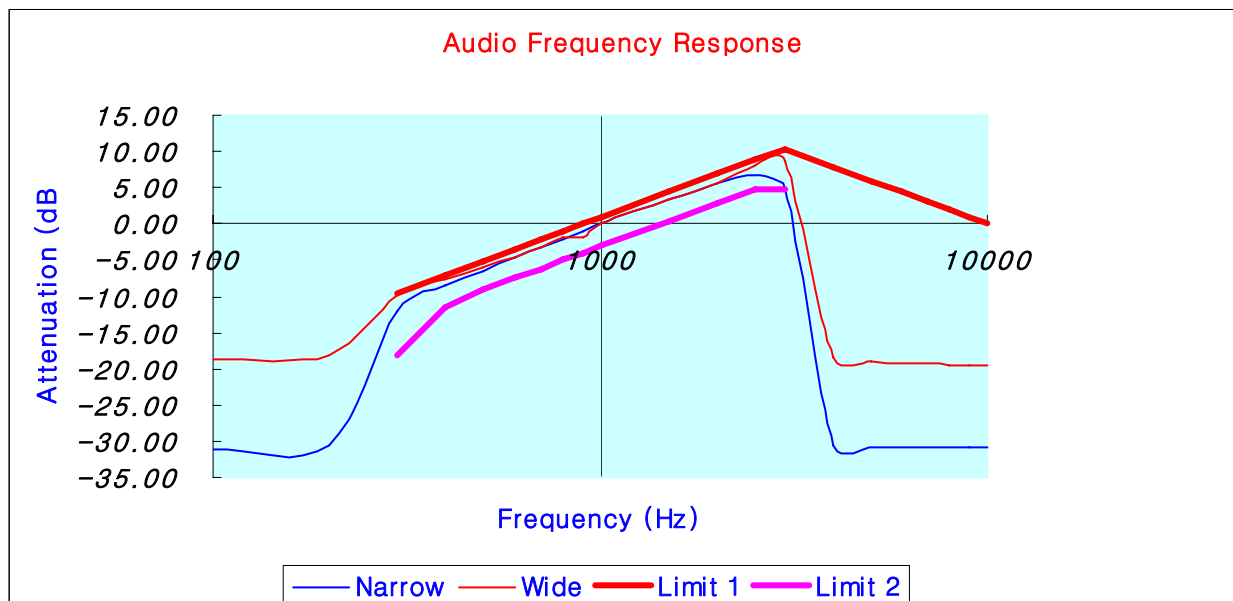

5.4 Modulation Characteristics – Audio Low pass Filter Response

5.4.1 Specification

FCC Rules Part 2, Section 2.1047(a)
FCC Rules Part 90, Section 90.207 & 90.242(b)(8)
Industry Canada, RSS-119 Issue 9 Section 5.5

5.4.2 Method of Measurement

ANSI/TIA-603-B-2002 Section 2.2.15

5.4.3 Measurement Set-Up

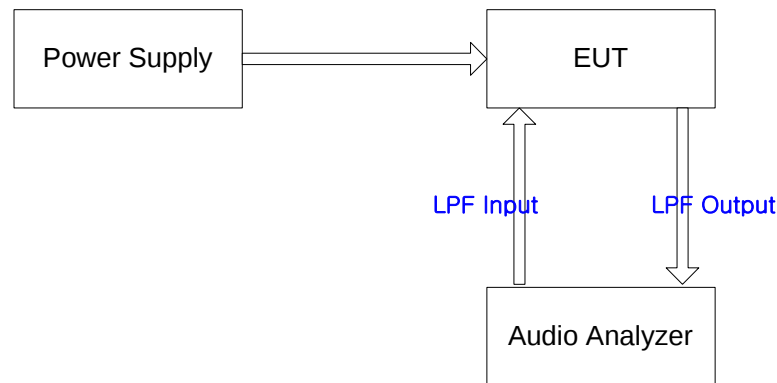


Fig.3

5.4.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SM2102	Maxon CIC Corp.
Power Supply	IPS-30B03DD	INTERACT
Audio Analyzer	8903B	Agilent

5.4.5 Test Procedure


- The unit was turn-up in accordance with the alignment procedure stated in the FIG. 3 , and was loaded into a 50 ohm resistive termination.
- To measure the audio low pass filter response, an audio analyzer were connected to the actual Printed Circuit Board of the transmitter.
- Audio analyzer monitored the output of the audio filter.
- An AF input level was maintained constant at least 10 dB below the saturation level at 1 kHz tone.
- Record the dB level of the 1 kHz tone of the audio analyzer.
- Set the audio input frequency to desired test frequency between 3 kHz and upper low pass filter limit.
- Record dB level on the audio analyzer.
- Calculate the audio frequency response as $LPF\ response = LEV_{FREQ} - LEV_{REF}$
- Audio frequencies in 3 kHz to 20 kHz : Minimum Attenuation to reference point shell be greater than $60\log(f/3)$ dB, above 20 kHz, at least 50dB attenuation. ("f" in kHz)

5.4.5 Test Result

5.4.5.1 Data

Audio Input Frequency (Hz)	Attenuation (dB)	Limit (dB)
100	-0.2	
200	0	-
400	0.3	-
600	0.3	-
800	0.3	-
1000	0.2	-
1500	0.8	-
2000	2.1	-
2500	-0.2	-
3000	-4.8	0
3500	-13.1	-6.7
4000	-20.4	-12.5
4500	-31.2	-17.6
5000	-35.8	-22.2
6000	-47.1	-30.1
7000	-59	-36.8
8000	-71.2	-42.6
9000	-75.3	-47.7
10000	-84.9	-52.3

5.4.5.2 Graph

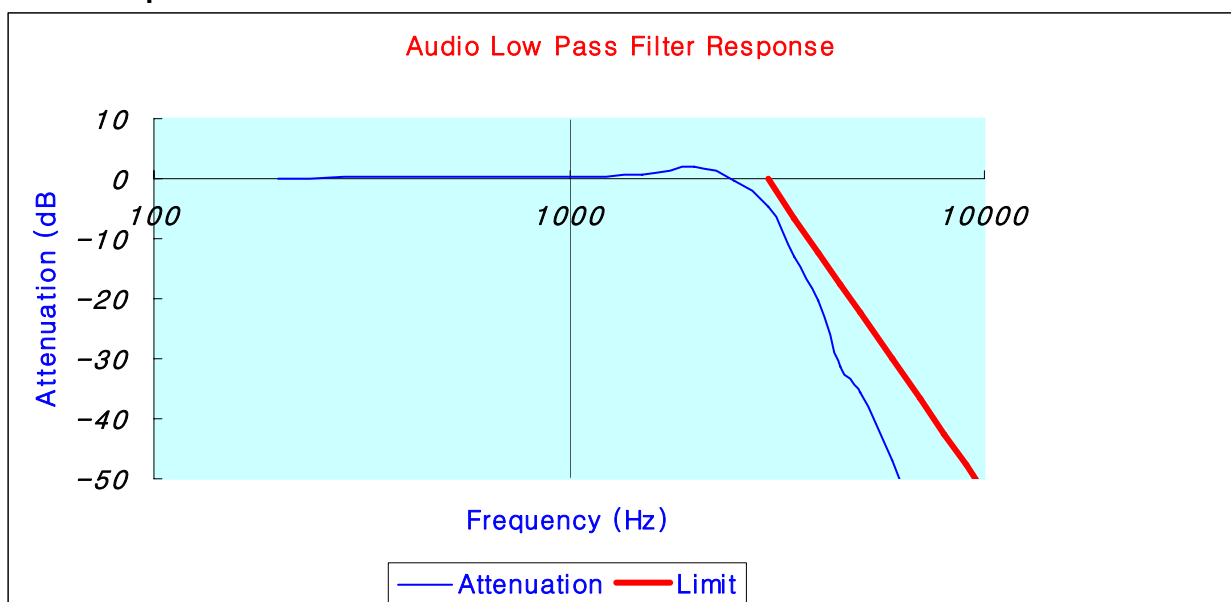

5.5 Modulation Characteristics – Modulation Limiting

5.5.1 Specification

FCC Rules Part 2, Section 2.1047(b)
FCC Rules Part 90, Section 90.207
Industry Canada, RSS-119 Issue 9 Section 5.2

5.5.2 Method of Measurement

ANSI/TIA-603-B-2002 Section 2.2.3

5.5.3 Measurement Set-Up

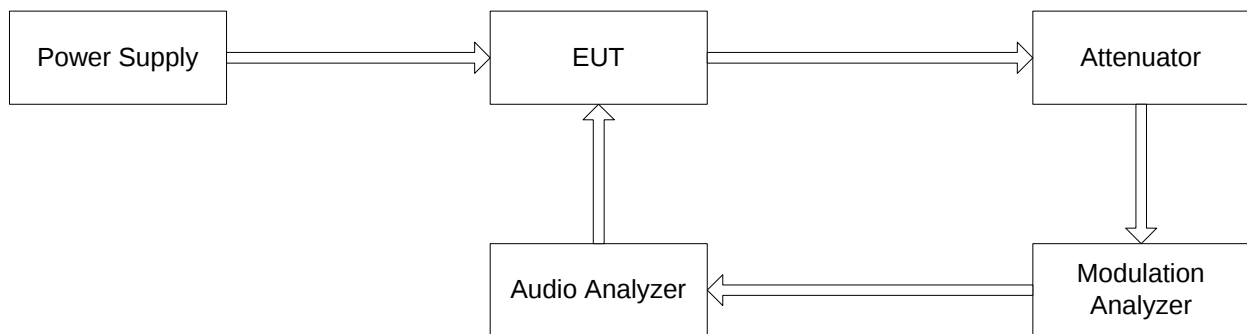


Fig.4

5.5.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SM2102	Maxon CIC Corp.
Power Supply	IPS-30B03DD	INTERACT
Audio Analyzer	8903B	Agilent
Modulation Analyzer	8901B	Agilent
Attenuator	33-30-33	WEINSCHEL

5.5.5 Test Procedure

- The unit was turn-up in accordance with the alignment procedure stated in the FIG. 4, and was loaded into a 50 ohm resistive termination.
- Apply an 1kHz modulating signal to EUT from the audio frequency analyzer, and adjust the level to obtain 60% of full rated system deviation.
- Increase the level from the AF generator by ± 20 dB in one step.
- Measure the steady-state deviation.
- With the AF generator level hold constant, vary the audio frequency from 300 Hz to 3000 Hz. Record the maximum deviation.
- Set the modulation analyzer to measure the peak negative deviation and repeat the test above.

5.5.6 Test Result

5.5.6.1 Data (Narrow Band, 1st Channel)

Audio Input Level (dB)	Positive Peak Deviation (kHz)			Negative Peak Deviation (kHz)		
	300 Hz	1 kHz	3 kHz	300 Hz	1 kHz	3 kHz
-20	0.08	0.23	0.39	0.07	0.22	0.36
-15	0.11	0.38	0.67	0.11	0.36	0.63
-10	0.18	0.6	1.04	0.16	0.62	1.03
-5	0.29	1.16	1.15	0.28	1.08	1.14
0	0.51	1.5	1.21	0.48	1.5	1.21
+5	0.86	1.65	1.21	0.83	1.67	1.21
+10	1.26	1.69	1.21	1.29	1.74	1.22
+15	1.4	1.72	1.21	1.44	1.77	1.22
+20	1.53	1.73	1.21	1.54	1.78	1.22

5.5.6.2 Data (Narrow Band, 2nd Channel)

Audio Input Level (dB)	Positive Peak Deviation (kHz)			Negative Peak Deviation (kHz)		
	300 Hz	1 kHz	3 kHz	300 Hz	1 kHz	3 kHz
-20	0.08	0.22	0.37	0.08	0.21	0.35
-15	0.11	0.36	0.64	0.12	0.35	0.61
-10	0.17	0.62	1.05	0.16	0.59	1.03
-5	0.28	1.07	1.18	0.27	1.03	1.17
0	0.49	1.5	1.24	0.46	1.5	1.25
+5	0.83	1.66	1.25	0.8	1.68	1.25
+10	1.28	1.73	1.25	1.32	1.76	1.26
+15	1.39	1.75	1.25	1.45	1.79	1.26
+20	1.49	1.76	1.25	1.53	1.8	1.26

5.5.6.3 Data (Narrow Band, 3rd Channel)

Audio Input Level (dB)	Positive Peak Deviation (kHz)			Negative Peak Deviation (kHz)		
	300 Hz	1 kHz	3 kHz	300 Hz	1 kHz	3 kHz
-20	0.09	0.22	0.35	0.08	0.2	0.33
-15	0.12	0.34	0.6	0.11	0.32	0.56
-10	0.18	0.58	1.03	0.17	0.54	0.97
-5	0.28	0.99	1.21	0.27	0.95	1.21
0	0.47	1.5	1.28	0.45	1.5	1.28
+5	0.81	1.69	1.29	0.76	1.7	1.29
+10	1.37	1.78	1.3	1.33	1.81	1.3
+15	1.42	1.8	1.3	1.48	1.84	1.3
+20	1.49	1.81	1.3	1.55	1.85	1.3

5.5.6.5 Data (WideBand, 1st Channel)

Audio Input Level (dB)	Positive Peak Deviation (kHz)			Negative Peak Deviation (kHz)		
	300 Hz	1 kHz	3 kHz	300 Hz	1 kHz	3 kHz
-20	0.13	0.44	1.17	0.11	0.38	1.02
-15	0.21	0.77	2.06	0.18	0.67	1.78
-10	0.34	1.34	2.72	0.3	1.17	2.72
-5	0.59	2.34	2.85	0.52	2.08	2.94
0	1.03	3	2.95	0.91	3	3.02
+5	1.79	3.33	2.95	1.62	3.48	3.03
+10	2.52	3.47	2.96	2.61	3.67	3.03
+15	2.82	3.51	2.96	2.92	3.77	3.03
+20	3.25	3.52	2.96	3.31	3.78	3.03

5.5.6.6 Data (WideBand, 2nd Channel)


Audio Input Level (dB)	Positive Peak Deviation (kHz)			Negative Peak Deviation (kHz)		
	300 Hz	1 kHz	3 kHz	300 Hz	1 kHz	3 kHz
-20	0.13	0.42	1.11	0.12	0.37	0.98
-15	0.2	0.72	1.95	0.18	0.64	1.73
-10	0.34	1.25	2.71	0.31	1.12	2.67
-5	0.56	2.18	2.85	0.51	1.98	2.95
0	0.98	3	3.07	0.89	3	3.12
+5	1.71	3.41	3.08	1.57	3.49	3.13
+10	2.47	3.54	3.08	2.64	3.74	3.13
+15	2.73	3.62	3.08	2.91	3.83	3.14
+20	3.18	3.63	3.08	3.07	3.85	3.13

5.5.6.7 Data (WideBand, 3rd Channel)


Audio Input Level (dB)	Positive Peak Deviation (kHz)			Negative Peak Deviation (kHz)		
	300 Hz	1 kHz	3 kHz	300 Hz	1 kHz	3 kHz
-20	0.13	0.39	1.03	0.13	0.36	0.94
-15	0.2	0.67	1.81	0.19	0.61	1.64
-10	0.32	1.15	2.78	0.3	1.06	2.73
-5	0.54	2.02	3.05	0.5	1.87	3.06
0	0.94	3	3.18	0.85	3	3.22
+5	1.64	3.45	3.19	1.49	3.56	3.24
+10	2.71	3.66	3.2	2.67	3.84	3.25
+15	2.76	3.74	3.2	2.96	3.96	3.25
+20	2.94	3.76	3.2	3.11	3.98	3.25

5.5.7 Graph


5.5.7.1 Narrow Band, 1st Channel, Positive

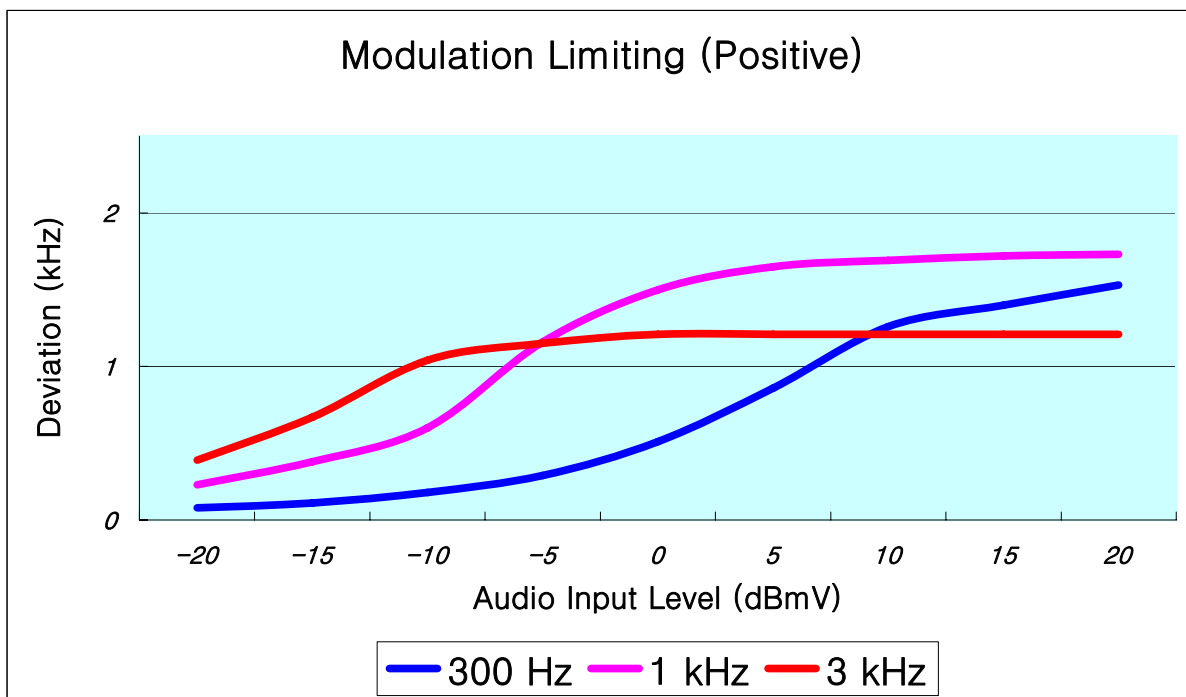


5.5.7.2 Narrow Band, 1st Channel, Negative

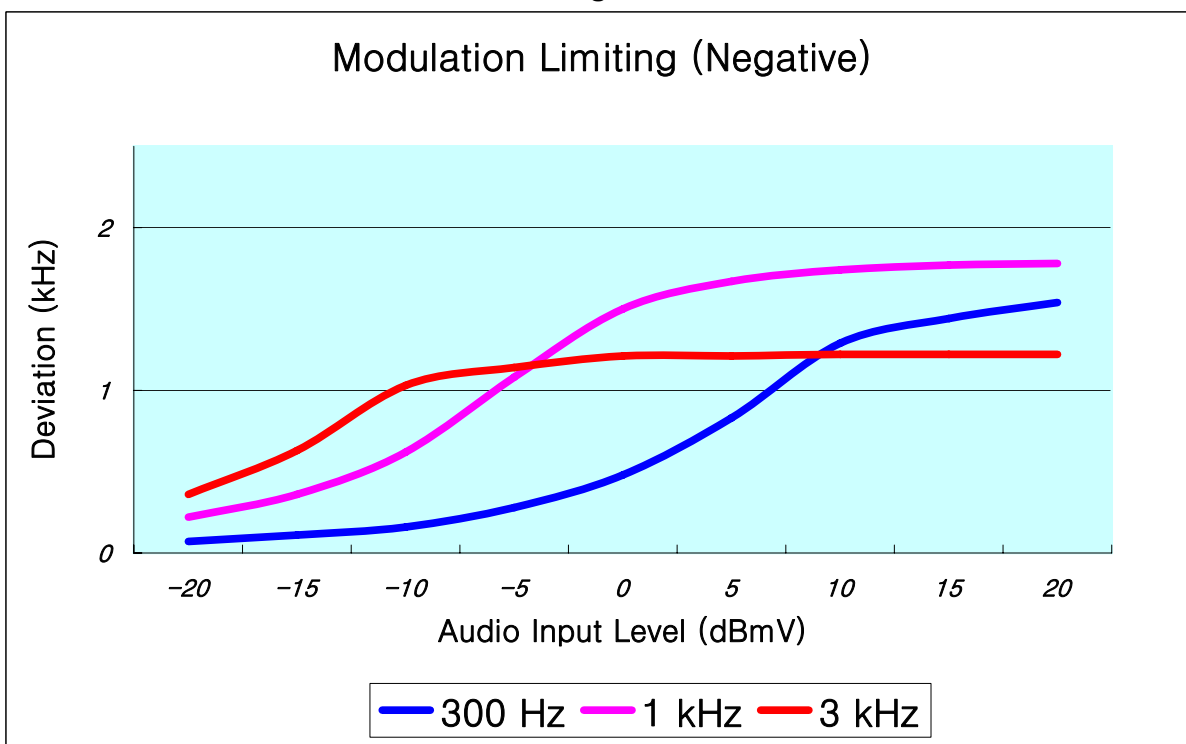


5.5.7.3 Narrow Band, 2nd Channel, Positive

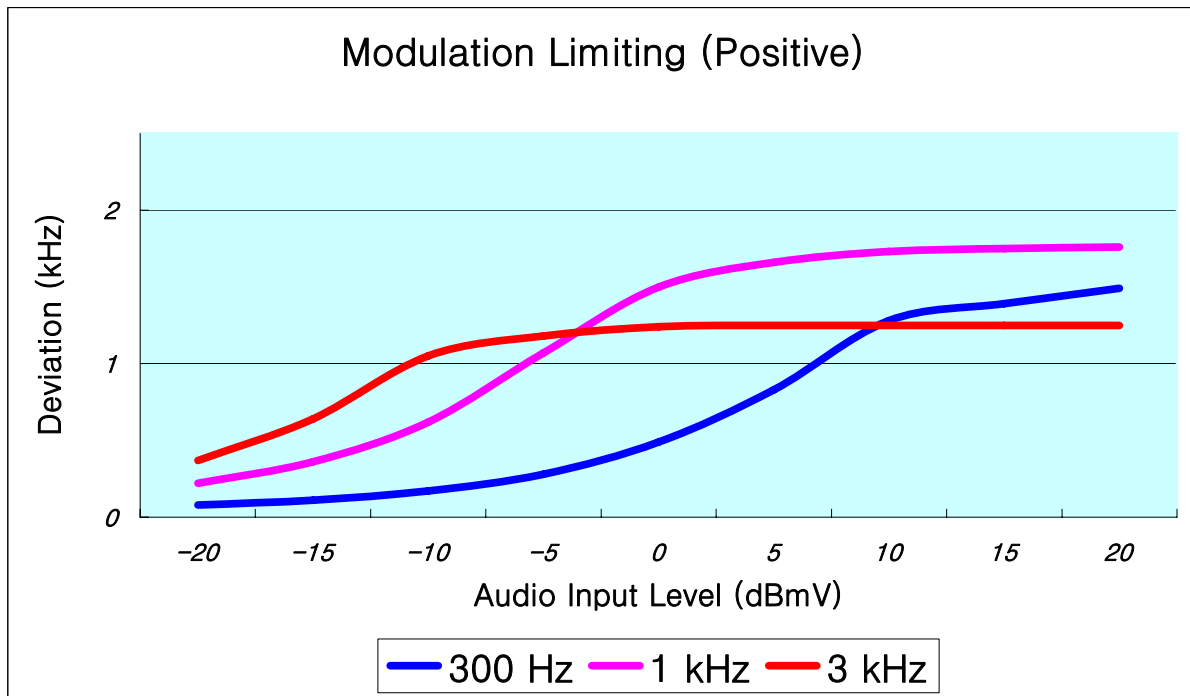


5.5.7.4 Narrow Band, 2nd Channel, Negative

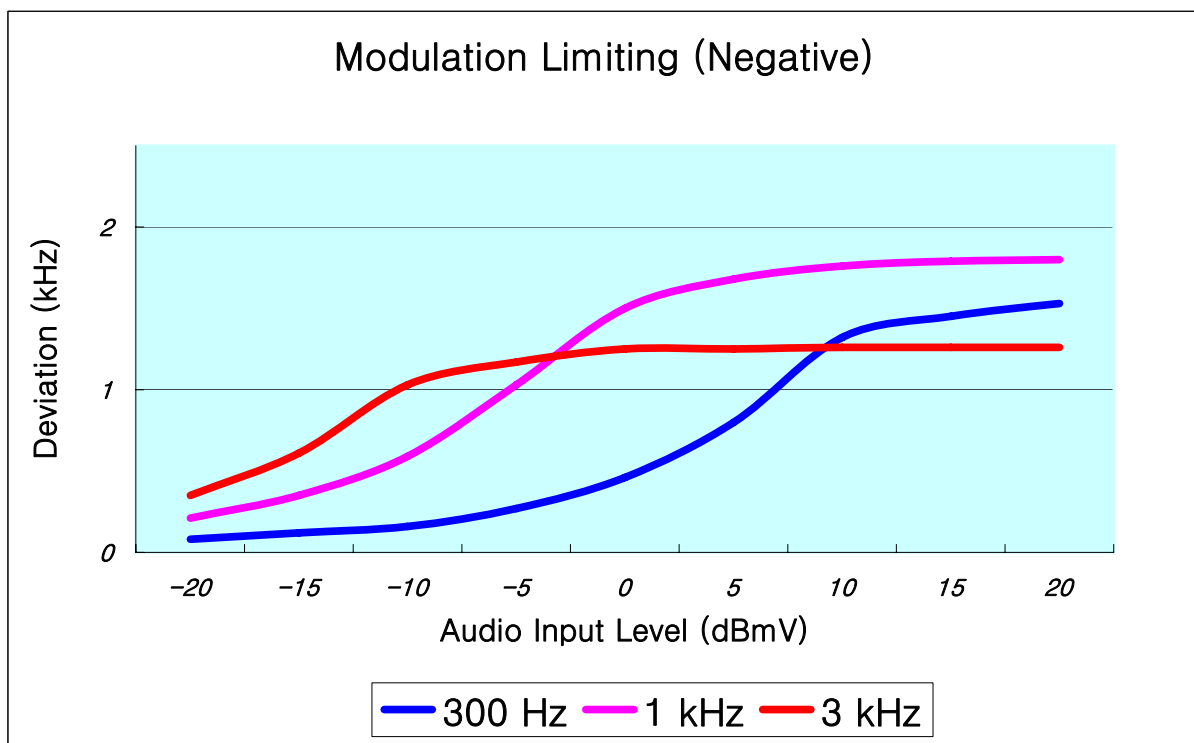


5.5.7.5 Narrow Band, 3rd Channel, Positive

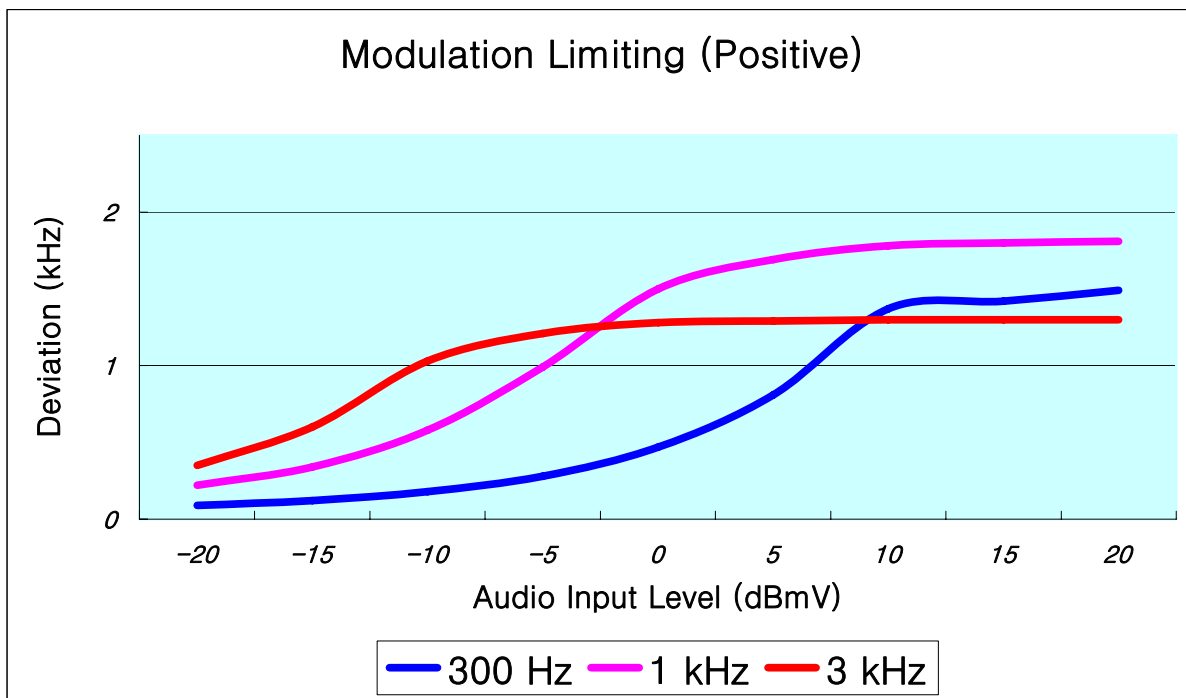


5.5.7.6 Narrow Band, 3rd Channel, Negative

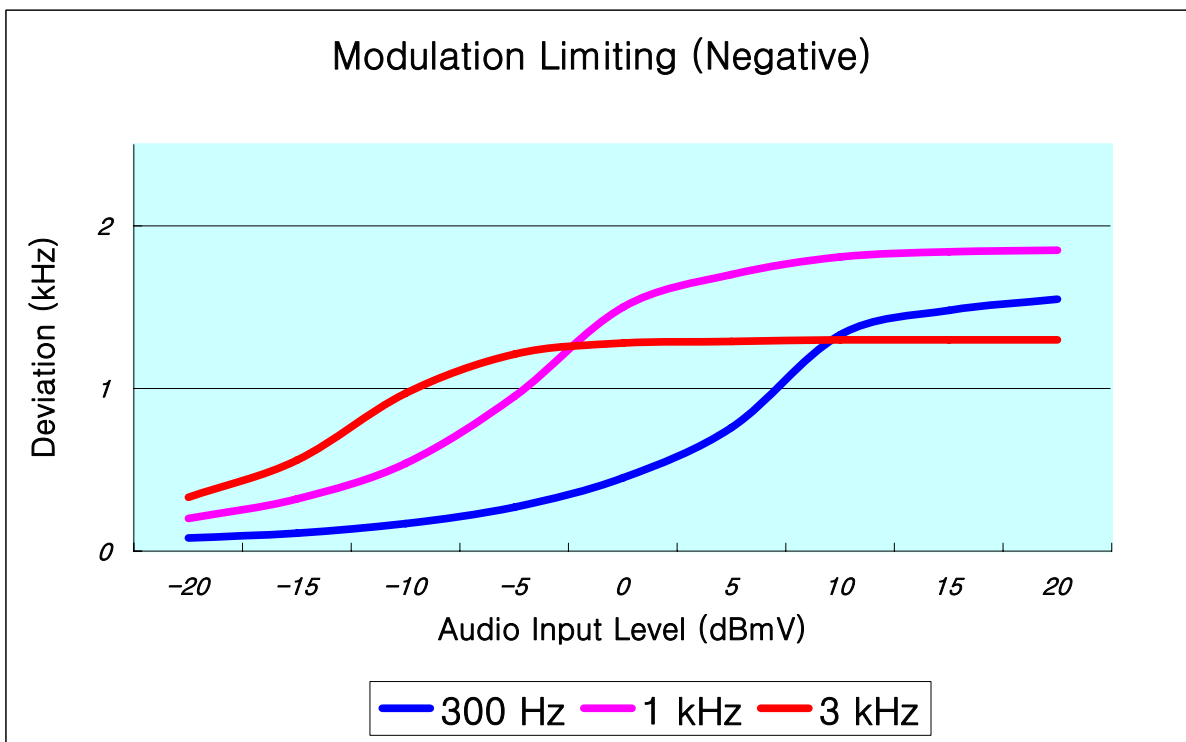


5.5.8.7 WideBand, 1st Channel, Positive

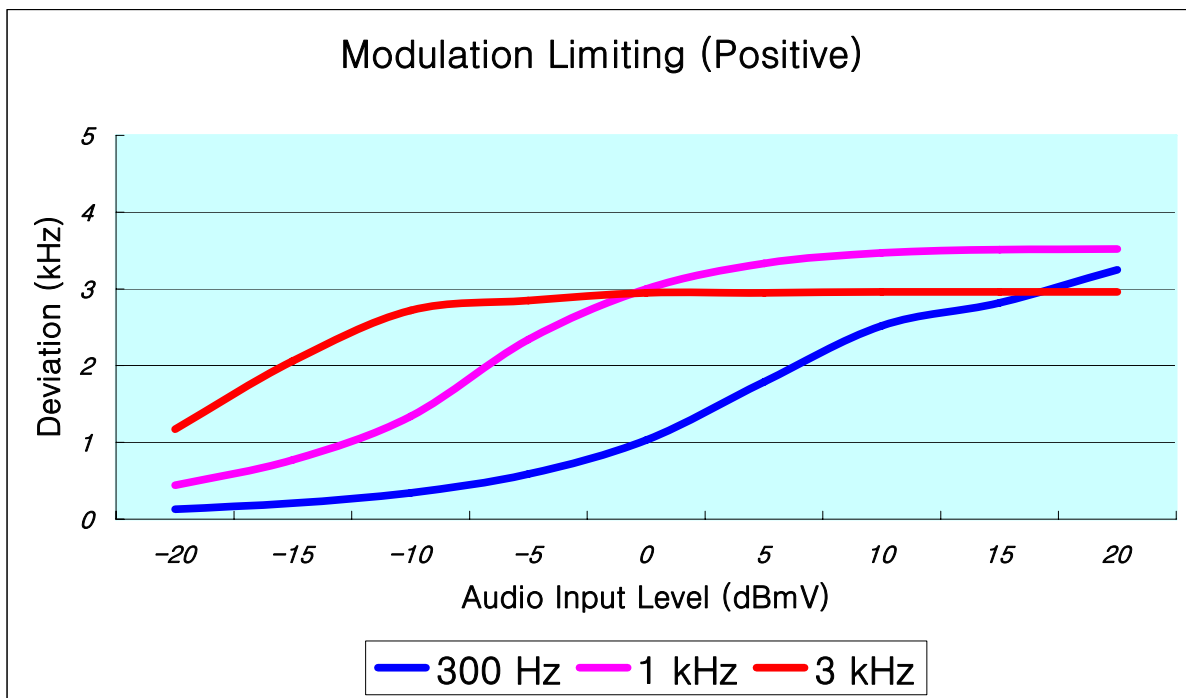


5.5.8.8 WideBand, 1st Channel, Negative

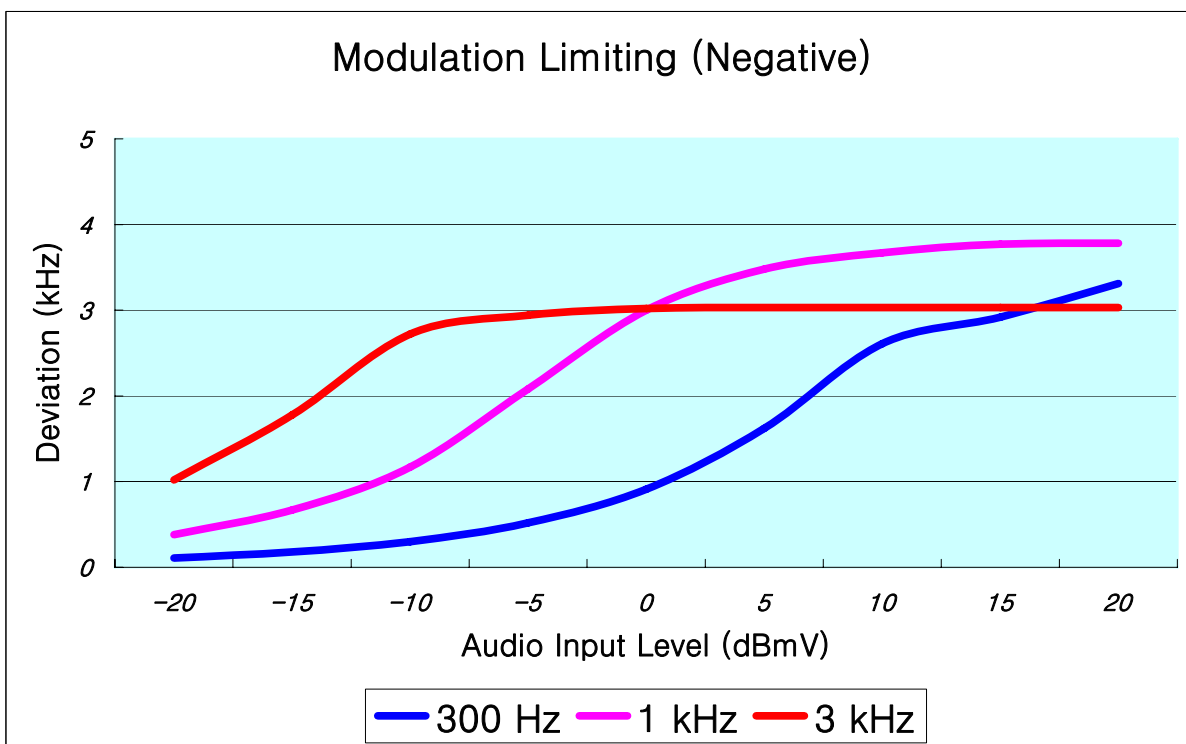


5.5.8.9 WideBand, 2nd Channel, Positive

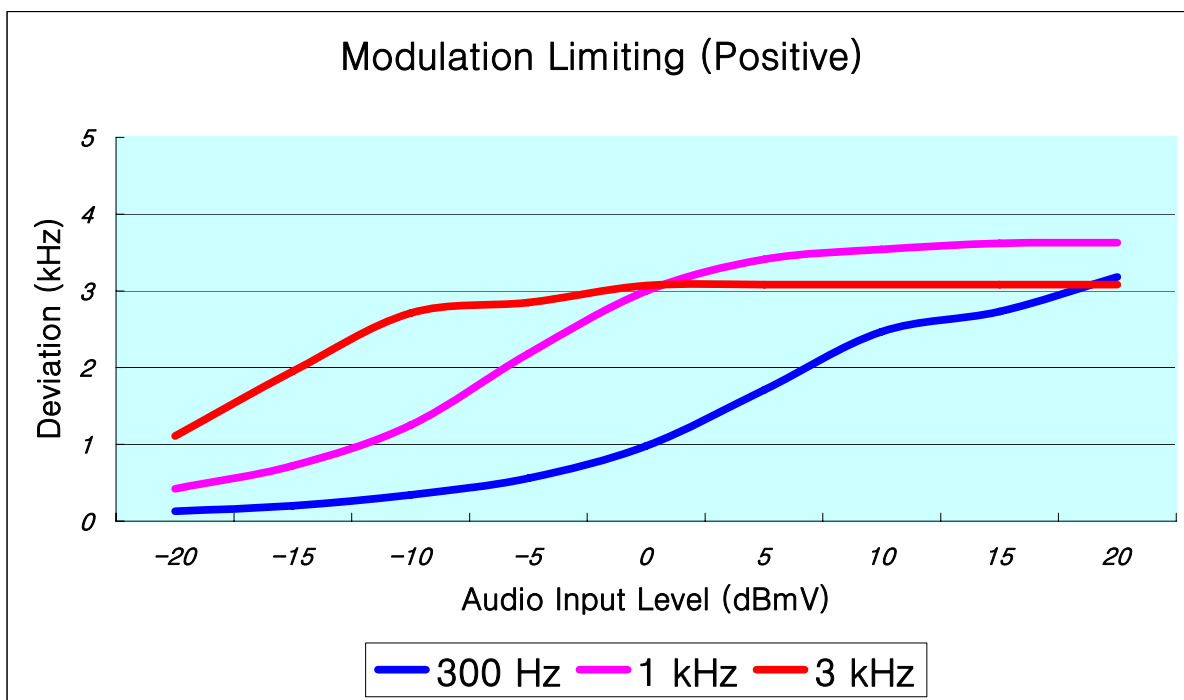


5.5.8.10 WideBand, 2nd Channel, Negative

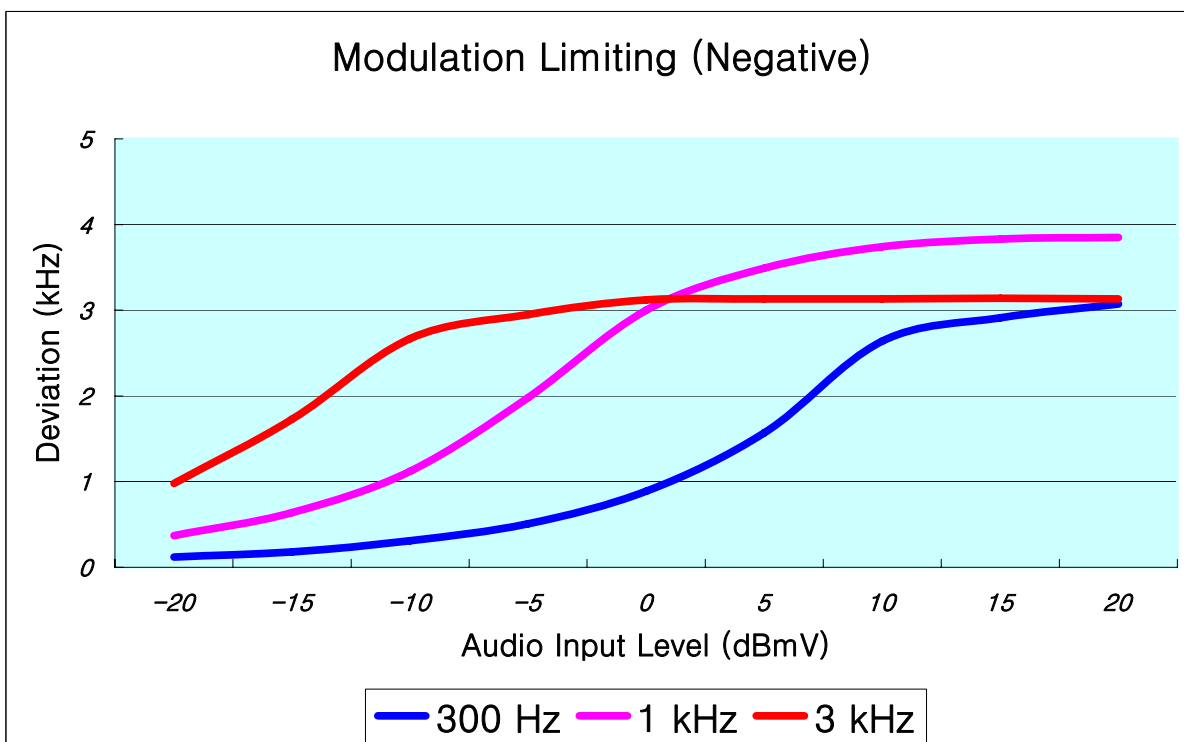

5.5.8.11 WideBand, 3rd Channel, Positive

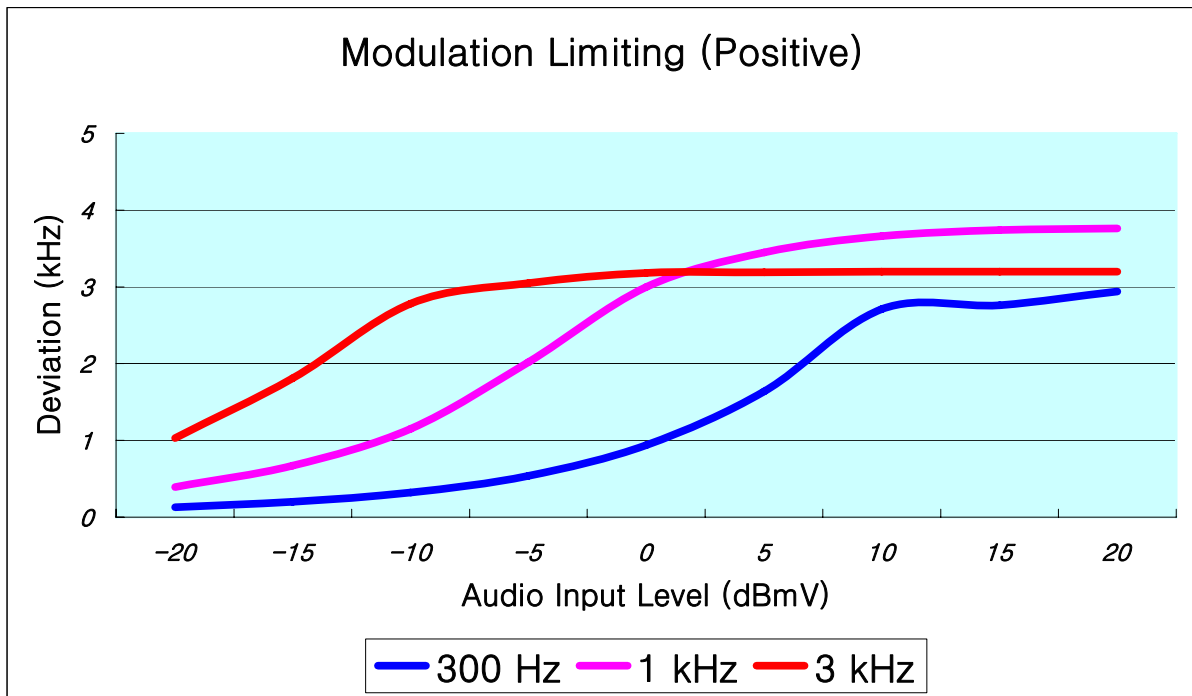

5.5.8.12 WideBand, 3rd Channel, Negative

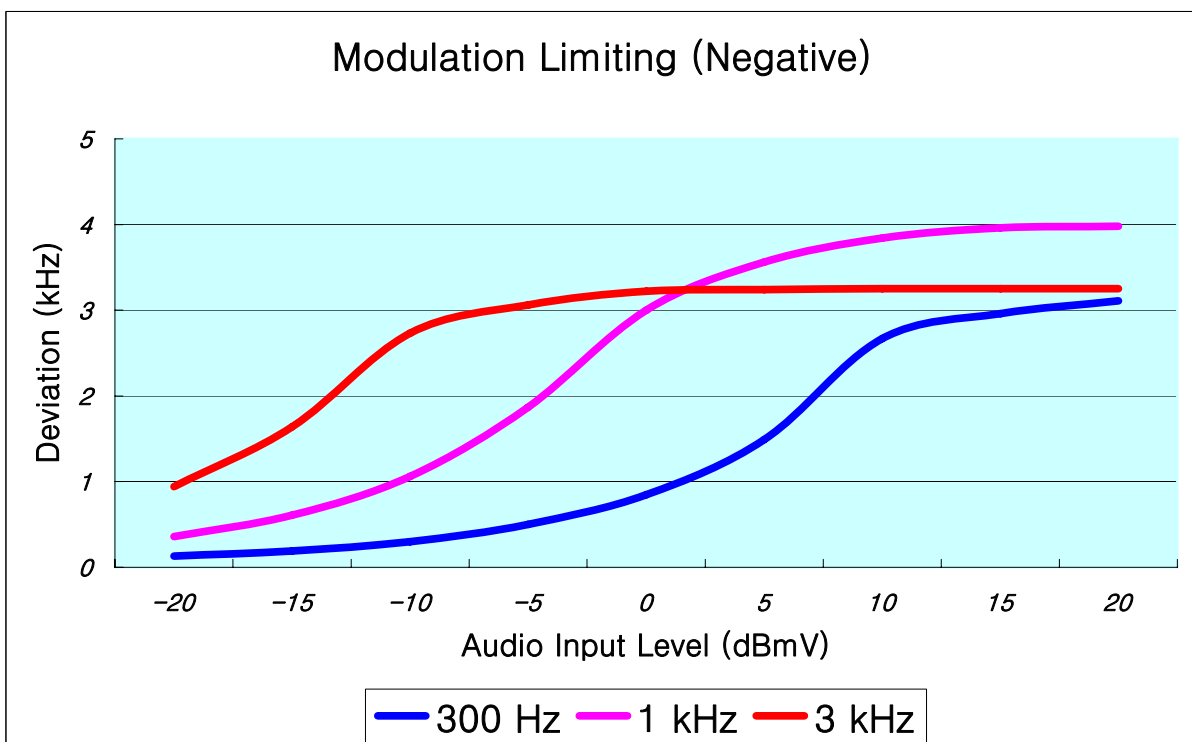

5.6 Occupied Bandwidth

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission. Specified limits according to the emission mask per section 90.210 is as below.

Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 per-cent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized band-width: At least $43 + 10 \log (P)$ dB.

Emission Mask D. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

5.6.1 Specification

FCC Rules Part 2, Section 2.1049
FCC Rules Part 90, Section 90.210
Industry Canada, RSS-119 Issue 9 Section 5.5

5.6.2 Method of Measurement

ANSI/TIA-603-B-2002 Section 2.2.11

5.6.3 Measurement Set-Up

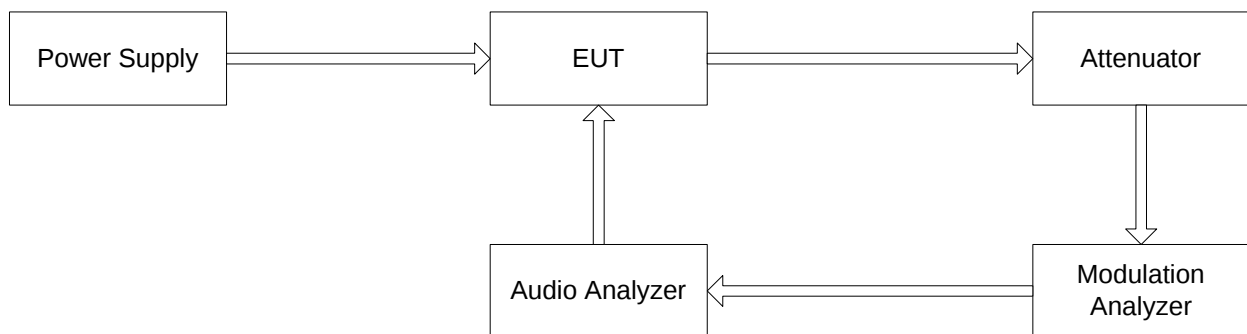


Fig.5

5.6.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SM2102	Maxon CIC Corp.
Power Supply	IPS-30B03DD	INTERACT
Audio Analyzer	8903B	Agilent
Spectrum Analyzer	FSP7	Rohde & Shwarz
Attenuator	33-30-33	WEINSCHEL

5.6.5 Measurement Procedure

- The unit was turn-up in accordance with the alignment procedure stated in the FIG. 5 , and was loaded into a 50 ohm resistive termination.
- The radio transmitter was modulated by a 2500 Hz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation. The input level shall be established at the frequency of maximum response of the audio modulating circuit.
- The occupied bandwidth data is obtained for 25kHz and 12.5 kHz channel bandwidth.


5.6.6 Data

Frequency (MHz)	Channel Spacing	Applicable Emission Mask	99% Bandwidth (kHz)	Maximum Authorized Bandwidth (KHz)
148.025 MHz	Narrow	D	6.8	11.25
	Wide	B	11.9	20.00
161.025 MHz	Narrow	D	6.8	11.25
	Wide	B	11.6	20.00
173.975 MHz	Narrow	D	6.8	11.25
	Wide	B	11.5	20.00

5.6.7 99% Bandwidth

5.6.7.1 Plot 1


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Issue 9 Section 5.5
Operating Frequency :	148.025 MHz
Channel :	1st Channel
Power Output :	25 Watts
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	13.8 VDC

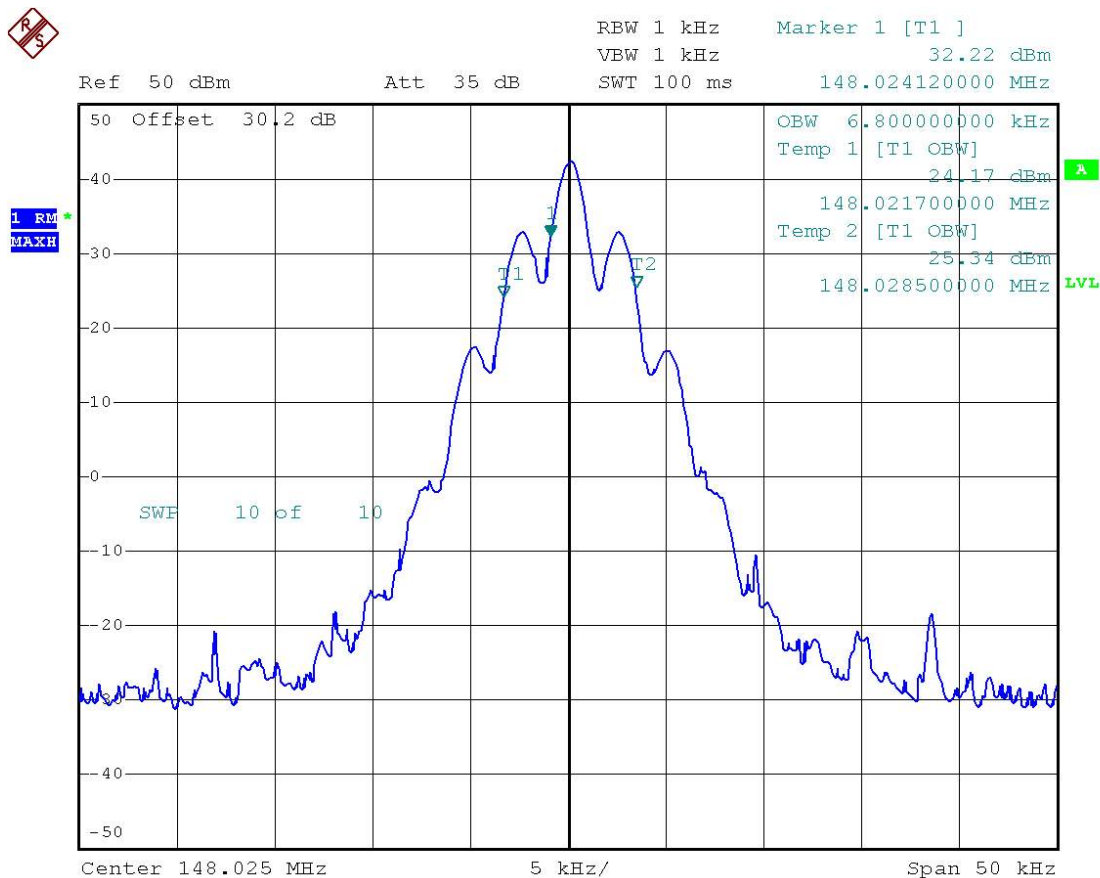

Date: 19.NOV.2008 13:51:59

5.6.7.2 Plot 2


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Issue 9 Section 5.5
Operating Frequency :	148.025 MHz
Channel :	1st Channel
Power Output :	25 Watts
Channel Spacing :	WideBand
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	13.8 VDC

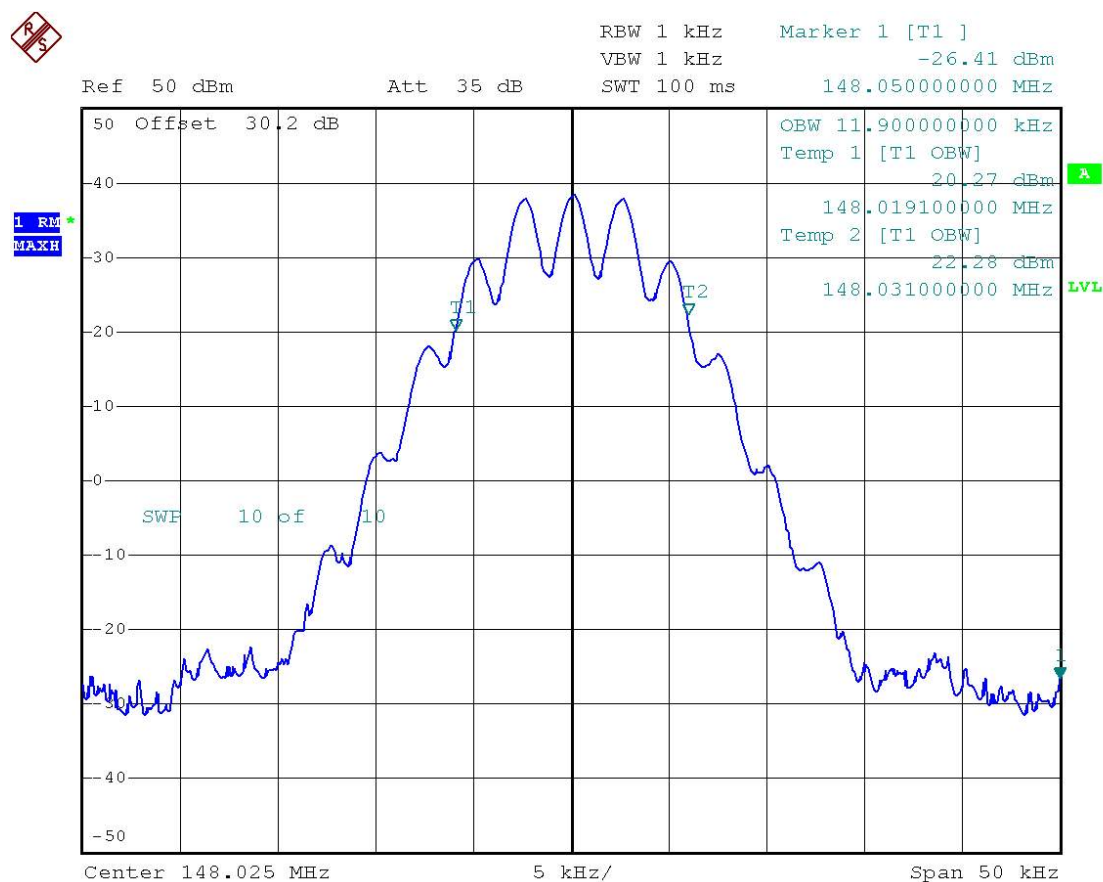

Date: 19.NOV.2008 13:52:57

5.6.7.3 Plot 3


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Issue 9 Section 5.5
Operating Frequency :	161.025 MHz
Channel :	2nd Channel
Power Output :	25 Watts
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	13.8 VDC

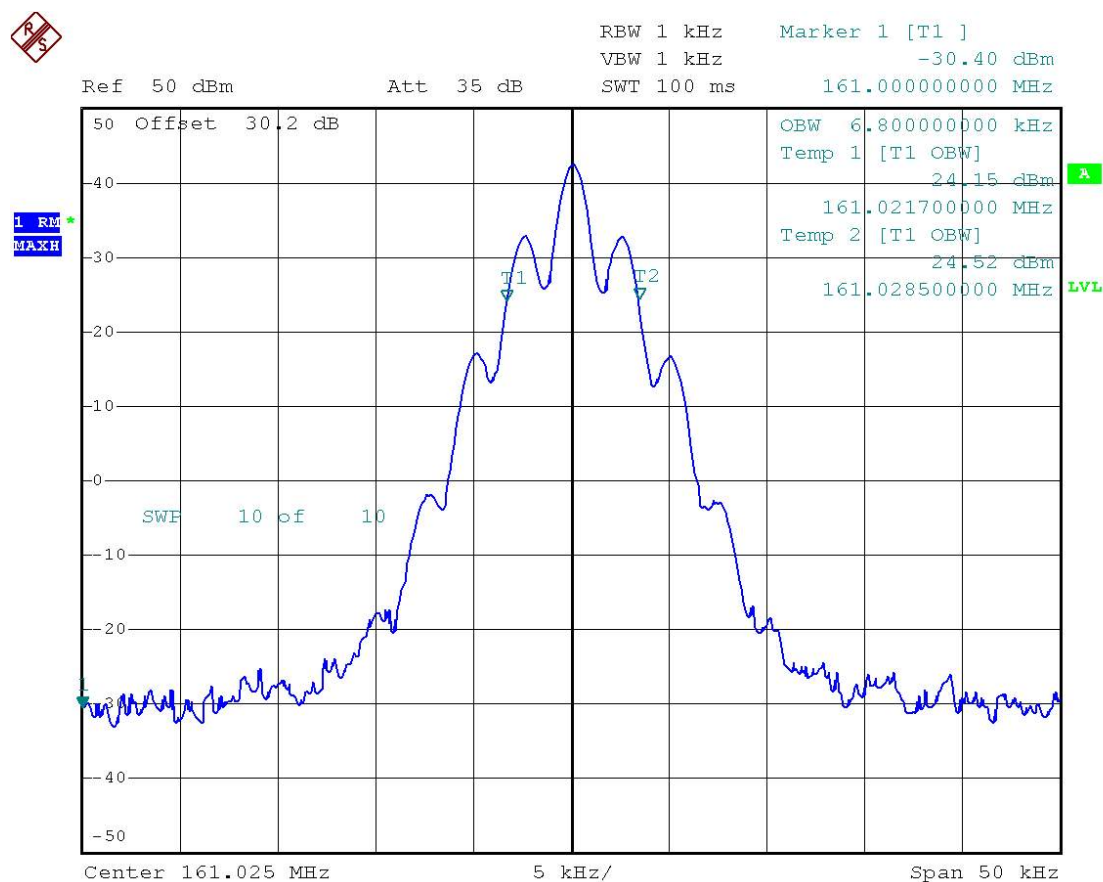

Date: 19.NOV.2008 13:52:17

5.6.7.4 Plot 4


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Issue 9 Section 5.5
Operating Frequency :	161.025 MHz
Channel :	2nd Channel
Power Output :	25 Watts
Channel Spacing :	WideBand
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	13.8 VDC

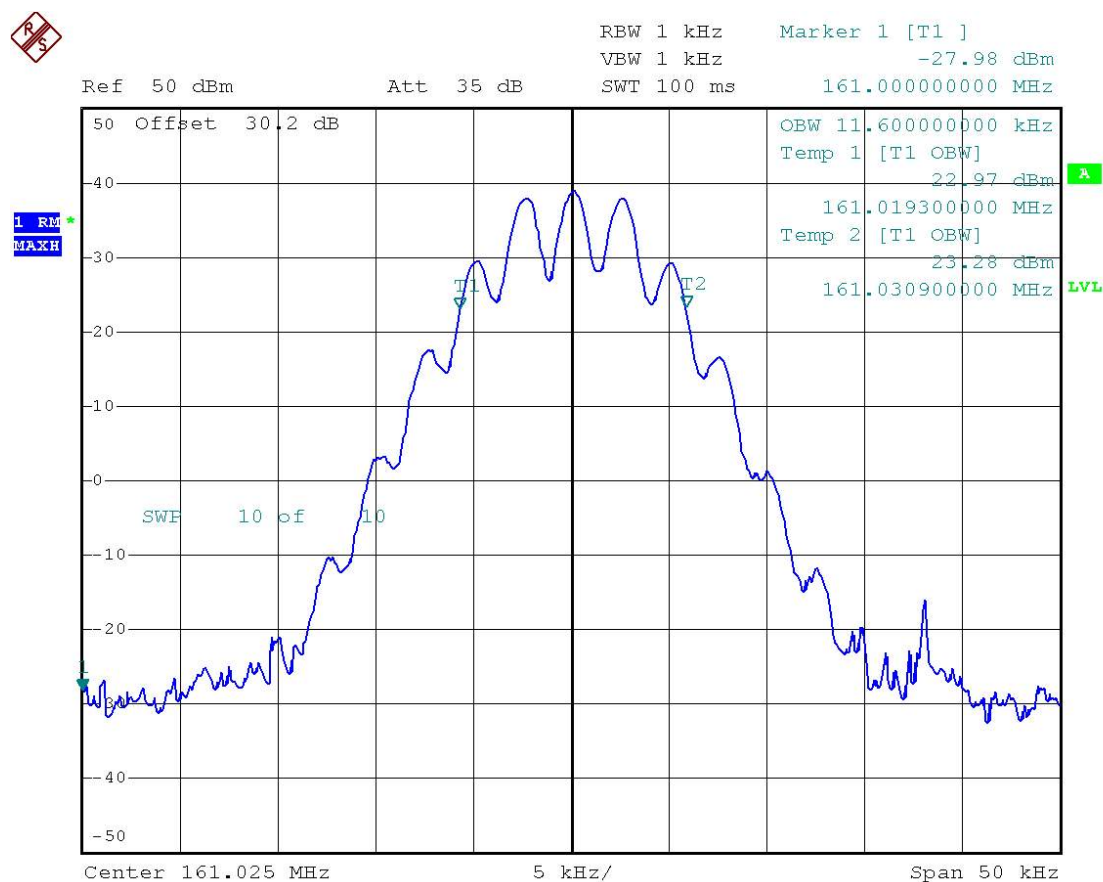

Date: 19.NOV.2008 13:53:18

5.6.7.5 Plot 5


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Issue 9 Section 5.5
Operating Frequency :	173.975 MHz
Channel :	3rd Channel
Power Output :	25 Watts
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	13.8 VDC

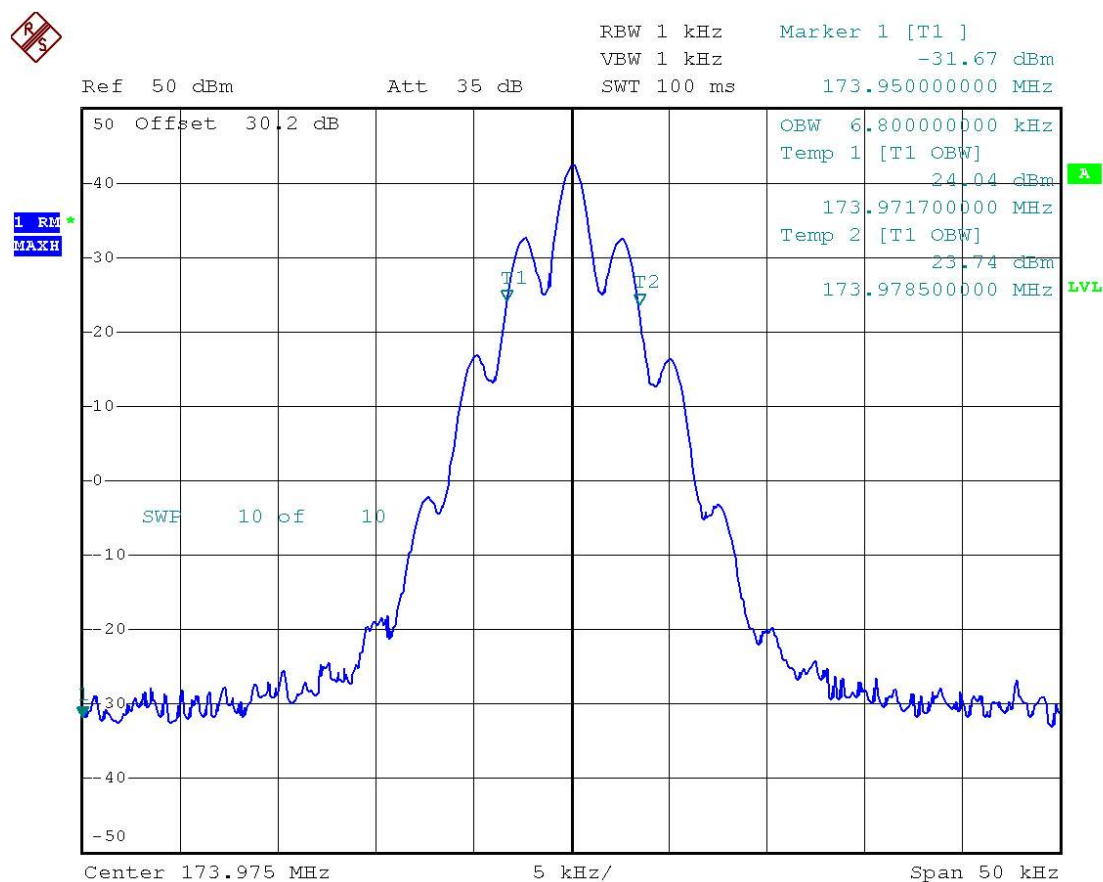

Date: 19.NOV.2008 13:52:36

5.6.7.6 Plot 6

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Issue 9 Section 5.5
Operating Frequency :	173.975 MHz
Channel :	3rd Channel
Power Output :	25 Watts
Channel Spacing :	WideBand
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	99% Bandwidth
Reference Voltage :	13.8 VDC

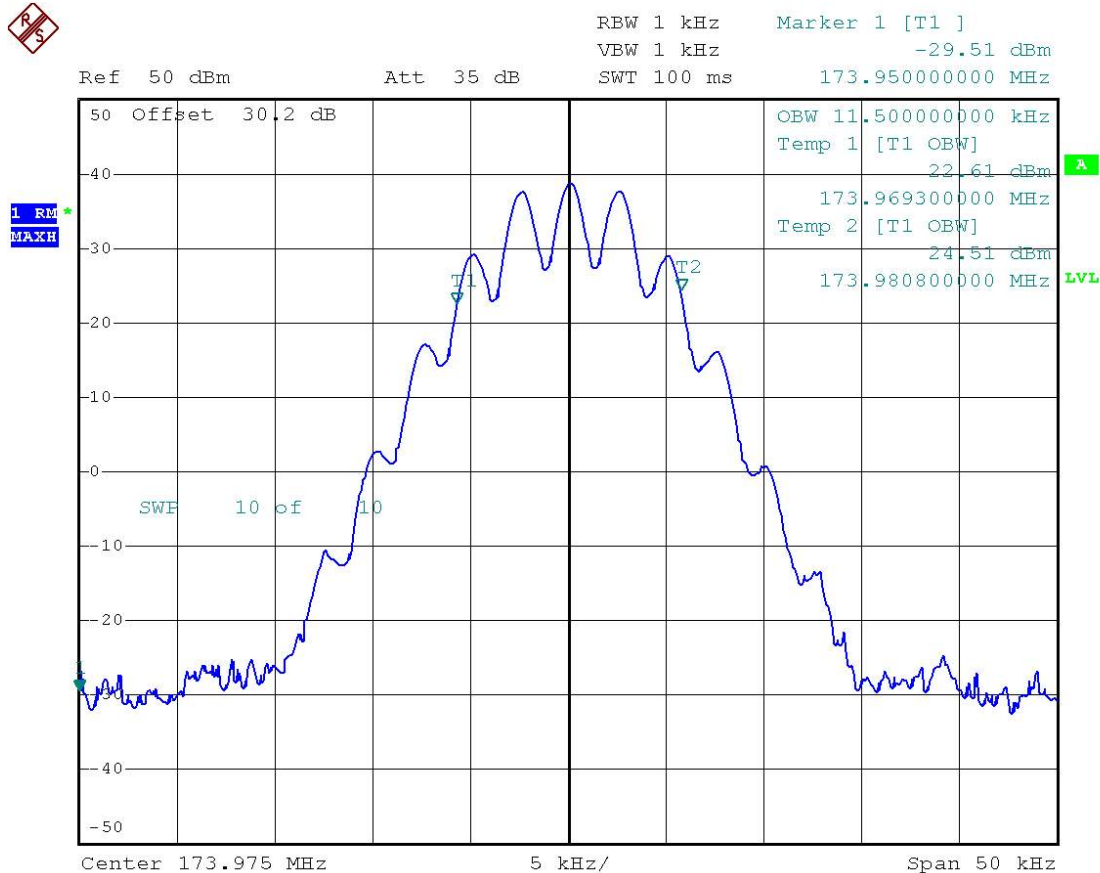


Date: 19.NOV.2008 13:53:32

5.6.8 Emission Mask

5.6.8.1 Plot 1


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Issue 9 Section 5.5
Operating Frequency :	148.025 MHz
Channel :	1st Channel
Power Output :	25 Watts
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask D
Reference Voltage :	13.8 VDC

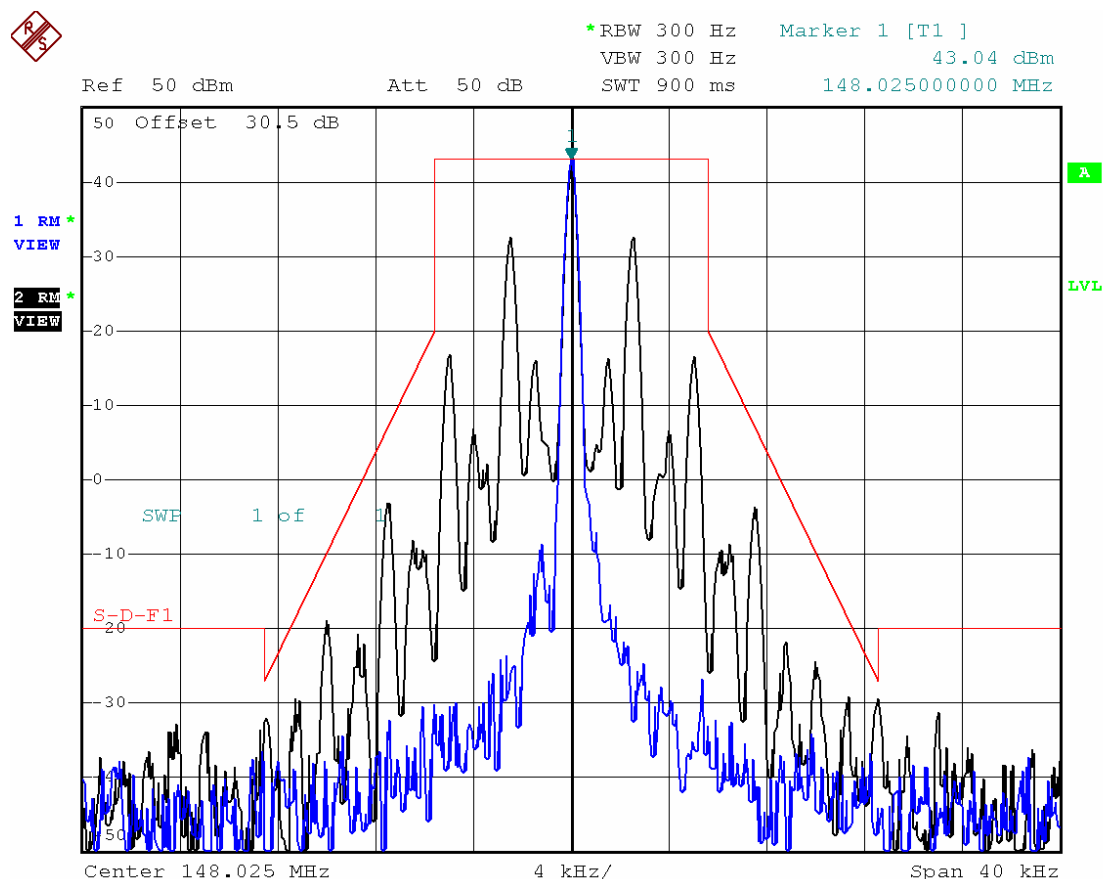

Date: 1.DEC.2008 19:08:48

5.6.8.2 Plot 2


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Issue 9 Section 5.5
Operating Frequency :	161.025 MHz
Channel :	2 nd Channel
Power Output :	25 Watts
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask D
Reference Voltage :	13.8 VDC

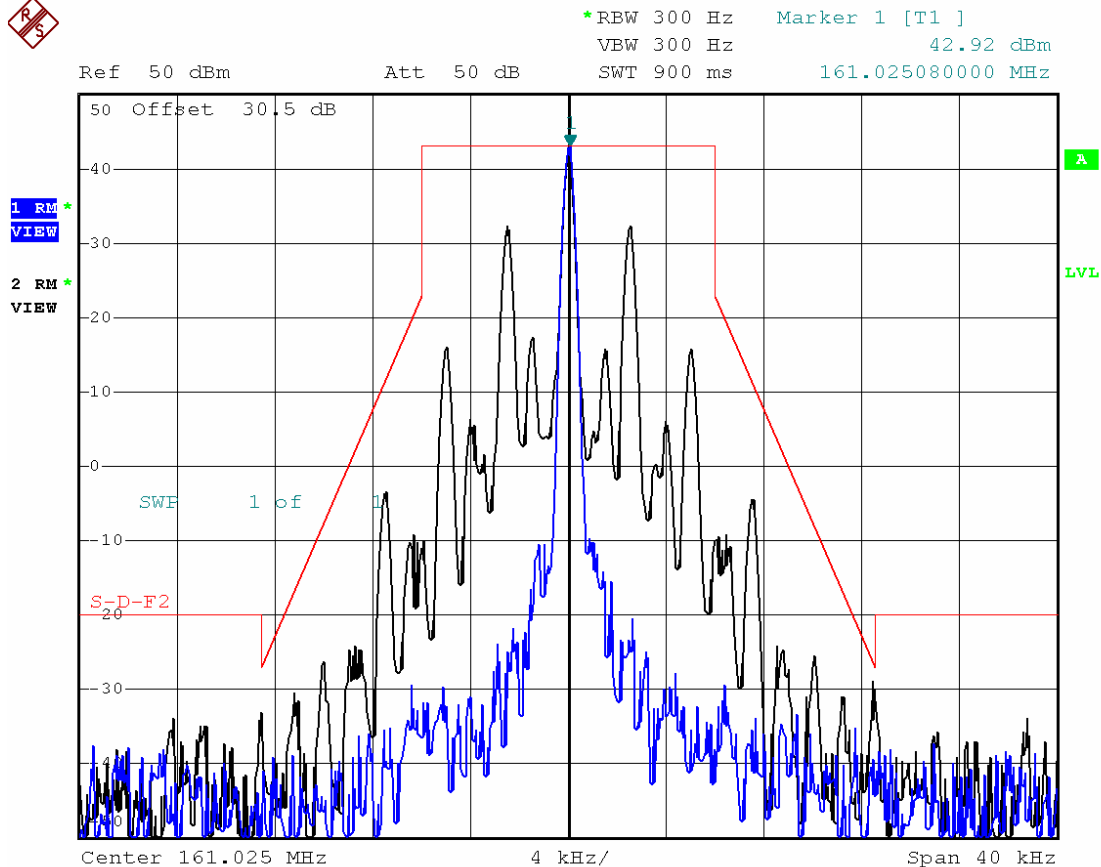

Date: 1.DEC.2008 19:15:32

5.6.8.3 Plot 3


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Issue 9 Section 5.5
Operating Frequency :	173.975 MHz
Channel :	3 rd Channel
Power Output :	25 Watts
Channel Spacing :	Narrow Band
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask D
Reference Voltage :	13.8 VDC

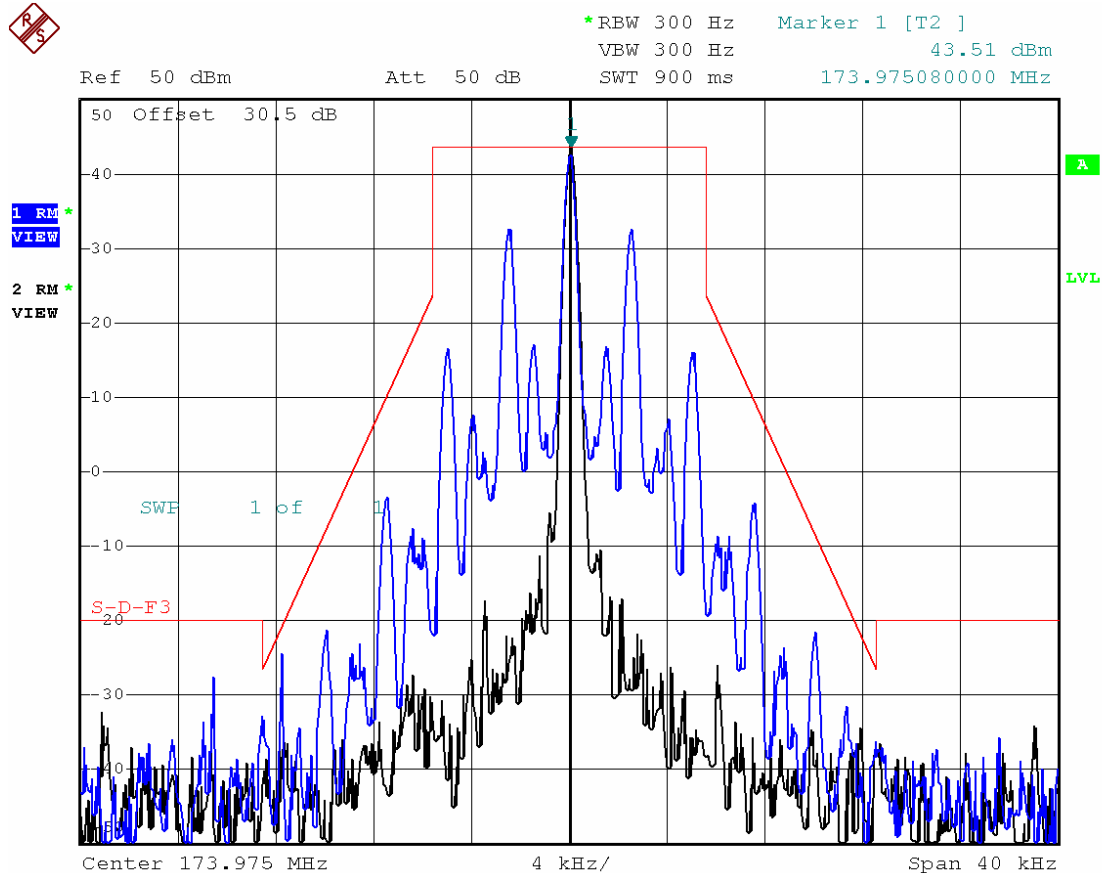

Date: 1.DEC.2008 19:19:36

5.6.8.4 Plot 4


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Issue 9 Section 5.5
Operating Frequency :	148.025 MHz
Channel :	1st Channel
Power Output :	25 Watts
Channel Spacing :	WideBand
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask B
Reference Voltage :	13.8 VDC

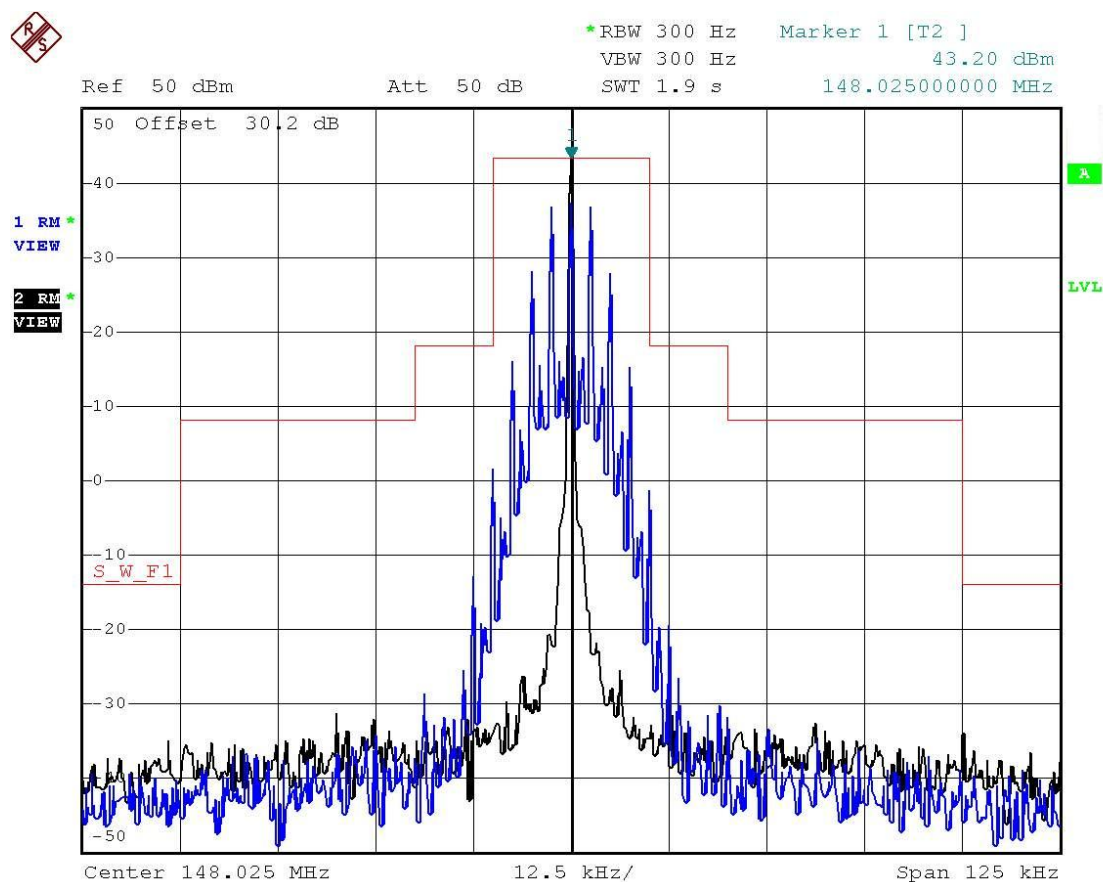

Date: 26.NOV.2008 13:39:13

5.6.8.5 Plot 5


FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Issue 9 Section 5.5
Operating Frequency :	161.025 MHz
Channel :	2nd Channel
Power Output :	25 Watts
Channel Spacing :	WideBand
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask B
Reference Voltage :	13.8 VDC

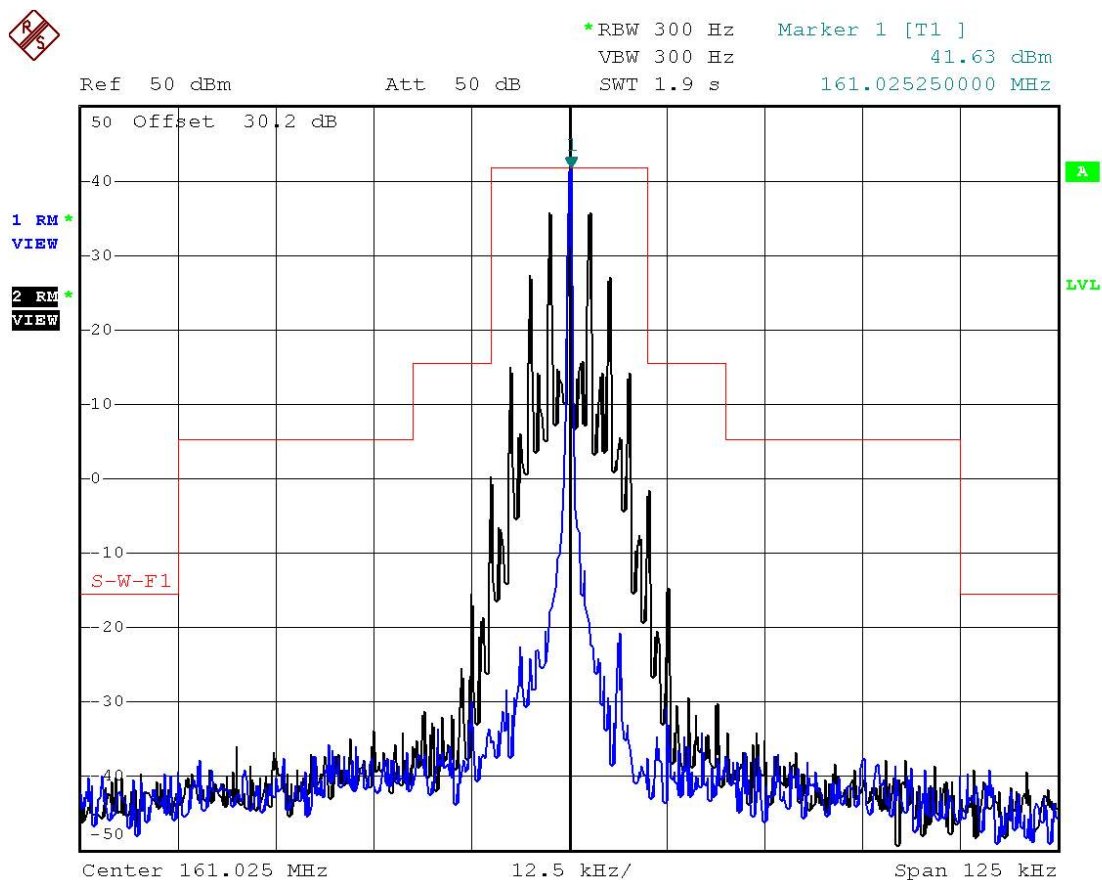

Date: 26.NOV.2008 13:42:33

5.6.8.6 Plot 6

FCC Rules :	Part 2 §2.1053(a) & §90.210
IC Rules :	RSS-119 Issue 9 Section 5.5
Operating Frequency :	173.975 MHz
Channel :	3rd Channel
Power Output :	1 Watt
Channel Spacing :	WideBand
Modulation Signal :	FM modulation with 2.5kHz sine wave signal
Emission Mask :	Mask B
Reference Voltage :	13.8 VDC

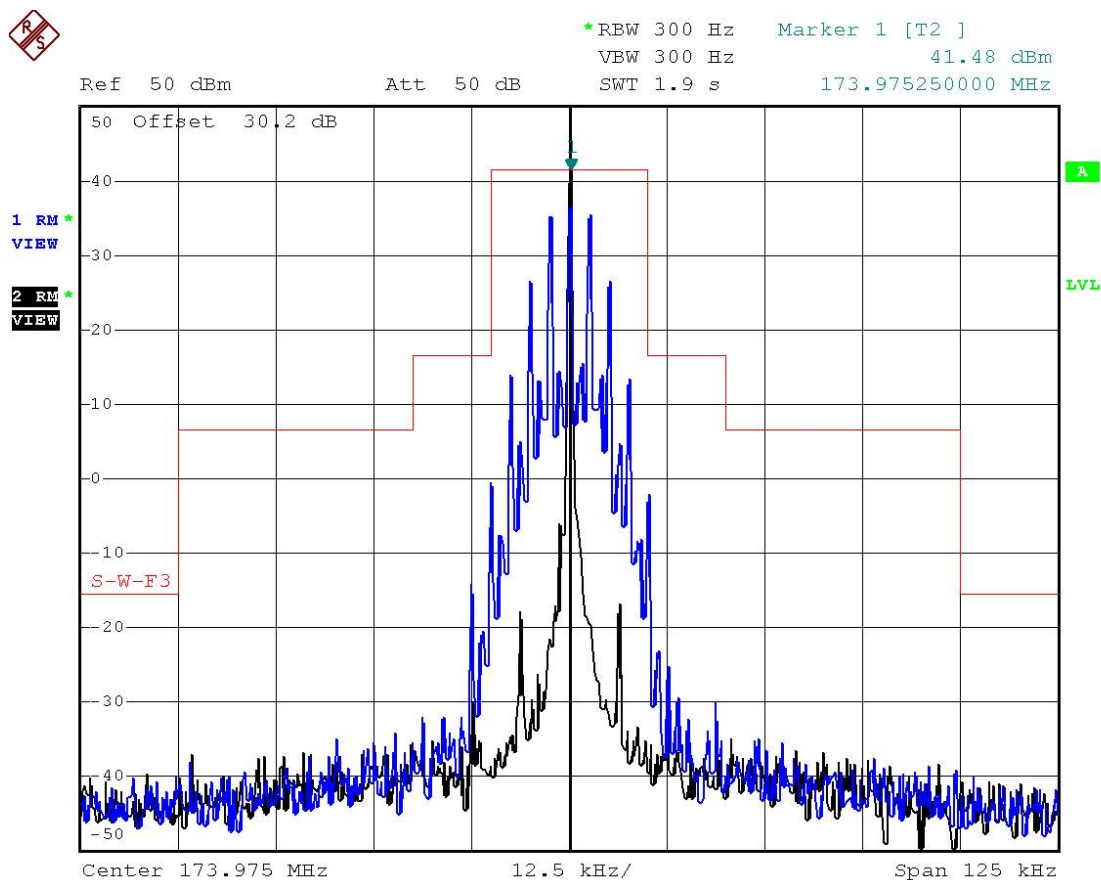

Date: 26.NOV.2008 13:45:32

5.7 Spurious Emissions at Antenna Terminals

Conducted spurious emissions are emissions at the antenna terminals on a frequency or frequencies which are outside of band sufficient to ensure transmission or information of required quality for the class of communication desired.

5.7.1 Specification

FCC Rules Part 2, Section 2.1051
FCC Rules Part 90, Section 90.210
Industry Canada, RSS-119 Issue 9 Section 5.8

5.7.2 Method of Measurement

ANSI/TIA-603-B-2002 Section 2.2.13

5.7.3 Measurement Set-Up

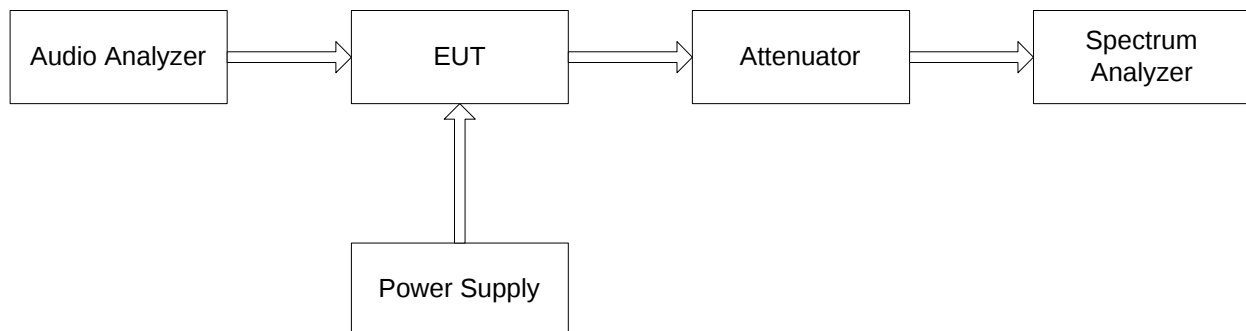


Fig.6

5.7.4 Test Equipment List

Equipment	Model Name	Manufacturer
EUT	SM2102	Maxon CIC Corp.
Power Supply	IPS-30B03DD	INTERACT
Audio Analyzer	8903B	Agilent
Spectrum Analyzer	FSP7	Rohde & Schwarz
Attenuator	33-30-33	WEINSCHEL

5.7.5 Measurement Procedure

- The unit was turned-up in accordance with the alignment procedure stated in the FIG. 6, and was loaded into a 50 ohm resistive termination.
- The antenna output terminal of the EUT was connected to the input of a 50 ohm spectrum analyzer through a matched 10 dB attenuator and notch filter.
- Transmitter was set to the maximum power output condition.
- The unit was modulated with a 2.5 kHz audio tone at an input level 16dB greater than that required 50% modulation. The spectrum was scanned from the lowest frequency generated in the equipment to the 10th harmonic of the carrier.
- The limit was applied according the $50+10\log_{10}(P)$ (P: mean power in Watts) dB.

5.7.6 Data(25W High Power)


Test Mode (TX/RX)		Spurious Emissions			
		Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)
148.025MHz	TX	295.12	-44.43	-20	24.43
		443.62	-38.95		18.95
		740.62	-44.43		24.43
		889.12	-44.92		24.92
		1036.00	-40.55		20.55
	RX	392.16	-73.14	-64	9.14
		968.32	-81.32		17.32
		1924.00	-74.89		10.89
161.025MHz	TX	322.94	-40.81	-20	20.81
		483.22	-43.87		23.87
		805.96	-42.40		22.40
		968.32	-41.15		21.15
		1120.00	-43.18		23.18
		1288.00	-45.13		25.13
	RX	592.22	-87.61	-64	23.61
173.975MHz	TX	1036.00	-39.45	-20	19.45
	RX	217.90	-81.80	-64	17.80
		1972.00	-72.75		8.75
		2632.00	-72.54		8.54

5.7.7 Plots


5.7.7.1 1st Channel

FCC Rules :	Part 2 §2.1051 & §90.210
IC Rules :	RSS-119 Issue 9 Section 5.8
Operating Frequency :	148.025 MHz
Channel :	1st Channel
Power Output :	25 Watts
Channel Spacing :	WideBand
Reference Voltage :	13.8 VDC
Limit :	$50 + 10\log_{10}P$ (-20dBm)

5.7.7.1.1 10 MHz ~ 1 GHz

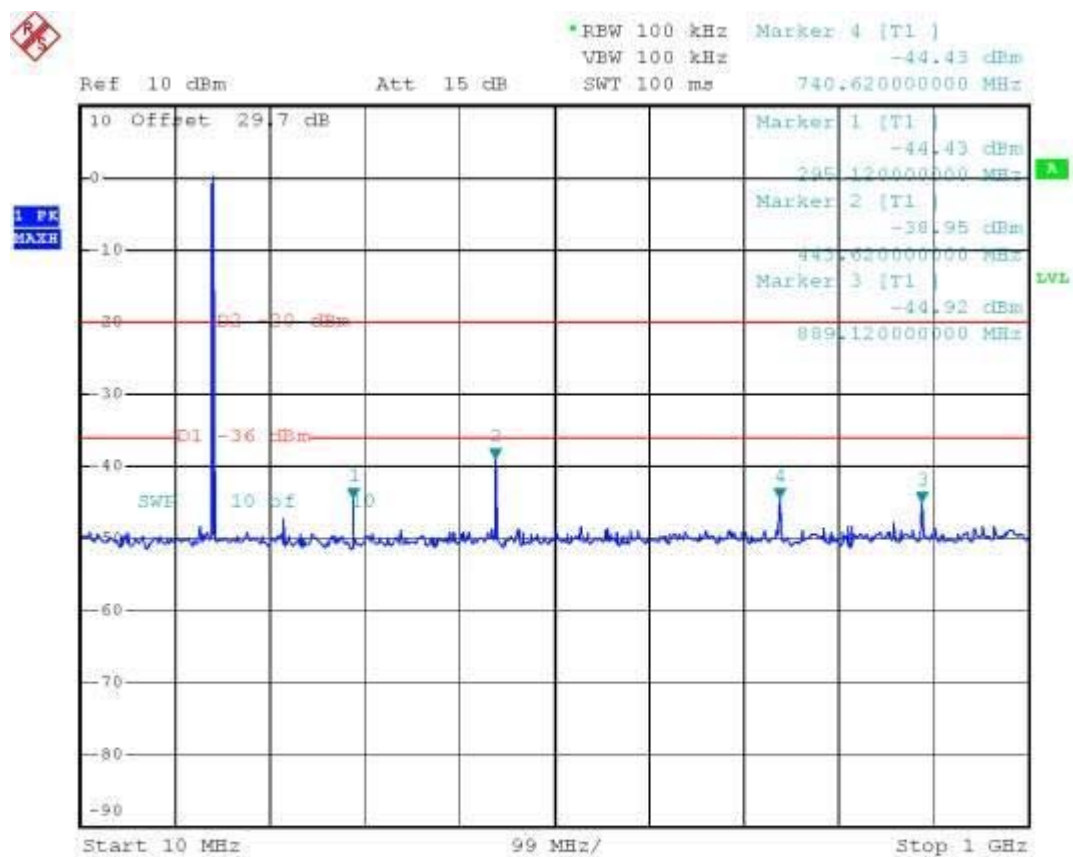


5.7.7.1.2 1 GHz ~ 7 GHz

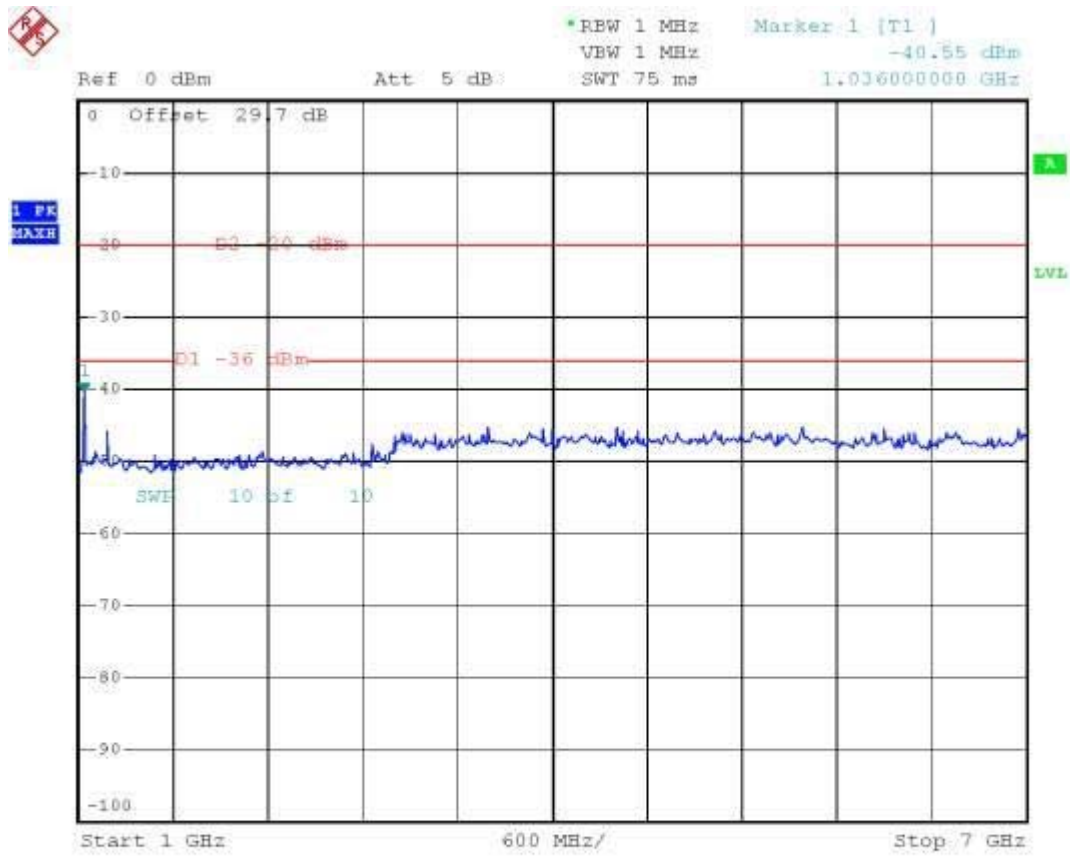


5.7.7.2 2nd Channel

FCC Rules :	Part 2 §2.1051 & §90.210
IC Rules :	RSS-119 Issue 9 Section 5.8
Operating Frequency :	161.025 MHz
Channel :	2nd Channel
Power Output :	25 Watts
Channel Spacing :	WideBand
Reference Voltage :	13.8 VDC
Limit :	$50 + 10\log_{10}P$ (-20dBm)

5.7.7.2.1 10 MHz ~ 1 GHz

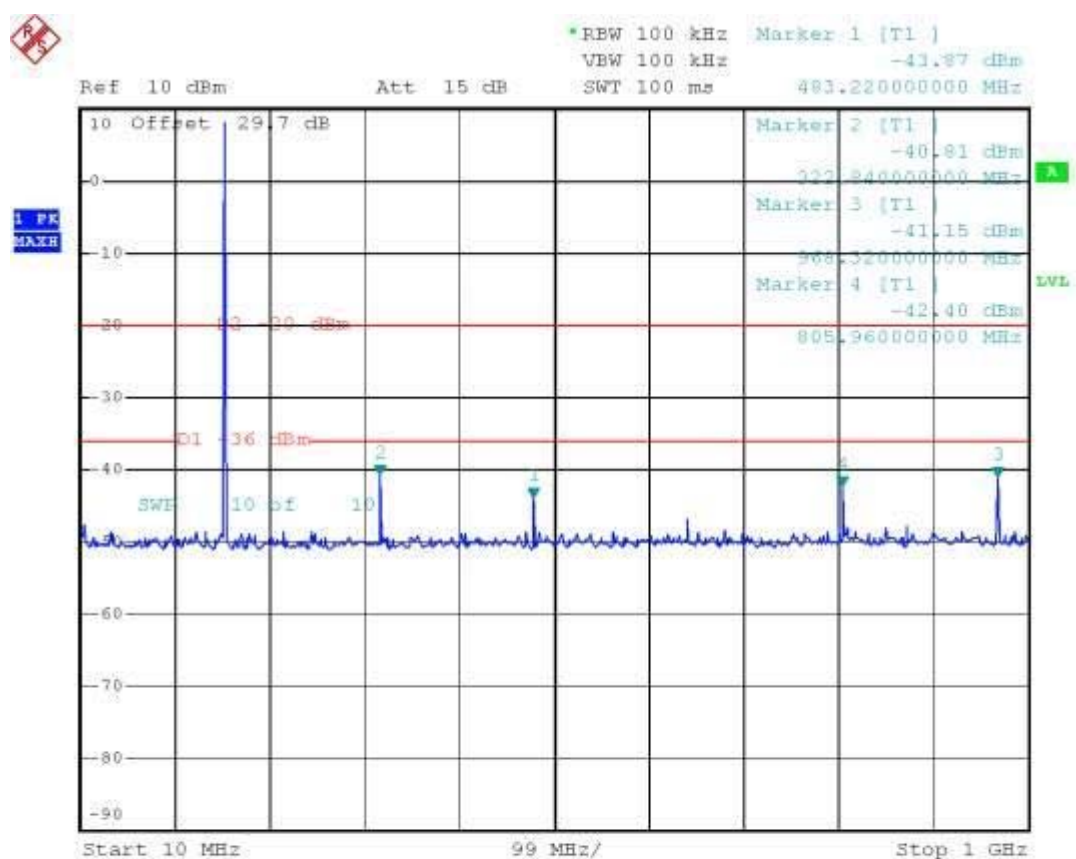


5.7.7.2.2 1 GHz ~ 7 GHz

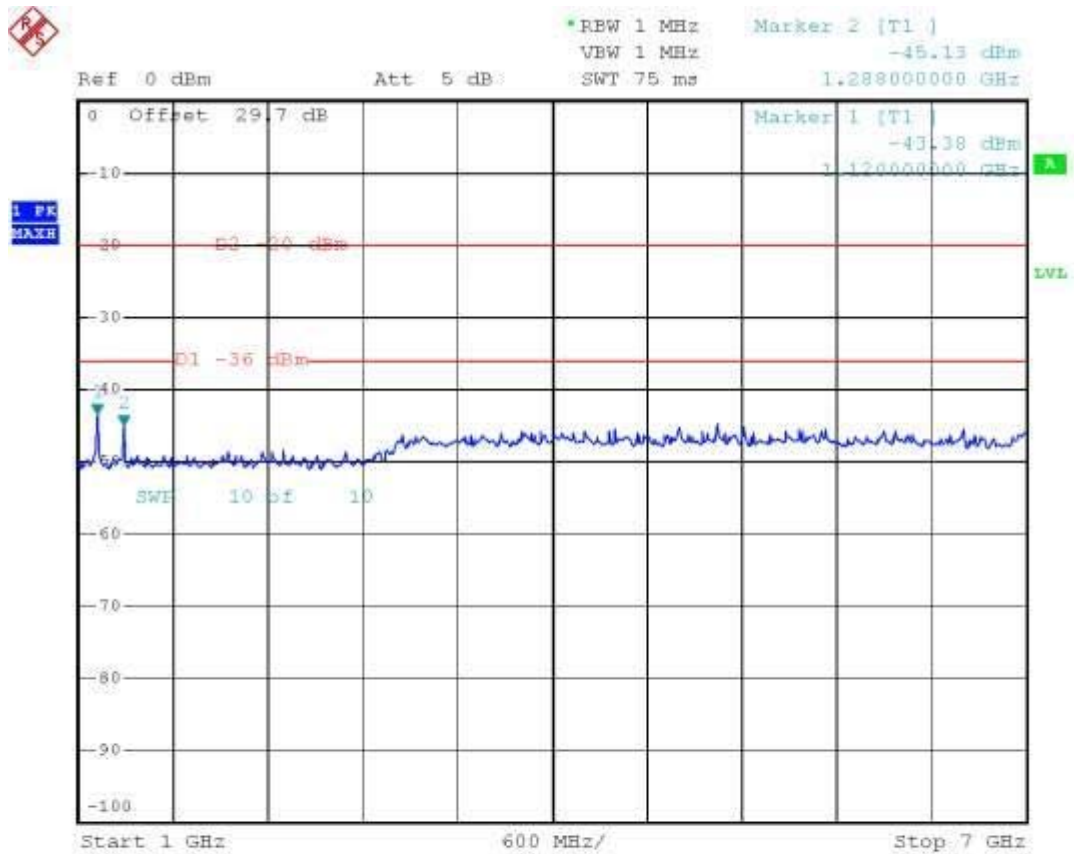


5.7.7.3 3rd Channel

FCC Rules :	Part 2 §2.1051 & §90.210
IC Rules :	RSS-119 Issue 9 Section 5.8
Operating Frequency :	173.975 MHz
Channel :	3rd Channel
Power Output :	25 Watts
Channel Spacing :	WideBand
Reference Voltage :	13.8 VDC
Limit :	$50 + 10\log_{10}P$ (-20dBm)

5.7.7.3.1 10 MHz ~ 1 GHz

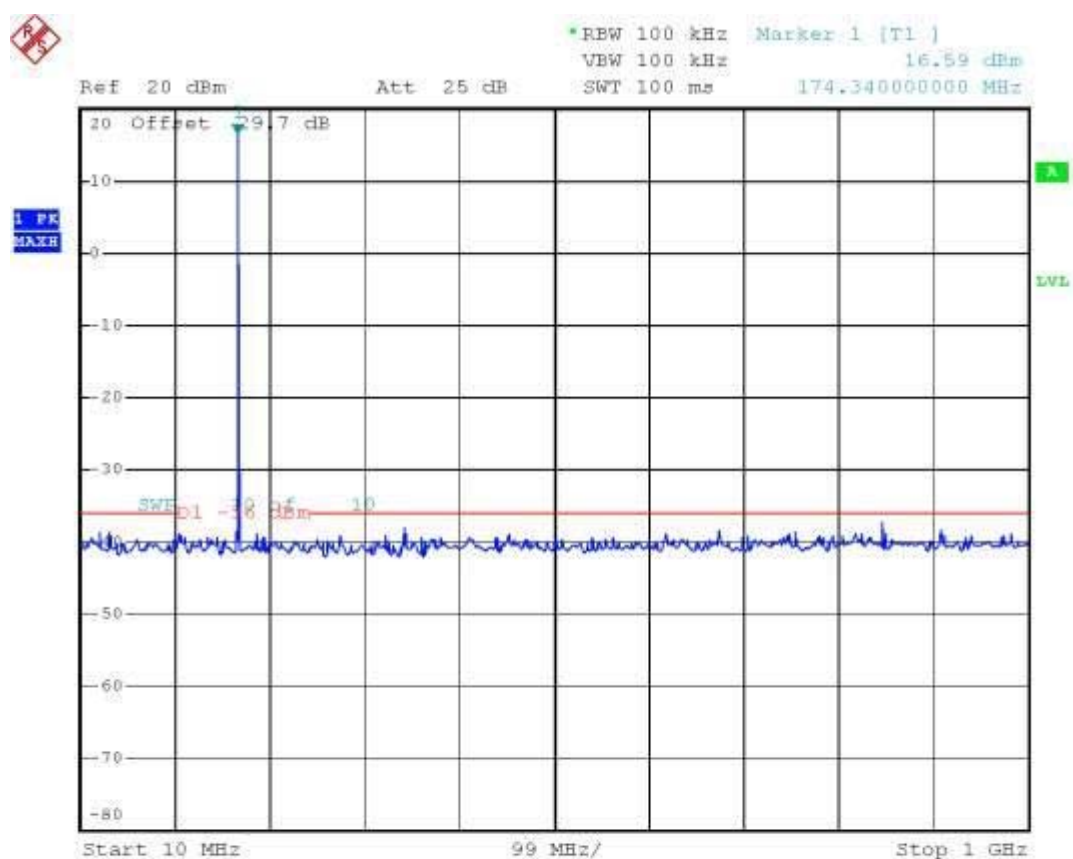


5.7.7.3.2 1 GHz ~ 7 GHz

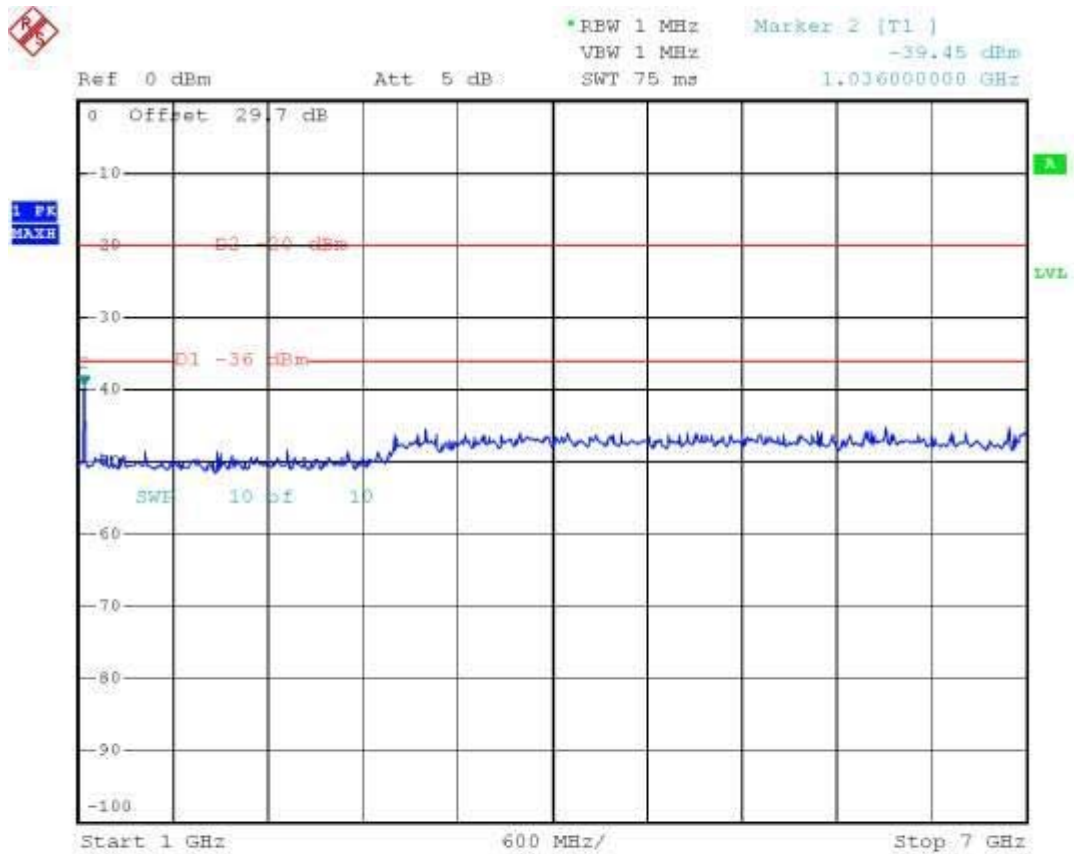


5.7.7.4 1st Channel

FCC Rules :	Part 2 §2.1051 & §90.210
IC Rules :	RSS-119 Issue 9 Section 5.8
Operating Frequency :	148.025 MHz
Channel :	1st Channel
Power Output :	Stand-By
Channel Spacing :	WideBand
Reference Voltage :	13.8 VDC
Limit :	$50 + 10\log_{10}P$ (-20dBm)

5.7.7.4.1 10 MHz ~ 1 GHz

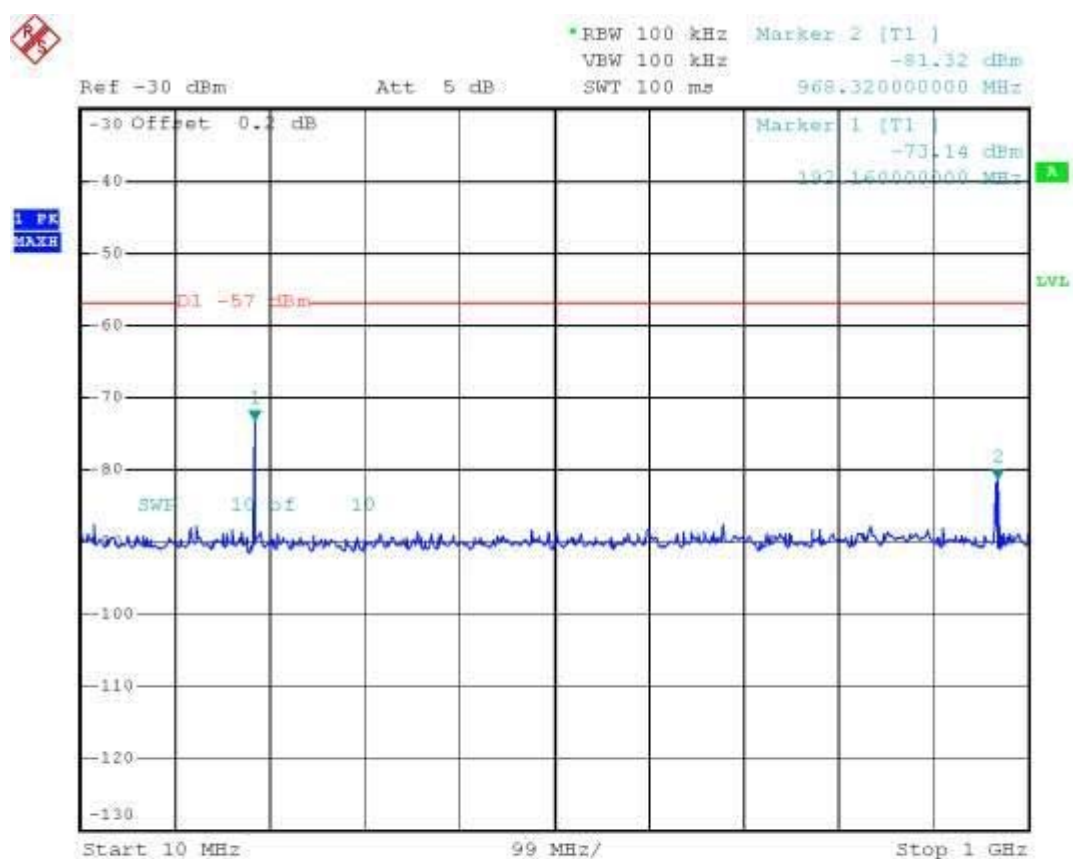


5.7.7.4.2 1 GHz ~ 7 GHz

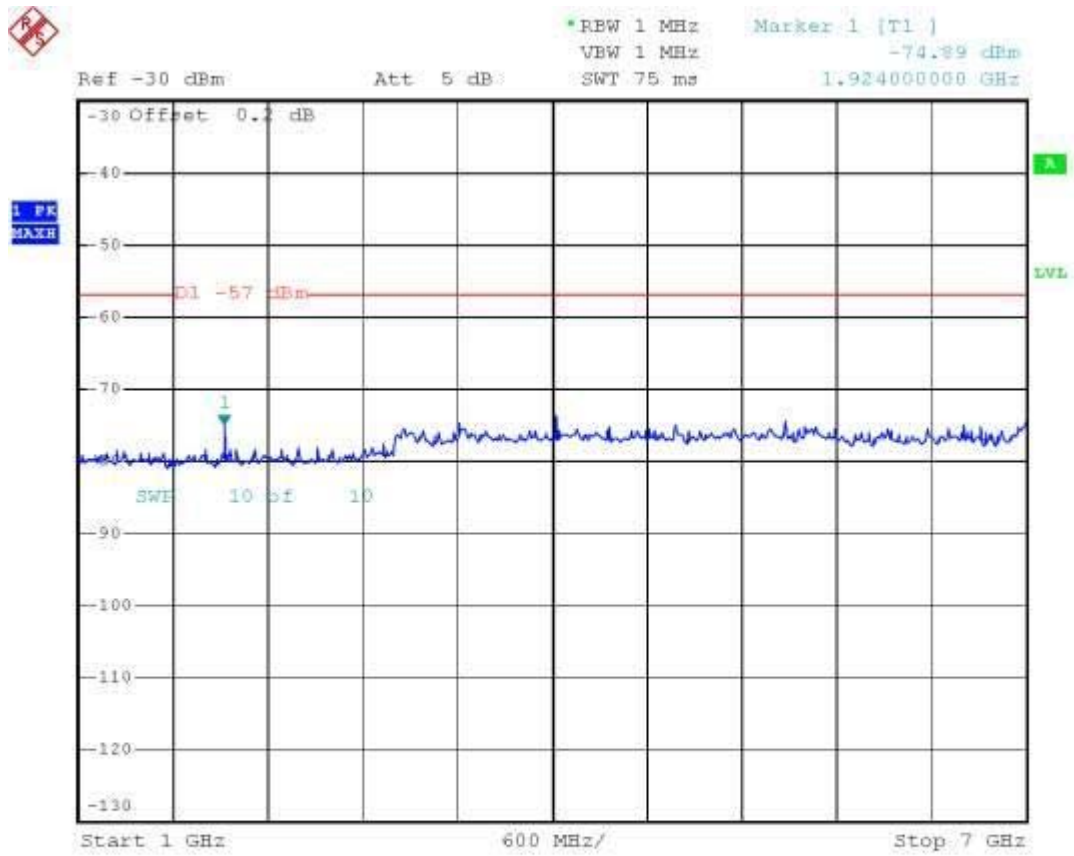


5.7.7.5 2nd Channel

FCC Rules :	Part 2 §2.1051 & §90.210
IC Rules :	RSS-119 Issue 9 Section 5.8
Operating Frequency :	161.025 MHz
Channel :	2nd Channel
Power Output :	Stand-By
Channel Spacing :	WideBand
Reference Voltage :	13.8 VDC
Limit :	$50 + 10\log_{10}P$ (-20dBm)

5.7.7.5.1 10 MHz ~ 1 GHz

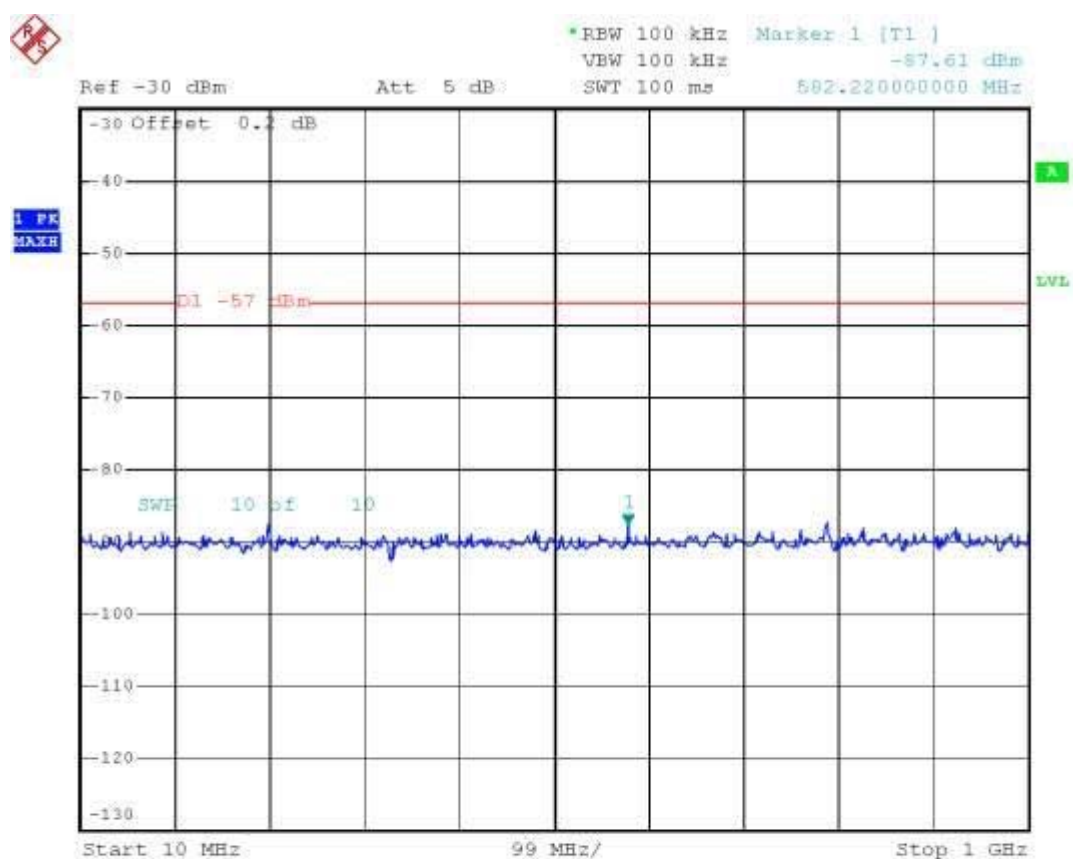


5.7.7.5.2 1 GHz ~ 7 GHz

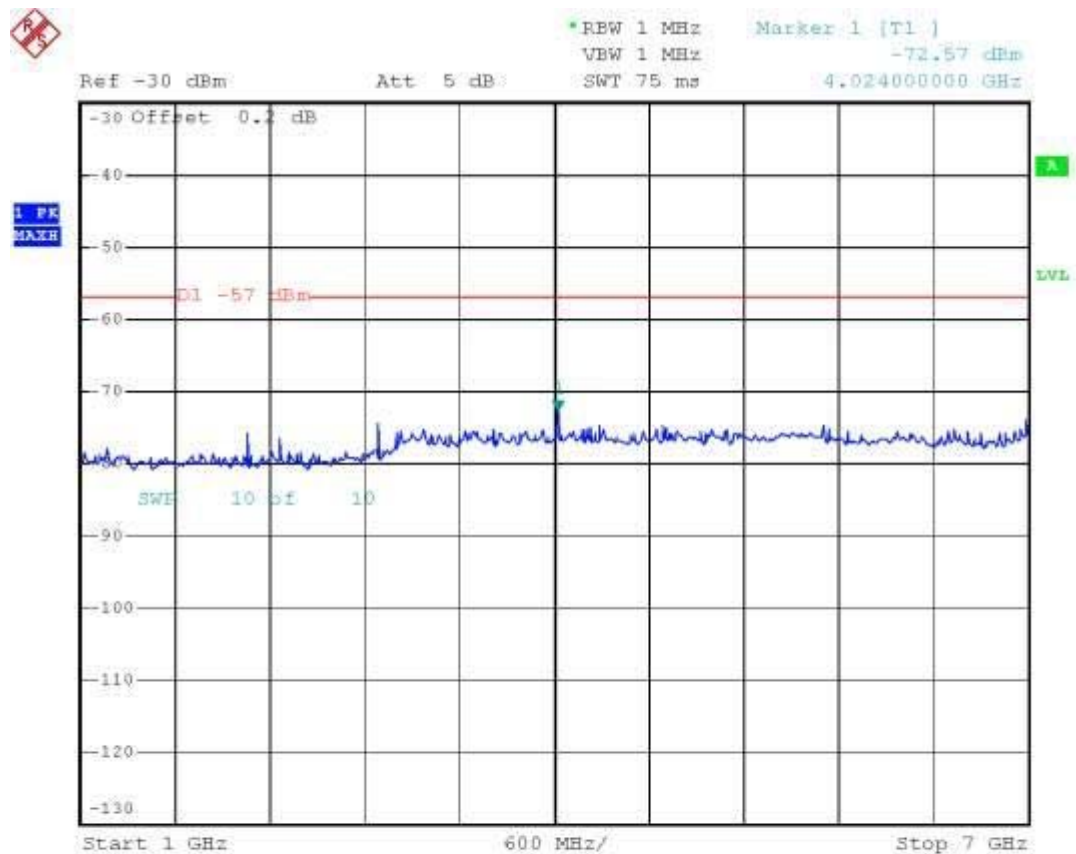


5.7.7.6 3rd Channel

FCC Rules :	Part 2 §2.1051 & §90.210
IC Rules :	RSS-119 Issue 9 Section 5.8
Operating Frequency :	173.975 MHz
Channel :	3rd Channel
Power Output :	Stand-By
Channel Spacing :	WideBand
Reference Voltage :	13.8 VDC
Limit :	$50 + 10\log_{10}P$ (-20dBm)

5.7.7.6.1 10 MHz ~ 1 GHz

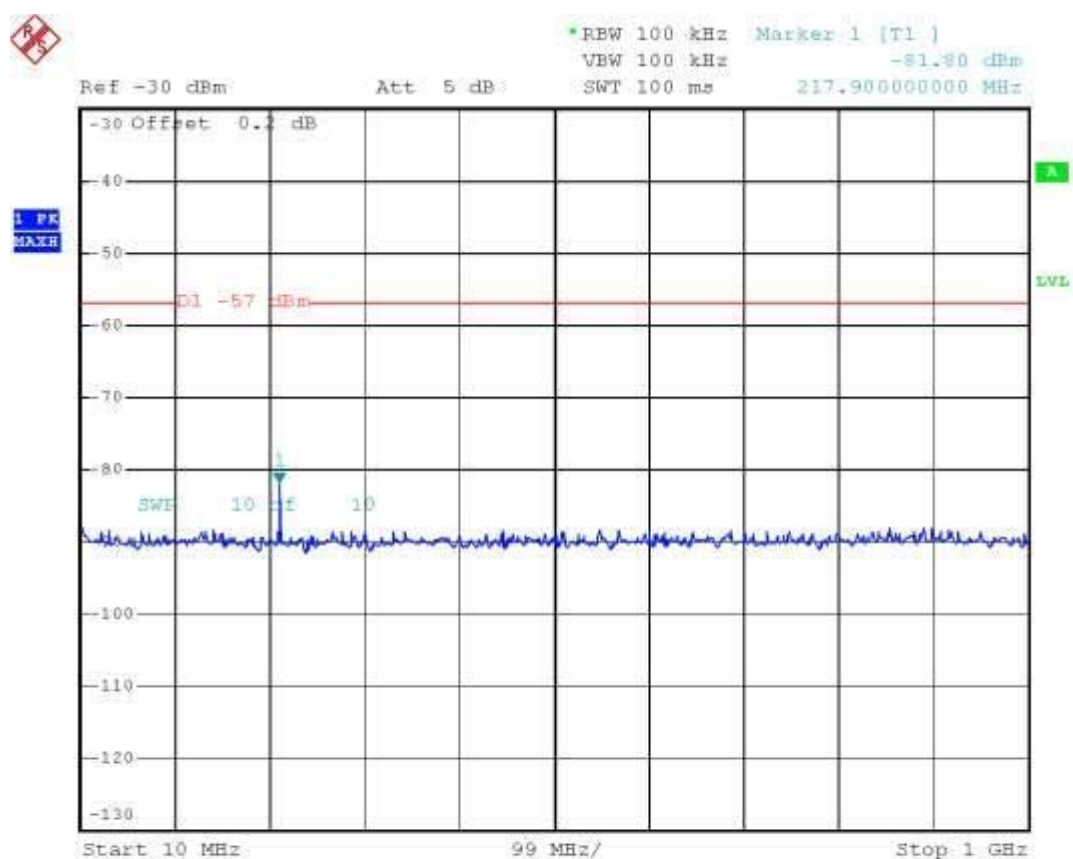

5.7.7.6.2 1 GHz ~ 7 GHz

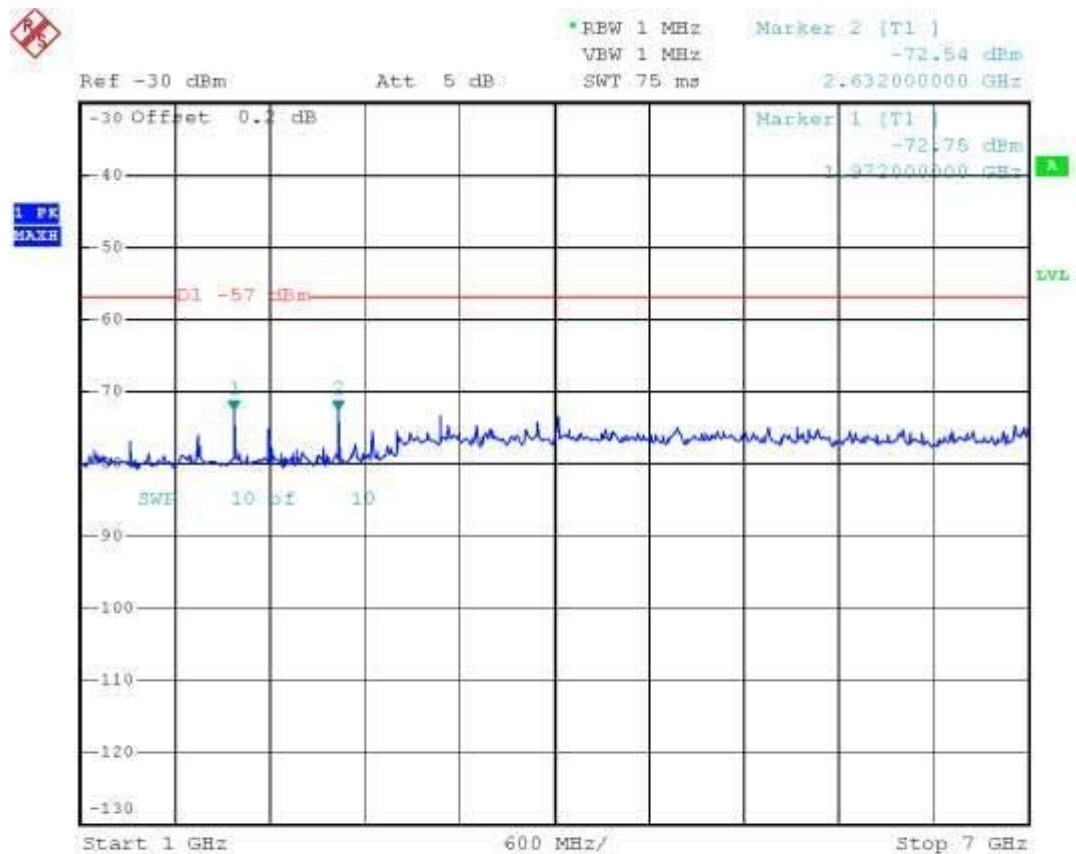

5.7.8 Data(2W Low Power)


Test Mode (TX/RX)		Spurious Emissions			
		Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)
148.025MHz	TX	202.06	-43.11	-20	23.11
		295.12	-47.45		27.45
		443.62	-49.83		29.83
		1480.00	-40.87		20.87
	RX	192.96	-77.35	-53	24.35
		1546.00	-74.45		21.45
		1932.00	-63.93		10.93
161.025MHz	TX	322.00	-38.45	-20	18.45
	RX	206.02	-85.33	-53	32.33
		1444.00	-74.96		21.96
		1650.00	-74.56		21.56
		1838.00	-75.55		22.55
173.975MHz	TX	348.58	-40.31	-20	20.31
	RX	1534.00	-73.83	-53	20.83
		1784.00	-74.89		21.89
		1974.00	-57.16		4.16

5.7.9 Plots

5.7.9.1 1st Channel


FCC Rules :	Part 2 §2.1051 & §90.210
IC Rules :	RSS-119 Issue 9 Section 5.8
Operating Frequency :	148.025 MHz
Channel :	1st Channel
Power Output :	2 Watts
Channel Spacing :	WideBand
Reference Voltage :	13.8 VDC
Limit :	$50 + 10\log_{10}P$ (-20dBm)

5.7.9.1.1 10 MHz ~ 1 GHz

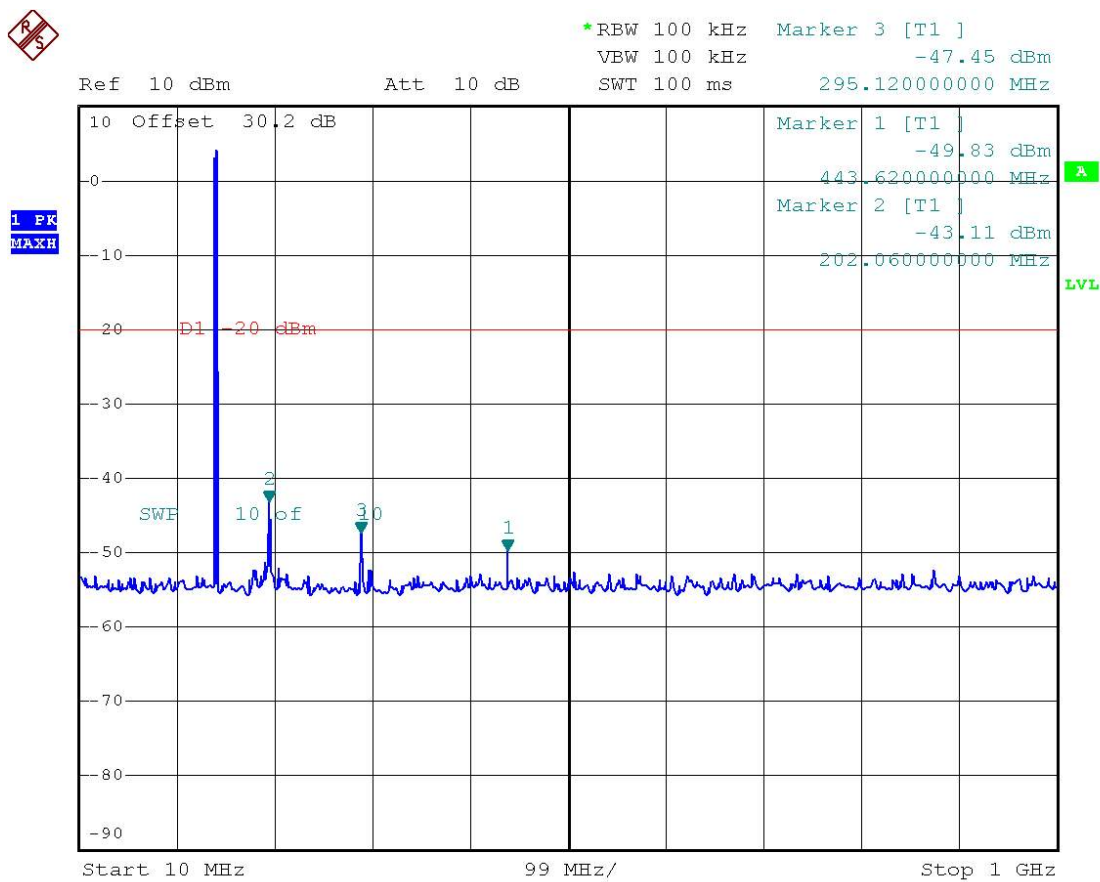

Date: 26.NOV.2008 14:25:59

5.7.9.1.2 1 GHz ~ 7 GHz

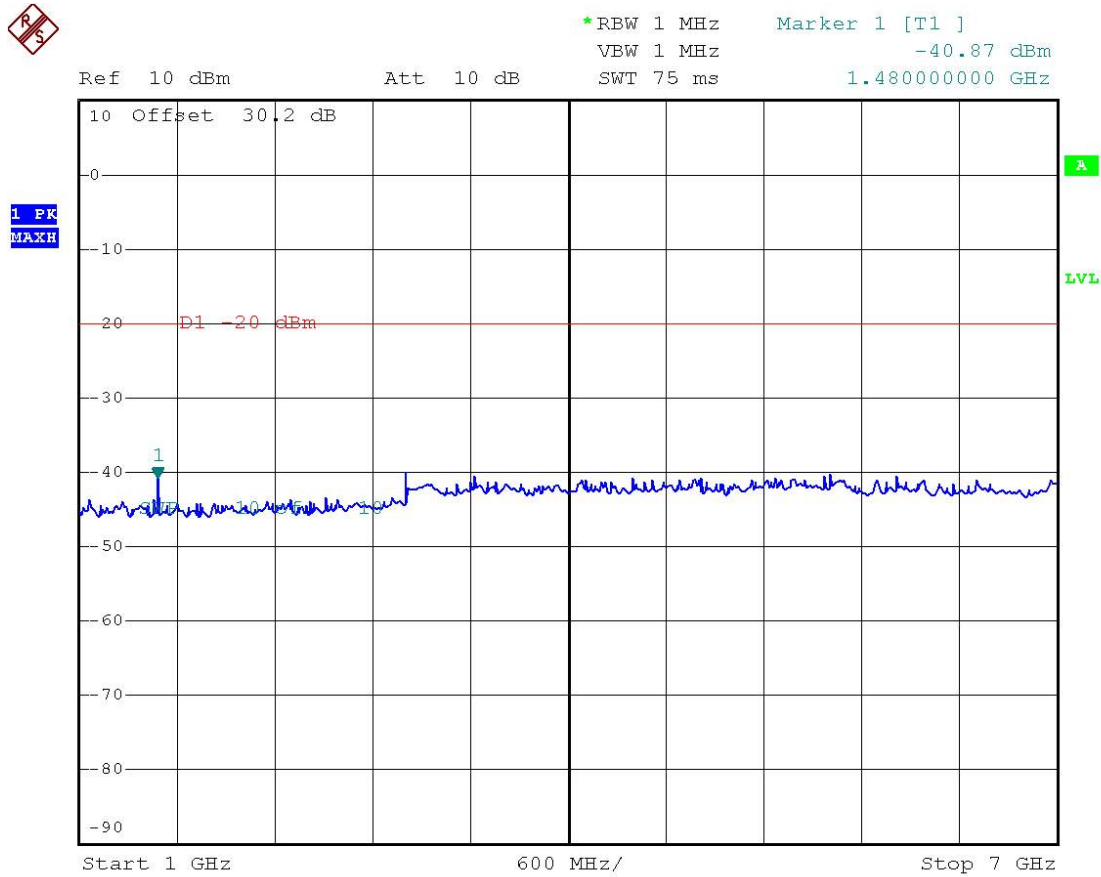


Date: 26.NOV.2008 14:25:23

5.7.9.2 2nd Channel


FCC Rules :	Part 2 §2.1051 & §90.210
IC Rules :	RSS-119 Issue 9 Section 5.8
Operating Frequency :	161.025 MHz
Channel :	2nd Channel
Power Output :	2 Watts
Channel Spacing :	WideBand
Reference Voltage :	13.8 VDC
Limit :	50 + 10log ₁₀ P (-20dBm)

5.7.9.2.1 10 MHz ~ 1 GHz

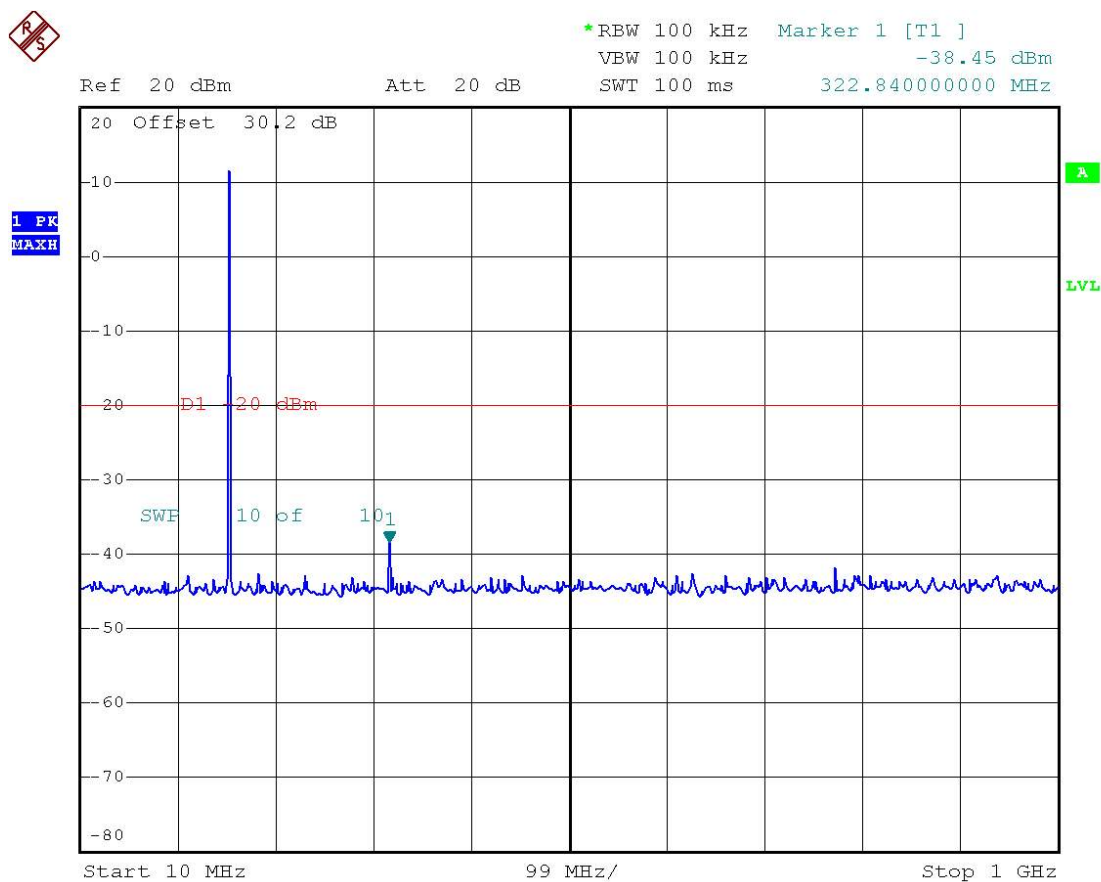

Date: 26.NOV.2008 14:26:59

5.7.9.2.2 1 GHz ~ 7 GHz

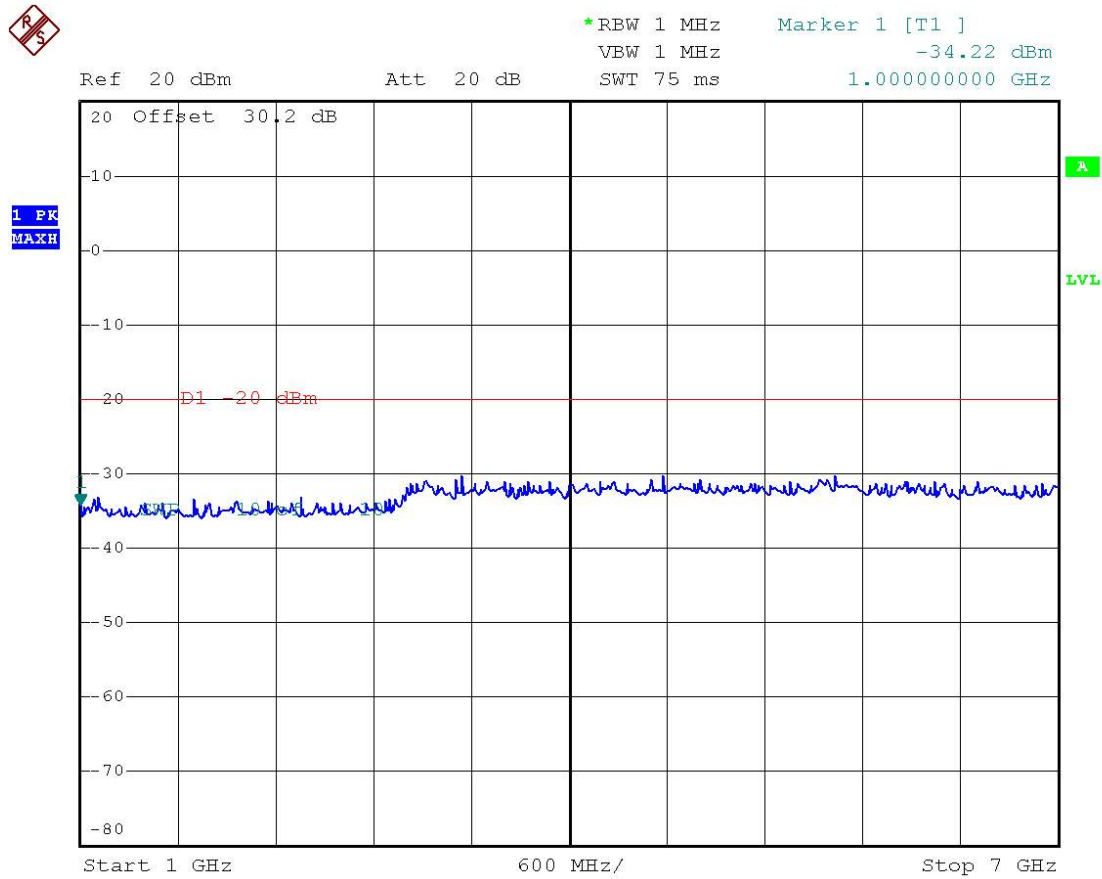


Date: 26.NOV.2008 14:27:33

5.7.9.3 3rd Channel


FCC Rules :	Part 2 §2.1051 & §90.210
IC Rules :	RSS-119 Issue 9 Section 5.8
Operating Frequency :	173.975 MHz
Channel :	3rd Channel
Power Output :	2 Watts
Channel Spacing :	WideBand
Reference Voltage :	13.8 VDC
Limit :	50 + 10log ₁₀ P (-20dBm)

5.7.9.3.1 10 MHz ~ 1 GHz

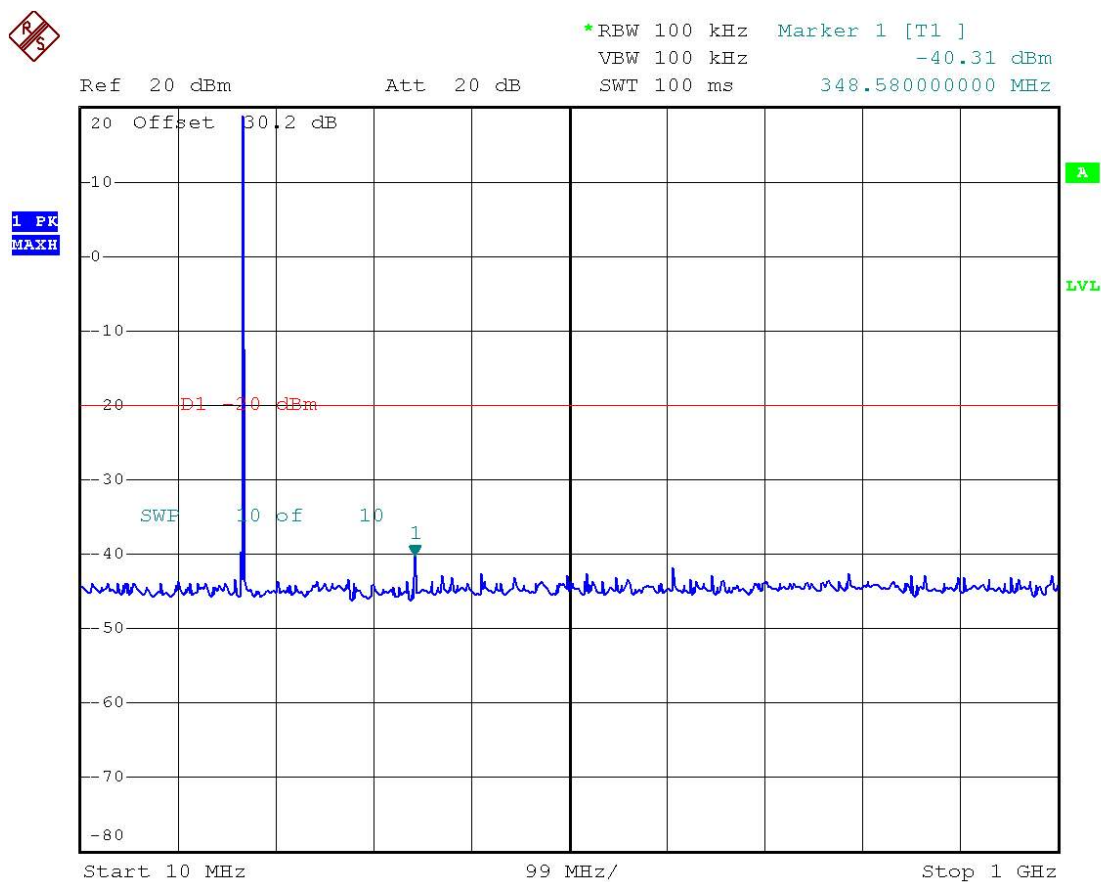

Date: 26.NOV.2008 14:28:29

5.7.9.3.2 1 GHz ~ 7 GHz

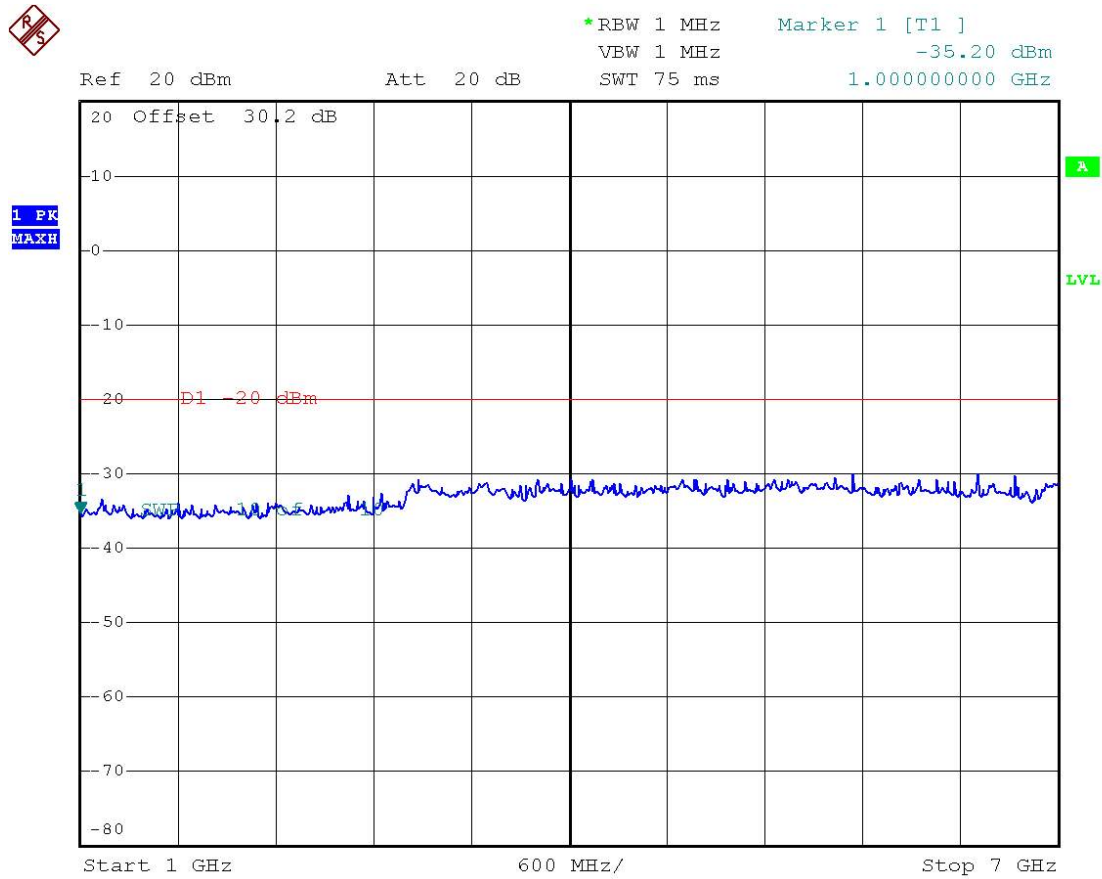

Date: 26.NOV.2008 14:28:54