




Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode		HT40		Test Freq. (MHz)		5310			
N _{TX}	2			Polarization		V			
Level (dBuV/m)									Date: 2015-09-19
1	8202.000	34.63	-19.37	54.00	28.18	36.18	5.38	35.11	Average
2	8202.000	48.26	-25.74	74.00	41.81	36.18	5.38	35.11	Peak
3	10620.000	37.07	-16.93	54.00	27.79	37.74	6.26	34.72	Average
4	10620.000	50.13	-23.87	74.00	40.85	37.74	6.26	34.72	Peak
5	15930.000	43.98	-10.02	54.00	30.33	41.20	7.66	35.21	Average
6	15930.000	58.29	-15.71	74.00	44.64	41.20	7.66	35.21	Peak


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
 Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.





Transmitter Radiated Unwanted Emissions (Above 1GHz)													
Modulation Mode		HT40		Test Freq. (MHz)		5310							
N _{TX}	2			Polarization		H							
Level (dBuV/m)									Date: 2015-09-19				
Freq	Level	Over Limit	Line	Read	Antenna	Cable	Preamp						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB						
1	7608.000	34.33	-19.67	54.00	27.68	36.02	5.64	35.01	Average				
2	7608.000	48.65	-25.35	74.00	42.00	36.02	5.64	35.01	Peak				
3	10620.000	37.59	-16.41	54.00	28.31	37.74	6.26	34.72	Average				
4	10620.000	50.60	-23.40	74.00	41.32	37.74	6.26	34.72	Peak				
5	15930.000	43.98	-10.02	54.00	30.33	41.20	7.66	35.21	Average				
6	15930.000	56.56	-17.44	74.00	42.91	41.20	7.66	35.21	Peak				


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
 Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

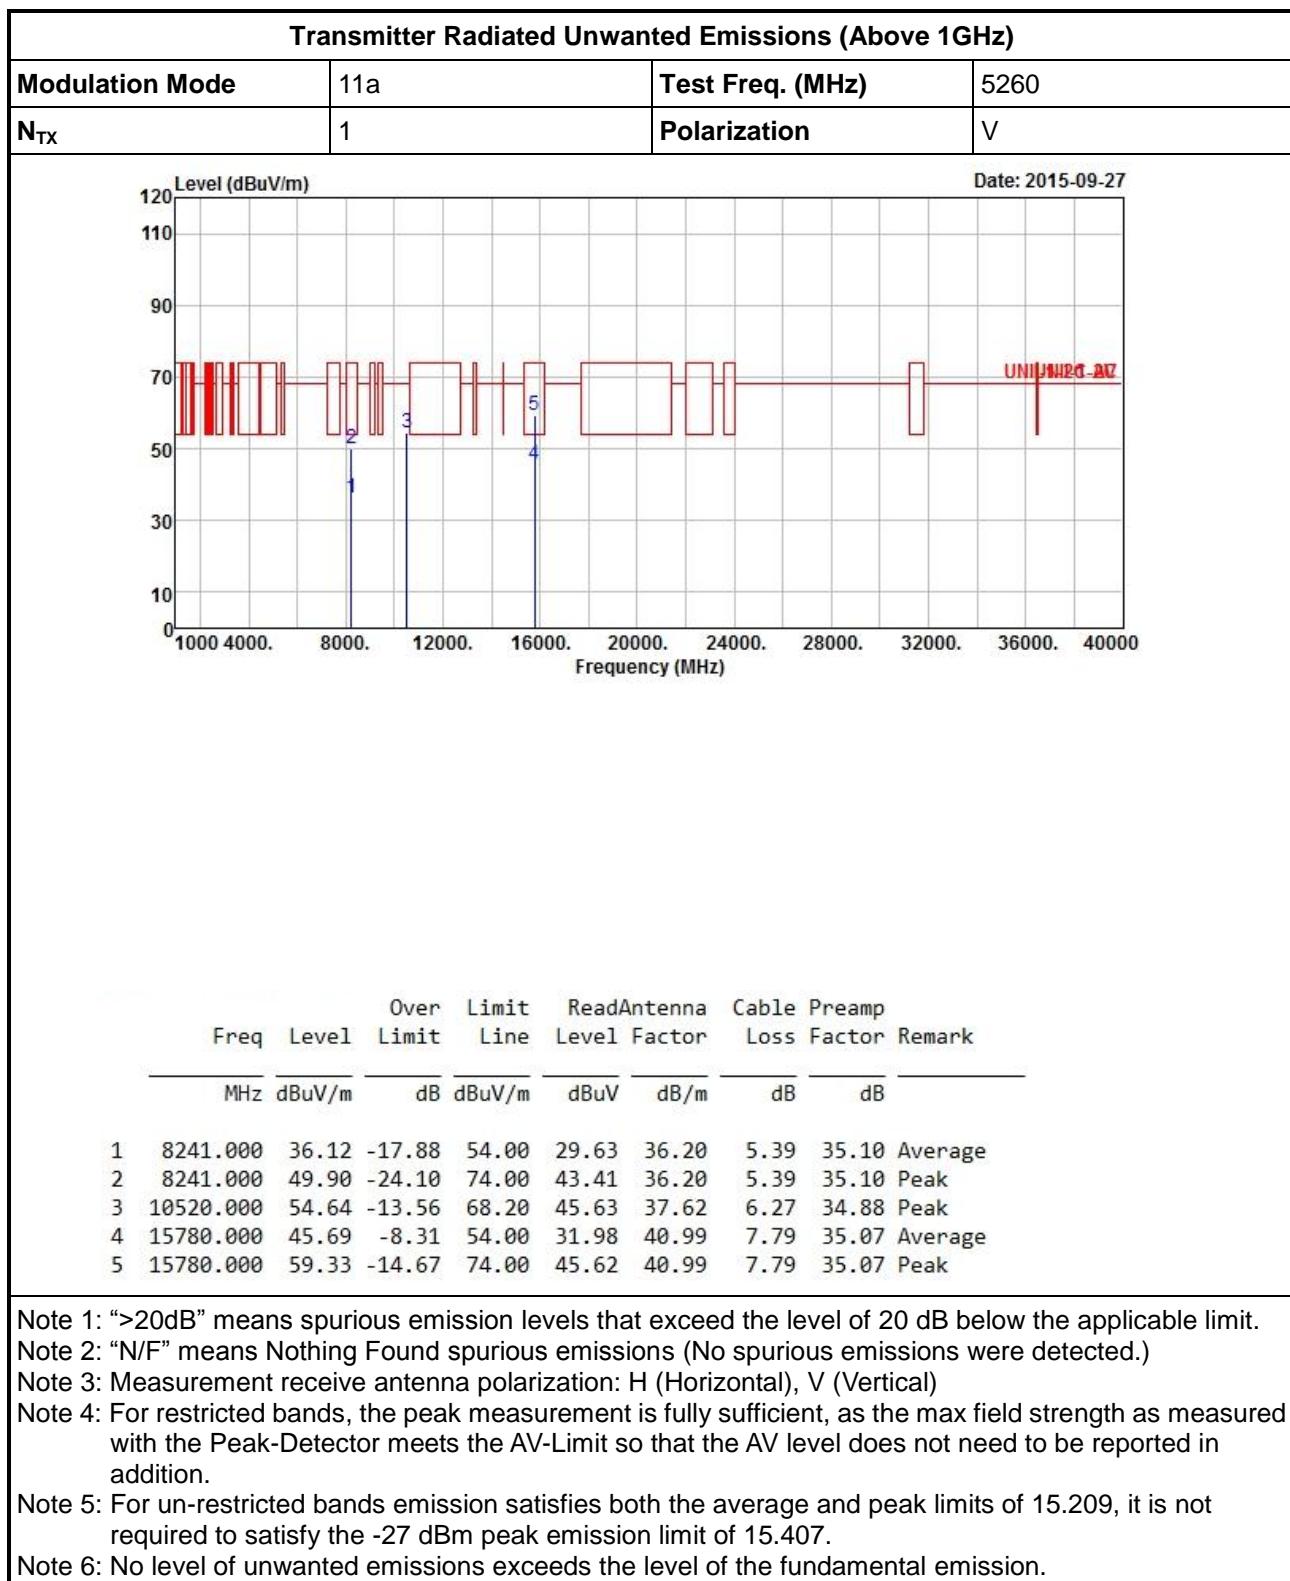

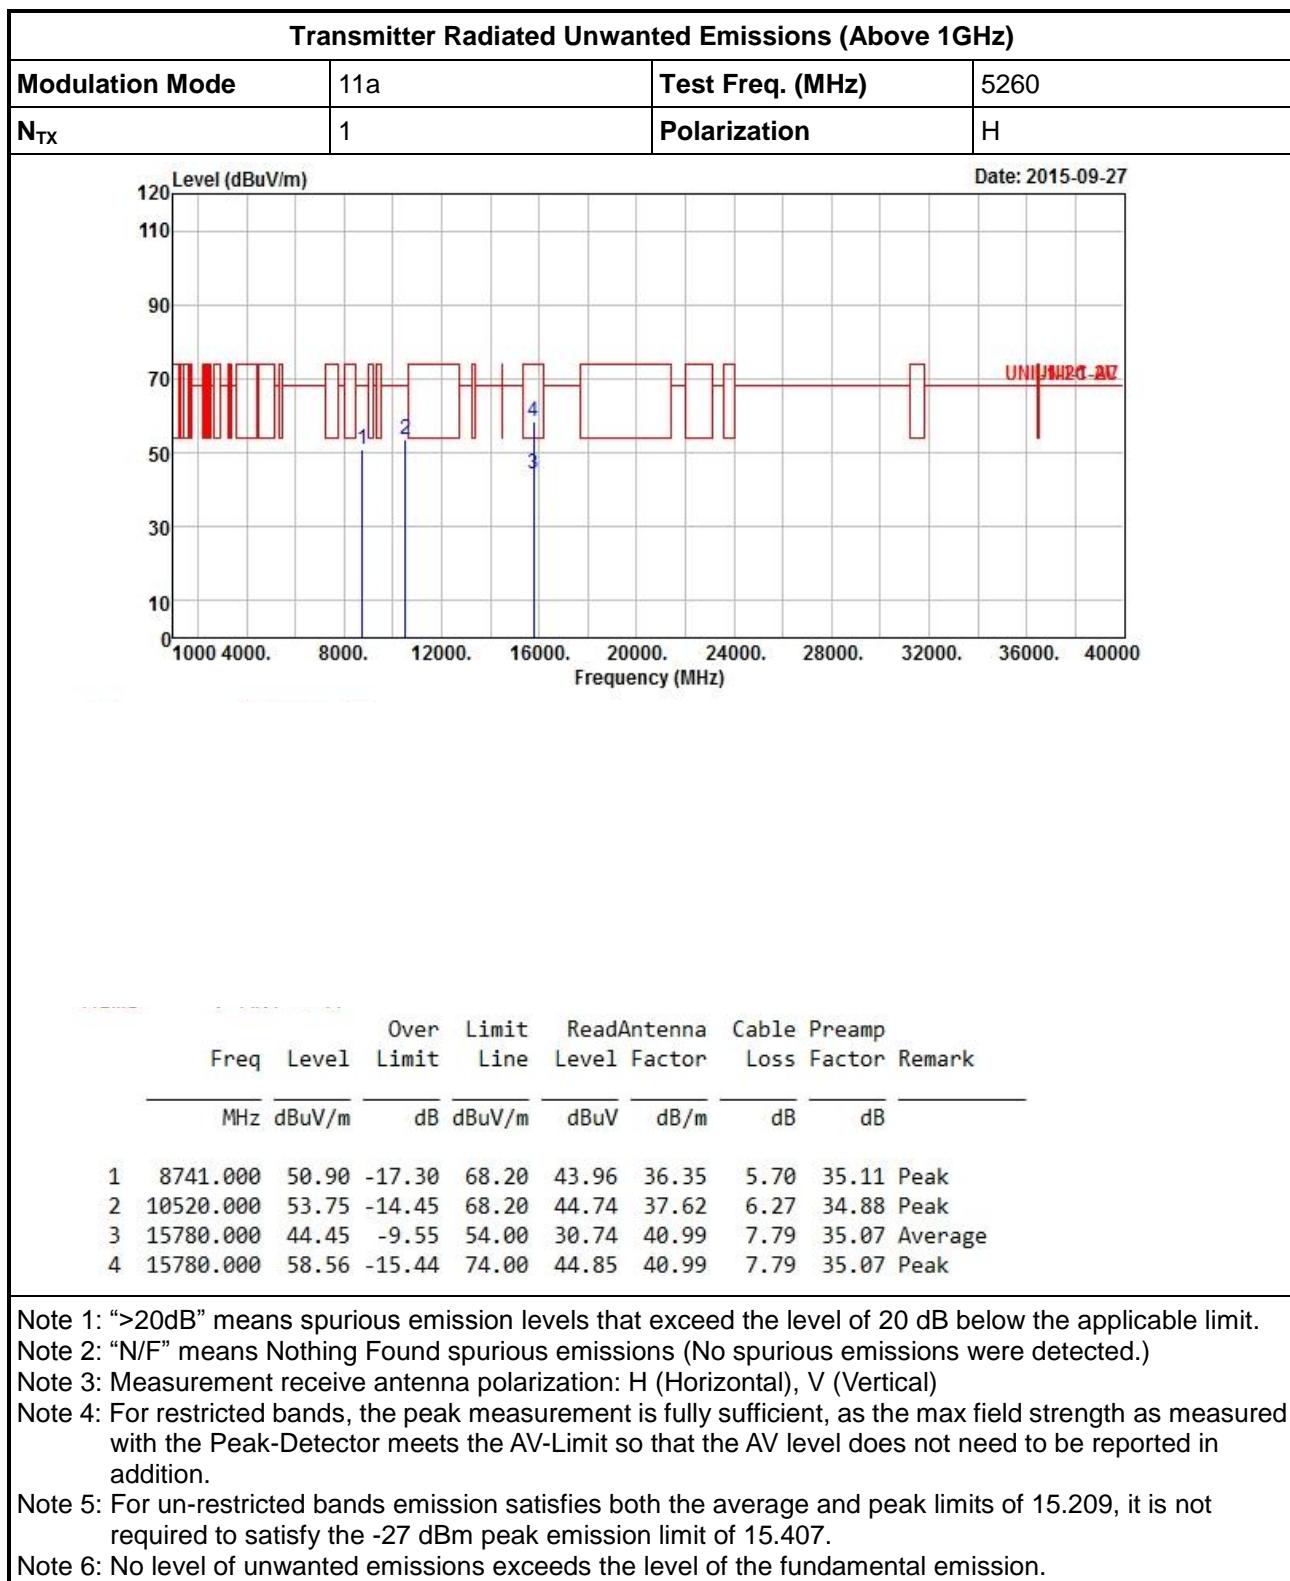

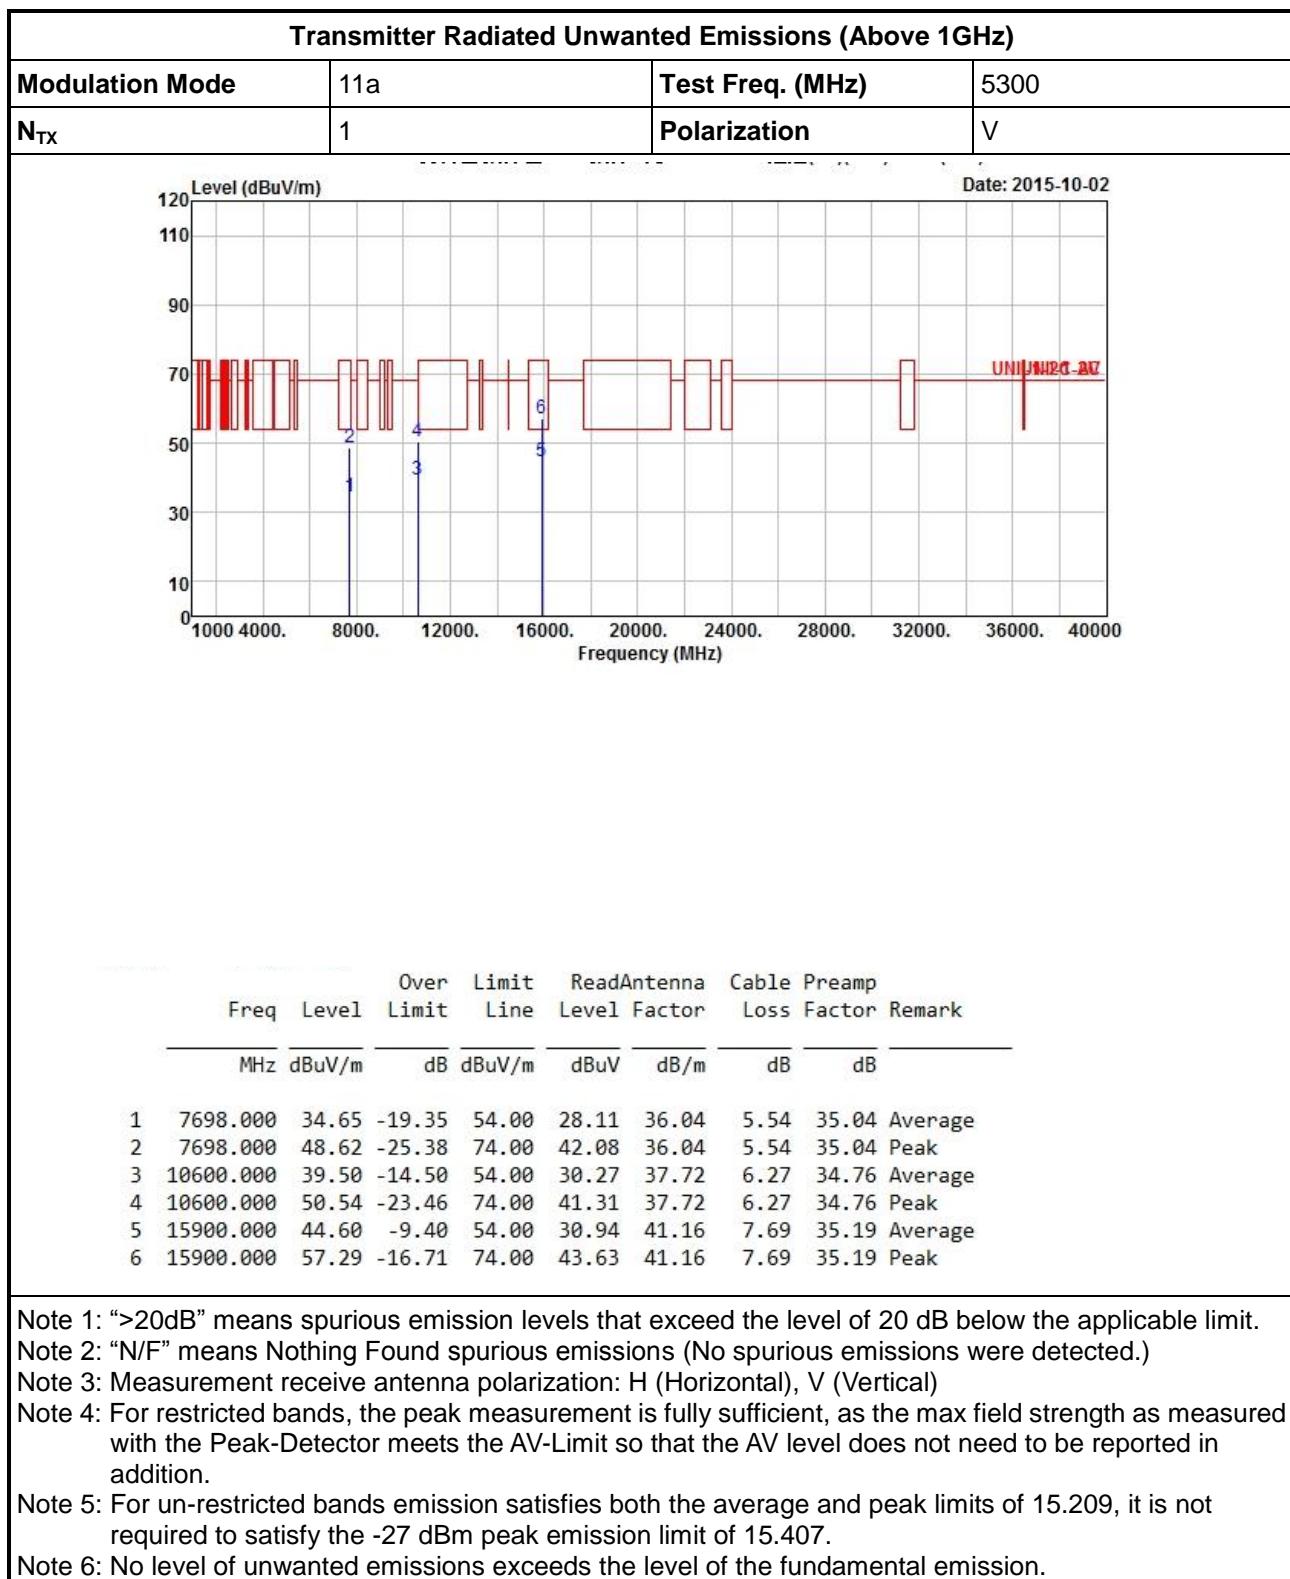

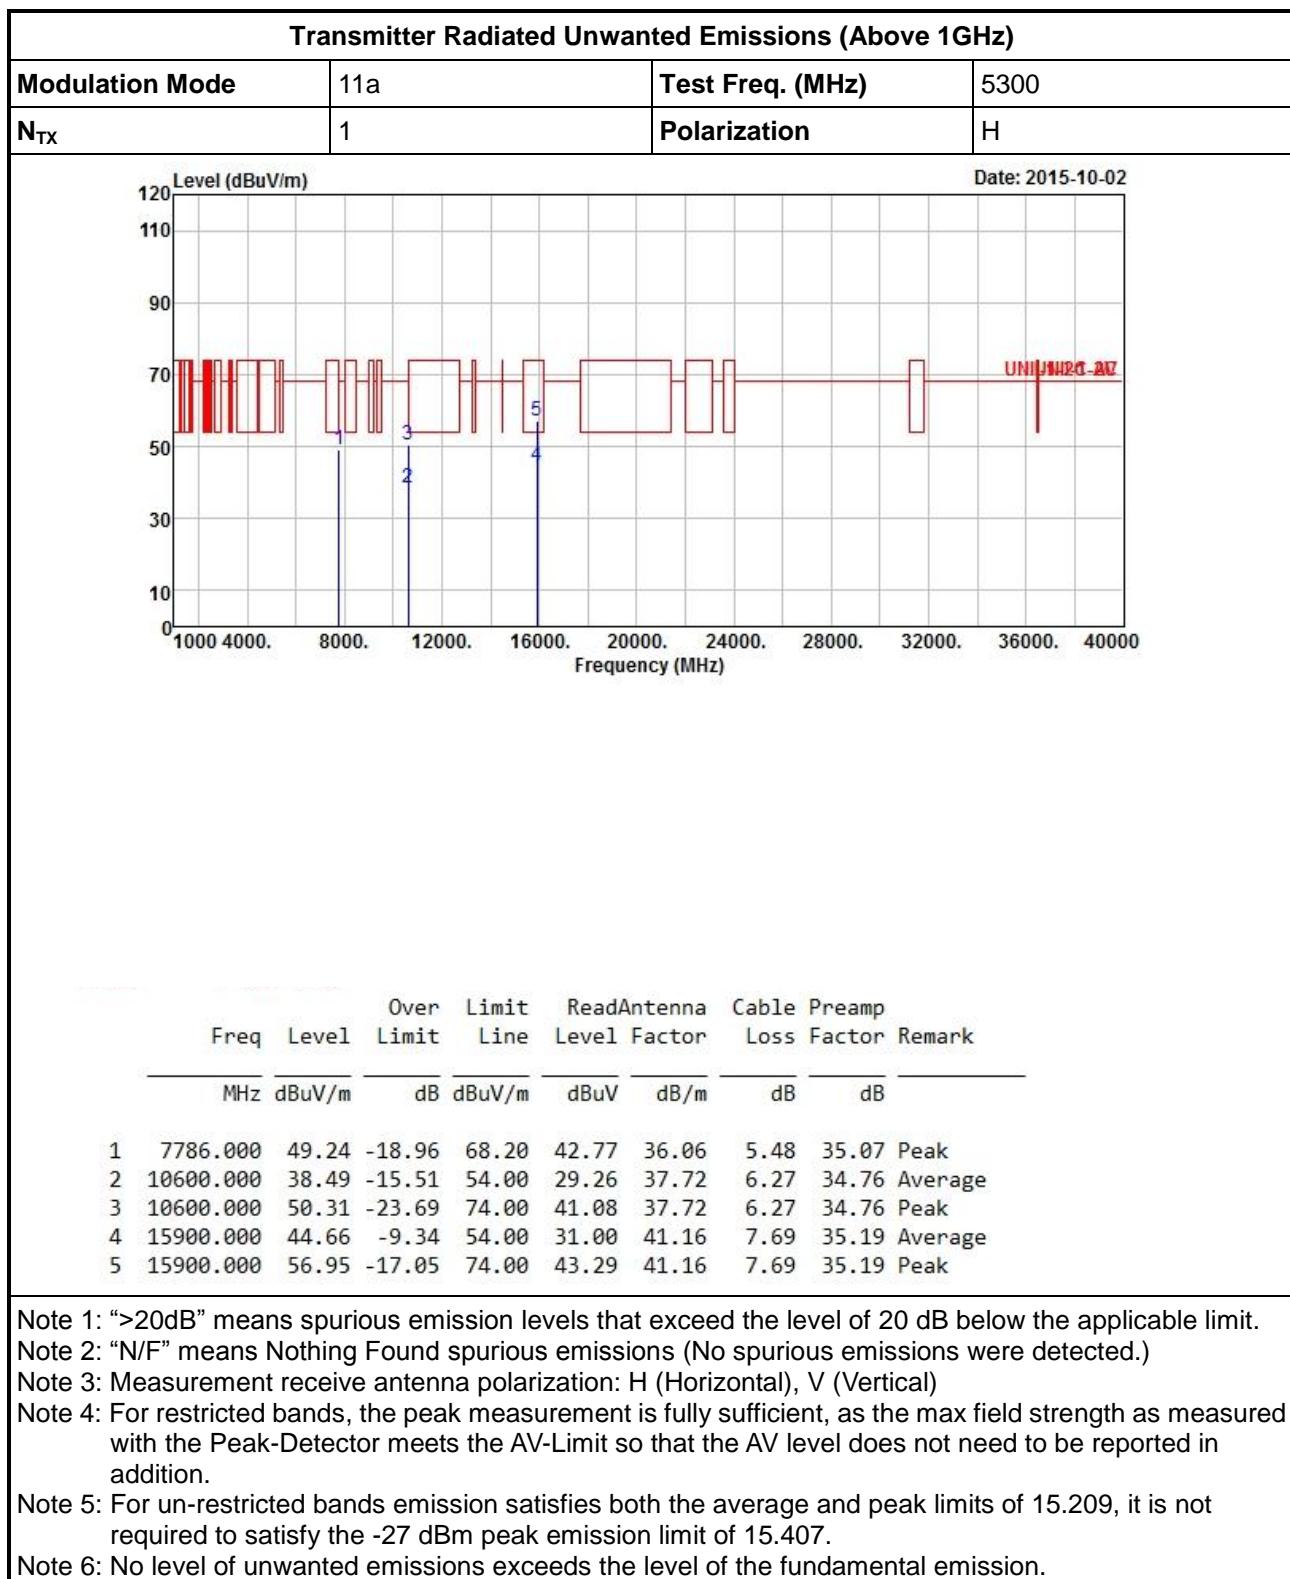

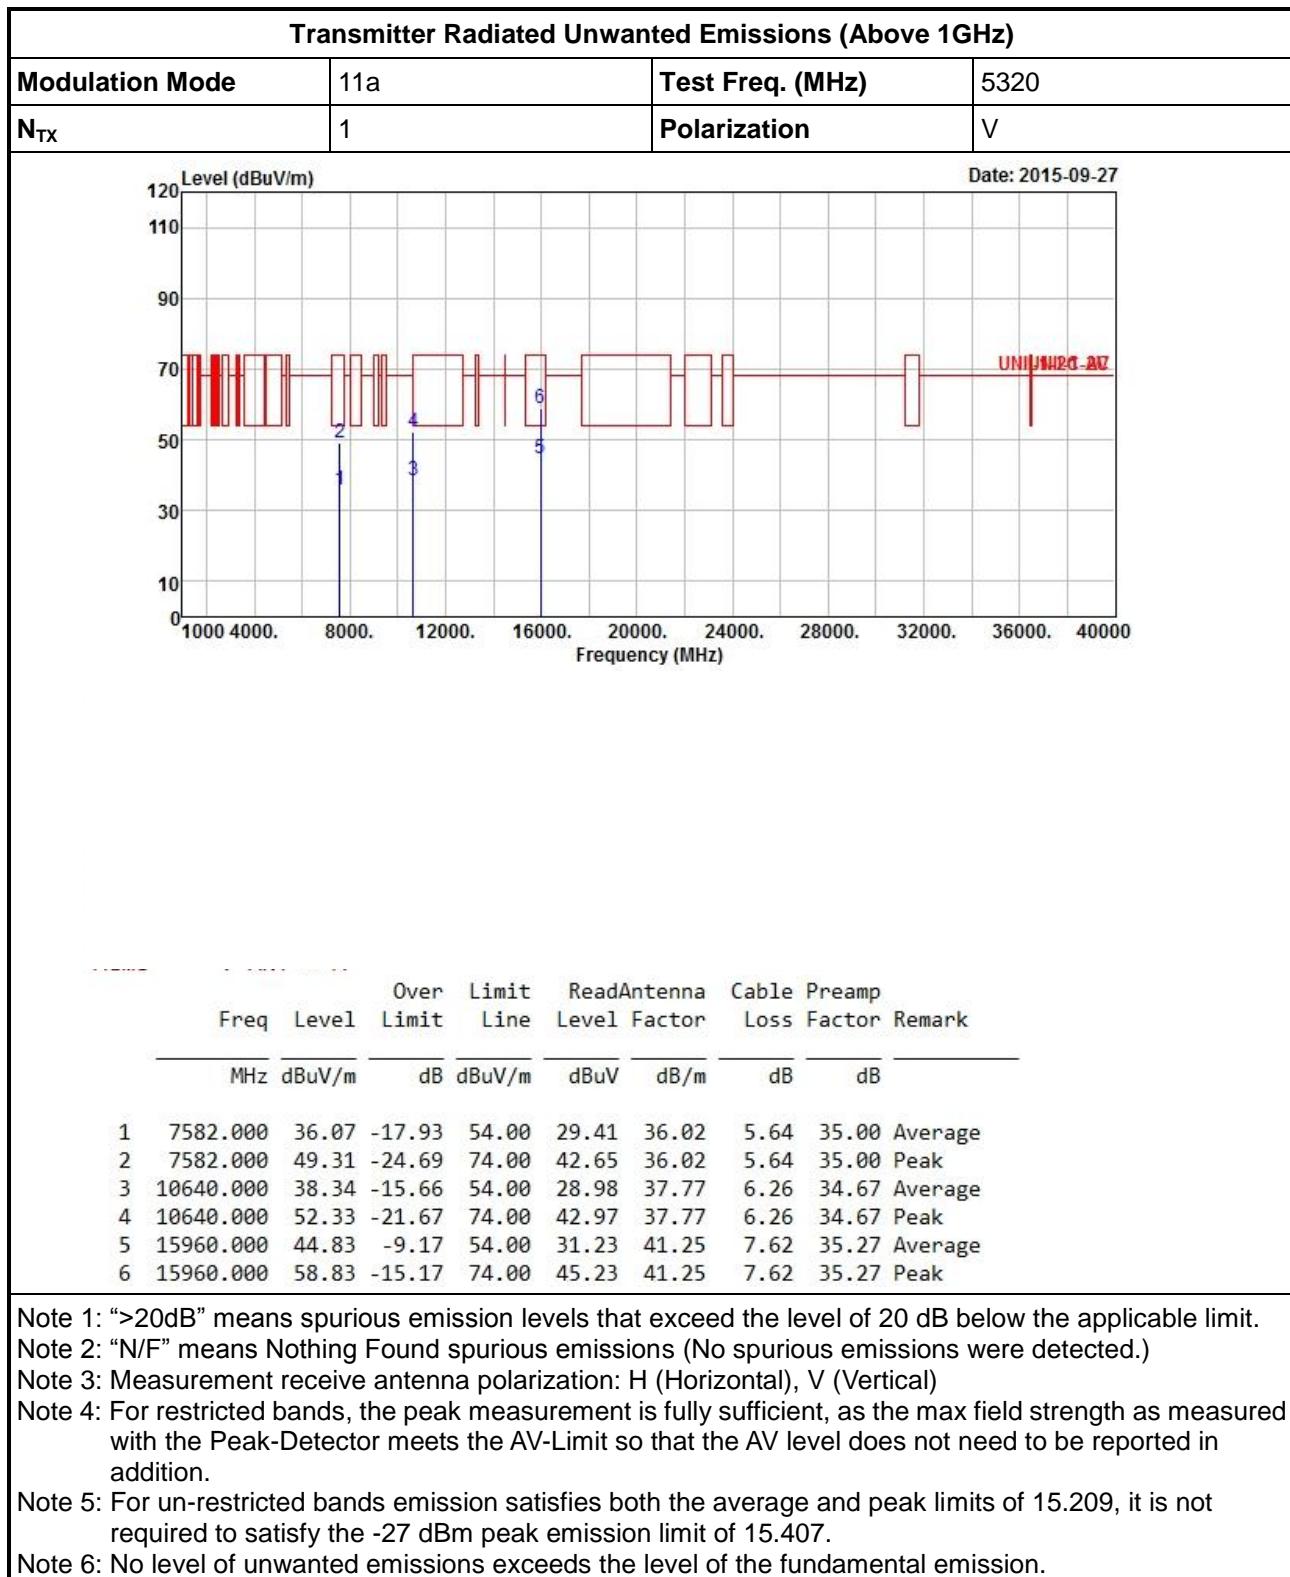



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5320
N _{TX}	1	Polarization	H

Date: 2015-09-27

Level (dBuV/m)

Frequency (MHz)

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp
		Line	Level	Factor		Loss	Factor
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1 8991.000	51.65	-16.55	68.20	44.42	36.40	5.98	35.15 Peak
2 10640.000	39.47	-14.53	54.00	30.11	37.77	6.26	34.67 Average
3 10640.000	53.11	-20.89	74.00	43.75	37.77	6.26	34.67 Peak
4 15960.000	44.34	-9.66	54.00	30.74	41.25	7.62	35.27 Average
5 15960.000	57.95	-16.05	74.00	44.35	41.25	7.62	35.27 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode	HT20		Test Freq. (MHz)	5260				
N _{TX}	1		Polarization	V				
Date: 2015-09-27								
Level (dB _{uV/m})								
120	110	90	70	50	30	10	0	
1000. 4000. 8000. 12000. 16000. 20000. 24000. 28000. 32000. 36000. 40000								
Frequency (MHz)								
1	7152.000	49.84	-18.36	68.20	43.62	35.86	5.28	34.92 Peak
2	10520.000	54.33	-13.87	68.20	45.32	37.62	6.27	34.88 Peak
3	15780.000	45.26	-8.74	54.00	31.55	40.99	7.79	35.07 Average
4	15780.000	59.69	-14.31	74.00	45.98	40.99	7.79	35.07 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
 Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

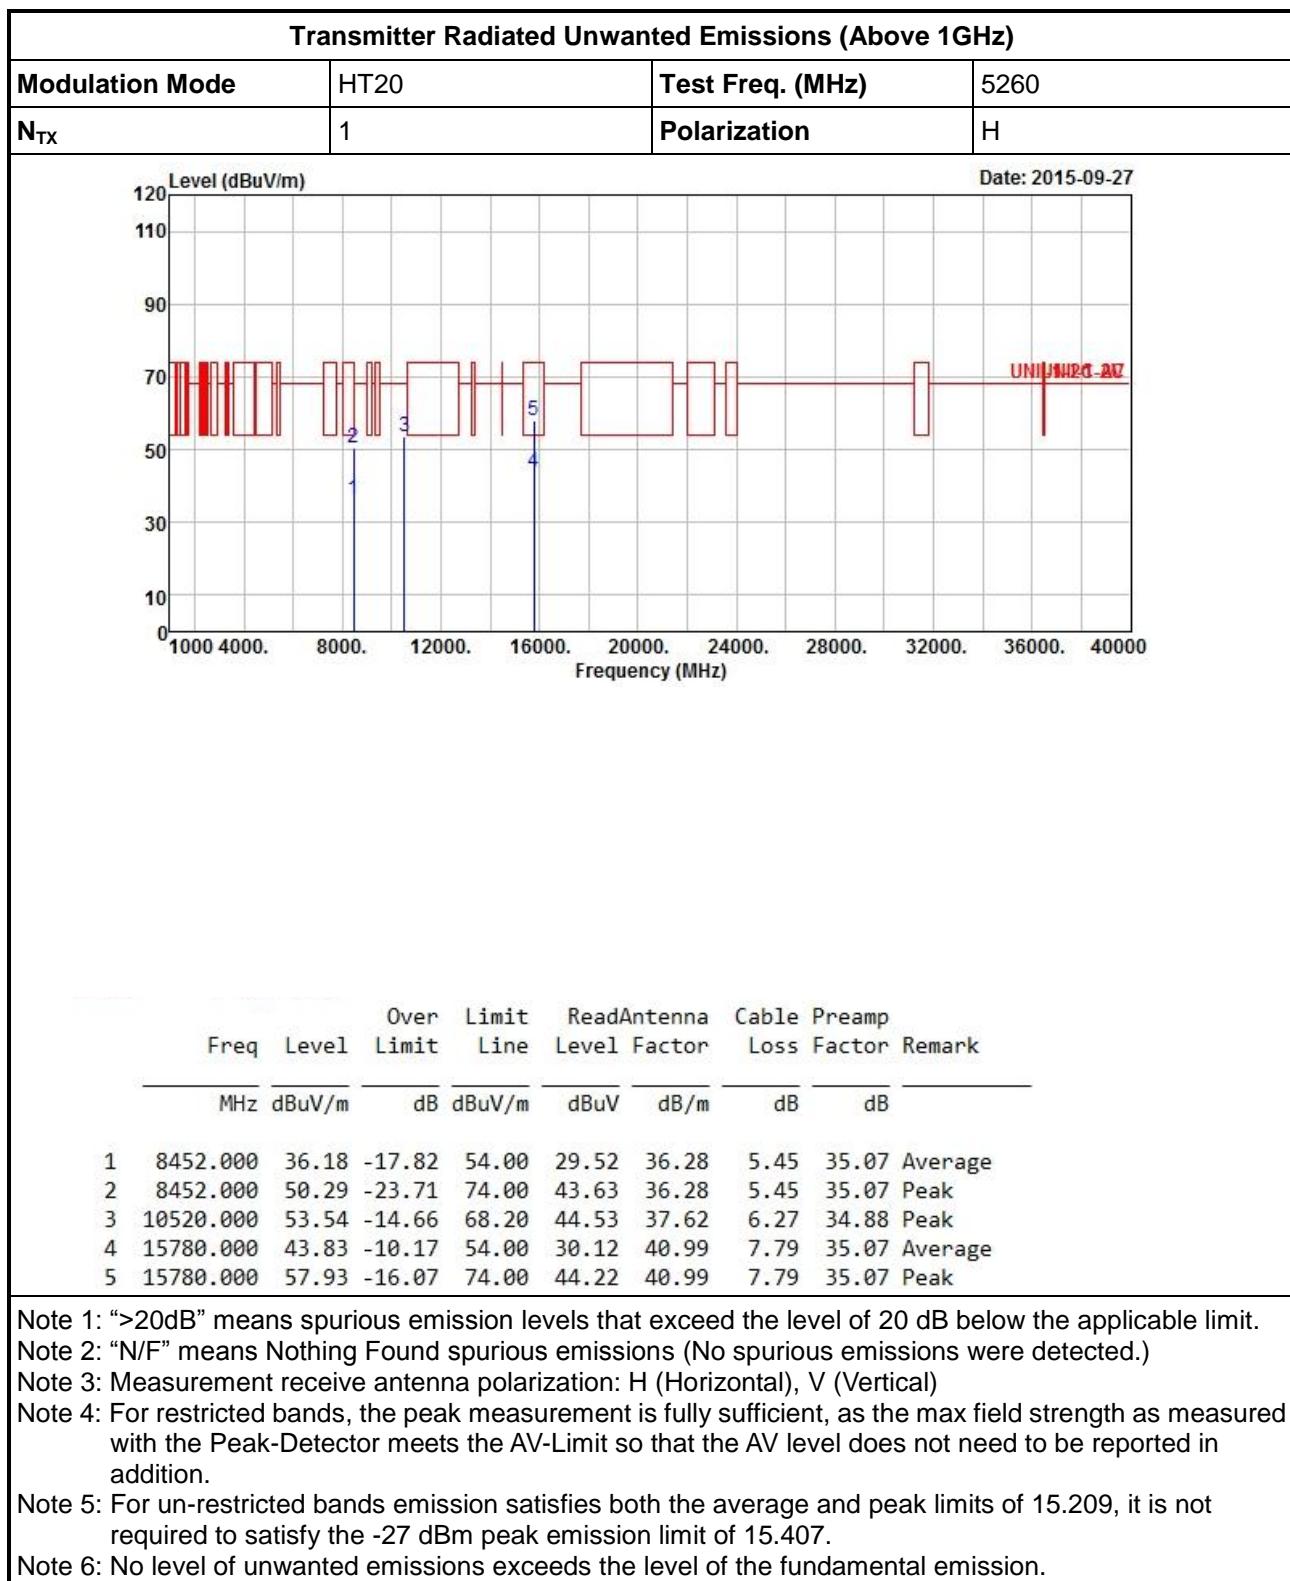



Transmitter Radiated Unwanted Emissions (Above 1GHz)																																						
Modulation Mode		HT20			Test Freq. (MHz)		5300																															
N _{TX}	1				Polarization		V																															
Level (dBuV/m)										Date: 2015-10-02																												
<table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th rowspan="2">Level</th> <th>Over</th> <th>Limit</th> <th>Read</th> <th>Antenna</th> <th>Cable</th> <th>Preamp</th> <th colspan="3">Remark</th> </tr> <tr> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV/m</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td colspan="3"></td> </tr> </tbody> </table>											Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark			Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			
Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark																														
		Limit	Line	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																															
1	8226.000	34.65	-19.35	54.00	28.19	36.19	5.38	35.11	Average																													
2	8226.000	48.19	-25.81	74.00	41.73	36.19	5.38	35.11	Peak																													
3	10600.000	40.22	-13.78	54.00	30.99	37.72	6.27	34.76	Average																													
4	10600.000	51.12	-22.88	74.00	41.89	37.72	6.27	34.76	Peak																													
5	15900.000	44.59	-9.41	54.00	30.93	41.16	7.69	35.19	Average																													
6	15900.000	57.87	-16.13	74.00	44.21	41.16	7.69	35.19	Peak																													

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.										
Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)										
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)										
Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.										
Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.										
Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.										



Transmitter Radiated Unwanted Emissions (Above 1GHz)															
Modulation Mode		HT20			Test Freq. (MHz)		5300								
N _{TX}	1				Polarization		H								
Level (dBuV/m)										Date: 2015-10-02					
Freq	Level	Over Limit	Limit	Read	Antenna	Cable	Preamp								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB								
1	7566.000	34.48	-19.52	54.00	27.79	36.01	5.68	35.00	Average						
2	7566.000	48.05	-25.95	74.00	41.36	36.01	5.68	35.00	Peak						
3	10600.000	38.67	-15.33	54.00	29.44	37.72	6.27	34.76	Average						
4	10600.000	50.66	-23.34	74.00	41.43	37.72	6.27	34.76	Peak						
5	15900.000	44.64	-9.36	54.00	30.98	41.16	7.69	35.19	Average						
6	15900.000	57.48	-16.52	74.00	43.82	41.16	7.69	35.19	Peak						


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
 Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode		HT20		Test Freq. (MHz)		5320			
N _{TX}	1			Polarization		V			
Date: 2015-09-27									
120	110	90	70	50	30	10	0		
1000	4000.	8000.	12000.	16000.	20000.	24000.	28000.	32000.	36000. 40000
Frequency (MHz)									
1	2	3	4	5					UNINTENDED-207


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7963.000	49.69	-18.51	68.20	43.41	36.09	5.31	35.12 Peak
2	10640.000	38.34	-15.66	54.00	28.98	37.77	6.26	34.67 Average
3	10640.000	52.31	-21.69	74.00	42.95	37.77	6.26	34.67 Peak
4	15960.000	45.02	-8.98	54.00	31.42	41.25	7.62	35.27 Average
5	15960.000	58.63	-15.37	74.00	45.03	41.25	7.62	35.27 Peak


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
 Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

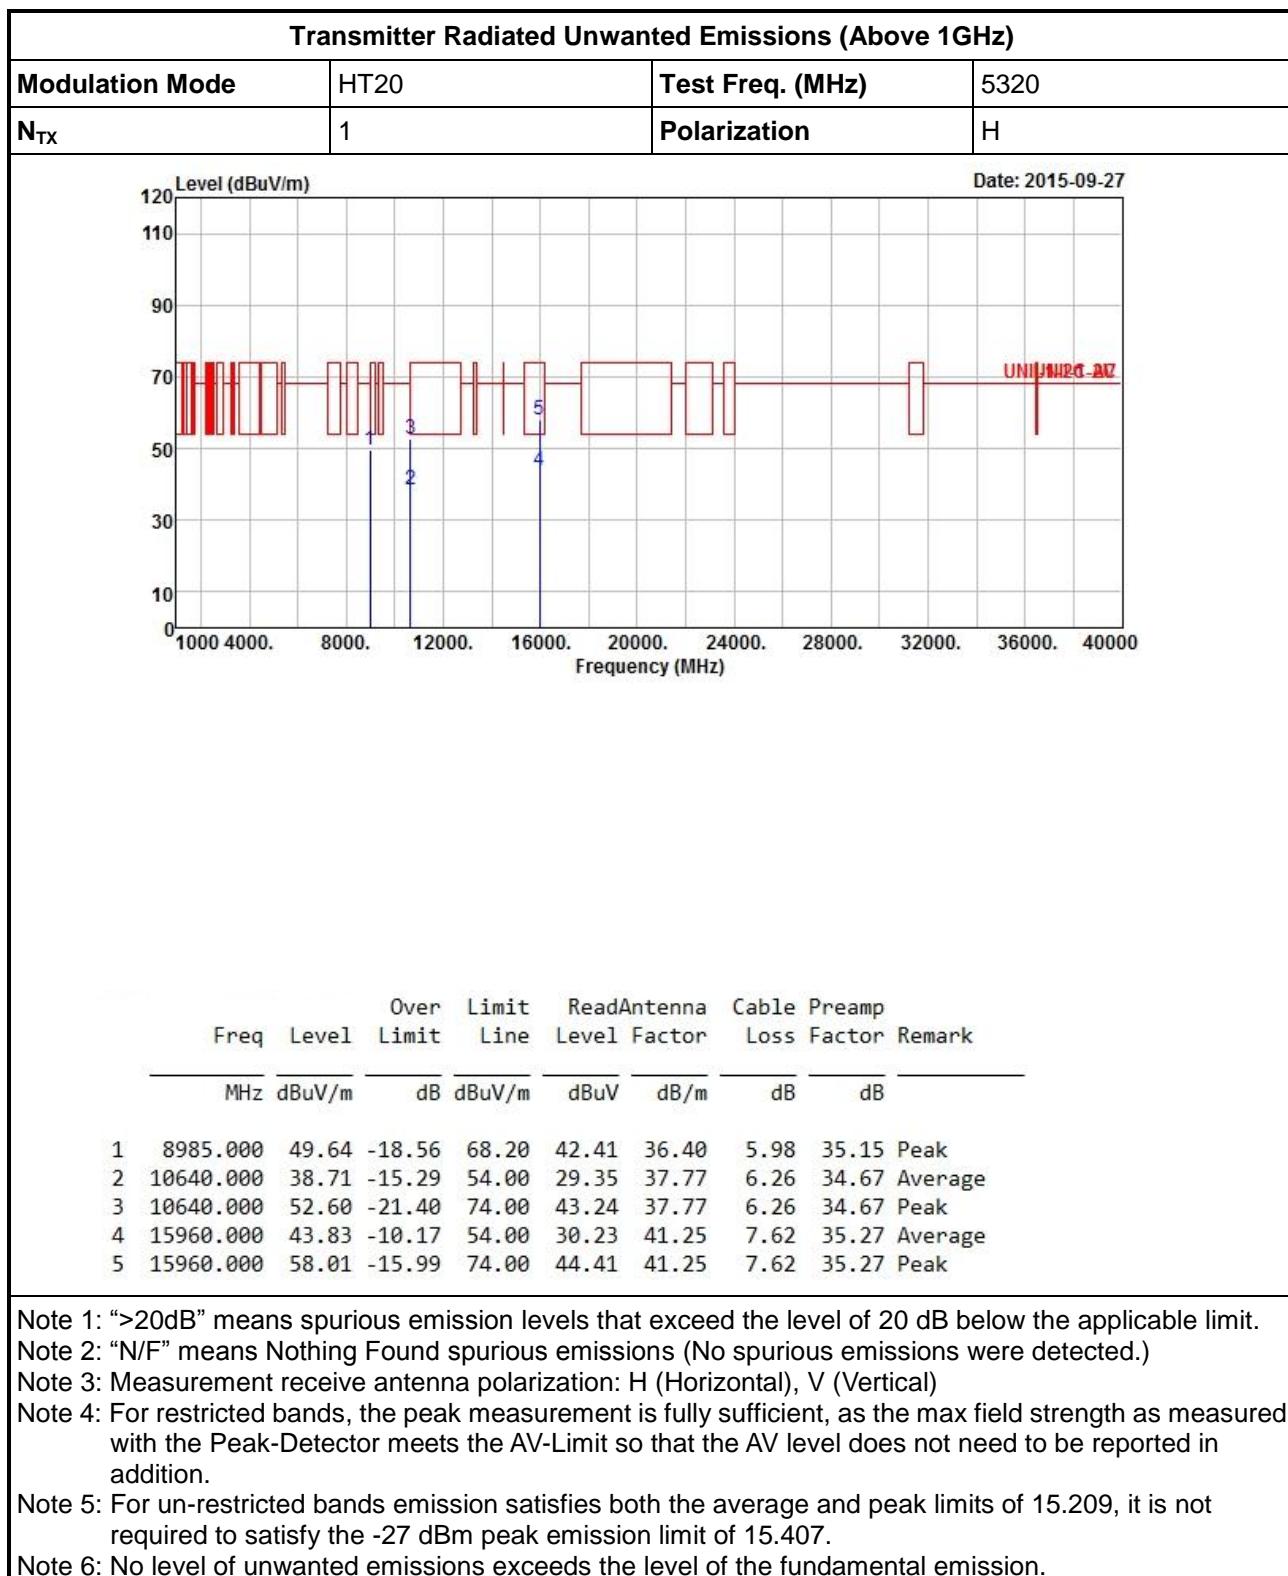



Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																															
Modulation Mode		HT40		Test Freq. (MHz)		5270																																																																									
N _{TX}	1			Polarization		V																																																																									
Level (dBuV/m)									Date: 2015-10-01																																																																						
<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Line Limit</th> <th>Read</th> <th>Antenna</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th colspan="2"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8130.000</td> <td>34.62</td> <td>-19.38</td> <td>54.00</td> <td>28.23</td> <td>36.15</td> <td>5.36</td> <td colspan="2">35.12 Average</td> </tr> <tr> <td>2</td> <td>8130.000</td> <td>48.61</td> <td>-25.39</td> <td>74.00</td> <td>42.22</td> <td>36.15</td> <td>5.36</td> <td colspan="2">35.12 Peak</td> </tr> <tr> <td>3</td> <td>10540.000</td> <td>52.46</td> <td>-15.74</td> <td>68.20</td> <td>43.39</td> <td>37.64</td> <td>6.27</td> <td colspan="2">34.84 Peak</td> </tr> <tr> <td>4</td> <td>15810.000</td> <td>45.18</td> <td>-8.82</td> <td>54.00</td> <td>31.49</td> <td>41.03</td> <td>7.76</td> <td colspan="2">35.10 Average</td> </tr> <tr> <td>5</td> <td>15810.000</td> <td>57.66</td> <td>-16.34</td> <td>74.00</td> <td>43.97</td> <td>41.03</td> <td>7.76</td> <td colspan="2" rowspan="7">35.10 Peak</td> </tr> </tbody> </table>										Freq	Level	Over Limit	Line Limit	Read	Antenna	Cable	Preamp	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			1	8130.000	34.62	-19.38	54.00	28.23	36.15	5.36	35.12 Average		2	8130.000	48.61	-25.39	74.00	42.22	36.15	5.36	35.12 Peak		3	10540.000	52.46	-15.74	68.20	43.39	37.64	6.27	34.84 Peak		4	15810.000	45.18	-8.82	54.00	31.49	41.03	7.76	35.10 Average		5	15810.000	57.66	-16.34	74.00	43.97	41.03	7.76	35.10 Peak	
Freq	Level	Over Limit	Line Limit	Read	Antenna	Cable	Preamp	Remark																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																								
1	8130.000	34.62	-19.38	54.00	28.23	36.15	5.36	35.12 Average																																																																							
2	8130.000	48.61	-25.39	74.00	42.22	36.15	5.36	35.12 Peak																																																																							
3	10540.000	52.46	-15.74	68.20	43.39	37.64	6.27	34.84 Peak																																																																							
4	15810.000	45.18	-8.82	54.00	31.49	41.03	7.76	35.10 Average																																																																							
5	15810.000	57.66	-16.34	74.00	43.97	41.03	7.76	35.10 Peak																																																																							
Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.																																																																															
Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)																																																																															
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)																																																																															
Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.																																																																															
Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.																																																																															
Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.																																																																															

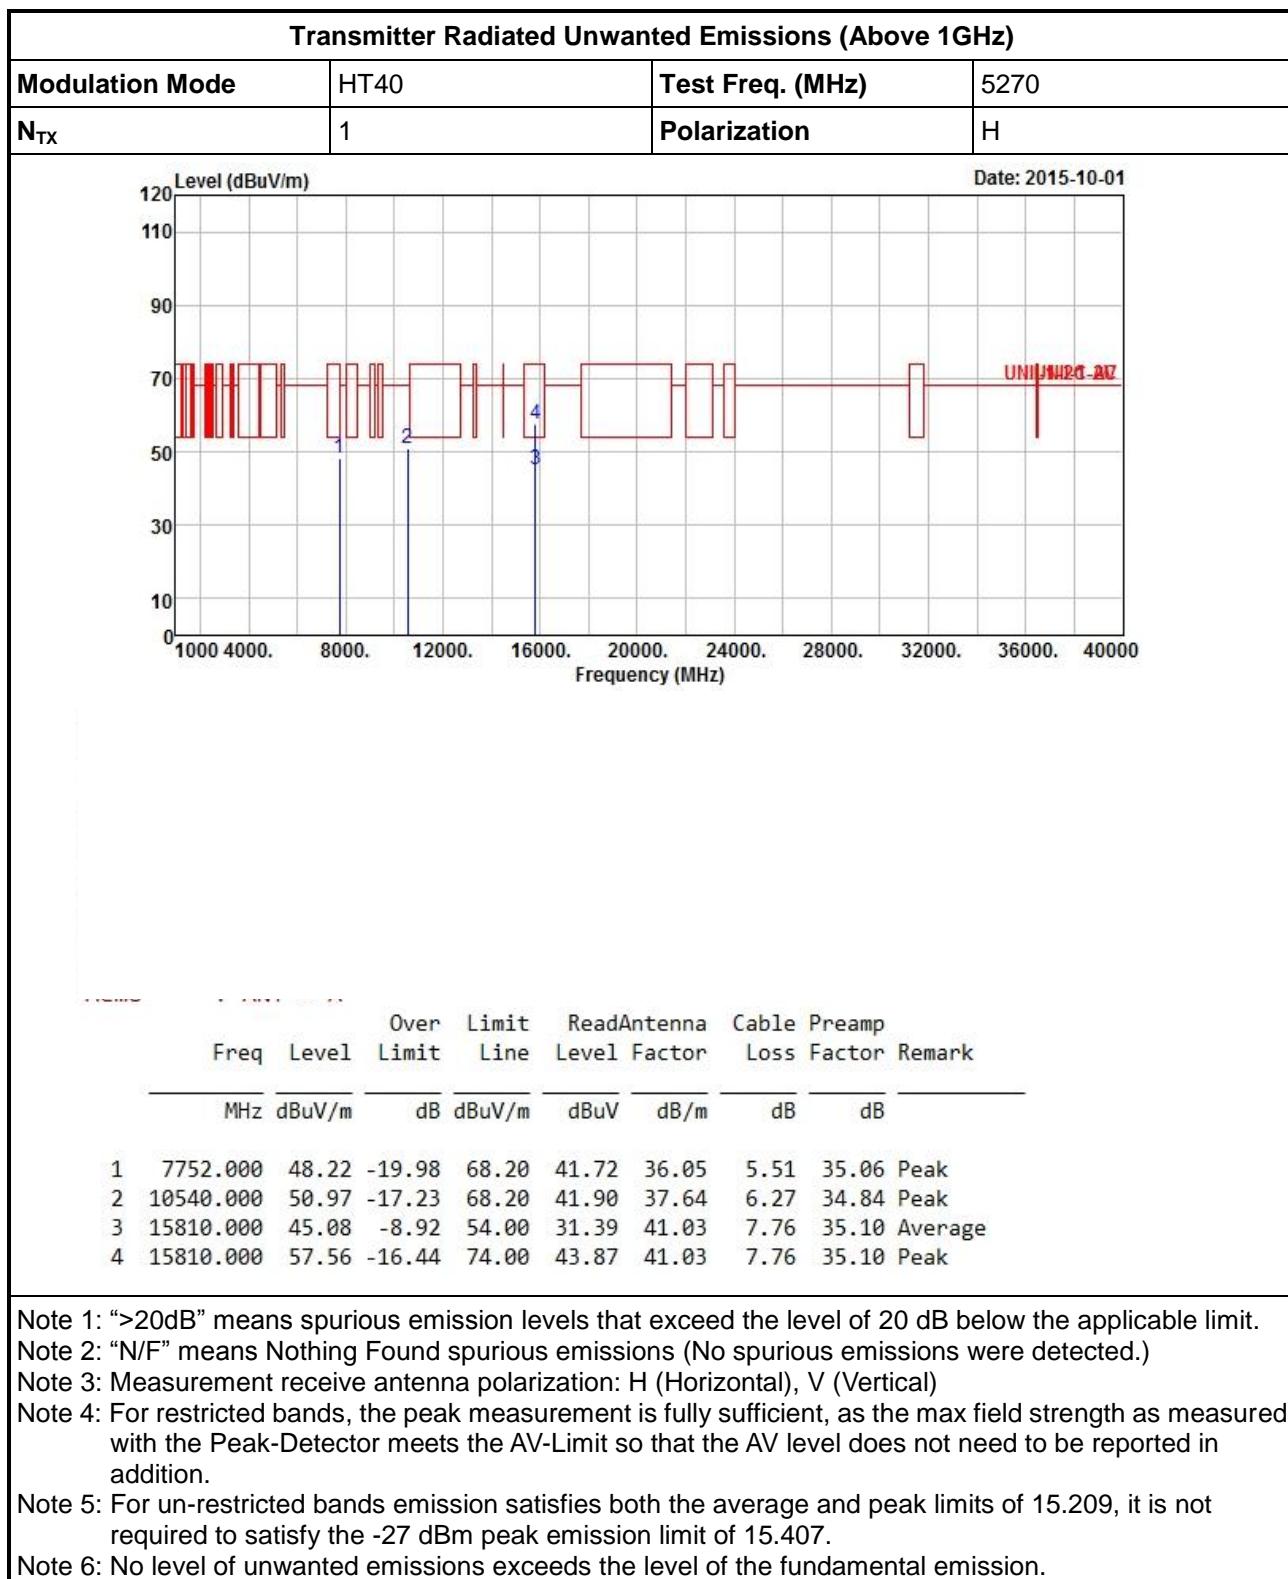


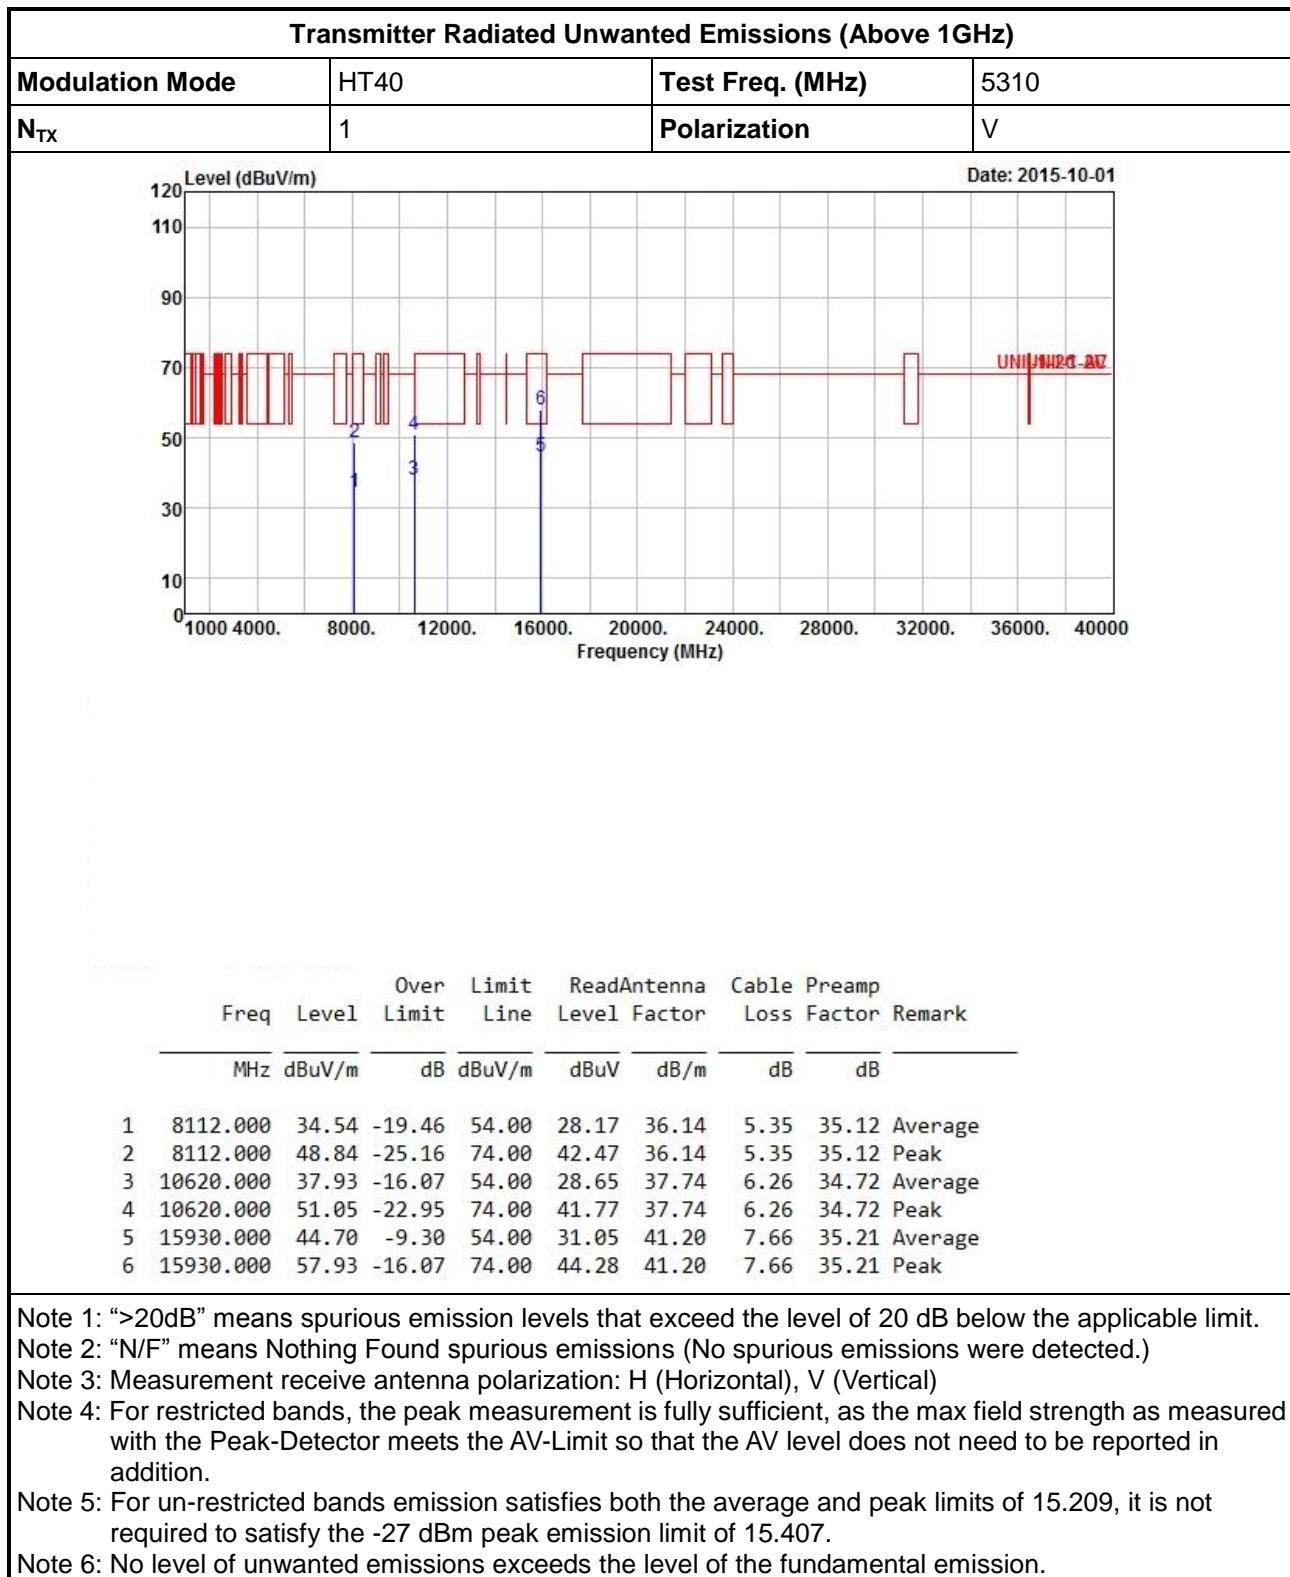






3.6.9 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5470-5725MHz

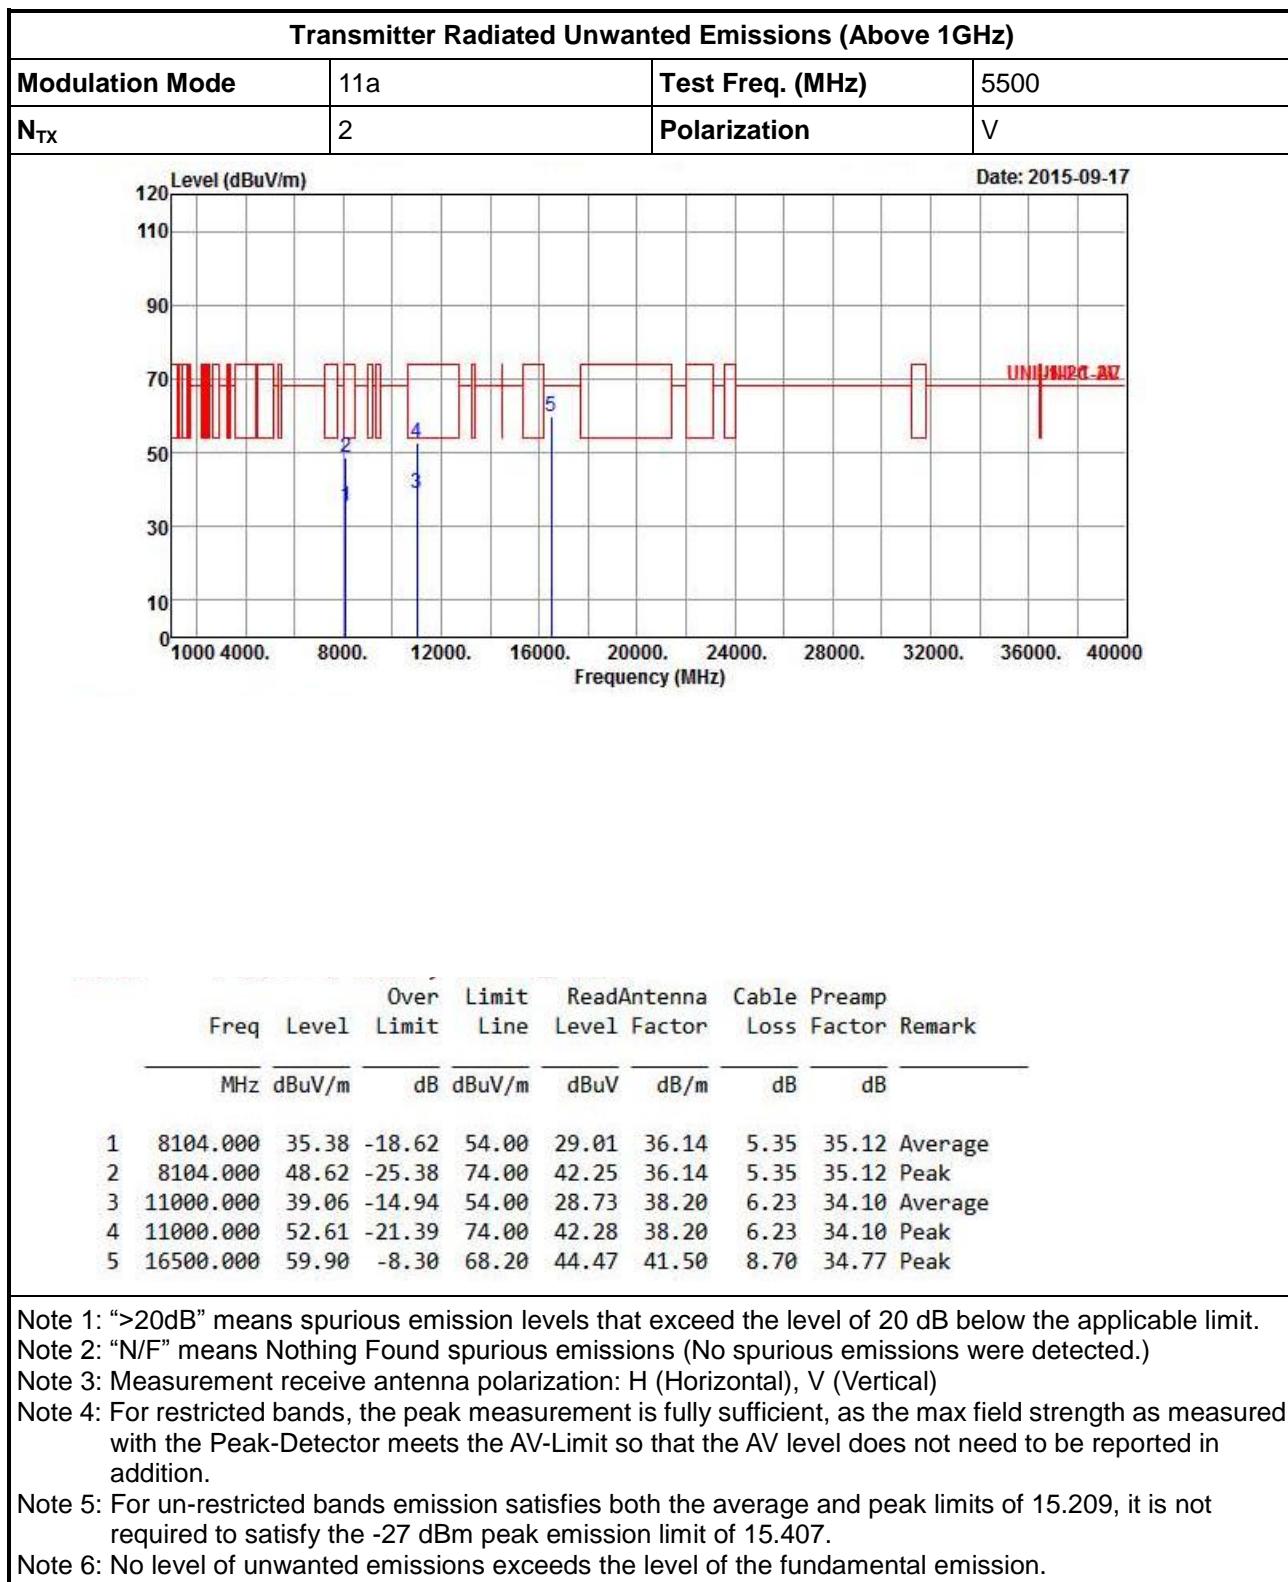



Transmitter Radiated Unwanted Emissions (Above 1GHz)

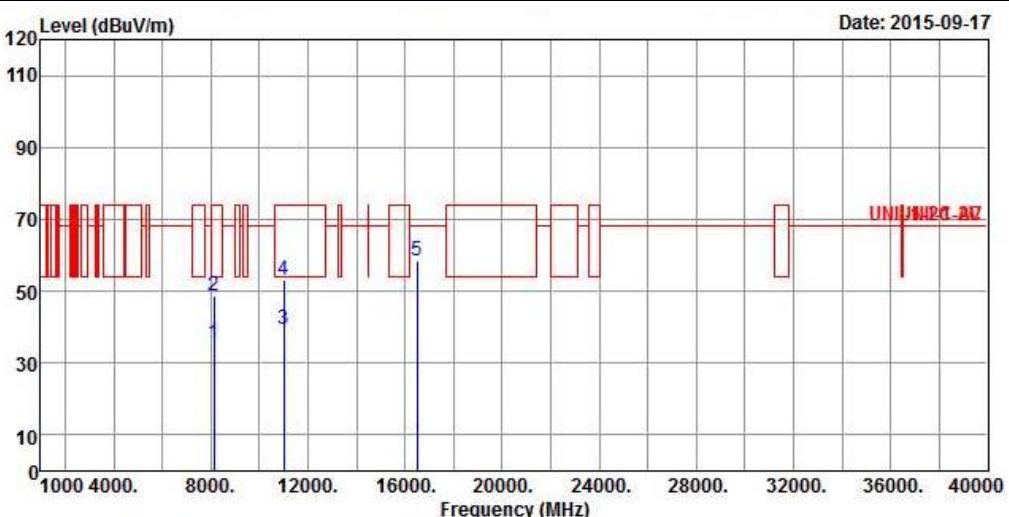
Modulation Mode	11a	Test Freq. (MHz)	5500					
N _{TX}	2	Polarization	H					
Level (dBuV/m)			Date: 2015-09-17					
								
Freq	Level	Over Limit	Line Limit	Read	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8120.000	35.42	-18.58	54.00	29.03	36.15	5.36	35.12 Average
2	8120.000	48.69	-25.31	74.00	42.30	36.15	5.36	35.12 Peak
3	11000.000	39.34	-14.66	54.00	29.01	38.20	6.23	34.10 Average
4	11000.000	53.04	-20.96	74.00	42.71	38.20	6.23	34.10 Peak
5	16500.000	58.62	-9.58	68.20	43.19	41.50	8.70	34.77 Peak


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.





Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode	11a		Test Freq. (MHz)		5580			
N _{TX}	2		Polarization		V			
Level (dB _u V/m)								Date: 2015-09-17
1	7408.000	35.81	-18.19	54.00	29.23	35.97	5.57	34.96 Average
2	7408.000	49.33	-24.67	74.00	42.75	35.97	5.57	34.96 Peak
3	11160.000	41.26	-12.74	54.00	30.99	38.20	6.28	34.21 Average
4	11160.000	54.00	-20.00	74.00	43.73	38.20	6.28	34.21 Peak
5	16740.000	60.07	-8.13	68.20	44.05	41.50	8.86	34.34 Peak


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

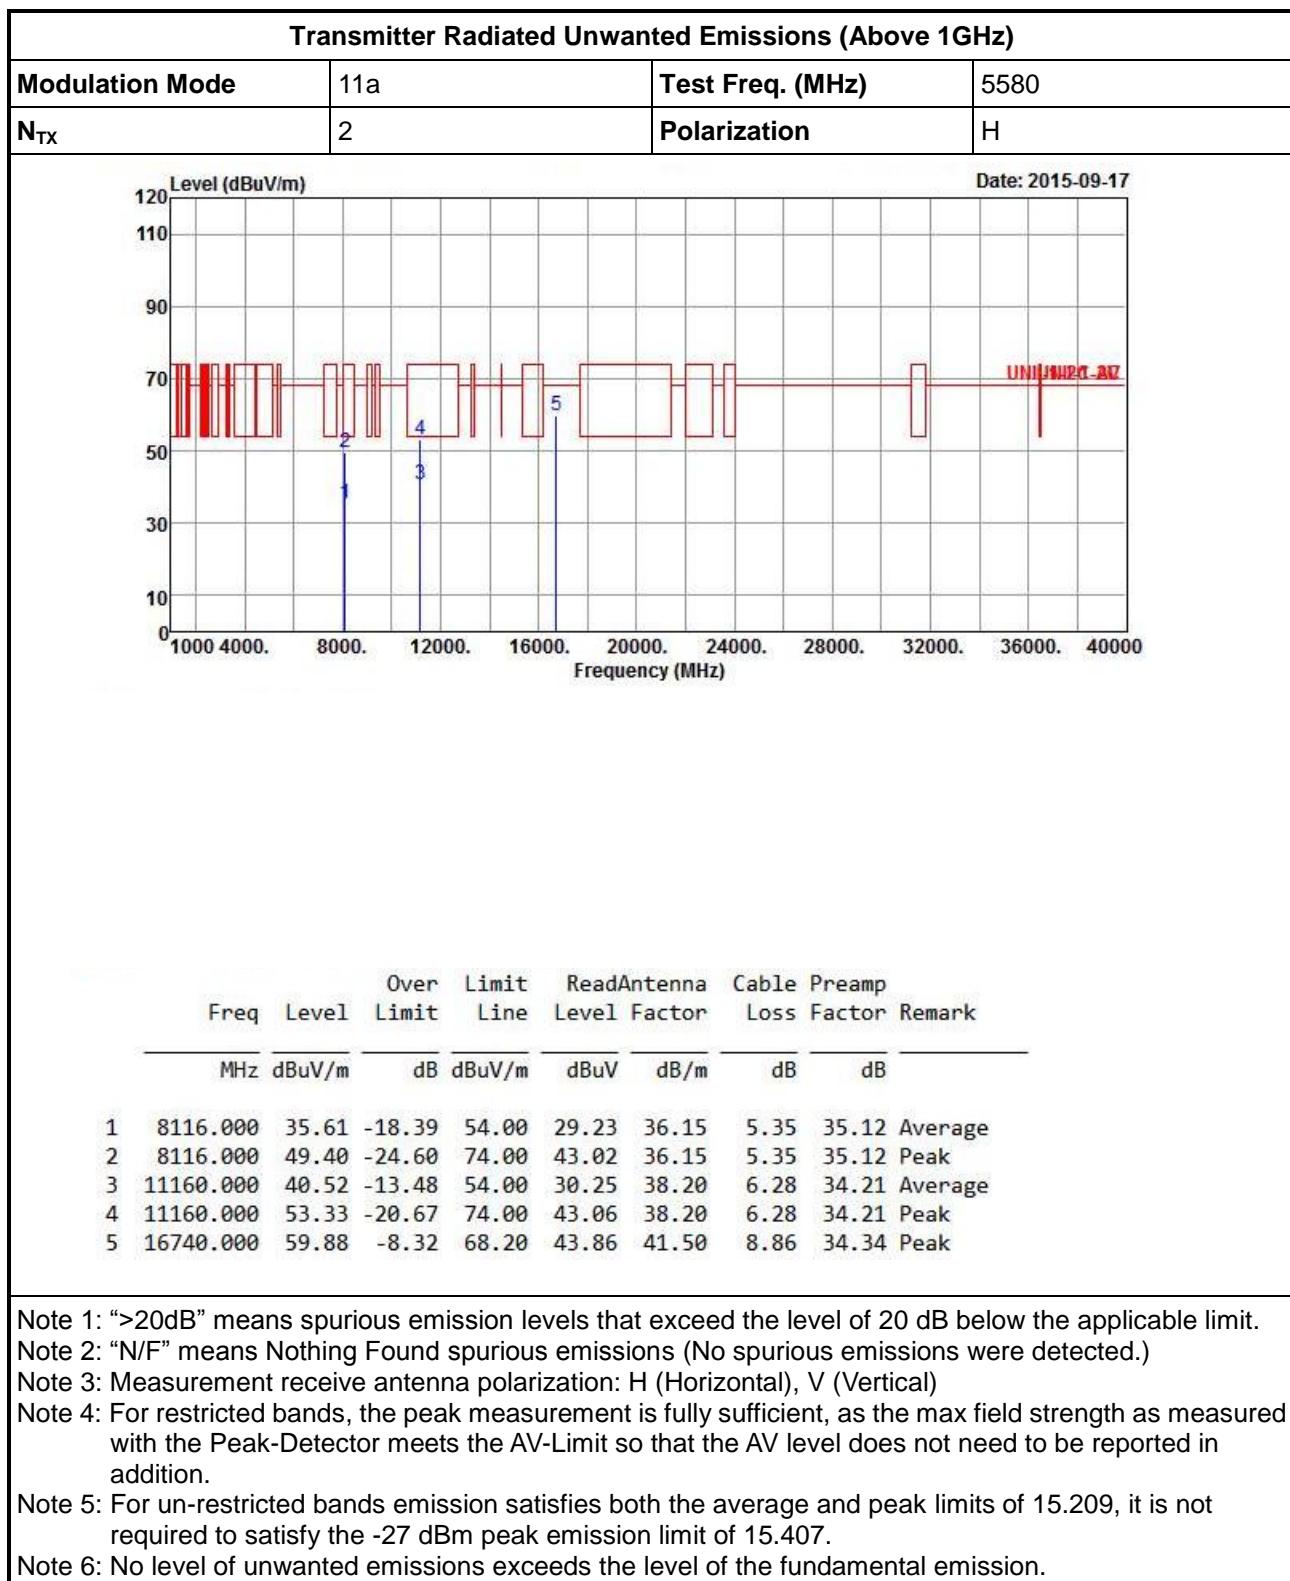


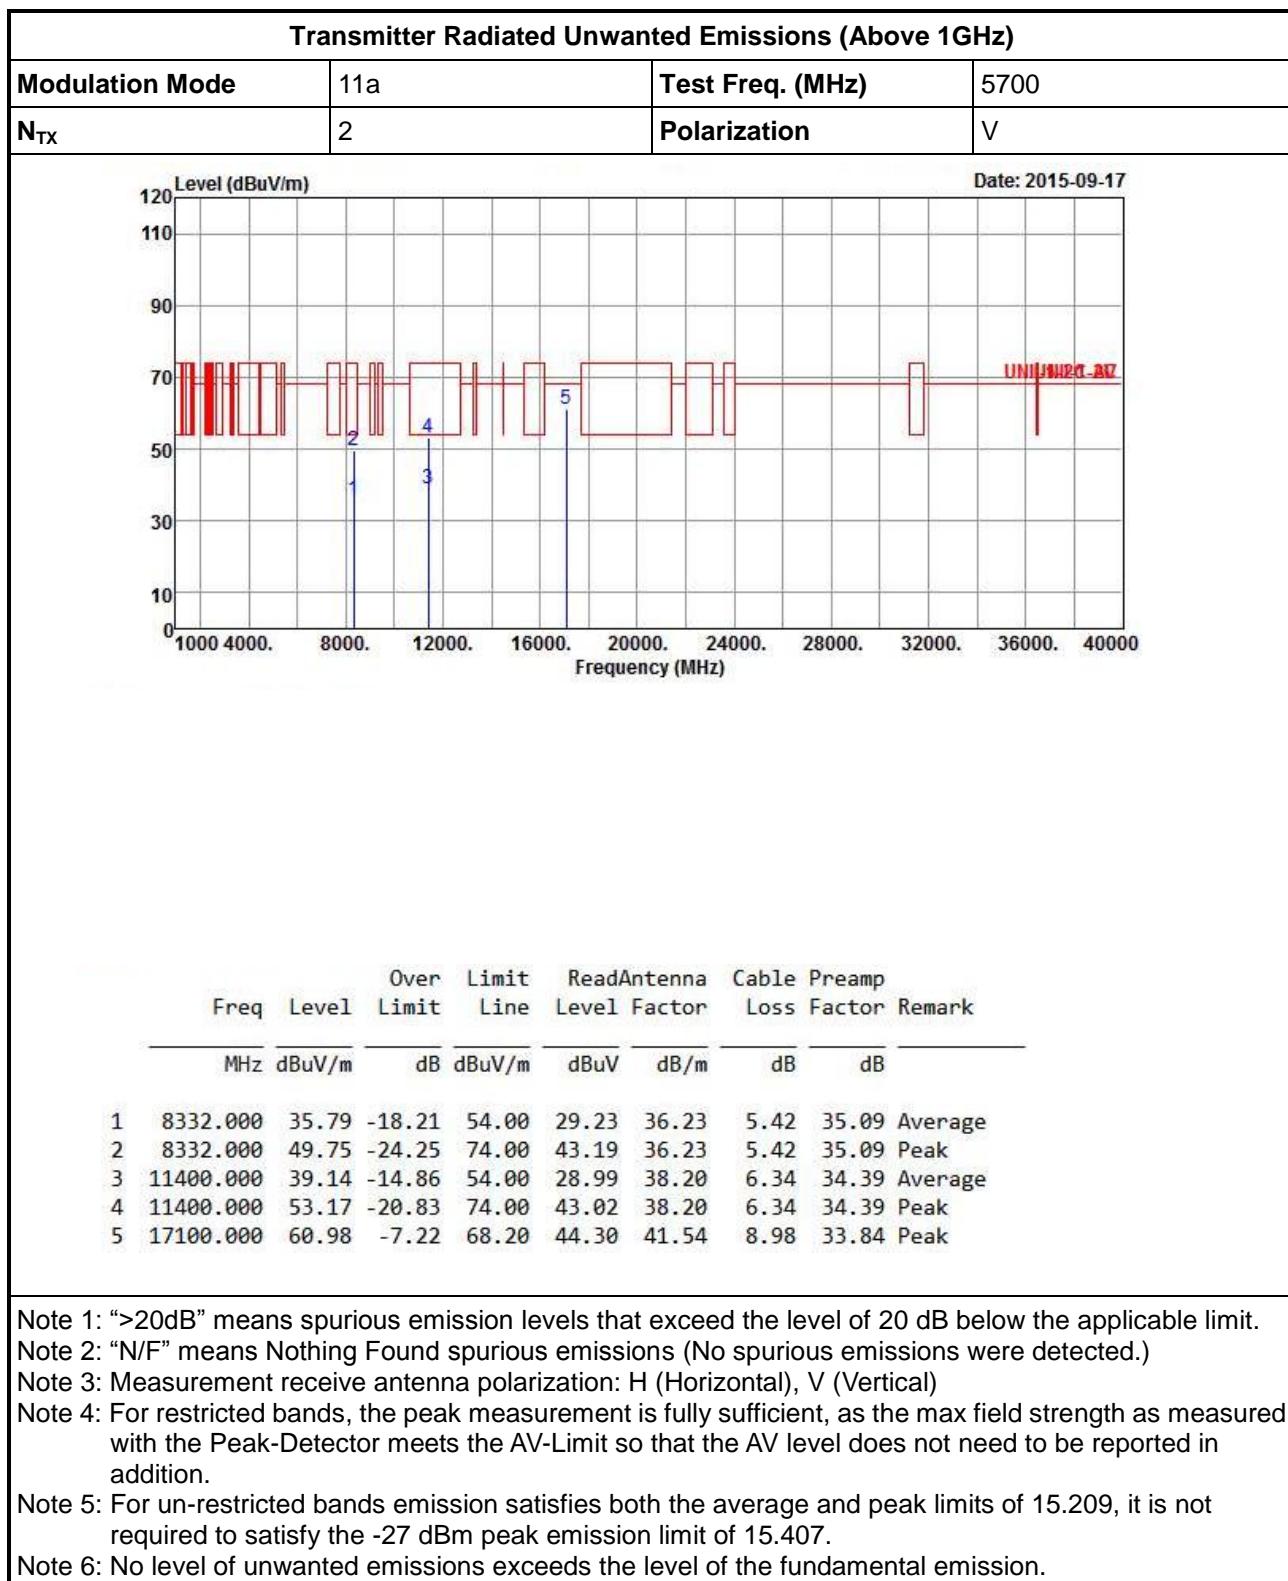


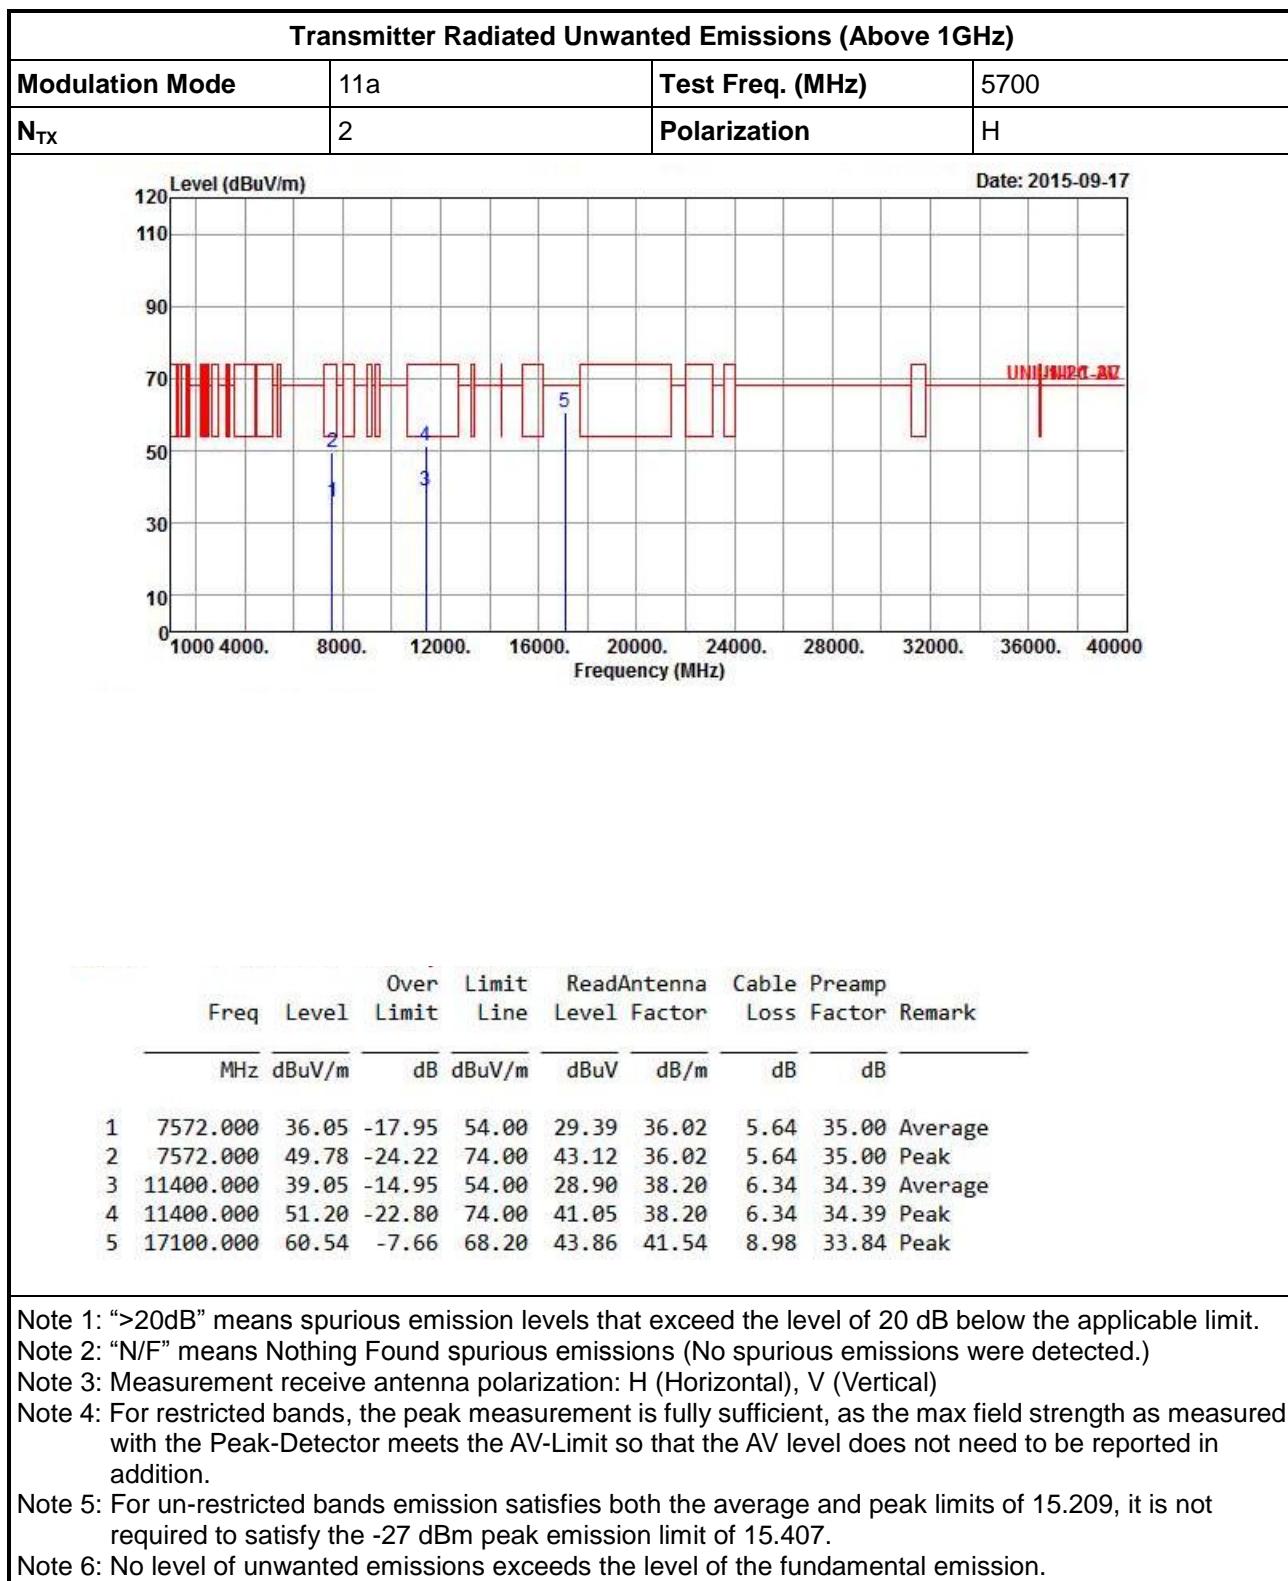

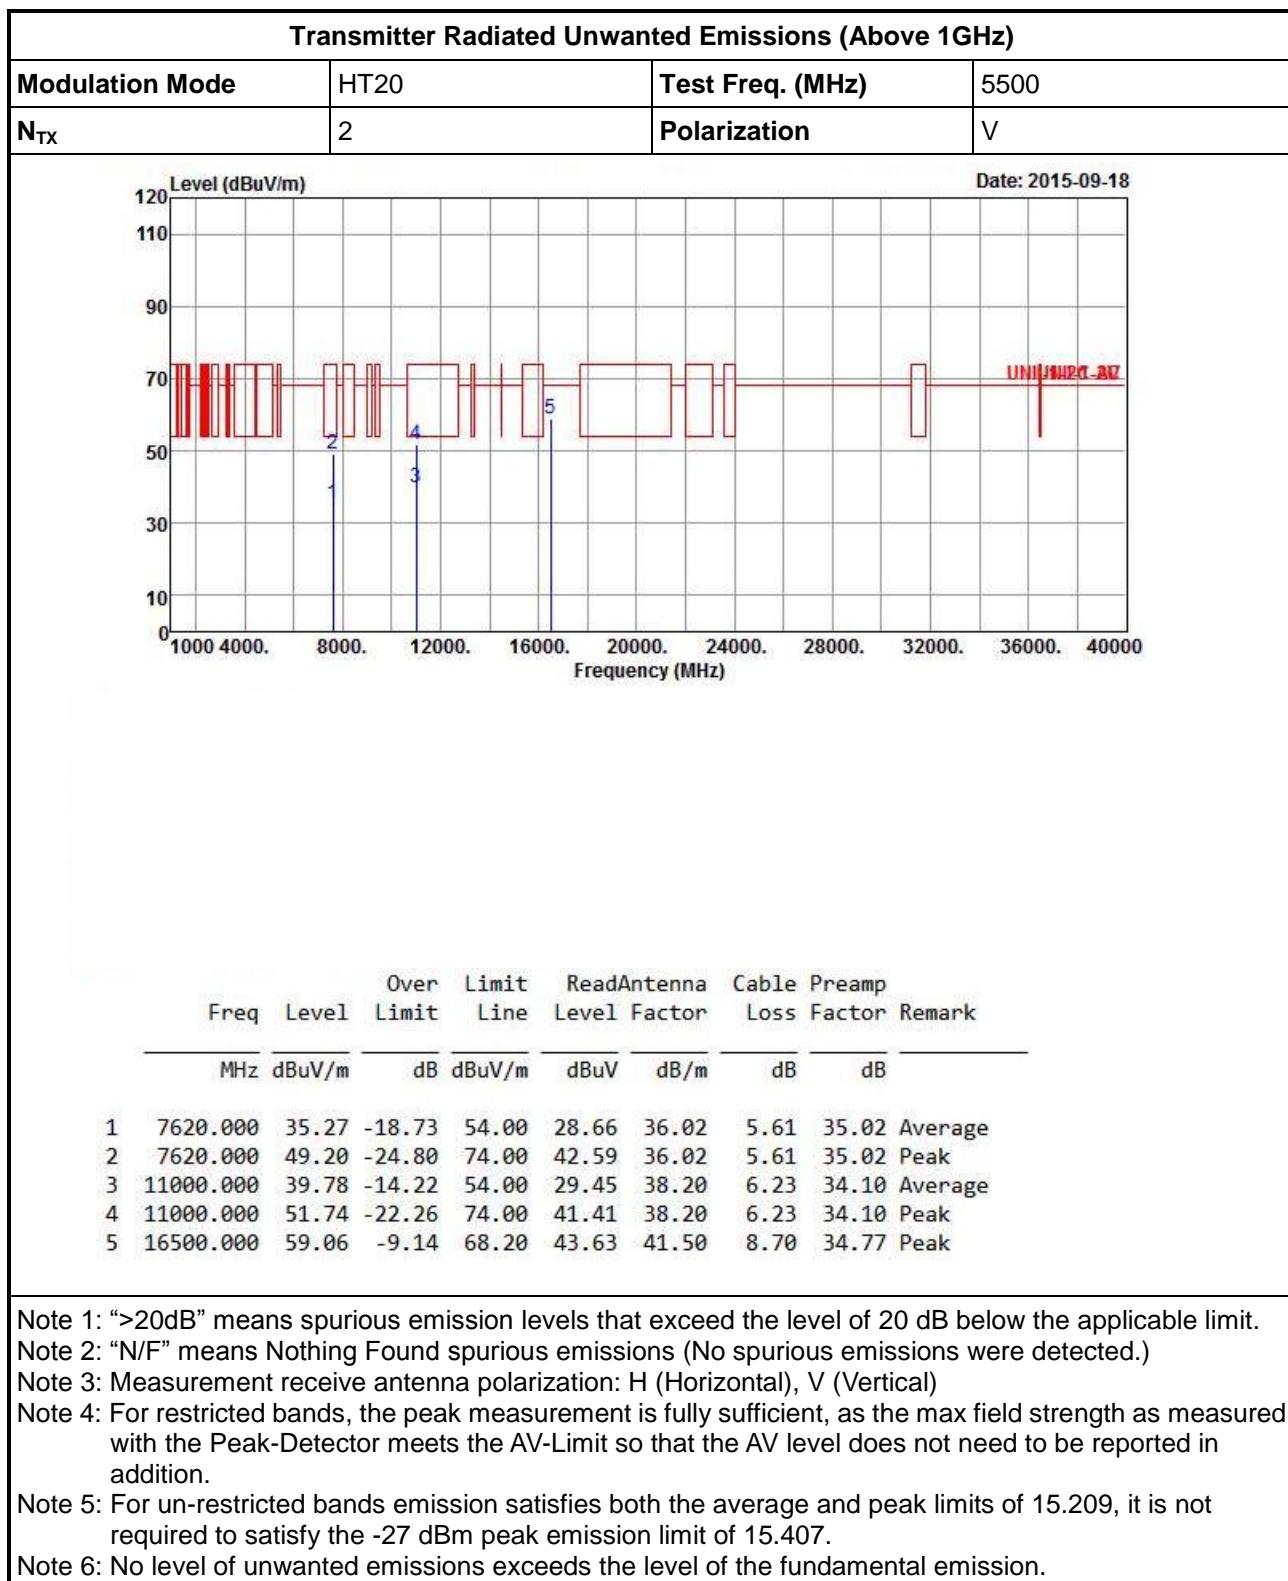

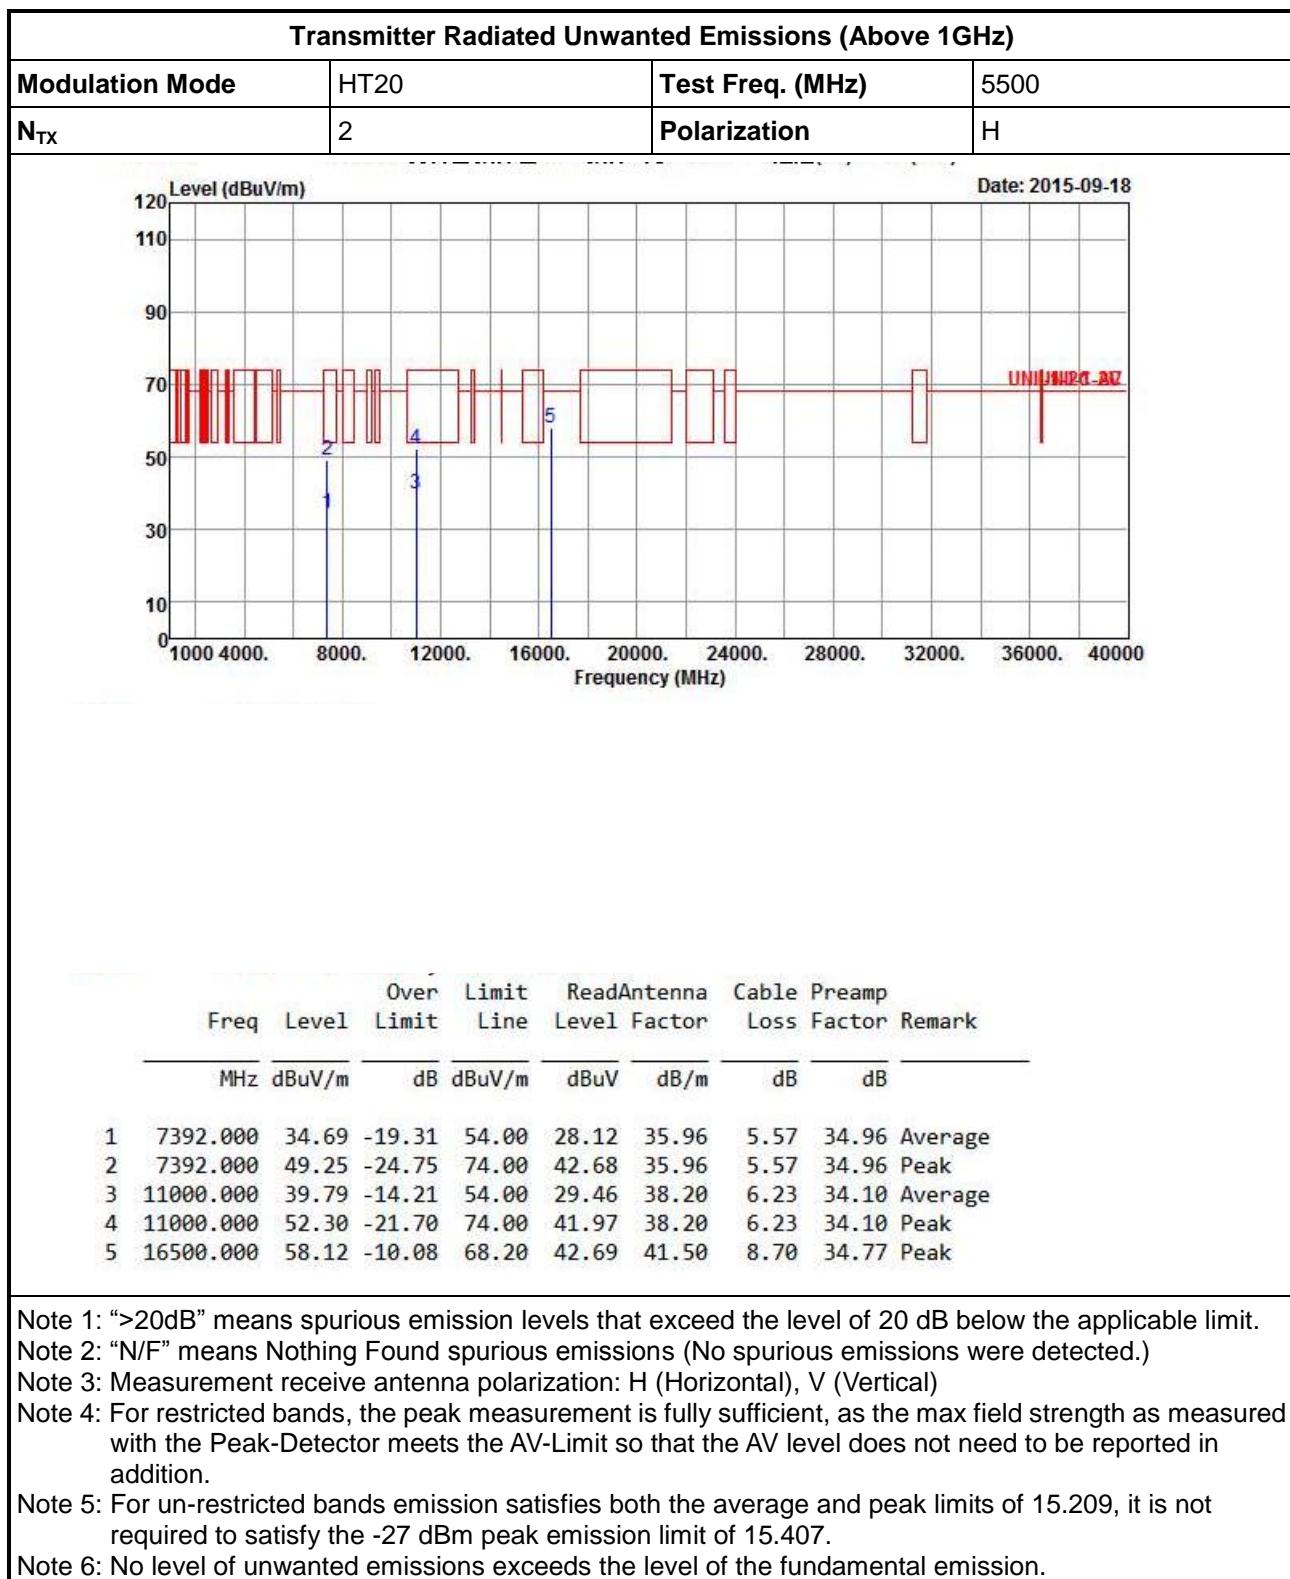

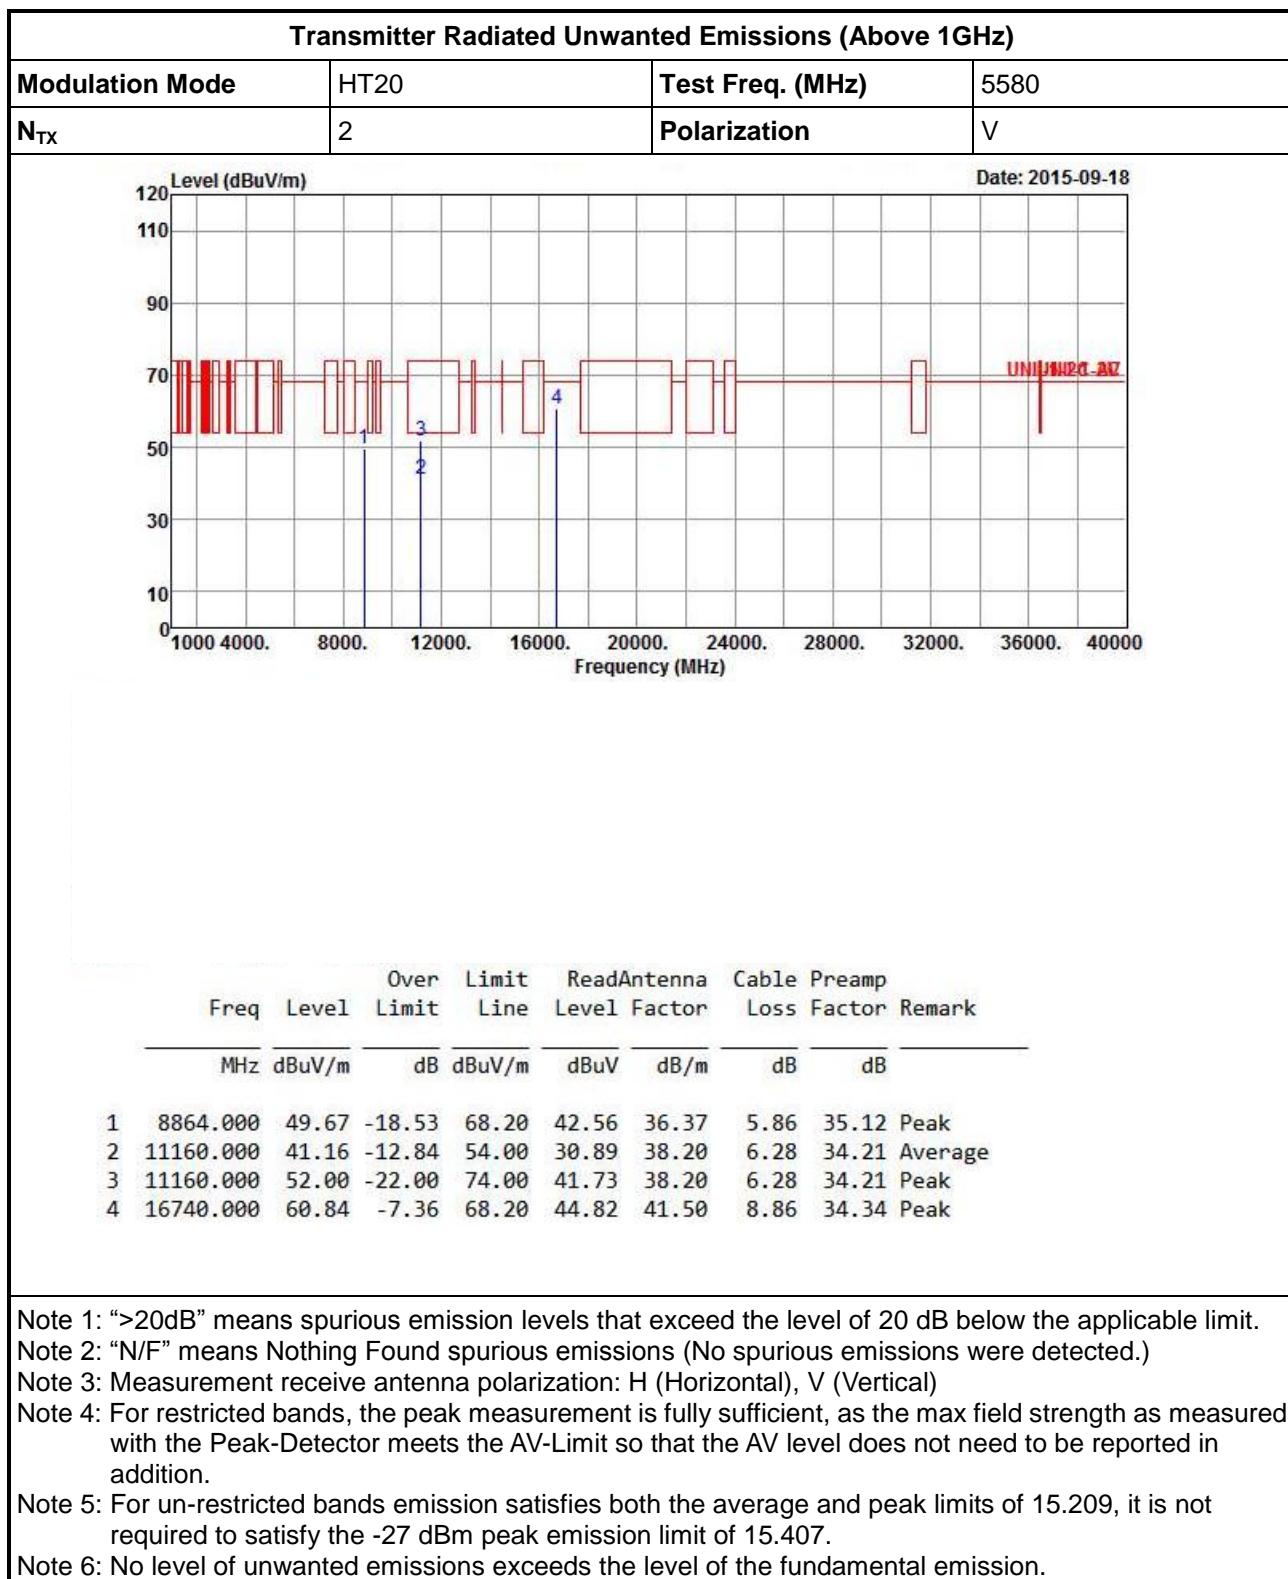

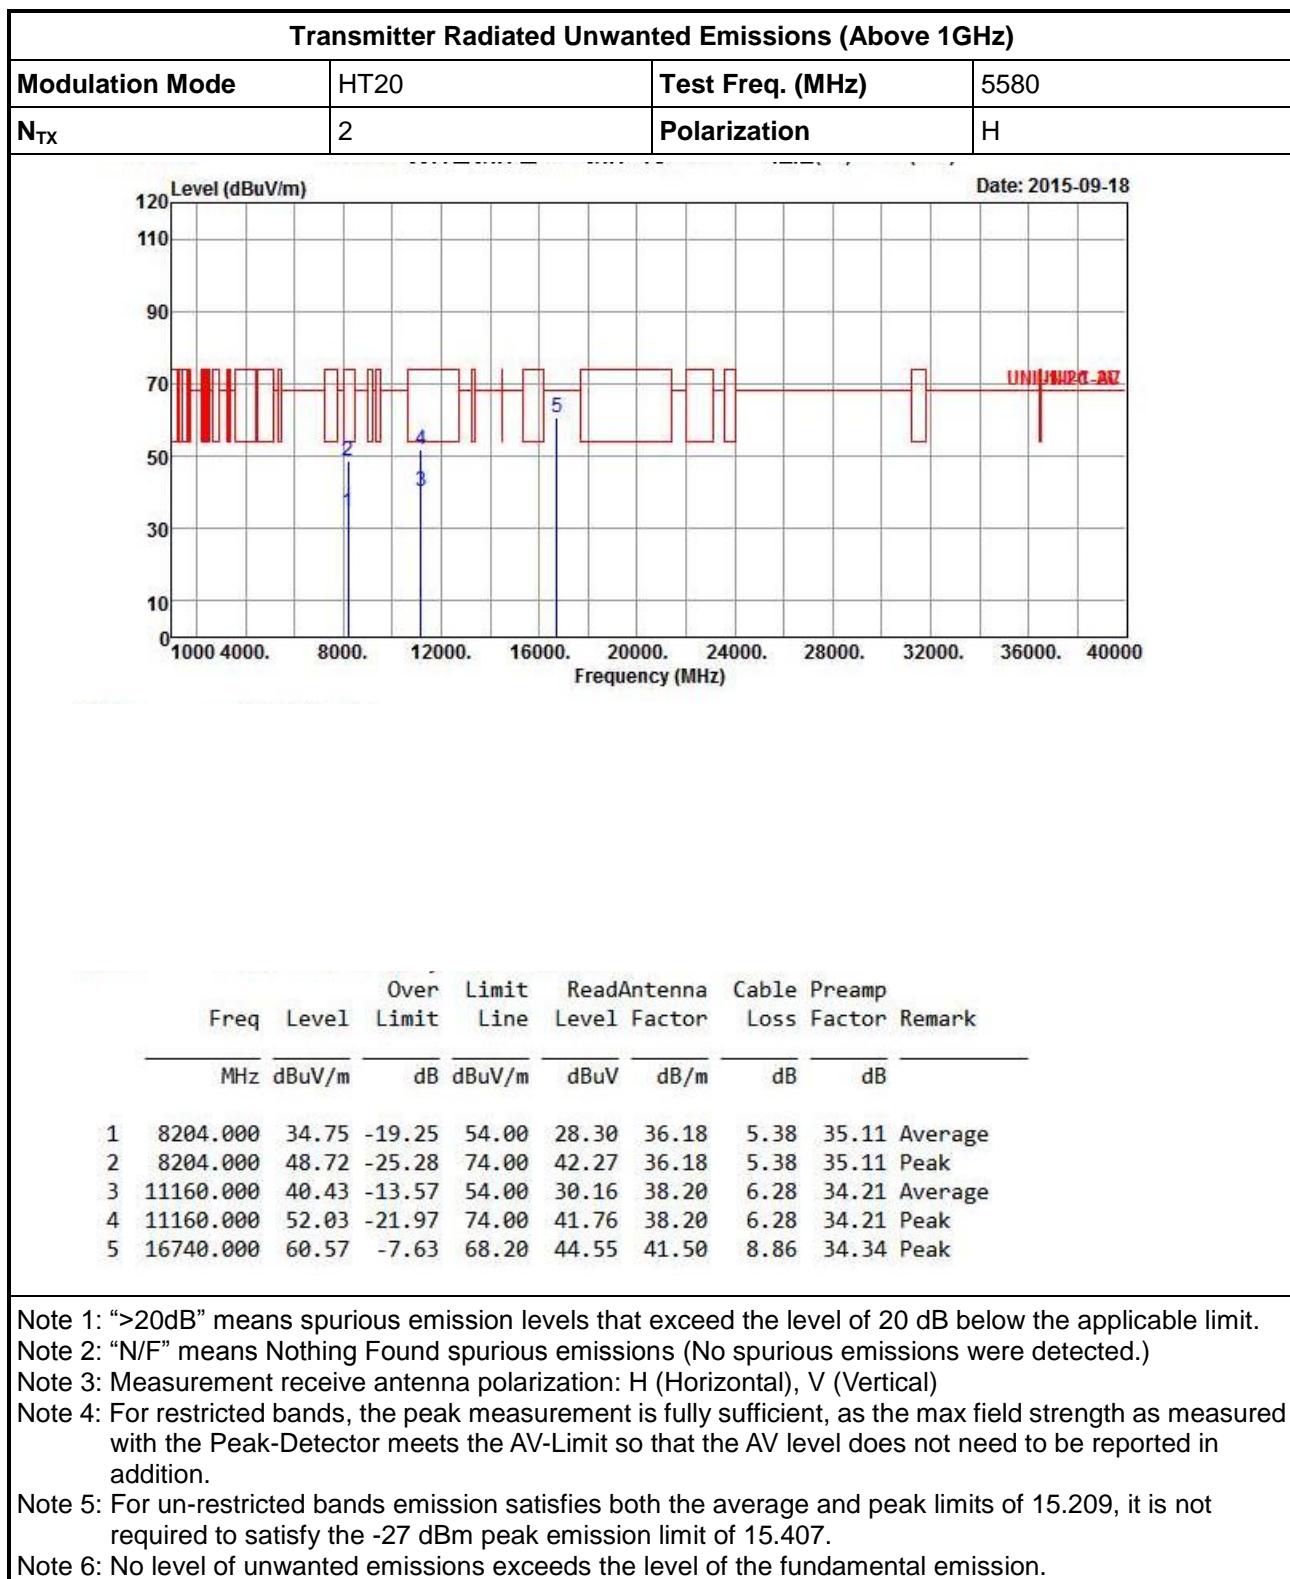




Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	HT20	Test Freq. (MHz)	5700
N_{TX}	2	Polarization	V


Date: 2015-09-18


Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark
		Limit	Line	Level	Factor	Loss	Factor	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8160.000	34.72	-19.28	54.00	28.30	36.16	5.37	35.11 Average
2	8160.000	48.96	-25.04	74.00	42.54	36.16	5.37	35.11 Peak
3	11400.000	38.57	-15.43	54.00	28.42	38.20	6.34	34.39 Average
4	11400.000	51.24	-22.76	74.00	41.09	38.20	6.34	34.39 Peak
5	17100.000	59.57	-8.63	68.20	42.89	41.54	8.98	33.84 Peak


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
 Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

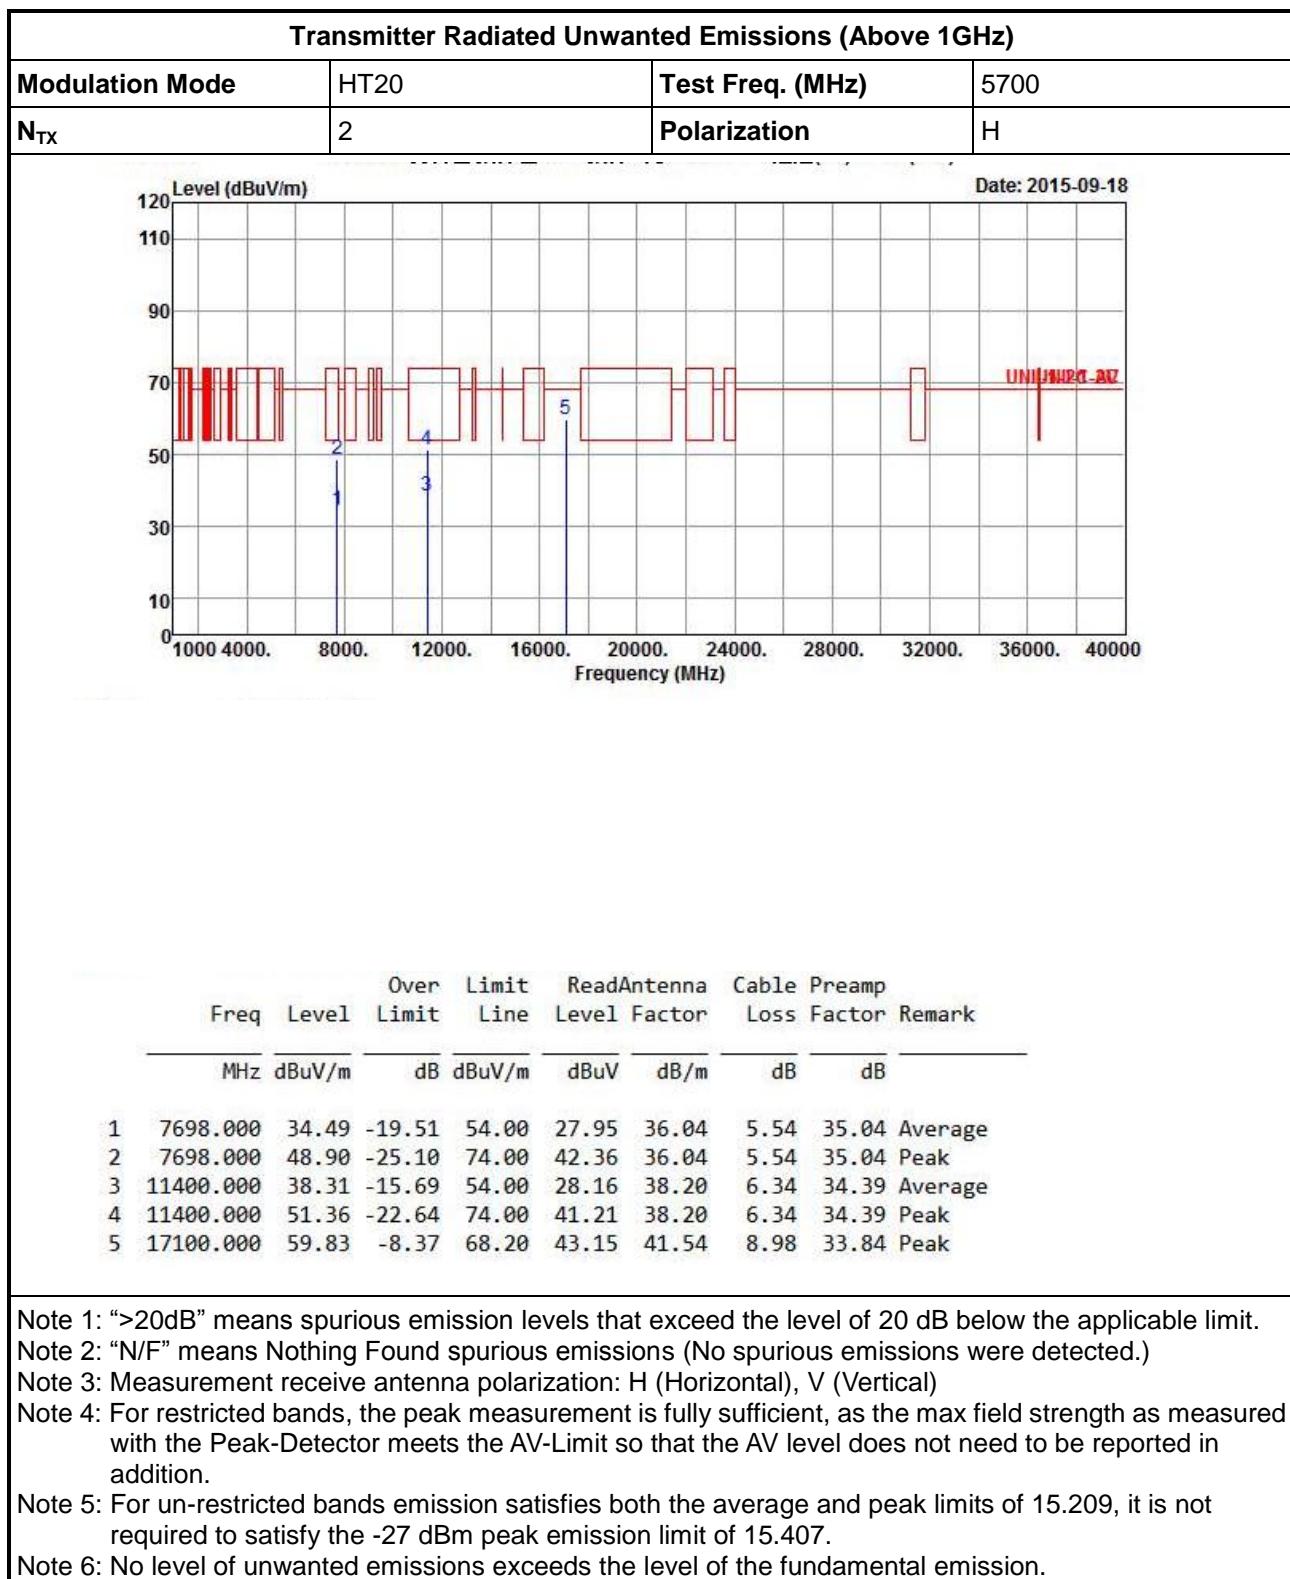

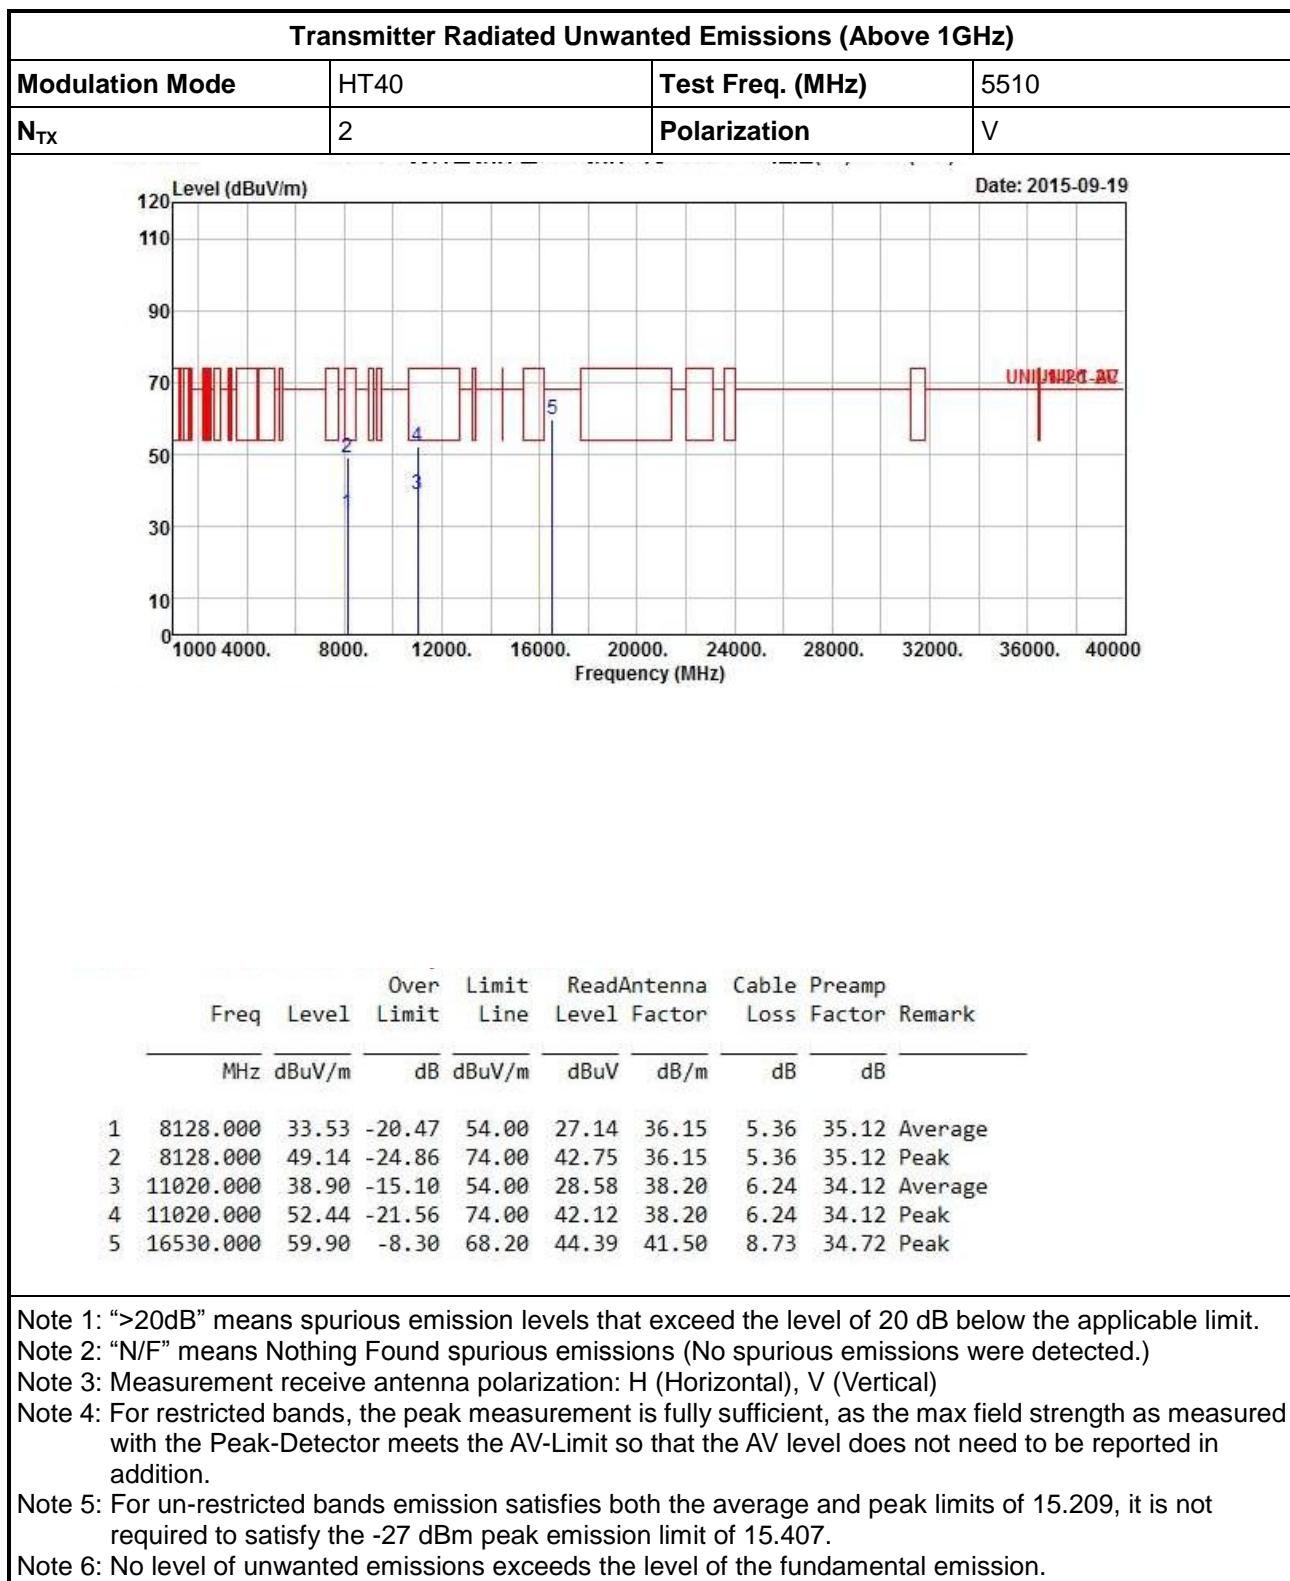

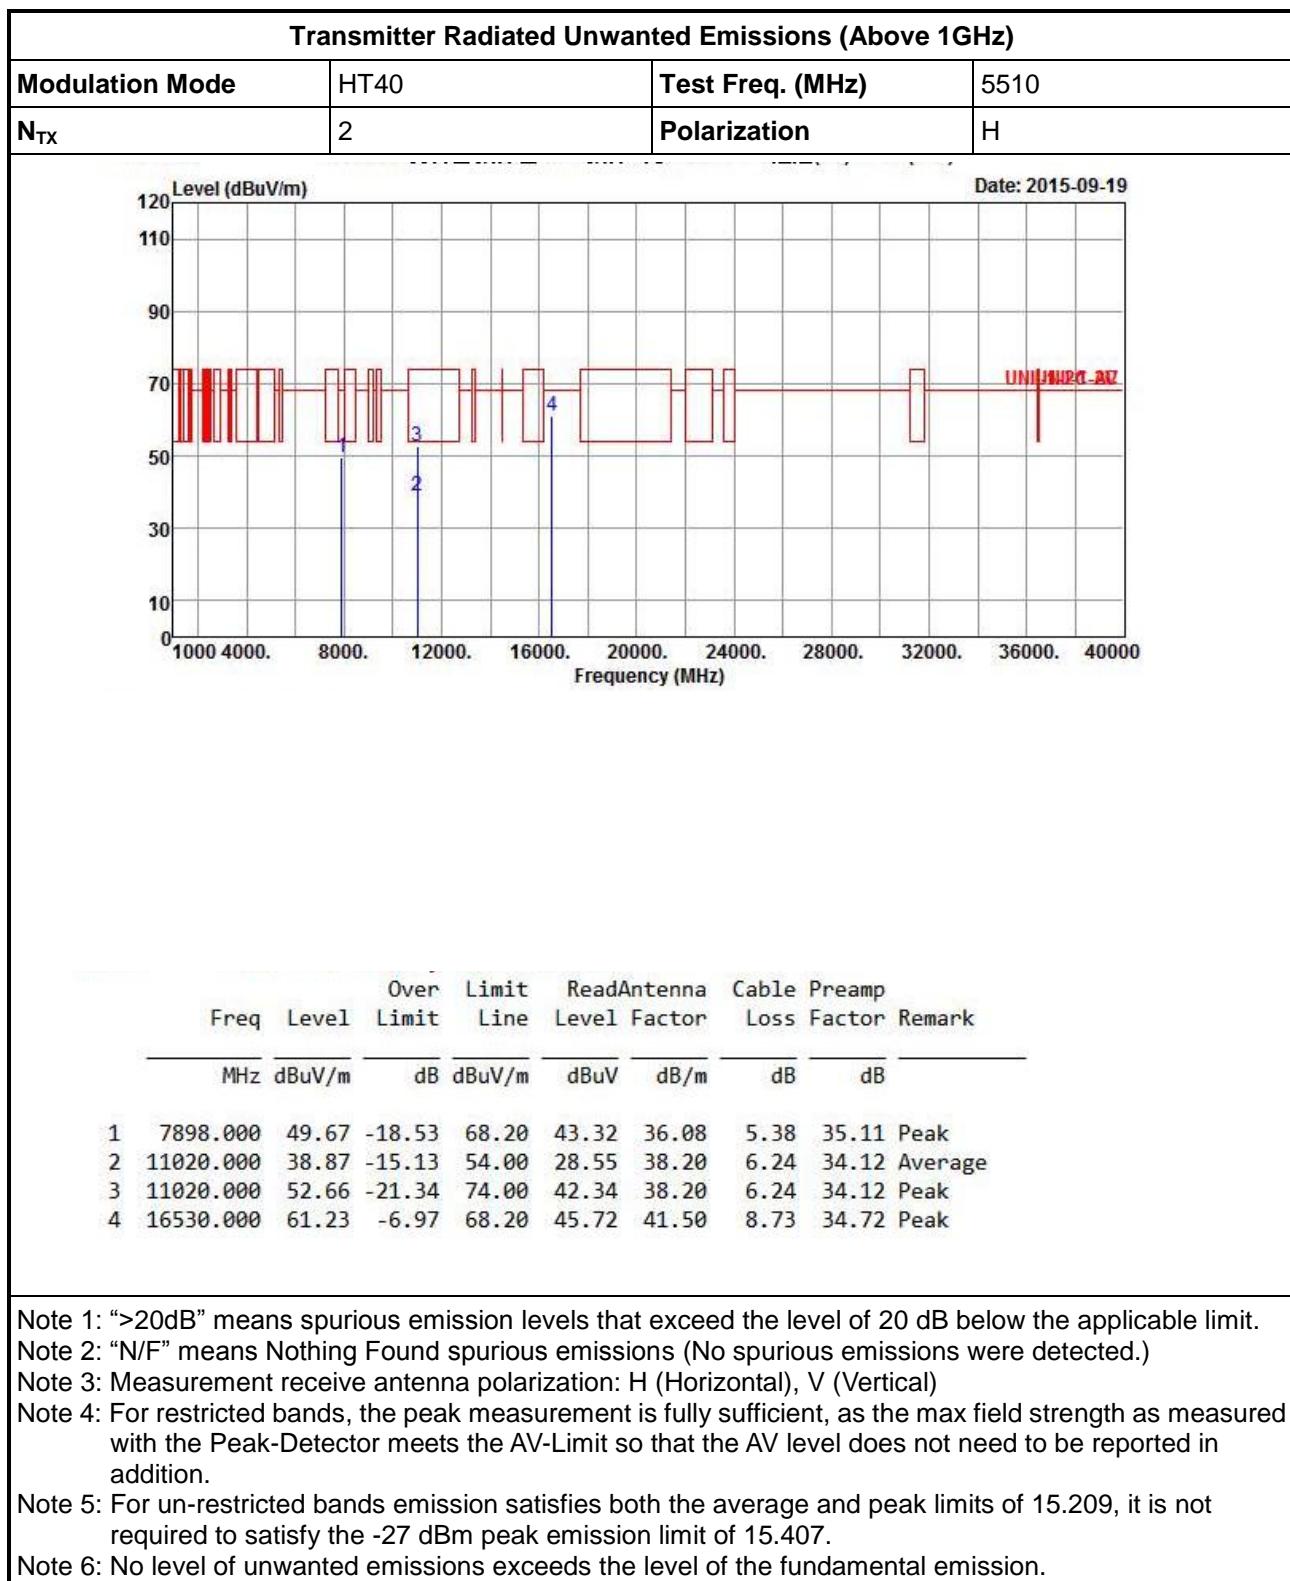

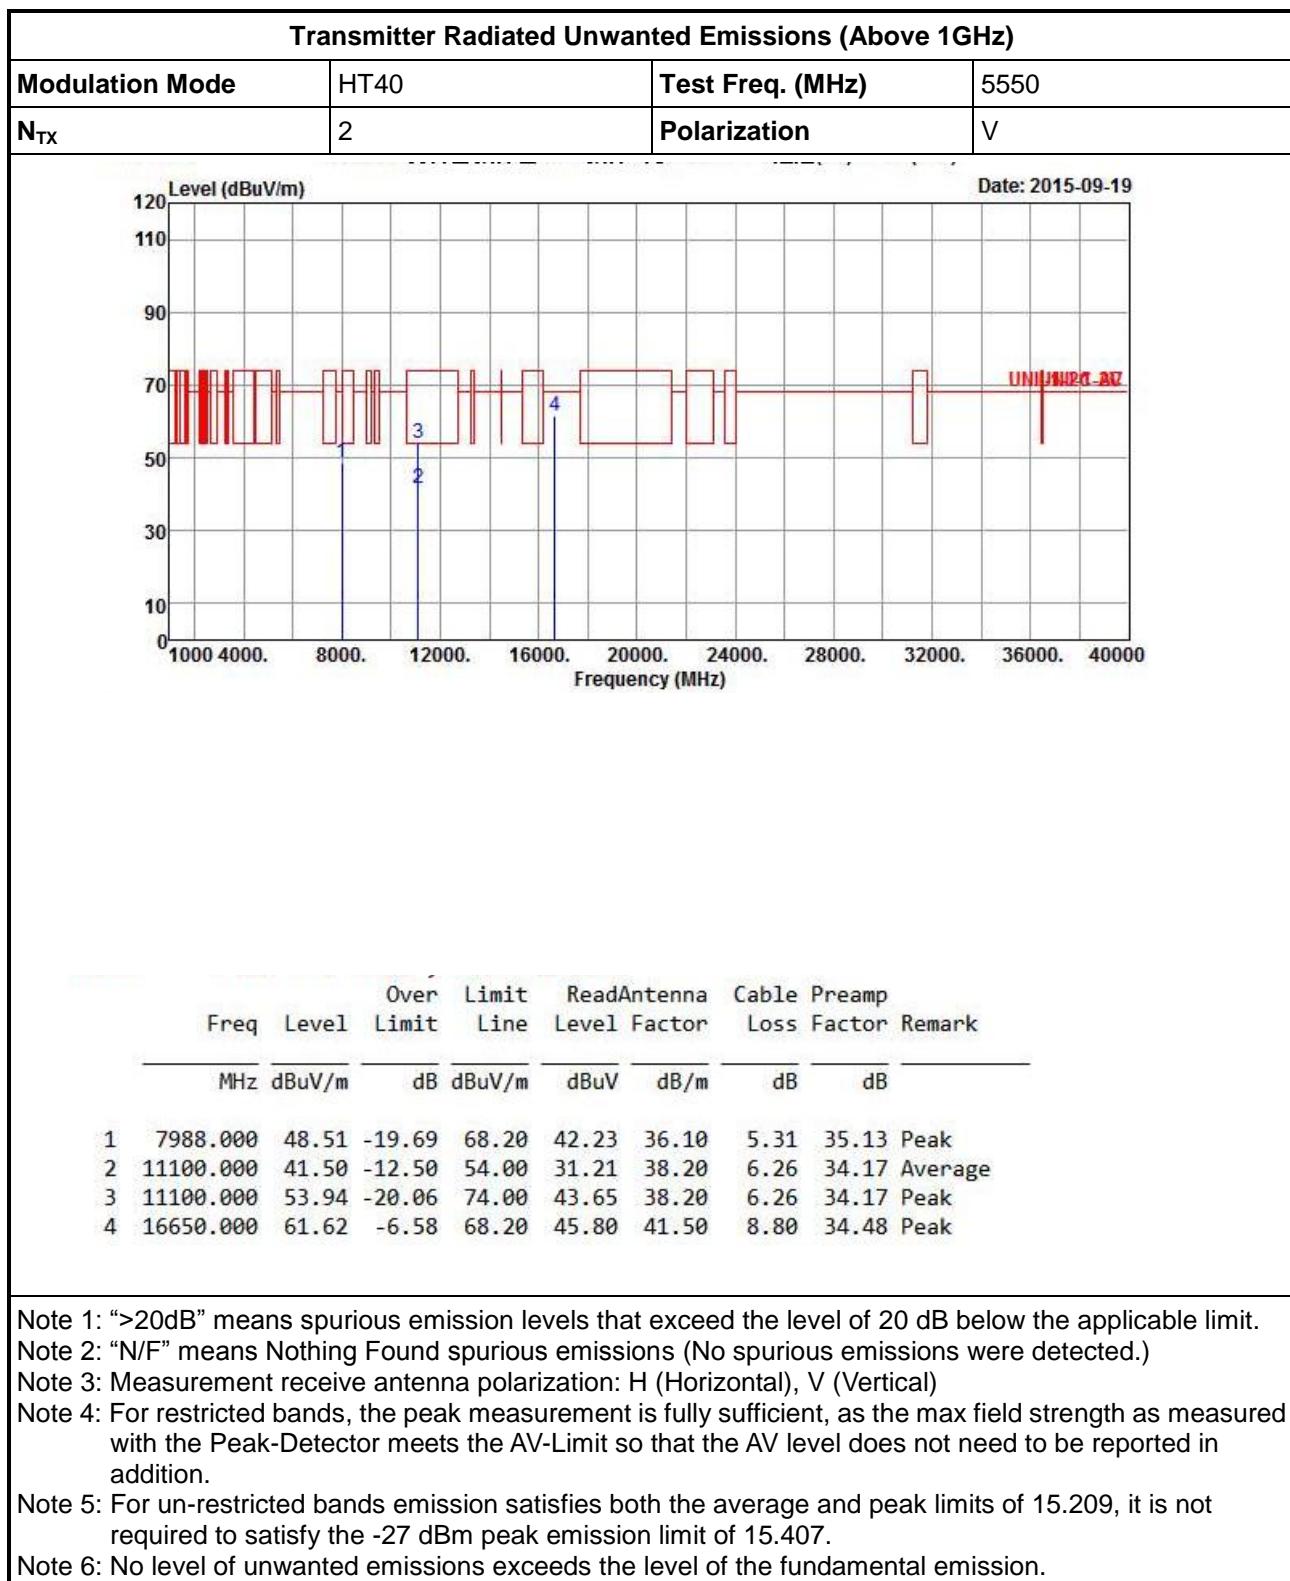

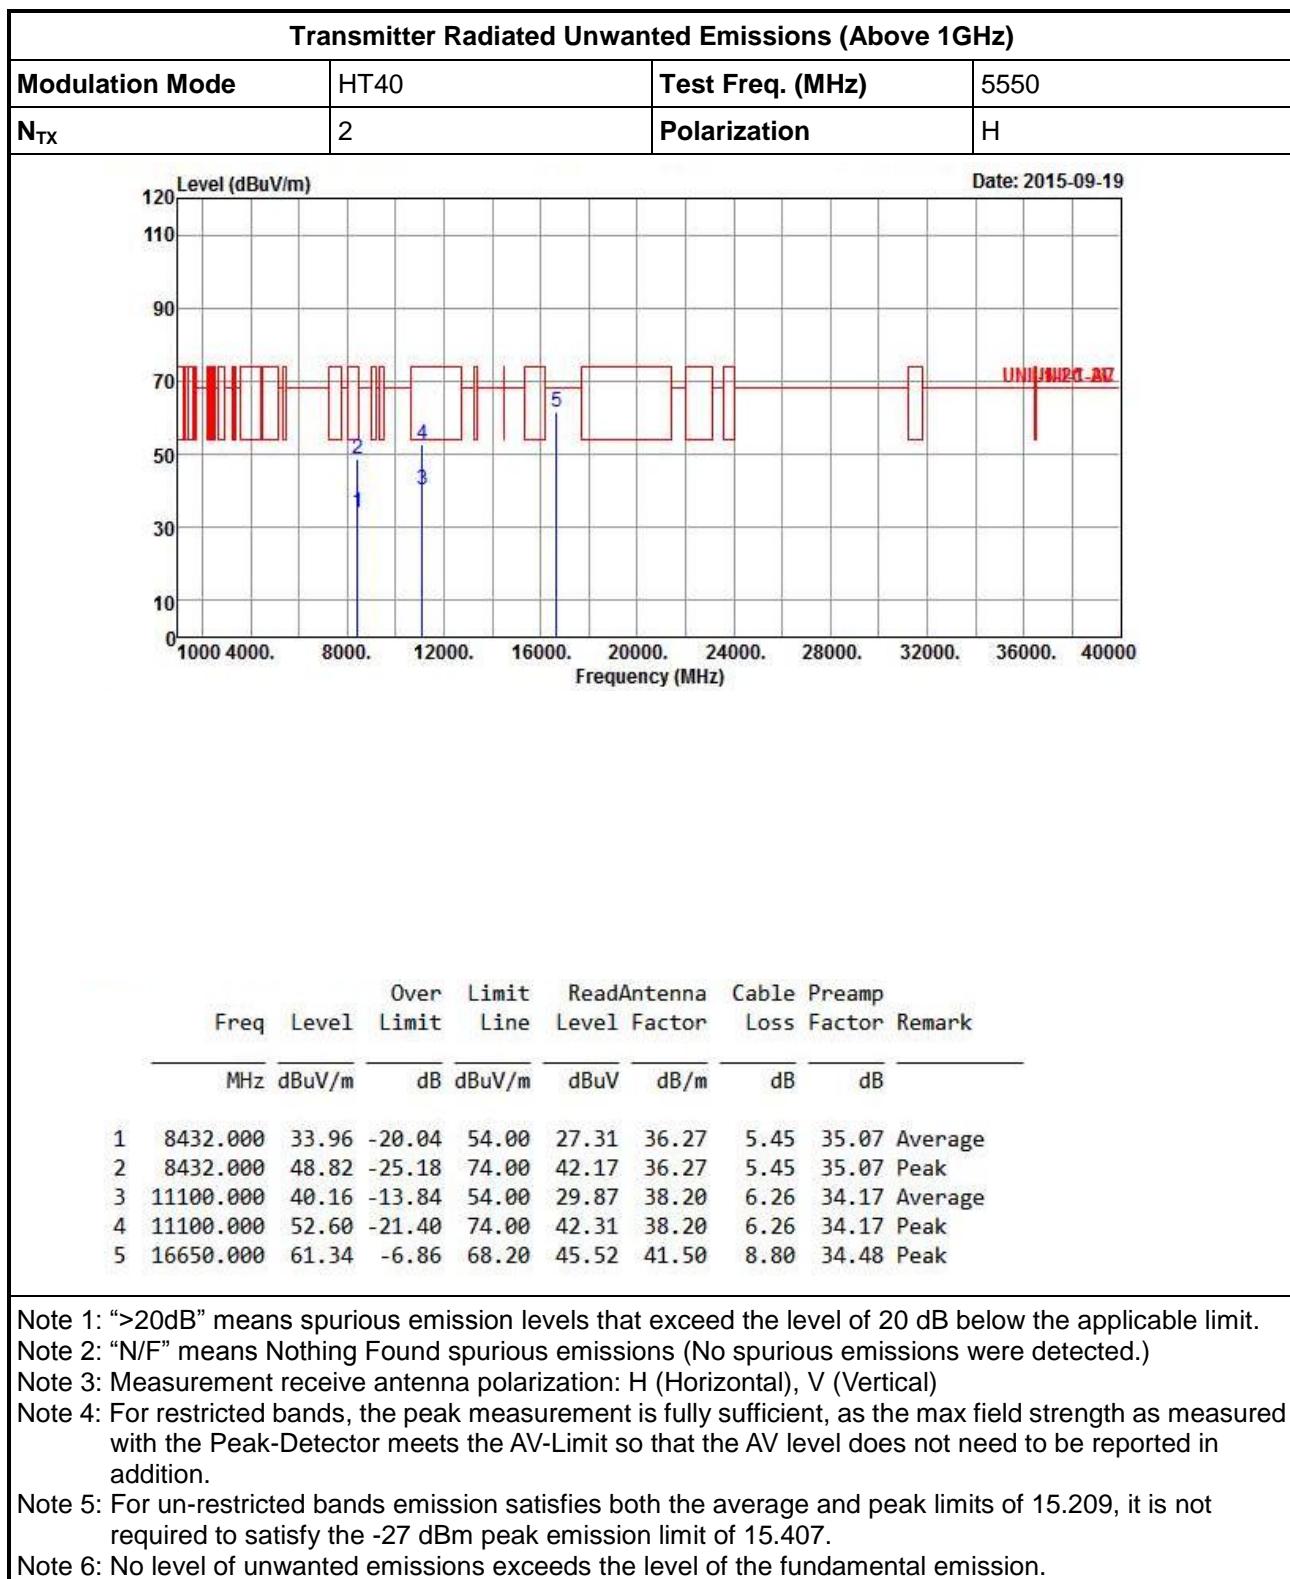



Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode	HT40		Test Freq. (MHz)		5670			
N _{TX}	2		Polarization		V			
Level (dB _u V/m)								Date: 2015-09-19
1	7888.000	48.27	-19.93	68.20	41.91	36.08	5.38	35.10 Peak
2	11340.000	39.17	-14.83	54.00	28.98	38.20	6.32	34.33 Average
3	11340.000	51.76	-22.24	74.00	41.57	38.20	6.32	34.33 Peak
4	17010.000	62.14	-6.06	68.20	45.49	41.51	8.99	33.85 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																					
Modulation Mode		HT40		Test Freq. (MHz)		5670																																																															
N _{TX}	2			Polarization		H																																																															
Level (dB _u V/m)									Date: 2015-09-19																																																												
<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit</th> <th>Read</th> <th>Antenna</th> <th>Cable</th> <th>Preamp</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dB_uV/m</th> <th></th> <th>dB</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7158.000</td> <td>48.46</td> <td>-19.74</td> <td>68.20</td> <td>42.24</td> <td>35.86</td> <td>5.28</td> <td>34.92</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11340.000</td> <td>39.44</td> <td>-14.56</td> <td>54.00</td> <td>29.25</td> <td>38.20</td> <td>6.32</td> <td>34.33</td> <td>Average</td> </tr> <tr> <td>3</td> <td>11340.000</td> <td>53.62</td> <td>-20.38</td> <td>74.00</td> <td>43.43</td> <td>38.20</td> <td>6.32</td> <td>34.33</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>17010.000</td> <td>62.15</td> <td>-6.05</td> <td>68.20</td> <td>45.50</td> <td>41.51</td> <td>8.99</td> <td>33.85</td> <td>Peak</td> </tr> </tbody> </table>										Freq	Level	Over Limit	Limit	Read	Antenna	Cable	Preamp			MHz	dB _u V/m		dB	Line	Level	Factor	Loss	Factor	Remark	1	7158.000	48.46	-19.74	68.20	42.24	35.86	5.28	34.92	Peak	2	11340.000	39.44	-14.56	54.00	29.25	38.20	6.32	34.33	Average	3	11340.000	53.62	-20.38	74.00	43.43	38.20	6.32	34.33	Peak	4	17010.000	62.15	-6.05	68.20	45.50	41.51	8.99	33.85	Peak
Freq	Level	Over Limit	Limit	Read	Antenna	Cable	Preamp																																																														
MHz	dB _u V/m		dB	Line	Level	Factor	Loss	Factor	Remark																																																												
1	7158.000	48.46	-19.74	68.20	42.24	35.86	5.28	34.92	Peak																																																												
2	11340.000	39.44	-14.56	54.00	29.25	38.20	6.32	34.33	Average																																																												
3	11340.000	53.62	-20.38	74.00	43.43	38.20	6.32	34.33	Peak																																																												
4	17010.000	62.15	-6.05	68.20	45.50	41.51	8.99	33.85	Peak																																																												
Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.																																																																					
Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)																																																																					
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)																																																																					
Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.																																																																					
Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.																																																																					
Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.																																																																					



Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																																																			
Modulation Mode		11a		Test Freq. (MHz)		5500																																																																																													
N _{TX}		1		Polarization		V																																																																																													
Date: 2015-09-27																																																																																																			
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2"></th> <th>Over</th> <th>Limit</th> <th>Read</th> <th>Antenna</th> <th>Cable</th> <th>Preamp</th> <th></th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> <th></th> </tr> </thead> <tbody> <tr> <td></td> </tr> <tr> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV/m</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td></td> </tr> <tr> <td>1</td> <td>7642.000</td> <td>36.85</td> <td>-17.15</td> <td>54.00</td> <td>30.23</td> <td>36.03</td> <td>5.61</td> <td>35.02</td> <td>Average</td> </tr> <tr> <td>2</td> <td>7642.000</td> <td>49.61</td> <td>-24.39</td> <td>74.00</td> <td>42.99</td> <td>36.03</td> <td>5.61</td> <td>35.02</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>11000.000</td> <td>40.32</td> <td>-13.68</td> <td>54.00</td> <td>29.99</td> <td>38.20</td> <td>6.23</td> <td>34.10</td> <td>Average</td> </tr> <tr> <td>4</td> <td>11000.000</td> <td>52.98</td> <td>-21.02</td> <td>74.00</td> <td>42.65</td> <td>38.20</td> <td>6.23</td> <td>34.10</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>16500.000</td> <td>60.83</td> <td>-7.37</td> <td>68.20</td> <td>45.40</td> <td>41.50</td> <td>8.70</td> <td>34.77</td> <td>Peak</td> </tr> </tbody> </table>												Over	Limit	Read	Antenna	Cable	Preamp			Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark													MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		1	7642.000	36.85	-17.15	54.00	30.23	36.03	5.61	35.02	Average	2	7642.000	49.61	-24.39	74.00	42.99	36.03	5.61	35.02	Peak	3	11000.000	40.32	-13.68	54.00	29.99	38.20	6.23	34.10	Average	4	11000.000	52.98	-21.02	74.00	42.65	38.20	6.23	34.10	Peak	5	16500.000	60.83	-7.37	68.20	45.40	41.50	8.70	34.77	Peak
		Over	Limit	Read	Antenna	Cable	Preamp																																																																																												
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark																																																																																											
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																																											
1	7642.000	36.85	-17.15	54.00	30.23	36.03	5.61	35.02	Average																																																																																										
2	7642.000	49.61	-24.39	74.00	42.99	36.03	5.61	35.02	Peak																																																																																										
3	11000.000	40.32	-13.68	54.00	29.99	38.20	6.23	34.10	Average																																																																																										
4	11000.000	52.98	-21.02	74.00	42.65	38.20	6.23	34.10	Peak																																																																																										
5	16500.000	60.83	-7.37	68.20	45.40	41.50	8.70	34.77	Peak																																																																																										
Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical) Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition. Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407. Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.																																																																																																			



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5500																																																				
N _{TX}	1	Polarization	H																																																				
Level (dBuV/m)			Date: 2015-09-27																																																				
<table><thead><tr><th>Freq</th><th>Level</th><th>Over Limit</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>7009.000</td><td>49.61</td><td>-18.59</td><td>68.20</td><td>43.61</td><td>35.80</td><td>5.09</td><td>34.89 Peak</td></tr><tr><td>2</td><td>11000.000</td><td>39.56</td><td>-14.44</td><td>54.00</td><td>29.23</td><td>38.20</td><td>6.23</td><td>34.10 Average</td></tr><tr><td>3</td><td>11000.000</td><td>52.32</td><td>-21.68</td><td>74.00</td><td>41.99</td><td>38.20</td><td>6.23</td><td>34.10 Peak</td></tr><tr><td>4</td><td>16500.000</td><td>60.41</td><td>-7.79</td><td>68.20</td><td>44.98</td><td>41.50</td><td>8.70</td><td>34.77 Peak</td></tr></tbody></table>				Freq	Level	Over Limit	Line	ReadAntenna	Cable	Preamp		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	7009.000	49.61	-18.59	68.20	43.61	35.80	5.09	34.89 Peak	2	11000.000	39.56	-14.44	54.00	29.23	38.20	6.23	34.10 Average	3	11000.000	52.32	-21.68	74.00	41.99	38.20	6.23	34.10 Peak	4	16500.000	60.41	-7.79	68.20	44.98	41.50	8.70	34.77 Peak
Freq	Level	Over Limit	Line	ReadAntenna	Cable	Preamp																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																
1	7009.000	49.61	-18.59	68.20	43.61	35.80	5.09	34.89 Peak																																															
2	11000.000	39.56	-14.44	54.00	29.23	38.20	6.23	34.10 Average																																															
3	11000.000	52.32	-21.68	74.00	41.99	38.20	6.23	34.10 Peak																																															
4	16500.000	60.41	-7.79	68.20	44.98	41.50	8.70	34.77 Peak																																															
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical) Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition. Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407. Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.</p>																																																							



Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode	11a	Test Freq. (MHz)	5580					
N _{TX}	1	Polarization	V					
Level (dBuV/m)								Date: 2015-09-27
1	7585.000	36.68	-17.32	54.00	30.02	36.02	5.64	35.00 Average
2	7585.000	50.28	-23.72	74.00	43.62	36.02	5.64	35.00 Peak
3	11160.000	42.28	-11.72	54.00	32.01	38.20	6.28	34.21 Average
4	11160.000	56.26	-17.74	74.00	45.99	38.20	6.28	34.21 Peak
5	16740.000	61.82	-6.38	68.20	45.80	41.50	8.86	34.34 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
 Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																					
Modulation Mode	11a		Test Freq. (MHz)		5580																																																																
N _{TX}	1		Polarization		H																																																																
Level (dB _u V/m)									Date: 2015-09-27																																																												
									UNI UNI 2015-09-27																																																												
<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit</th> <th>Read</th> <th>Antenna</th> <th>Cable</th> <th>Preamp</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dB_uV/m</th> <th>dB</th> <th>dB_uV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>Factor</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8714.000</td> <td>50.80</td> <td>-17.40</td> <td>68.20</td> <td>43.86</td> <td>36.34</td> <td>5.70</td> <td>35.10</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11160.000</td> <td>41.41</td> <td>-12.59</td> <td>54.00</td> <td>31.14</td> <td>38.20</td> <td>6.28</td> <td>34.21</td> <td>Average</td> </tr> <tr> <td>3</td> <td>11160.000</td> <td>54.25</td> <td>-19.75</td> <td>74.00</td> <td>43.98</td> <td>38.20</td> <td>6.28</td> <td>34.21</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>16740.000</td> <td>60.87</td> <td>-7.33</td> <td>68.20</td> <td>44.85</td> <td>41.50</td> <td>8.86</td> <td>34.34</td> <td>Peak</td> </tr> </tbody> </table>										Freq	Level	Over Limit	Limit	Read	Antenna	Cable	Preamp			MHz	dB _u V/m	dB	dB _u V/m	dBuV	dB/m	dB	dB	Factor	Remark	1	8714.000	50.80	-17.40	68.20	43.86	36.34	5.70	35.10	Peak	2	11160.000	41.41	-12.59	54.00	31.14	38.20	6.28	34.21	Average	3	11160.000	54.25	-19.75	74.00	43.98	38.20	6.28	34.21	Peak	4	16740.000	60.87	-7.33	68.20	44.85	41.50	8.86	34.34	Peak
Freq	Level	Over Limit	Limit	Read	Antenna	Cable	Preamp																																																														
MHz	dB _u V/m	dB	dB _u V/m	dBuV	dB/m	dB	dB	Factor	Remark																																																												
1	8714.000	50.80	-17.40	68.20	43.86	36.34	5.70	35.10	Peak																																																												
2	11160.000	41.41	-12.59	54.00	31.14	38.20	6.28	34.21	Average																																																												
3	11160.000	54.25	-19.75	74.00	43.98	38.20	6.28	34.21	Peak																																																												
4	16740.000	60.87	-7.33	68.20	44.85	41.50	8.86	34.34	Peak																																																												
Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.																																																																					
Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)																																																																					
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)																																																																					
Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.																																																																					
Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.																																																																					
Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.																																																																					

