

FCC Test Report

Product Name	WCDMA/LTE/5G Mobile Phone
Model No	EA211001,EC211001,EC211004
FCC ID	RYQEA211001

Applicant	FIH CO., LTD.
Address	No.4, Minsheng St., Tu-Cheng Dist., New Taipei City 23679, Taiwan

Date of Receipt	Apr. 23, 2021
Issued Date	June 22, 2021
Report No.	2150419R-E3032110125
Report Version	V2.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test Report

Issued Date: June 22, 2021

Report No.: 2150419R-E3032110125




Product Name	WCDMA/LTE/5G Mobile Phone
Applicant	FIH CO., LTD.
Address	No.4, Minsheng St., Tu-Cheng Dist., New Taipei City 23679, Taiwan
Manufacturer	FIH CO., LTD.
Model No.	EA211001,EC211001,EC211004
FCC ID.	RYQEA211001
EUT Rated Voltage	AC 100-240V, 50-60Hz or DC 3.85V by battery
EUT Test Voltage	AC 120V / 60Hz
Trade Name	FIH
Applicable Standard	FCC CFR Title 47 Part 15 Subpart E ANSI C63.4: 2014, ANSI C63.10: 2013 KDB Publication 789033
Test Result	Complied

Documented By :



(Senior Adm. Specialist / Genie Chang)

Tested By :



(Senior Engineer / Ivan Chuang)

Approved By :



(Senior Engineer / Vincent Yeh)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION.....	6
1.1. EUT Description.....	6
1.2. Tested System Details.....	8
1.3. Configuration of tested System	8
1.4. EUT Exercise Software	8
1.5. Test Facility	9
1.6. List of Test Equipment	10
1.7. Uncertainty	11
2. Conducted Emission	12
2.1. Test Setup	12
2.2. Limits	12
2.3. Test Procedure	13
2.4. Test Result of Conducted Emission.....	14
3. Maximun conducted output power.....	16
3.1. Test Setup	16
3.2. Limits	17
3.3. Test Procedure	18
3.4. Test Result of Maximum conducted output power.....	19
4. Peak Power Spectral Density	40
4.1. Test Setup	40
4.2. Limits	40
4.3. Test Procedure	41
4.4. Test Result of Peak Power Spectral Density	42
5. Radiated Emission.....	69
5.1. Test Setup	69
5.2. Limits	70
5.3. Test Procedure	71
5.4. Test Result of Radiated Emission.....	73
6. Band Edge.....	220
6.1. Test Setup	220
6.2. Limits	221
6.3. Test Procedure	221
6.4. Test Result of Band Edge	223
7. Occupied Bandwidth.....	291
7.1. Test Setup	291

7.2.	Limits	291
7.3.	Test Procedure	291
7.4.	Test Result of Occupied Bandwidth	292
8.	Duty Cycle.....	299
8.1.	Test Setup	299
8.2.	Test Procedure	299
8.3.	Test Result of Duty Cycle.....	300
9.	EMI Reduction Method During Compliance Testing	303
Appendix I: Photographs of Test Configuration		
Appendix II: Photographs of the EUT		

Revision History

Report No.	Version	Description	Issued Date
2150419R-E3032110125	V1.0	Initial issue of report.	2021-06-08
2150419R-E3032110125	V2.0	Update Product Name	2021-06-22

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	WCDMA/LTE/5G Mobile Phone
Trade Name	FIH
FCC ID.	RYQEA211001
Model No.	EA211001,EC211001,EC211004
Frequency Range	802.11a/n/ac-20MHz: 5180-5320MHz, 5500-5700MHz, 5745-5825MHz 802.11n/ac-40MHz: 5190-5310, 5510-5670MHz, 5755-5795MHz 802.11ac-80MHz: 5210-5290MHz, 5530-5690MHz, 5775MHz
Number of Channels	802.11a/n/ac-20MHz: 25; 802.11n/ac-40MHz: 12 802.11ac-80MHz: 6
Data Rate	802.11a: 6 - 54Mbps 802.11n/ac: up to 200Mbps 802.11ac-80MHz: up to 433.3MHz
Channel Control	Auto
Type of Modulation	802.11a/n/ac: OFDM, BPSK, QPSK, 16QAM, 64QAM, 256QAM
Antenna Type	PIFA Antenna
Antenna Gain	Refer to the table “Antenna List”
USB Cable	Shielded, 1m
Power Adapter	MFR: CHEN YANG, M/N: CK18W02U Input: AC 100-240V, 50-60Hz, 0.5A Output: 5V $\approx$ 3A or 9V $\approx$ 2A or 12V $\approx$ 1.5A

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	Speed	S0AC60360A0	PIFA Antenna	1.4dBi for 5.150-5.250 GHz 1.4dBi for 5.250-5.350 GHz 1.4dBi for 5.470-5.725 GHz 1.4dBi For 5.725~5.825GHz

Note: The antenna of EUT is conform to FCC 15.203.

802.11a/n/ac-20MHz Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 36:	5180 MHz	Channel 40:	5200 MHz	Channel 44:	5220 MHz	Channel 48:	5240 MHz
Channel 52:	5260 MHz	Channel 56:	5280 MHz	Channel 60:	5300 MHz	Channel 64:	5320 MHz
Channel 100:	5500 MHz	Channel 104:	5520 MHz	Channel 108:	5540 MHz	Channel 112:	5560 MHz
Channel 116:	5580 MHz	Channel 120:	5600 MHz	Channel 124:	5620 MHz	Channel 128:	5640 MHz
Channel 132:	5660 MHz	Channel 136:	5680 MHz	Channel 140:	5700 MHz	Channel 144:	5720 MHz
Channel 149:	5745 MHz	Channel 153:	5765 MHz	Channel 157:	5785 MHz	Channel 161:	5805 MHz
Channel 165:	5825 MHz						

802.11n/ac-40MHz Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 38:	5190 MHz	Channel 46:	5230 MHz	Channel 54:	5270 MHz	Channel 62:	5310 MHz
Channel 102:	5510 MHz	Channel 110:	5550 MHz	Channel 118:	5590 MHz	Channel 126:	5630 MHz
Channel 134:	5670 MHz	Channel 142:	5710 MHz	Channel 151:	5755 MHz	Channel 159:	5795 MHz

802.11ac-80MHz Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 42:	5210 MHz	Channel 58:	5290 MHz	Channel 106:	5530 MHz	Channel 122:	5610 MHz
Channel 138:	5690 MHz	Channel 155:	5775 MHz				

Note:

1. This device is a WCDMA/LTE/5G Mobile Phone with a built-in 2.4 GHz、5 GHz WLAN、Bluetooth V5.1, V3.0, V2.1+EDR、NFC and WWAN transceiver, this report for 5GHz WLAN.
2. It's declared by manufacture about all models are electrically identical, different model names for marketing purpose. The identification of test sample is EA211001.
3. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.
4. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
5. Lowest and highest data rates are tested in each mode. Only worst case is shown in the report.
6. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart E for Unlicensed National Information Infrastructure devices.

Test Mode	Mode 1: Transmit (802.11a-6Mbps) Mode 2: Transmit (802.11ac-20BW 7.2Mbps) Mode 3: Transmit (802.11ac-40BW 15Mbps) Mode 4: Transmit (802.11ac-80BW 32.5Mbps)
-----------	--


1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Power Adapter	CHEN YANG	CK18W02U	N/A	N/A
2	Microphone & Earphone	Ergotech	ET-E201	N/A	N/A

Signal Cable Type	Signal cable Description
A	Power Cable
B	USB Cable
C	Audio Cable

1.3. Configuration of tested System

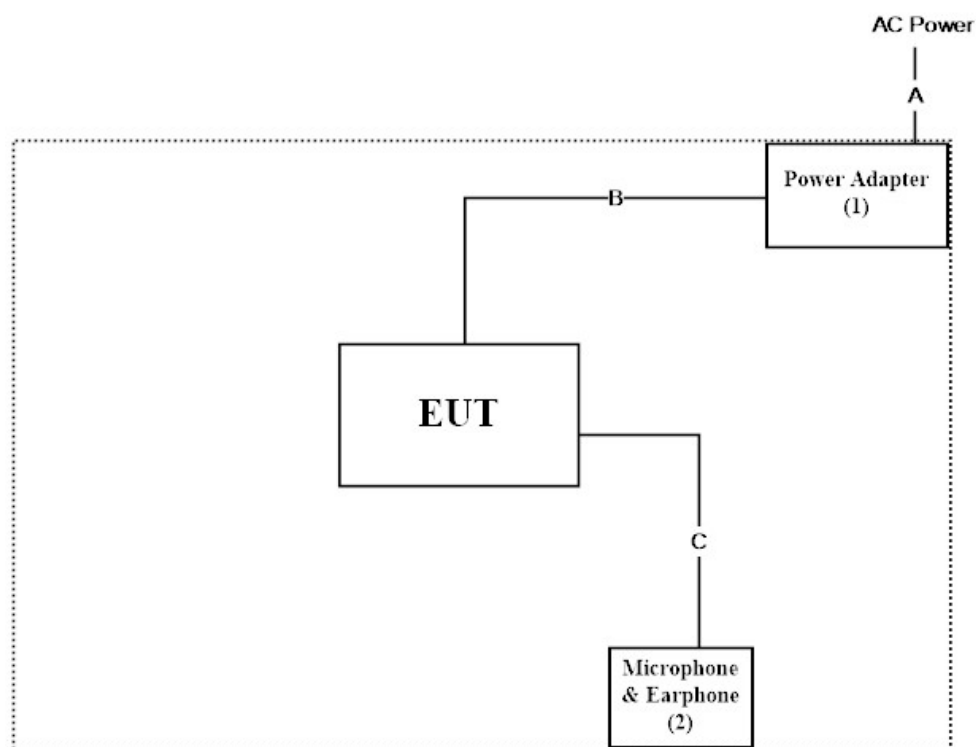

1.4. EUT Exercise Software

1. Setup the EUT as shown in Section 1.3.
2. Execute software “Engineer Mode v2021-04-16-122001” on the EUT.
3. Configure the test mode, the test channel, and the data rate.
4. Press “OK” to start the continuous Transmit.
5. Verify that the EUT works properly.

1.5. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	10~40 °C	23.5 °C
	Humidity (%RH)	10~90 %	60.1 %
Radiated Emission	Temperature (°C)	10~40 °C	31.6 °C
	Humidity (%RH)	10~90 %	66.2 %
Conductive	Temperature (°C)	10~40 °C	23.1 °C
	Humidity (%RH)	10~90 %	58.4 %

USA : FCC Registration Number: TW0033

Canada : IC Registration Number: 26930

Site Description : Accredited by TAF
Accredited Number: 3023

Test Laboratory : DEKRA Testing and Certification Co., Ltd
Address : No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City
Phone number : 886-2-2602-7968
Fax number : 866-2-2602-3286
Email address : info.tw@dekra.com
Website : <http://www.dekra.com.tw>

1.6. List of Test Equipment

For Conduction measurements / ASR1-1

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due. Date
X	EMI Test Receiver	R&S	ESR7	101601	2021.01.04	2022.01.03
X	Two-Line V-Network	R&S	ENV216	101306	2021.04.08	2022.04.07
X	Two-Line V-Network	R&S	ENV216	101307	2021.05.04	2022.05.03
X	Coaxial Cable	DEKRA	RG400_BNC	RF001	2021.05.24	2022.05.23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Testing System V2.0.

For Conducted measurements /AC2

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due. Date
X	Spectrum Analyzer	Keysight	N9030B	MY56320509	2020.08.10	2021.08.09
X	Power Meter	Anritsu	ML2496A	1548003	2020.12.21	2021.12.20
X	Power Sensor	Anritsu	MA2411B	1531024	2020.12.21	2021.12.20
X	Power Sensor	Anritsu	MA2411B	1531025	2020.12.21	2021.12.20

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Conduction Test System V9.0.5.

For Radiated measurements /AC2

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due. Date
X	Loop Antenna	AMETEK	HLA6121	56736	2021.04.14	2022.04.13
X	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-953	2021.01.29	2022.01.28
X	Horn Antenna	ETS-Lindgren	3117	00203799	2020.12.22	2021.12.21
X	Horn Antenna	Com-Power	AH-840	101101	2020.11.19	2021.11.18
X	Pre-Amplifier	EMCI	EMC001330	980302	2020.07.08	2021.07.07
X	Pre-Amplifier	EMCI	EMC051835SE	980312	2020.06.10	2021.06.09
X	Pre-Amplifier	EMCI	EMC05820SE	980361	2020.12.21	2021.12.20
X	Pre-Amplifier	EMCI	EMC184045SE	980369	2021.04.27	2022.04.26
X	Filter	MICRO TRONICS	BRM50702	G251	2020.09.17	2021.09.16
X	Filter	MICRO TRONICS	BRM50716	G188	2020.09.17	2021.09.16
X	EMI Test Receiver	R&S	ESR	102793	2020.12.17	2021.12.16
X	Spectrum Analyzer	R&S	FSV3044	101114	2021.02.04	2022.02.03
X	Coaxial Cable	SUHNER	SUCOFLEX 106	RF003	2021.03.03	2022.03.02
X	Mircoflex Cable	HUBER SUHNER	SUCOFLEX 102	MY3381/2	2020.06.10	2021.06.09

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Testing System V2.0.

1.7. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document, and is described in each test chapter of this report.

The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test item	Uncertainty	
Conducted Emission	± 3.42 dB	
Maximun conducted output power	Power Meter ± 0.89 dB	Spectrum Analyzer ± 2.06 dB
Power Density	± 2.06 dB	
Radiated Emission	Under 1GHz ± 4.05 dB	Above 1GHz ± 3.73 dB
Band Edge	Under 1GHz ± 4.05 dB	Above 1GHz ± 3.73 dB
Occupied Bandwidth	± 1544.74 Hz	
Duty Cycle	± 2.31 msec	

2.3. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)


Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4:2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.4. Test Result of Conducted Emission

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Conducted Emission Test
 Test Mode : Mode 4: Transmit (802.11ac-80BW 32.5Mbps) (5775MHz)
 Test Date : 2021/06/08

Line1

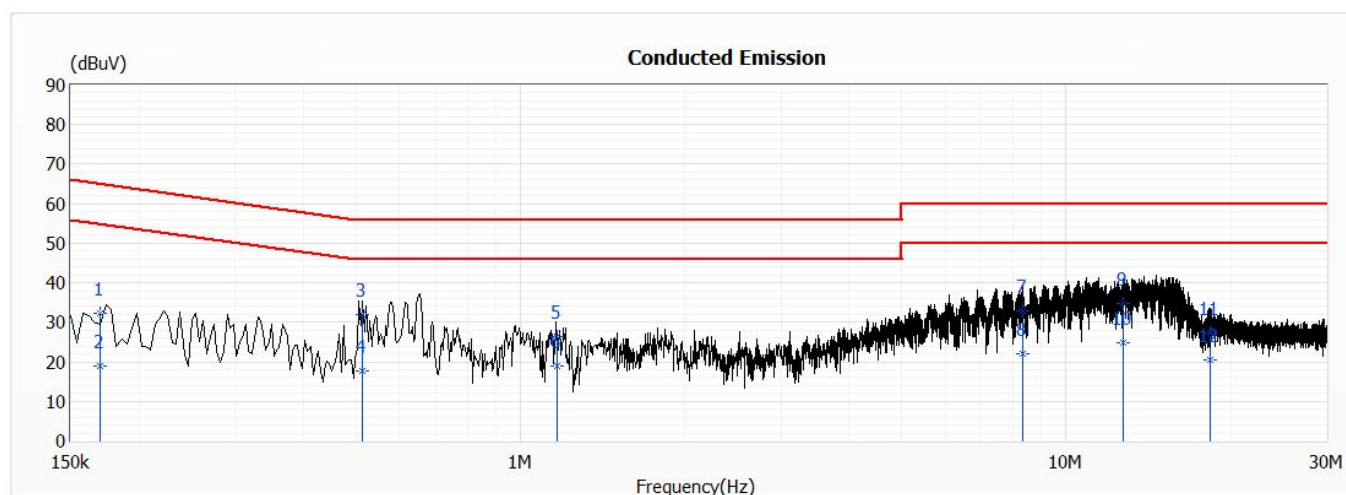


No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	0.170	32.15	64.98	-32.83	22.49	9.66	QP
2	0.170	19.01	54.98	-35.97	9.35	9.66	AV
*3	0.513	31.95	56.00	-24.05	22.29	9.66	QP
4	0.513	17.63	46.00	-28.37	7.97	9.66	AV
5	1.165	26.31	56.00	-29.69	16.62	9.69	QP
6	1.165	18.87	46.00	-27.13	9.18	9.69	AV
7	8.321	32.99	60.00	-27.01	23.13	9.86	QP
8	8.321	21.91	50.00	-28.09	12.05	9.86	AV
9	12.736	34.71	60.00	-25.29	24.79	9.92	QP
10	12.736	24.97	50.00	-25.03	15.05	9.92	AV
11	18.377	27.43	60.00	-32.57	17.47	9.96	QP
12	18.377	20.42	50.00	-29.58	10.46	9.96	AV

Remark:

1. "*" means this data is the worst emission level; "!" means this data is over limit.
2. Emission Level=Reading Level + Correct Factor(Correct Factor=LISN Factor+Cable Loss).
3. Margin=Emission Level-Limit

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Conducted Emission Test
 Test Mode : Mode 4: Transmit (802.11ac-80BW 32.5Mbps) (5775MHz)
 Test Date : 2021/06/08

N

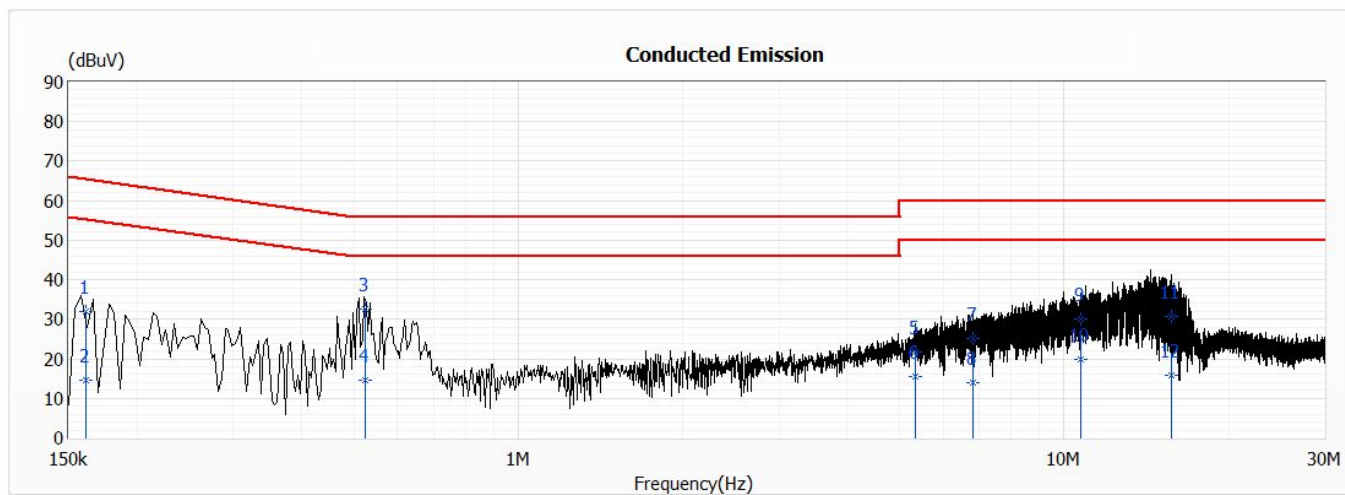

No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	0.162	32.08	65.38	-33.30	22.41	9.67	QP
2	0.162	14.62	55.38	-40.76	4.95	9.67	AV
*3	0.524	32.48	56.00	-23.52	22.81	9.67	QP
4	0.524	14.61	46.00	-31.39	4.94	9.67	AV
5	5.342	21.61	60.00	-38.39	11.80	9.81	QP
6	5.342	15.38	50.00	-34.62	5.57	9.81	AV
7	6.815	25.07	60.00	-34.93	15.22	9.85	QP
8	6.815	14.04	50.00	-35.96	4.19	9.85	AV
9	10.728	30.08	60.00	-29.92	20.16	9.92	QP
10	10.728	19.71	50.00	-30.29	9.79	9.92	AV
11	15.713	30.77	60.00	-29.23	20.77	10.00	QP
12	15.713	15.76	50.00	-34.24	5.76	10.00	AV


Remark:

1. "*" means this data is the worst emission level; "!" means this data is over limit.
2. Emission Level=Reading Level + Correct Factor(Correct Factor=LISN Factor+Cable Loss).
3. Margin=Emission Level-Limit

3. Maximun conducted output power


3.1. Test Setup

99% Occupied Bandwidth

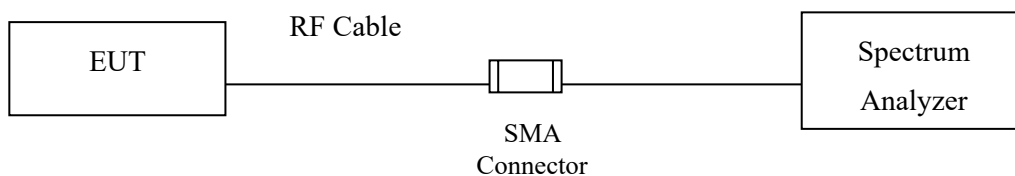


Conduction Power Measurement

Conduction Power Measurement (for 802.11an)

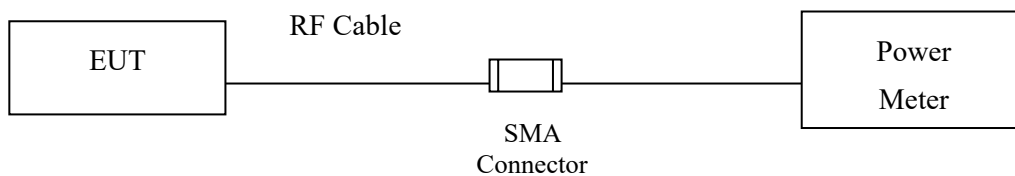

Conduction Power Measurement (for 802.11ac)

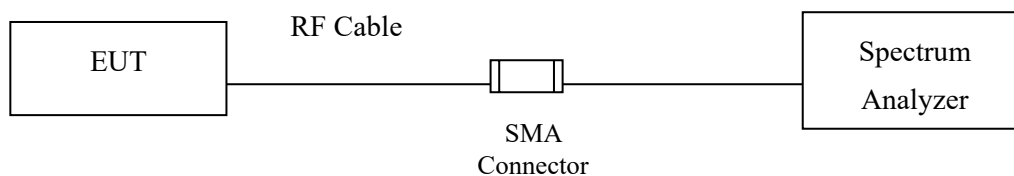

3.2. Limits

For the band 5.15-5.25 GHz,

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W, provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 99% emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point UNII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

3.3. Test Procedure

As an alternative to FCC KDB-789033, the EUT maximum conducted output power was measured with an average power meter employing a video bandwidth greater the 6dB BW of the emission under test. Maximum conducted output power was read directly from the meter across all data rates, and across three channels within each sub-band. Special care was used to make sure that the EUT was transmitting in continuous mode. This method exceeds the limitations of FCC KDB-789033, and provides more accurate measurements.

802.11an (BW $\leq$ 40MHz) Maximum conducted output power using KDB 789033 section E)3)b) Method PM-G (Measurement using a gated RF average power meter)

Note: the power meter have a video bandwidth that is greater than or equal to the measurement bandwidth, (Anritsu/ MA2411B video bandwidth: 65MHz)

802.11ac (BW=80MHz) Maximum conducted output power using KDB 789033 section E)2)b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep).

When transmitted signals consist of two or more non-contiguous spectrum segments (e.g., 80+80 MHz mode) or when a single spectrum segment of a transmission crosses the boundary between two adjacent U-NII bands, KDB 644545 D03 section D) procedure is used for measurements.

3.4. Test Result of Maximum conducted output power

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Maximum conducted output power
 Test Mode : Mode 1: Transmit (802.11a-6Mbps)
 Test Date : 2021/06/07

Cable loss=1dB		Maximum conducted output power							
Channel No.	Frequency (MHz)	Data Rate (Mbps)							
		6	9	12	18	24	36	48	54
		Measurement Level (dBm)							
36	5180	11.91	--	--	--	--	--	--	--
44	5220	11.85	11.8	11.76	11.72	11.68	11.62	11.56	11.52
48	5240	11.94	--	--	--	--	--	--	--
52	5260	11.92	--	--	--	--	--	--	--
60	5300	11.88	11.81	11.77	11.7	11.66	11.6	11.55	11.5
64	5320	11.92	--	--	--	--	--	--	--
100	5500	11.93	--	--	--	--	--	--	--
116	5580	11.87	11.83	11.79	11.73	11.67	11.61	11.54	11.47
140	5700	11.96	--	--	--	--	--	--	--
149	5745	11.98	--	--	--	--	--	--	--
157	5785	12.03	11.97	11.91	11.88	11.82	11.75	11.69	11.63
165	5825	12.11	--	--	--	--	--	--	--


Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Maximum conducted output power Measurement:


Channel No	Frequency Range (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	Duty factor (dB)	Total Output Power (dBm)	Output Power Limit	
						(dBm)	dBm+10log(BW)
36	5180	--	11.91	--	11.91	24	--
44	5220	--	11.85	--	11.85	24	--
48	5240	--	11.94	--	11.94	24	--
52	5260	19.70	11.92	--	11.92	24	23.94
60	5300	19.95	11.88	--	11.88	24	24.00
64	5320	19.75	11.92	--	11.92	24	23.96
100	5500	19.90	11.93	--	11.93	24	23.99
116	5580	19.90	11.87	--	11.87	24	23.99
140	5700	19.80	11.96	--	11.96	24	23.97
149	5745	--	11.98	--	11.98	30	--
157	5785	--	12.03	--	12.03	30	--
165	5825	--	12.11	--	12.11	30	--

Note: Power Output Value =Reading value on average power meter + cable loss


26dB Occupied Bandwidth: Channel 52:

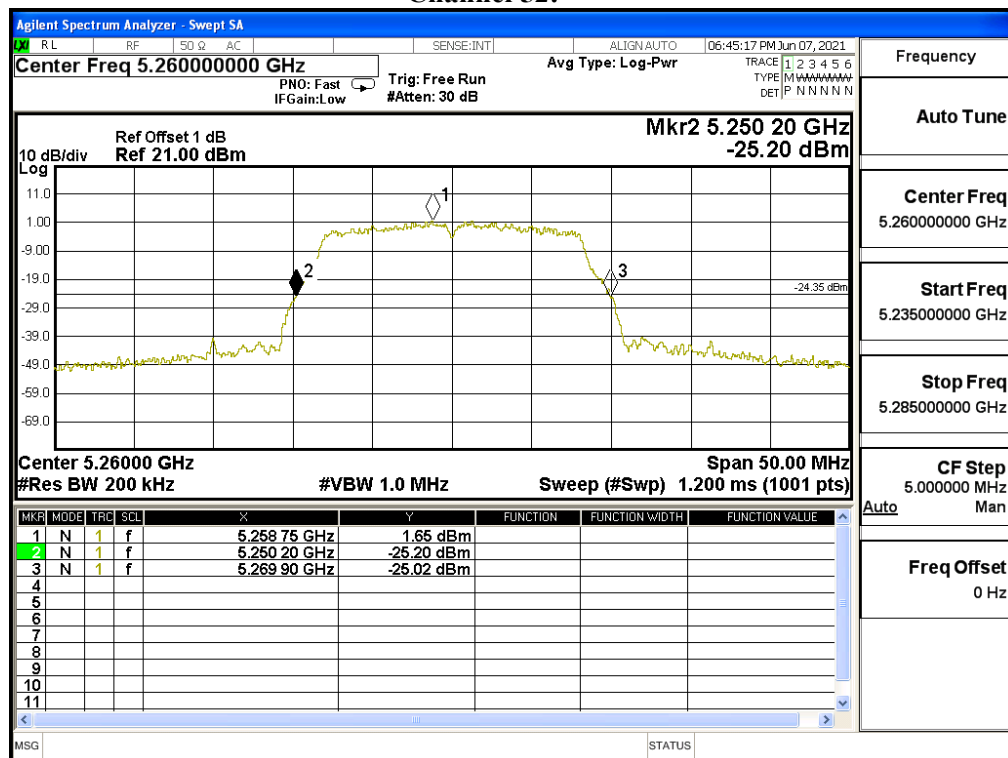


Channel 60:

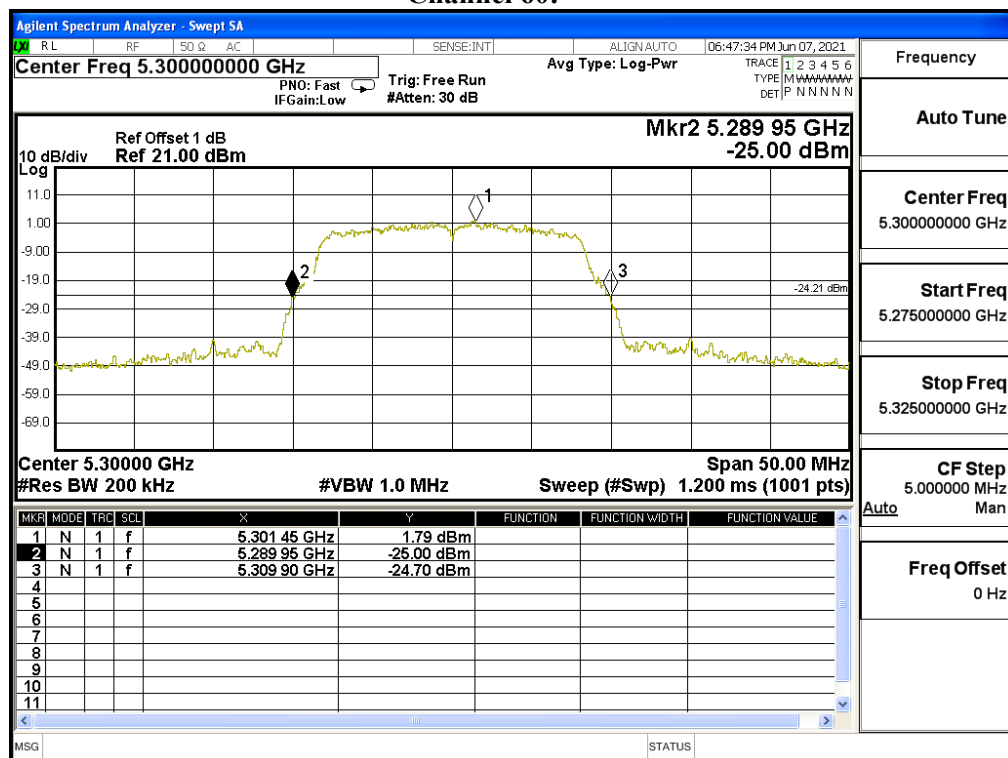


Channel 64:

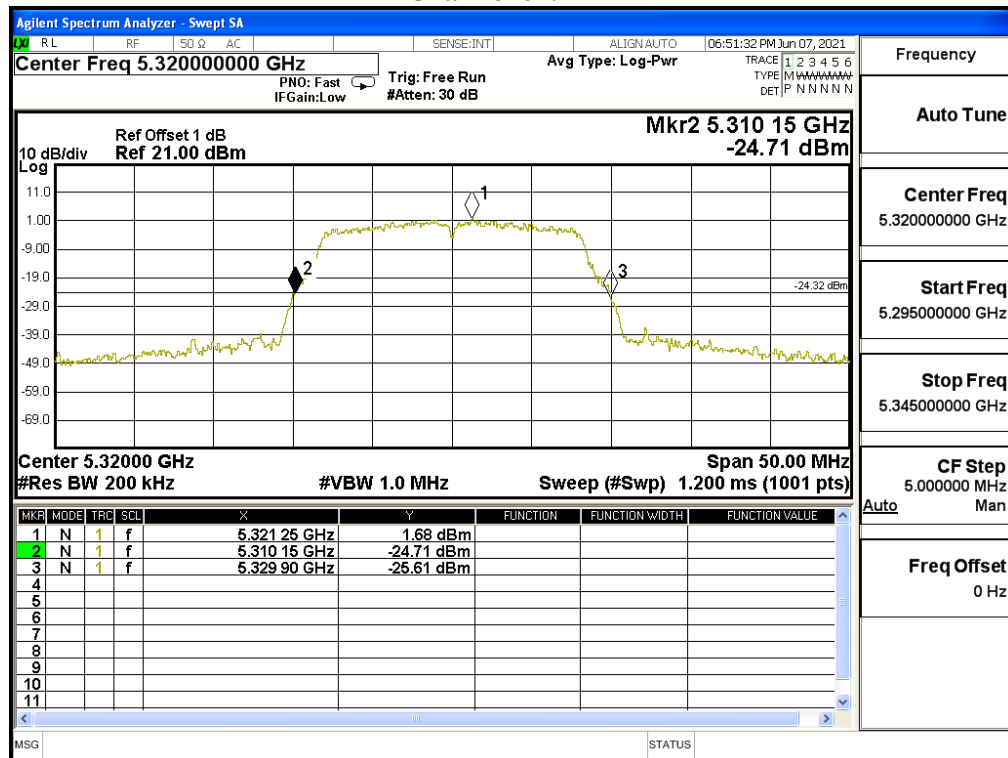


Channel 100:

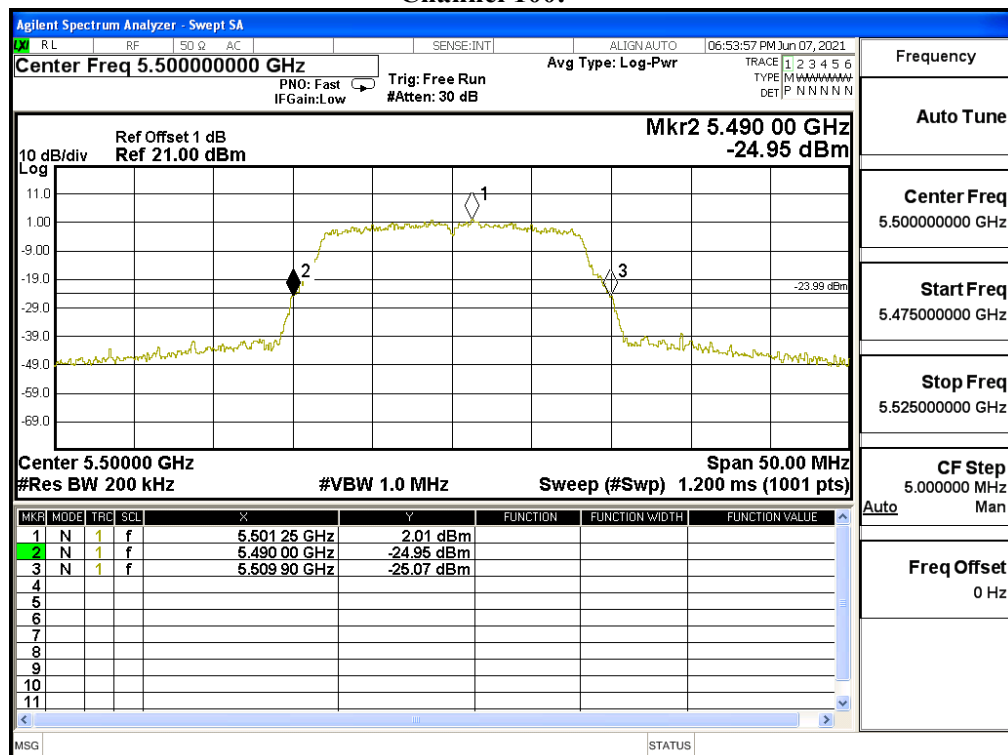

Channel 116:

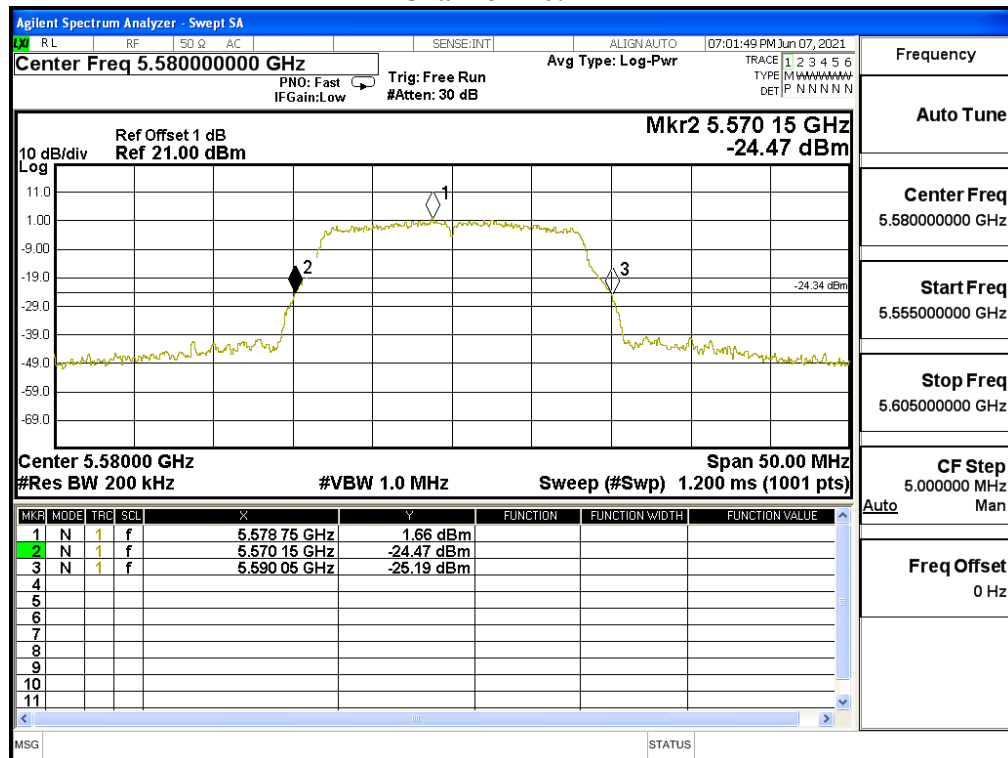

Channel 140:

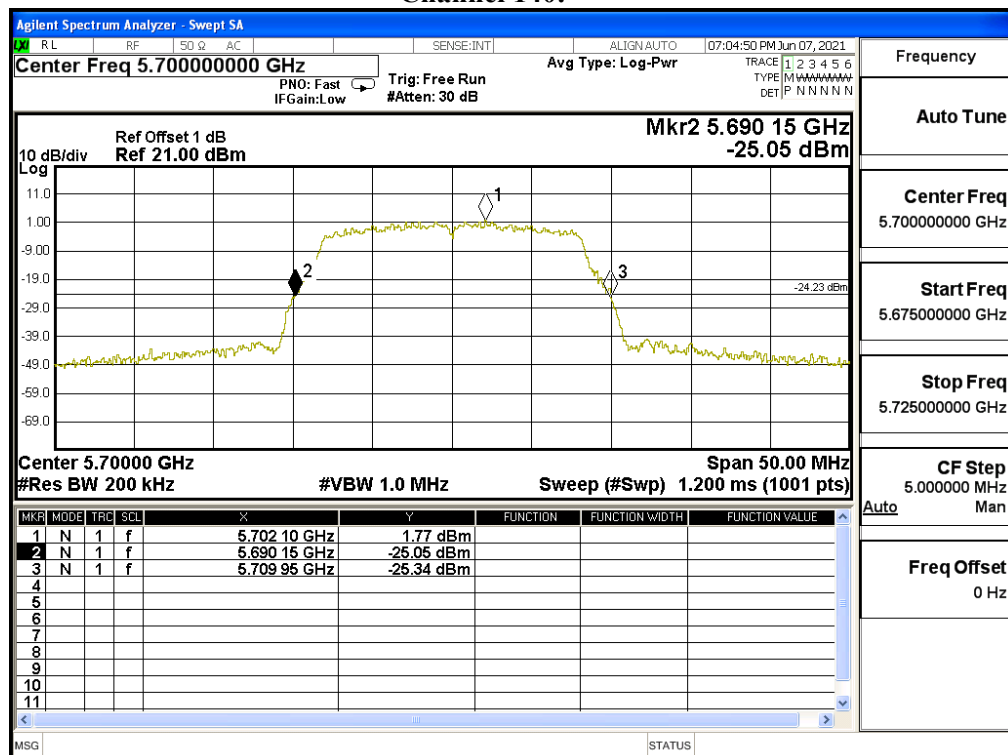

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Maximum conducted output power
 Test Mode : Mode 2: Transmit (802.11ac-20BW 7.2Mbps)
 Test Date : 2021/06/07

Cable loss=1dB		Maximum conducted output power							
Channel No.	Frequency (MHz)	Data Rate (Mbps)							
		7.2	14.4	21.7	28.9	43.3	57.8	65	86.7
		Measurement Level (dBm)							
36	5180	11.77	--	--	--	--	--	--	--
44	5220	11.82	11.77	11.72	11.66	11.6	11.55	11.49	11.46
48	5240	11.83	--	--	--	--	--	--	--
52	5260	11.79	--	--	--	--	--	--	--
60	5300	11.85	11.82	11.77	11.71	11.65	11.58	11.54	11.5
64	5320	11.86	--	--	--	--	--	--	--
100	5500	11.92	--	--	--	--	--	--	--
116	5580	11.91	11.86	11.81	11.76	11.7	11.67	11.6	11.54
140	5700	11.88	--	--	--	--	--	--	--
144(Band3)	5720	11.13	11.07	11.02	10.95	10.92	10.87	10.83	10.78
144(Band4)	5720	3.67	3.64	3.59	3.52	3.45	3.42	3.36	3.32
149	5745	12.01	--	--	--	--	--	--	--
157	5785	11.99	11.93	11.88	11.85	11.81	11.77	11.74	11.68
165	5825	12.01	--	--	--	--	--	--	--


Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Maximum conducted output power Measurement:


Channel No	Frequency Range (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	Duty factor (dB)	Total Output Power (dBm)	Output Power Limit	
						(dBm)	dBm+10log(BW)
36	5180	--	11.77	--	11.77	24	--
44	5220	--	11.82	--	11.82	24	--
48	5240	--	11.83	--	11.83	24	--
52	5260	--	11.79	--	11.79	24	24.53
60	5300	20.20	11.85	--	11.85	24	24.54
64	5320	20.25	11.86	--	11.86	24	24.48
100	5500	20.00	11.92	--	11.92	24	24.51
116	5580	20.20	11.91	--	11.91	24	24.48
140	5700	20.40	11.88	--	11.88	24	24.57
144(Band3)	5720	20.45	11.13	0.11	11.24	24	23.05
144(Band4)	5720	--	3.67	0.11	3.78	30	--
149	5745	--	12.01	--	12.01	30	--
157	5785	--	11.99	--	11.99	30	--
165	5825	--	12.01	--	12.01	30	--

Note: Power Output Value = Reading value on average power meter + cable loss


26dB Occupied Bandwidth: Channel 52

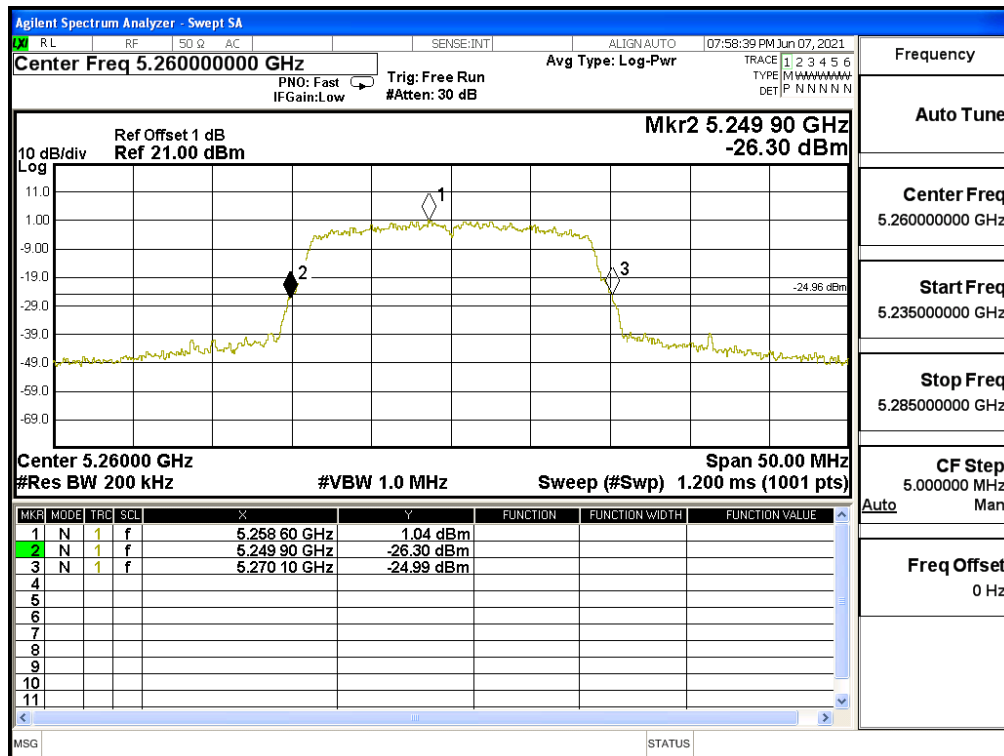


Channel 60

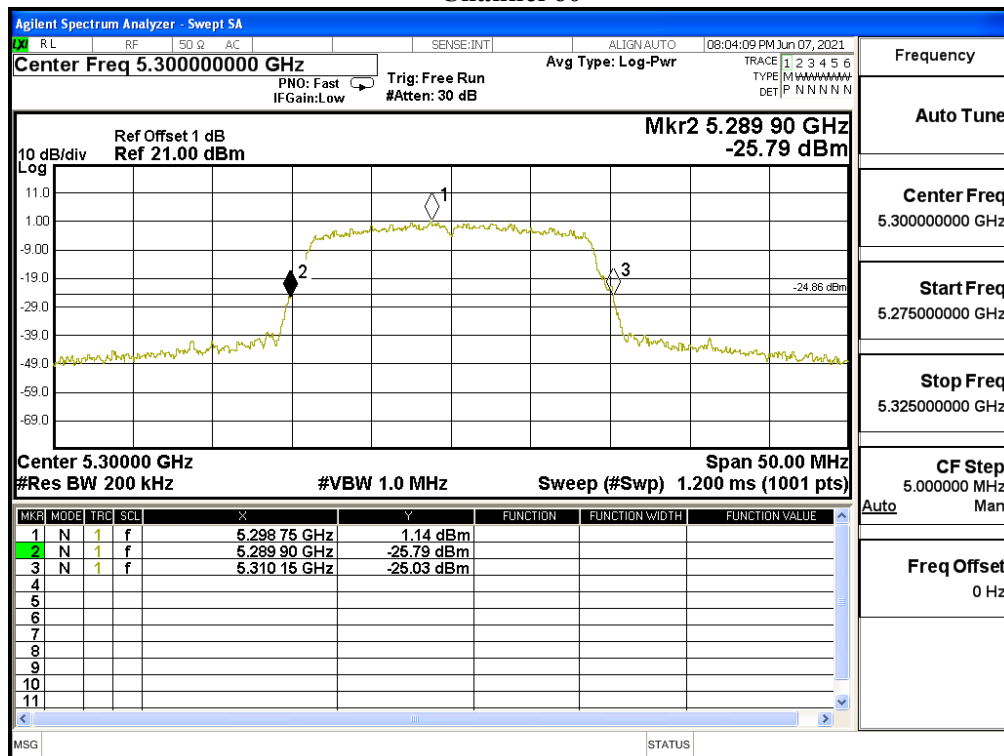


Channel 64

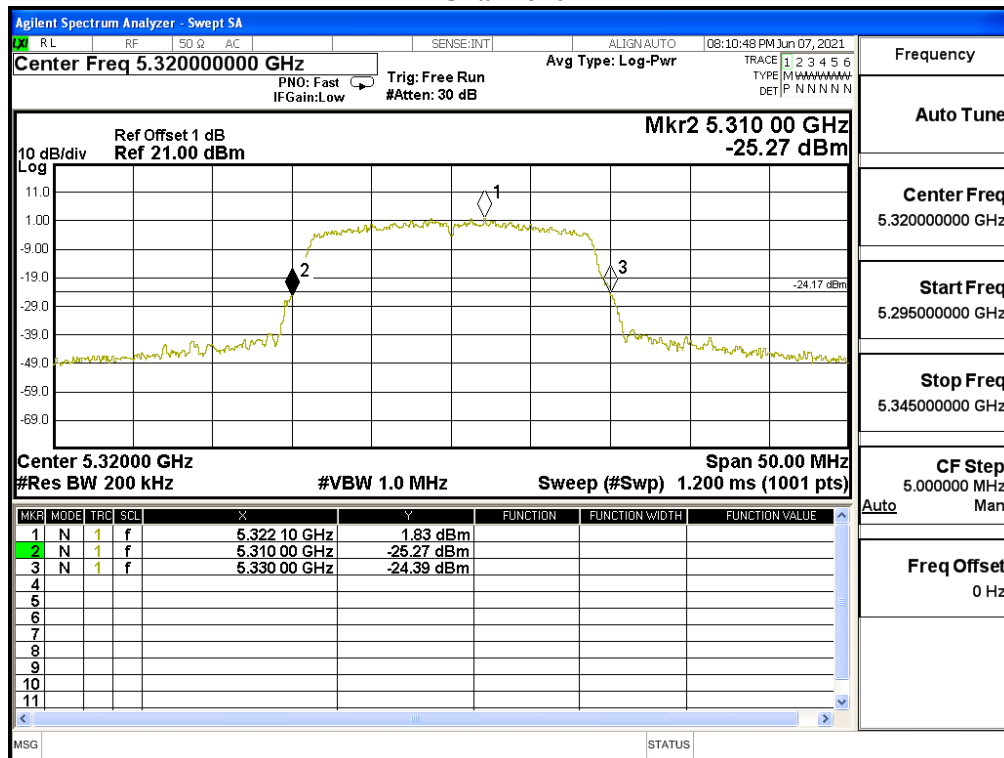


Channel 100

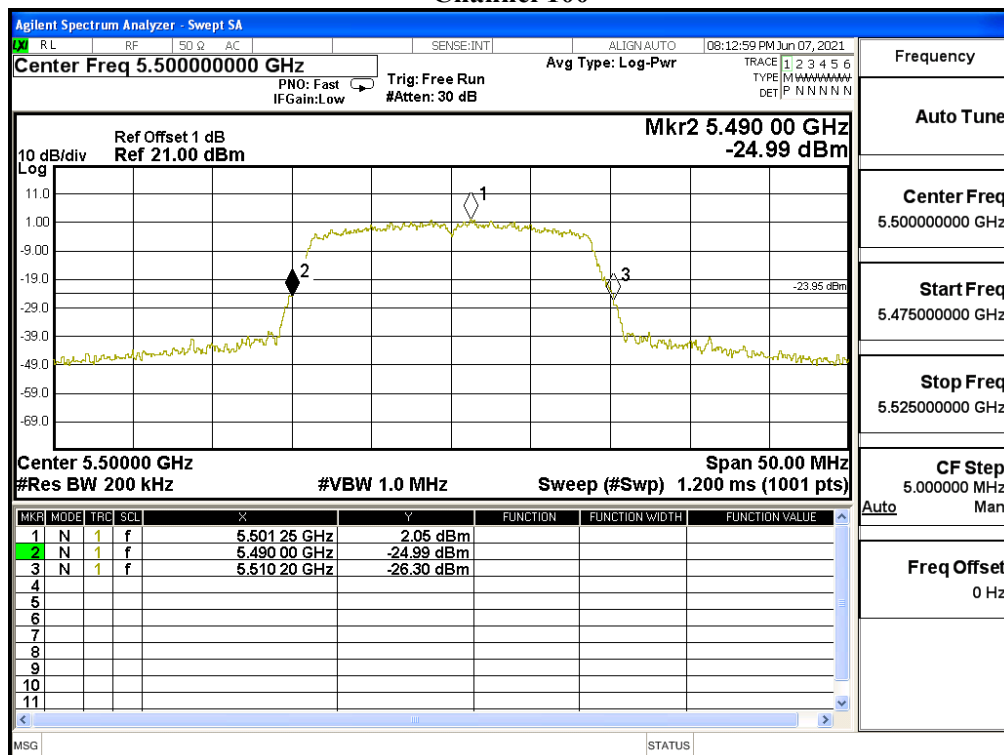


Channel 116

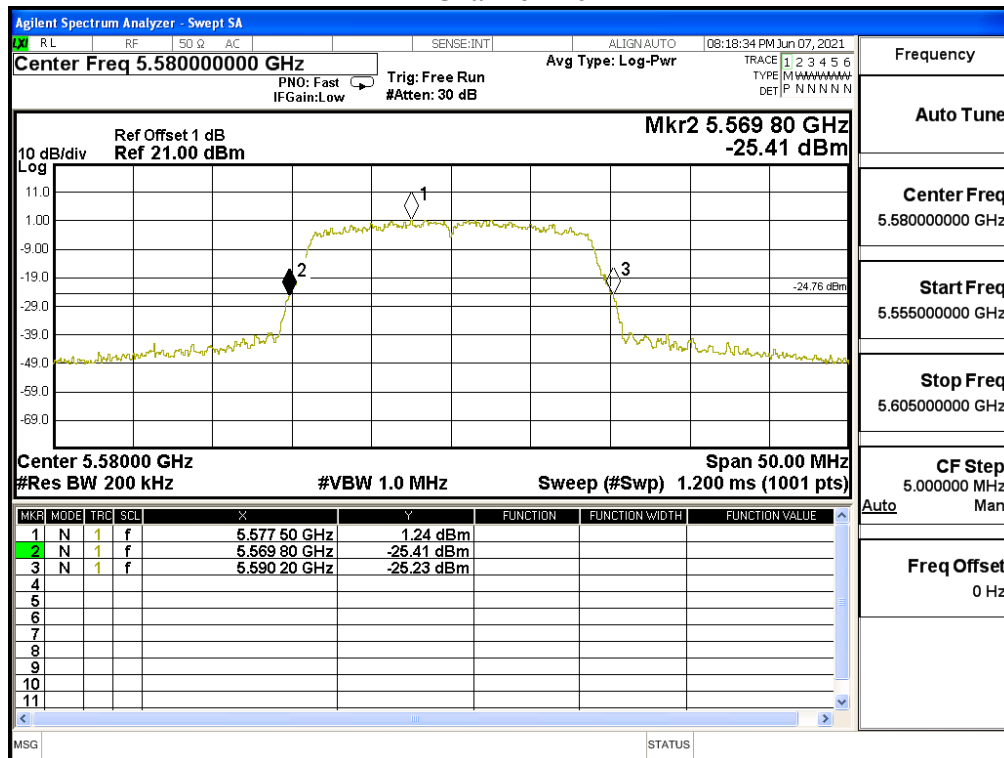

Channel 140

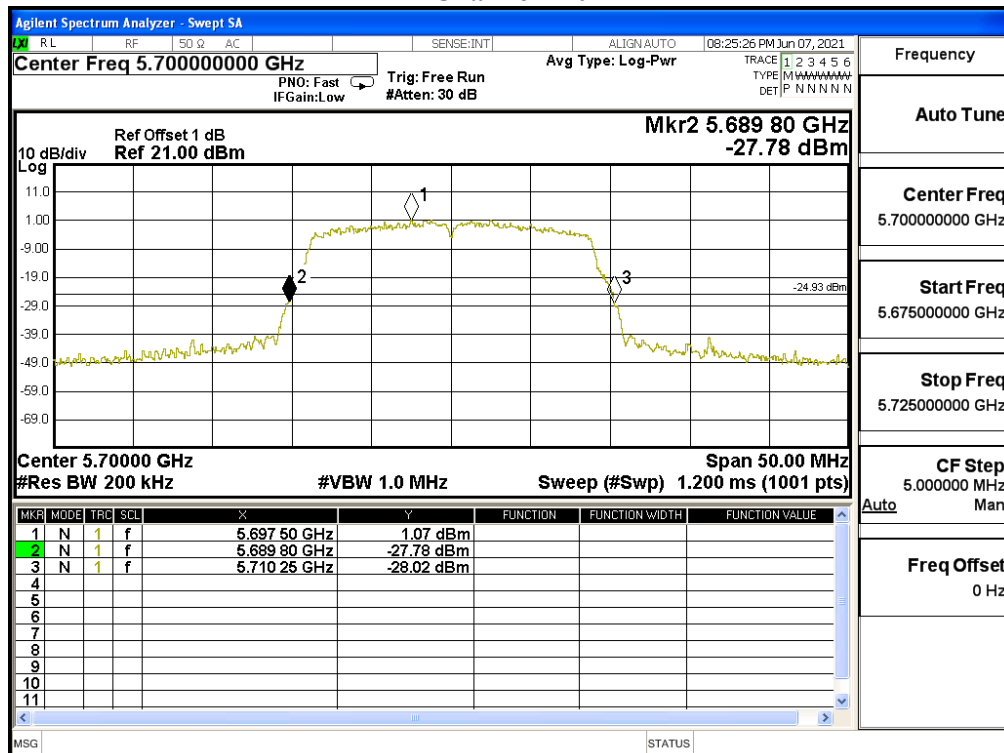


Channel 144

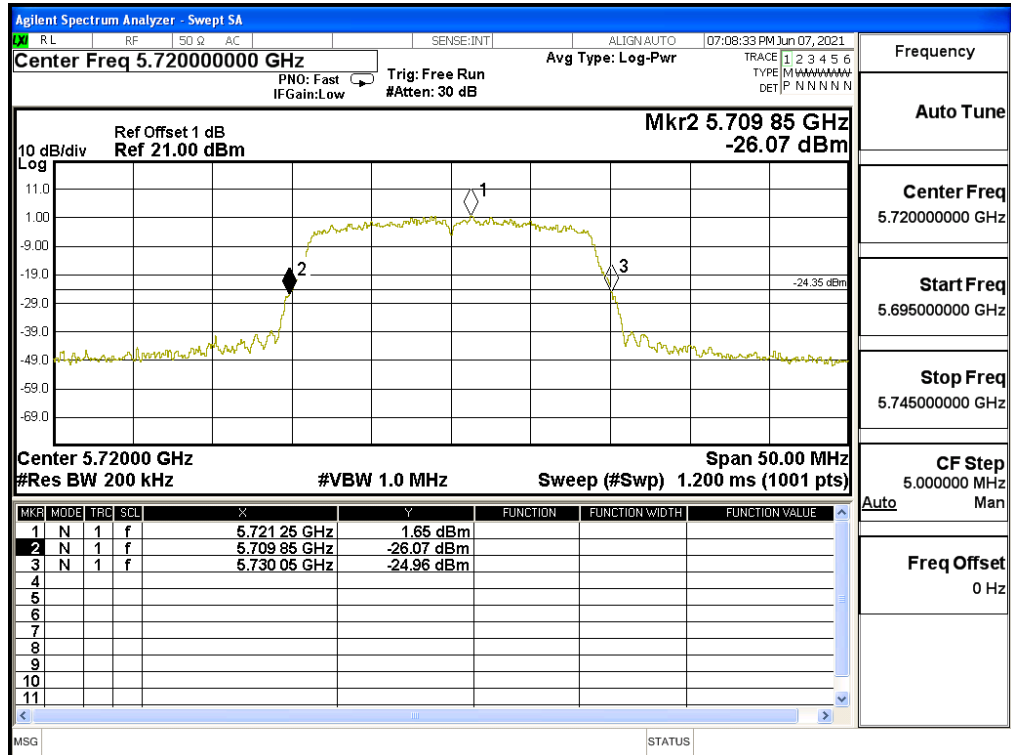


Maximum conducted output power:

Channel 144

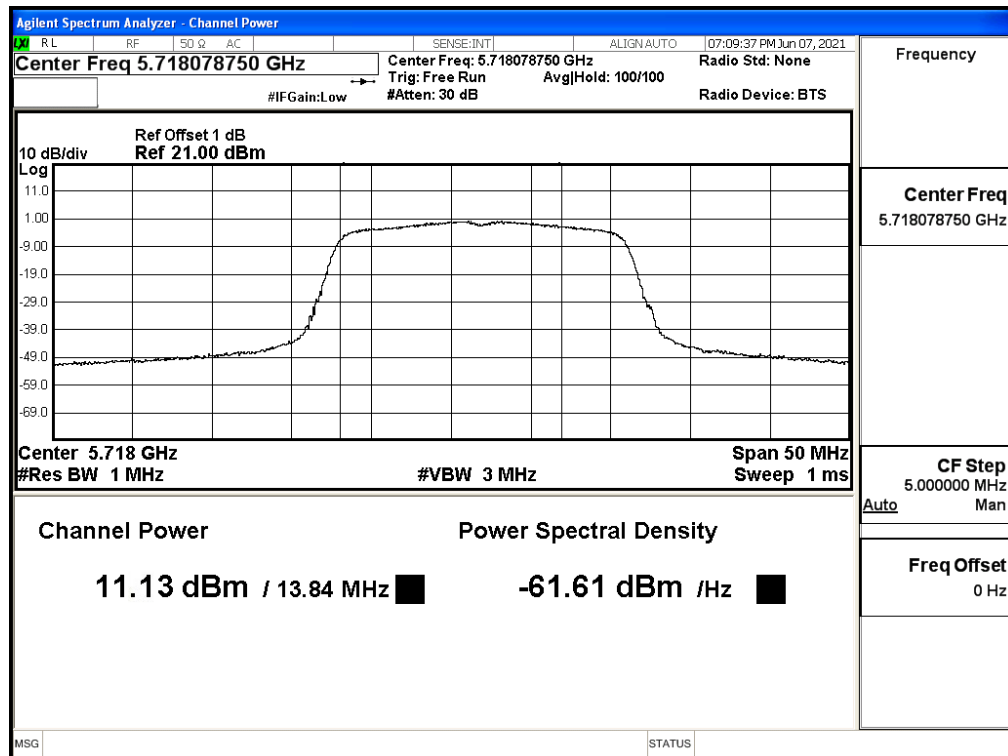

Channel 144

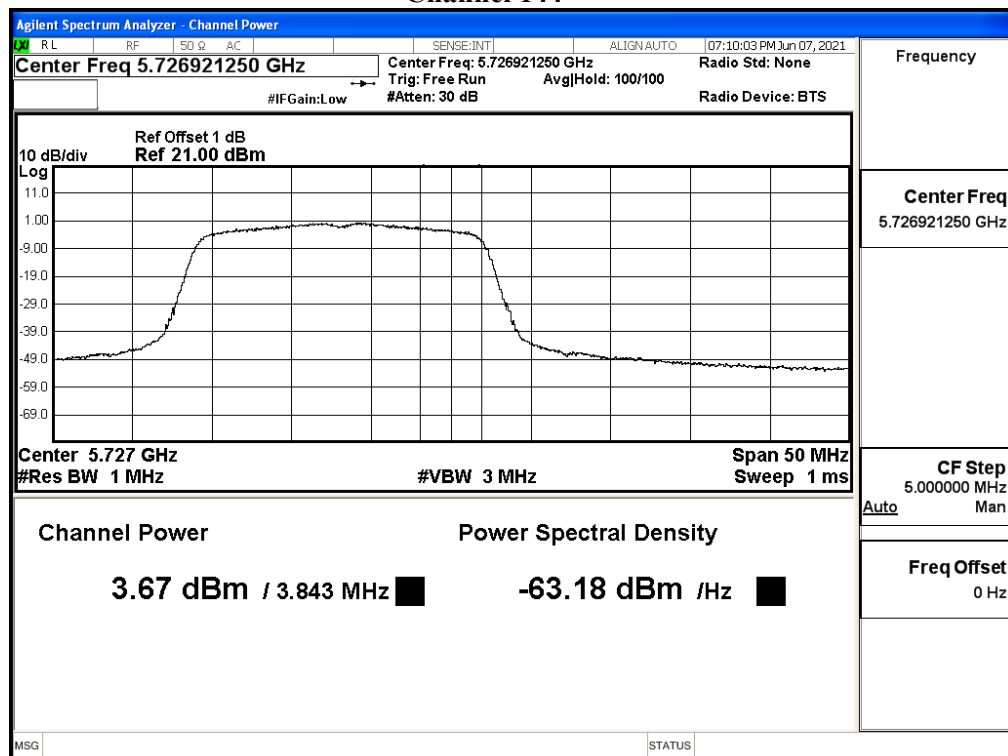

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Maximum conducted output power
 Test Mode : Mode 3: Transmit (802.11ac-40BW 15Mbps)
 Test Date : 2021/06/07

Cable loss=1dB		Maximum conducted output power							
Channel No.	Frequency (MHz)	Data Rate (Mbps)							
		15	30	45	60	90	120	135	200
		Measurement Level (dBm)							
38	5190	11.93	--	--	--	--	--	--	--
46	5230	11.92	11.85	11.79	11.73	11.69	11.64	11.6	11.57
54	5270	11.94	--	--	--	--	--	--	--
62	5310	11.97	11.92	11.86	11.8	11.74	11.71	11.64	11.6
102	5510	12.02	--	--	--	--	--	--	--
110	5550	12.03	11.97	11.9	11.87	11.84	11.78	11.73	11.69
134	5670	12.02	--	--	--	--	--	--	--
142F(Band3)	5710	11.95	11.9	11.87	11.81	11.78	11.72	11.66	11.63
142F(Band4)	5710	-2.24	-2.3	-2.35	-2.42	-2.48	-2.52	-2.58	-2.65
151	5755	12.13	--	--	--	--	--	--	--
159	5795	12.17	12.12	12.05	12.02	11.97	11.91	11.85	11.8


Note: Maximum conducted output power Value = Reading value on average power meter + cable loss

Maximum conducted output power Measurement:


Channel No	Frequency Range (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	Duty factor (dB)	Total Output Power (dBm)	Output Power Limit	
						(dBm)	dBm+10log(BW)
38	5190	--	11.93	--	11.93	24	--
46	5230	--	11.92	--	11.92	24	--
54	5270	40.80	11.94	--	11.94	24	27.11
62	5310	40.40	11.97	--	11.97	24	27.06
102	5510	40.40	12.02	--	12.02	24	27.06
110	5550	40.60	12.03	--	12.03	24	27.09
134	5670	40.20	12.02	--	12.02	24	27.04
142F(Band3)	5710	35.20	11.95	0.23	12.18	24	26.47
142F(Band4)	5710	--	-2.24	0.23	-2.01	30	--
151	5755	--	12.13	--	12.13	30	--
159	5795	--	12.17	--	12.17	30	--

Note: Power Output Value = Reading value on average power meter + cable loss


26dB Occupied Bandwidth: Channel 54

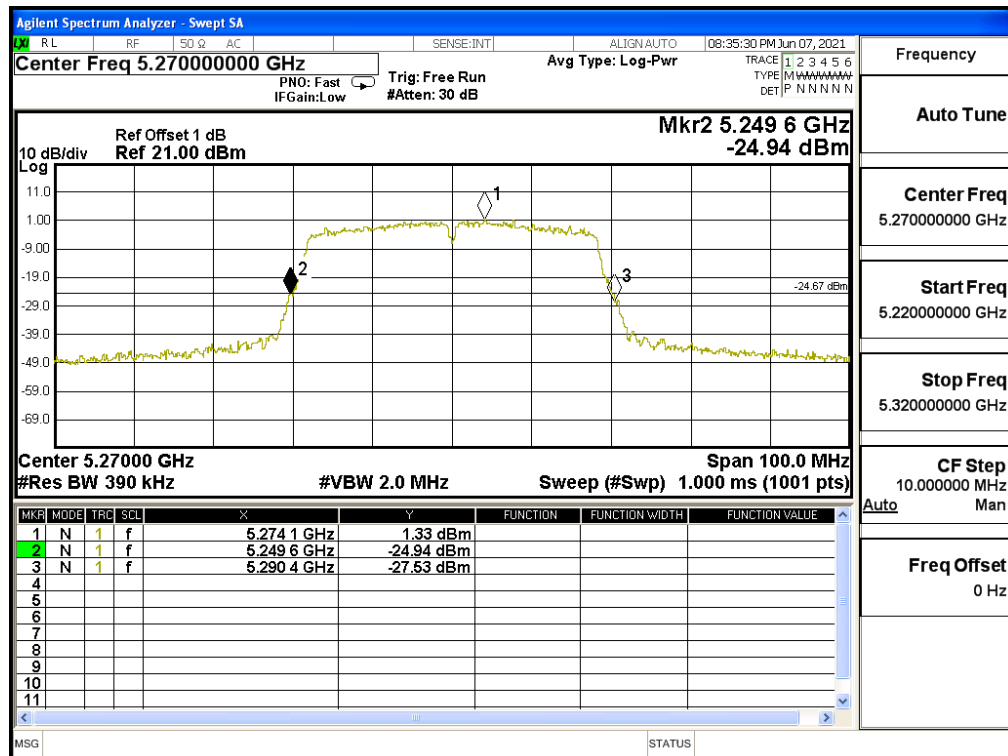


Channel 62

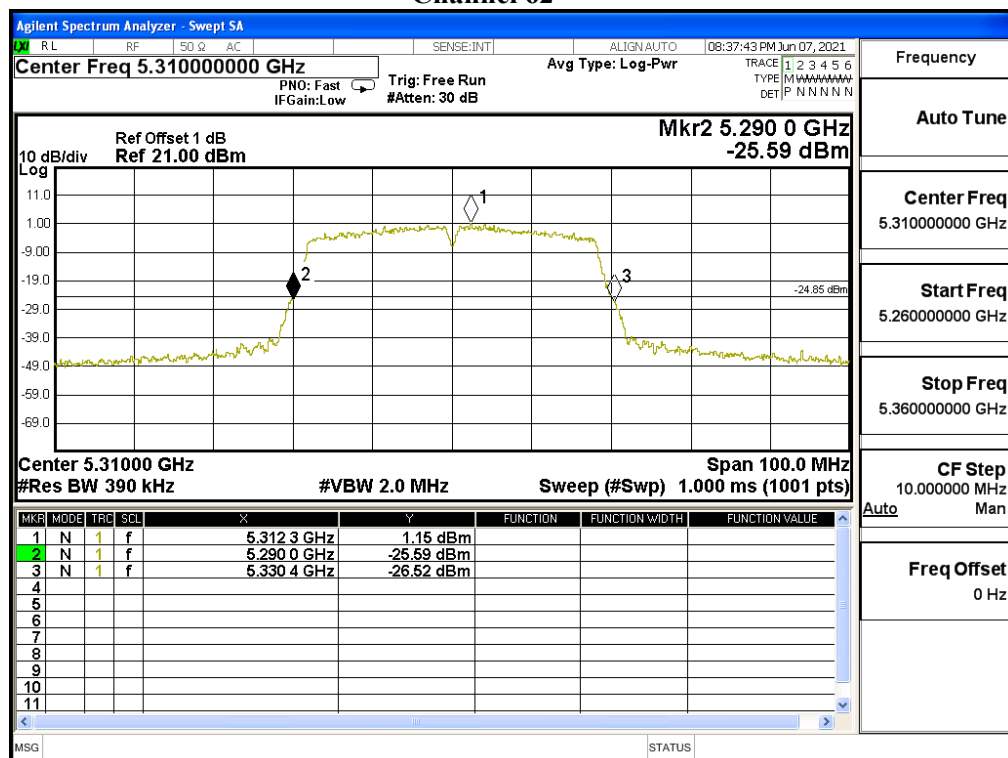


Channel 102

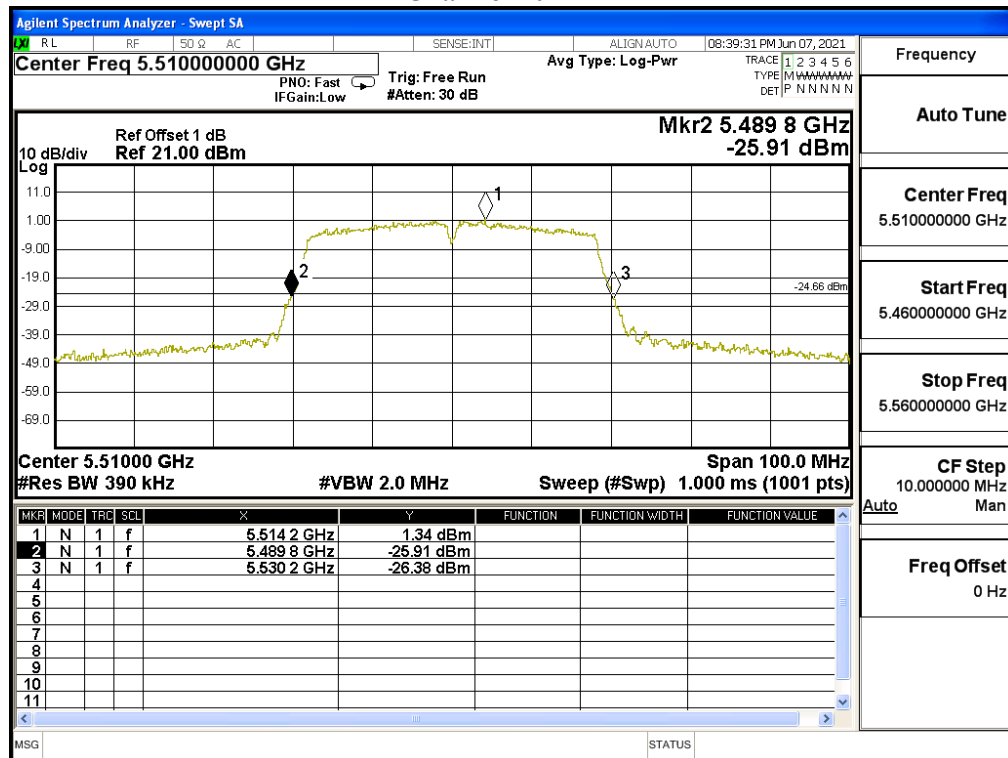


Channel 110

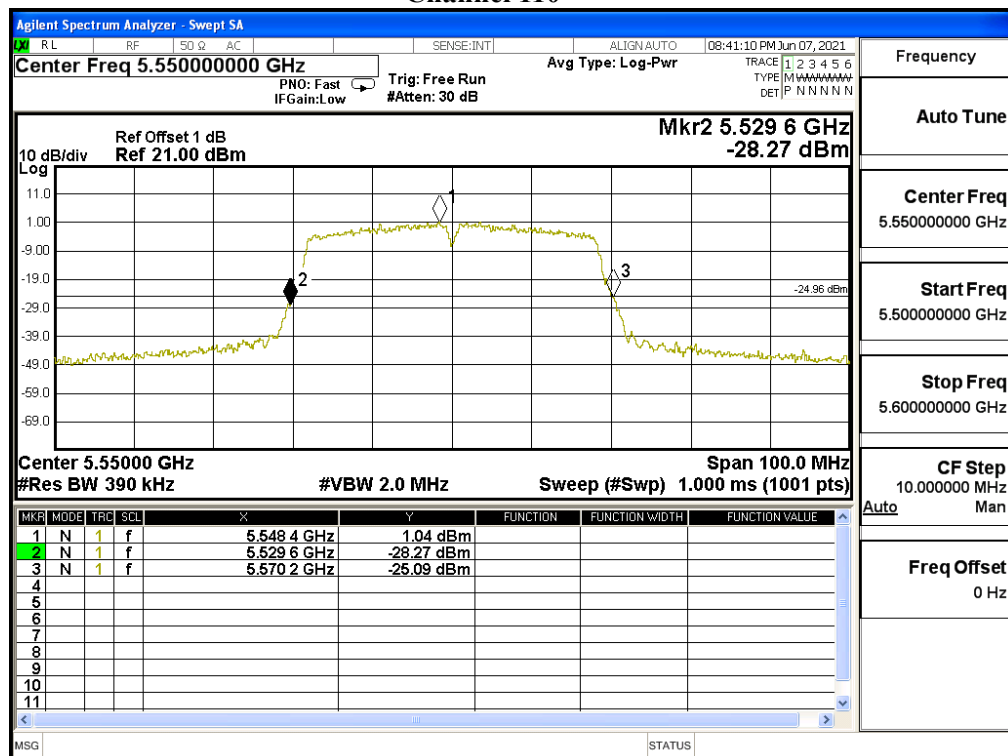

Channel 134

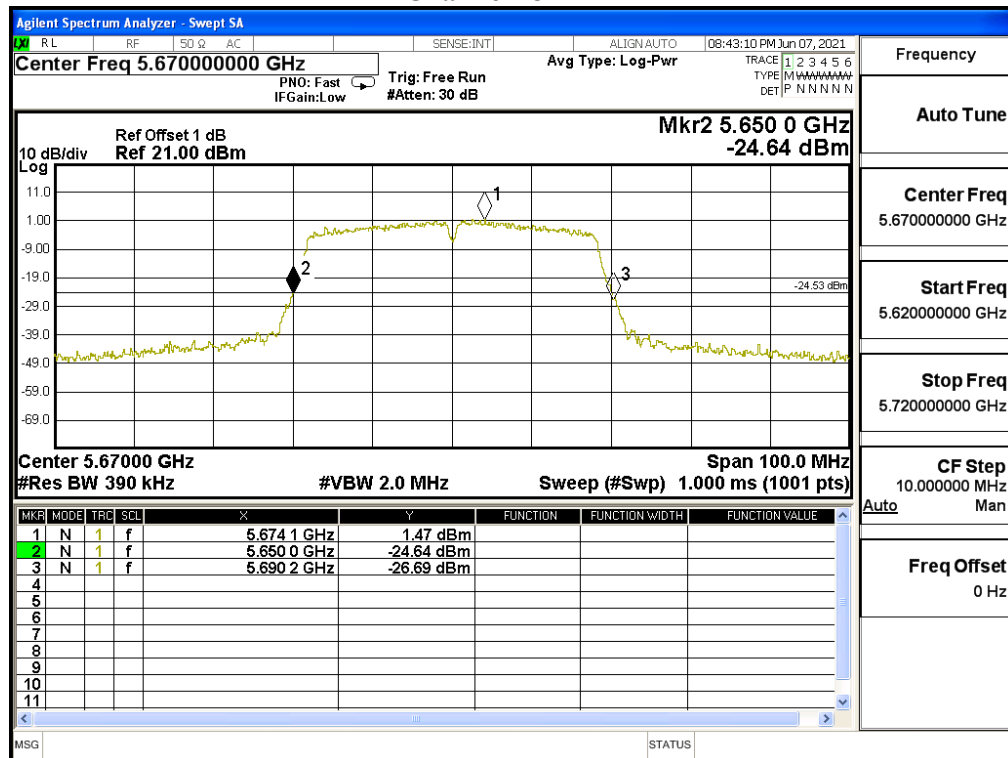


Channel 142

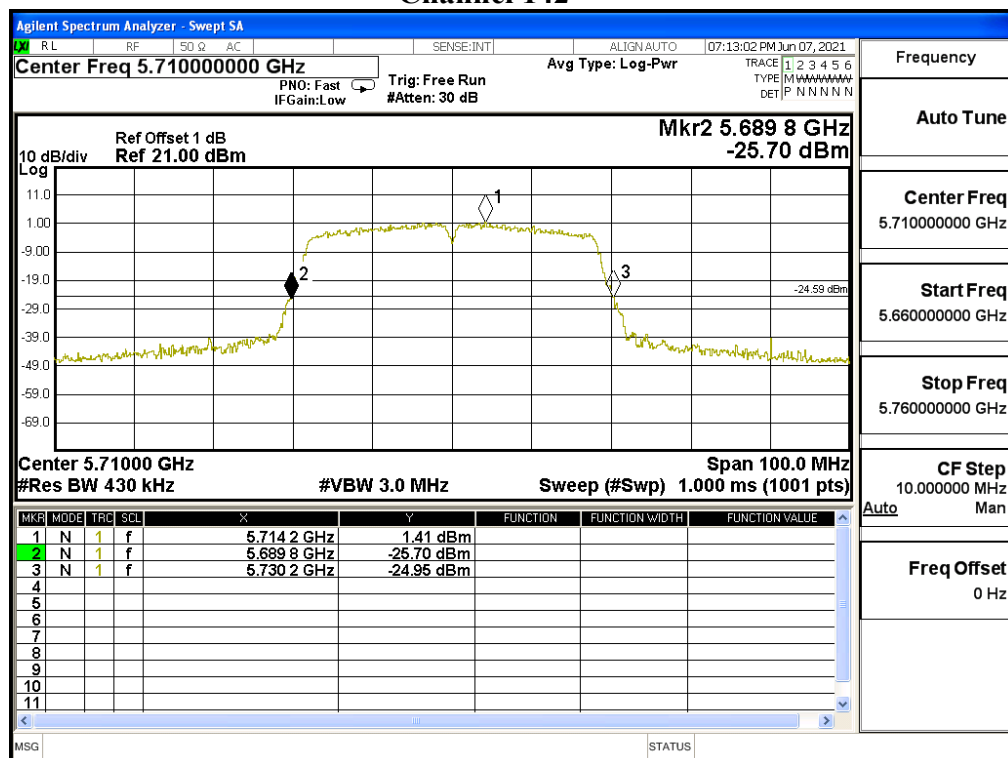


Maximum conducted output power:

Channel 142

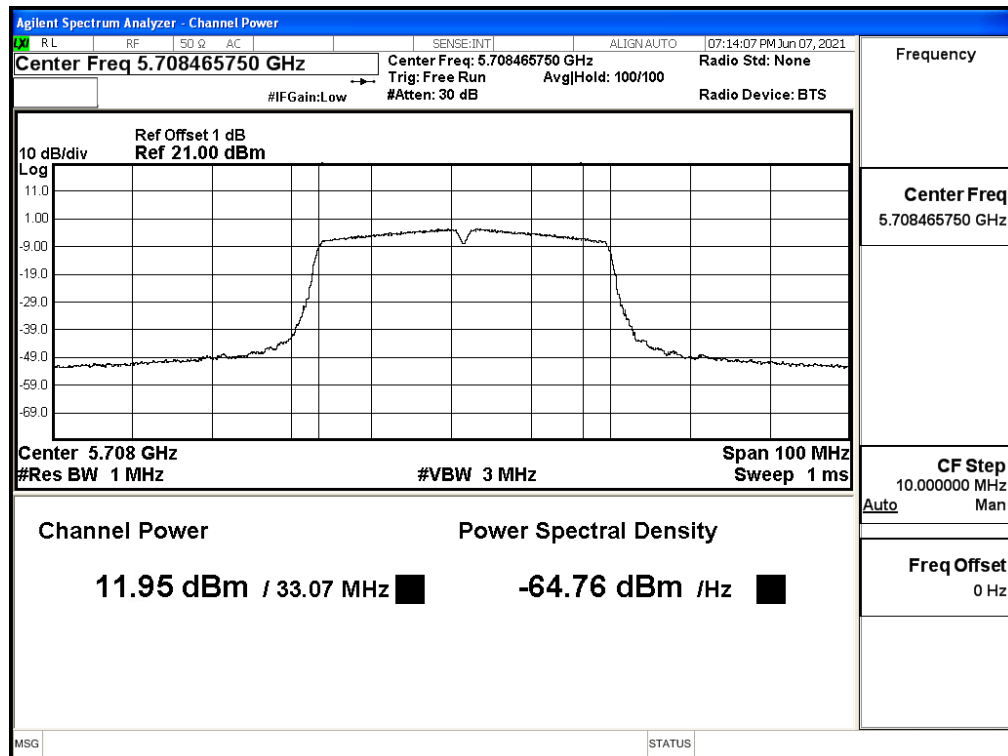

Channel 142

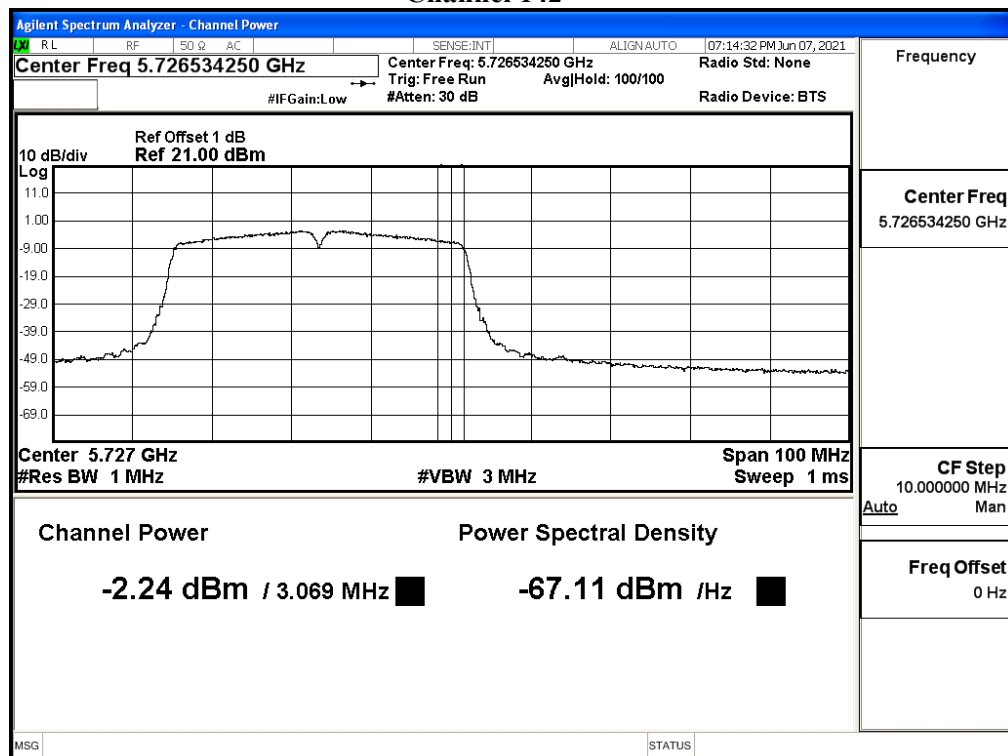

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Maximum conducted output power
 Test Mode : Mode 4: Transmit (802.11ac-80BW 32.5Mbps)
 Test Date : 2021/06/07

Cable loss=1dB		Maximum conducted output power									
Channel No	Frequency (MHz)	Data Rate (Mbps)									
		VTH0	VTH1	VTH2	VTH3	VTH4	VTH5	VTH6	VTH7	VTH8	VTH9
42	5210	11.85	11.81	11.74	11.71	11.66	11.59	11.54	11.5	11.44	11.38
58	5290	11.87	11.8	11.74	11.68	11.64	11.61	11.57	11.51	11.47	11.43
106	5530	11.92	--	--	--	--	--	--	--	--	--
122	5610	11.95	11.89	11.85	11.79	11.73	11.68	11.61	11.56	11.51	11.47
138(Band3)	5690	11.91	--	--	--	--	--	--	--	--	--
138(Band4)	5690	-5.38	--	--	--	--	--	--	--	--	--
155	5775	12.02	11.99	11.94	11.88	11.82	11.75	11.7	11.63	11.57	11.5


Note: Maximum conducted output power Value =Reading value on Spectrum Analyzer + cable loss

Maximum conducted output power Measurement


Channel No	Frequency Range (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	Duty factor (dB)	Total Output Power (dBm)	Output Power Limit	
						(dBm)	dBm+10log(BW)
42	5210	--	11.85	--	11.85	24	--
58	5290	81.20	11.87	--	11.87	24	--
106	5530	80.60	11.92	--	11.92	24	30.06
122	5610	80.80	11.95	--	11.95	24	30.07
138(Band3)	5690	75.40	11.91	0.43	12.34	24	29.77
138(Band4)	5690	--	-5.38	0.43	-4.95	30	--
155	5775	--	12.02	--	12.02	30	--

Note: Power Output Value = Reading value on Spectrum Analyzer + cable loss


26dB Occupied Bandwidth: Channel 58

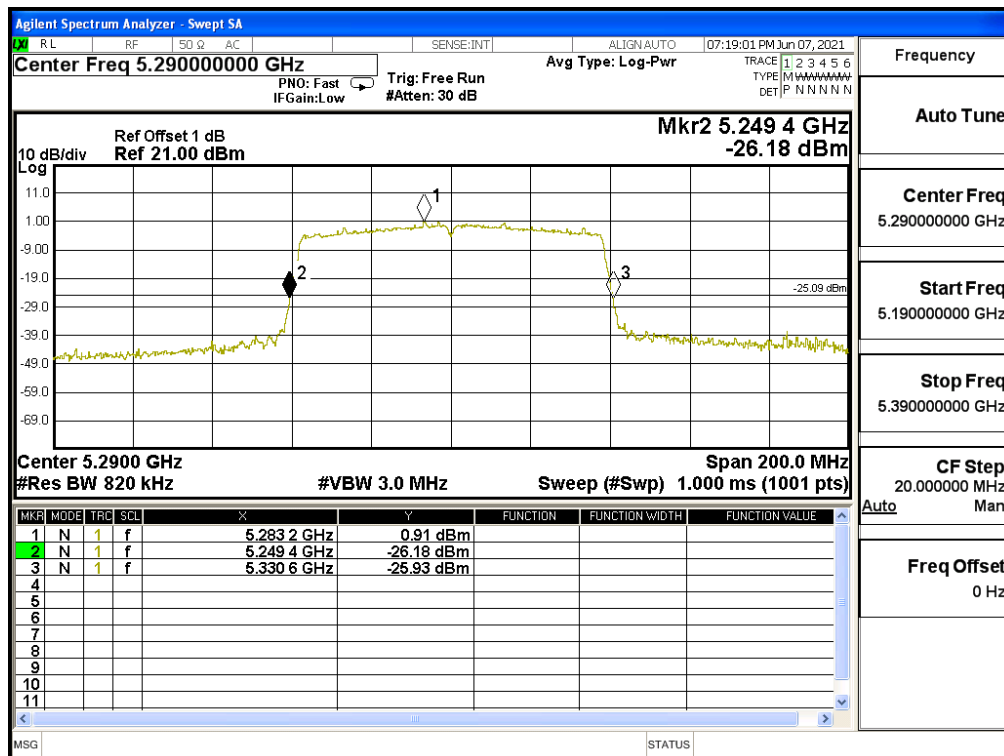


Channel 106

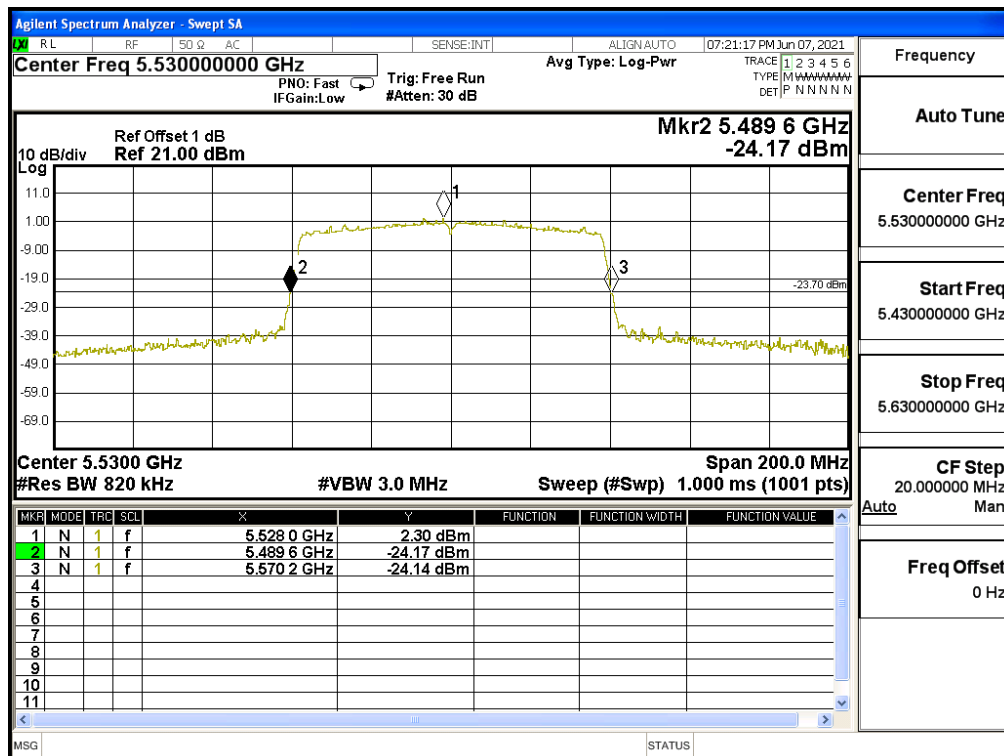


Channel 122

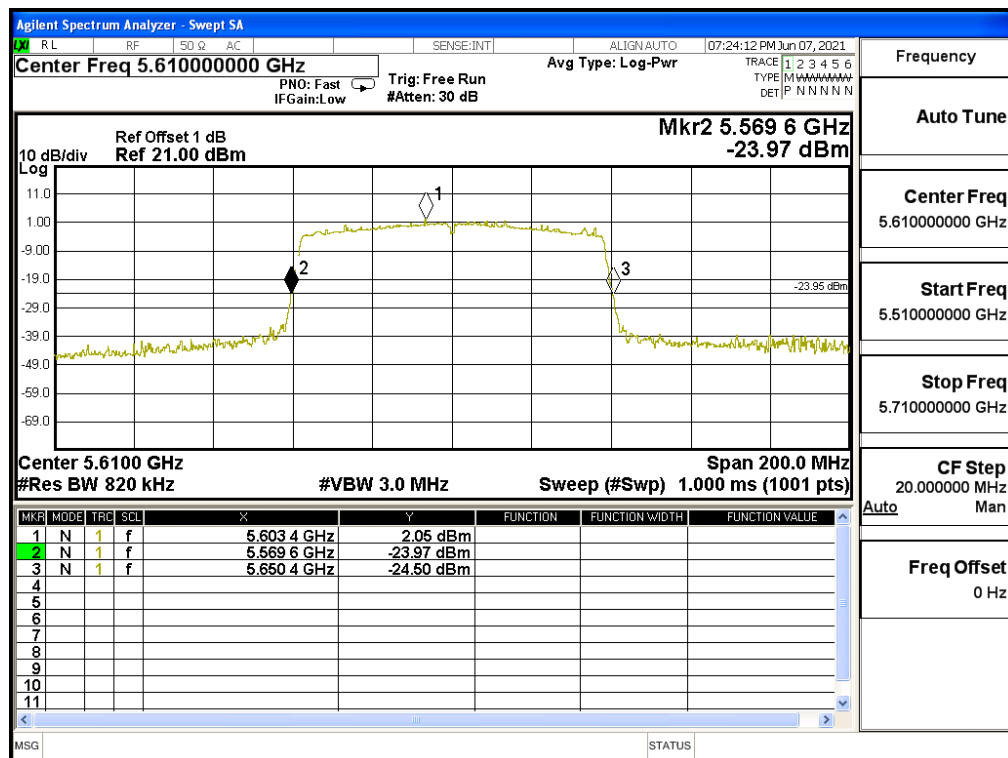


Channel 138

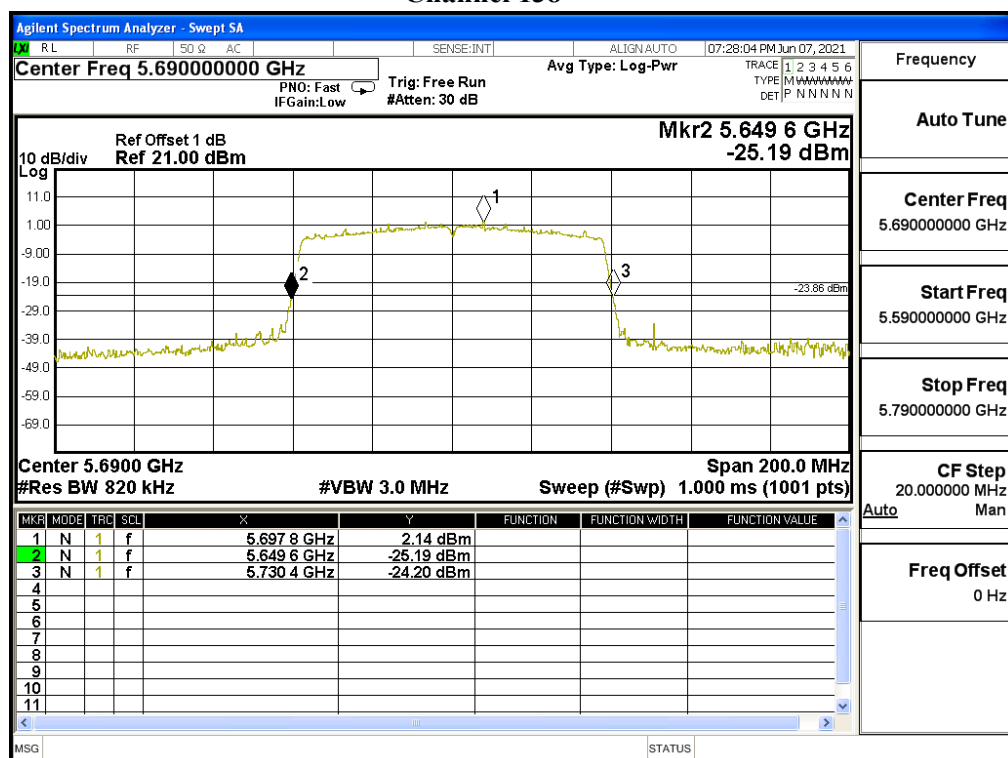

Maximum conducted output power:
Channel 138

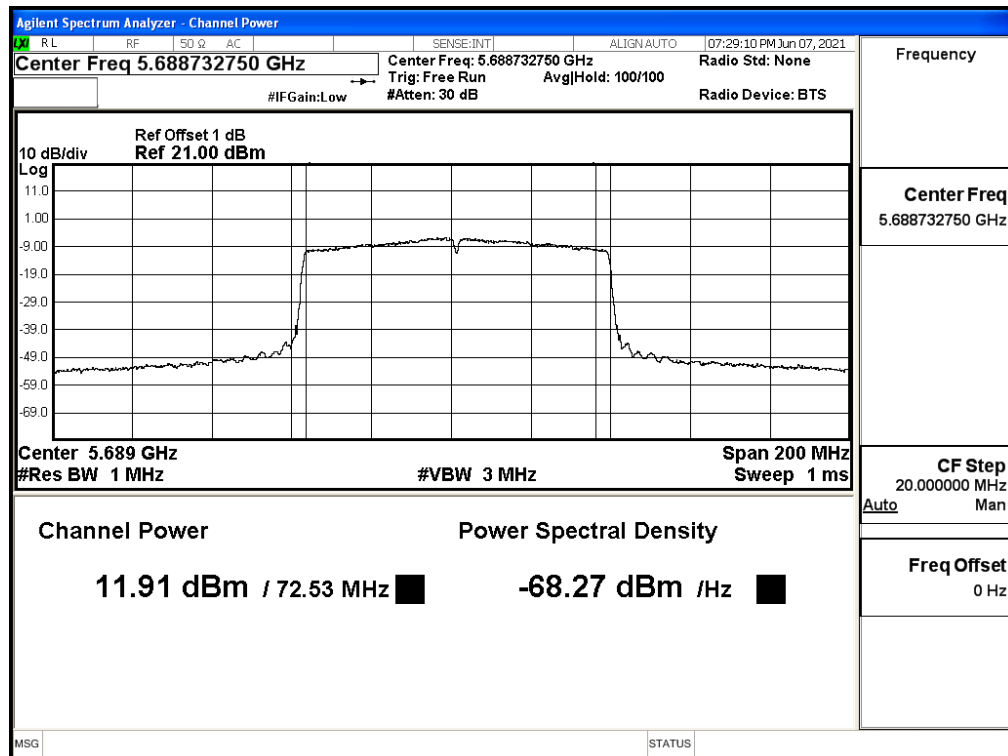


Channel 138

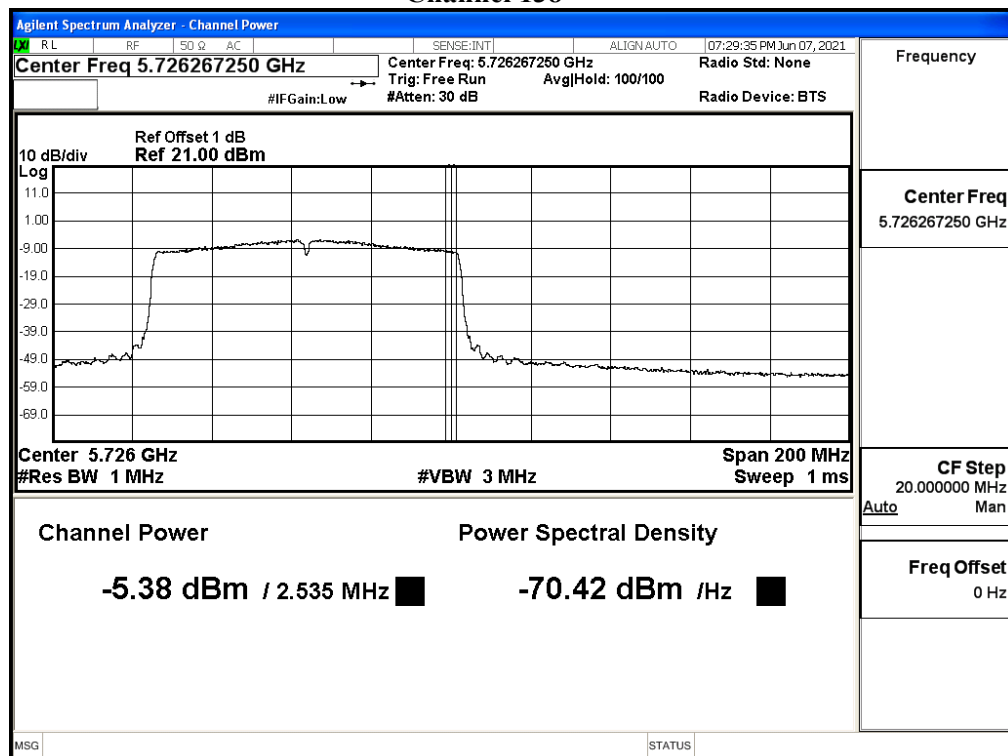

4. Peak Power Spectral Density

4.1. Test Setup

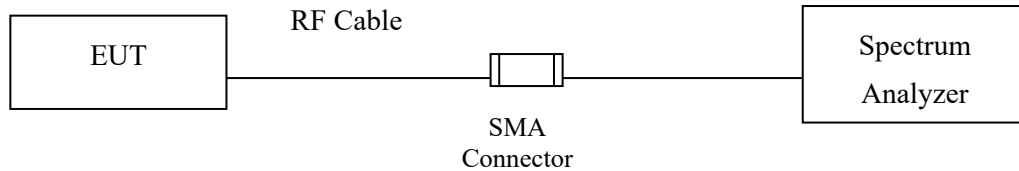

4.2. Limits

For the band 5.15-5.25 GHz,

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.+

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point UNII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

4.3. Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

The Peak Power Spectral Density using KDB 789033 section F) procedure, Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E)2) for measuring maximum conducted output power using a spectrum analyzer.

SA-1 method is selected to run the test.

For the band 5.725-5.85 GHz, Scale the observed power level to an equivalent value in 500 kHz by adjusting (increase) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500\text{ kHz}/100\text{ kHz}) = 6.98\text{ dB}$.


4.4. Test Result of Peak Power Spectral Density

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Peak Power Spectral Density
 Test Mode : Mode 1: Transmit (802.11a-6Mbps)
 Test Date : 2021/06/07


Channel Number	Frequency (MHz)	Data Rate (Mbps)	Measurement Level (dBm)	Duty factor (dB)	Total PPSD (dBm)	Required Limit (dBm)	Result
36	5180	6	0.45	0.12	0.57	<11	Pass
44	5220	6	0.44	0.12	0.56	<11	Pass
48	5240	6	0.47	0.12	0.59	<11	Pass
52	5260	6	0.66	0.12	0.78	<11	Pass
60	5300	6	0.54	0.12	0.66	<11	Pass
64	5320	6	0.54	0.12	0.66	<11	Pass
100	5500	6	0.93	0.12	1.05	<11	Pass
116	5580	6	0.89	0.12	1.01	<11	Pass
140	5700	6	0.50	0.12	0.62	<11	Pass

Channel Number	Frequency (MHz)	Data Rate (Mbps)	PPSD (dBm)	BWCF (dB)	Duty factor (dB)	Total PPSD (dBm)	Required Limit (dBm)	Result
149	5745	6	-9.14	6.98	0.12	-2.04	<30	Pass
157	5785	6	-8.49	6.98	0.12	-1.39	<30	Pass
165	5825	6	-8.23	6.98	0.12	-1.13	<30	Pass


Channel 36:

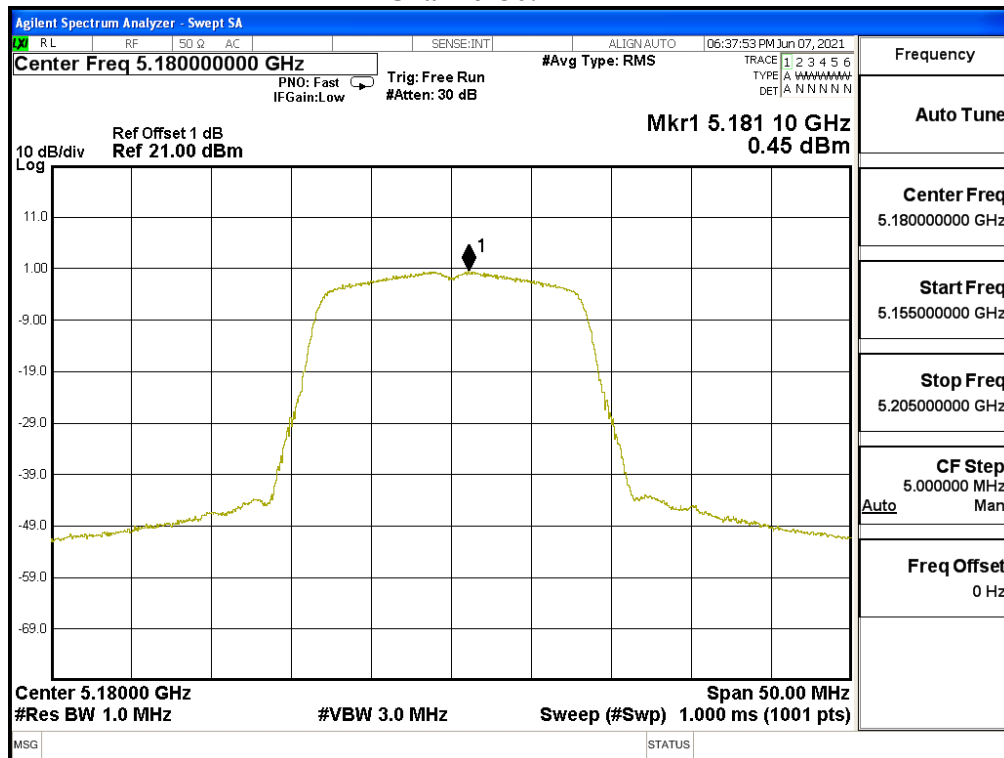


Channel 44:

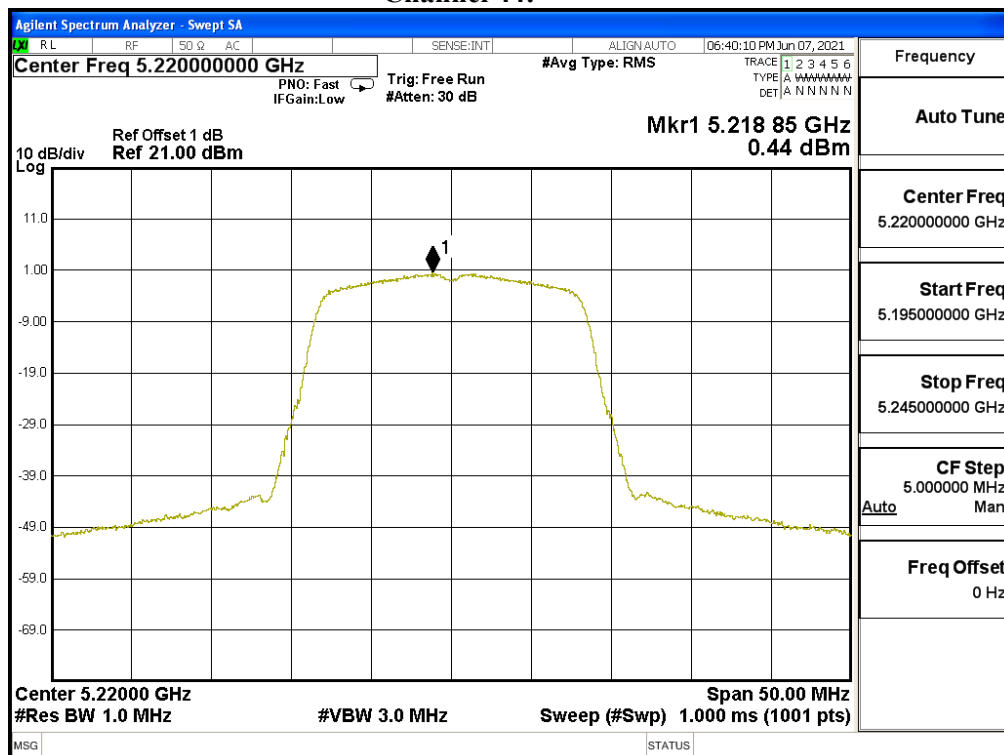


Channel 48:

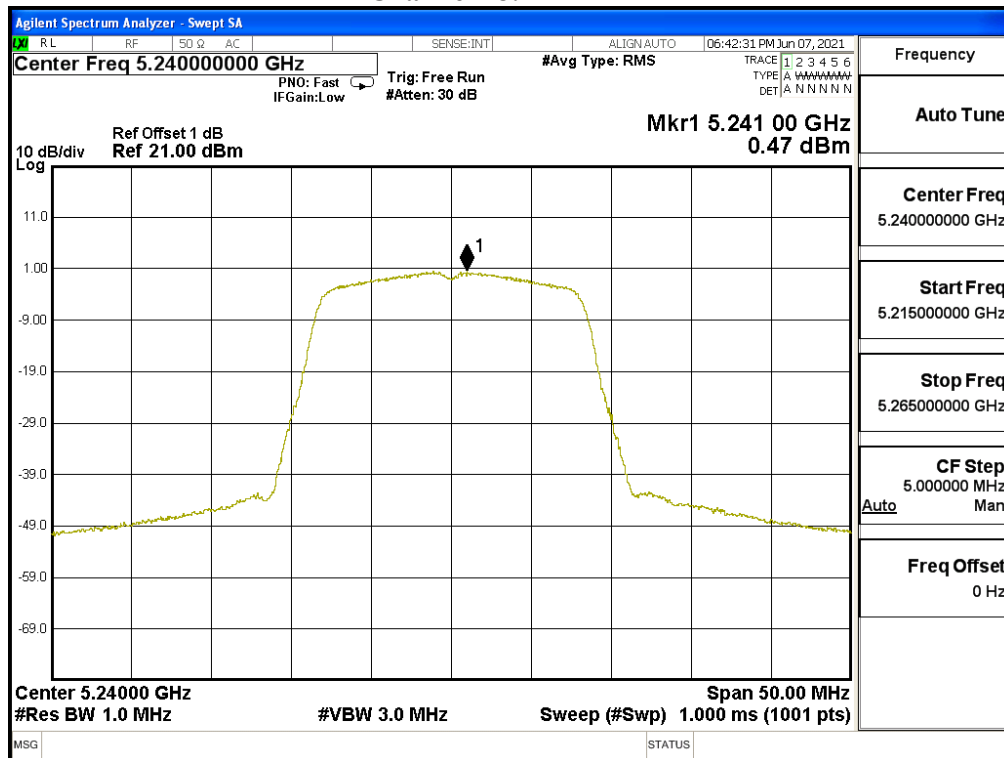


Channel 52:

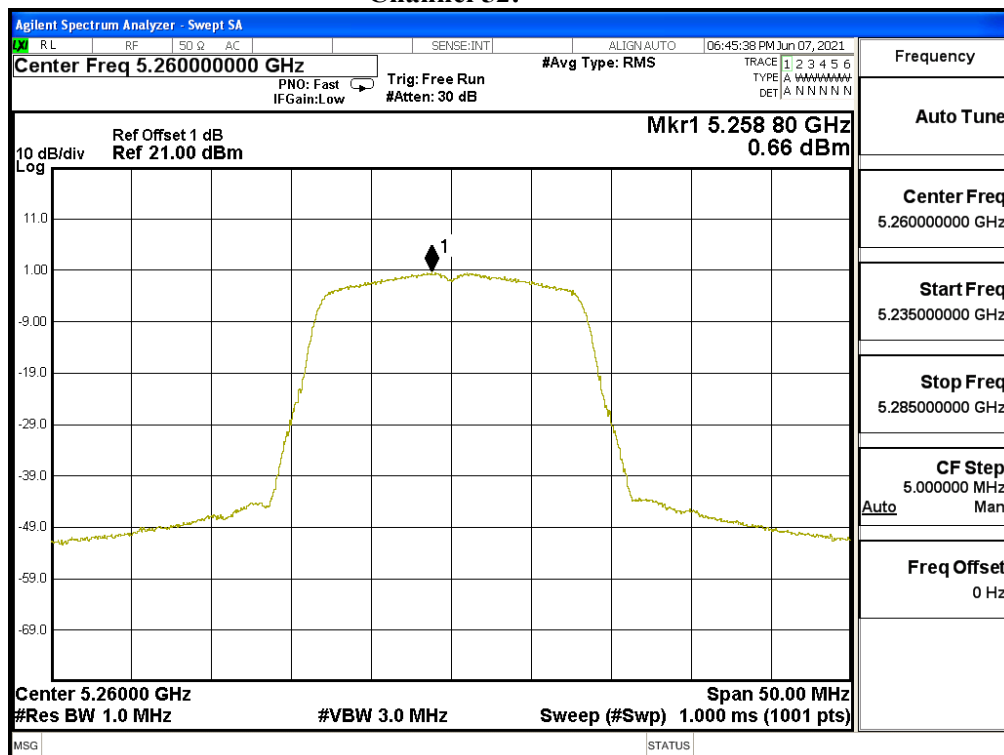


Channel 60:

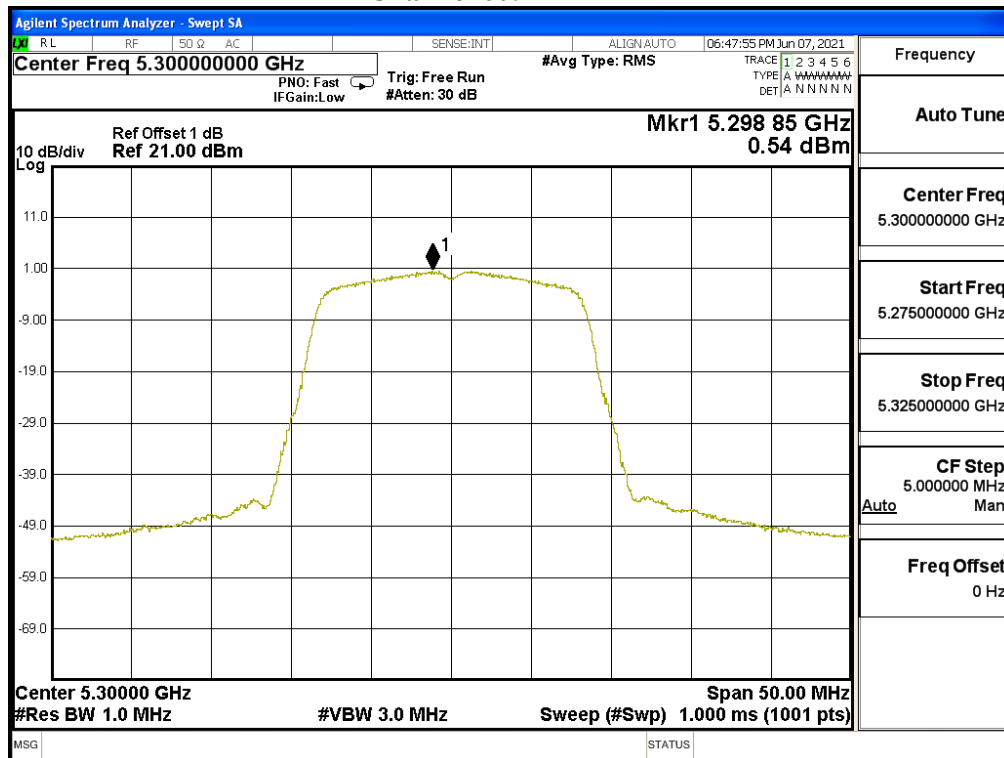


Channel 64:

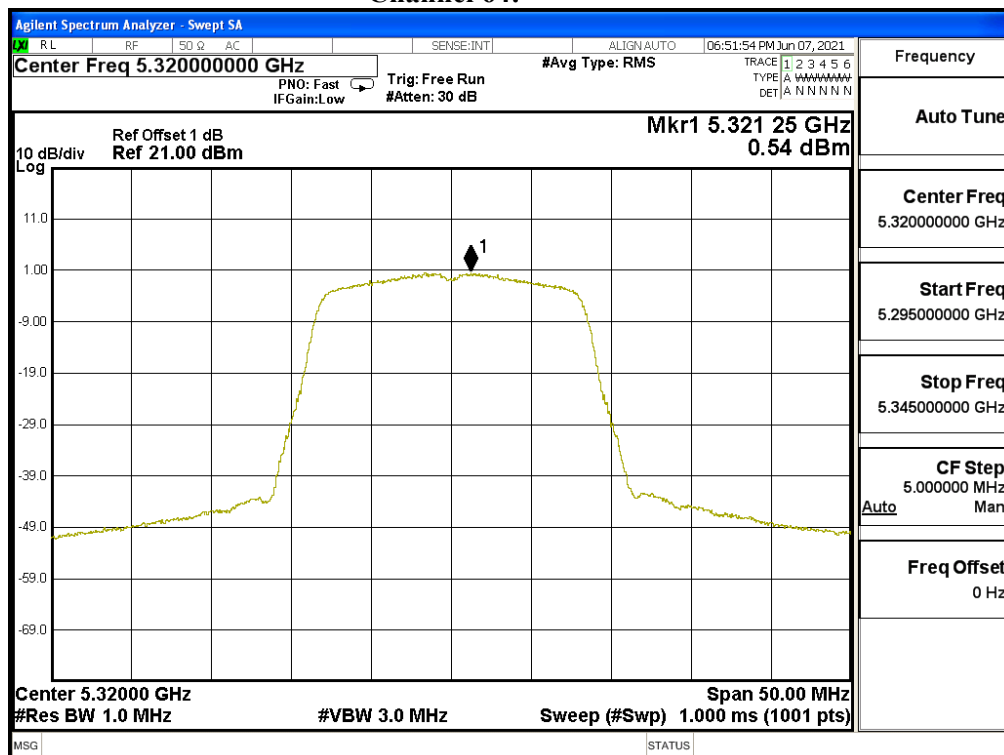


Channel 100:

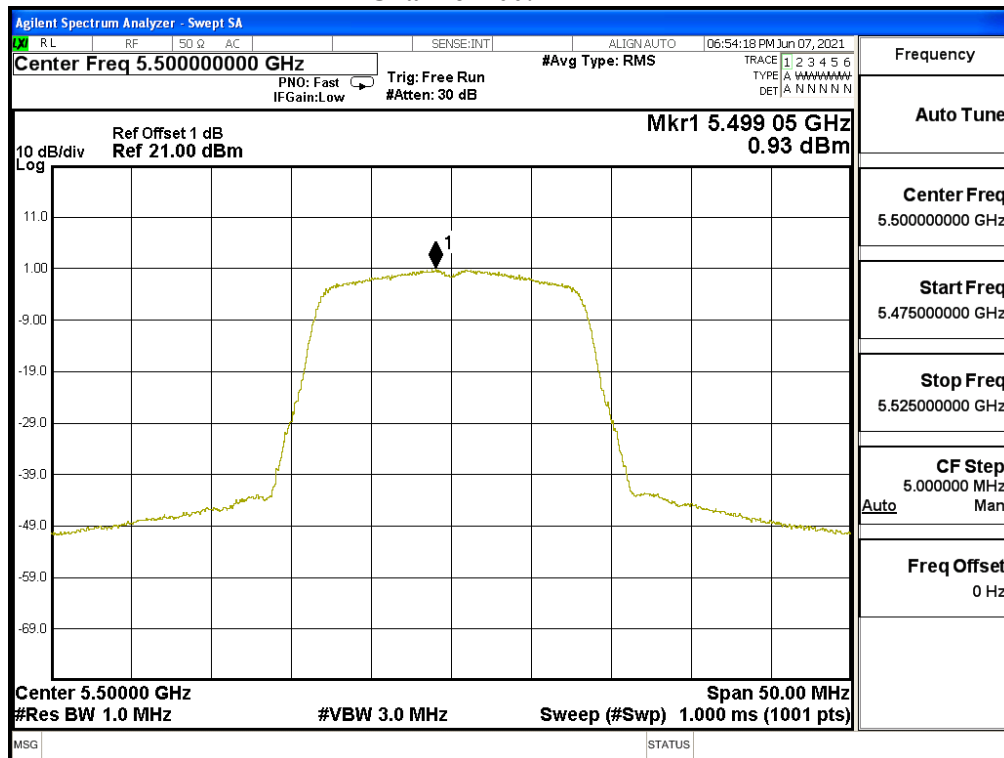


Channel 116:

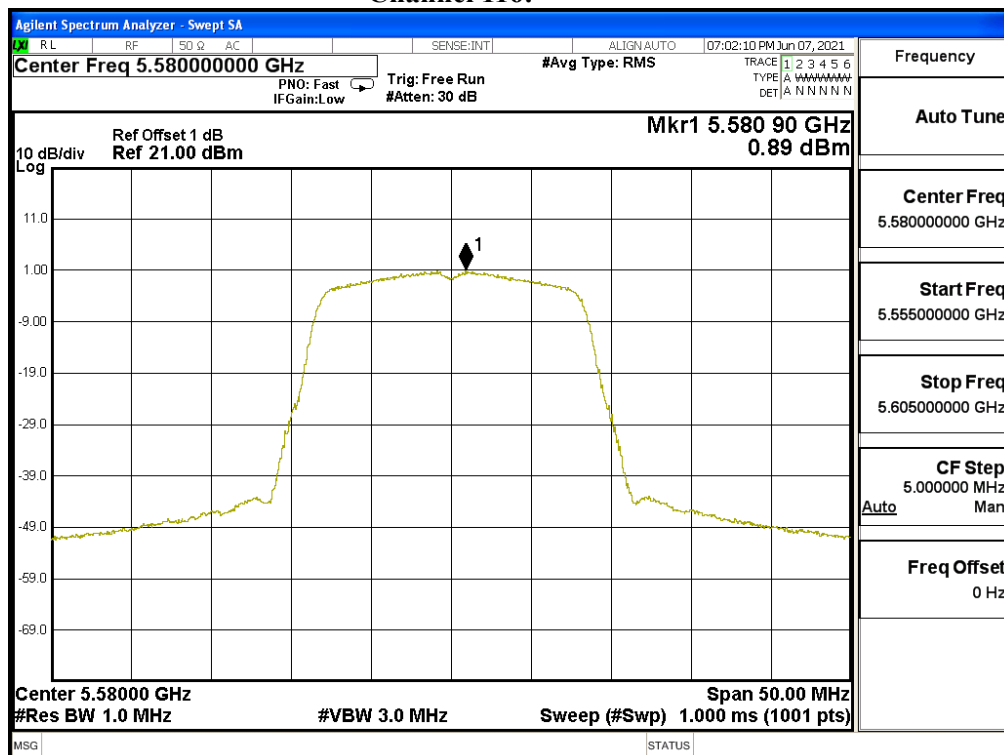


Channel 140:

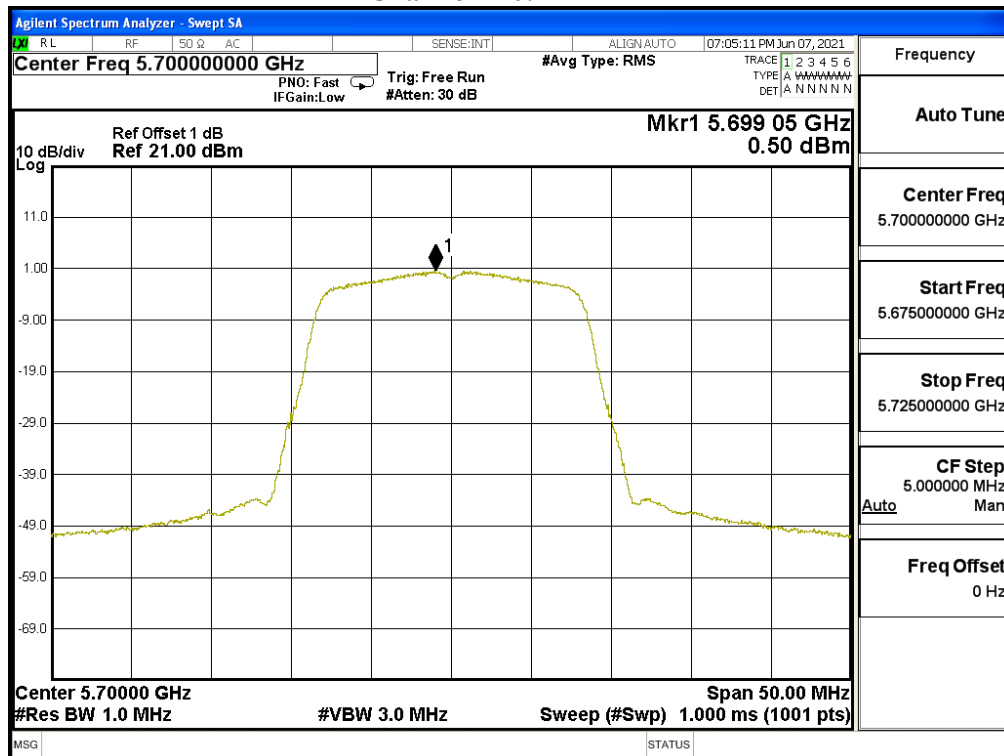


Channel 149

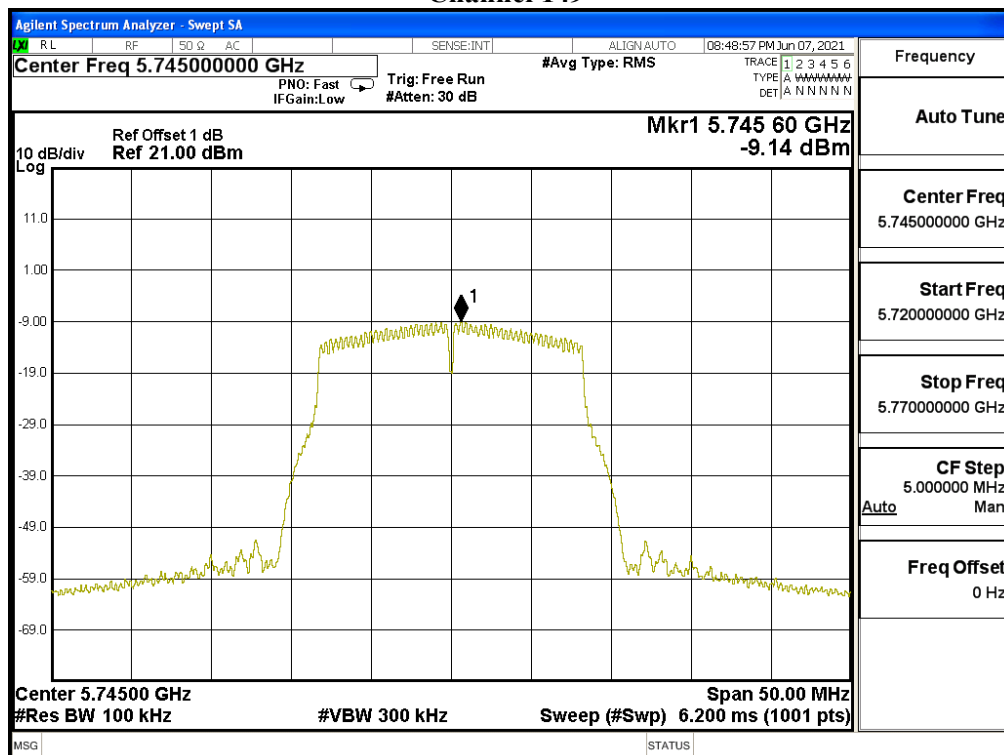

Channel 157

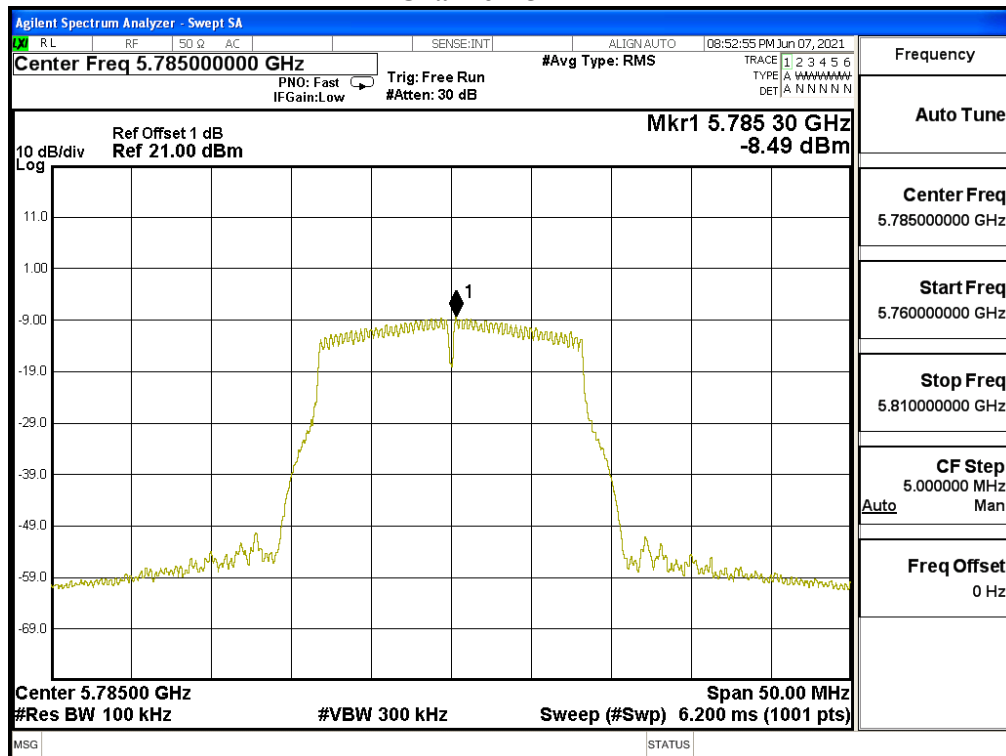

Channel 165

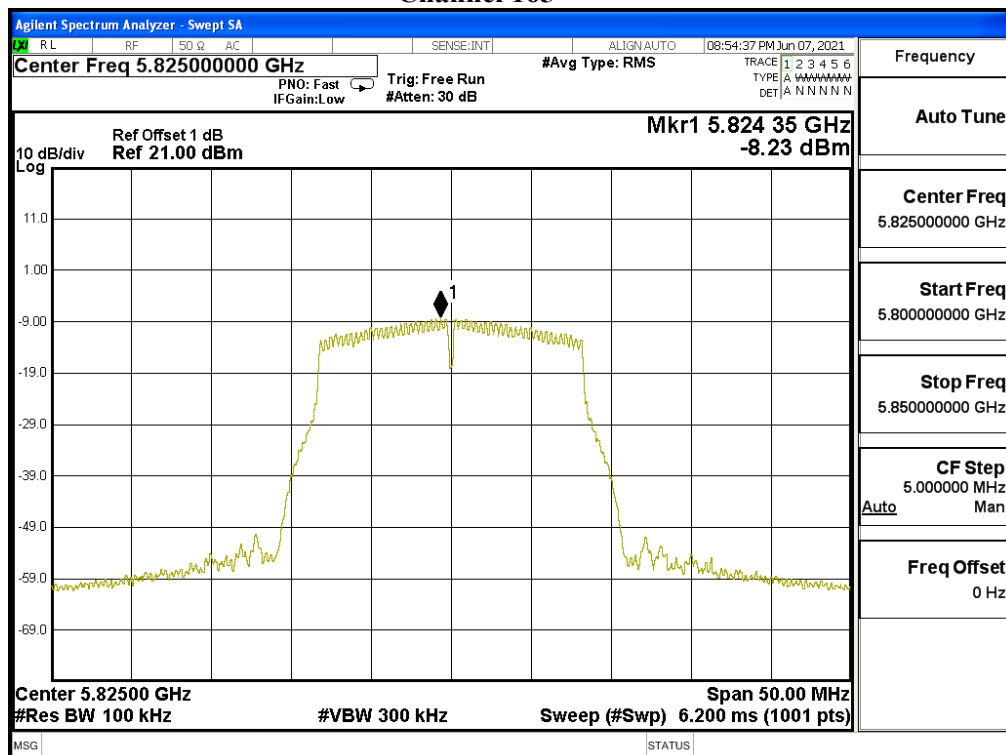


Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Peak Power Spectral Density
 Test Mode : Mode 2: Transmit (802.11ac-20BW 7.2Mbps)
 Test Date : 2021/06/07


Channel Number	Frequency (MHz)	Data Rate (Mbps)	Measurement Level (dBm)	Duty factor (dB)	Total PPSP (dBm)	Required Limit (dBm)	Result
36	5180	7.2	0.17	0.11	0.28	<11	Pass
44	5220	7.2	0.26	0.11	0.37	<11	Pass
48	5240	7.2	0.03	0.11	0.14	<11	Pass
52	5260	7.2	-0.26	0.11	-0.15	<11	Pass
60	5300	7.2	-0.18	0.11	-0.07	<11	Pass
64	5320	7.2	0.23	0.11	0.34	<11	Pass
100	5500	7.2	0.60	0.11	0.71	<11	Pass
116	5580	7.2	0.51	0.11	0.62	<11	Pass
140	5700	7.2	0.39	0.11	0.50	<11	Pass
144(Band3)	5720	7.2	0.25	0.11	0.36	<11	Pass

Channel Number	Frequency (MHz)	Data Rate (Mbps)	PPSP (dBm)	BWCF (dB)	Duty factor (dB)	Total PPSP (dBm)	Required Limit (dBm)	Result
144(Band4)	5720	7.2	-10.37	6.98	0.11	-3.28	<30	Pass
149	5745	7.2	-8.79	6.98	0.11	-1.70	<30	Pass
157	5785	7.2	-8.82	6.98	0.11	-1.73	<30	Pass
165	5825	7.2	-8.65	6.98	0.11	-1.56	<30	Pass


Channel 36:

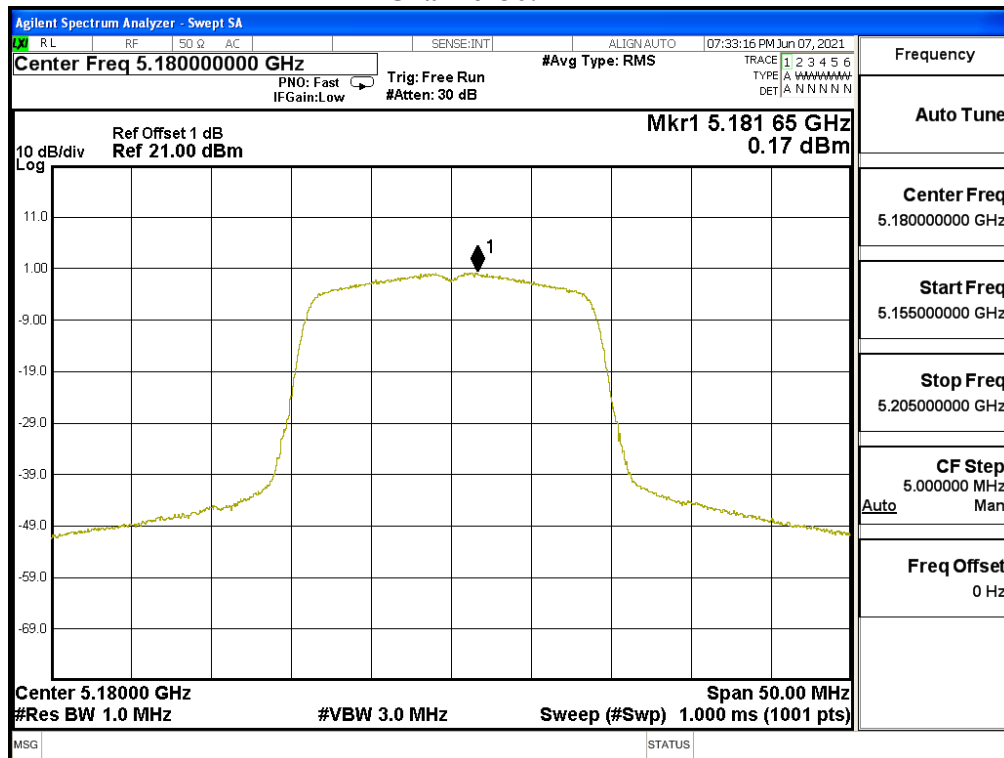


Channel 44:

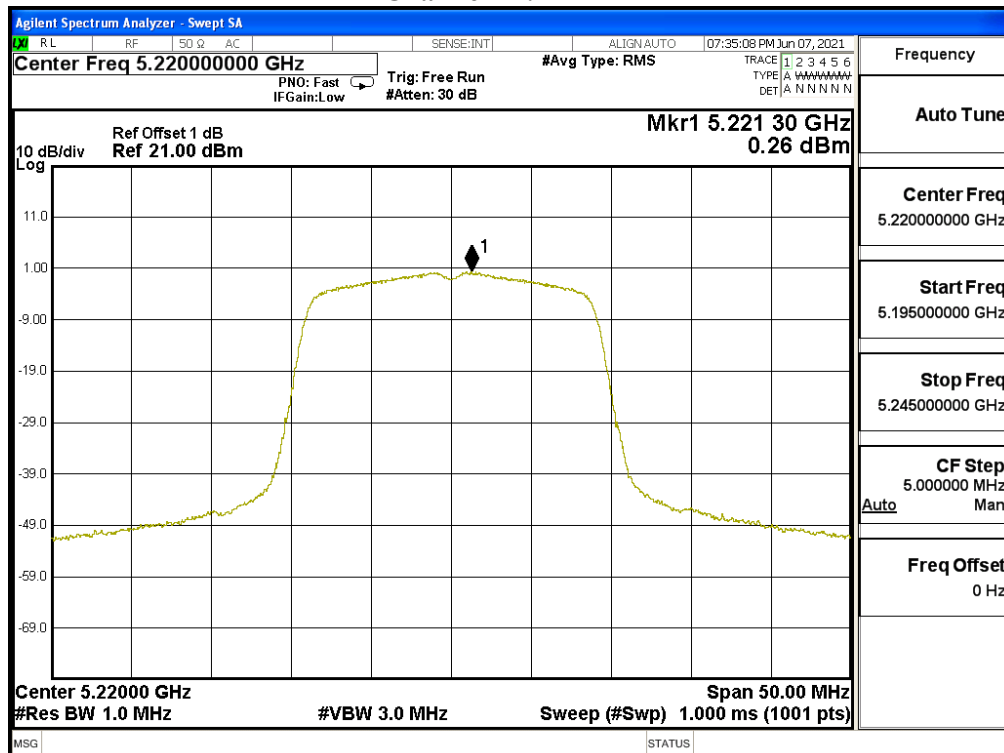


Channel 48:

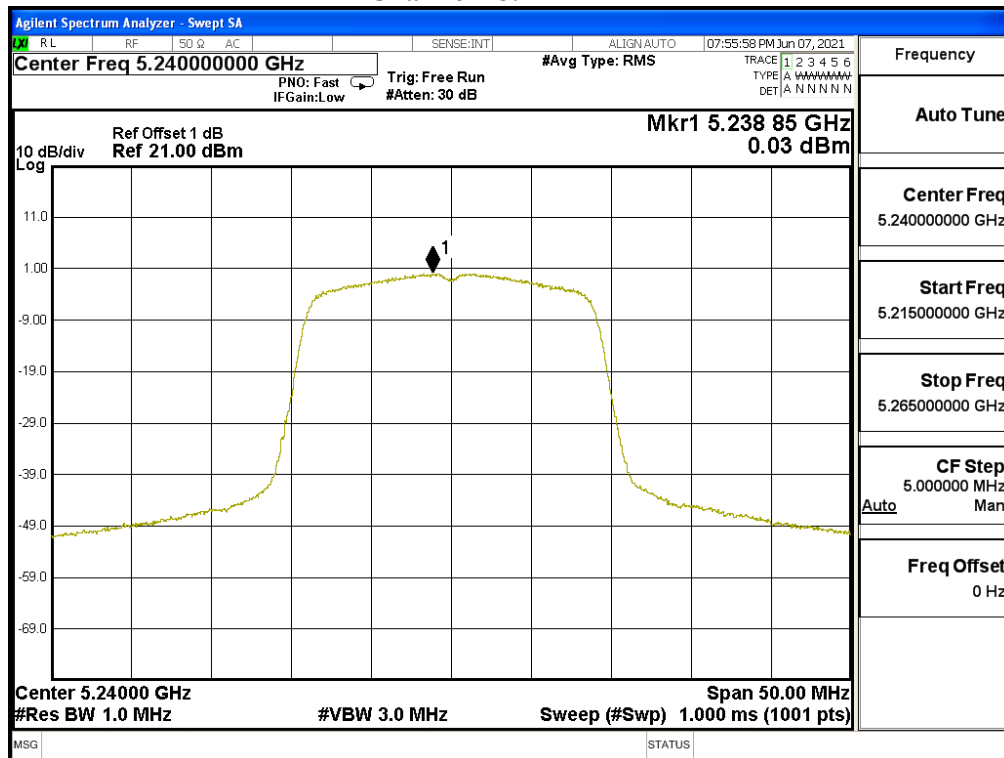


Channel 52:

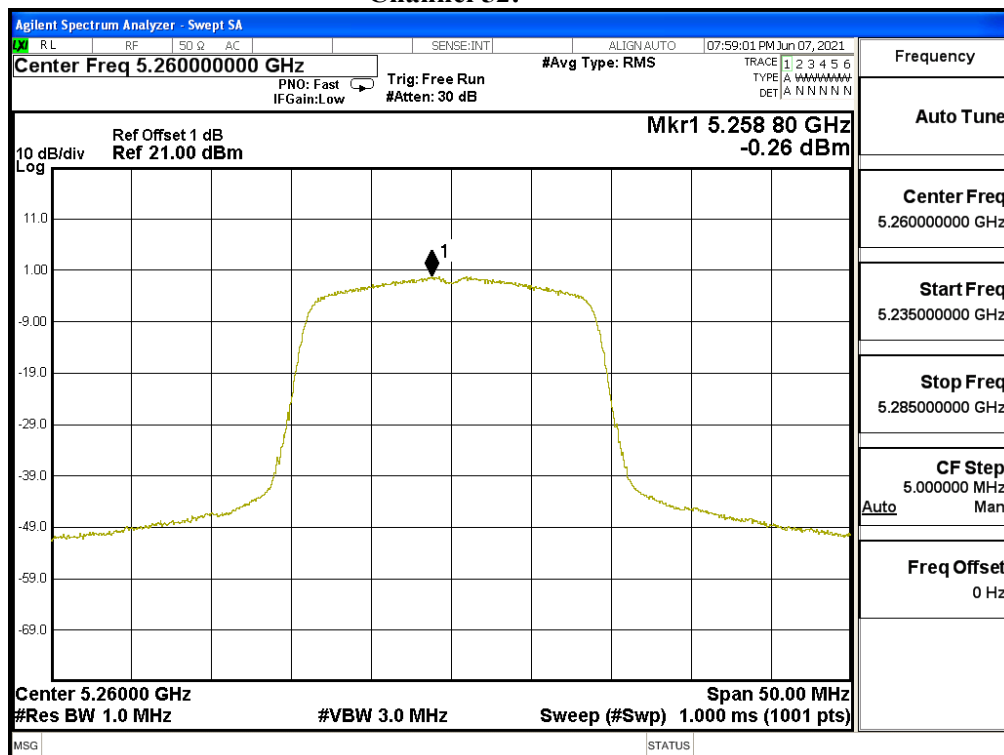


Channel 60:

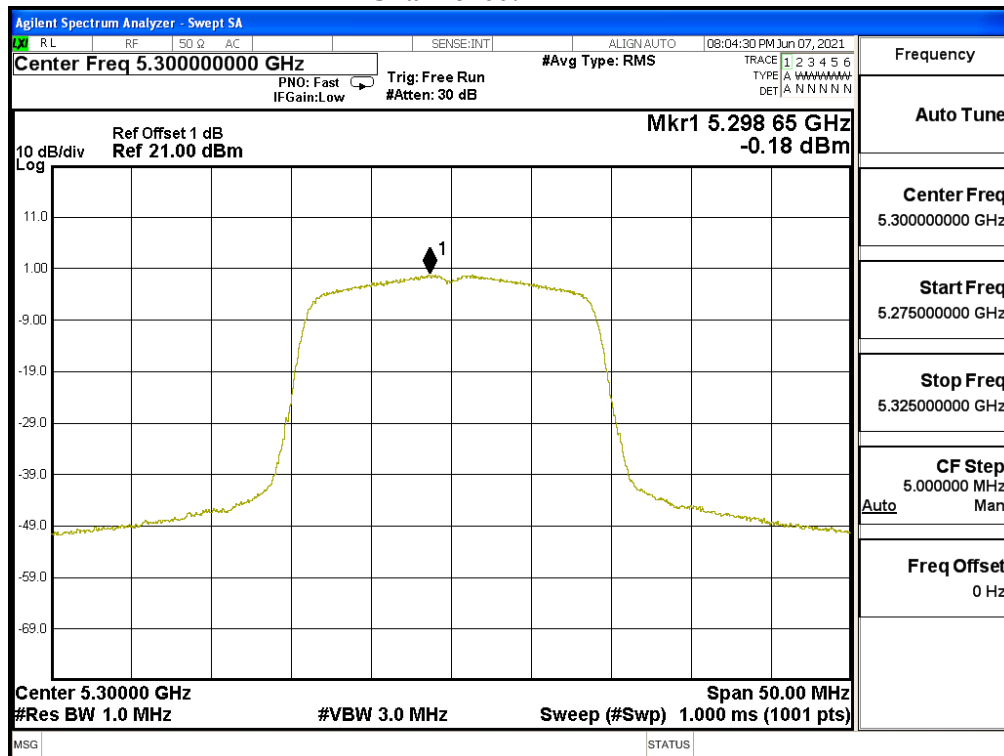


Channel 64:

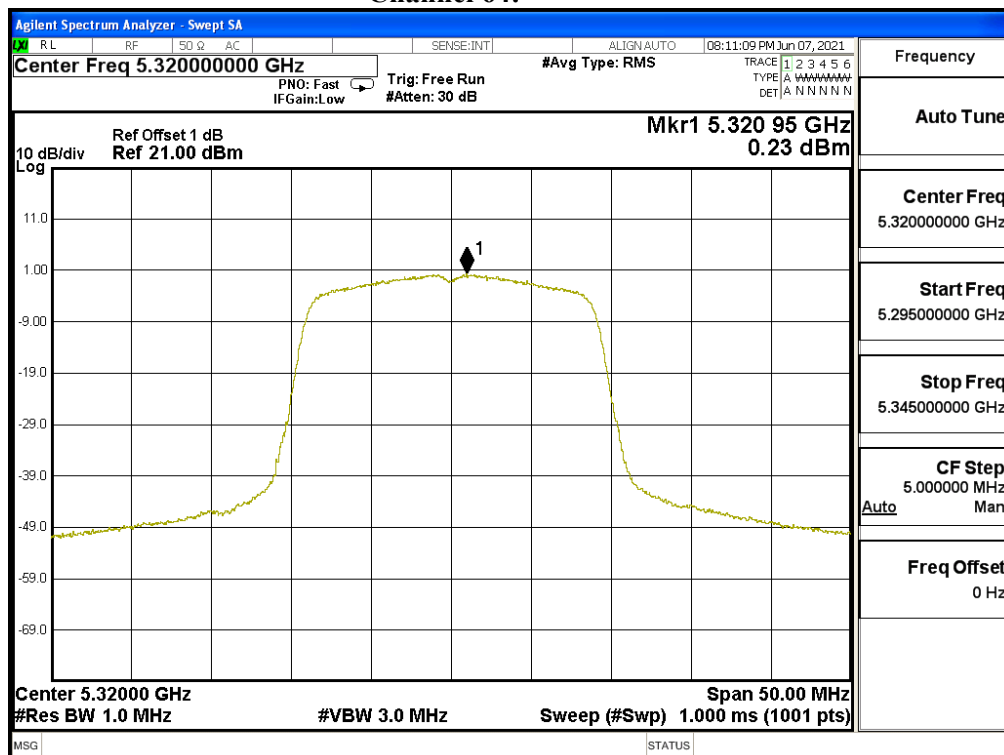


Channel 100:

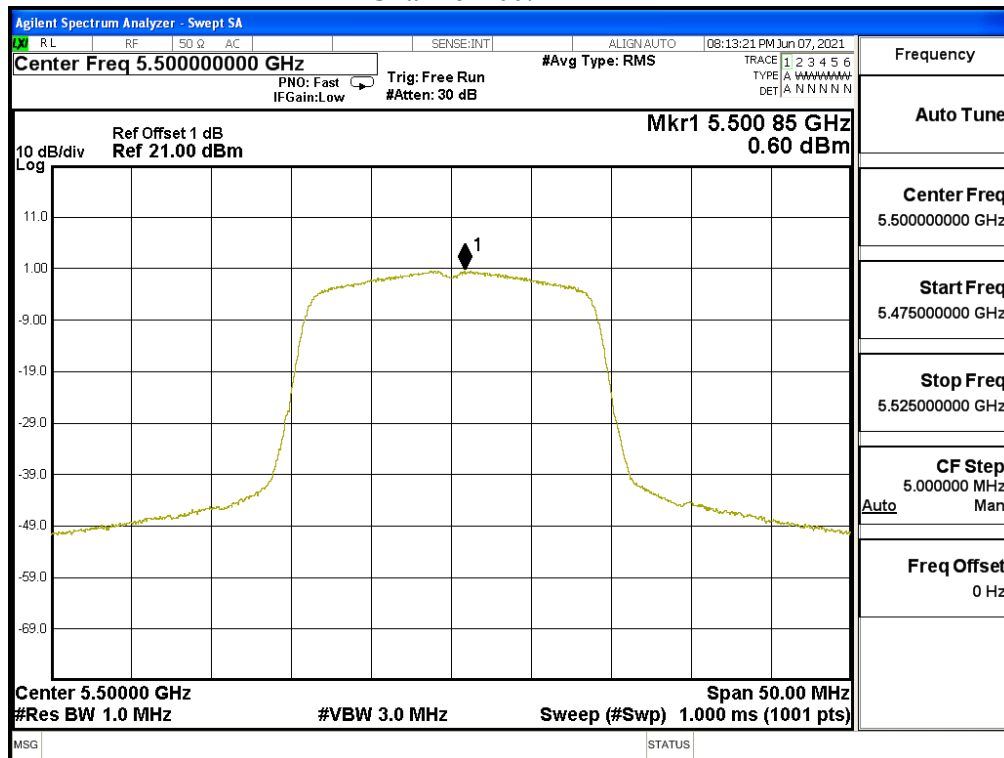


Channel 116:

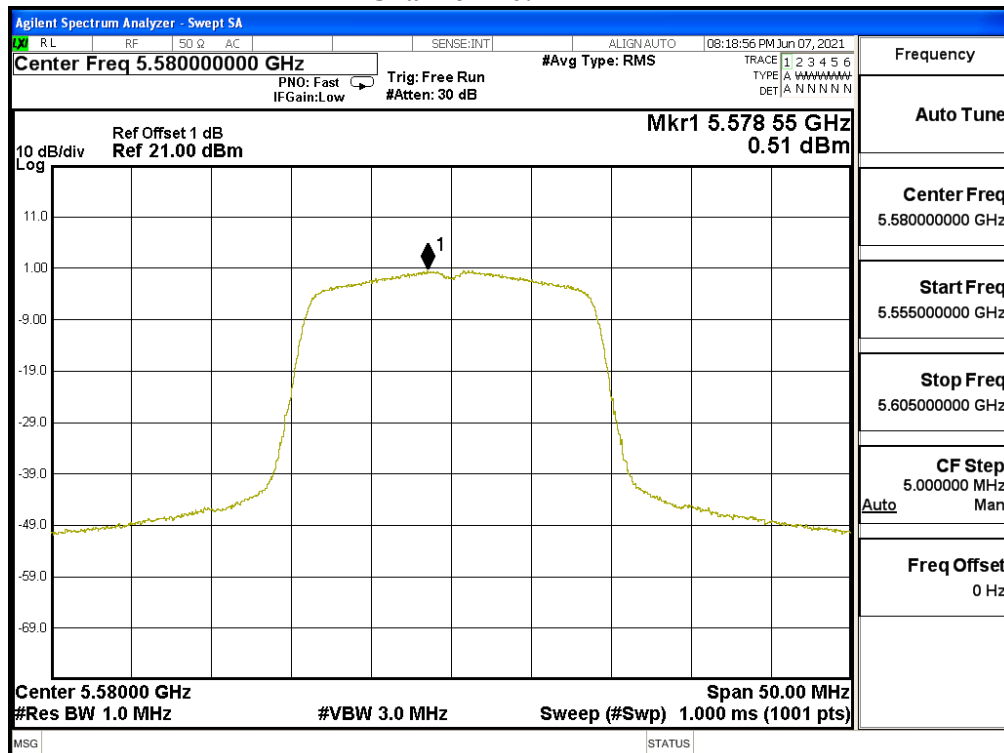


Channel 140:

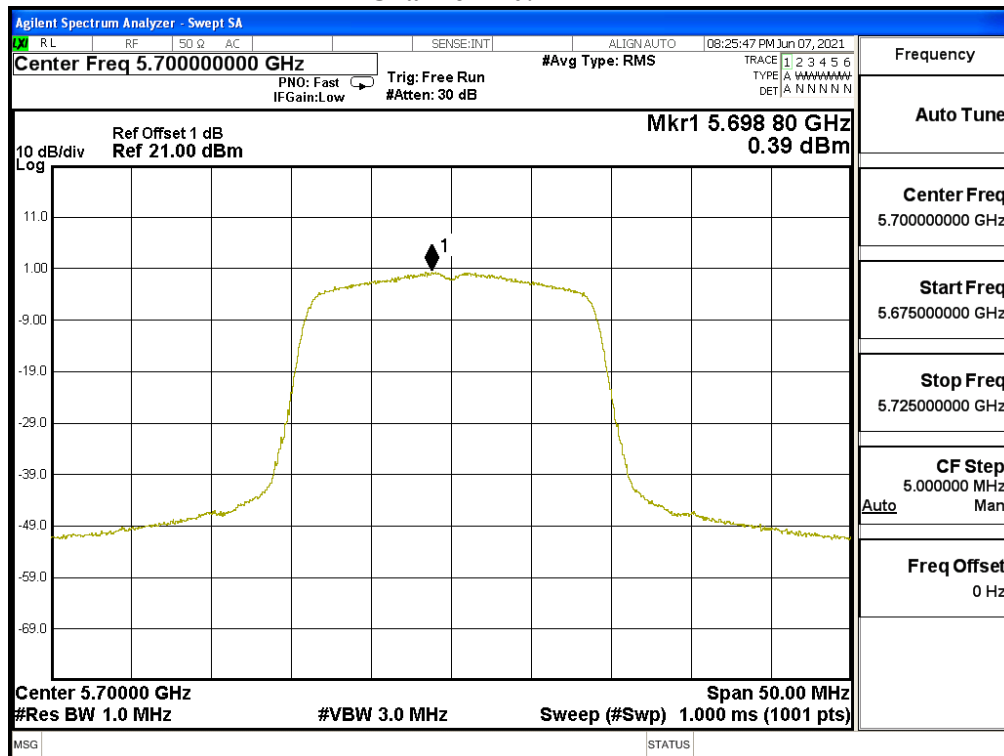


Channel 144(Band3):

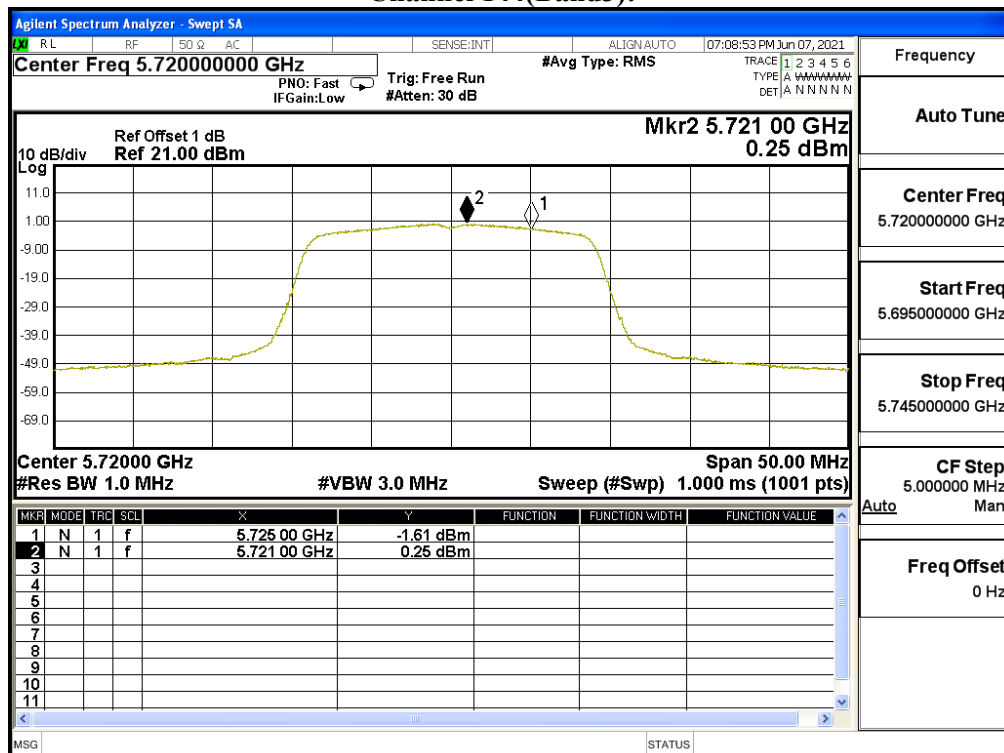


Channel 144(Band4):

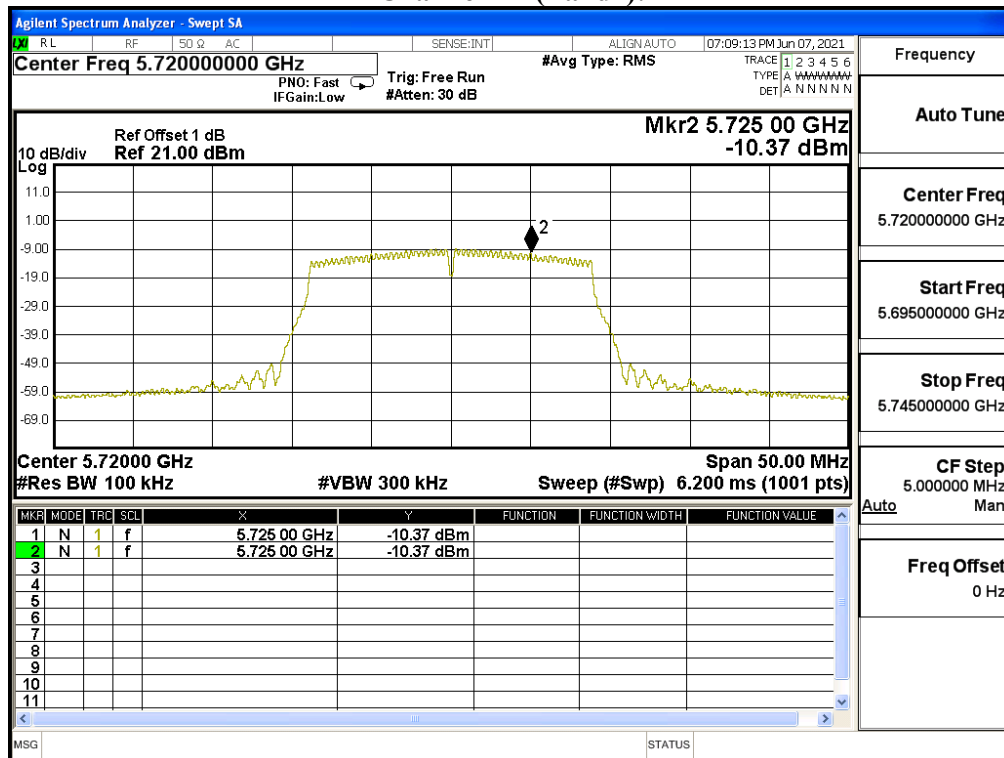


Channel 149:

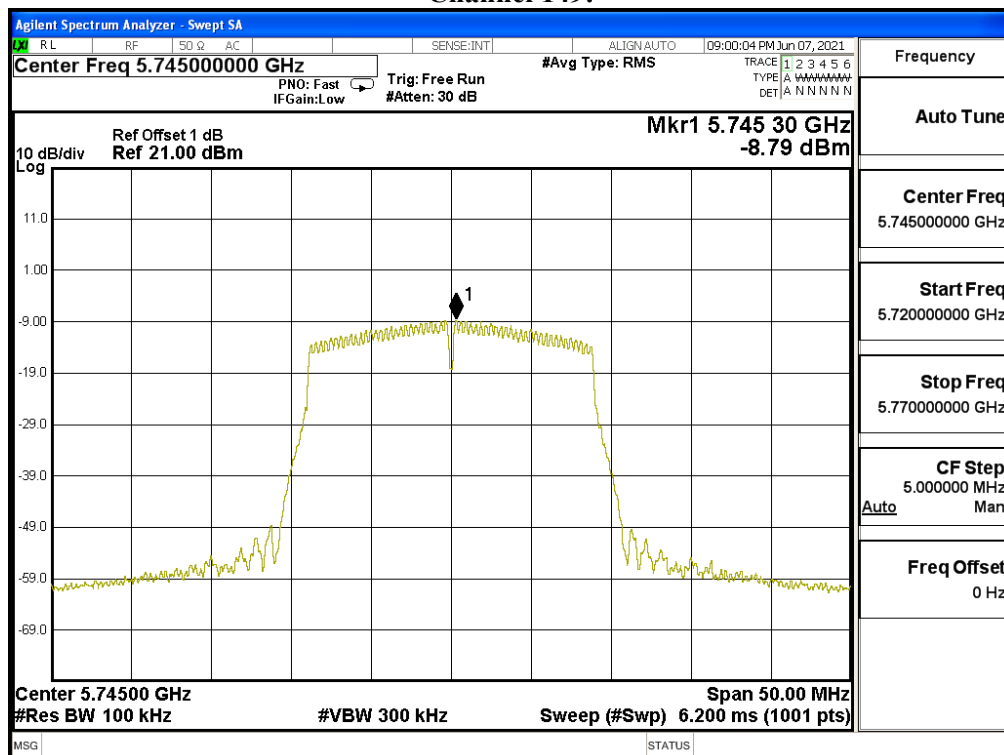

Channel 157:

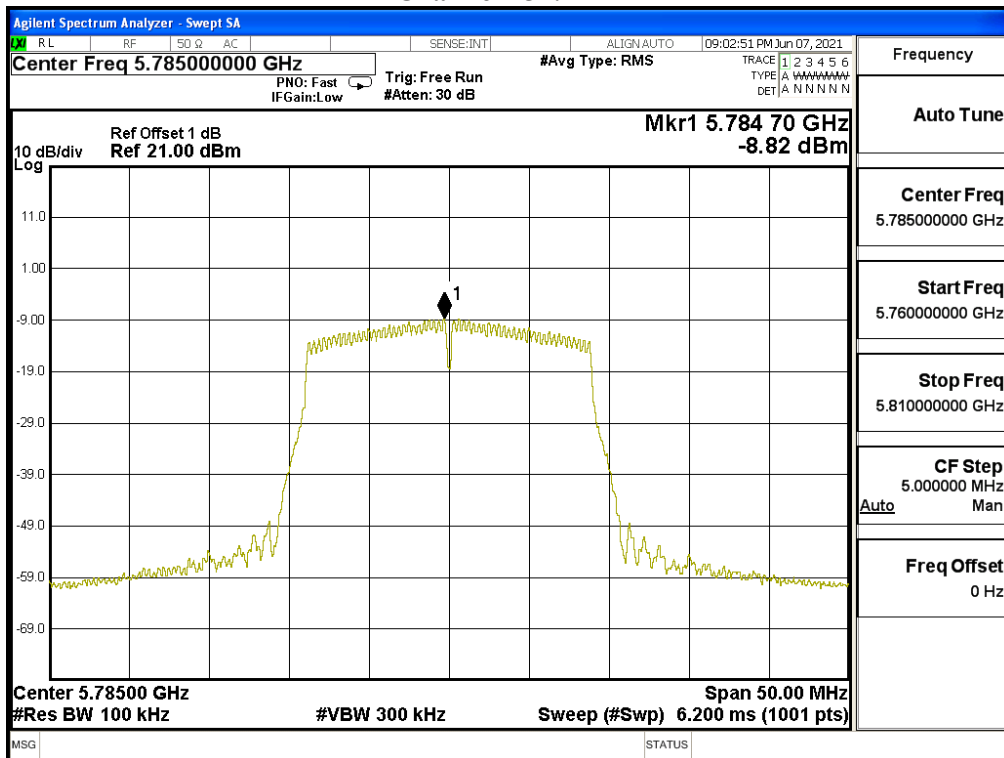

Channel 165:

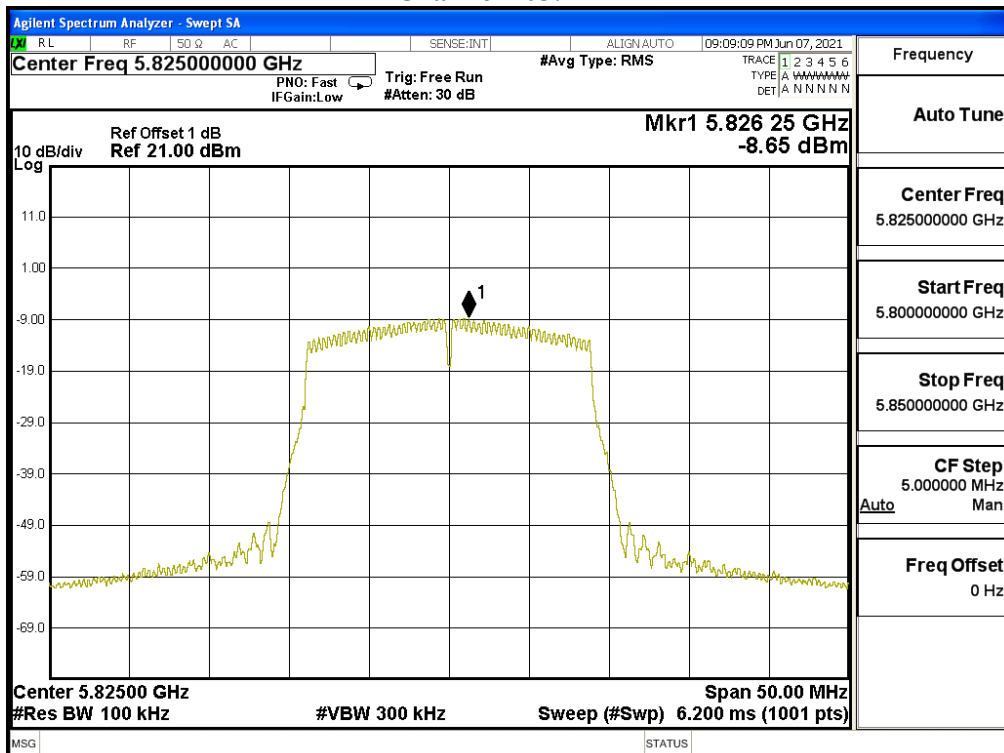


Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Peak Power Spectral Density
 Test Mode : Mode 3: Transmit (802.11ac-40BW 15Mbps)
 Test Date : 2021/06/07


Channel Number	Frequency (MHz)	Data Rate (Mbps)	Measurement Level (dBm)	Duty factor (dB)	Total PPSD (dBm)	Required Limit (dBm)	Result
38	5190	15	-2.67	0.23	-2.44	<11	Pass
46	5230	15	-2.68	0.23	-2.45	<11	Pass
54	5270	15	-2.66	0.23	-2.43	<11	Pass
62	5310	15	-3.02	0.23	-2.79	<11	Pass
102	5510	15	-2.78	0.23	-2.55	<11	Pass
110	5550	15	-2.90	0.23	-2.67	<11	Pass
134	5670	15	-2.59	0.23	-2.36	<11	Pass
142(Band3)	5710	15	-2.61	0.23	-2.38	<11	Pass

Channel Number	Frequency (MHz)	Data Rate (Mbps)	PPSD (dBm)	BWCF (dB)	Duty factor (dB)	Total PPSD (dBm)	Required Limit (dBm)	Result
142(Band4)	5710	15	-15.74	6.98	0.23	-8.53	<30	Pass
151	5755	15	-11.81	6.98	0.23	-4.60	<30	Pass
159	5795	15	-11.87	6.98	0.23	-4.66	<30	Pass


Channel 38

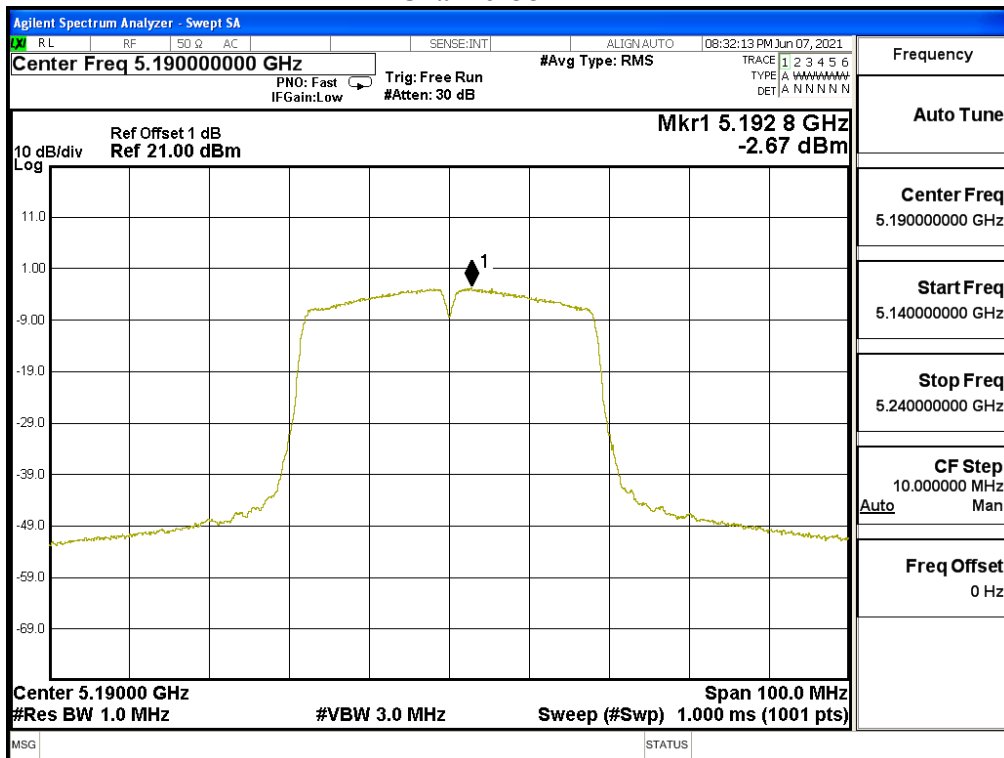


Channel 46

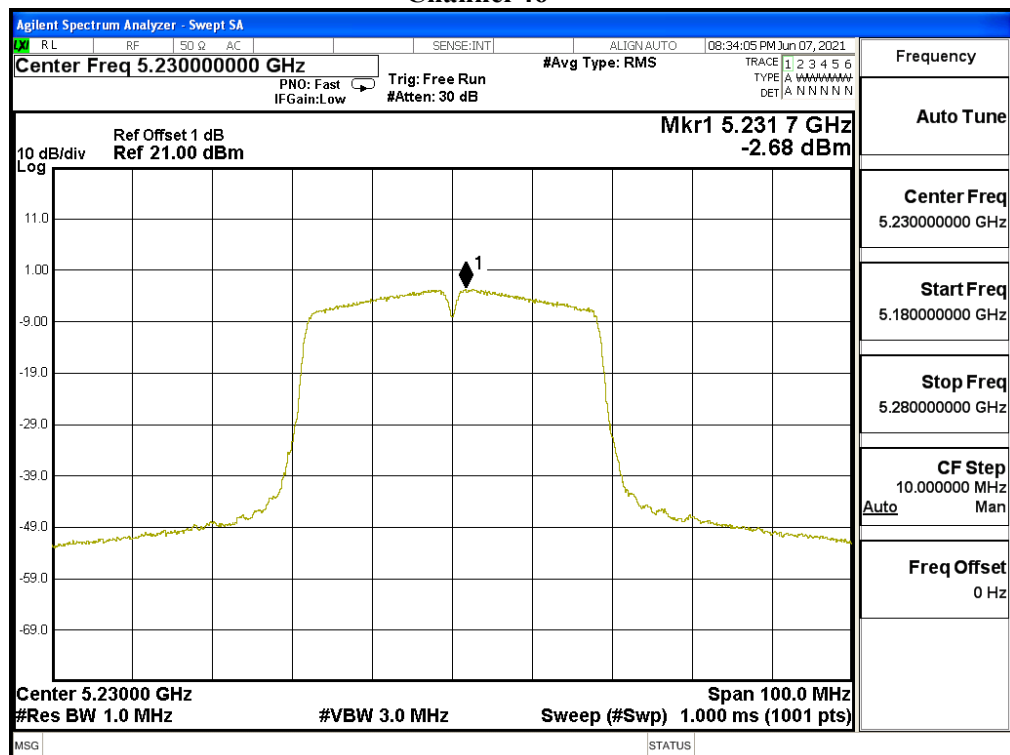


Channel 54

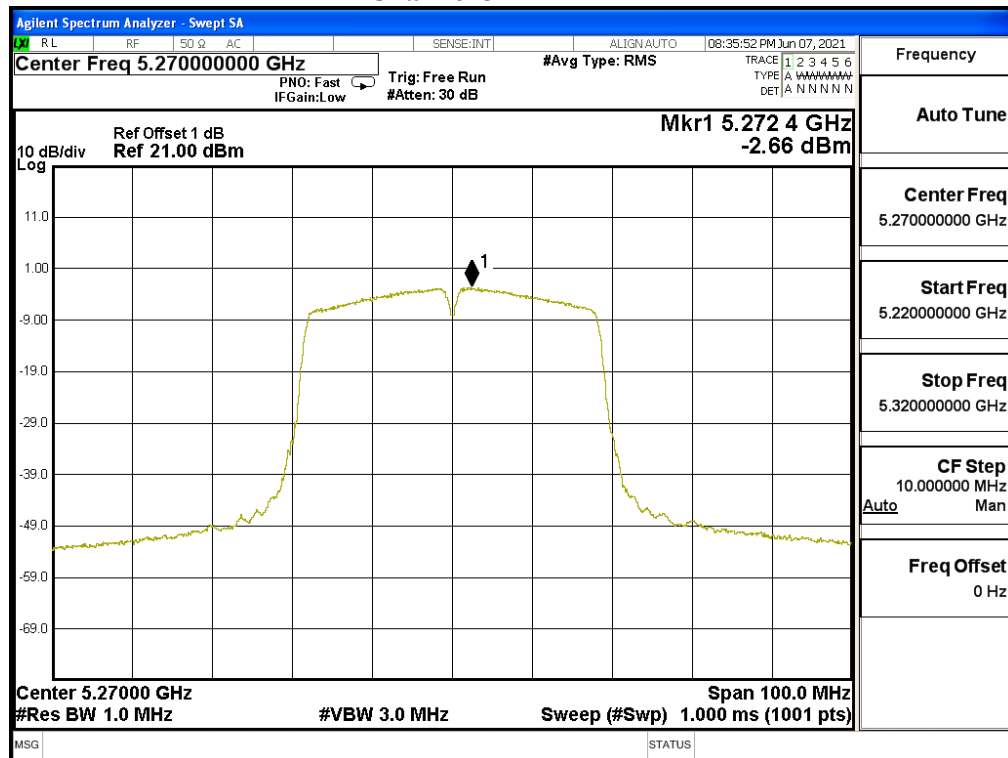


Channel 62

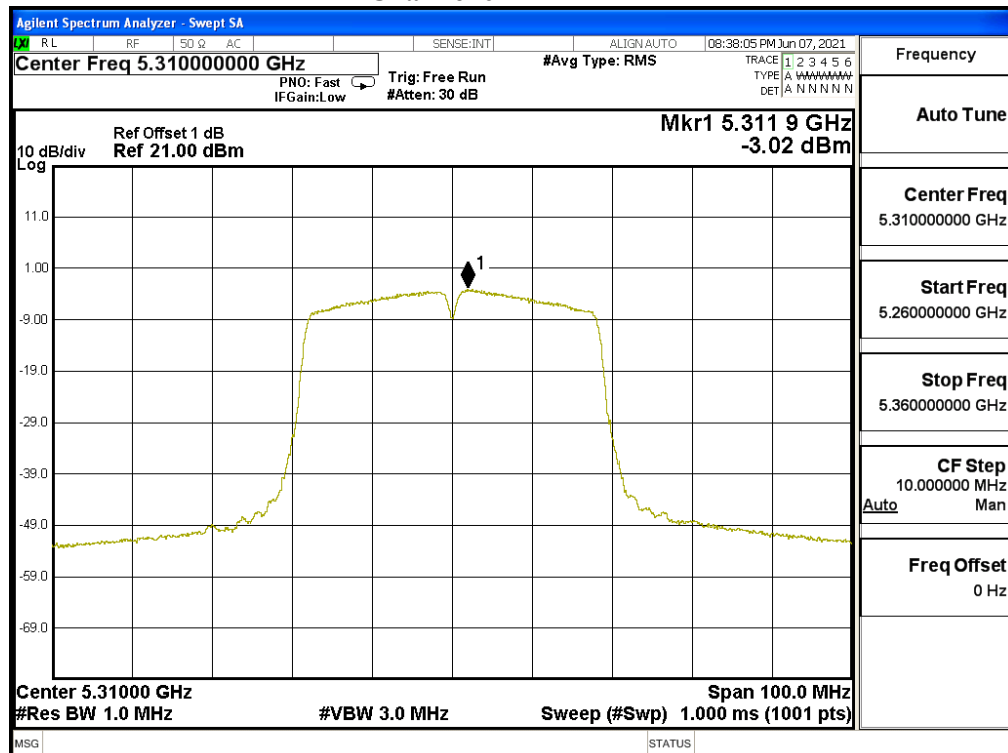


Channel 102

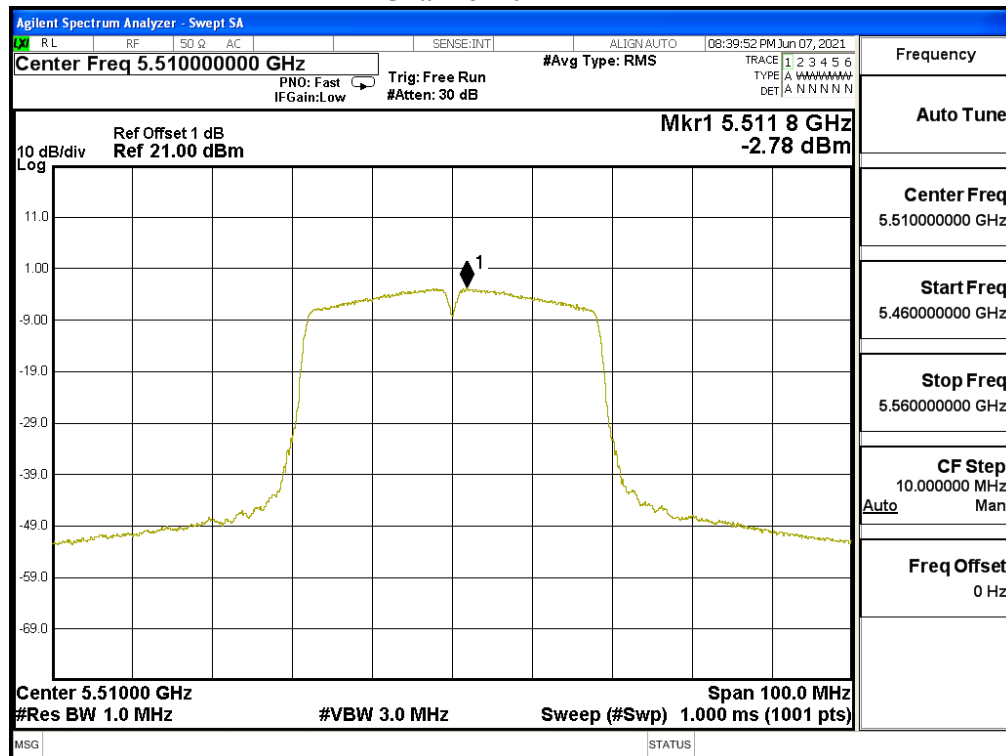


Channel 110

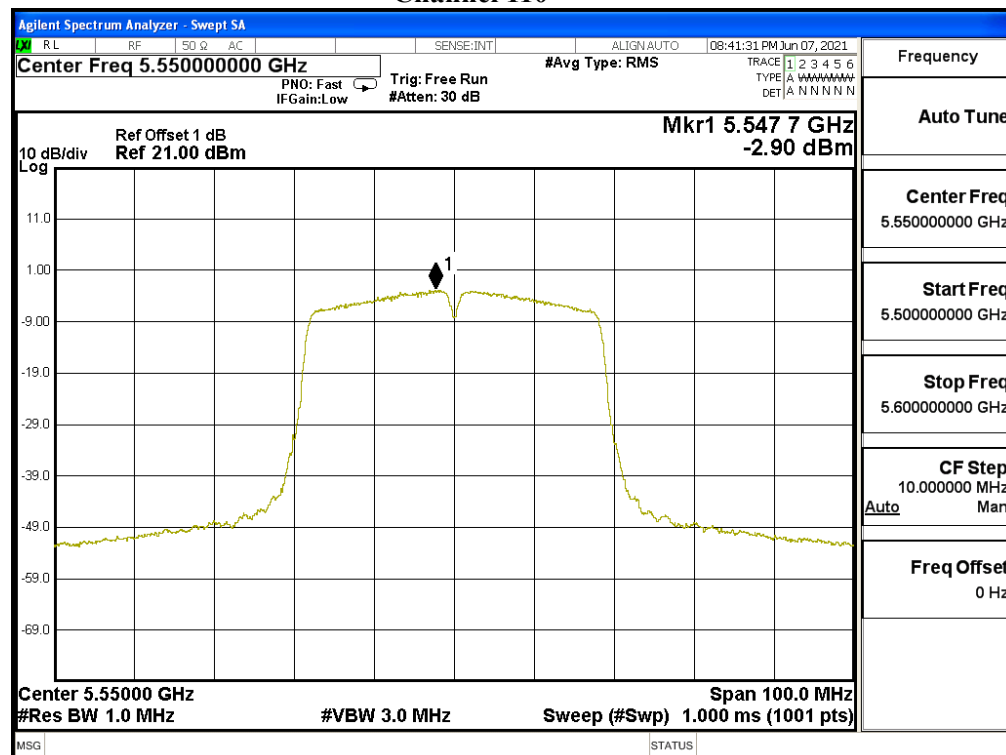


Channel 134

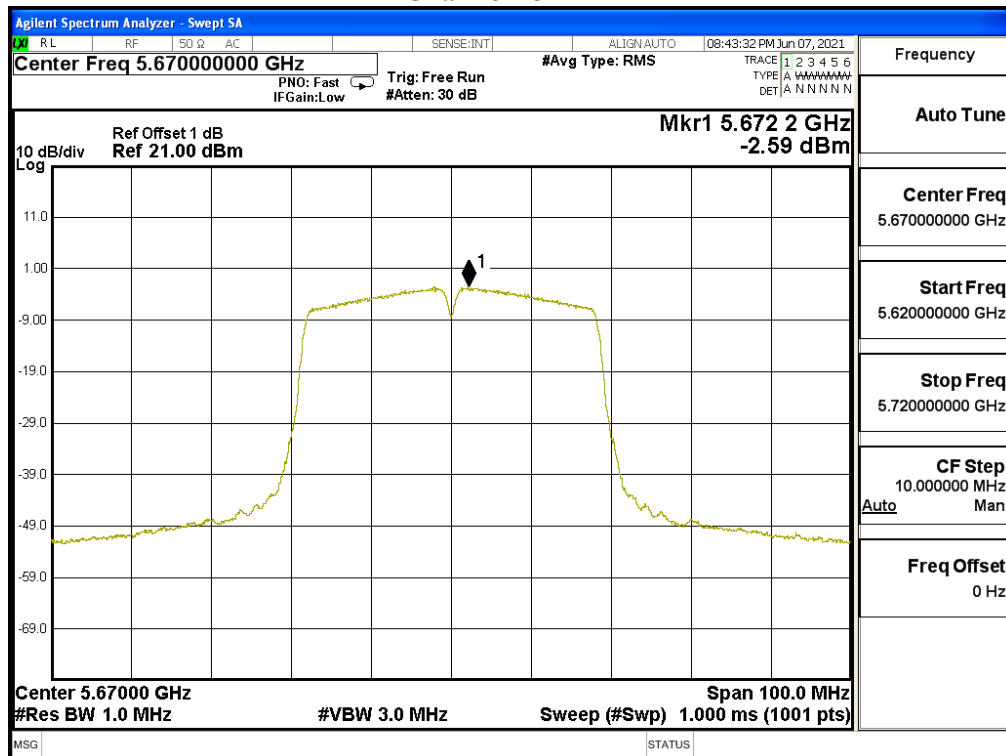


Channel 142(Band3)

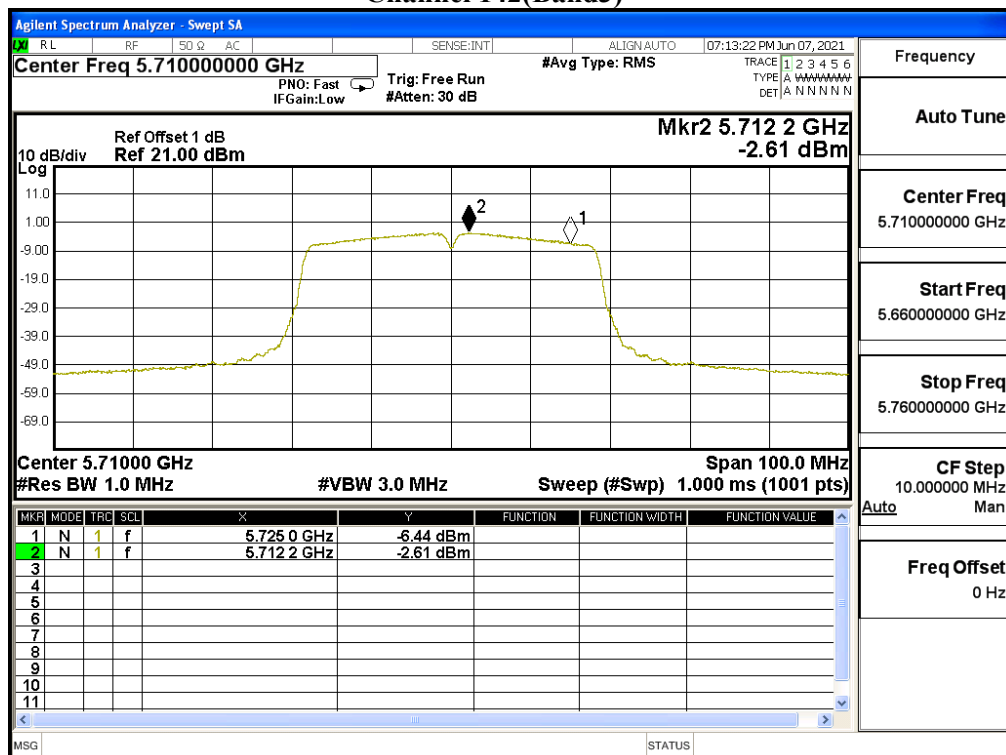


Channel 142(Band4)

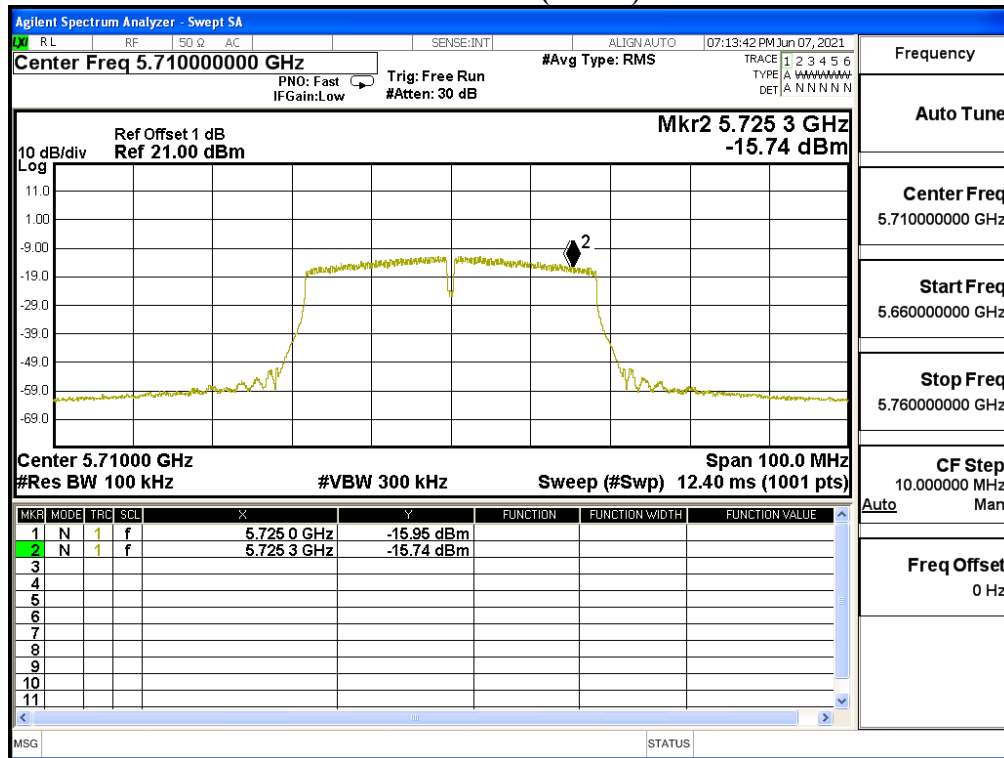

Channel 151

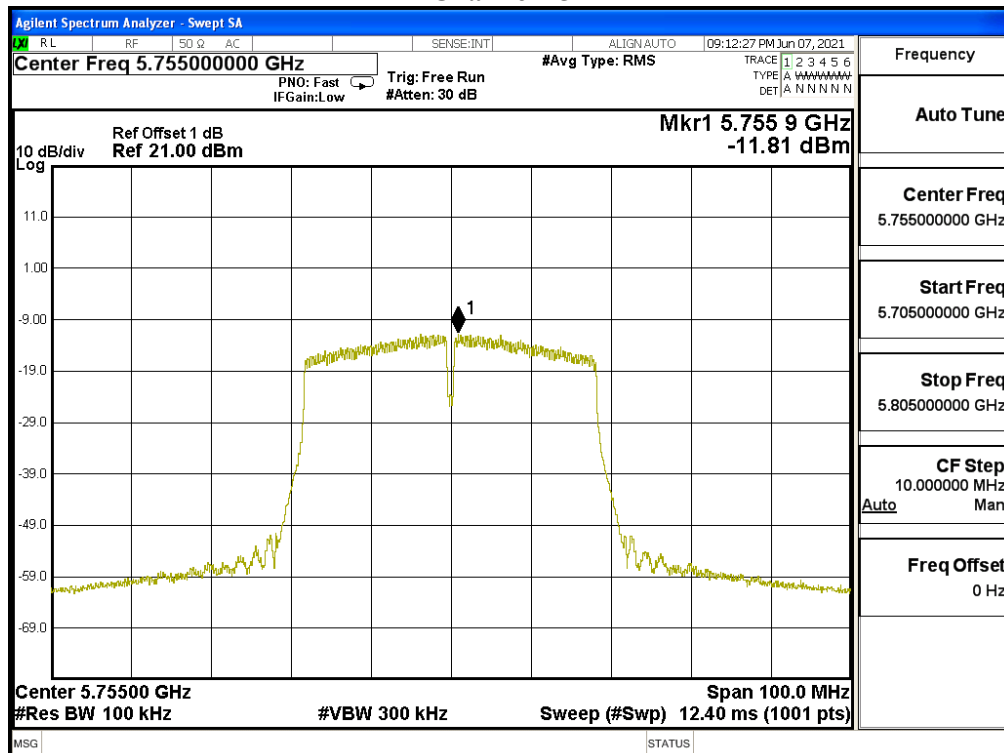

Channel 159

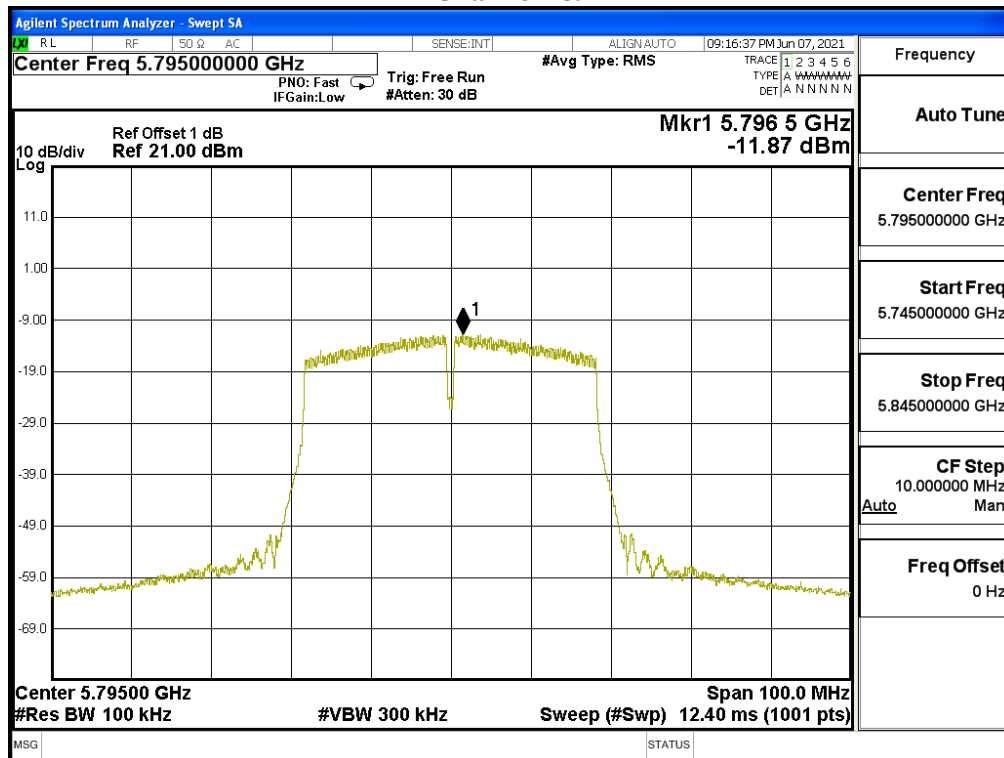


Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Peak Power Spectral Density
 Test Mode : Mode 4: Transmit (802.11ac-80BW 32.5Mbps)
 Test Date : 2021/06/07


Channel Number	Frequency (MHz)	Data Rate (Mbps)	Measurement Level (dBm)	Duty factor (dB)	Total PPSP (dBm)	Required Limit (dBm)	Result
42	5210	32.5	-6.14	0.43	-5.71	<11	Pass
58	5290	32.5	-5.99	0.43	-5.56	<11	Pass
106	5530	32.5	-5.98	0.43	-5.55	<11	Pass
122	5610	32.5	-5.67	0.43	-5.24	<11	Pass
138(Band3)	5690	32.5	-6.05	0.43	-5.62	<11	Pass

Channel Number	Frequency (MHz)	Data Rate (Mbps)	PPSP (dBm)	BWCF (dB)	Duty factor (dB)	Total PPSP (dBm)	Required Limit (dBm)	Result
138ac80(Band4)	5690	32.5	-18.73	6.98	0.43	-11.32	<30	Pass
155ac80	5775	32.5	-15.03	6.98	0.43	-7.62	<30	Pass


Channel 42

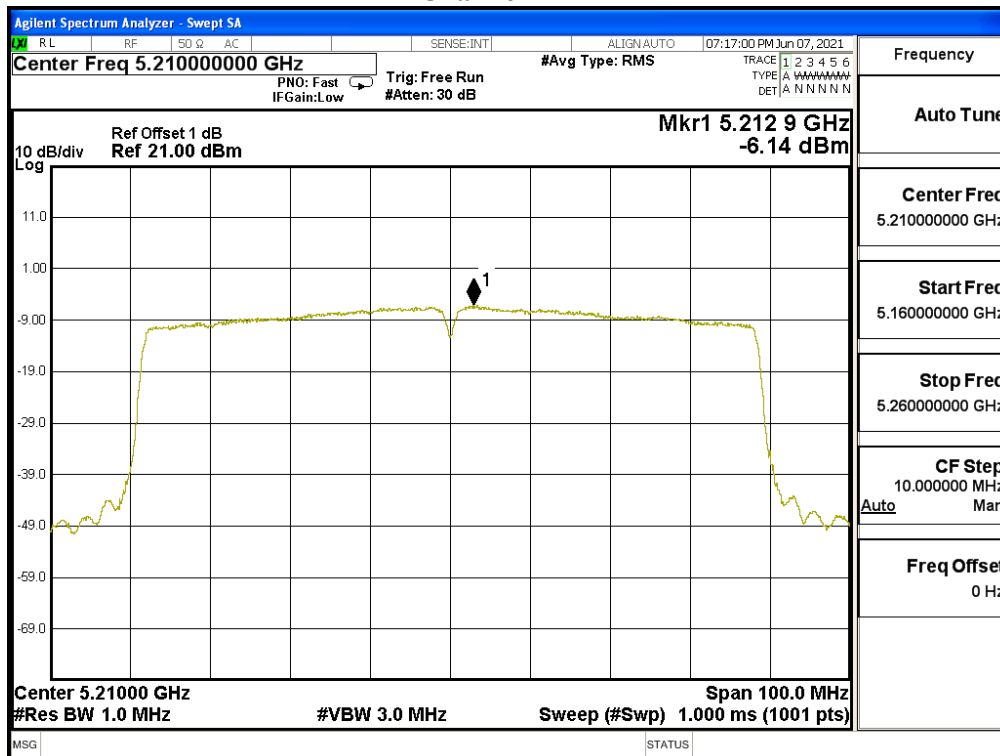


Channel 58

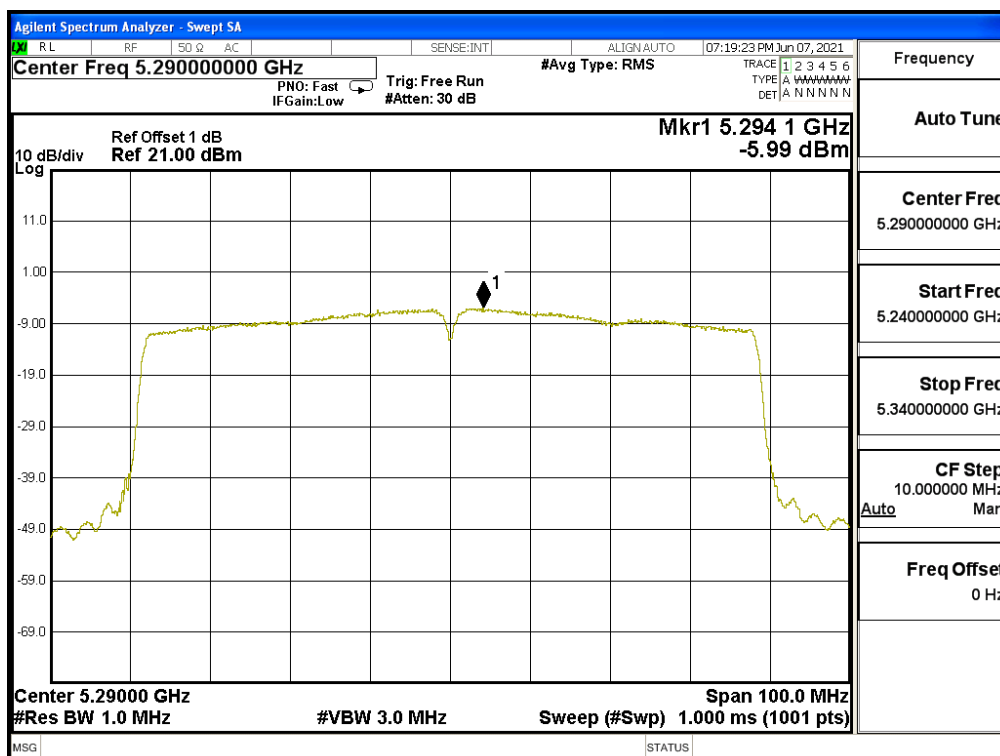


Channel 106

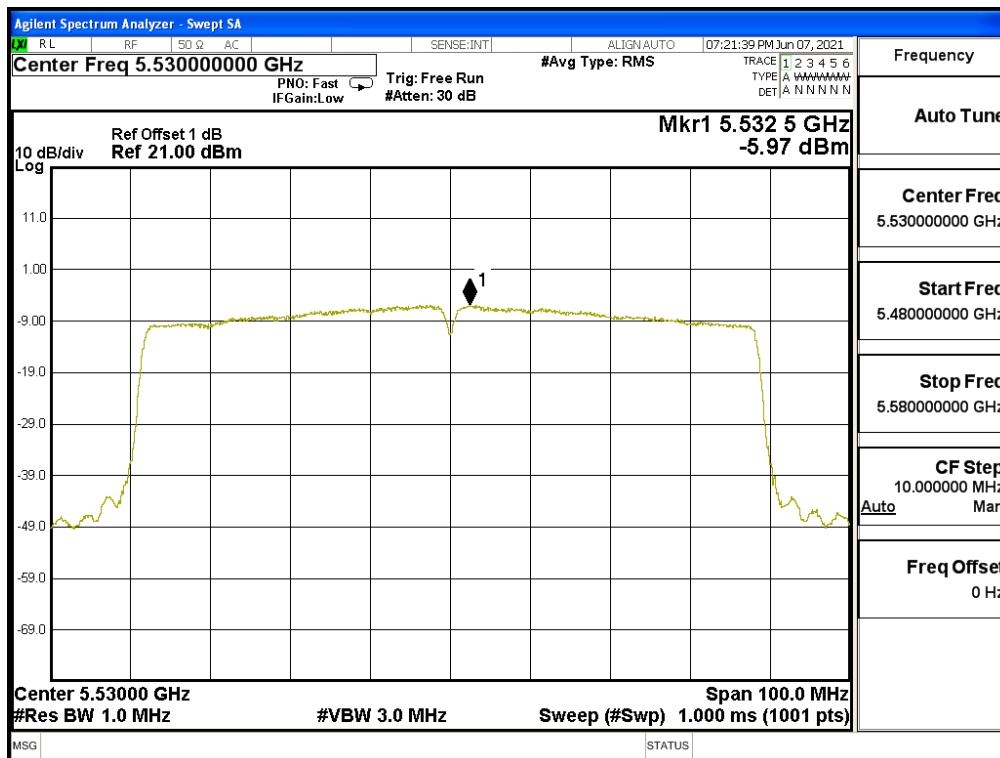


Channel 122

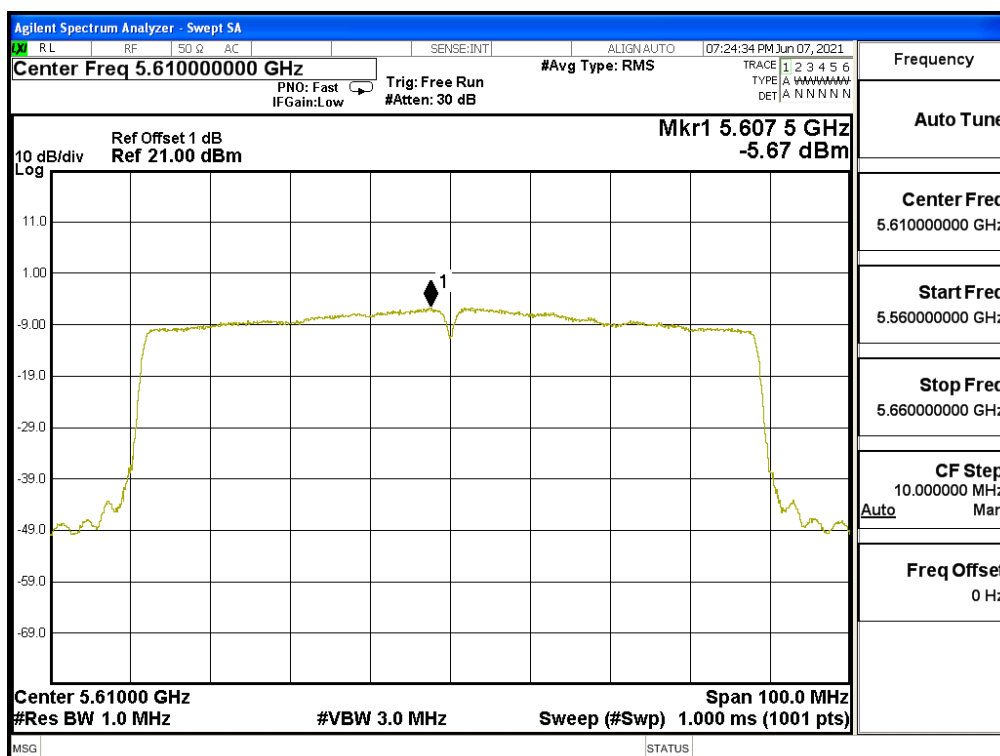


Channel 138

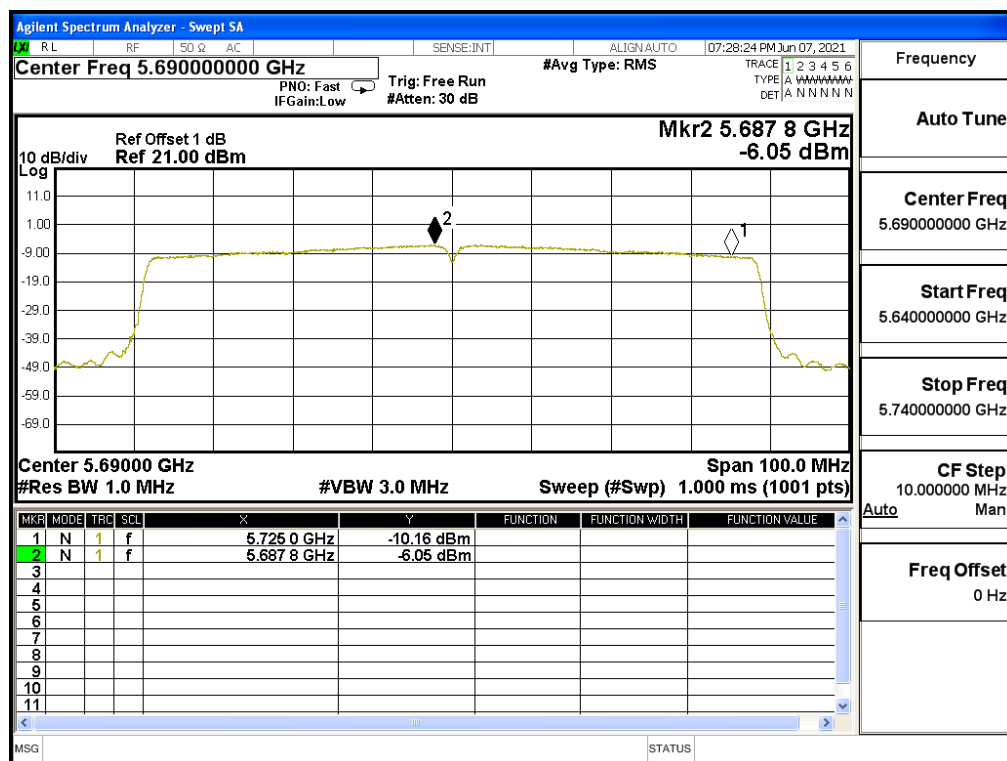

Channel 138

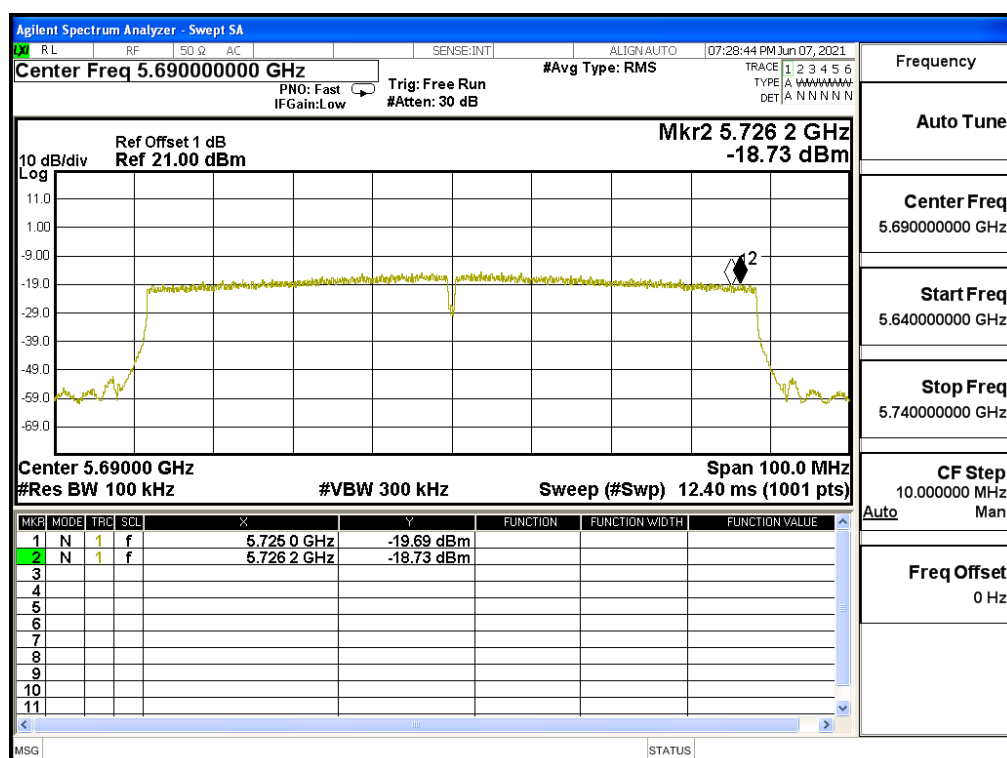


Channel 155

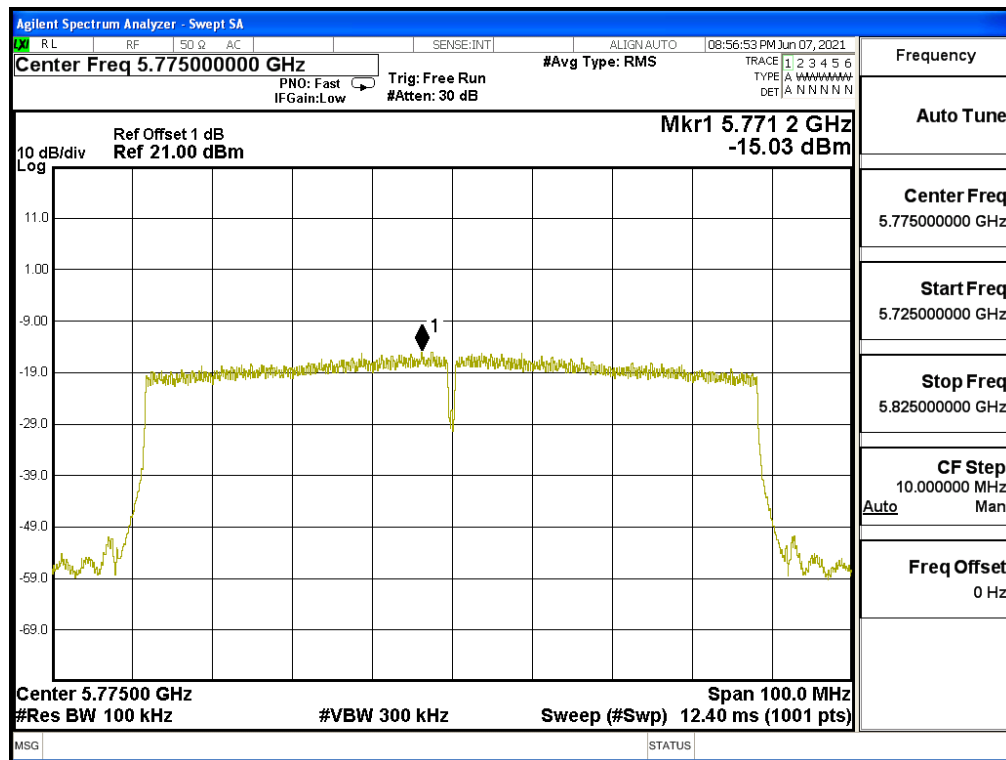


5. Radiated Emission

5.1. Test Setup


Radiated Emission Under 30MHz

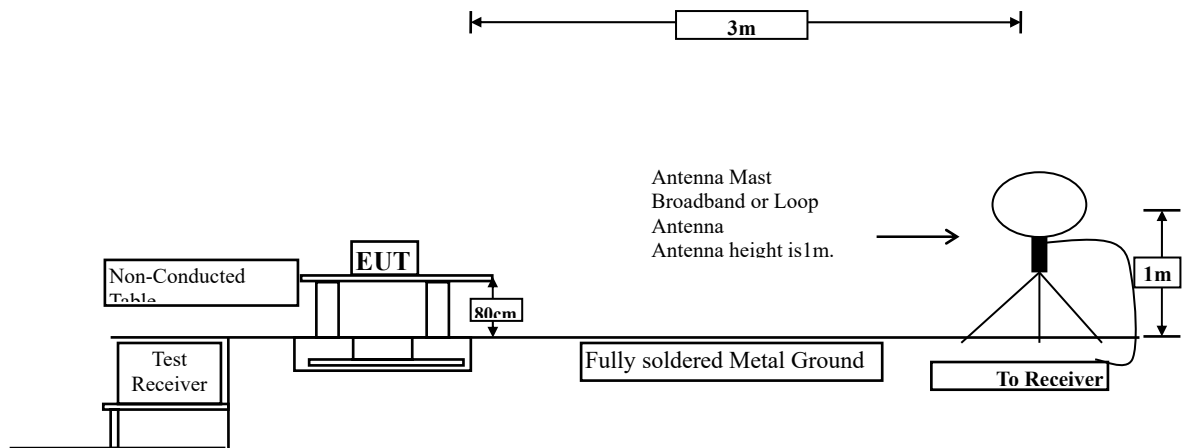

Radiated Emission Below 1GHz

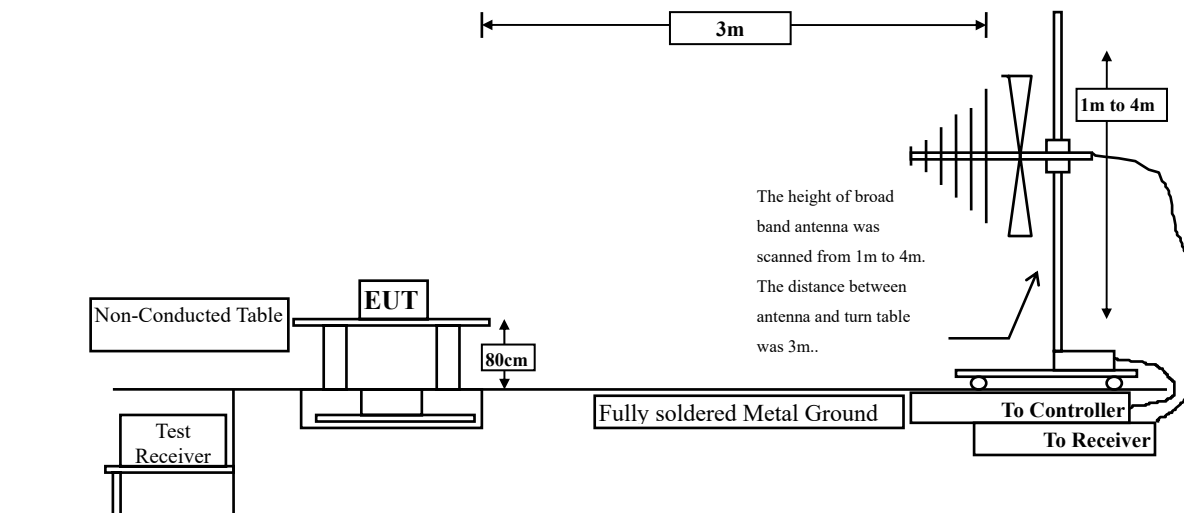

Radiated Emission Above 1GHz

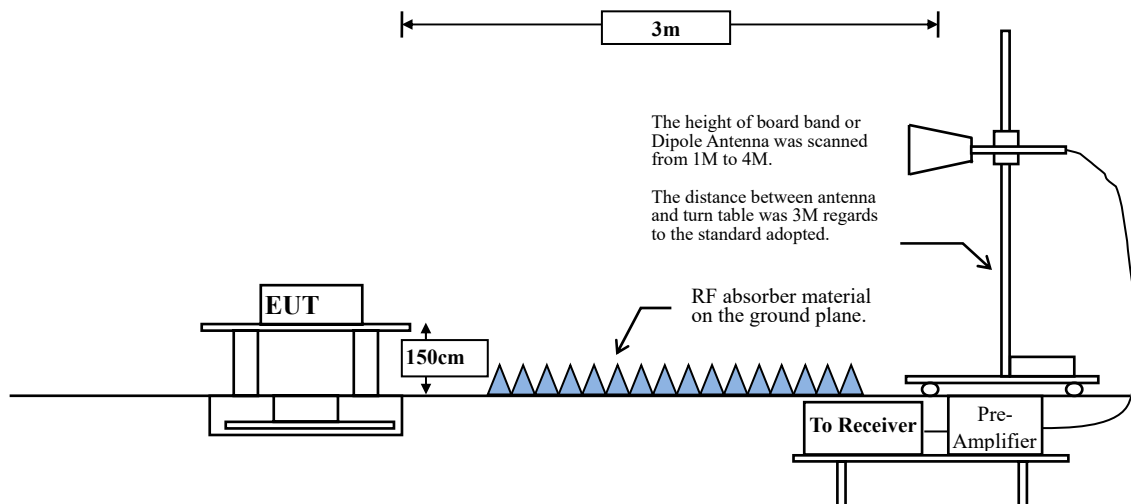

5.2. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dBμV/m) = 20 log E field strength (uV/m)

5.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according to FCC KDB-789033 test procedure for compliance to FCC 47CFR 15. 407 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

RBW and VBW Parameter setting:

According to KDB 789033 section II.G.5 Procedure for Unwanted Maximum Emissions
Measurements above 1000 MHz.

RBW = 1MHz.

VBW $\geq$ 3MHz.

According to KDB 789033 section II.G.6 Procedures for Average Unwanted Emissions
Measurements above 1000 MHz.

RBW = 1MHz.

VBW = 10Hz, when duty cycle $\geq$ 98 %

VBW $\geq$ 1/T, when duty cycle < 98 %

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)


5GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11a	97.20	1.3900	719	1000
802.11ac20	97.49	1.3180	759	1000
802.11ac40	94.77	0.6520	1534	2000
802.11ac80	90.53	0.3250	3077	5000

Note: Duty Cycle Refer to Section 8.

5.4. Test Result of Radiated Emission

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5180MHz)
 Test Date : 2021/06/03

Horizontal

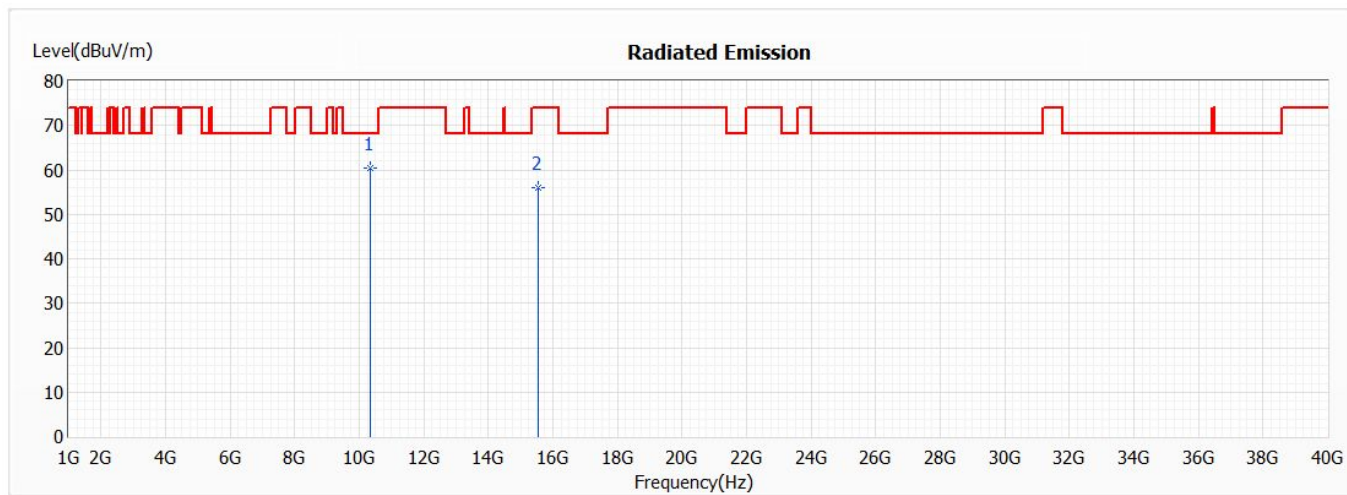


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	10360.000	60.46	68.22	-7.76	54.86	5.60	PK
2	15540.000	56.05	74.00	-17.95	45.93	10.12	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5180MHz)
 Test Date : 2021/06/03

Horizontal

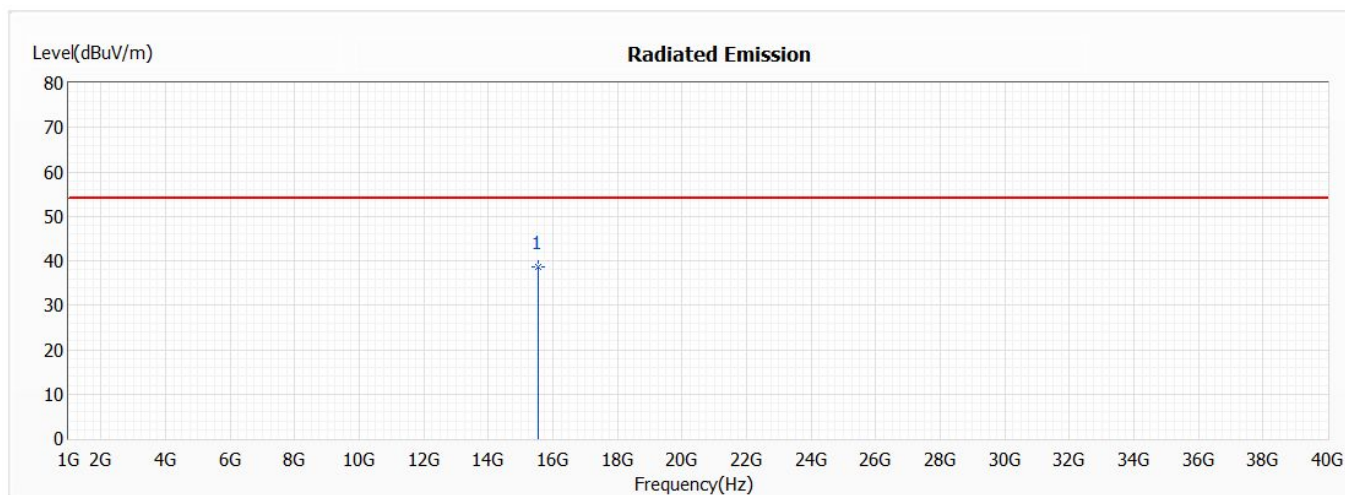


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15540.000	38.54	54.00	-15.46	28.42	10.12	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5180MHz)
 Test Date : 2021/06/03

Vertical

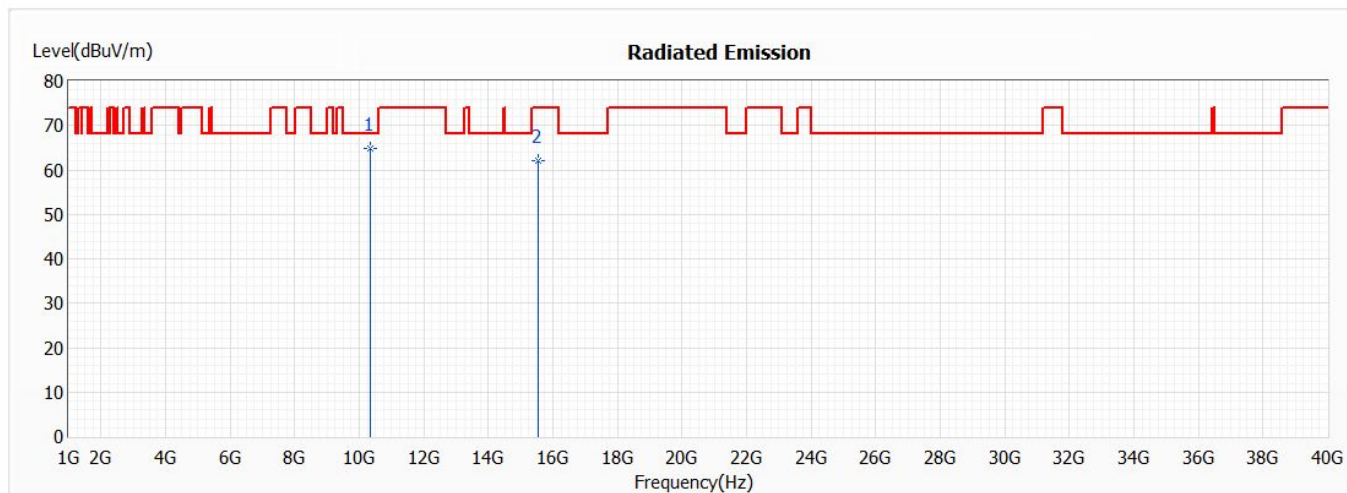


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	10360.000	64.80	68.22	-3.42	59.20	5.60	PK
2	15540.000	62.10	74.00	-11.90	51.98	10.12	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5180MHz)
 Test Date : 2021/06/03

Vertical

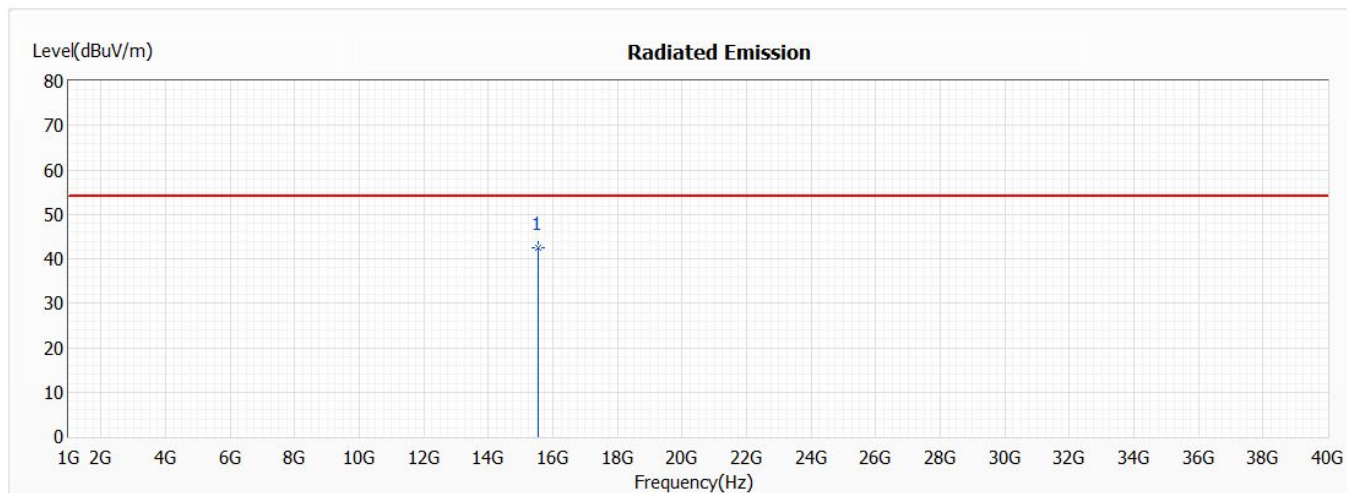


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15540.000	42.54	54.00	-11.46	32.42	10.12	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5220MHz)
 Test Date : 2021/06/03

Horizontal

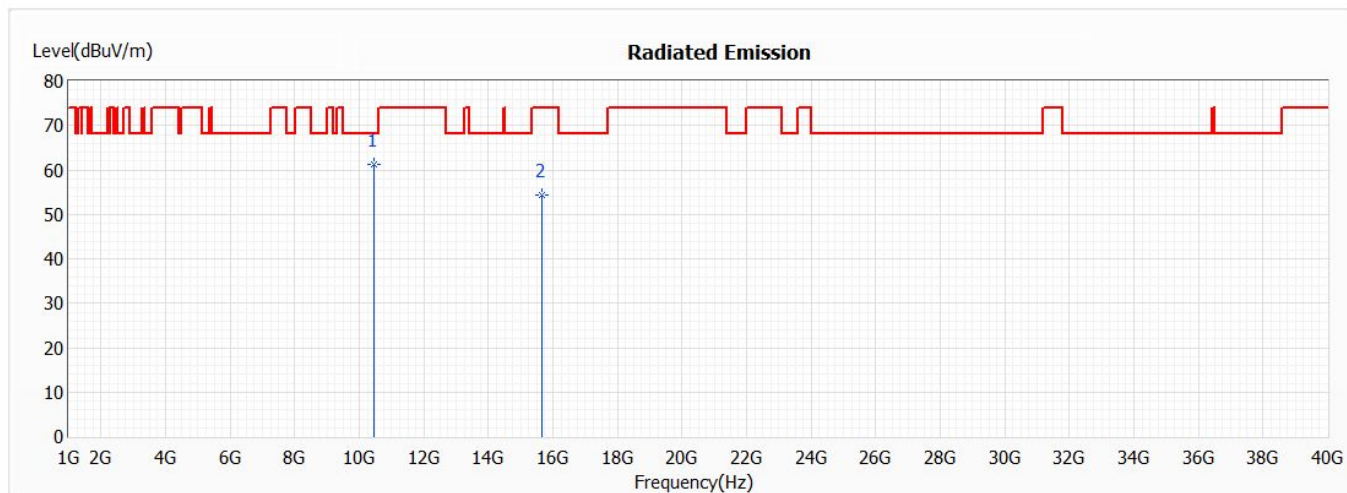


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	10440.000	61.20	68.22	-7.02	55.50	5.70	PK
2	15660.000	54.26	74.00	-19.74	43.75	10.51	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5220MHz)
 Test Date : 2021/06/03

Horizontal

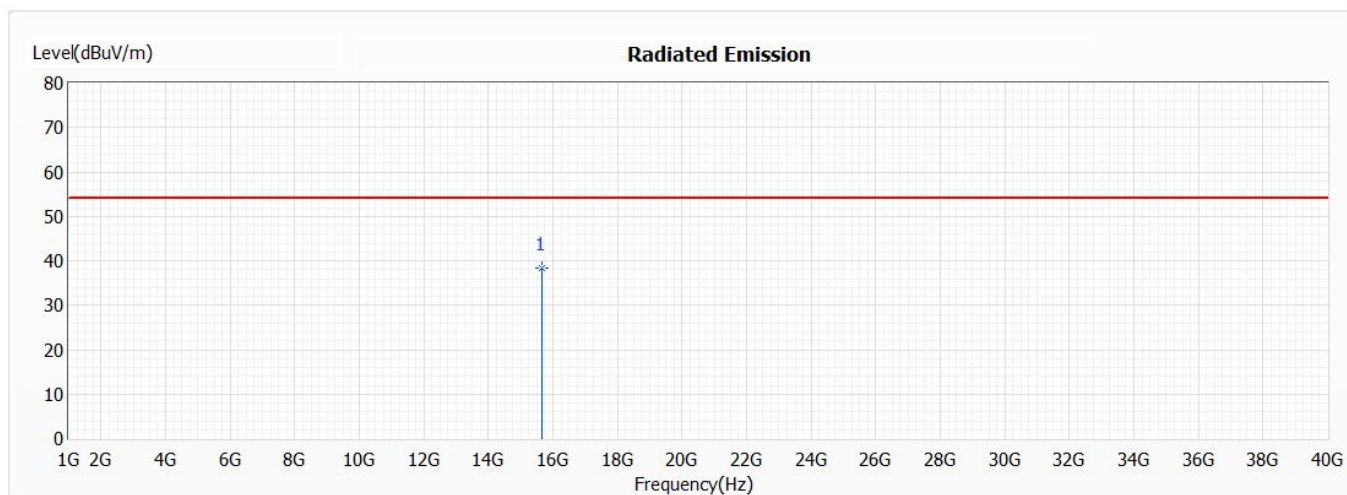


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15660.000	38.44	54.00	-15.56	27.93	10.51	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5220MHz)
 Test Date : 2021/06/03

Vertical

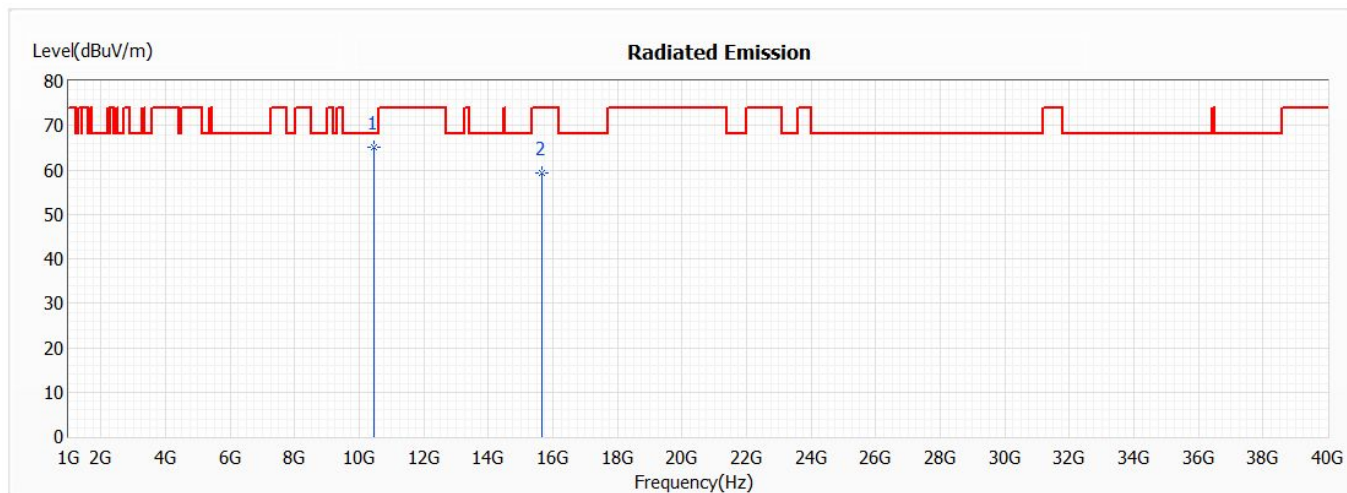


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	10440.000	65.12	68.22	-3.10	59.42	5.70	PK
2	15660.000	59.21	74.00	-14.79	48.70	10.51	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5220MHz)
 Test Date : 2021/06/03

Vertical

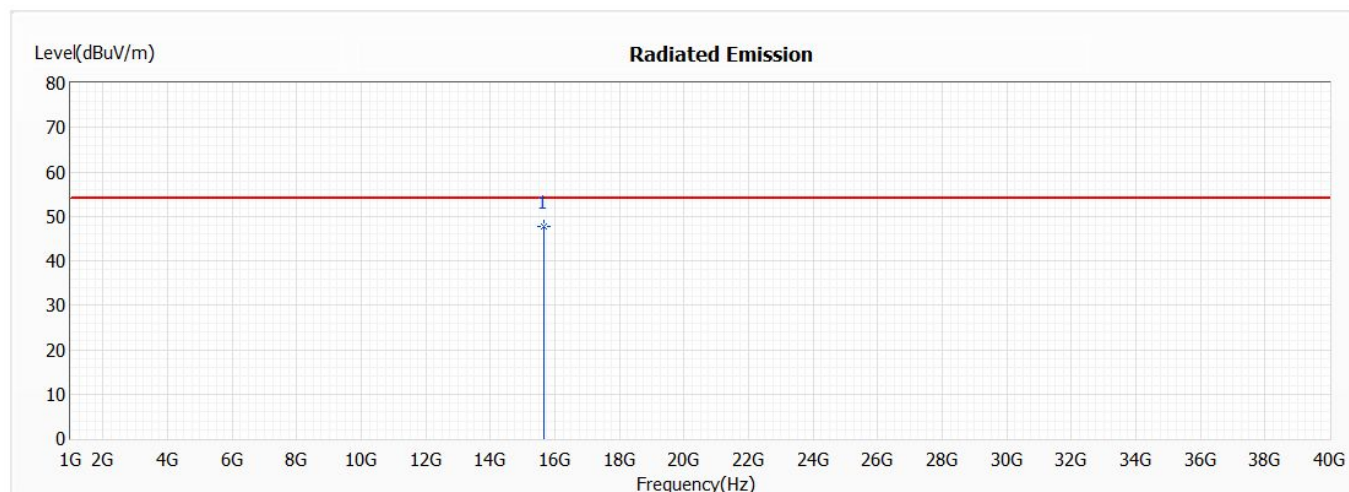


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15660.000	47.77	54.00	-6.23	37.26	10.51	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5240MHz)
 Test Date : 2021/06/03

Horizontal

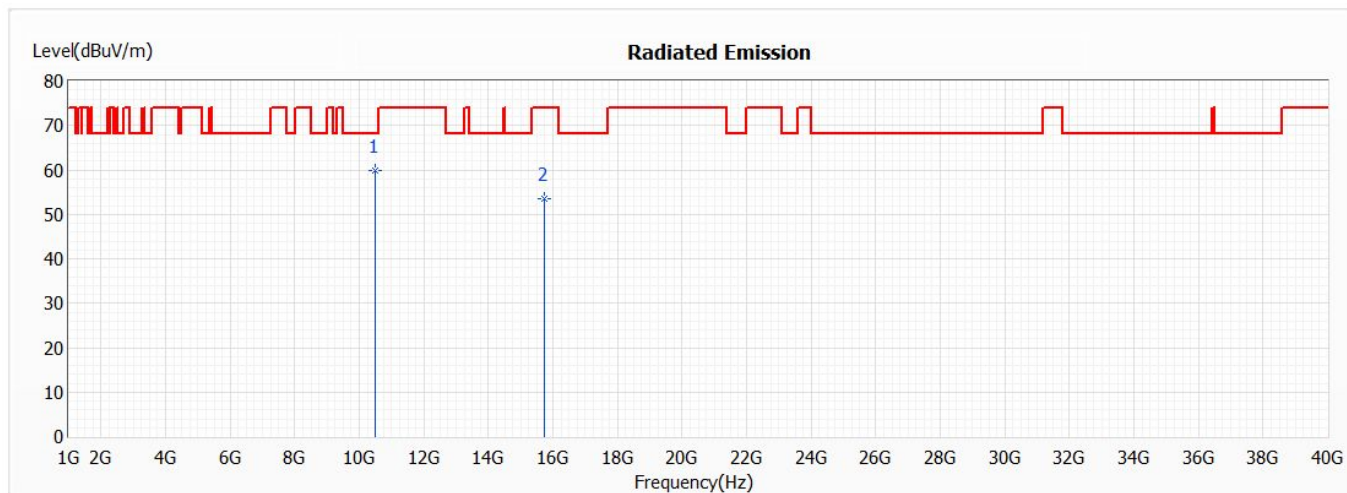


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	10480.000	59.84	68.22	-8.38	54.12	5.72	PK
2	15720.000	53.45	74.00	-20.55	42.58	10.87	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5240MHz)
 Test Date : 2021/06/03

Vertical

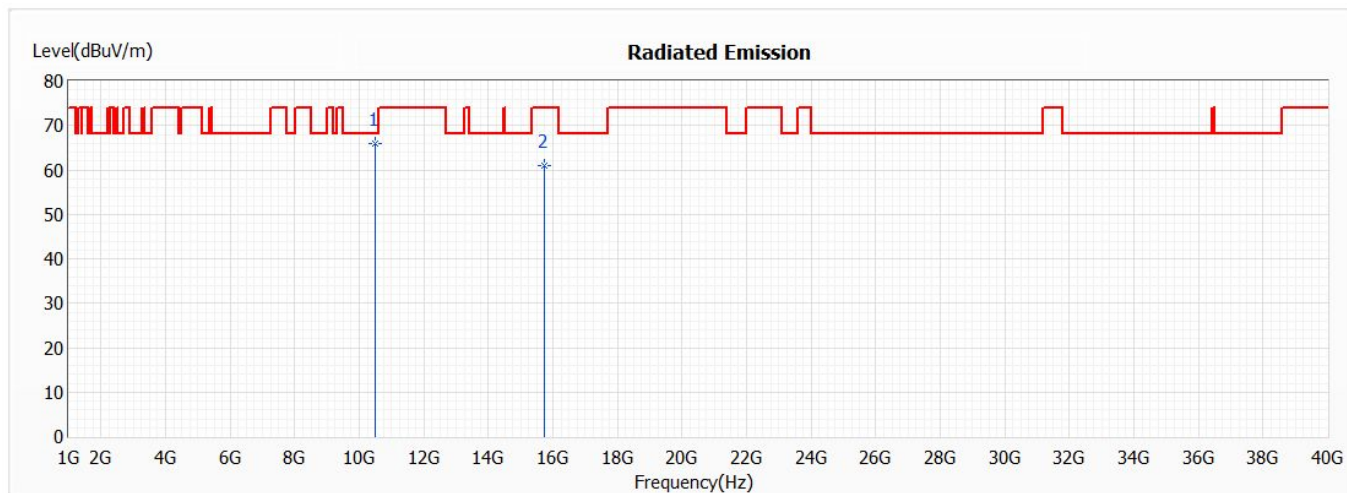


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	10480.000	65.84	68.22	-2.38	60.12	5.72	PK
2	15720.000	60.99	74.00	-13.01	50.12	10.87	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5240MHz)
 Test Date : 2021/06/03

Vertical

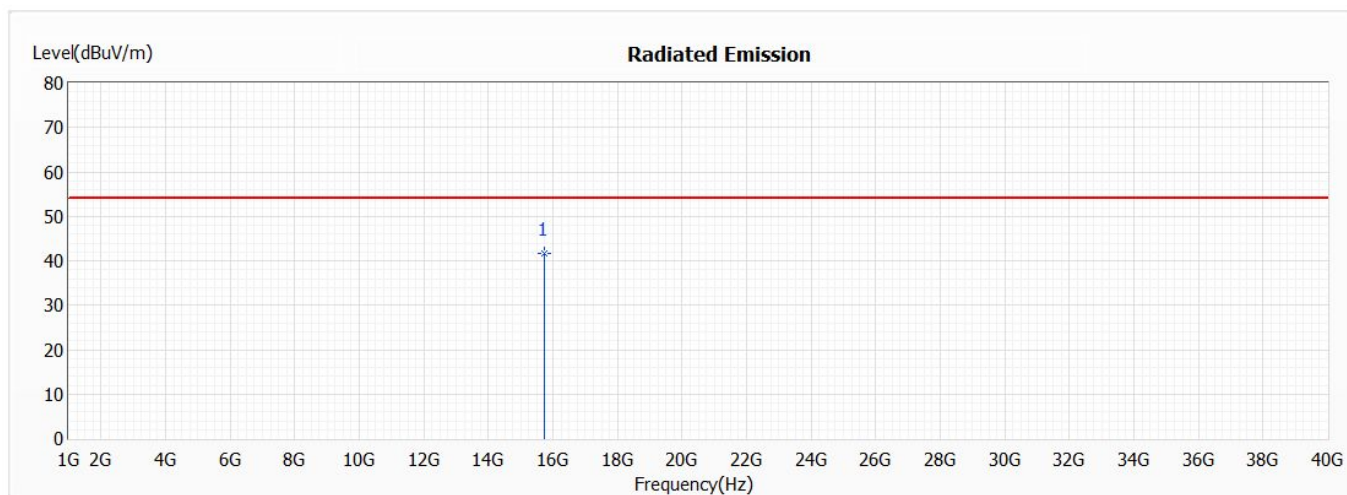


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15720.000	41.55	54.00	-12.45	30.68	10.87	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5260MHz)
 Test Date : 2021/06/03

Horizontal

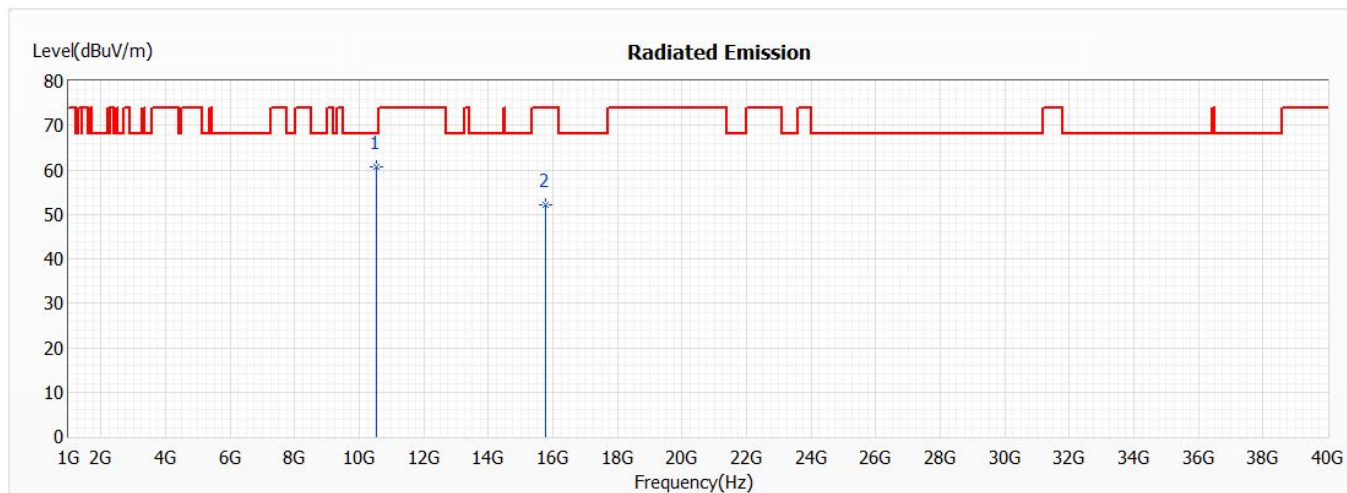


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	10520.000	60.74	68.22	-7.48	54.99	5.75	PK
2	15780.000	52.14	74.00	-21.86	41.16	10.98	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5260MHz)
 Test Date : 2021/06/03

Vertical

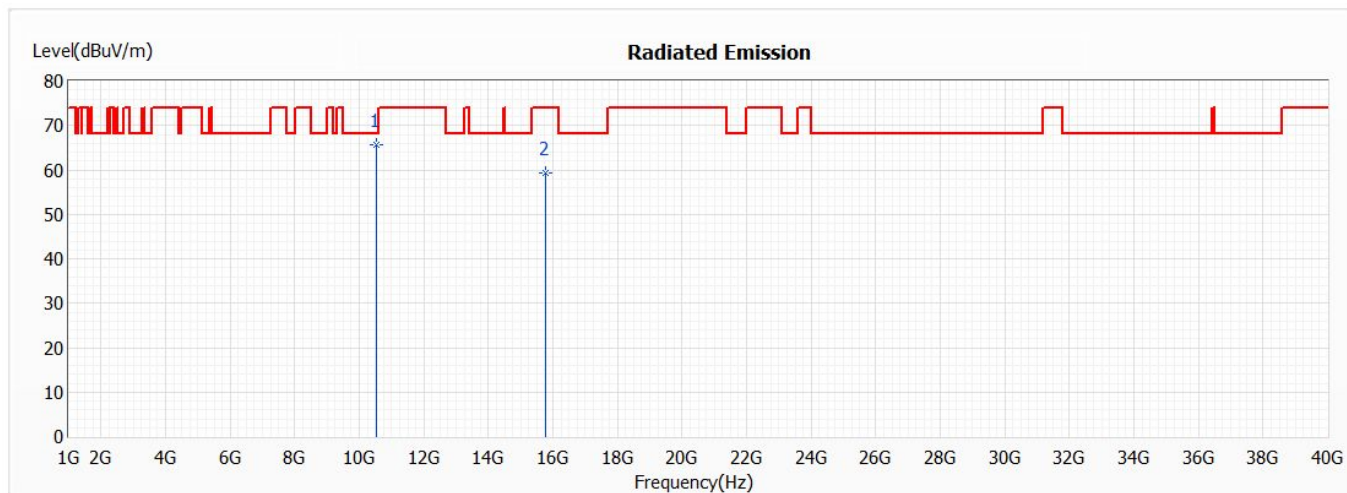


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	10520.000	65.66	68.22	-2.56	59.91	5.75	PK
2	15780.000	59.34	74.00	-14.66	48.36	10.98	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5260MHz)
 Test Date : 2021/06/03

Vertical

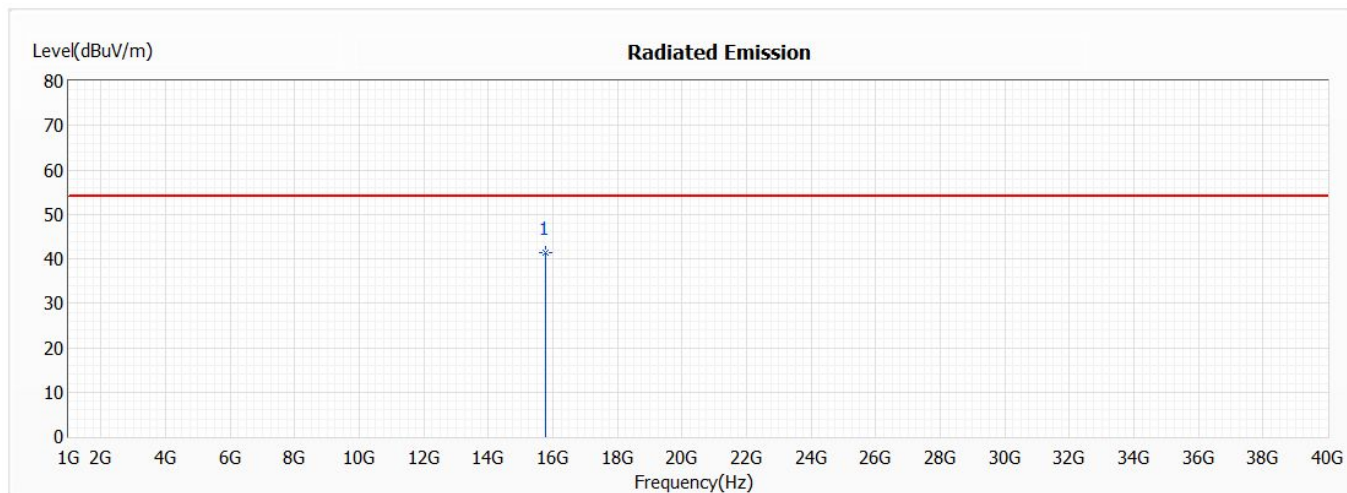


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15780.000	41.35	54.00	-12.65	30.37	10.98	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5300MHz)
 Test Date : 2021/06/03

Horizontal

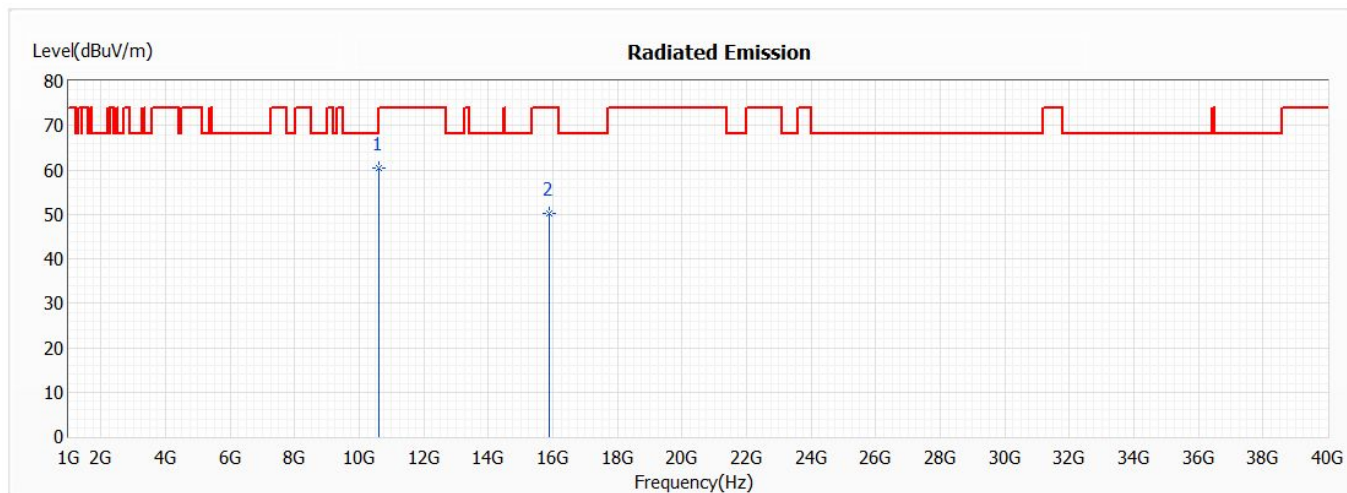


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	10600.000	60.51	74.00	-13.49	54.65	5.86	PK
2	15900.000	50.26	74.00	-23.74	39.14	11.12	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5300MHz)
 Test Date : 2021/06/03

Horizontal

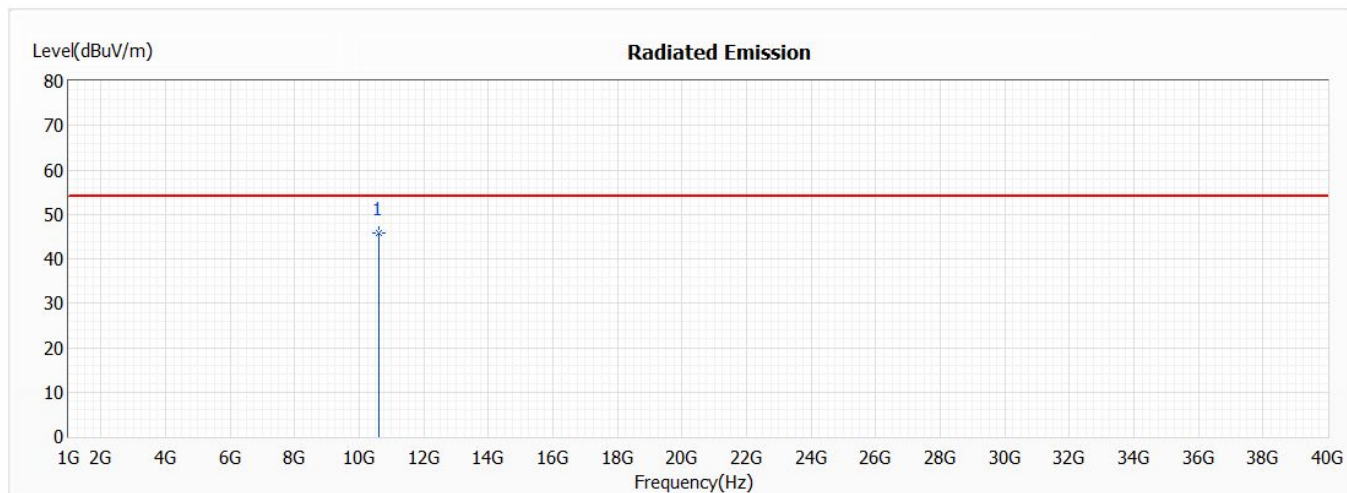


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	10600.000	45.88	54.00	-8.12	40.02	5.86	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5300MHz)
 Test Date : 2021/06/03

Vertical

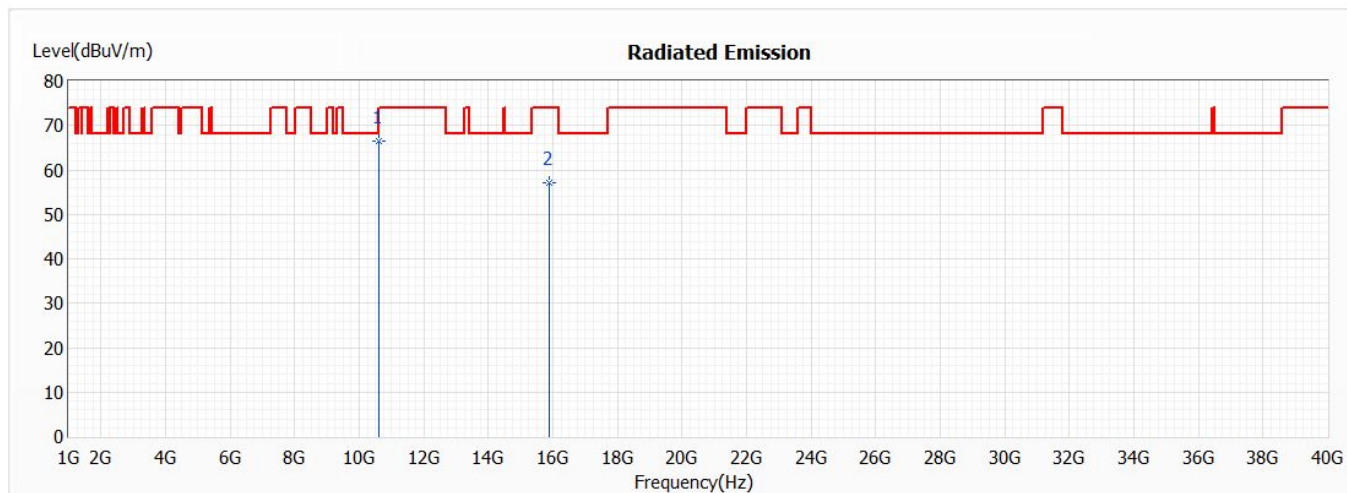


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	10600.000	66.35	74.00	-7.65	60.49	5.86	PK
2	15900.000	57.12	74.00	-16.88	46.00	11.12	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5300MHz)
 Test Date : 2021/06/03

Vertical

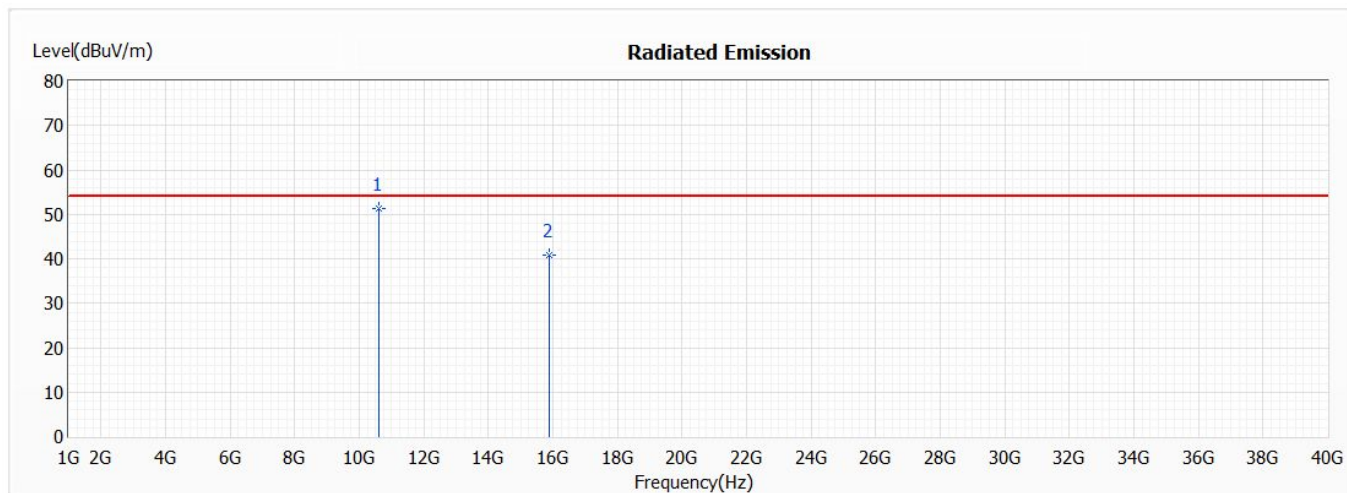


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	10600.000	51.21	54.00	-2.79	45.35	5.86	AV
2	15900.000	40.76	54.00	-13.24	29.64	11.12	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5320MHz)
 Test Date : 2021/06/03

Horizontal

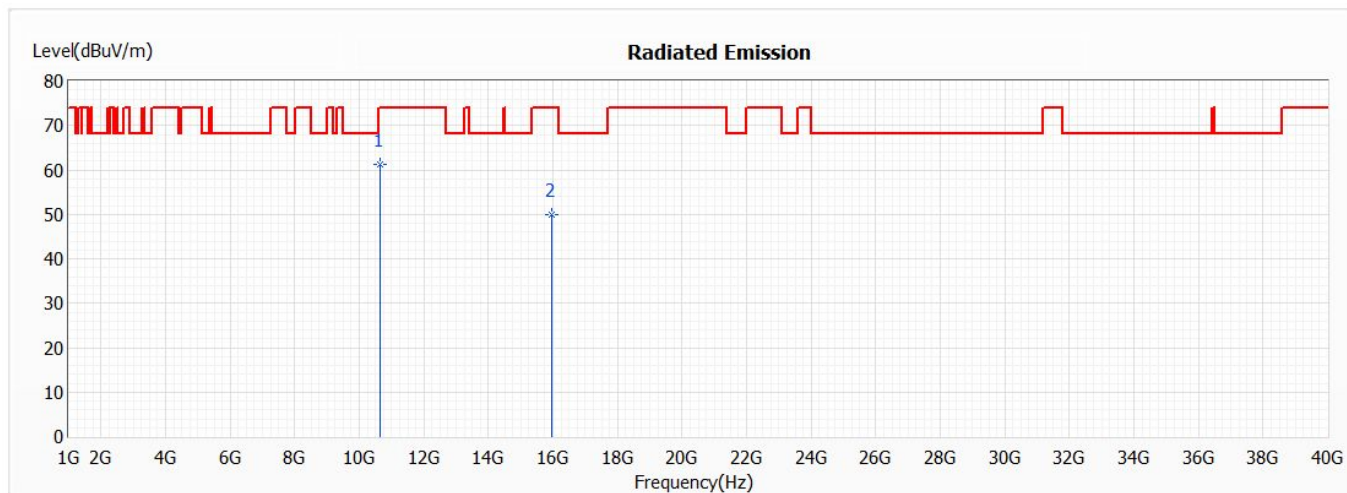


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	10640.000	61.22	74.00	-12.78	55.36	5.86	PK
2	15960.000	49.87	74.00	-24.13	38.57	11.30	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5320MHz)
 Test Date : 2021/06/03

Horizontal

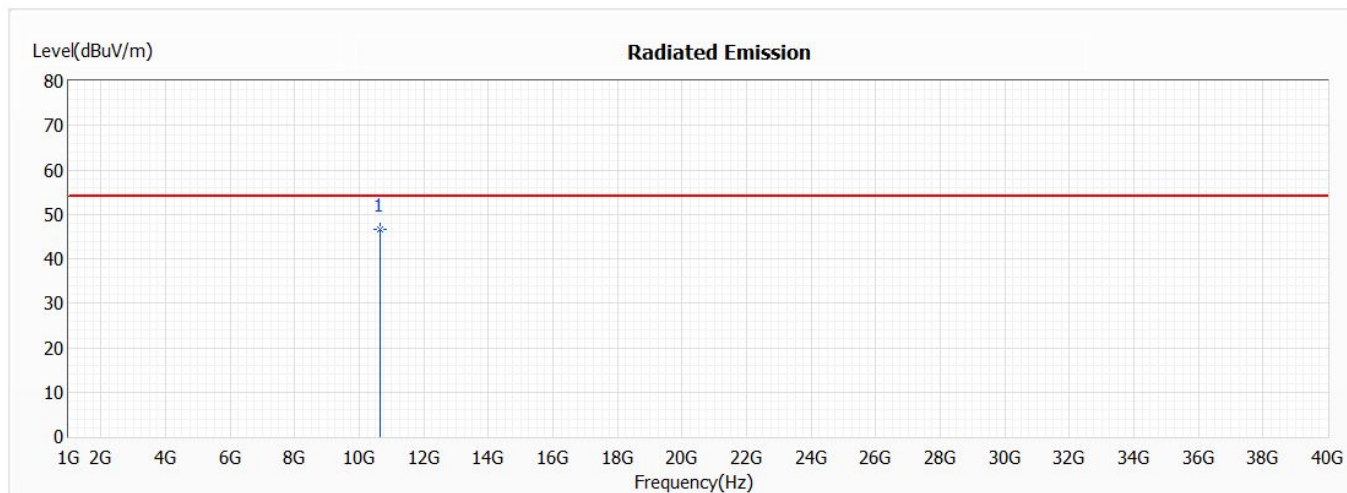


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	10640.000	46.54	54.00	-7.46	40.68	5.86	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WCDMA/LTE/5G Mobile Phone
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5320MHz)
 Test Date : 2021/06/03

Vertical

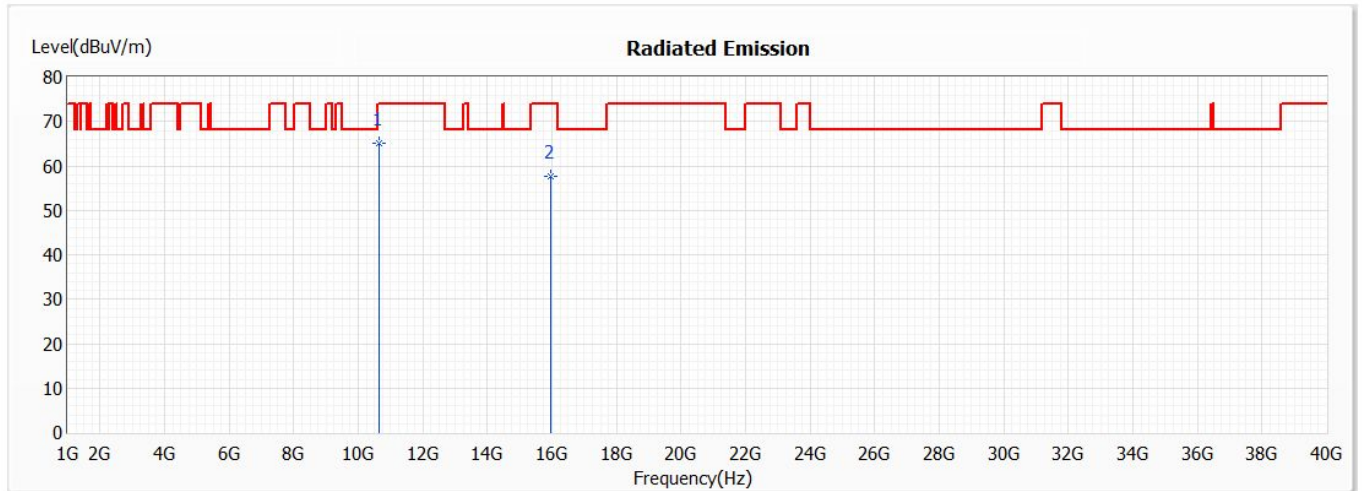

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	10640.000	65.22	74.00	-8.78	59.36	5.86	PK
2	15960.000	57.63	74.00	-16.37	46.33	11.30	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.