

## FCC EVALUATION REPORT FOR CERTIFICATION

Manufacturer : Hanatech Co., Ltd.

Date of Issue: February 14, 2005

Hana-B/D, 80-1, Songjung -dong, Gumi-si,

Test Report S/N : GETEC-E3-05-012

Gyeongsangbuk-do, Korea

Test Site : Gumi College EMC Center

Attn : Mr. Woo-jun Hwang / Senior Engineer

FCC ID

**RZXULTRASCAN**

APPLICANT

**Hanatech Co., Ltd.**

Rule Part(s) : FCC Part 15 Subpart B

Equipment Class : Class B computing device peripheral

EUT Type : Automotive Handheld Scantool

Model No. : ULTRASCAN plus, ULTRA SCAN, ULTRA-SCAN  
DCN PRO plus, DCN PRO II, SCAN-PRO, AM PRO 10

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992.


I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,



Jea-Woon Choi, Chief Engineer  
GUMI College EMC center

Reviewed by,



Tae-Sig Park, Technical Manager  
GUMI College EMC center

## CONTENTS

<b>1. SCOPE.....</b>	<b>3</b>
<b>2. INTRODUCTION.....</b>	<b>4</b>
<b>3. TEST CONDITIONS &amp; EUT INFORMATION.....</b>	<b>5</b>
<b>3.1 DESCRIPTION OF EUT.....</b>	<b>5</b>
<b>3.2 SUPPORT EQUIPMENT USED.....</b>	<b>6</b>
<b>4. DESCRIPTION OF TESTS.....</b>	<b>7</b>
<b>4.1 RADIATED EMISSIONS .....</b>	<b>7</b>
<b>4.2 CONDUCTED EMISSION .....</b>	<b>7</b>
<b>5. RADIATED EMISSION .....</b>	<b>8</b>
<b>5.1 OPERATING ENVIRONMENT .....</b>	<b>8</b>
<b>5.2 TEST SET-UP.....</b>	<b>8</b>
<b>5.3 MEASUREMENT UNCERTAINTY .....</b>	<b>8</b>
<b>5.4 LIMIT .....</b>	<b>9</b>
<b>5.5 TEST EQUIPMENT USED .....</b>	<b>9</b>
<b>5.6 TEST DATA FOR RADIATED EMISSION .....</b>	<b>10</b>
<b>6. SAMPLE CALCULATIONS.....</b>	<b>12</b>
<b>6.1 EXAMPLE 1 :.....</b>	<b>12</b>
<b>6.2 EXAMPLE 2 :.....</b>	<b>12</b>
<b>7. RECOMMENDATION &amp; CONCLUSION.....</b>	<b>13</b>
<b>APPENDIX A – ATTESTATION STATEMENT</b>	
<b>APPENDIX B – ID SAMPLE LABEL &amp; LOCATION</b>	
<b>APPENDIX C – BLOCK DIAGRAM</b>	
<b>APPENDIX D – TEST SET-UP PHOTOGRAPHS</b>	
<b>APPENDIX E – EXTERNAL PHOTOGRAPHS</b>	
<b>APPENDIX F – INTERNAL PHOTOGRAPHS</b>	
<b>APPENDIX G – USER'S MANUAL</b>	

## 1. Scope

*Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.*

**Responsible Party:** Hanatech Co., Ltd.

**Contact Person:** Mr. Woo-jun Hwang / Senior engineer

**Manufacturer:** Hana-B/D, 80-1, Songjung-dong, Gumi-si, Gyeongsangbuk-do, Korea  
Tel No.: +82-54-454-9009

- **FCC ID** RZXULTRASCAN
- **EUT Type** Automotive Handheld Scantool
- **Model No.** ULTRASCAN plus, ULTRA SCAN, ULTRA-SCAN  
DCN PRO plus, DCN PRO II, SCAN-PRO, AM PRO 10
- **Rule Part(s)** FCC Part 15 Subpart B
- **Test Procedure(s)** ANSI C63.4 (1992)
- **Standard(s)** EN55022:1998 (CISPR22:1997)
- **Dates of Test** January 28, 2005
- **Place of Test** Gumi College EMC Center
- **Test Report No.** GETEC-E3-05-012

## 2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ASNI C63.4-1992) was used in determining radiated and conducted emissions emanating from **Hanatech Co., Ltd. Automotive Handheld Scantool (Model No.: ULTRASCAN plus)**

These measurement tests were conducted at **Gumi College EMC Center**.

The site address is 407, Bugok-Dong, Gumi-City, Gyeongsangbuk-Do, Korea

This test site is one of the highest point of Gumi 1 college at about 200 kilometers away from Seoul city and 40 kilometers away from Daejeon city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufacturers. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 on October 19, 1992

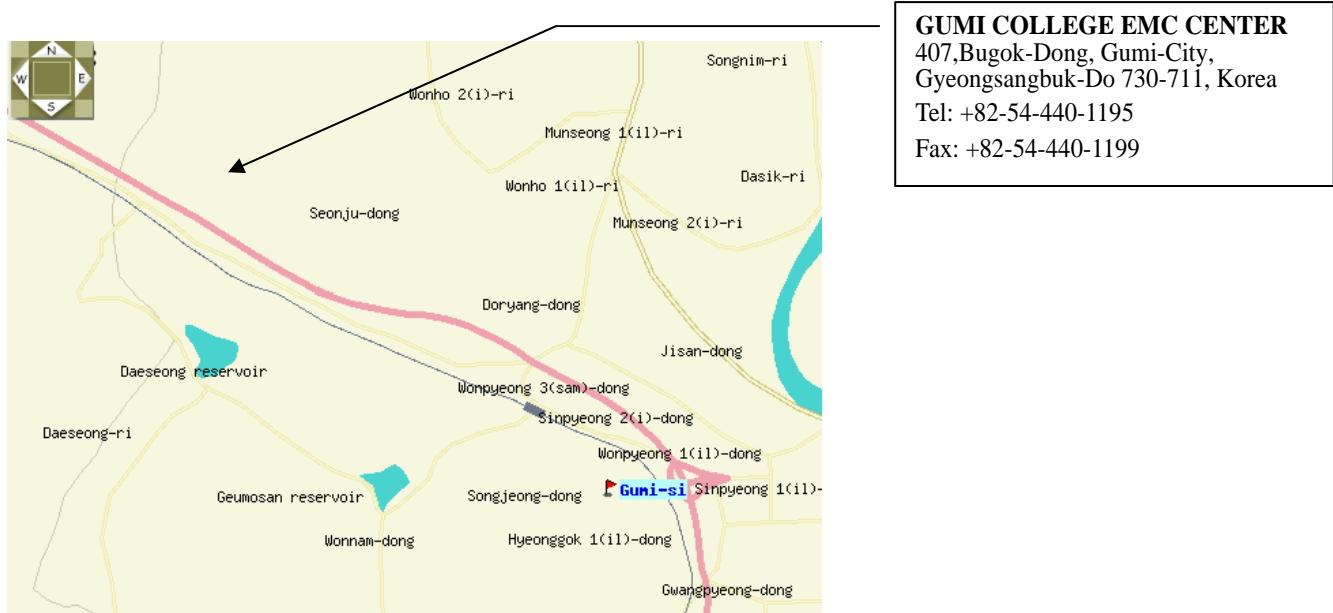


Fig 1. The map above shows the Gumi College in vicinity area.

### 3. Test Conditions & EUT Information

#### 3.1 Description of EUT

The Equipment Under Test (EUT) is the Hanatech Co., Ltd. Automotive Handheld Scantool (Model No.: ULTRASCAN plus) **FCC ID: RZXULTRASCAN**

*EUT is designed for diagnostic use of vehicle and it can be controlled by PC with USB communication.*

<b>Test mode</b>	Download mode Stand by mode
<b>CPU</b>	16bit, 33MHz
<b>RAM</b>	1Mbyte (SRAM)
<b>Program Cartridge</b>	128Mbytes built-in Flash Memory
<b>Memory</b>	
<b>Display</b>	320*240 Monochrome Graphic LCD with Back Light
<b>Key Pad</b>	24 Membrane keys, embossing type
<b>Com Port</b>	USB and RS232
<b>Power</b>	DC 8~18V, 800mA or higher
<b>Cable(s)</b>	1.5m DC power cable Connected to the EUT and DC power supply 2.6m Data link cable Open 1.5m Scope adaptor cable Connected to the EUT and probe 1.7m Probe cable Connected to the scope adaptor 1.8m USB cable Connected to the EUT and PC
<b>Dimensions</b>	30.2×17.2×7.6cm
<b>Weight</b>	1.6Kg

**3.2 Support Equipment used**

<b>PC</b>	COMPAQ PD1075 S/N: 7041JC8F0245 FCC ID: DoC	Connected to the EUT and Peripheral equipments
<b>Printer</b>	H.P Deskjet 970cx S/N: MY9B01F1FG FCC ID: DoC	Connected to the parallel port of PC
<b>Serial Mouse</b>	Microsoft 61402 S/N: 00696998 FCC ID: C3KKS3	Connected to the serial port of PC
<b>PS/2 Key-board</b>	COMPAQ 166516-AD6 S/N: B13BBOR39I006D FCC ID: AQ6-23K15	Connected to the PS/2 port of PC
<b>Monitor</b>	COMPAQ V700 S/N: H2GK400032 FCC ID: N/A	Connected to the PC
<b>DC power supply</b>	Agilent 6544A S/N: MY40000116 FCC ID: N/A	Connected to the DC power supply port

*See “Appendix D – Test Setup Photographs” for actual system test set-up*

## 4. Description of tests

### 4.1 Radiated Emissions

Preliminary measurements were conducted 3m semi anechoic chamber using broadband antennas to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The technology configuration, mode of operation and turntable azimuth with respect to antenna was note for each frequency found.

The spectrum was scanned from 30 to 1000MHz using bicornical log antenna (Schwarzbeck, VULB9160).

Final measurements were made outdoors at 10m-test range using bicornical antenna (R&S, HK116), log-periodic antenna (R&S, HL223).

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was re-examined and investigated using EMI test receiver. (ESCS30)

The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120KHz.

The EUT, support equipment and interconnecting cables were reconfigured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8m high non-metallic 1.0×1.5 meter table.

The turntable containing the test sample was rotated; the antenna height was varied 1 to 4 meter and stopped at the azimuth or height producing the maximum emission. Each EME reported was calibrated using the R/S signal generator

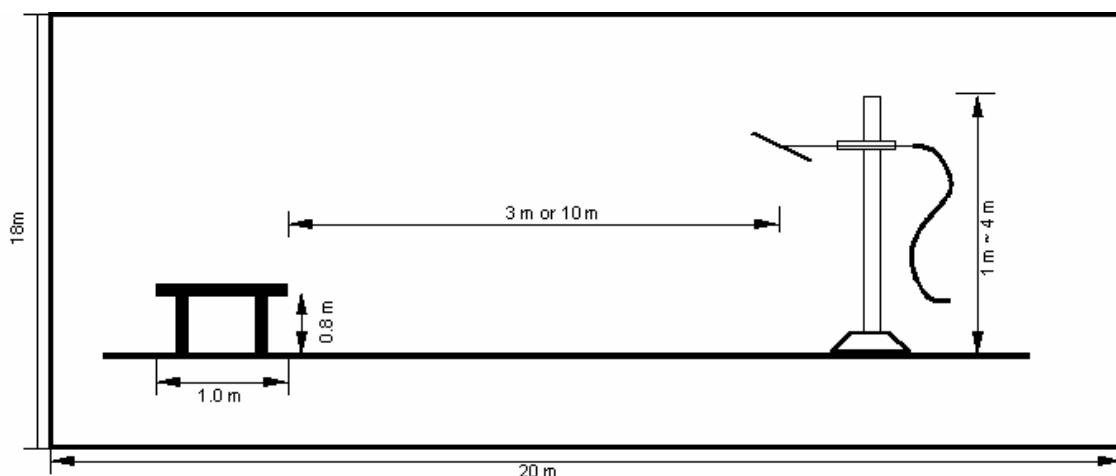


Fig 3. Dimensions of Open Site Test Area

### 4.2 Conducted Emission

This equipment is supplied DC power from the car battery. Therefore, no conducted limits apply for this equipment.

## 5. Radiated Emission

### 5.1 Operating environment

Temperature : 1 °C  
 Relative humidity : 40 %

### 5.2 Test set-up

A preliminary scan with peak mode was performed in the semi anechoic chamber and found frequency for open area test site.

The formal radiated emission was measured at 10m-distance open area test site.

The EUT was placed on a non-conductive turntable approximately 0.8 meters above the ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 and 4.0 meters in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

### 5.3 Measurement uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95%.

Contribution	Probability Distribution	Uncertainty (dB)			
		Biconical Ant.		Log-periodic Ant.	
		3m	10m	3m	10m
Ambient signal					
Antenna factor calibration	Normal (k=2)	1.00	1.00	1.00	1.00
Receiver specification	Rectangular	1.00	1.00	1.00	1.00
Antenna directivity	Rectangular	0.50	0.00	3.00	0.50
Antenna phase center variation	Rectangular	0.00	0.00	1.00	0.20
Antenna factor frequency interpolation	Rectangular	0.25	0.25	0.25	0.25
Measure distance variation	Rectangular	0.60	0.40	0.60	0.40
Site imperfections	Rectangular	2.83	-2.94	-1.96	-2.96
Mismatch					
Receiver VRC : $\Gamma_I = 0.09$	U-shaped	0.33 -0.35	0.33 -0.35	0.33 -0.18	0.33 -0.18
Antenna VRC : $\Gamma_g = 0.43(B_i) 0.23(L_p)$					
Uncertainty limits $20\log(1 \pm \Gamma_I \Gamma_g)$					
System repeatability	Std Deviation	0.07	0.05	0.06	0.10
Cable loss calibration	Normal (k=2)	0.20	0.20	0.20	0.20
Combined standard uncertainty $U_c(y)$	Normal	1.88 -1.88	1.90 -1.90	2.33 -2.32	1.94 -1.93
Extended uncertainty U	Normal (k=2)	3.77 -3.77	3.80 -3.80	4.65 -4.63	3.87 -3.85

**5.4 Limit**

Frequency (MHz)	FCC Limit @ 3m. Quasi-Peak dB ( $\mu$ V/m)	CISPR Limit @ 10m. Quasi-Peak dB ( $\mu$ V/m)
30 – 88	40.0	30.0
88 – 216	43.5	30.0
216 – 230	46.0	30.0
230 – 960	46.0	37.0
960 – 1000	54.0	37.0
> 1000	54.0	No specified limit

\*Limit extrapolated 20dB / decade

**5.5 Test equipment used**

<b>Model Number</b>	<b>Manufacturer</b>	<b>Description</b>	<b>Serial Number</b>	<b>Calibrated Date</b>
■ - ESI	Rohde & Schwarz	EMI test receiver	830482/010	12. 17. 2004
■ - ESCS30	Rohde & Schwarz	EMI test receiver	839809/003	12. 17. 2004
■ - HK116	Rohde & Schwarz	Biconical antenna	826861/018	11. 19. 2004
■ - HL223	Rohde & Schwarz	Log-periodic antenna	829228/011	11. 19. 2004
■ - BBHA9120D	Schwarzbeck	horn antenna	207	11. 02. 2004
■ - HD100	HD GmbH	Position Controller	100/692/01	NCR
■ - DS415S	HD GmbH	Turntable	415/657/01	NCR
■ - MA240	HD GmbH	Antenna Master	240/565/01	NCR

### 5.6 Test data for radiated emission


- Test Date : January 28, 2005
- Resolution bandwidth : 120kHz
- Frequency range : 30MHz ~ 1000MHz
- Measurement : 10m
- Power Source : DC 12V

#### Operating condition: Stand by mode

Frequency (MHz)	Reading (dBuV)	Ant. Pol. (H/V)	Ant. Factor(dB/m)	Cable Loss	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
39.96	10.2	V	11.02	1.80	23.0	30.0	7.0
64.98	11.7	V	8.51	2.15	22.4	30.0	7.6
129.96	5.7	V	12.01	3.14	20.9	30.0	9.1
159.96	3.2	H	13.75	3.71	20.7	30.0	9.3
189.96	3.4	H	13.39	3.75	20.5	30.0	9.5
210.00	3.4	H	14.18	4.02	21.6	30.0	8.4
324.96	7.4	H	13.98	5.52	26.9	37.0	10.1
334.98	5.8	H	14.42	5.69	25.9	37.0	11.1
354.96	2.2	H	14.57	5.68	22.5	37.0	14.5
519.95	1.2	V	18.36	6.86	26.4	37.0	10.6

Comment: Pol: H(Horizontal), V(Vertical)

[Quasi- peak detector mode]

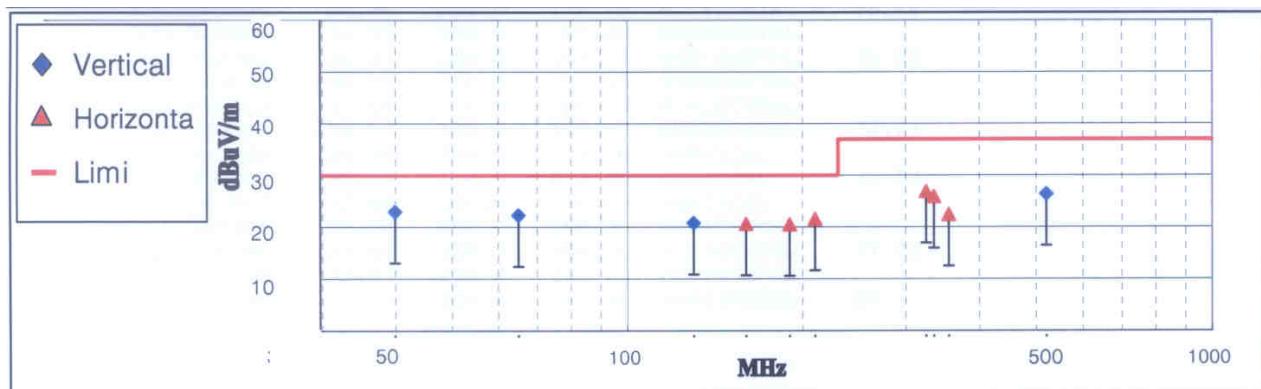


< Fig 4. Radiated emission result \_ Stand by mode >

## Operating condition: Download mode

Frequency (MHz)	Reading (dBuV)	Ant. Pol. (H/V)	Ant. Factor(dB/m)	Cable Loss	Emission Level(dBuV/m)	Limits (dBuV/m)	Margin (dB)
36.56	10.7	V	11.75	1.80	24.2	30.0	5.8
64.98	11.8	V	8.51	2.15	22.5	30.0	7.5
109.98	9.8	V	10.36	2.80	23.0	30.0	7.0
159.97	5.5	H	13.75	3.71	23.0	30.0	7.0
179.98	6.7	H	14.51	3.94	25.1	30.0	4.9
209.94	4.4	H	14.18	4.02	22.6	30.0	7.4
324.97	5.9	V	13.98	5.52	25.4	37.0	11.6
354.96	6.2	V	14.57	5.68	26.5	37.0	10.5
400.02	3.4	V	15.75	6.10	25.3	37.0	11.7
594.95	2.2	V	18.58	7.57	28.4	37.0	8.6
762.98	1.3	V	21.83	8.34	31.5	37.0	5.5
863.96	1.1	H	21.73	8.94	31.8	37.0	5.2

Comment: Pol: H(Horizontal), V(Vertical)

[Quasi- peak detector mode]

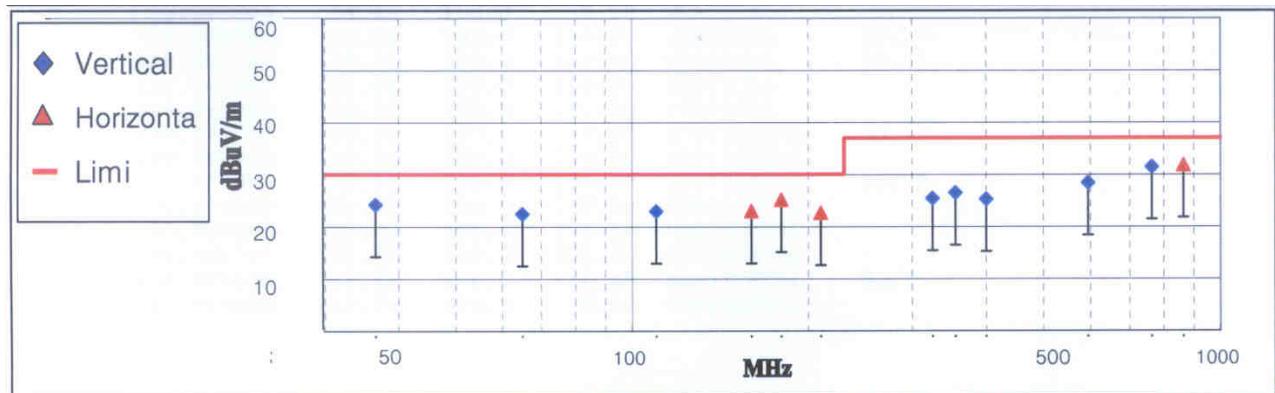

&lt;Fig 5. Radiated emission result \_ Download mode &gt;

## 6. Sample Calculations

$$\text{dB}\mu\text{V} = 20 \log_{10}(\mu\text{V}/\text{m})$$

$$\text{dB}\mu\text{V} = \text{dBm} + 107$$

$$\mu\text{V} = 10^{(\text{dB}\mu\text{V}/20)}$$

### 6.1 Example 1 :

#### ■ 20.3 MHz

Class B Limit	=	250 $\mu\text{V}$	=	48 dB $\mu\text{V}$
Reading	=	- 67.8 dBm(Calibrated level)		
Convert to dB $\mu\text{V}$	=	- 67.8 dBm + 107 = 39.2 dB $\mu\text{V}$		
$10^{(39.2\text{dB}\mu\text{V}/20)}$	=	91.2 dB $\mu\text{V}$		
Margin	=	39.2 - 48	=	-8.8
	=	8.8 dB below Limit		

### 6.2 Example 2 :

#### ■ 66.7 MHz

Class B Limit	=	100 $\mu\text{V}/\text{m}$	=	40.0 dB $\mu\text{V}/\text{m}$
Reading	=	- 76.0 dBm(Calibrated level)		
Convert to dB $\mu\text{V}/\text{m}$	=	- 76.0 dBm + 107 = 31.0 dB $\mu\text{V}/\text{m}$		
Antenna Factor + Cable Loss	=	5.8 dB		
	Total	=	36.8 dB $\mu\text{V}/\text{m}$	
Margin	=	36.8 - 40.0	=	-3.2
	=	3.2 dB below Limit		

## 7. Recommendation & conclusion

The data collected shows that the Gumi College EMC Center.

**Hanatech Co., Ltd. Automotive Handheld Scantool (Model No.: ULTRASCAN plus)** was complies with § 15.109 of the FCC Rules.