

Straubing, March 18, 2009

**T E S T - R E P O R T**

**No. 50530-40264 (Edition 3)**

**for**

**MKS 03 315MHz**

**Remote Control Transmitter**

**Applicant:** ELDAT Gesellschaft für Elektronik und  
Datentechnik mbH

**Test Specification:** FCC Code of Federal Regulations,  
Part 15 Subpart C, Section 15.231

---

**Note:**

The test data of this report relate only to the individual item which has been tested.  
This report shall not be reproduced except in full extent without the written approval of  
the testing laboratory.

---

## Table of Contents

1. Administrative Data.....	3
2. Identification of Test Laboratory .....	4
3. Operation Mode of EUT.....	5
4. Configuration .....	6
5. Measuring Methods .....	7
5.1. Field Strength of Emissions, Prescans in a fully-anechoic room (30 MHz – 1 GHz) .....	9
5.2. Fieldstrength of Emissions, Measurement at Open Area Test Site (30 MHz – 1 GHz) .....	10
5.3. Fieldstrength of Emissions above 1 GHz .....	11
6. Photographs Taken During Testing.....	12
7. List of Measurements .....	16
8. Referenced Regulations .....	24
Charts taken during testing .....	26

## 1. Administrative Data

<b>Test item (EUT)</b>	
Type designation	MKS 03 315 MHz
Serial number(s):	001
Type of equipment:	Remote Control Transmitter
Parts/accessories:	---
FCC-ID:	
<b>Technical data</b>	
Frequency range	N/A
Operational frequency	315 MHz
Type of modulation	10K0A1D
Pulse frequency	N/A
Pulse width	N/A
Antenna	Integrated
Power supply	2 x 3 V lithium battery supply
<b>Applicant:</b> (full address)	
	Eldat gmbh Im Gewerbepark 14 D 15711 Zeesen Germany
Contract identification:	---
Contact person:	Mr. Klaus Puppel
Manufacturer:	Eldat GmbH
<b>Application details</b>	
Receipt of EUT:	15 April 2004
Date of test:	April 2004 February 2009 (Periodic Operation Requirement)
Note:	
Responsible for testing:	Mr. Martin Steindl
Responsible for test report:	Mr. Martin Steindl

## 2. Identification of Test Laboratory

DETAILS OF THE TEST LABORATORY	
COMPANY NAME:	Senton GmbH EMI/EMC Test Center
ADDRESS:	Aeussere Fruehlingsstrasse 45 D-94315 Straubing Germany
LABORATORY ACCREDITATION:	DAR-Registration No. TTI-P-G 062/94-01
FCC TEST SITE LISTING	90926
INDUSTRY CANADA TEST SITE REGISTRATION	IC 3050
NAME FOR CONTACT PURPOSES:	Mr. Johann Roidt
TELEPHONE: (+49) (0)9421 5522-0	FAX: (+49) (0)9421 5522-99

PERSONNEL INVOLVED IN THIS TEST REPORT	
LABORATORY MANAGER:	 Mr. Johann Roidt
RESPONSIBLE FOR TESTING:	 Mr. Martin Steindl
RESPONSIBLE FOR TEST REPORT:	Mr. Martin Steindl

SUMMARY OF TEST RESULTS	
The tested sample complies with the requirements set forth in the <b>FCC Code of Federal Regulations</b> <b>Part 15, Subpart C, Section 15.231</b>	

### **3. Operation Mode of EUT**

While one button is pressed, the transmitter continuously sends the corresponding datagram. When the button is released, the transmitter stops working instantly.

#### 4. Configuration

<b>Configuration of the EUT</b>
Not applicable


<b>Cables connected to the EUT</b>
Not applicable

<b>Peripheral devices connected to the EUT</b>
Not applicable

## 5. Measuring Methods

### 5.1. Radiated Emission Measurement 9 kHz to 30 MHz

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.215(b) and 15.231(b)(3) IC RSS-210 Issue 7, section A1.1.2(b)
Guide:	ANSI C63.4
<p>Radiated emission in the frequency range 9 kHz to 30 MHz is measured using an active loop antenna. First the whole spectrum of emission caused by the equipment is recorded at a distance of 3 meters in a fully or semi anechoic room with the detector of the spectrum analyzer or EMI receiver set to peak. This configuration is also used for recording the spectrum of intentional radiators.</p> <p>Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.</p> <p>EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>If worst case emission of the EUT cannot be recorded with EUT in standard position and loop antenna in vertical polarization the EUT (or the radiating part of the EUT) is rotated by 90 degrees instead of changing the loop antenna to horizontal polarization. This procedure is selected to minimize the influence of the environment (e.g. effects caused by the floor especially with longer distances).</p> <p>Final measurement is performed at a test distance D of 30 meters using an open field test site. In case the regulation requires testing at other distances, the result is extrapolated by either making measurements at an additional distance D of 10 meters to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). In cases of very low emissions measurements are performed at shorter distances and results are extrapolated to the required distance.</p> <p>The provisions of CFR 47 Part 15 sections 15.31(d) and (f)(2) apply. According to CFR 47 Part 15 section 15.209(d) final measurement is performed with detector function set to quasi-peak except for the frequency bands 9 to 90 kHz and 110 to 490 kHz where, for non-pulsed operation, average detector is employed.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35©. If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p>	

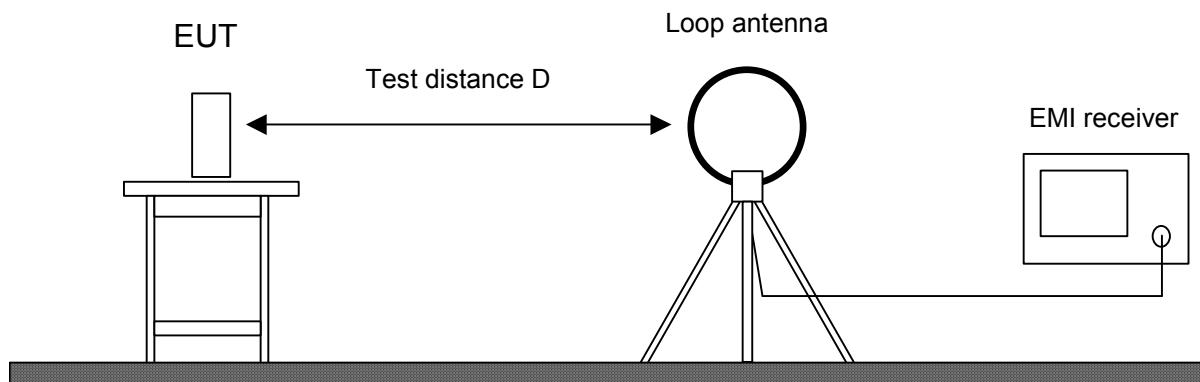

Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/>	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
<input type="checkbox"/>	EMI test receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
<input checked="" type="checkbox"/>	Test receiver	ESHS 10	860043/016	Rohde & Schwarz
<input type="checkbox"/>	Preamplifier	CPA9231A	3393	Schaffner
<input checked="" type="checkbox"/>	Loop antenna	HFH2-Z2	882964/1	Rohde & Schwarz
<input checked="" type="checkbox"/>	Fully anechoic room	No. 2	1452	Albatross Projects
<input type="checkbox"/>	Semi-anechoic room	No. 3	1453	Siemens
<input checked="" type="checkbox"/>	Open field test site	EG 1	1450	Senton


## 5.2. Field Strength of Emissions, Prescans in a fully-anechoic room (30 MHz – 1 GHz)

Rules and Specifications:	Sections 15.109 & 15.231
Guide:	ANSI C63.4 1997

### Measurement Procedure:

Radiated emissions are measured over the frequency range from 30 MHz to 1 GHz.

Measurements were made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution bandwidth set to 100 kHz. All tests were performed at a test-distance of 3 meters. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.

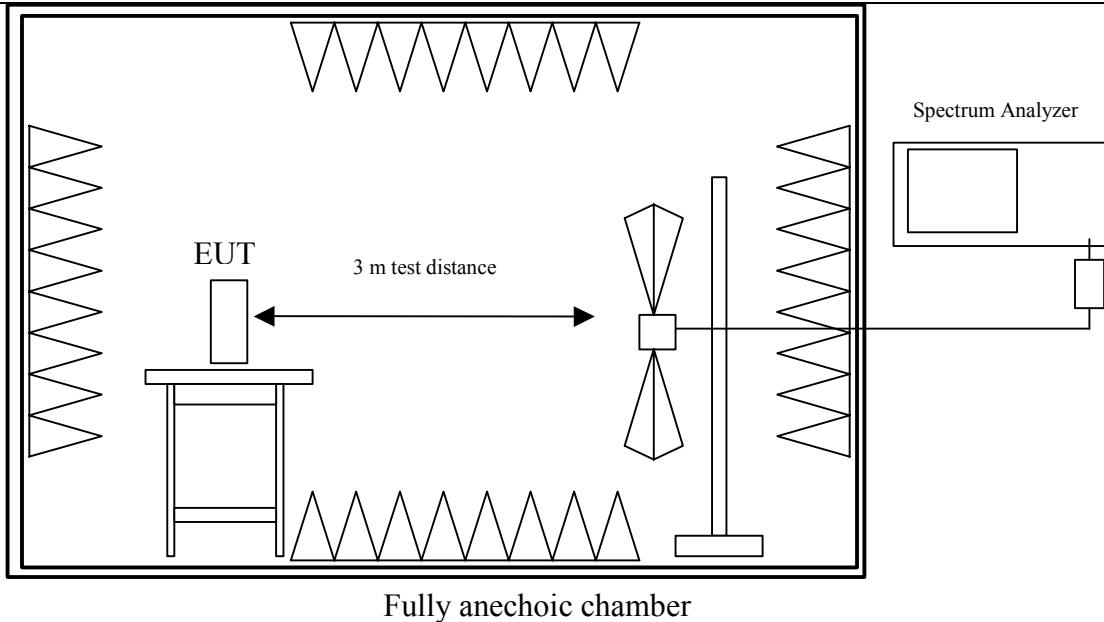

Fully anechoic chamber

### Test instruments used:

No.	Type	Model	Serial Number	Manufacturer
01	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
113	Preamplifier	CPA9231A	3393	Schaffner
141	Biconical antenna	HK 116	829708/006	Rohde & Schwarz
143	Log. periodic antenna	3147	9112-1054	EMCO
003	Fully anechoic room	No. 2	1452	Albatross Projects

### 5.3. Fieldstrength of Emissions, Measurement at Open Area Test Site (30 MHz – 1 GHz)


Rules and Specifications:	Sections 15.109 & 15.231
Guide:	ANSI C63.4 1997

#### Measurement Procedure:

##### Measurement Procedure:

For final testing an open-area test-side was used. Radiated emissions are measured over the frequency range from 30 MHz to 1 GHz.

Measurements were made in both the horizontal and vertical planes of polarisation at a open area test side using a spectrum analyser with the detector function set to CISPR. All test were performed at a test distance of 3 meters. During the tests the EUT is rotated all around, and the receiving-antenna is rased and lowered from 1m to 4m to find the maximum levels of emissions. The cables and equipment were placed and moved within the range of position likely to find their maximum emissions.

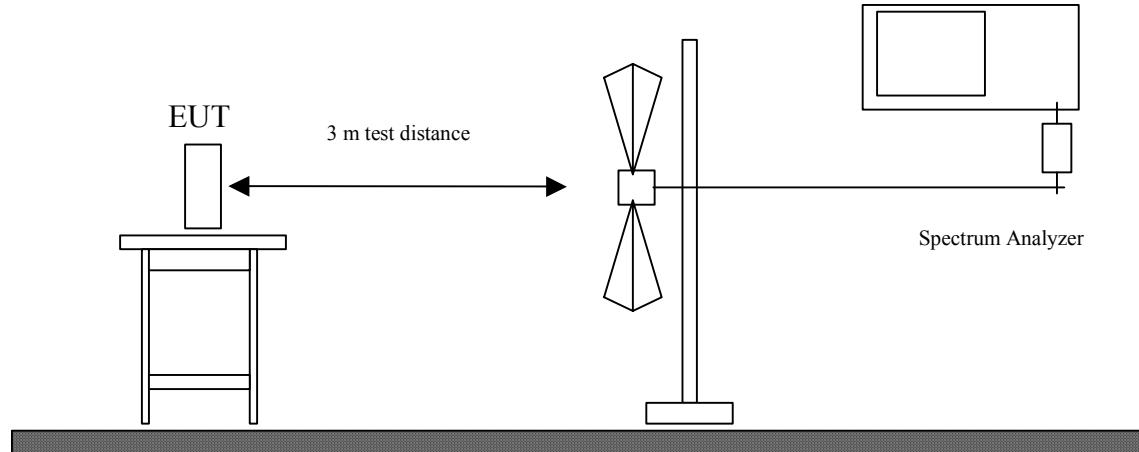

#### Test instruments used:

No.	Type	Model	Serial Number	Manufacturer
01	EMI Receiver	ESVP	881414/009	Rohde & Schwarz
141	Biconical antenna	HK 116	829708/006	Rohde & Schwarz
143	Log. periodic antenna	3147	9112-1054	EMCO
003	Open Field Test Site	No. 1	N/A	Senton

## 5.4. Fieldstrength of Emissions above 1 GHz

Rules and Specifications:	Sections 15.109 & 15.209
Guide:	ANSI C63.4 1997

### Measurement Procedure:


Radiated emissions are measured in the frequency range 1 GHz to the 10<sup>th</sup> harmonic of the maximum frequency of the EUT.

Resolution and video bandwidth of the spectrum analyzer are set to 1 MHz. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. Additional measurements are performed at critical frequencies with reduced span.

EUT is rotated all around and receiving antenna is raised and lowered to find the maximum levels of emission. The cables and equipment are placed and moved within the range of position likely to find their maximum emissions.

All tests are performed in a fully-anechoic chamber with a test-distance of 3 meters.

If required preamplifiers are used for the whole frequency range. Special care is taken to avoid overload in transmit mode (using appropriate attenuators and filters if necessary).

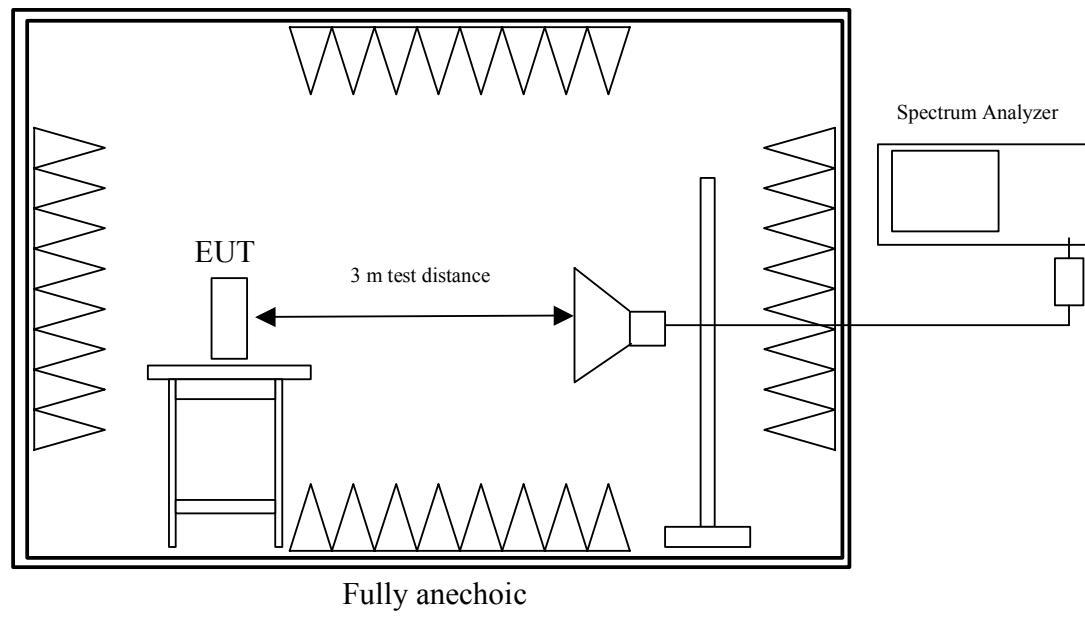


### Test instruments used:


No.	Type	Model	Serial Number	Manufacturer
01	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
143	Log. periodic antenna	3147	9112-1054	EMCO
145	Horn antenna	3115	9508-4553	EMCO
146	Horn antenna set	3160-03-09	9112-1003	EMCO
114	Preamplifier 1-8 GHz	AFS3-00100800-32-LN	847743	Miteq
115	Preamplifier 8-18 GHz	ACO/180-3530	32641	CTT
003	Fully anechoic room	No. 2	1452	Albatross Projects

## 6. Photographs Taken During Testing

**Test setup for radiated emission measurement  
(fully anechoic room)**

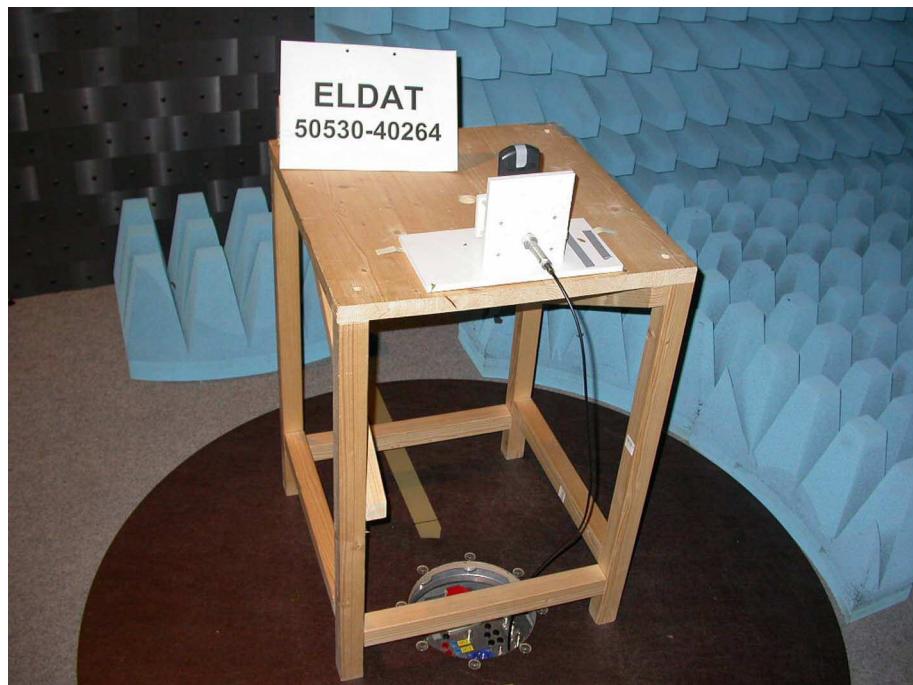

**Test setup for radiated emission measurement  
(fully anechoic room) - continued**

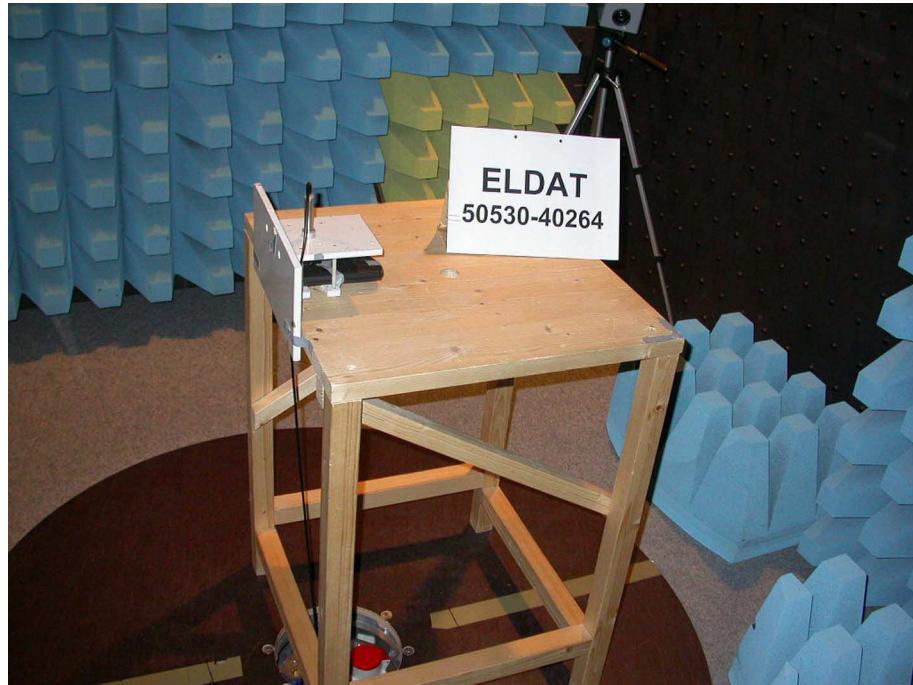

**Test setup for radiated emission measurement  
(open-area test-side)**



## 7. List of Measurements

FCC Part 15			
Section(s):	Test	Page(s)	Result
15.205	Restricted Bands		Pass
15.207	AC powerline emissions		Not Applicable
15.231 (a) (1)	Periodic operation		Pass
15.231 (b)	Duty Cycle Correction		
15.205 (b) 15.231 (b)	Radiated emission 9 kHz - 30 MHz		Passed
15.231 (b)	Field strength of emissions		Pass
15.231 ©	Bandwidth of emissions		Pass

## Periodic Operation Requirements

Rules and specifications:	CFR 47 Part 15, section 15.231(a) IC RSS-210 Issue 7, section A1.1.1
Guide:	---

Periodic operation requirements	Applicable	Declared by applicant	Test performed	Passed
The transmitter is used for				
<input type="checkbox"/> security or safety applications <input type="checkbox"/> other applications	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
The transmitter is operated				
<input type="checkbox"/> manually <input type="checkbox"/> automatically	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Periodic operation according to				
<input checked="" type="checkbox"/> CFR 47 Part 15, section 15.231(a) / IC RSS-210 Issue 7, section A1.1.1				
Only control signals are sent and there is no continuous transmission	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
A manually operated transmitter employs a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
A transmitter activated automatically ceases transmission within 5 seconds after activation	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Periodic transmissions at regular predetermined intervals are	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> not performed	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> performed with total transmission time of two seconds per hour or less (for polling or supervision transmissions to determine system integrity of transmitters used in security or safety applications)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> CFR 47 Part 15, section 15.231(e) / IC RSS-210 Issue 7, section A1.1.5				
The device is provided with a means for automatically limiting operation so that the duration of each transmission is not greater than one second and the silent period between transmissions is at least 30 times the duration of the transmission but in no case less than 10 seconds.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>


Note: Result may be based on the appropriate declaration of the applicant (i.e. no test is performed). However, in this case there is no verification by the test laboratory.



**DELTA MARKER 1**  
176 ms  
Ref 87 dB $\mu$ V

Att 10 dB

RBW 100 kHz Delta 1 [T1]  
VBW 300 kHz -49.21 dB  
SWT 6 s 176.000000 ms

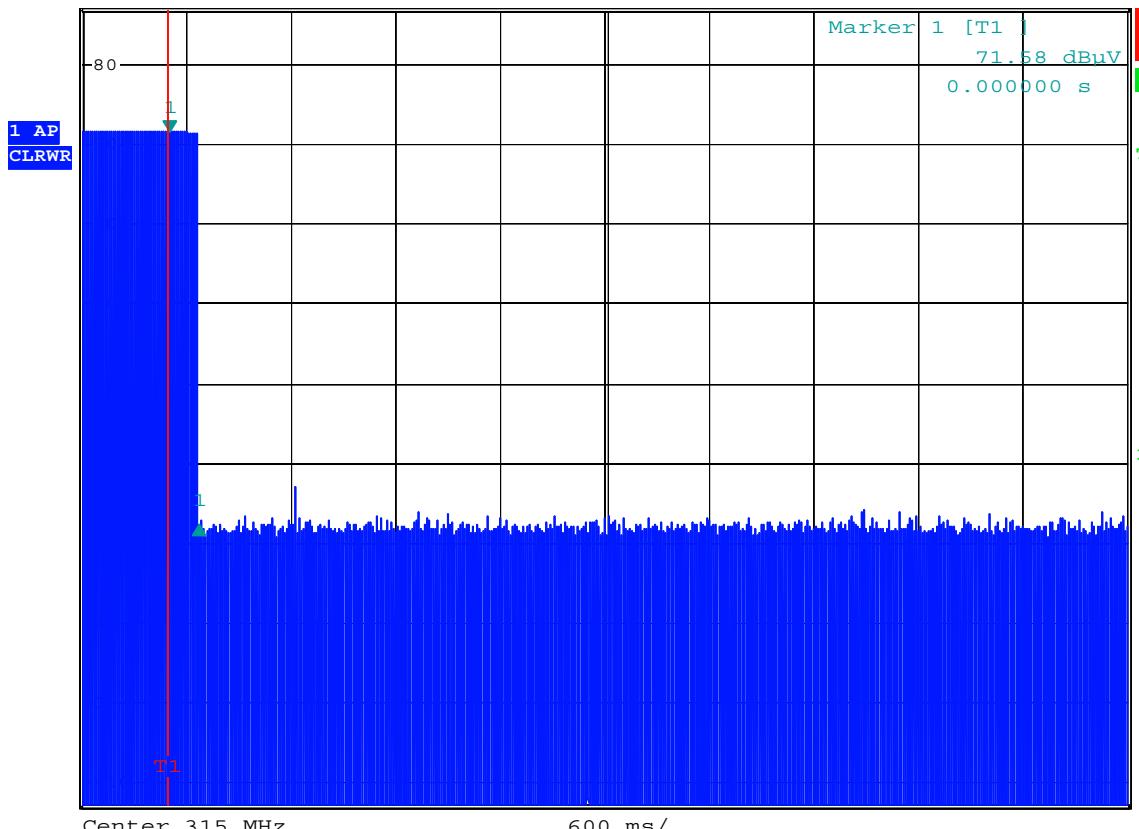

Date: 4.FEB.2009 15:01:28

---

FCC-ID:

Test Report No.: 50530-40264 (Edition 3)

## Radiated Emission Measurement 9 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, sections 15.215(b) and 15.231(b)(3)			
Guide:	ANSI C63.4			
Limit:	Frequency of Emission (MHz)	Field Strength ( $\mu$ V/m)	Field Strength (dB $\mu$ V/m)	Measurement Distance d (meters)
	0.009 - 0.490	2400/F(kHz)	67.6 - 20 · log(F(kHz))	300
	0.490 - 1.705	24000/F(kHz)	87.6 - 20 · log(F(kHz))	30
	1.705 - 30.000	30	29.5	30
Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.				

Comment:	
Date of test:	April 21, 2004
Test site:	Open field test site

Test Result:	Test passed
--------------	-------------

No emissions above noise level detected

### Sample calculation of final values:

$$\begin{aligned}
 \text{Extrapolation Factor (dB)} &= (\text{Log}(d) - \text{Log}(d_1)) \cdot \text{Extrapolation Factor (dB/decade)} \\
 \text{Final Value (dB}\mu\text{V/m)} &= \text{Reading Value } d_1 \text{ (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} \\
 &\quad + \text{Extrapolation Factor (dB)} + \text{Pulse Train Correction (dB)}
 \end{aligned}$$

Note:      Extrapol

## Field strength of emissions

Rules and Specifications:	15.231 (b) Radiated Emission Limits		
Guide:	ANSI C63.4		
Limit:	In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under Section 15.231 shall not exceed the following:		
	Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
	40.66 – 40.70	2.250	225
	70 – 130	1.250	125
	130 - 174	1.250 to 3.750**	125 to 375 **
	174 - 260	3.750	375
	260 – 470	3750 to 12.500**	375 to 1250 **
	above 470	12.500	1250

\*\* linear interpolations

Test Site:	Open Area Test Site (< 1 GHz), Fully anechoic chamber (> 1 GHz)		
Distance:	3 Meter		

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dB $\mu$ V)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
315.000	horizontal	Peak	68.6	15.8	-11.5	72.9	75.6	2.8
630.000	horizontal	Quasi-Peak	18.0	23.2		41.2	55.6	14.4
945.000	horizontal	Quasi-Peak	8.8	27.4		36.2	55.6	19.4
1168.000	vertical	Peak	15.9	25.6	-11.5	29.9	54.0	24.1
1258.000	horizontal	Peak	16.9	26.6	-11.5	31.9	54.0	22.1
1414.000	vertical	Peak	15.5	27.1	-11.5	31.1	54.0	22.9
1576.000	vertical	Peak	12.4	28.6	-11.5	29.4	54.0	24.6
1708.000	vertical	Peak	14.0	29.0	-11.5	31.5	54.0	22.5
2206.000	vertical	Peak	18.2	32.8	-11.5	39.5	54.0	14.5
2836.000	horizontal	Peak	22.6	36.1	-11.5	47.2	54.0	6.9
3154.000	horizontal	Peak	23.9	37.3	-11.5	49.7	55.6	5.9
3784.000	horizontal	Peak	20.5	39.9	-11.5	48.9	54.0	5.1

### Sample calculation of final values:

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} + \text{Pulse Train Correction (dB)}$$


Test Results:	Pass	
---------------	------	--

## Duty Cycle Correction


Rules and Specifications:	15.231 (b) (2) Limits on the Field Strength of Emissions
Guide:	ANSI C63.4
ANSI C63.4	When average detector function limits are specified for a pulse modulated transmitter, the average level of emissions may be found by measuring the peak levels of the emissions and correcting them with the duty cycle according to ANSI C64.4, section I4 (10)

$$\text{Duty Cycle Correction [dB]} = 20 \cdot \log\left(\frac{\text{Sum of the Pulse Widths}}{100ms}\right) =$$


$$= 20 \log\left(\frac{13 \cdot 0.84ms + 10 \cdot 1.56ms}{100ms}\right) = -11.53dB$$

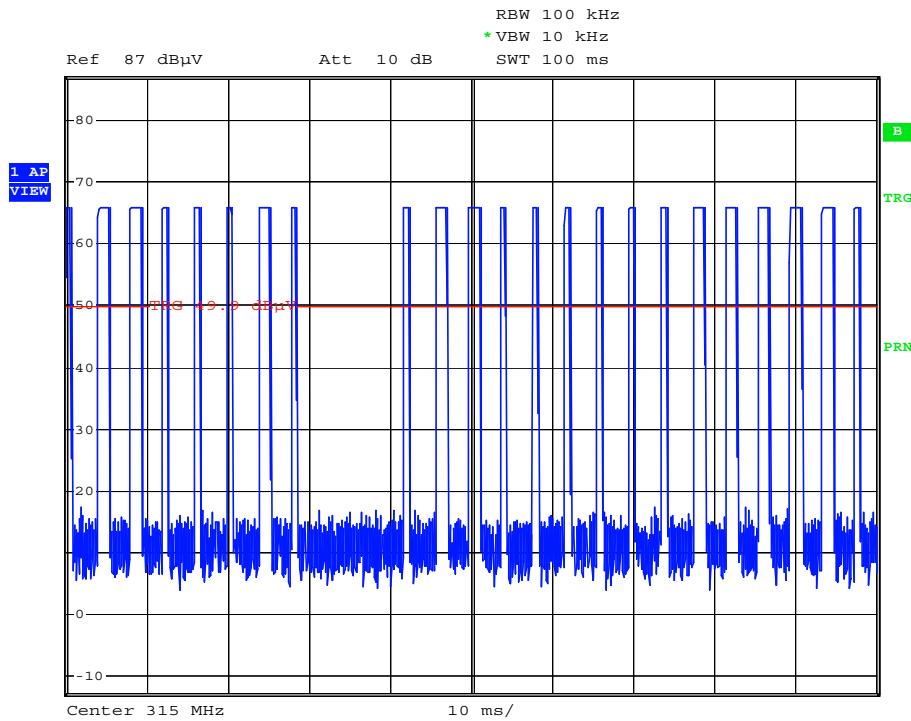

Comment B: Eldat 40264: Duty Cycle Correction  
 Date: 21.APR.2004 12:25:32

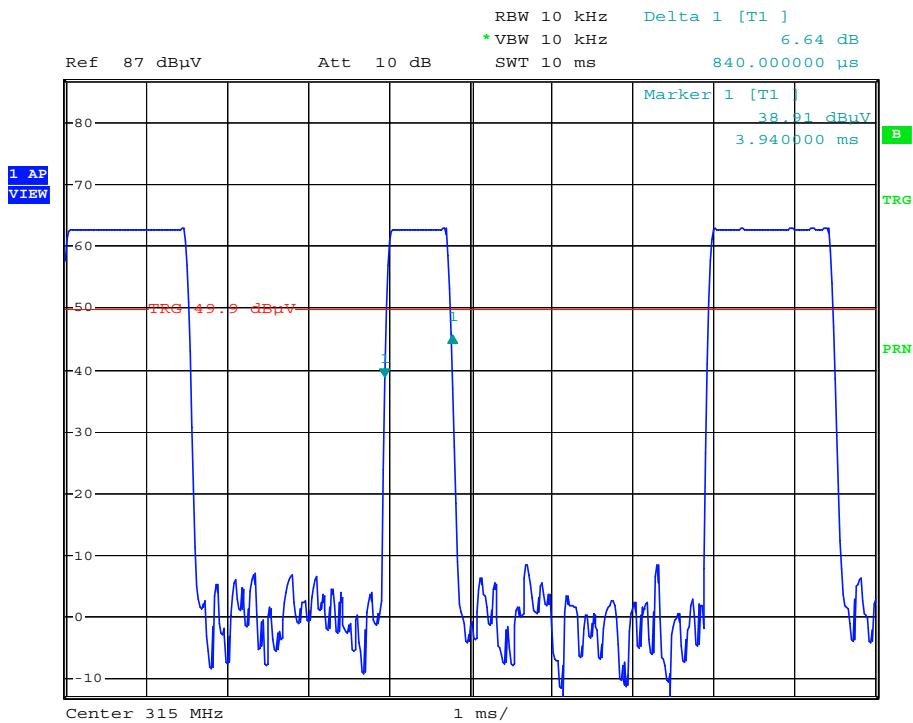


Comment B: Eldat 40264: Duty Cycle Correction  
 Date: 21.APR.2004 12:27:28

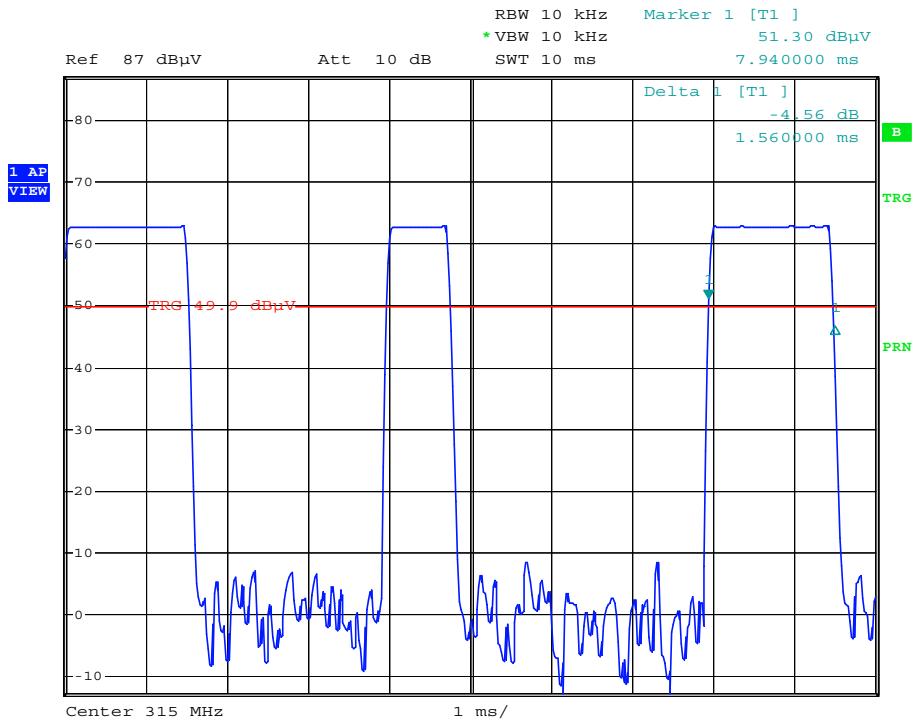

Comment B: Eldat 40264: Duty Cycle Correction  
 Date: 21.APR.2004 12:27:55

## Bandwidth of Emission

Rules and Specifications:	15.231 c
Guide:	ANSI C63.4
Limit:	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB from the modulated carrier

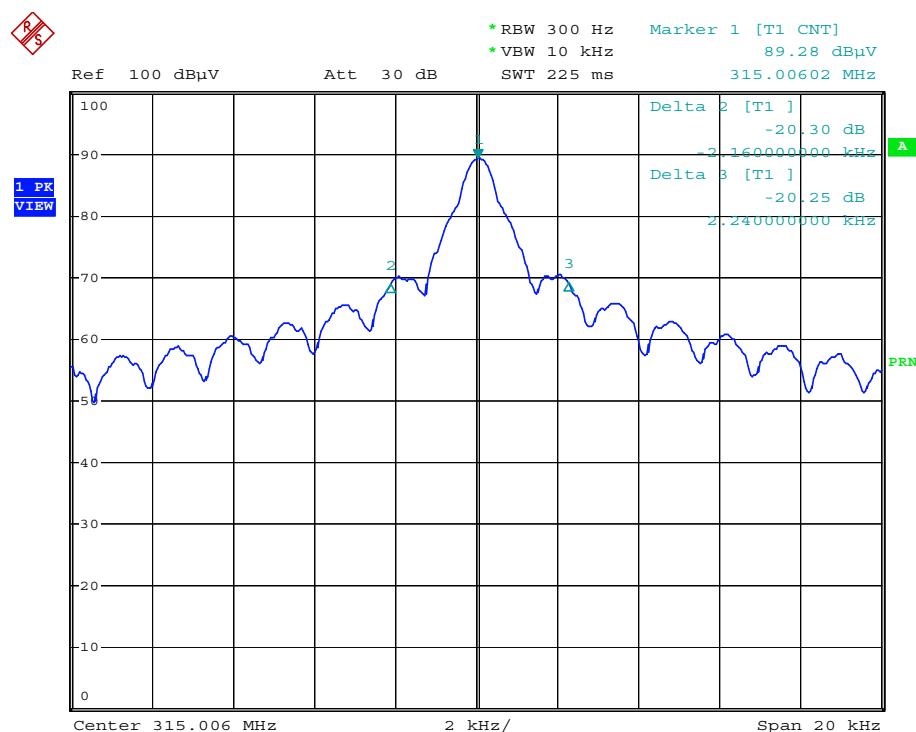

Comment A: eldat 40264: Bandwidth of emission  
Date: 23.APR.2004 10:22:01

<b>Test Results:</b>	Pass	
----------------------	------	--

## 8. Referenced Regulations

All tests were performed with reference to the following regulations and standards:

<input checked="" type="checkbox"/>	CFR 47 Part 2	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)	October 1, 2007
<input checked="" type="checkbox"/>	CFR 47 Part 15	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)	September 20, 2007
<input checked="" type="checkbox"/>	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	December 11, 2003 (published on January 30, 2004)
<input type="checkbox"/>	RSS-Gen	Radio Standards Specification RSS-Gen Issue 2 containing General Requirements and Information for the Certification of Radiocommunication Equipment, published by Industry Canada	June 2007
<input type="checkbox"/>	RSS-210	Radio Standards Specification RSS-210 Issue 7 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, published by Industry Canada	June 2007
<input type="checkbox"/>	RSS-310	Radio Standards Specification RSS-310 Issue 1 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category II Equipment, published by Industry Canada	September 2005
<input type="checkbox"/>	RSS-102	Radio Standards Specification RSS-102 Issue 2: Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)	November 2005
<input type="checkbox"/>	ICES-003	Interference-Causing Equipment Standard ICES-003 Issue 4 for Digital Apparatus, published by Industry Canada	February 7, 2004
<input checked="" type="checkbox"/>	CISPR 22	Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment – Radio Disturbance Characteristics – Limits and Methods of Measurement"	1997
<input type="checkbox"/>	CAN/CSA-CEI/IEC CISPR 22	Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment	2002
<input type="checkbox"/>	TRC-43	Notes Regarding Designation of Emission (Including Necessary Bandwidth and Classification), Class of Station and Nature of Service, published by Industry Canada	October 9, 1982

**Revision History:**

<b>Edition</b>	<b>Date</b>	<b>Issued by</b>	<b>Note</b>
01	26.04.2004	M. Steindl	First edition
02	12.03.2009	C. Jäger	Edition 2 required for FCC-Certification Test Report updated.
03	18.03.2009	M. Steindl (cj)	Edition 3 Modification required for FCC Certification - Page 3: test date of retest added - Page 8: loop antenna selected - Page 20: field strength of emission updated

**Charts taken during testing**


# Radiated Emission Test 30 MHz - 500 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: MKS 03 315 MHz	
Serial no.: 97	
Applicant: Eldat GbmH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 04/21/2004	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment:
- 2 x 3 V lithium battery supply
- EUT in pneumatic system
- transmitting continuously
- EUT flat on table

Detector: Peak
-------------------

List of values: Selected by hand
-------------------------------------

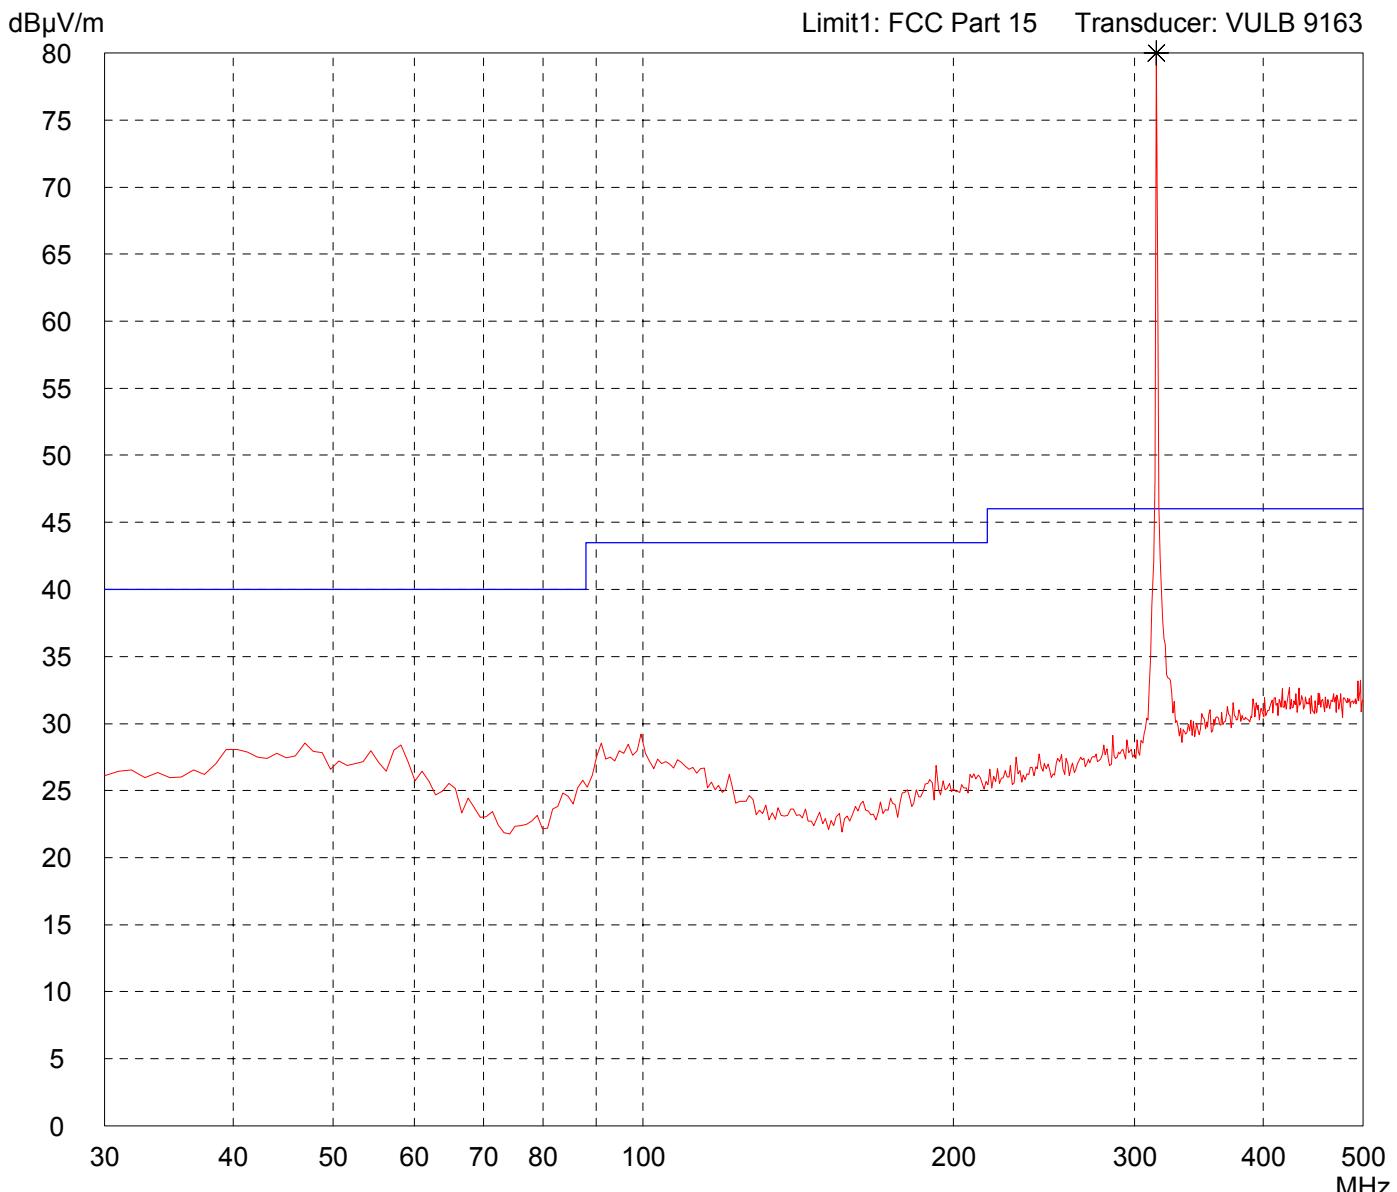

Result: Prescan
--------------------

Project file: 50530-40264
Page of Pages

# Radiated Emission Test 30 MHz - 500 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)


Model: MKS 03 315 MHz	
Serial no.: 97	
Applicant: Eldat GbmH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 04/21/2004	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment:
- 2 x 3 V lithium battery supply
- EUT in pneumatic system
- transmitting continuously
- EUT flat on table

Detector: Peak
-------------------

List of values:
10 dB Margin

50 Subranges

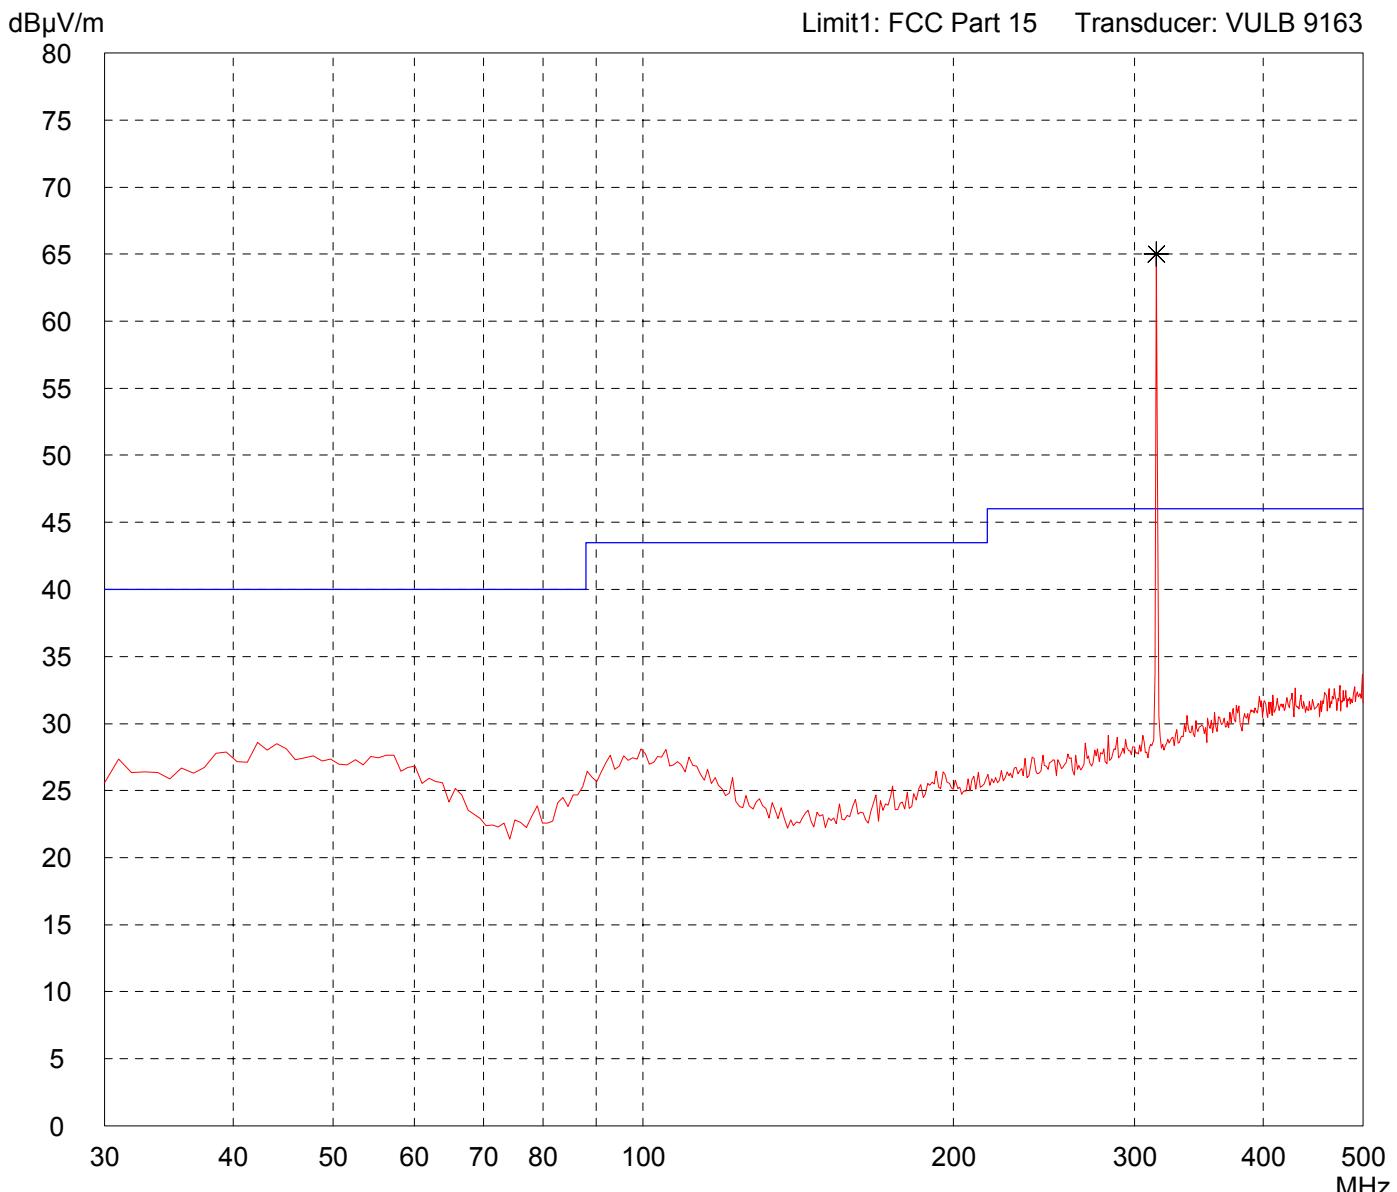

Result: Prescan
--------------------

Project file: 50530-40264
Page of Pages


# Radiated Emission Test 30 MHz - 500 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: MKS 03 315 MHz	
Serial no.: 97	
Applicant: Eldat GbmH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 04/21/2004	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment:
- 2 x 3 V lithium battery supply
- EUT in pneumatic system
- transmitting continuously
- EUT on long side

Detector: Peak
-------------------

List of values:
10 dB Margin
50 Subranges

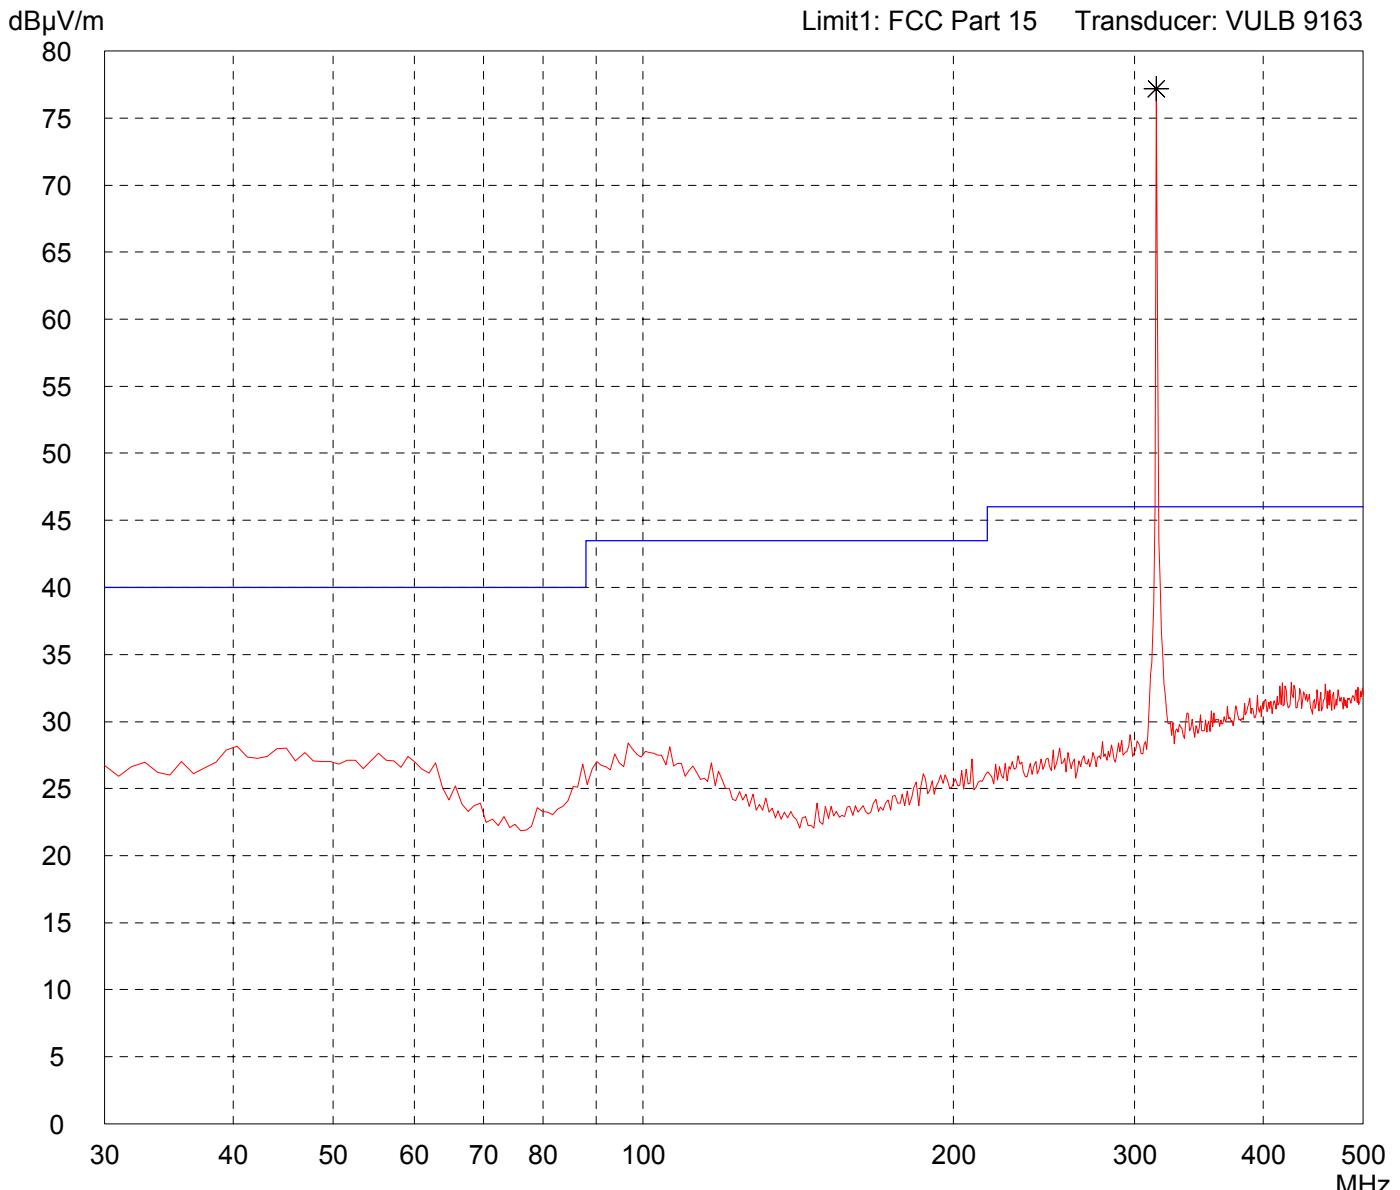

Result: Prescan
--------------------

Project file: 50530-40264
Page of Pages

# Radiated Emission Test 30 MHz - 500 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)


Model: MKS 03 315 MHz	
Serial no.: 97	
Applicant: Eldat GbmH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 04/21/2004	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment:
- 2 x 3 V lithium battery supply
- EUT in pneumatic system
- transmitting continuously
- EUT on long side

Detector: Peak
-------------------

List of values:
10 dB Margin

50 Subranges

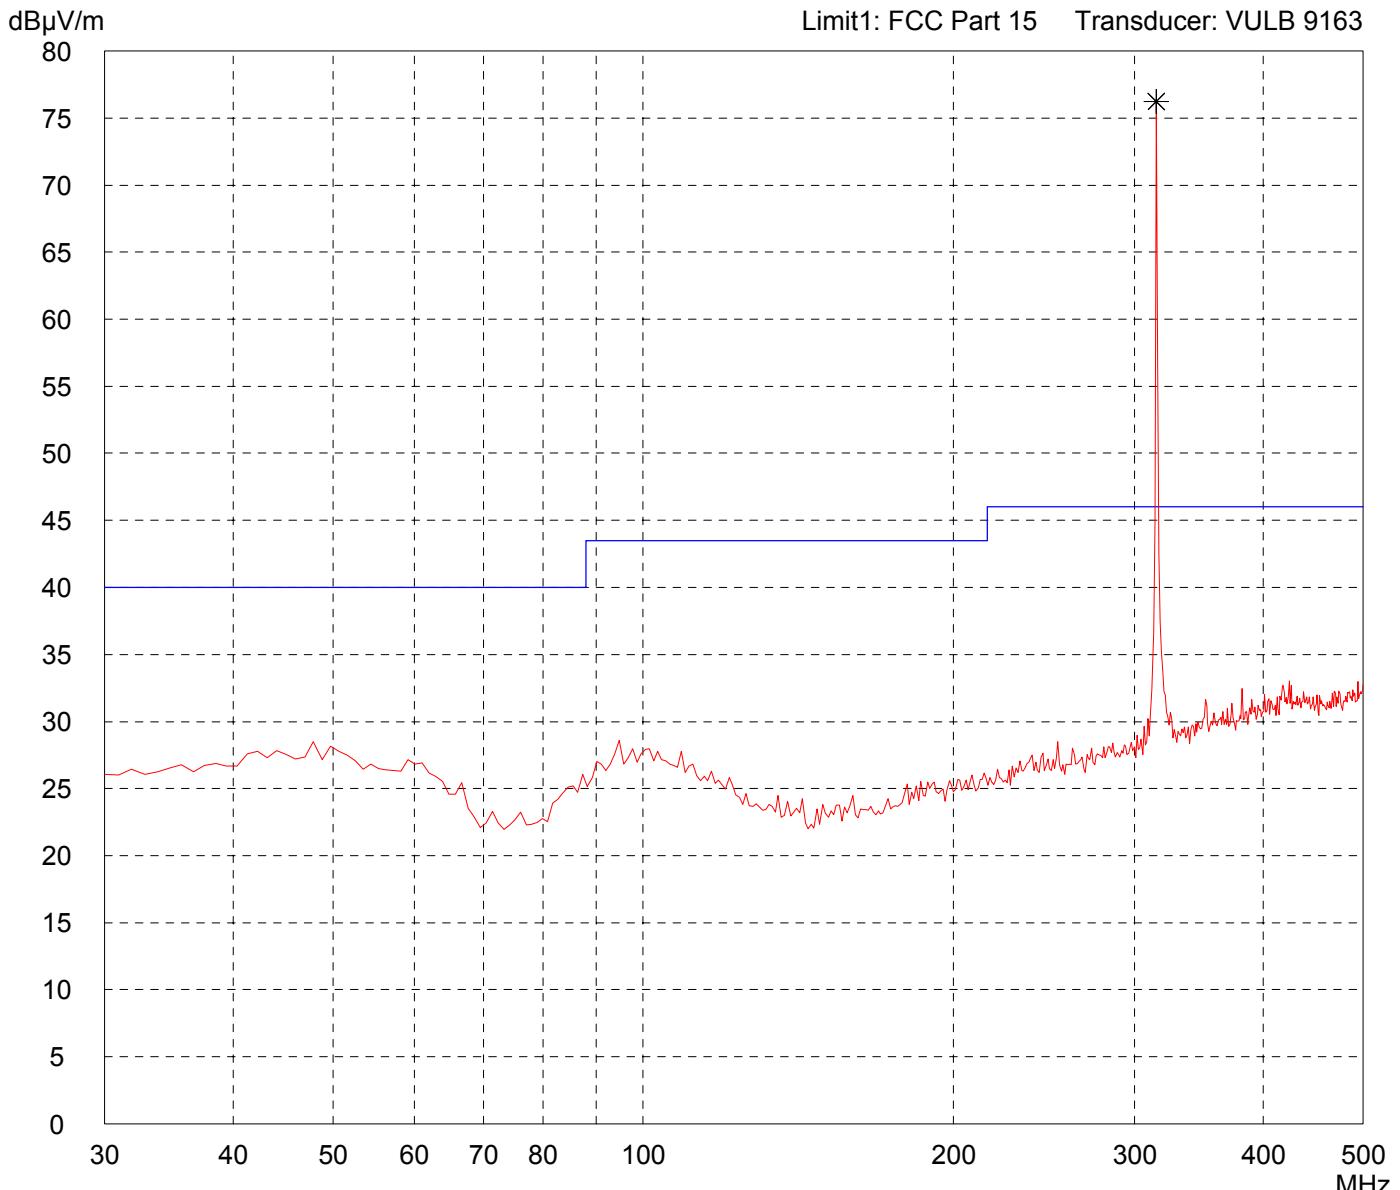

Result: Prescan
--------------------

Project file: 50530-40264
Page of Pages

# Radiated Emission Test 30 MHz - 500 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)


Model: MKS 03 315 MHz	
Serial no.: 97	
Applicant: Eldat GbmH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 04/21/2004	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment:
- 2 x 3 V lithium battery supply
- EUT in pneumatic system
- transmitting continuously
- EUT in upright position

Detector: Peak
-------------------

List of values:
10 dB Margin

50 Subranges

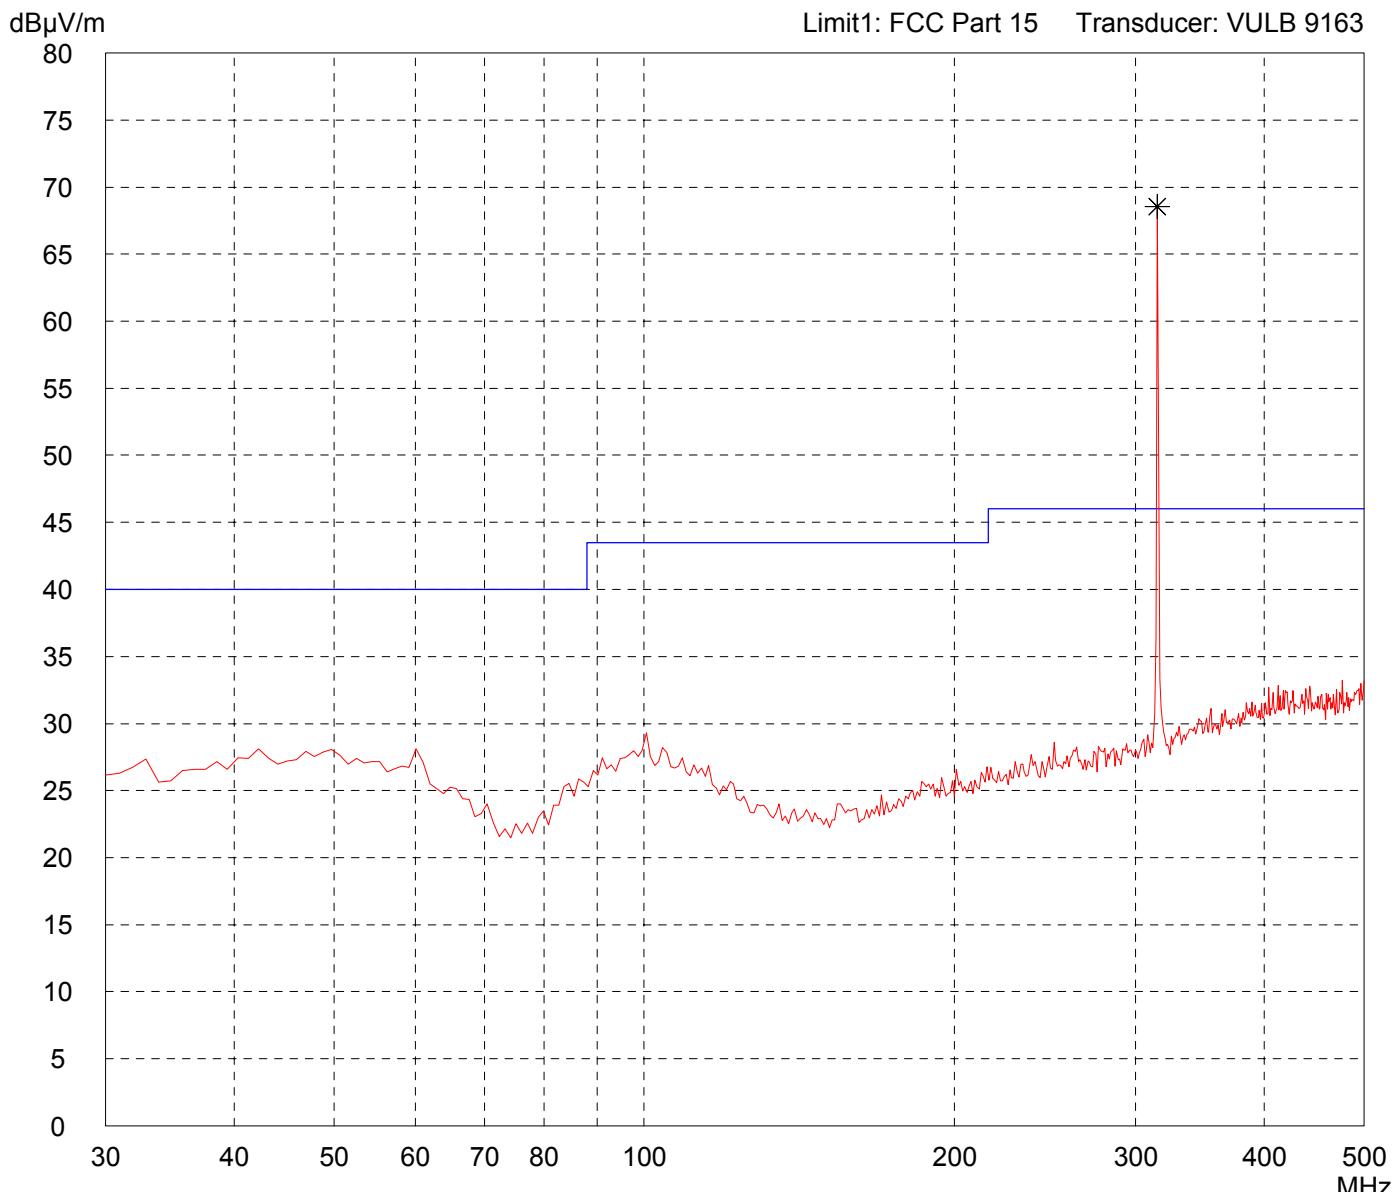

Result: Prescan
--------------------

Project file: 50530-40264
Page of Pages

# Radiated Emission Test 30 MHz - 500 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)


Model: MKS 03 315 MHz	
Serial no.: 97	
Applicant: Eldat GbmH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 04/21/2004	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment:
- 2 x 3 V lithium battery supply
- EUT in pneumatic system
- transmitting continuously
- EUT in upright position

Detector: Peak
-------------------

List of values:
10 dB Margin

50 Subranges

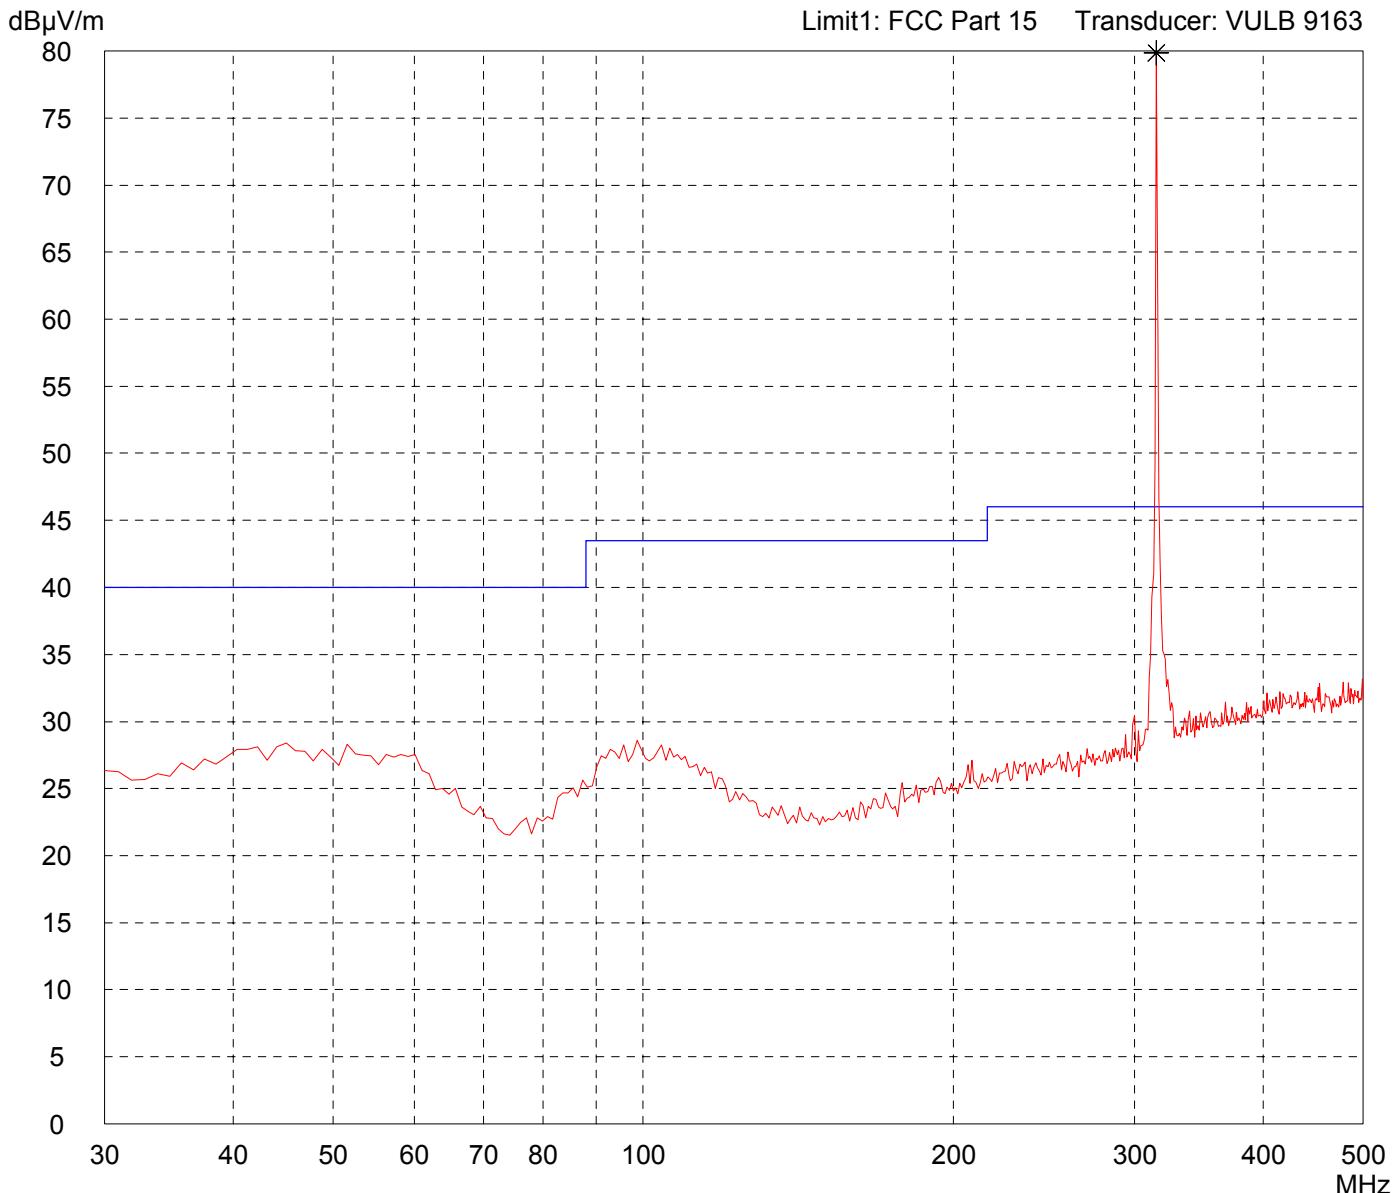

Result: Prescan
--------------------

Project file: 50530-40264
Page of Pages

# Radiated Emission Test 500 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: MKS 03 315 MHz	
Serial no.: 97	
Applicant: Eldat GbmH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 04/21/2004	Operator: M. Steindl
Test performed: automatically	File name: default.emi


Comment:
- 2 x 3 V lithium battery supply
- EUT in pneumatic system
- transmitting continuously
- EUT flat on table
- Note: With WHKS500-10SS high-pass-filter

Detector: Peak
-------------------

List of values:
10 dB Margin      50 Subranges

dB $\mu$ V/m

Limit1: FCC Part 15      Transducer: VULB 9163

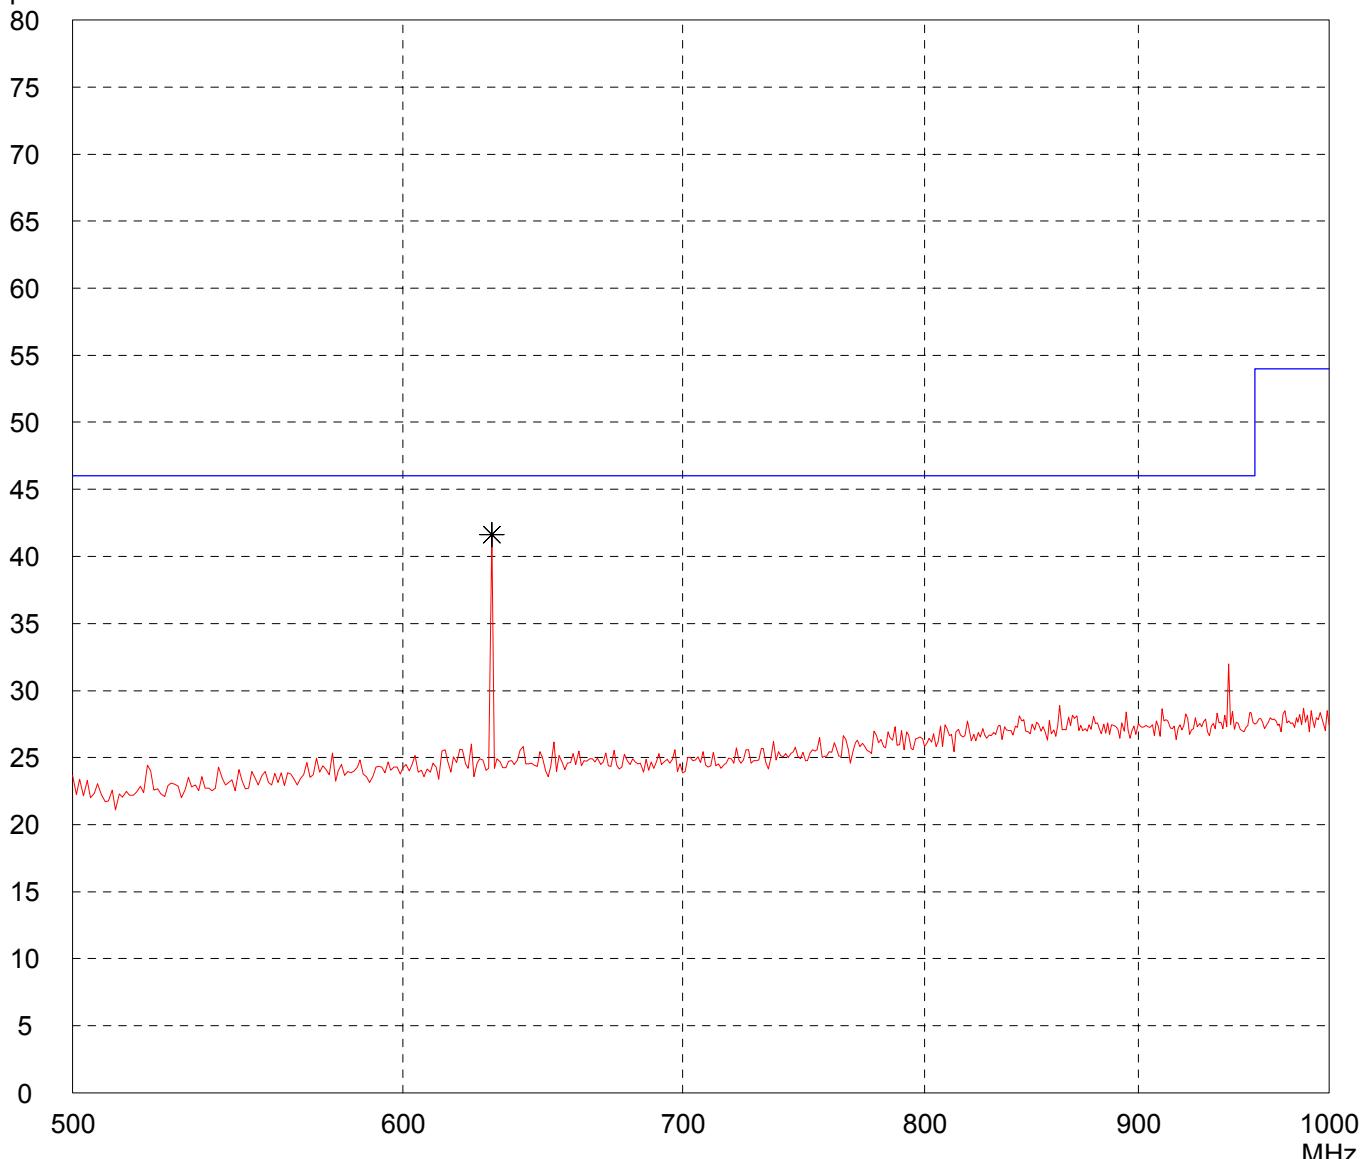

Result: Prescan
--------------------

Project file: 50530-40264	Page      of      Pages
------------------------------	-------------------------


# Radiated Emission Test 500 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: MKS 03 315 MHz	
Serial no.: 97	
Applicant: Eldat GbmH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 04/21/2004	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - 2 x 3 V lithium battery supply - EUT in pneumatic system - transmitting continuously - EUT flat on table - Note: With WHKS500-10SS high-pass-filter
---

Detector: Peak
-------------------

List of values: Selected by hand
-------------------------------------

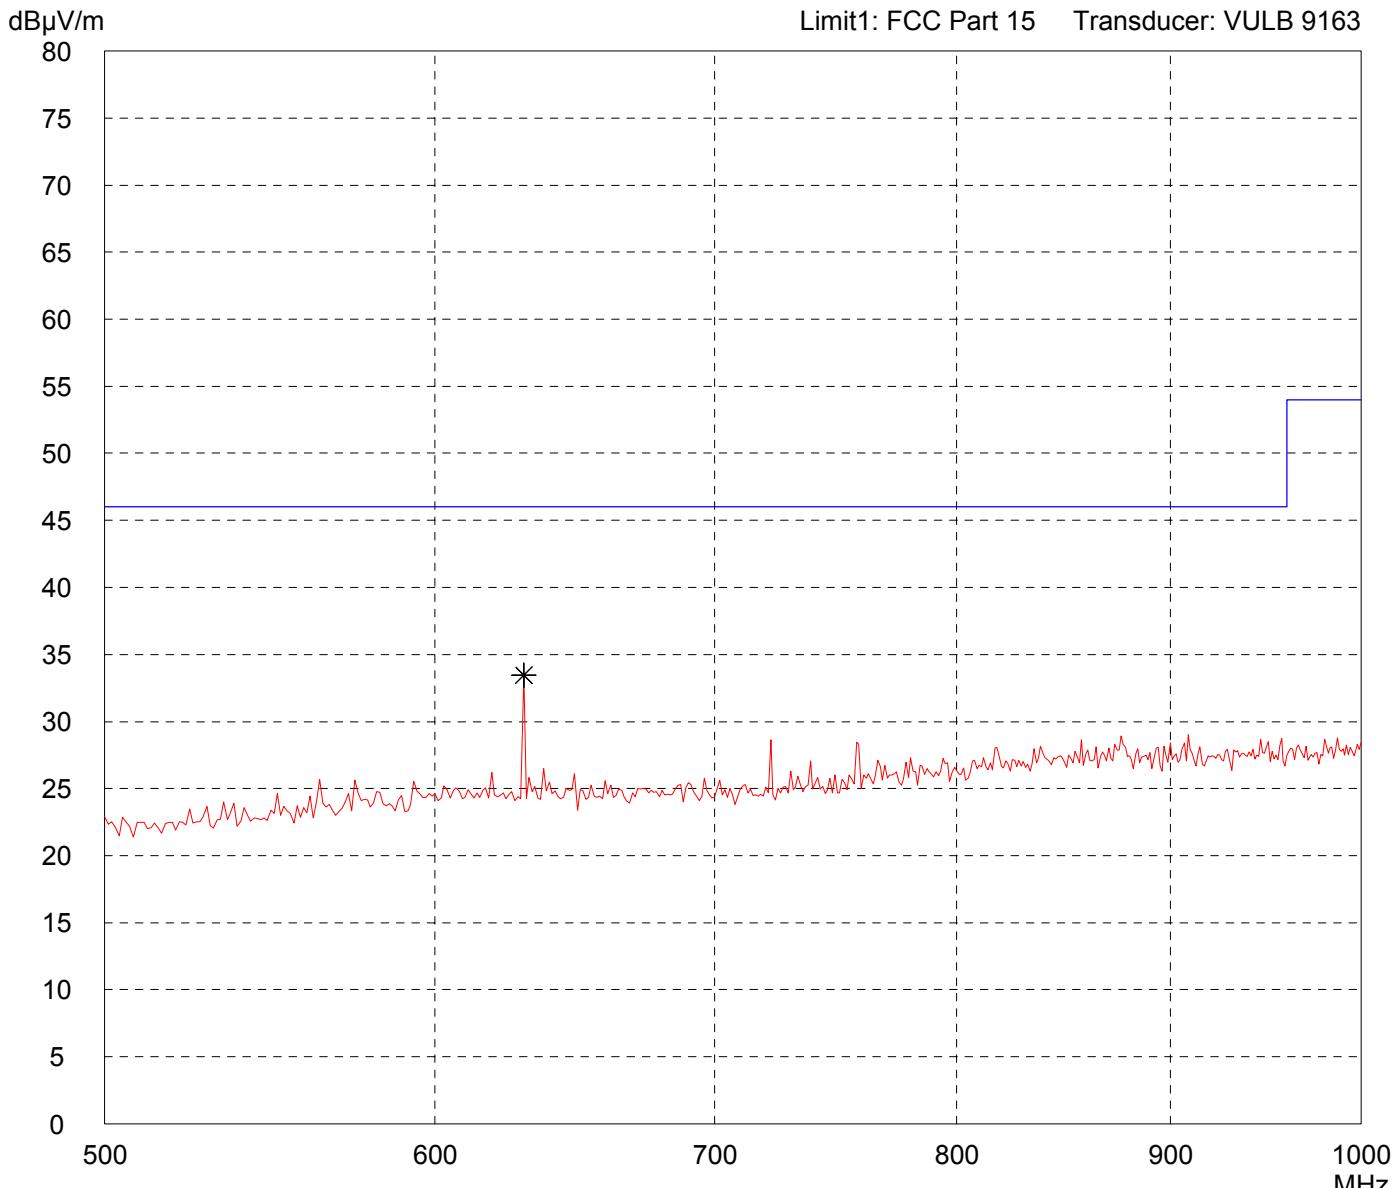

Result: Prescan
--------------------


Project file: 50530-40264	Page of Pages
------------------------------	---------------

# Radiated Emission Test 500 MHz - 1 GHz

## acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: MKS 03 315 MHz	Comment: - 2 x 3 V lithium battery supply
Serial no.: 97	- EUT in pneumatic system - transmitting continuously
Applicant: Eldat GbmH	- EUT on long side
Test site: Fully anechoic room, cabin no. 2	- Note: With WHKS500-10SS high-pass-filter
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 04/21/2004	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: 10 dB Margin	50 Subranges
-------------------	---------------------------------	--------------

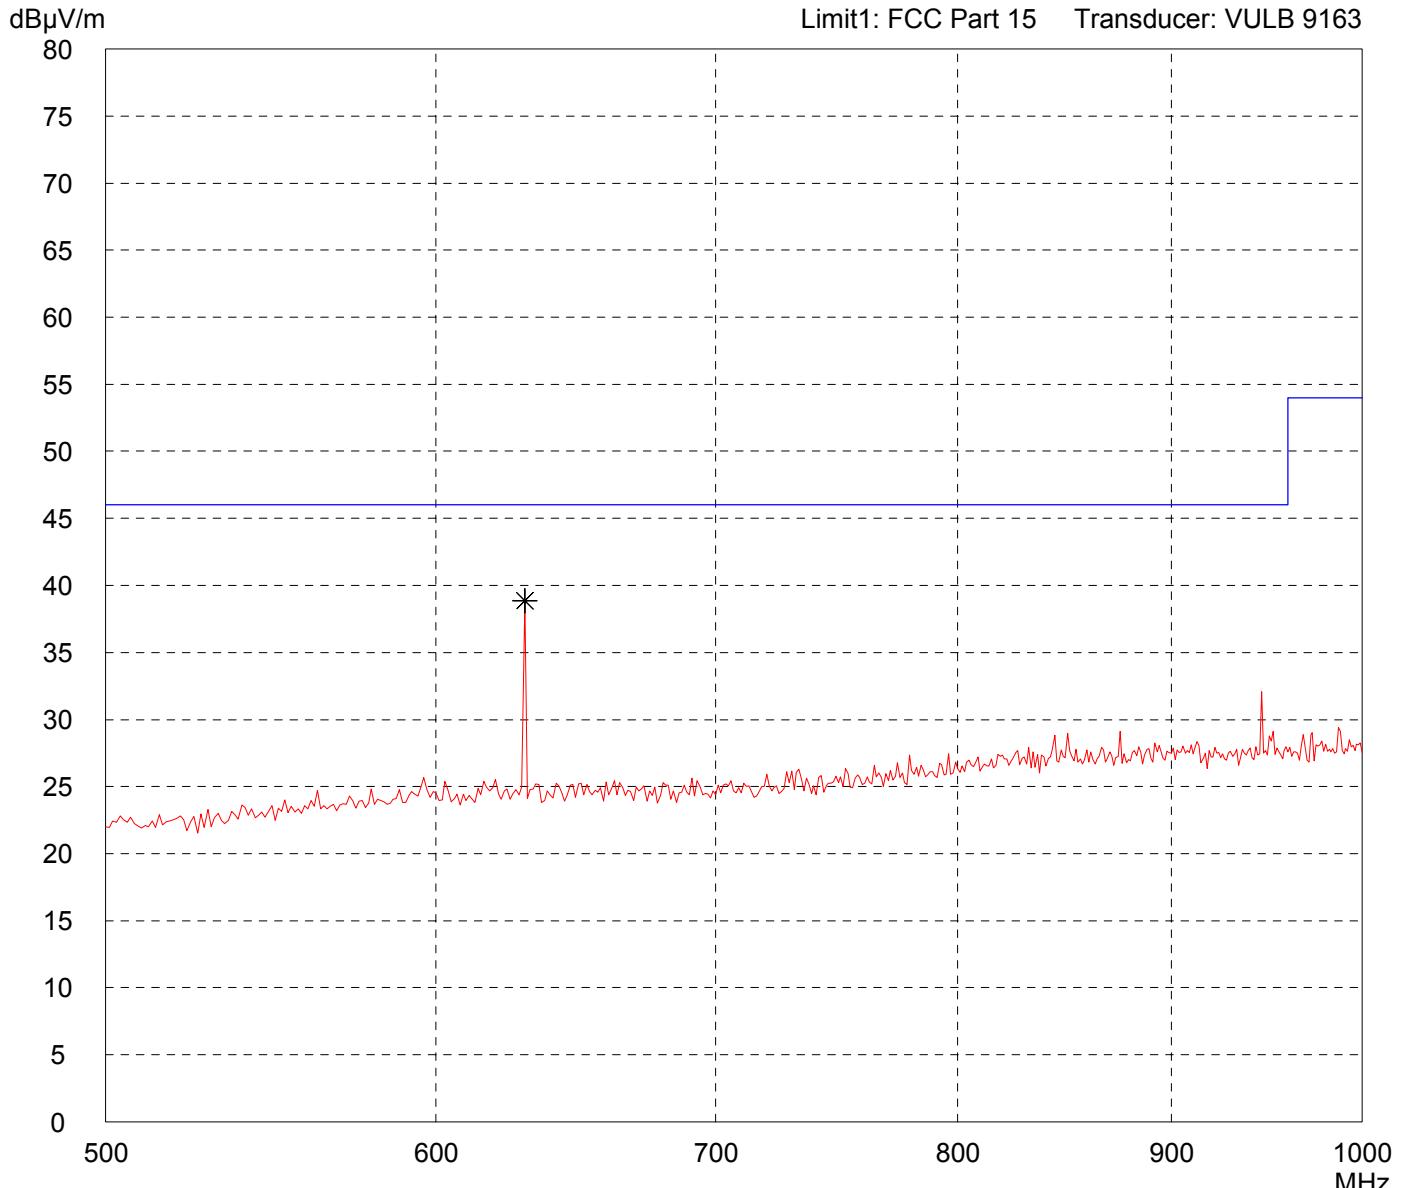

Result:  
Prescan

Project file:  
50530-40264


Page      of      Pages

# Radiated Emission Test 500 MHz - 1 GHz

## acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: MKS 03 315 MHz	Comment: - 2 x 3 V lithium battery supply
Serial no.: 97	- EUT in pneumatic system - transmitting continuously
Applicant: Eldat GbmH	- EUT on long side
Test site: Fully anechoic room, cabin no. 2	- Note: With WHKS500-10SS high-pass-filter
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 04/21/2004	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

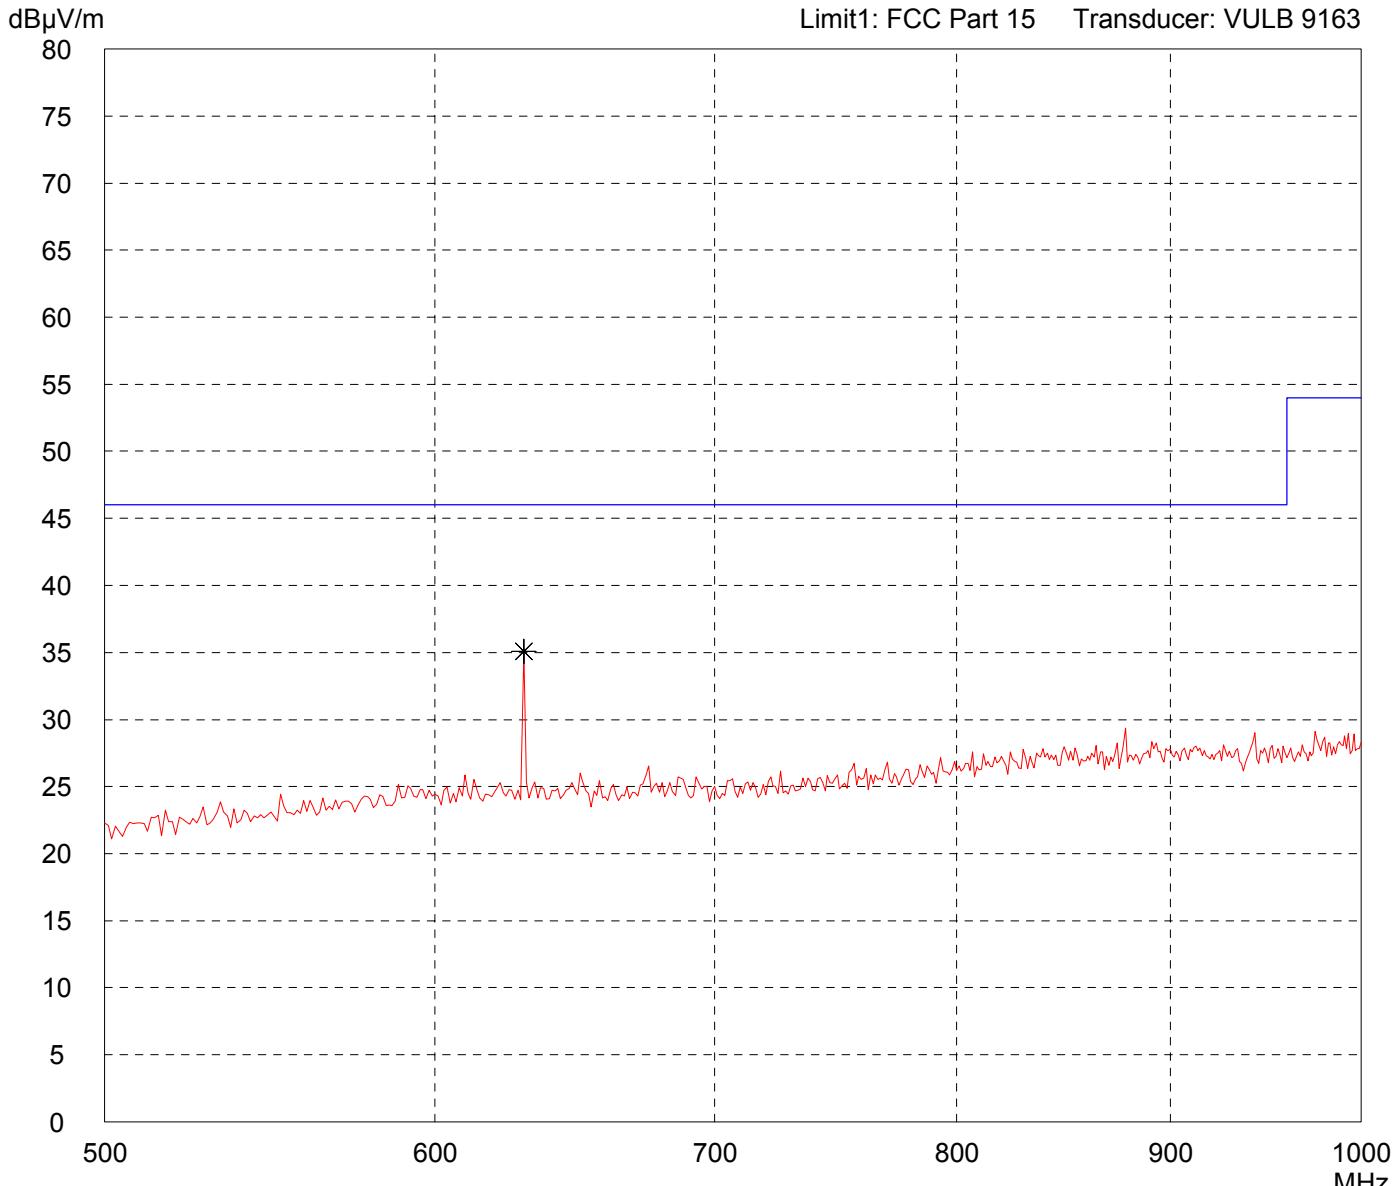

Result:  
Prescan


Project file:  
50530-40264

Page of Pages

# Radiated Emission Test 500 MHz - 1 GHz

## acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: MKS 03 315 MHz	Comment: - 2 x 3 V lithium battery supply
Serial no.: 97	- EUT in pneumatic system - transmitting continuously
Applicant: Eldat GbmH	- EUT in upright position
Test site: Fully anechoic room, cabin no. 2	- Note: With WHKS500-10SS high-pass-filter
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 04/21/2004	Operator: M. Steindl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: Selected by hand

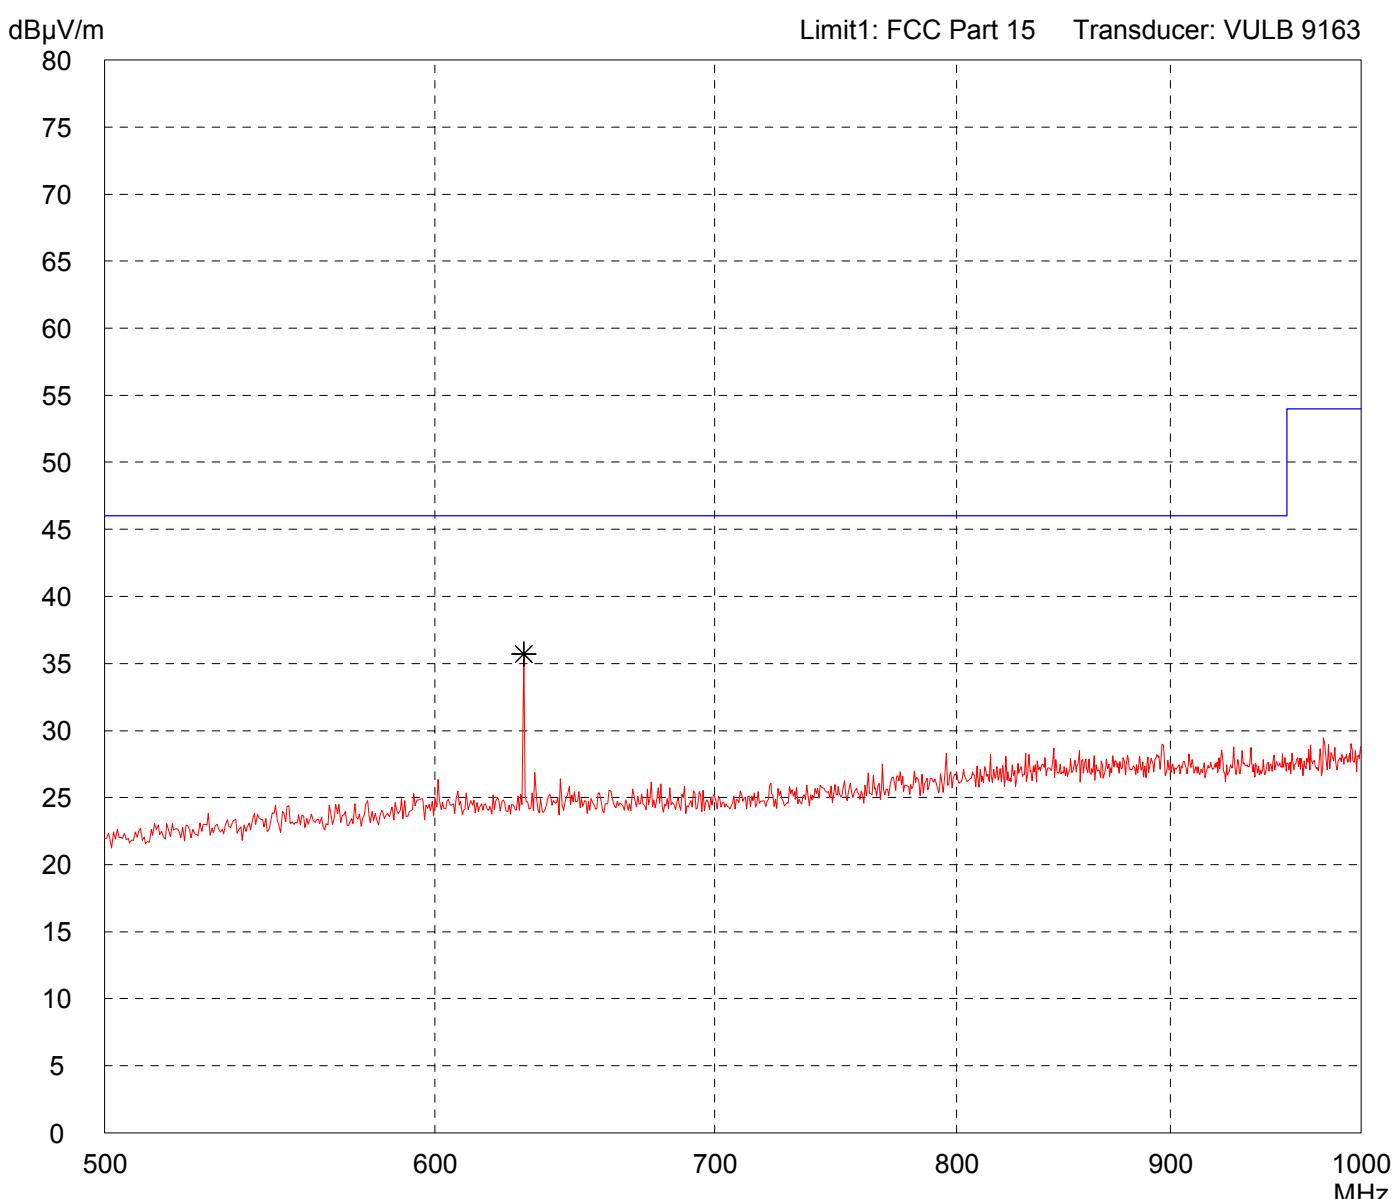

Result:  
Prescan

Project file:  
50530-40264

Page of Pages

# Radiated Emission Test 500 MHz - 1 GHz

## acc. to FCC Part 15 (Fully Anechoic Chamber)


Model: MKS 03 315 MHz	
Serial no.: 97	
Applicant: Eldat GbmH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 04/21/2004	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment:
- 2 x 3 V lithium battery supply
- EUT in pneumatic system
- transmitting continuously
- EUT in upright position
- Note: With WHKS500-10SS high-pass-filter

Detector: Peak
-------------------

List of values:
10 dB Margin

50 Subranges

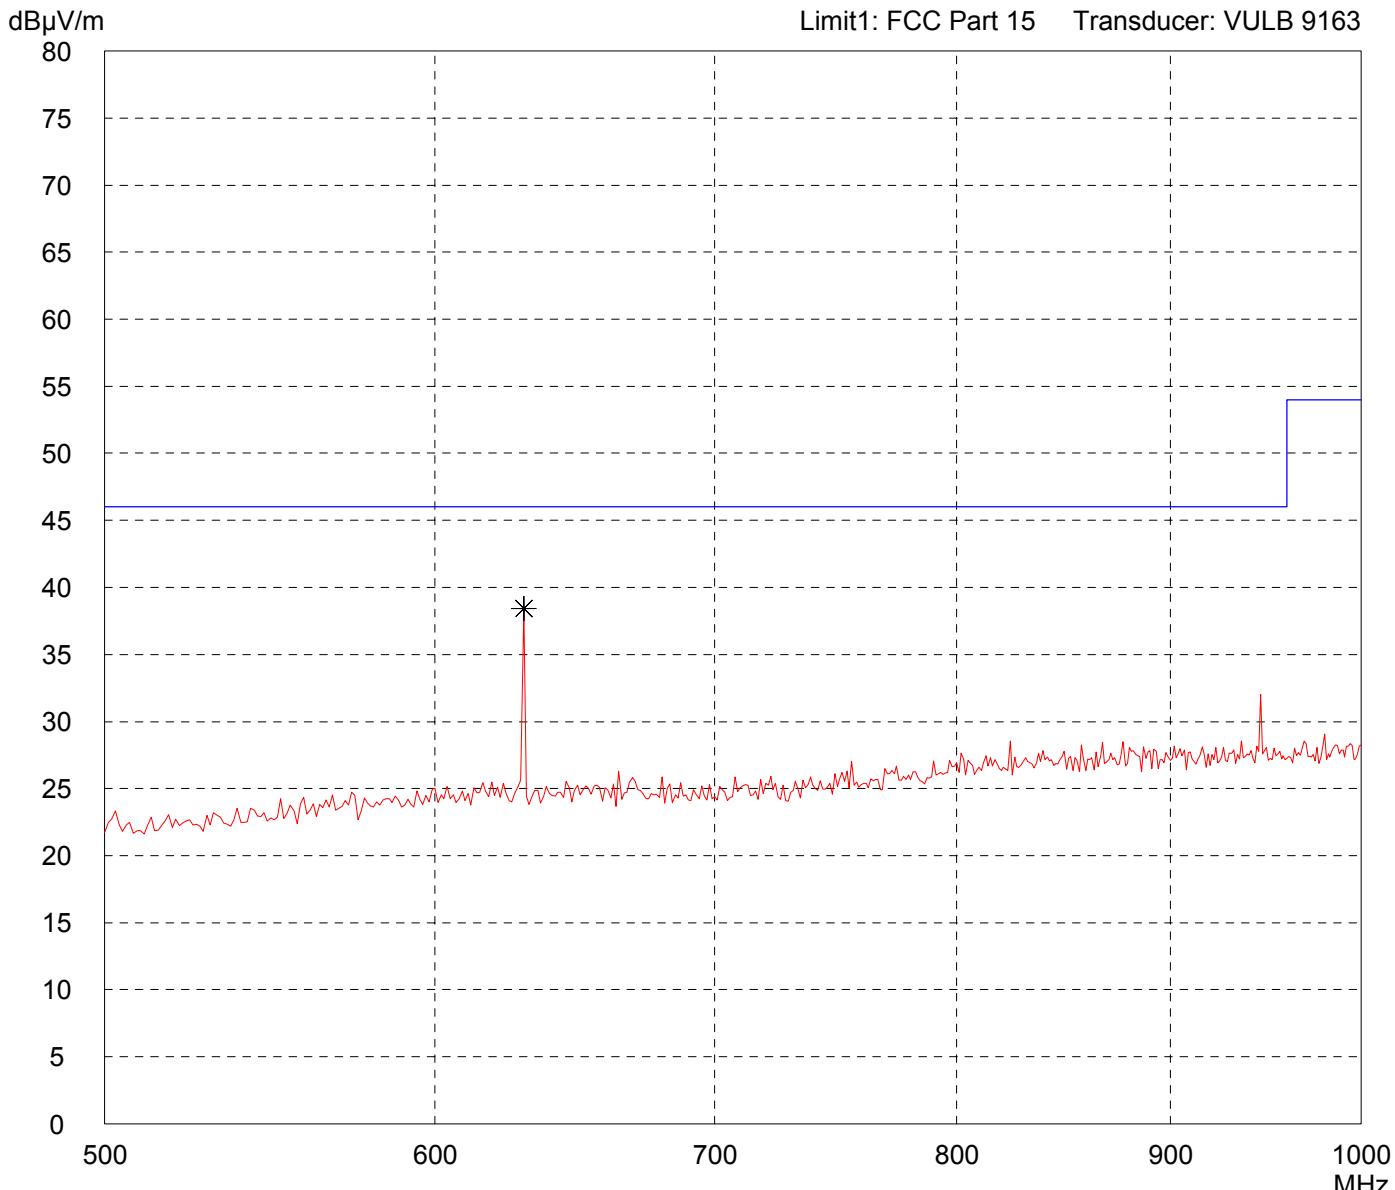

Result: Prescan
--------------------

Project file: 50530-40264	Page    of    Pages
------------------------------	---------------------


# Radiated Emission Test 1 GHz - 4 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: MKS 03 315 MHz	
Serial no.: 97	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 04/22/2004	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment:
- 2 x 3 V lithium battery supply
- EUT in pneumatic system
- transmitting continuously
- EUT flat on table
- Note: With WHKS1000-10SS high-pass-filter

Detector: Peak
-------------------

List of values: Selected by hand
-------------------------------------

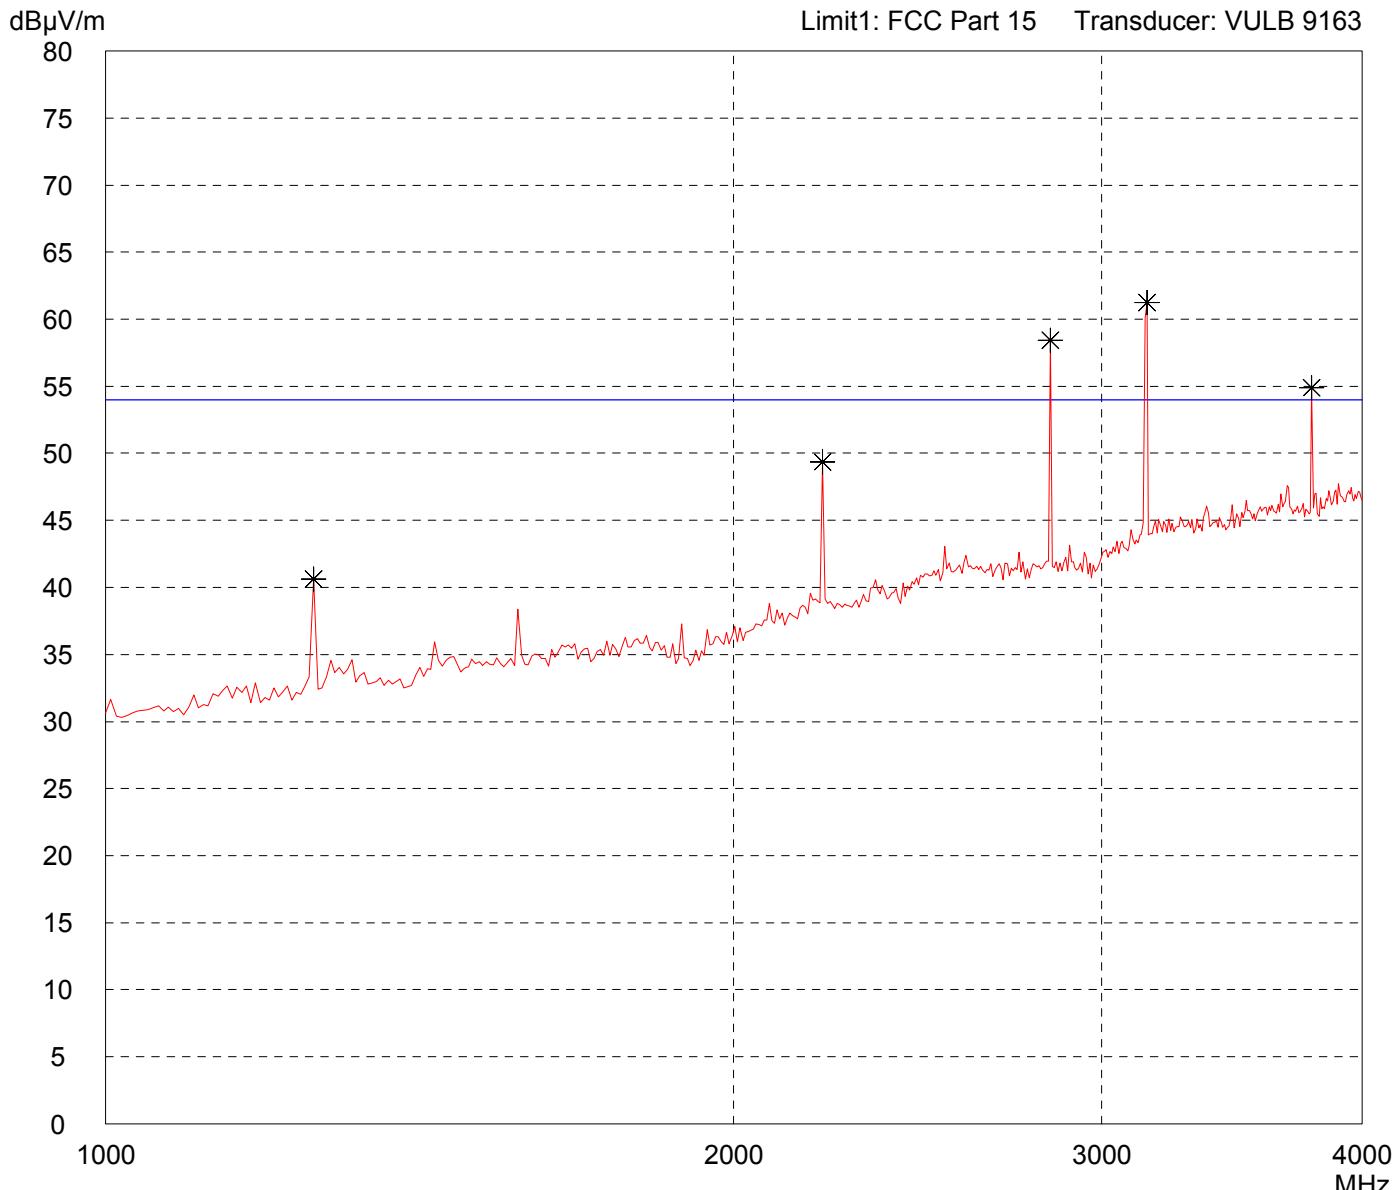

Result: Prescan
--------------------

Project file: 50530-40264	Page   of   Pages
------------------------------	-------------------


# Radiated Emission Test 1 GHz - 4 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: MKS 03 315 MHz	
Serial no.: 97	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 04/22/2004	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment: - 2 x 3 V lithium battery supply - EUT in pneumatic system - transmitting continuously - EUT flat on table - Note: With WHKS1000-10SS high-pass-filter
--

Detector: Peak
-------------------

List of values: Selected by hand
-------------------------------------

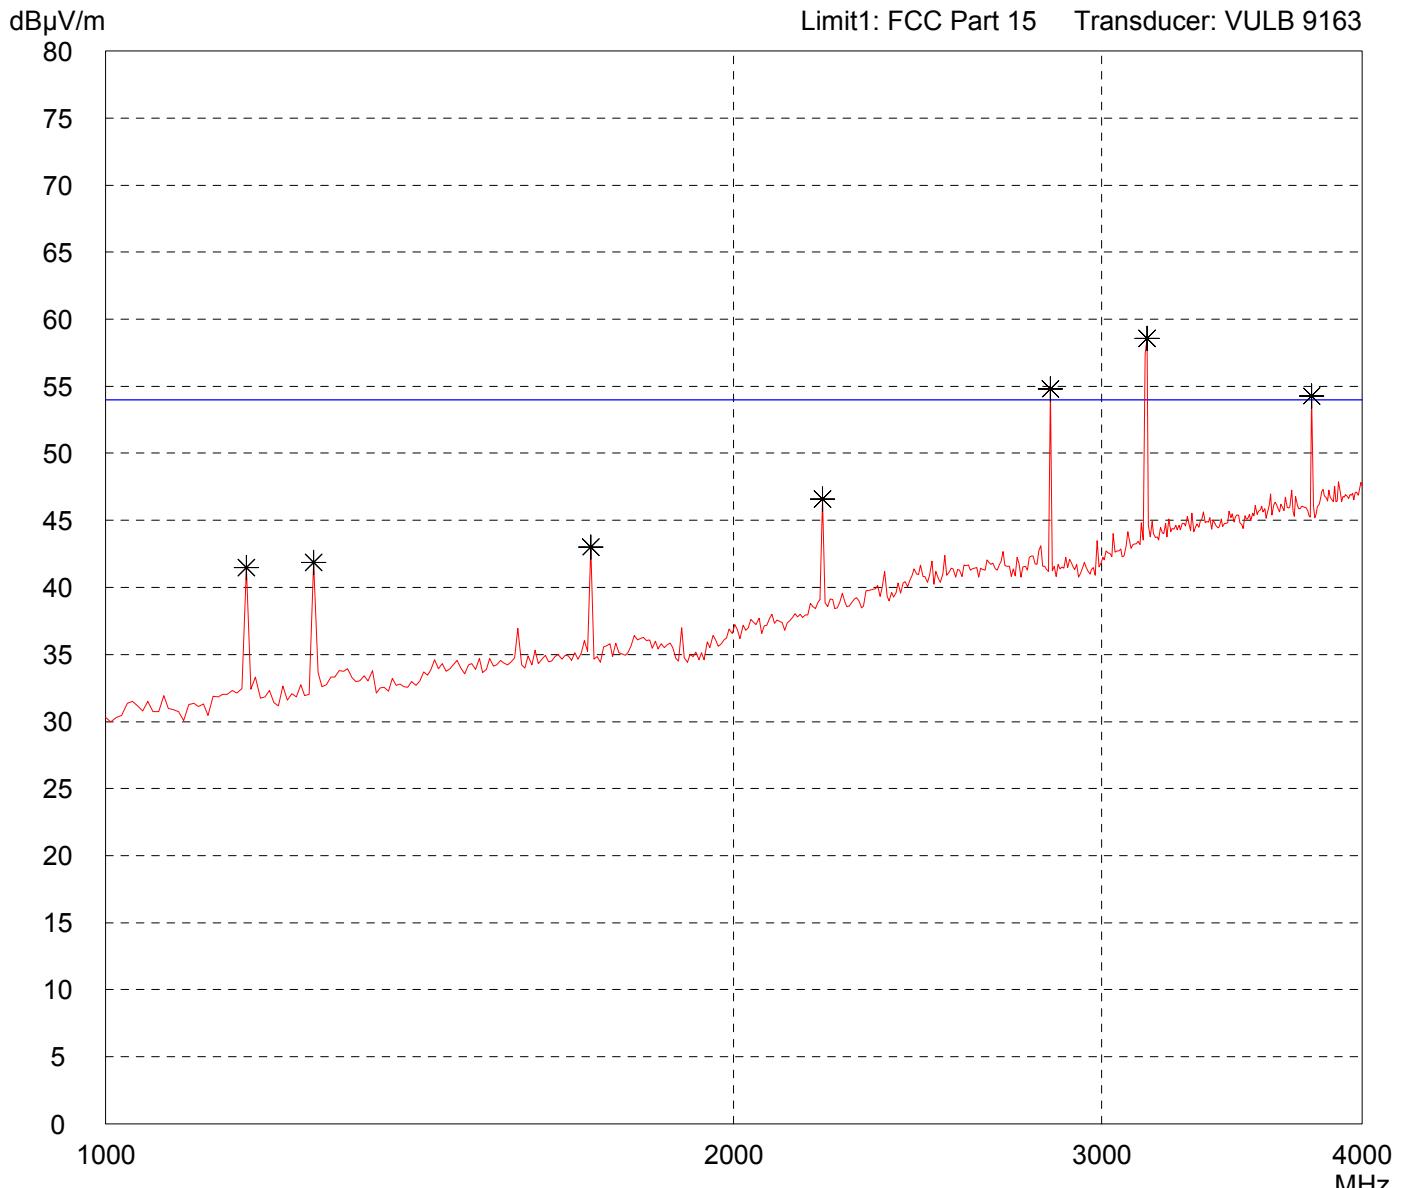

Result: Prescan
--------------------

Project file: 50530-40264	Page of Pages
------------------------------	---------------


# Radiated Emission Test 1 GHz - 4 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: MKS 03 315 MHz	
Serial no.: 97	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 04/22/2004	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment:
- 2 x 3 V lithium battery supply
- EUT in pneumatic system
- transmitting continuously
- EUT on long side
- Note: With WHKS1000-10SS high-pass-filter

Detector: Peak
-------------------

List of values: Selected by hand
-------------------------------------

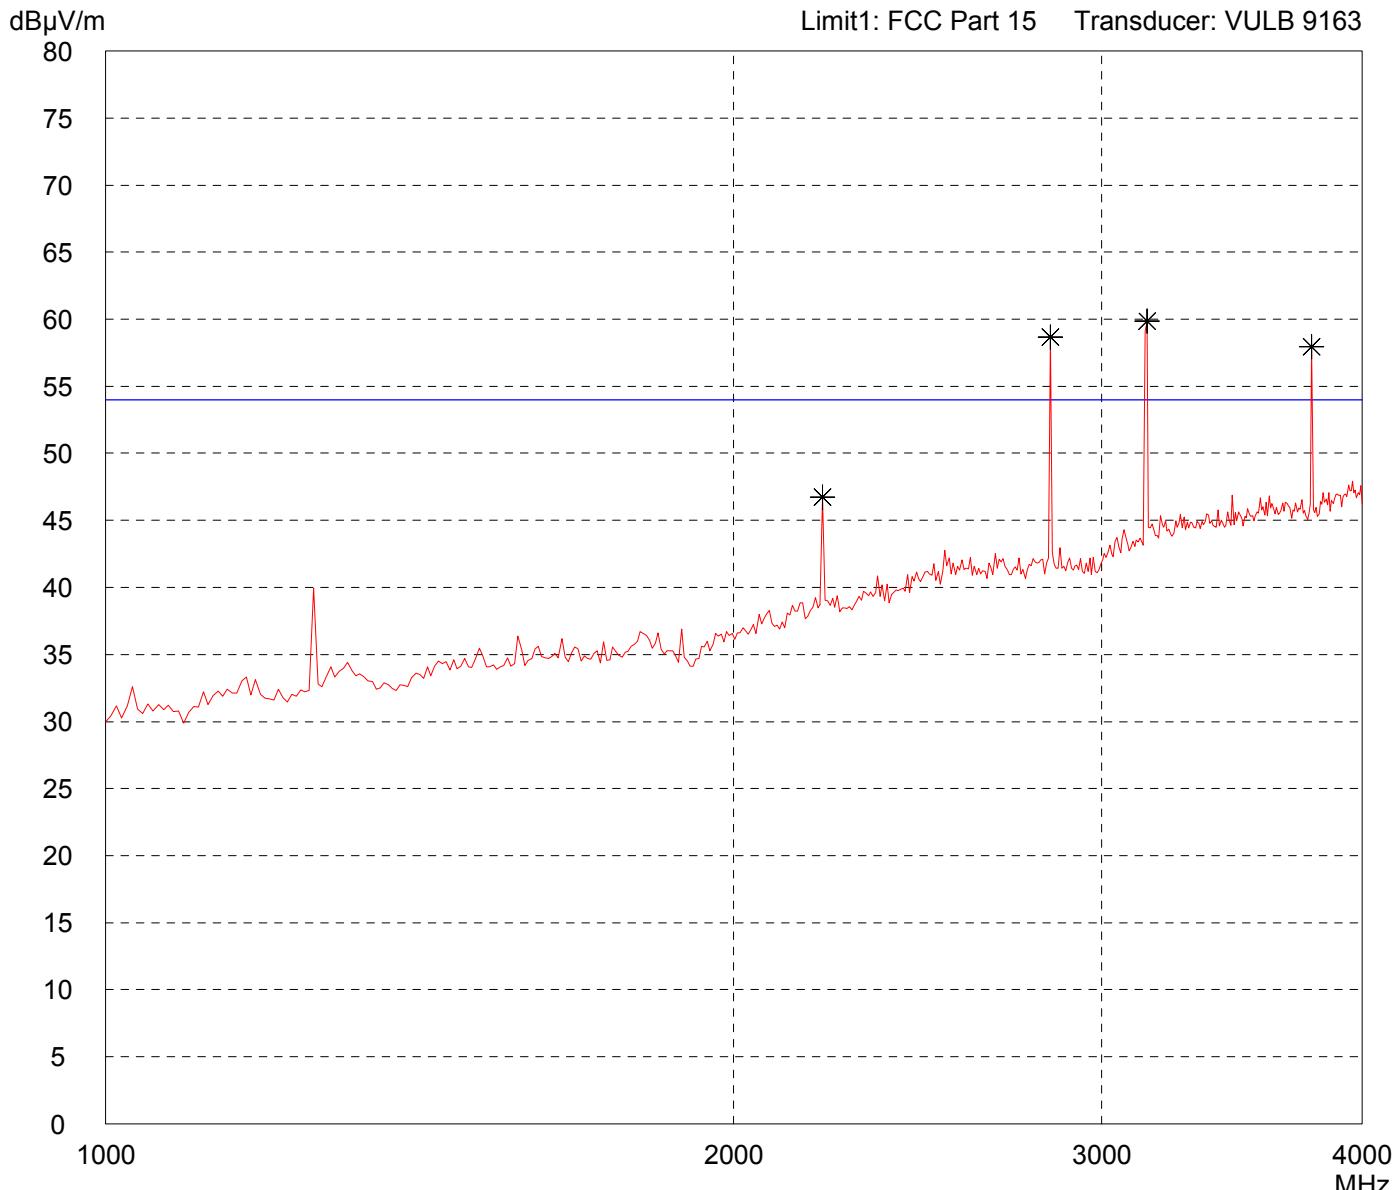

Result: Prescan
--------------------

Project file: 50530-40264	Page      of      Pages
------------------------------	-------------------------


**Radiated Emission Test 1 GHz - 4 GHz  
acc. to FCC Part 15 (Fully Anechoic Chamber)**

Model: MKS 03 315 MHz
Serial no.: 97
Applicant: Eldat GmbH
Test site: Fully anechoic room, cabin no. 2
Tested on: Test distance 3 metres Vertical Polarization
Date of test: 04/22/2004
Test performed: automatically
Operator: M. Steindl
File name: default.emi

Comment:
- 2 x 3 V lithium battery supply
- EUT in pneumatic system
- transmitting continuously
- EUT on long side
- Note: With WHKS1000-10SS high-pass-filter

Detector: Peak
-------------------

List of values: Selected by hand
-------------------------------------

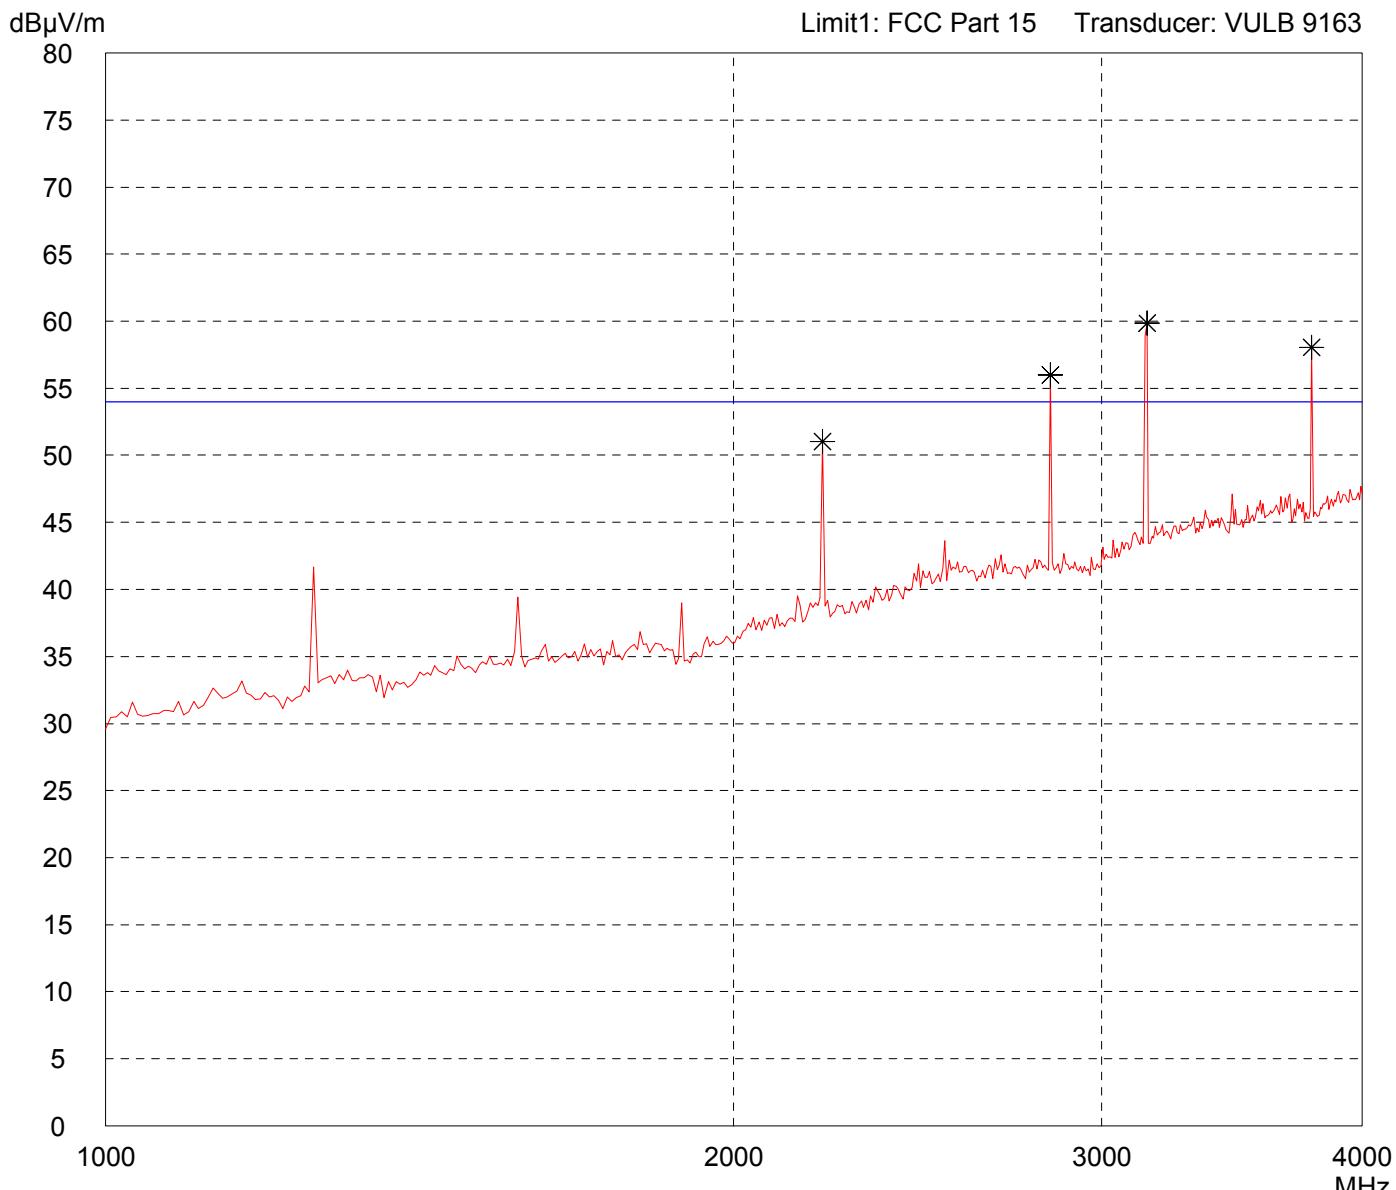

Result: Prescan
--------------------

Project file: 50530-40264	Page of Pages
------------------------------	---------------


**Radiated Emission Test 1 GHz - 4 GHz  
acc. to FCC Part 15 (Fully Anechoic Chamber)**

Model: MKS 03 315 MHz	
Serial no.: 97	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 04/22/2004	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment:
- 2 x 3 V lithium battery supply
- EUT in pneumatic system
- transmitting continuously
- EUT in upright position
- Note: With WHKS1000-10SS high-pass-filter

Detector: Peak
-------------------

List of values: Selected by hand
-------------------------------------

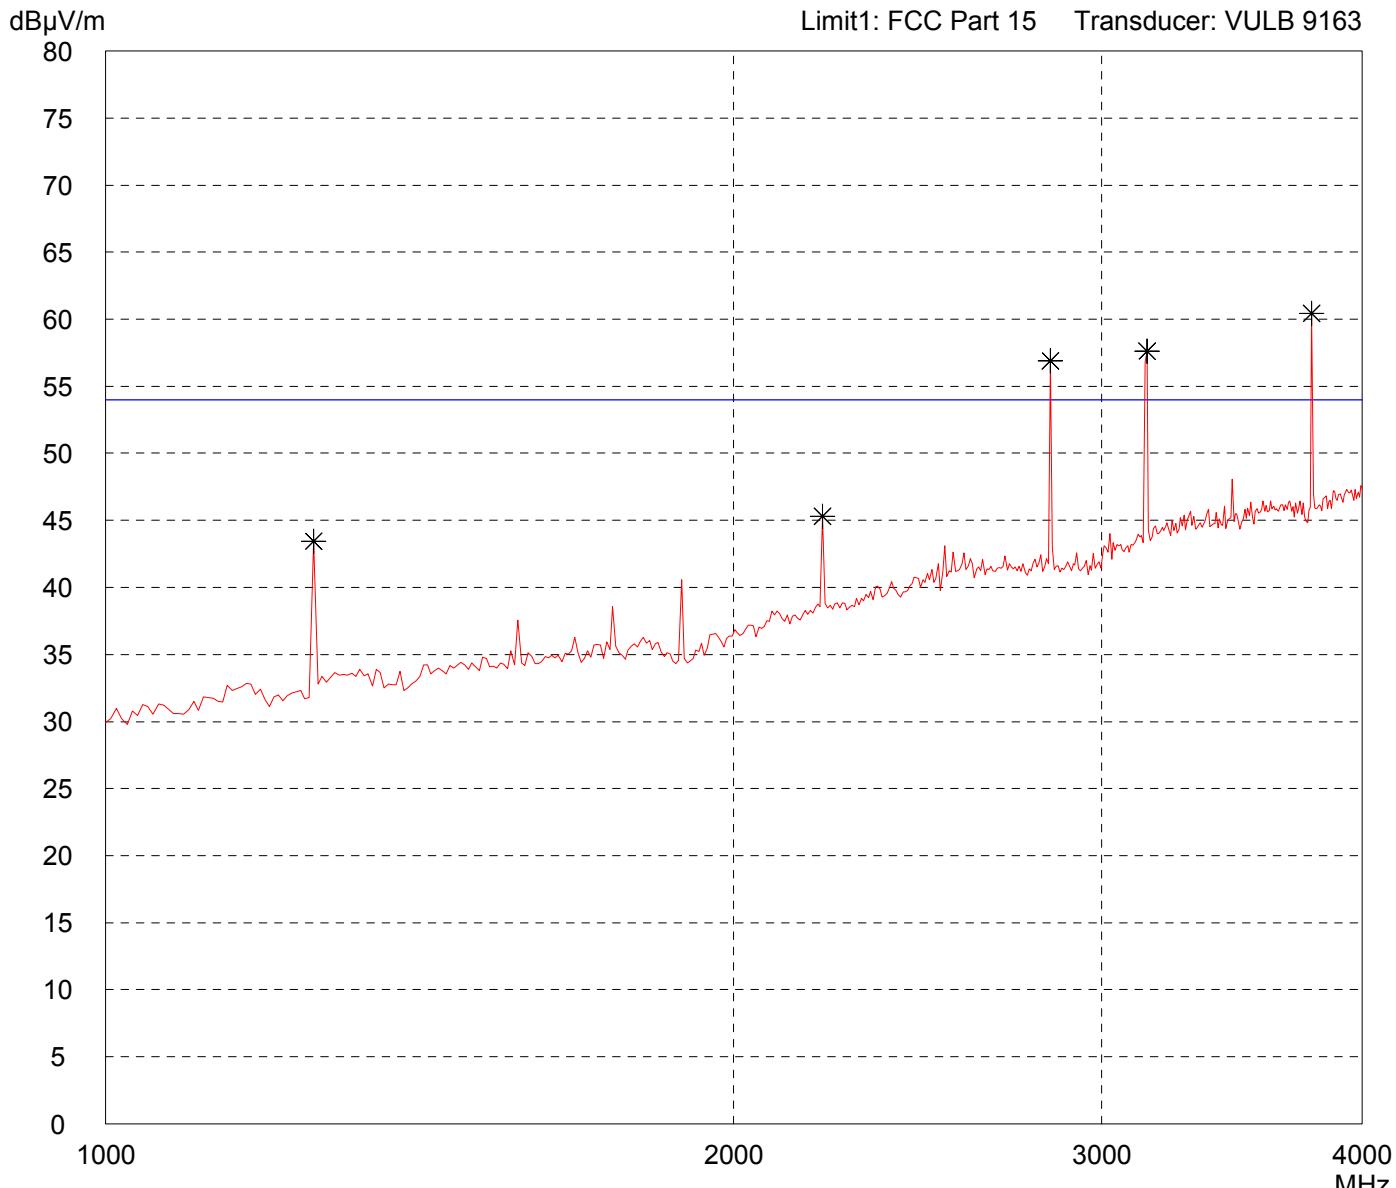

Result: Prescan
--------------------

Project file: 50530-40264	Page      of      Pages
------------------------------	-------------------------


**Radiated Emission Test 1 GHz - 4 GHz  
acc. to FCC Part 15 (Fully Anechoic Chamber)**

Model: MKS 03 315 MHz	
Serial no.: 97	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 04/22/2004	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Comment:
- 2 x 3 V lithium battery supply
- EUT in pneumatic system
- transmitting continuously
- EUT in upright position
- Note: With WHKS1000-10SS high-pass-filter

Detector: Peak
-------------------

List of values: Selected by hand
-------------------------------------

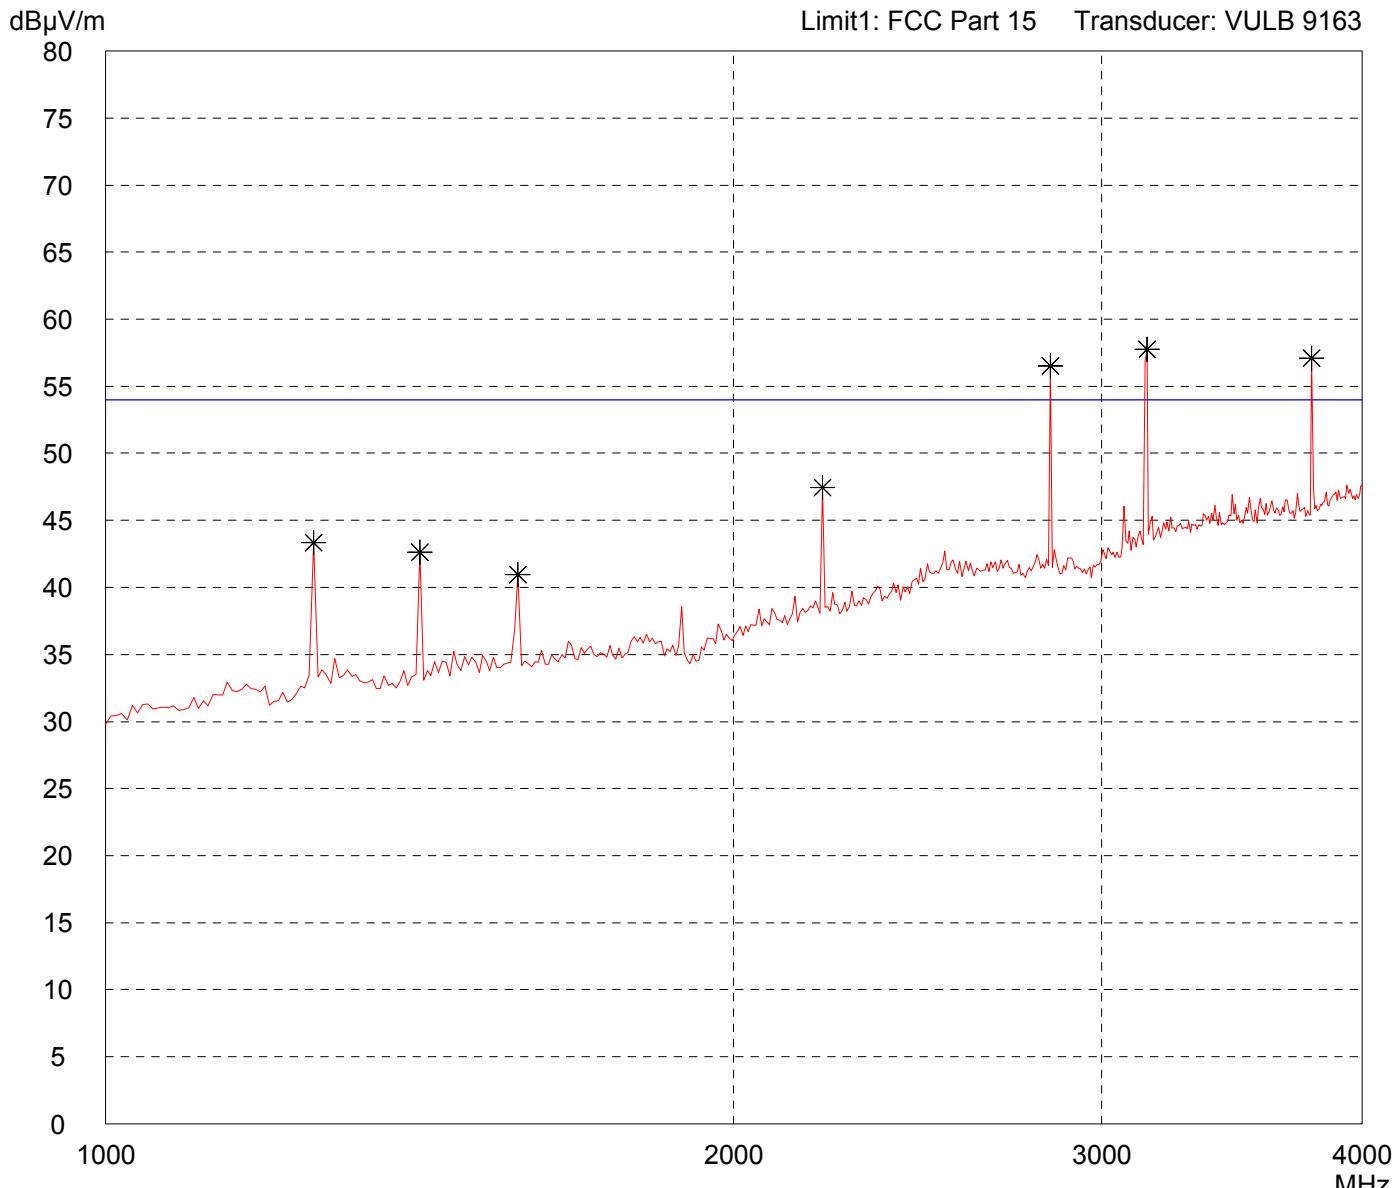

Result: Prescan
--------------------

Project file: 50530-40264	Page      of      Pages
------------------------------	-------------------------

# Radiated Emission Test 30 MHz - 1 GHz


## according to FCC Part 15 Subpart C

Model: MKS 03 315 MHz	
Serial no.: 97	
Applicant: Eldat GmbH	
Test site: Open area test-site I	
Tested on: Test distance 3 meters Horizontal Polarization	
Date of test: 04/21/2004	Operator: K. Roidt
Test performed: by hand	File name:

Mode: - 2 x 3 V lithium battery supply
- EUT in pneumatic system
- transmitting continuously
- EUT flat on table

Detector: Quasi-Peak
-------------------------

List of values: Selected by hand
-------------------------------------

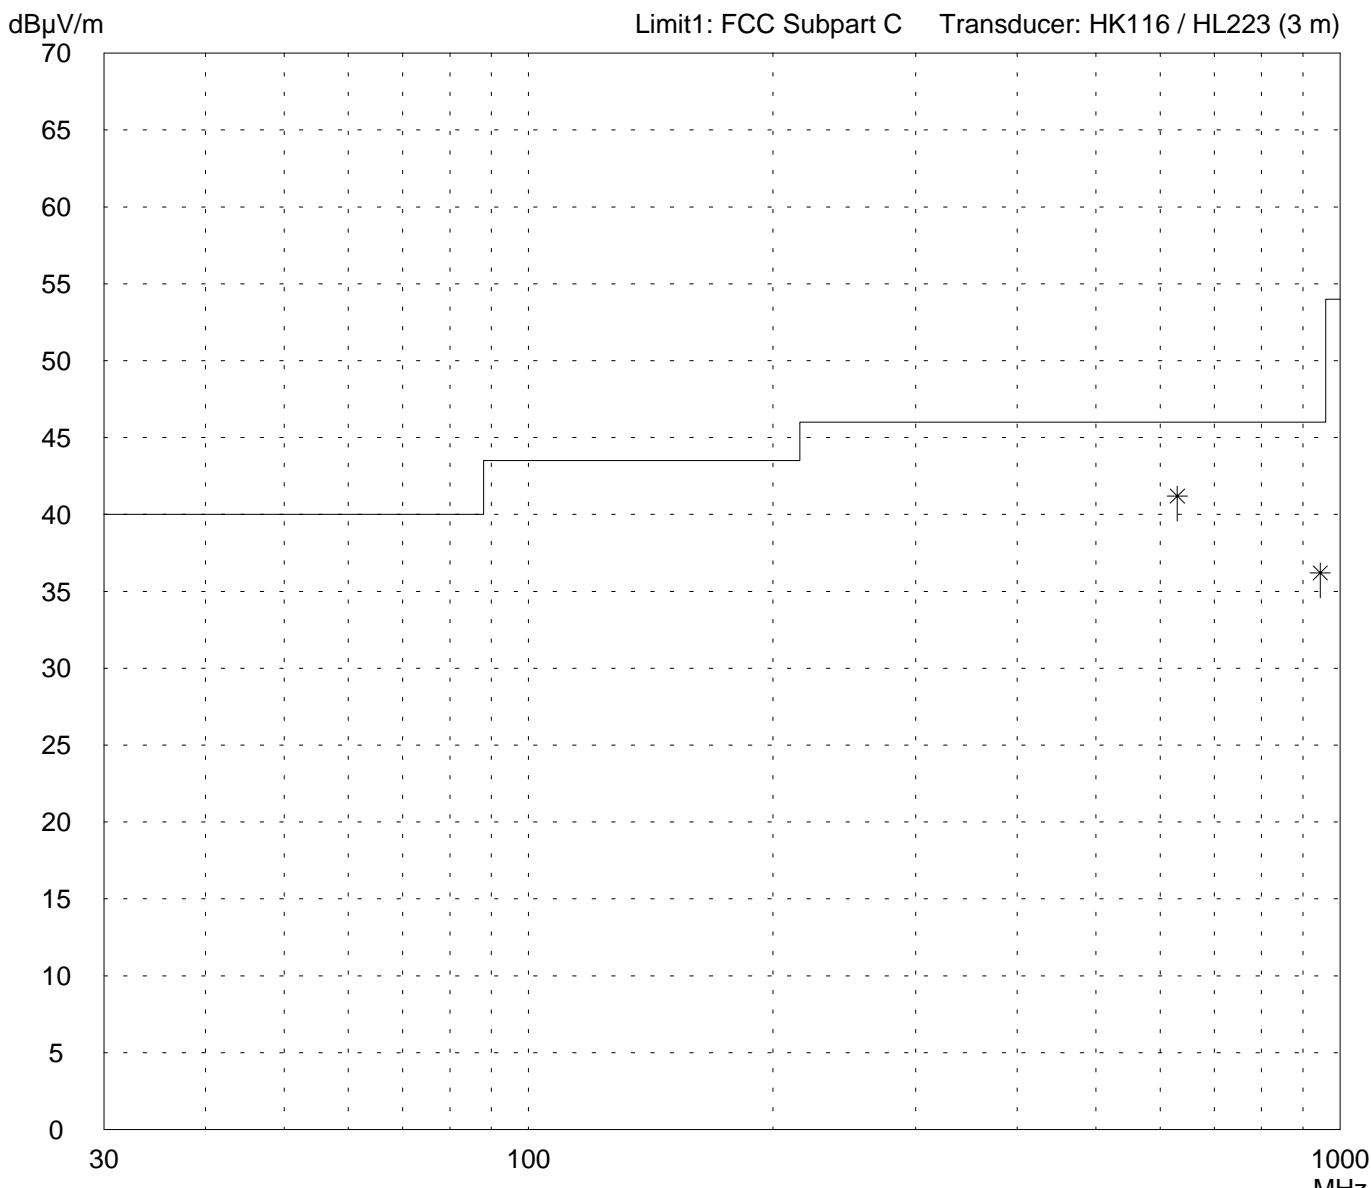

Result: Limit kept
-----------------------

Project file: 50530-40264	Page	of	Pages
------------------------------	------	----	-------