

File name: J76102C2.RES
Date: 29. Nov 06 17:52




CMA Testing
and Certification
Laboratories
廠商會檢定中心

Scan Settings (2 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	1M	5k	9k	QP+AV	20ms	AUTO LN	OFF
1M	30M	10k	9k	QP+AV	20ms	AUTO LN	OFF

Transducer No.	Start	Stop	Name
12	150k	30M	CECF

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 30dB

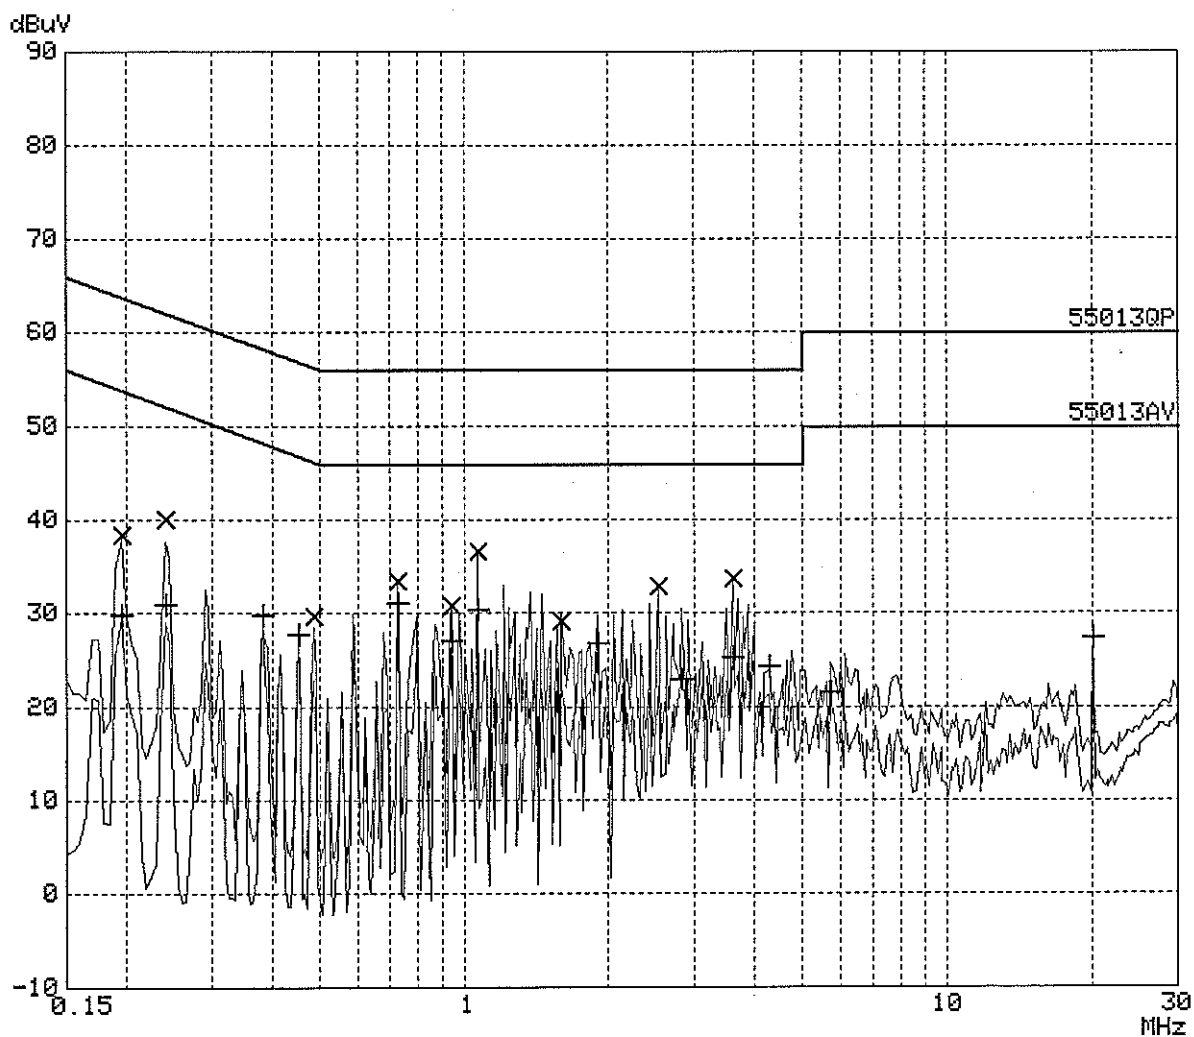

File name: J76102C2.RES
Date: 29. Nov 06 17:52

Final Measurement Results:

Indicated Phase/PE shows Configuration of max. Emission

Frequency MHz	QP Level dBuV	Delta Limit dB	Phase -	PE -
0.19500	38.4	-25.5	L1	gnd
0.24000	40.0	-22.0	N	gnd
0.48500	29.8	-26.5	N	gnd
0.72500	33.4	-22.5	L1	gnd
0.93500	30.8	-25.1	L1	gnd
1.07000	36.6	-19.3	L1	gnd
1.59000	29.2	-26.7	L1	gnd
2.53000	32.9	-23.0	N	gnd
3.60000	33.8	-22.1	L1	gnd

Frequency MHz	AV Level dBuV	Delta Limit dB	Phase -	PE -
0.19500	29.9	-23.9	L1	gnd
0.24000	31.0	-21.1	N	gnd
0.38000	29.9	-18.3	N	gnd
0.45000	27.7	-19.1	N	gnd
0.72500	31.1	-14.8	L1	gnd
0.93500	27.1	-18.8	L1	gnd
1.07000	30.4	-15.5	L1	gnd
1.90000	26.8	-19.1	L1	gnd
2.82000	23.0	-22.9	L1	gnd
3.60000	25.3	-20.7	L1	gnd
4.28000	24.4	-21.5	N	gnd
5.74000	21.6	-28.4	N	gnd
20.00000	27.4	-22.5	L1	gnd

* limit exceeded