



# FCC PART 15 SUBPART C

## TEST AND MEASUREMENT REPORT

For

**Fanhattan LLC**

489 S El Camino Real,  
San Mateo, CA 94402, USA

**FCC ID: S2E-C0818**

|                                                                                                                                                             |                                                |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|
| <b>Report Type:</b><br>Original Report                                                                                                                      | <b>Product Type:</b><br>Digital Media Streamer |
| <b>Prepared By:</b> <u>Jeffrey Wu</u>                                  |                                                |
| <b>Report Number:</b> <u>R1302203-247 STB</u>                                                                                                               |                                                |
| <b>Report Date:</b> <u>2013-04-10</u>                                                                                                                       |                                                |
| <b>Reviewed By:</b> <u>Quinn Jiang</u>                                 |                                                |
| Test Engineer<br>Bay Area Compliance Laboratories Corp.<br>1274 Anvilwood Avenue,<br>Sunnyvale, CA 94089, USA<br>Tel: (408) 732-9162<br>Fax: (408) 732-9164 |                                                |

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government. \* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "\*" (Rev.3)

## TABLE OF CONTENTS

|                                                                                       |           |
|---------------------------------------------------------------------------------------|-----------|
| <b>1 General Description.....</b>                                                     | <b>5</b>  |
| 1.1 Product Description for Equipment Under Test (EUT) .....                          | 5         |
| 1.2 Mechanical Description of EUT .....                                               | 5         |
| 1.3 Objective.....                                                                    | 5         |
| 1.4 Related Submittal(s)/Grant(s) .....                                               | 5         |
| 1.5 Test Methodology .....                                                            | 5         |
| 1.6 Measurement Uncertainty .....                                                     | 5         |
| 1.7 Test Facility .....                                                               | 6         |
| <b>2 System Test Configuration.....</b>                                               | <b>7</b>  |
| 2.1 Justification.....                                                                | 7         |
| 2.2 EUT Exercise Software.....                                                        | 7         |
| 2.3 Special Equipment .....                                                           | 7         |
| 2.4 Equipment Modifications.....                                                      | 7         |
| 2.5 Local Support Equipment .....                                                     | 7         |
| 2.6 EUT Internal Configuration Details.....                                           | 7         |
| 2.7 Interface Ports and Cabling.....                                                  | 7         |
| 2.8 External I/O Cabling List and AC Cord.....                                        | 8         |
| 2.9 Power Supply List and Details.....                                                | 8         |
| <b>3 Summary of Test Results .....</b>                                                | <b>9</b>  |
| <b>4 FCC §15.247(i) &amp; §2.1091 – RF Exposure.....</b>                              | <b>10</b> |
| 4.1 Applicable Standard.....                                                          | 10        |
| 4.2 MPE Prediction.....                                                               | 10        |
| 4.3 MPE Results .....                                                                 | 10        |
| <b>5 FCC §15.203 – Antenna Requirements.....</b>                                      | <b>12</b> |
| 5.1 Applicable Standard.....                                                          | 12        |
| 5.2 Antenna List.....                                                                 | 12        |
| 5.3 Result .....                                                                      | 12        |
| <b>6 FCC §15.207 – AC Line Conducted Emissions .....</b>                              | <b>13</b> |
| 6.1 Applicable Standards .....                                                        | 13        |
| 6.2 Test Setup .....                                                                  | 13        |
| 6.3 Test Procedure .....                                                              | 13        |
| 6.4 Test Setup Block Diagram.....                                                     | 14        |
| 6.5 Corrected Amplitude & Margin Calculation.....                                     | 14        |
| 6.6 Test Equipment List and Details.....                                              | 15        |
| 6.7 Test Environmental Conditions .....                                               | 15        |
| 6.8 Summary of Test Results .....                                                     | 15        |
| 6.9 Conducted Emissions Test Plots and Data.....                                      | 16        |
| <b>7 FCC §2.1051 &amp; §15.247(d) – Spurious Emissions at Antenna Terminals .....</b> | <b>18</b> |
| 7.1 Applicable Standard.....                                                          | 18        |
| 7.2 Measurement Procedure.....                                                        | 18        |
| 7.3 Test Equipment List and Details.....                                              | 18        |
| 7.4 Test Environmental Conditions .....                                               | 18        |
| 7.5 Test Results.....                                                                 | 18        |
| <b>8 FCC §15.205, §15.209 &amp; §15.247(d) – Spurious Radiated Emissions .....</b>    | <b>25</b> |
| 8.1 Applicable Standard.....                                                          | 25        |
| 8.2 Test Setup .....                                                                  | 26        |
| 8.3 Test Procedure .....                                                              | 26        |
| 8.4 Corrected Amplitude & Margin Calculation.....                                     | 27        |
| 8.5 Test Equipment List and Details.....                                              | 27        |
| 8.6 Test Environmental Conditions .....                                               | 27        |

|           |                                                                    |           |
|-----------|--------------------------------------------------------------------|-----------|
| 8.7       | Summary of Test Results .....                                      | 28        |
| 8.8       | Radiated Emissions Test Data and Plots.....                        | 29        |
| <b>9</b>  | <b>FCC§15.247(a) (2) – 6 dB &amp; 99% Emission Bandwidth .....</b> | <b>45</b> |
| 9.1       | Applicable Standard.....                                           | 45        |
| 9.2       | Measurement Procedure.....                                         | 45        |
| 9.3       | Test Equipment List and Details.....                               | 45        |
| 9.4       | Test Environmental Conditions .....                                | 45        |
| 9.5       | Test Results.....                                                  | 46        |
| <b>10</b> | <b>FCC §15.247(b) – Peak Output Power Measurement .....</b>        | <b>51</b> |
| 10.1      | Applicable Standard.....                                           | 51        |
| 10.2      | Measurement Procedure.....                                         | 51        |
| 10.3      | Test Equipment List and Details.....                               | 51        |
| 10.4      | Test Environmental Conditions .....                                | 51        |
| 10.5      | Test Results.....                                                  | 52        |
| <b>11</b> | <b>FCC §15.247(d) – 100 kHz Bandwidth of Band Edges.....</b>       | <b>57</b> |
| 11.1      | Applicable Standard.....                                           | 57        |
| 11.2      | Measurement Procedure.....                                         | 57        |
| 11.3      | Test Equipment List and Details.....                               | 57        |
| 11.4      | Test Environmental Conditions .....                                | 57        |
| 11.5      | Test Results.....                                                  | 57        |
| <b>12</b> | <b>FCC §15.247(e) – Power Spectral Density .....</b>               | <b>60</b> |
| 12.1      | Applicable Standard.....                                           | 60        |
| 12.2      | Measurement Procedure.....                                         | 60        |
| 12.3      | Test Equipment List and Details.....                               | 60        |
| 12.4      | Test Environmental Conditions .....                                | 60        |
| 12.5      | Test Results.....                                                  | 61        |
| <b>13</b> | <b>Exhibit A – FCC Equipment Labeling Requirements.....</b>        | <b>66</b> |
| 13.1      | FCC ID Label Requirements .....                                    | 66        |
| 13.2      | FCC ID Label Contents and Location.....                            | 66        |
| <b>14</b> | <b>Exhibit B – Test Setup Photographs .....</b>                    | <b>67</b> |
| 14.1      | AC Line Conducted Emission Front View .....                        | 67        |
| 14.2      | AC Line Conducted Emission Side View.....                          | 67        |
| 14.3      | Radiated Emission Front View at 3 Meter .....                      | 68        |
| 14.4      | Radiated Emission below 1 GHz Rear View at 3 Meter.....            | 68        |
| 14.5      | Radiated Emission above 1 GHz Rear View at 3 Meter .....           | 69        |
| <b>15</b> | <b>Exhibit C – EUT Photographs.....</b>                            | <b>70</b> |
| 15.1      | EUT – Top View.....                                                | 70        |
| 15.2      | EUT – Bottom View .....                                            | 70        |
| 15.3      | EUT – Front View .....                                             | 71        |
| 15.4      | EUT – Rear View .....                                              | 71        |
| 15.5      | EUT – Side View (1) .....                                          | 72        |
| 15.6      | EUT – Side View (2) .....                                          | 72        |
| 15.7      | EUT – Main Board Top View .....                                    | 73        |
| 15.8      | EUT – Main Board Bottom View .....                                 | 73        |
| 15.9      | EUT – Antenna .....                                                | 74        |
| 15.10     | EUT – AC/DC Power Adapter .....                                    | 74        |
| 15.11     | EUT – AC/DC Power Adapter Label View.....                          | 75        |

**DOCUMENT REVISION HISTORY**

| <b>Revision Number</b> | <b>Report Number</b> | <b>Description of Revision</b> | <b>Date of Revision</b> |
|------------------------|----------------------|--------------------------------|-------------------------|
| 0                      | R1302203-247 STB     | Original Report                | 2013-04-10              |

## 1 General Description

---

### 1.1 Product Description for Equipment Under Test (EUT)

This test and measurement report was prepared on behalf of Fanhattan LLC, and their product FCC ID: S2E-C0818, model: F1201 or the “EUT” as referred on this report is Digital Media Streamer with 802.11 b/g/n HT20 and Bluetooth 4.0 functionalities.

### 1.2 Mechanical Description of EUT

The “EUT” measures approximately  $9.1\text{ cm (L)} \times 7.9\text{ cm (W)} \times 2.8\text{ cm (H)}$ , and weighs approximately 257.0g.

*The test data gathered are from typical production sample, serial number: F1EVT100038, provided by the manufacturer.*

### 1.3 Objective

This report is prepared on behalf of *Fanhattan LLC*. in accordance with Part 2, Subpart J, and Part 15, Subparts B and C of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15.247 rules for Output Power, Antenna Requirements, 6 dB Bandwidth, and power spectral density, 100 kHz Bandwidth of Band Edges Measurement, Spurious Emissions, Conducted and Radiated Spurious Emissions.

### 1.4 Related Submittal(s)/Grant(s)

N/A

### 1.5 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

### 1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR16-4-2:2007, The Treatment of Uncertainty in EMC Measurements, the values ranging from  $\pm 2.0\text{ dB}$  for Conducted Emissions tests and  $\pm 4.0\text{ dB}$  for Radiated Emissions tests are the most accurate estimates pertaining to uncertainty of EMC measurements at BACL Corp.

## 1.7 Test Facility

The test site used by BACL Corp. to collect radiated and conducted emissions measurement data is located at its facility in Sunnyvale, California, USA.

The test site at BACL Corp. has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997, and Article 8 of the VCCI regulations on December 25, 1997. The test site also complies with the test methods and procedures set forth in CISPR 22:2008 §10.4 for measurements below 1 GHz and §10.6 for measurements above 1 GHz as well as ANSI C63.4-2003, ANSI C63.4-2009, TIA/EIA-603 & CISPR 24:2010.

The Federal Communications Commission and Voluntary Control Council for Interference have the reports on file and they are listed under FCC registration number: 90464 and VCCI Registration No.: A-0027. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL Corp. is an American Association for Laboratory Accreditation (A2LA) accredited laboratory (Lab Code 3297-02). The current scope of accreditations can be found at

<http://www.a2la.org/scopepdf/3297-02.pdf?CFID=1132286&CFTOKEN=e42a3240dac3f6ba-6DE17DCB-1851-9E57-477422F667031258&jsessionid=8430d44f1f47cf2996124343c704b367816b>

## 2 System Test Configuration

### 2.1 Justification

The EUT was configured for testing according to ANSI C63.4-2009.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

### 2.2 EUT Exercise Software

The test utility used was Adb Shell was provided by Fanhattan and was verified Jeffrey Wu to comply with the standard requirements being tested against.

| Radio Mode        | Frequency (MHz) |        |         |
|-------------------|-----------------|--------|---------|
|                   | Low CH          | Mid CH | High CH |
| Bluetooth 4.0     | 2402            | 2442   | 2480    |
| 802.11 b/g/n HT20 | 2412            | 2437   | 2462    |

### 2.3 Special Equipment

There were no special accessories were required, included, or intended for use with EUT during these tests.

### 2.4 Equipment Modifications

No modifications were made to the EUT.

### 2.5 Local Support Equipment

| Manufacturer | Description         | Model | Serial Number |
|--------------|---------------------|-------|---------------|
| Apple        | 15 inch Macbook Pro | -     | -             |

### 2.6 EUT Internal Configuration Details

| Manufacturer  | Description | Model | Serial Number  |
|---------------|-------------|-------|----------------|
| Fanhattan LLC | Main Board  | F1201 | 12108009-00090 |

### 2.7 Interface Ports and Cabling

| Cable Description        | Length (m) | To            | From          |
|--------------------------|------------|---------------|---------------|
| USB Cable                | <1m        | Debug Console | Laptop        |
| USB to mini Serial Cable | <1m        | EUT           | Debug Console |

**2.8 External I/O Cabling List and AC Cord**

N/A

**2.9 Power Supply List and Details**

| Manufacturer | Description        | Model     | Serial Number |
|--------------|--------------------|-----------|---------------|
| I.T.E        | AC/DC Power Supply | 3A12DWU05 | -             |



### 3 Summary of Test Results

Results reported relate only to the product tested.

| FCC Rules               | Description of Test                      | Results   |
|-------------------------|------------------------------------------|-----------|
| FCC §15.247(i), §2.1091 | RF Exposure                              | Compliant |
| FCC §15.203             | Antenna Requirement                      | Compliant |
| FCC §15.207(a)          | AC Line Conducted Emissions              | Compliant |
| FCC §15.247(d)          | Spurious Emissions at Antenna Port       | Compliant |
| FCC §15.205             | Restricted Bands                         | Compliant |
| FCC §15.209, §15.247(d) | Radiated Spurious Emissions              | Compliant |
| FCC §15.247(a)(2)       | 6 dB Emission Bandwidth                  | Compliant |
| FCC §15.247(b)(3)       | Maximum Peak Output Power                | Compliant |
| FCC §15.247(d)          | 100 kHz Bandwidth of Frequency Band Edge | Compliant |
| FCC §15.247(e)          | Power Spectral Density                   | Compliant |

## 4 FCC §15.247(i) & §2.1091 – RF Exposure

### 4.1 Applicable Standard

According to FCC §15.247(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

#### Limits for General Population/Uncontrolled Exposure

| Frequency Range (MHz)                               | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm <sup>2</sup> ) | Averaging Time (minutes) |
|-----------------------------------------------------|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| Limits for General Population/Uncontrolled Exposure |                               |                               |                                     |                          |
| 0.3-1.34                                            | 614                           | 1.63                          | * (100)                             | 30                       |
| 1.34-30                                             | 824/f                         | 2.19/f                        | * (180/f <sup>2</sup> )             | 30                       |
| 30-300                                              | 27.5                          | 0.073                         | 0.2                                 | 30                       |
| 300-1500                                            | /                             | /                             | f/1500                              | 30                       |
| 1500-100,000                                        | /                             | /                             | 1.0                                 | 30                       |

f = frequency in MHz

\* = Plane-wave equivalent power density

### 4.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

### 4.3 MPE Results

#### Bluetooth 4.0

Maximum peak output power at antenna input terminal (dBm): 6.70

Maximum peak output power at antenna input terminal (mW): 4.68

Prediction distance (cm): 20

Prediction frequency (MHz): 2442

Maximum Antenna Gain, typical (dBi): 1.19

Maximum Antenna Gain (numeric): 1.32

Power density of prediction frequency at 20.0 cm (mW/cm<sup>2</sup>): 0.0012

MPE limit for uncontrolled exposure at prediction frequency (mW/cm<sup>2</sup>): 1.0

**802.11 b/g/n-HT20**

|                                                                                         |               |
|-----------------------------------------------------------------------------------------|---------------|
| <u>Maximum peak output power at antenna input terminal (dBm):</u>                       | <u>16.79</u>  |
| <u>Maximum peak output power at antenna input terminal (mW):</u>                        | <u>47.75</u>  |
| <u>Prediction distance (cm):</u>                                                        | <u>20</u>     |
| <u>Prediction frequency (MHz):</u>                                                      | <u>2462</u>   |
| <u>Maximum Antenna Gain, typical (dBi):</u>                                             | <u>1.19</u>   |
| <u>Maximum Antenna Gain (numeric):</u>                                                  | <u>1.32</u>   |
| <u>Power density of prediction frequency at 20.0 cm (mW/cm<sup>2</sup>):</u>            | <u>0.0125</u> |
| <u>MPE limit for uncontrolled exposure at prediction frequency (mW/cm<sup>2</sup>):</u> | <u>1.0</u>    |

The device is compliant with the MPE limit of uncontrolled exposure. The maximum power density at the distance of 20 cm is 0.0125 mW/cm<sup>2</sup>, Limit is 1.0 mW/cm<sup>2</sup>.

## 5 FCC §15.203 – Antenna Requirements

### 5.1 Applicable Standard

According to FCC §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC §15.247 (b) (4), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 5.2 Antenna List

| Antenna Model | Antenna Gain (dBi) |
|---------------|--------------------|
| FANTV01 (STB) | 1.19               |

### 5.3 Result

The EUT's antenna consist of an UFL connector and has maximum gain of 1.19 dBi, which in accordance to sections FCC §15.203, is considered sufficient to comply with the provisions of these sections. Please refer to the EUT photos.

## 6 FCC §15.207 – AC Line Conducted Emissions

### 6.1 Applicable Standards

As per FCC §15.207 Conducted limits:

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

| Frequency of Emission<br>(MHz) | Conducted Limit (dBuV) |                       |
|--------------------------------|------------------------|-----------------------|
|                                | Quasi-Peak             | Average               |
| 0.15-0.5                       | 66 to 56 <sup>1</sup>  | 56 to 46 <sup>1</sup> |
| 0.5-5                          | 56                     | 46                    |
| 5-30                           | 60                     | 50                    |

Note <sup>1</sup>: Decreases with the logarithm of the frequency.

### 6.2 Test Setup

The measurement was performed at shield room, using the setup per ANSI C63.4-2009 measurement procedure. The specification used was FCC §15.207 limits.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The AC/DC power adapter of the EUT was connected with LISN which provided 120 V/60 Hz AC power.


### 6.3 Test Procedure

During the conducted emissions test, the power cord of the EUT host system was connected to the mains outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the peak detection mode, quasi-peak and average. Quasi-Peak readings are distinguished with a “QP.” Average readings are distinguished with an “Ave”.

## 6.4 Test Setup Block Diagram

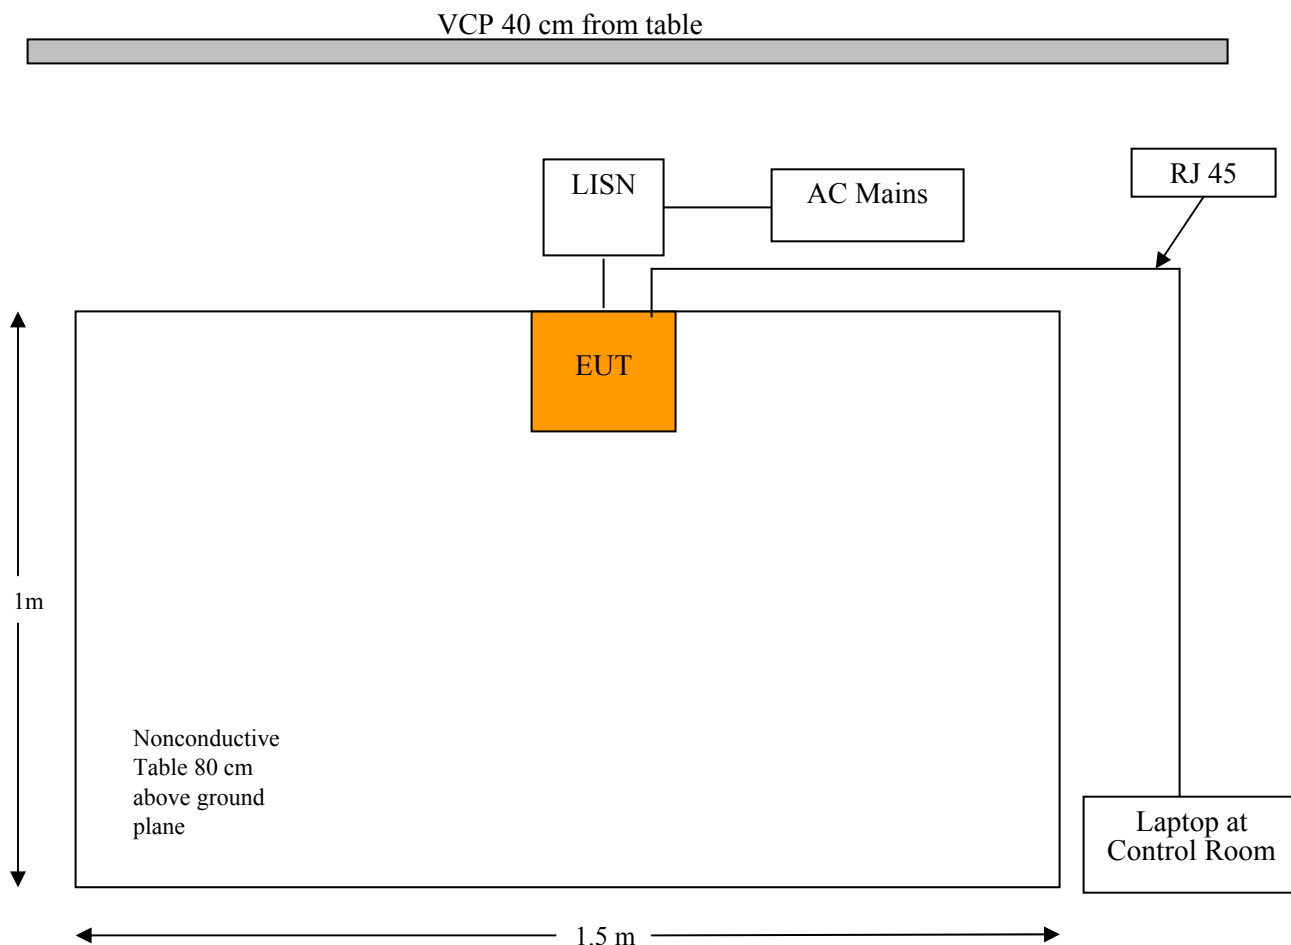

## 6.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Cable Loss (CL), and the Attenuator Factor (Atten) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = CL + \text{Atten}$$

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

## 6.6 Test Equipment List and Details

| Manufacturer      | Description       | Model No.           | Serial No. | Calibration Date | Calibration Interval |
|-------------------|-------------------|---------------------|------------|------------------|----------------------|
| Rohde & Schwarz   | EMI Test Receiver | ESCI 1166.5950K03   | 100338     | 2012-09-19       | 1 year               |
| Solar Electronics | LISN              | 9252-R-24-BNC       | 511213     | 2012-06-25       | 1 year               |
| TTE               | Filter, High Pass | H9962-150K-50-21378 | K7133      | 2012-05-30       | 1 year               |

**Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

## 6.7 Test Environmental Conditions

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 22 °C     |
| <b>Relative Humidity:</b> | 35 %      |
| <b>ATM Pressure:</b>      | 101.4 kPa |

The testing was performed by Jeffrey Wu on 2013-03-20 at 5 meter chamber 3

## 6.8 Summary of Test Results

According to the recorded data in following table, the EUT complied with the FCC Part 15.207 standard's conducted emissions limits, with the margin reading of:


Transmitting Mode the Worst Case: 802.11 b High channel

| Connection: AC/DC adapter connected to 120 V/60 Hz, AC |                 |                               |             |
|--------------------------------------------------------|-----------------|-------------------------------|-------------|
| Margin (dB)                                            | Frequency (MHz) | Conductor Mode (Line/Neutral) | Range (MHz) |
| -4.65                                                  | 0.430917        | Neutral                       | 0.15-30     |

## 6.9 Conducted Emissions Test Plots and Data

Worst Case Transmitting Mode: 802.11 b High channel

120 V, 60 Hz – Line

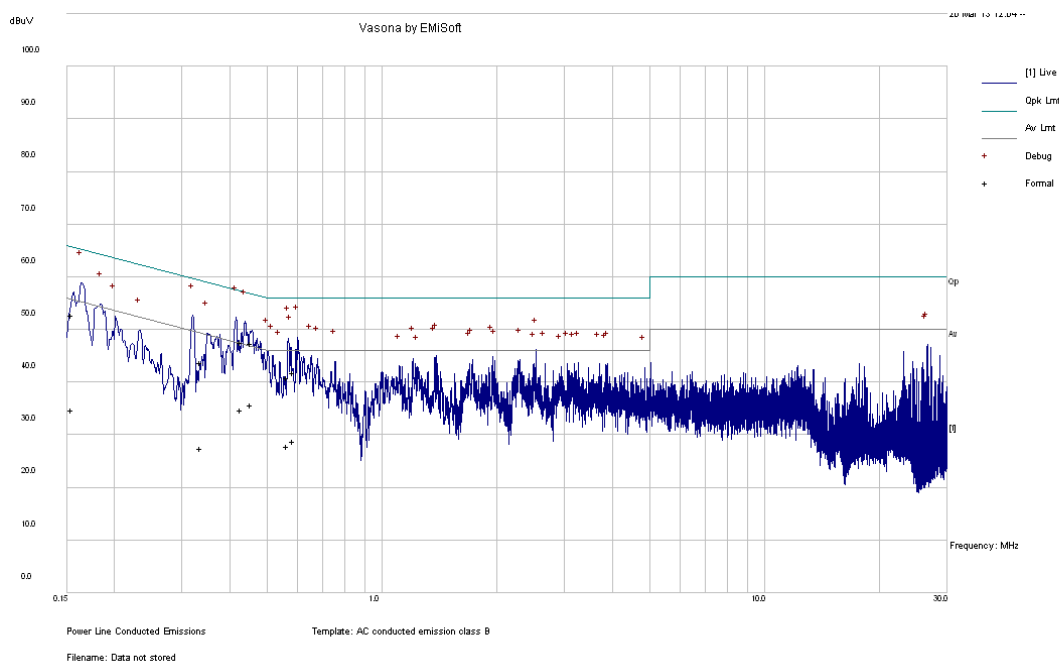

Quasi-Peak Measurements:


| Frequency (MHz) | Corrected Amplitude (dBμV) | Conductor (Line/Neutral) | Limit (dBμV) | Margin (dB) |
|-----------------|----------------------------|--------------------------|--------------|-------------|
| 0.454965        | 47.35                      | Line                     | 56.78        | -9.43       |
| 0.428868        | 47.63                      | Line                     | 57.27        | -9.64       |
| 0.154905        | 52.75                      | Line                     | 65.73        | -12.99      |
| 0.586596        | 41.8                       | Line                     | 56           | -14.20      |
| 0.568197        | 40.93                      | Line                     | 56           | -15.07      |
| 0.337248        | 43.79                      | Line                     | 59.27        | -15.48      |

Average Measurements:

| Frequency (MHz) | Corrected Amplitude (dBμV) | Conductor (Line/Neutral) | Limit (dBμV) | Margin (dB) |
|-----------------|----------------------------|--------------------------|--------------|-------------|
| 0.454965        | 35.79                      | Line                     | 46.78        | -10.99      |
| 0.428868        | 34.78                      | Line                     | 47.27        | -12.49      |
| 0.586596        | 28.85                      | Line                     | 46           | -17.15      |
| 0.568197        | 27.95                      | Line                     | 46           | -18.05      |
| 0.154905        | 34.84                      | Line                     | 55.73        | -20.90      |
| 0.337248        | 27.42                      | Line                     | 49.27        | -21.85      |



## 120 V, 60 Hz – Neutral

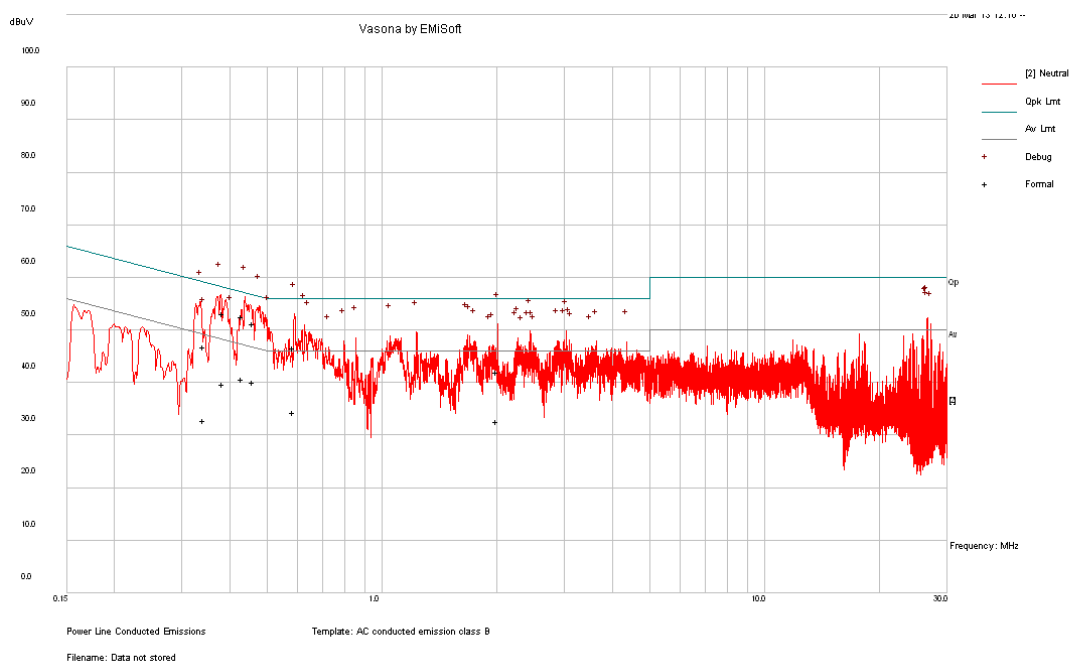

## Quasi-Peak Measurements:

| Frequency (MHz) | Corrected Amplitude (dBμV) | Conductor (Line/Neutral) | Limit (dBμV) | Margin (dB) |
|-----------------|----------------------------|--------------------------|--------------|-------------|
| 0.430917        | 52.58                      | Neutral                  | 57.24        | -4.65       |
| 0.384903        | 53.15                      | Neutral                  | 58.17        | -5.02       |
| 0.461892        | 51.33                      | Neutral                  | 56.66        | -5.33       |
| 0.586002        | 46.7                       | Neutral                  | 56           | -9.30       |
| 0.342579        | 46.88                      | Neutral                  | 59.14        | -12.27      |
| 1.992816        | 42.01                      | Neutral                  | 56           | -13.99      |

## Average Measurements:

| Frequency (MHz) | Corrected Amplitude (dBμV) | Conductor (Line/Neutral) | Limit (dBμV) | Margin (dB) |
|-----------------|----------------------------|--------------------------|--------------|-------------|
| 0.461892        | 40.09                      | Neutral                  | 46.66        | -6.57       |
| 0.430917        | 40.65                      | Neutral                  | 47.24        | -6.59       |
| 0.384903        | 39.85                      | Neutral                  | 48.17        | -8.32       |
| 0.586002        | 34.42                      | Neutral                  | 46           | -11.58      |
| 1.992816        | 32.59                      | Neutral                  | 46           | -13.41      |
| 0.342579        | 32.93                      | Neutral                  | 49.14        | -16.21      |

## 7 FCC §2.1051 & §15.247(d) – Spurious Emissions at Antenna Terminals

### 7.1 Applicable Standard

For FCC §15.247(d) in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

### 7.2 Measurement Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

### 7.3 Test Equipment List and Details

| Manufacturer | Description       | Model No. | Serial No. | Calibration Date | Calibration Interval |
|--------------|-------------------|-----------|------------|------------------|----------------------|
| Agilent      | Spectrum Analyzer | E4446A    | US44300386 | 2012-09-29       | 1 Year               |

**Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

### 7.4 Test Environmental Conditions

|                    |             |
|--------------------|-------------|
| Temperature:       | 21-22 °C    |
| Relative Humidity: | 34-47 %     |
| ATM Pressure:      | 101-102 kPa |

*The testing was performed by Jeffrey Wu on 2013-03-15 to 2013-03-26 at RF Site*


### 7.5 Test Results

Please refer to following plots of spurious emissions.


Bluetooth 4.0

Low Channel, 2402 MHz

Plot: 30 MHz – 3 GHz

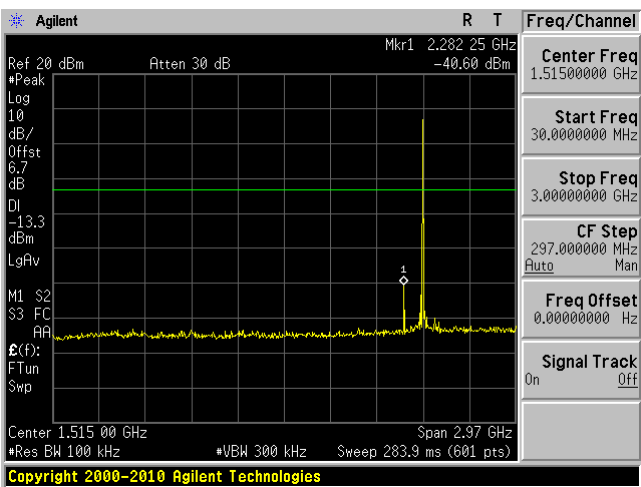


Plot: 3 GHz – 25 GHz

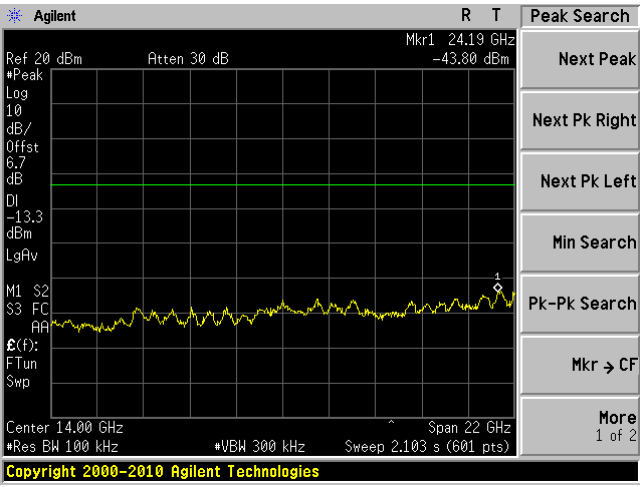


Middle Channel, 2442 MHz

Plot: 30 MHz – 3 GHz

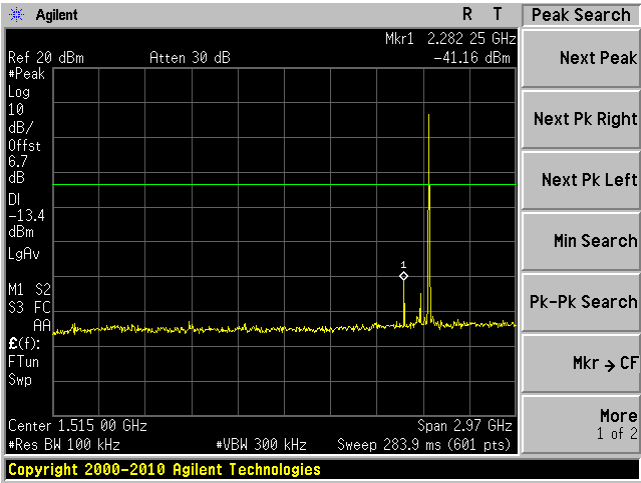


Plot: 3 GHz – 25 GHz

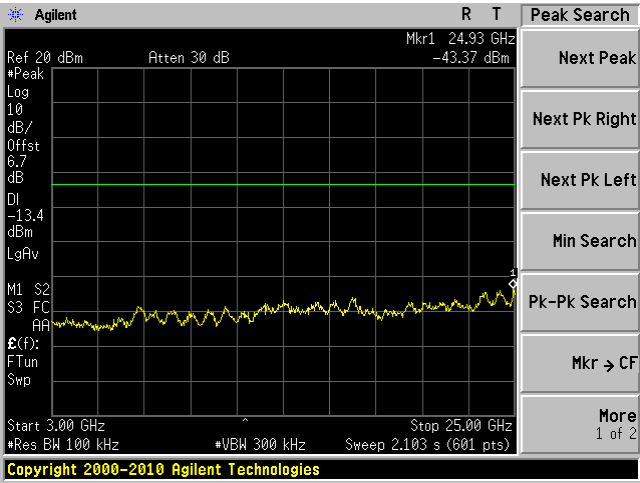

High Channel, 2480 MHz

Plot: 30 MHz – 3 GHz

Plot: 3 GHz – 25 GHz

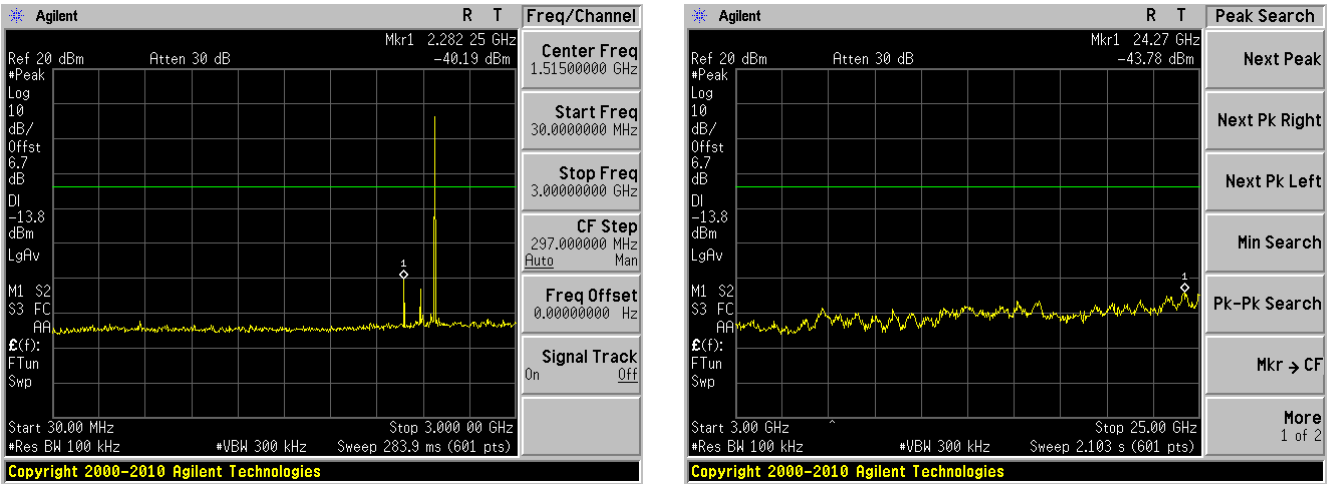


802.11b Mode

Low Channel, 2412 MHz


Plot: 30 MHz – 3 GHz

Plot: 3 GHz – 25 GHz

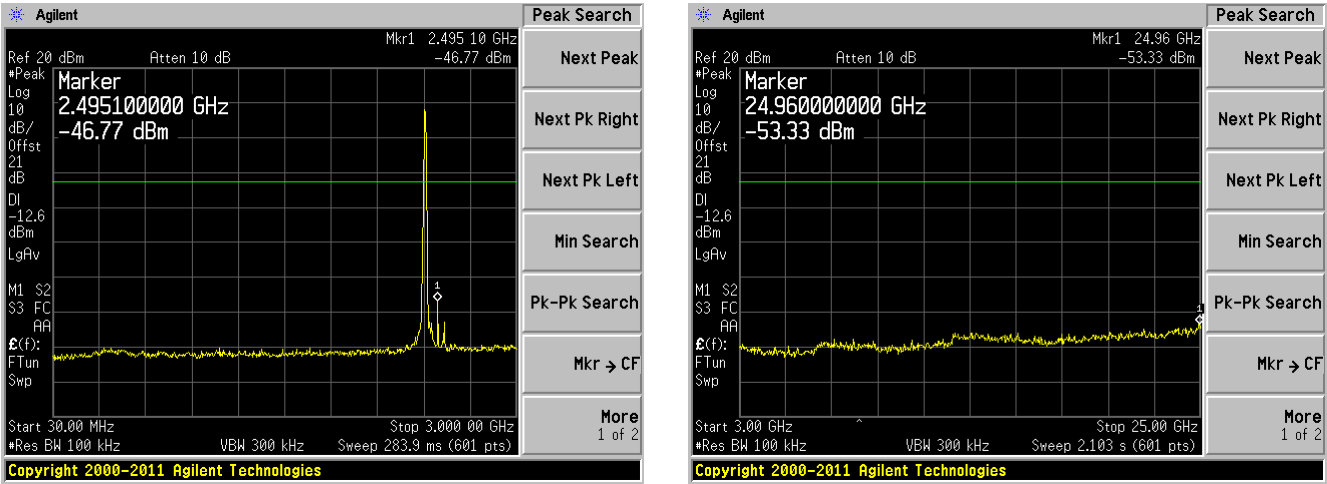


Middle Channel, 2437 MHz

Plot: 30 MHz – 3 GHz

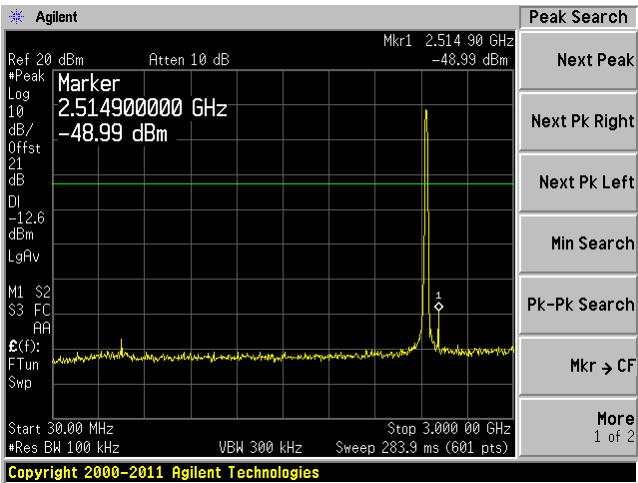


Plot: 3 GHz – 25 GHz

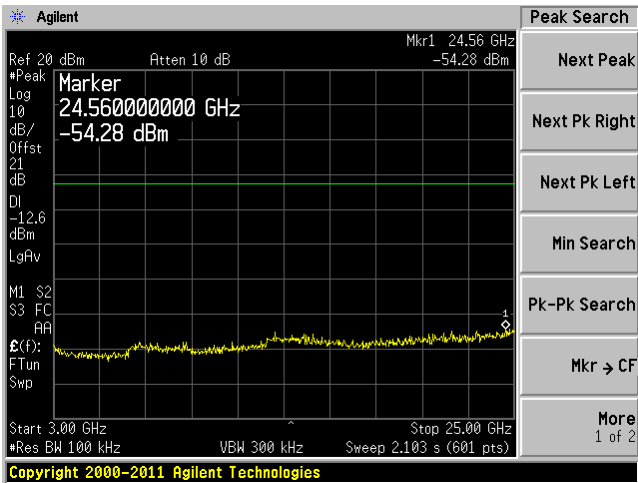


High Channel, 2462 MHz

Plot: 30 MHz – 3 GHz

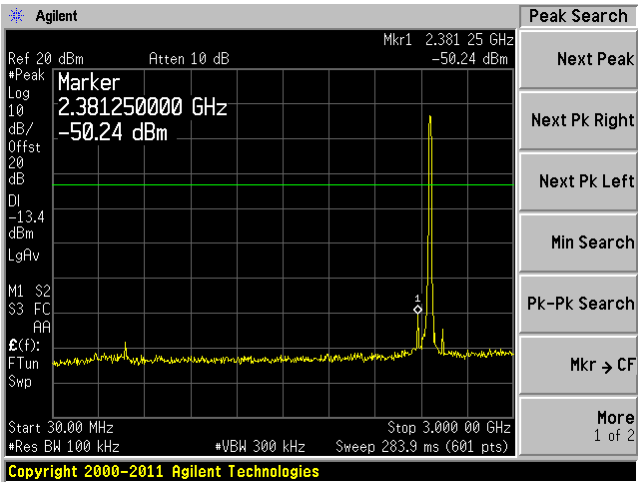

Plot: 3 GHz – 25 GHz


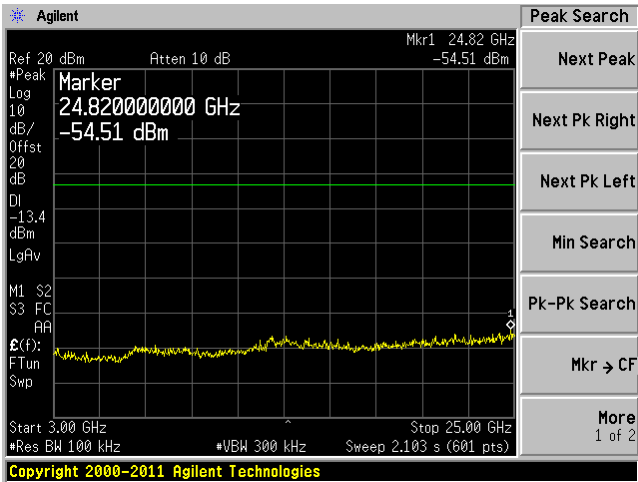


802.11g Mode

Low Channel, 2412 MHz

Plot: 30 MHz – 3 GHz



Plot: 3 GHz – 25 GHz

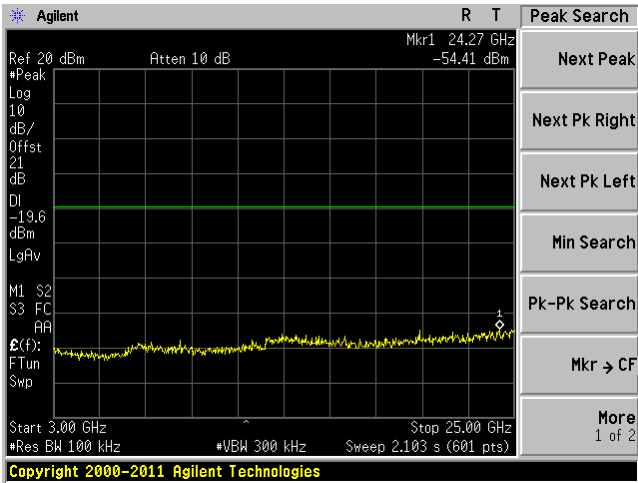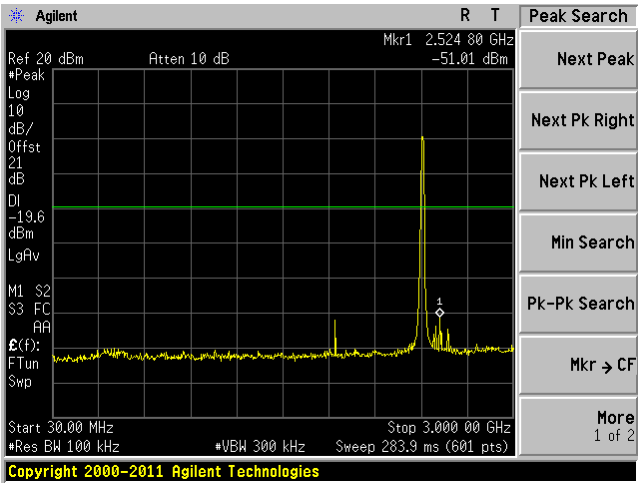

Middle Channel, 2437 MHz

Plot: 30 MHz – 3 GHz


Plot: 3 GHz – 25 GHz

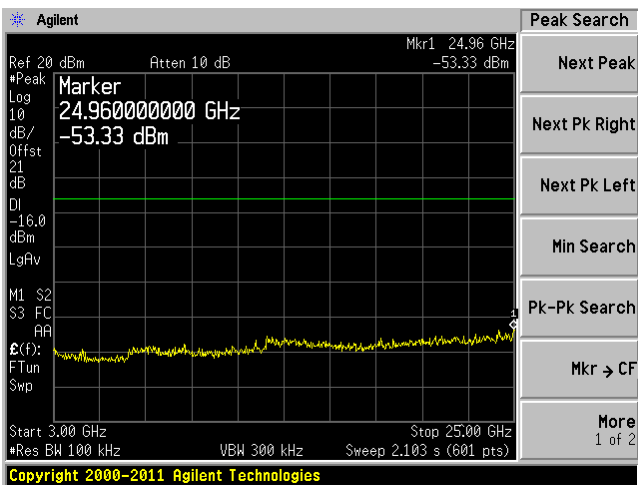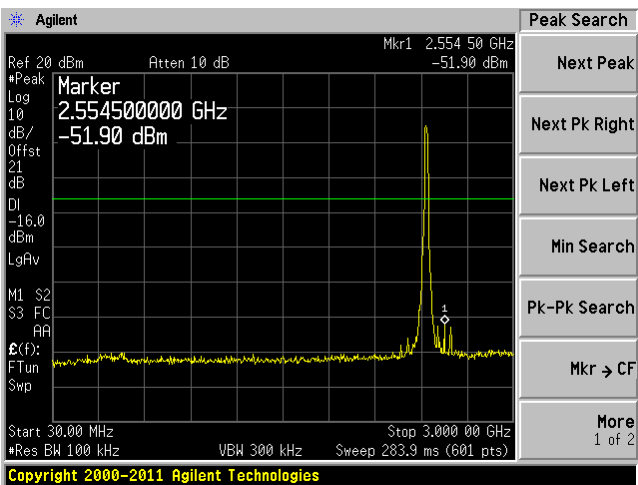

High Channel, 2462 MHz

Plot: 30 MHz – 3 GHz

Plot: 3 GHz – 25 GHz

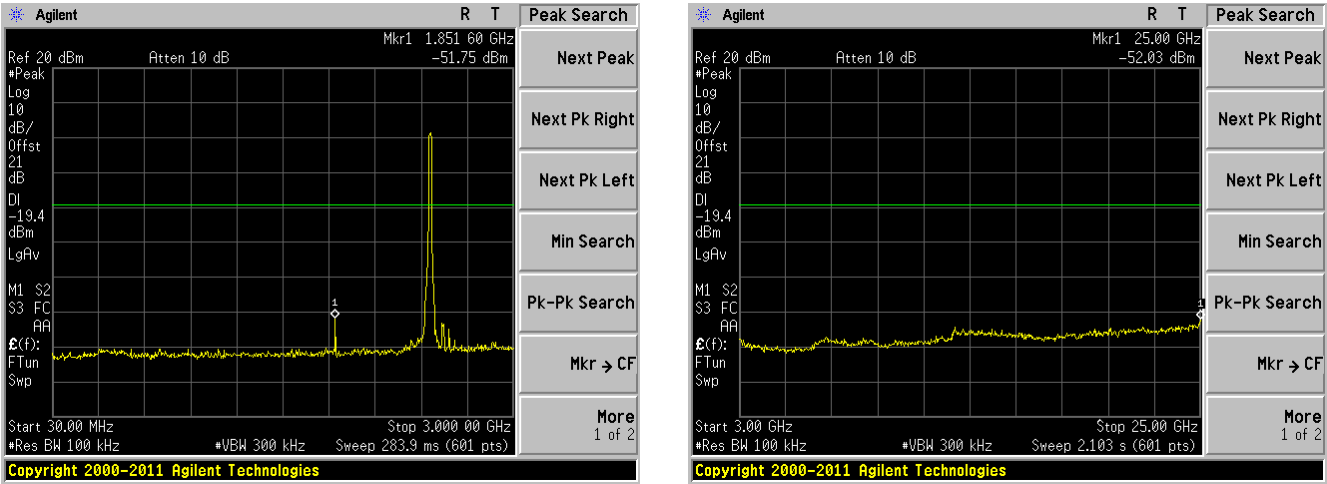


802.11n-HT20 mode

Low Channel, 2412 MHz


Plot: 30 MHz – 3 GHz

Plot: 3 GHz – 25 GHz

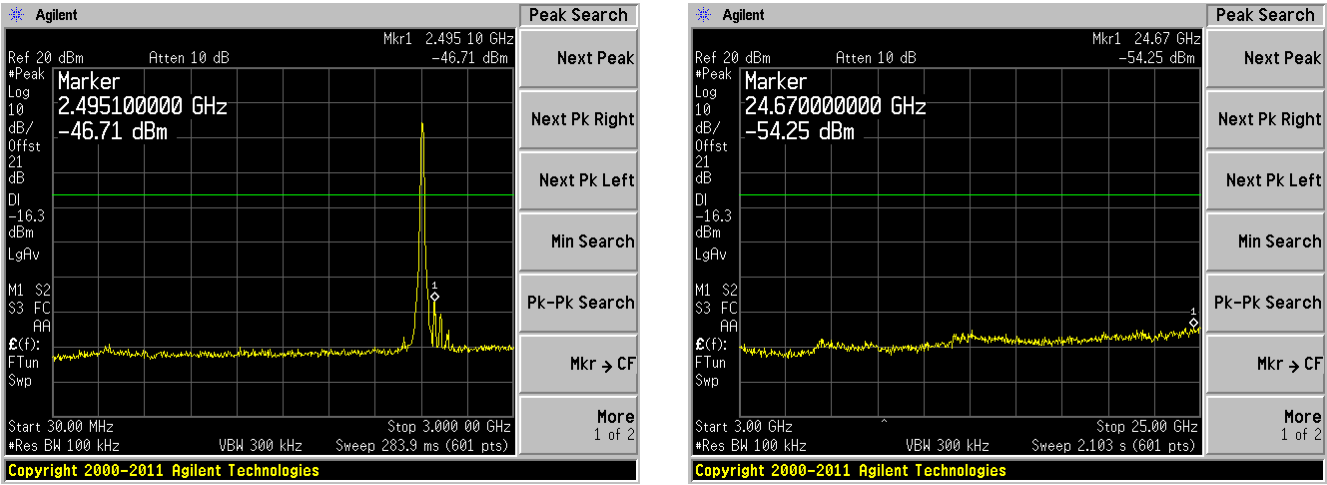


Middle Channel, 2437 MHz

Plot: 30 MHz – 3 GHz

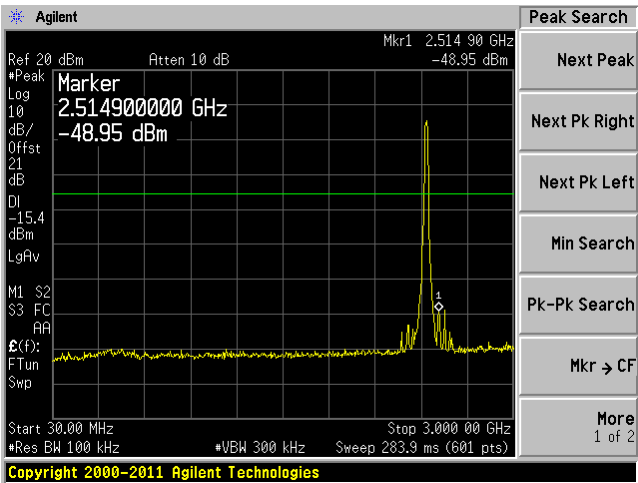


Plot: 3 GHz – 25 GHz

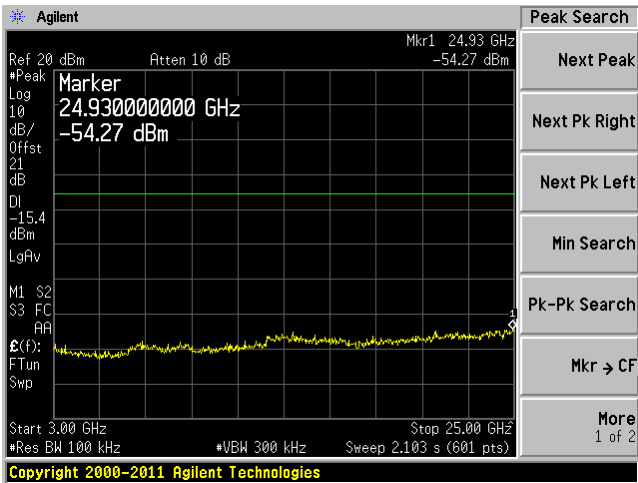


High Channel, 2462 MHz

Plot: 30 MHz – 3 GHz

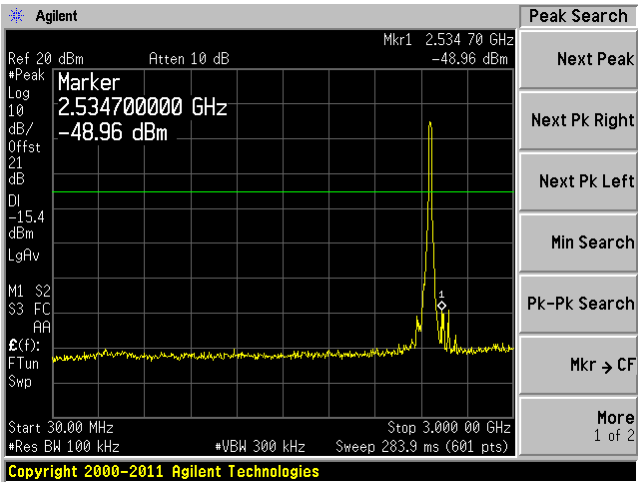

Plot: 3 GHz – 25 GHz

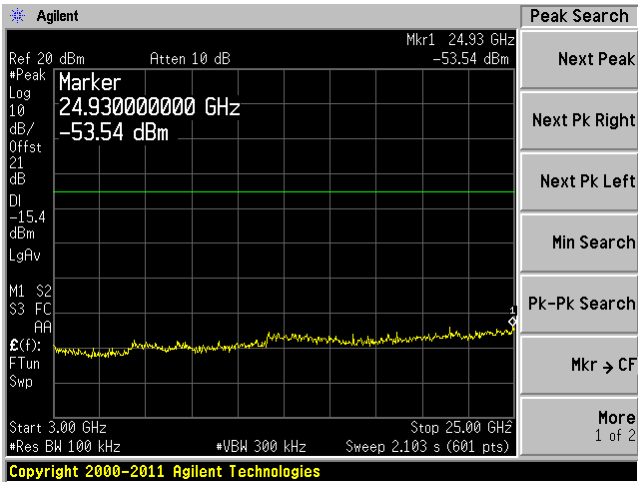



## 8 FCC §15.205, §15.209 & §15.247(d) – Spurious Radiated Emissions

### 8.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As per FCC §15.209(a) and RSS-210: Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

| Frequency (MHz) | Field Strength (micro volts/meter) | Measurement Distance (meters) |
|-----------------|------------------------------------|-------------------------------|
| 0.009 - 0.490   | 2400/F(kHz)                        | 300                           |
| 0.490 - 1.705   | 24000/F(kHz)                       | 30                            |
| 1.705 - 30.0    | 30                                 | 30                            |
| 30 - 88         | 100**                              | 3                             |
| 88 - 216        | 150**                              | 3                             |
| 216 - 960       | 200**                              | 3                             |
| Above 960       | 500                                | 3                             |

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                 | MHz                   | MHz             | GHz           |
|---------------------|-----------------------|-----------------|---------------|
| 0.090 – 0.110       | 16.42 – 16.423        | 960 – 1240      | 4.5 – 5.15    |
| 0.495 – 0.505       | 16.69475 – 16.69525   | 1300 – 1427     | 5.35 – 5.46   |
| 2.1735 – 2.1905     | 25.5 – 25.67          | 1435 – 1626.5   | 7.25 – 7.75   |
| 4.125 – 4.128       | 37.5 – 38.25          | 1645.5 – 1646.5 | 8.025 – 8.5   |
| 4.17725 – 4.17775   | 73 – 74.6             | 1660 – 1710     | 9.0 – 9.2     |
| 4.20725 – 4.20775   | 74.8 – 75.2           | 1718.8 – 1722.2 | 9.3 – 9.5     |
| 6.215 – 6.218       | 108 – 121.94          | 2200 – 2300     | 10.6 – 12.7   |
| 6.26775 – 6.26825   | 123 – 138             | 2310 – 2390     | 13.25 – 13.4  |
| 6.31175 – 6.31225   | 149.9 – 150.05        | 2483.5 – 2500   | 14.47 – 14.5  |
| 8.291 – 8.294       | 156.52475 – 156.52525 | 2690 – 2900     | 15.35 – 16.2  |
| 8.362 – 8.366       | 156.7 – 156.9         | 3260 – 3267     | 17.7 – 21.4   |
| 8.37625 – 8.38675   | 162.0125 – 167.17     | 3332 – 3339     | 22.01 – 23.12 |
| 8.41425 – 8.41475   | 167.72 – 173.2        | 33458 – 3358    | 23.6 – 24.0   |
| 12.29 – 12.293      | 240 – 285             | 3600 – 4.400    | 31.2 – 31.8   |
| 12.51975 – 12.52025 | 322 – 335.4           |                 | 36.43 – 36.5  |
| 12.57675 – 12.57725 | 399.9 – 410           |                 | Above 38.6    |
| 13.36 – 13.41       | 608 – 614             |                 |               |

As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

## 8.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.4-2009. The specification used was the FCC 15 Subpart C limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

## 8.3 Test Procedure

For the radiated emissions test, the EUT host, and all support equipment power cords was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT is set 3 meter away from the testing antenna, which is varied from 1-4 meter, and the EUT is placed on a turntable, which is 0.8 meter above ground plane, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

The spectrum analyzer or receiver is set as:

Below 1000 MHz:

$$\text{RBW} = 100 \text{ kHz} / \text{VBW} = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$

Above 1000 MHz:

- (1) Peak: RBW = 1MHz / VBW = 1MHz / Sweep = Auto
- (2) Average: RBW = 1MHz / VBW = 10Hz / Sweep = Auto

## 8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = Ai + AF + CL + Atten - Ga$$

For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

## 8.5 Test Equipment List and Details

| Manufacturer    | Description        | Model No.            | Serial No. | Calibration Date | Calibration Interval |
|-----------------|--------------------|----------------------|------------|------------------|----------------------|
| Agilent         | Spectrum Analyzer  | E4446A               | US44300386 | 2012-09-29       | 1 Year               |
| EMCO            | Horn Antenna       | 3115                 | 9511-4627  | 2012-10-17       | 1 Year               |
| Mini-Circuits   | Pre-amplifier      | ZVA-183-S            | 570400946  | 2012-05-09       | 1 Year               |
| Rohde & Schwarz | Test Receiver      | ESCI<br>1166.5950K03 | 100338     | 2012-09-19       | 1 Year               |
| Sunol Sciences  | Biconi-Log Antenna | JB3                  | A020106-2  | 2012-08-15       | 1 Year               |
| HP              | Pre-amplifier      | 8447D                | 2944A06639 | 2012-06-09       | 1 Year               |
| Sunol Sciences  | System Controller  | SC104V               | 113005-1   | N/A              | N/A                  |

**Statement of Traceability:** BACL attests that all calibrations have been performed per the A2LA requirements, traceable to NIST.

## 8.6 Test Environmental Conditions

|                           |             |
|---------------------------|-------------|
| <b>Temperature:</b>       | 21-22°C     |
| <b>Relative Humidity:</b> | 35-46 %     |
| <b>ATM Pressure:</b>      | 101-102 kPa |

The testing was performed by Jeffrey Wu from 2013-03-18 to 2013-03-27 at 5m chamber.

## 8.7 Summary of Test Results

According to the data hereinafter, the EUT complied with the FCC Title 47, Part 15C standard's radiated emissions limits, and had the worst margin of:

### 1) 30-1000 MHz:

Bluetooth 4.0

| Mode: Transmitting |                 |                                    |              |
|--------------------|-----------------|------------------------------------|--------------|
| Margin (dB)        | Frequency (MHz) | Polarization (Horizontal/Vertical) | Range        |
| -7.36              | 51.6557         | Vertical                           | 30 MHz-1 GHz |

802.11 b/g/n-HT20

| Mode: Transmitting |                 |                                    |              |
|--------------------|-----------------|------------------------------------|--------------|
| Margin (dB)        | Frequency (MHz) | Polarization (Horizontal/Vertical) | Range        |
| -3.53              | 999.978         | Horizontal                         | 30 MHz-1 GHz |

### 2) 1 – 25 GHz:

Bluetooth 4.0

| Mode: Transmitting |                 |                                    |              |
|--------------------|-----------------|------------------------------------|--------------|
| Margin (dB)        | Frequency (MHz) | Polarization (Horizontal/Vertical) | Range        |
| -8.745             | 2483.5          | Horizontal                         | 1GHz -25 GHz |

802.11 b/g/n HT20

| Mode: Transmitting |                 |                                    |              |
|--------------------|-----------------|------------------------------------|--------------|
| Margin (dB)        | Frequency (MHz) | Polarization (Horizontal/Vertical) | Range        |
| -0.154             | 2390            | Vertical                           | 1GHz -25 GHz |

Please refer to the following table and plots for specific test result details

## 8.8 Radiated Emissions Test Data and Plots

### 1) 30 MHz – 1 GHz, Measured at 3 meters

Quasi-Peak Measurements

#### Bluetooth 4.0

| Frequency (MHz)          | Corrected Amplitude (dBμV/m) | Antenna Height (cm) | Antenna Polarity (H/V) | Turntable Azimuth (degrees) | Limit (dBμV/m) | Margin (dB) |
|--------------------------|------------------------------|---------------------|------------------------|-----------------------------|----------------|-------------|
| Low Channel, 2402 MHz    |                              |                     |                        |                             |                |             |
| 51.6557                  | 32.64                        | 141                 | V                      | 216                         | 40             | -7.36       |
| 34.9967                  | 31.67                        | 100                 | V                      | 240                         | 40             | -8.33       |
| 466.4943                 | 34.44                        | 116                 | V                      | 190                         | 46             | -11.56      |
| 138.6088                 | 24.77                        | 145                 | V                      | 81                          | 43.5           | -18.73      |
| 249.9545                 | 24.72                        | 162                 | H                      | 316                         | 46             | -21.28      |
| 108.6633                 | 17.35                        | 163                 | V                      | 90                          | 43.5           | -26.15      |
| Middle Channel, 2442 MHz |                              |                     |                        |                             |                |             |
| 52.3108                  | 32.18                        | 142                 | V                      | 264                         | 40             | -7.82       |
| 34.8599                  | 31.52                        | 105                 | V                      | 220                         | 40             | -8.48       |
| 467.9853                 | 34.56                        | 125                 | V                      | 195                         | 46             | -11.44      |
| 139.1258                 | 25.27                        | 139                 | V                      | 98                          | 43.5           | -18.23      |
| 249.7052                 | 24.59                        | 172                 | H                      | 326                         | 46             | -21.41      |
| 108.5766                 | 17.29                        | 147                 | V                      | 106                         | 43.5           | -26.21      |
| High Channel, 2480 MHz   |                              |                     |                        |                             |                |             |
| 34.8536                  | 32.52                        | 109                 | V                      | 215                         | 40             | -7.48       |
| 51.5286                  | 32.33                        | 132                 | V                      | 279                         | 40             | -7.67       |
| 463.2906                 | 33.24                        | 106                 | V                      | 209                         | 46             | -12.76      |
| 140.095                  | 25.87                        | 133                 | V                      | 90                          | 43.5           | -17.63      |
| 249.7254                 | 25.34                        | 169                 | H                      | 335                         | 46             | -20.66      |
| 108.5733                 | 17.64                        | 146                 | V                      | 135                         | 43.5           | -25.86      |

**802.11b Mode**

| Frequency (MHz)          | Corrected Amplitude (dBμV/m) | Antenna Height (cm) | Antenna Polarity (H/V) | Turntable Azimuth (degrees) | Limit (dBμV/m) | Margin (dB) |
|--------------------------|------------------------------|---------------------|------------------------|-----------------------------|----------------|-------------|
| Low Channel, 2412 MHz    |                              |                     |                        |                             |                |             |
| 75.3569                  | 36.17                        | 106                 | V                      | 339                         | 40             | -3.83       |
| 82.6569                  | 33.25                        | 109                 | V                      | 160                         | 40             | -6.75       |
| 876.6536                 | 35.24                        | 369                 | H                      | 186                         | 46             | -10.76      |
| 107.2548                 | 25.18                        | 153                 | V                      | 52                          | 43.5           | -18.32      |
| 32.6503                  | 16.93                        | 335                 | H                      | 36                          | 40             | -23.07      |
| 883.545                  | 21.36                        | 147                 | V                      | 119                         | 46             | -24.64      |
| Middle Channel, 2437 MHz |                              |                     |                        |                             |                |             |
| 74.2399                  | 34.39                        | 124                 | V                      | 336                         | 40             | -5.61       |
| 81.3695                  | 33.65                        | 103                 | V                      | 159                         | 40             | -6.35       |
| 107.259                  | 27.63                        | 153                 | V                      | 56                          | 43.5           | -15.87      |
| 877.3642                 | 24.13                        | 352                 | H                      | 179                         | 46             | -21.87      |
| 886.3695                 | 22.96                        | 172                 | V                      | 123                         | 46             | -23.04      |
| 32.6966                  | 16.25                        | 330                 | H                      | 21                          | 40             | -23.75      |
| High Channel, 2462 MHz   |                              |                     |                        |                             |                |             |
| 74.57325                 | 36.44                        | 126                 | V                      | 329                         | 40             | -3.56       |
| 81.175                   | 35.33                        | 100                 | V                      | 166                         | 40             | -4.67       |
| 108.7845                 | 25.95                        | 146                 | V                      | 43                          | 43.5           | -17.55      |
| 879.6585                 | 25.24                        | 341                 | H                      | 176                         | 46             | -20.76      |
| 888.8395                 | 23.46                        | 177                 | V                      | 109                         | 46             | -22.54      |
| 32.585                   | 16.85                        | 341                 | H                      | 0                           | 40             | -23.15      |

**802.11g Mode**

| Frequency (MHz)          | Corrected Amplitude (dBμV/m) | Antenna Height (cm) | Antenna Polarity (H/V) | Turntable Azimuth (degrees) | Limit (dBμV/m) | Margin (dB) |
|--------------------------|------------------------------|---------------------|------------------------|-----------------------------|----------------|-------------|
| Low Channel, 2412 MHz    |                              |                     |                        |                             |                |             |
| 32.569                   | 33.65                        | 125                 | V                      | 256                         | 40             | -6.35       |
| 108.369                  | 31.25                        | 109                 | V                      | 339                         | 43.5           | -12.25      |
| 75.0125                  | 13.58                        | 225                 | V                      | 247                         | 40             | -26.42      |
| 435.3655                 | 15.84                        | 256                 | H                      | 249                         | 46             | -30.16      |
| 615.3626                 | 12.39                        | 339                 | V                      | 69                          | 46             | -33.61      |
| 261.3693                 | 8.39                         | 352                 | H                      | 309                         | 46             | -37.61      |
| Middle Channel, 2437 MHz |                              |                     |                        |                             |                |             |
| 33.147                   | 32.64                        | 117                 | V                      | 331                         | 40             | -7.36       |
| 109.574                  | 30.63                        | 99                  | V                      | 304                         | 43.5           | -12.87      |
| 74.85925                 | 13.96                        | 201                 | V                      | 272                         | 40             | -26.04      |
| 435.4633                 | 14.72                        | 246                 | H                      | 226                         | 46             | -31.28      |
| 615.6035                 | 14.2                         | 326                 | V                      | 33                          | 46             | -31.80      |
| 261.1095                 | 8.34                         | 366                 | H                      | 271                         | 46             | -37.66      |
| High Channel, 2462 MHz   |                              |                     |                        |                             |                |             |
| 33.5695                  | 32.59                        | 107                 | V                      | 339                         | 40             | -7.41       |
| 108.654                  | 29.65                        | 109                 | V                      | 321                         | 43.5           | -13.85      |
| 76.2353                  | 12.39                        | 225                 | V                      | 299                         | 40             | -27.61      |
| 436.9636                 | 14.85                        | 226                 | H                      | 243                         | 46             | -31.15      |
| 615.36245                | 13.98                        | 339                 | V                      | 76                          | 46             | -32.02      |
| 260.396                  | 9.65                         | 325                 | H                      | 269                         | 46             | -36.35      |

**802.11n-HT20 Mode**

| Frequency (MHz)          | Corrected Amplitude (dBμV/m) | Antenna Height (cm) | Antenna Polarity (H/V) | Turntable Azimuth (degrees) | Limit (dBμV/m) | Margin (dB) |
|--------------------------|------------------------------|---------------------|------------------------|-----------------------------|----------------|-------------|
| Low Channel, 2412 MHz    |                              |                     |                        |                             |                |             |
| 38.94696                 | 35.69                        | 112                 | V                      | 156                         | 40             | -4.31       |
| 999.3698                 | 47.65                        | 152                 | V                      | 327                         | 54             | -6.35       |
| 108.6525                 | 33.65                        | 109                 | V                      | 99                          | 43.5           | -9.85       |
| 375.6963                 | 35.48                        | 114                 | V                      | 76                          | 46             | -10.52      |
| 152.3698                 | 29.36                        | 124                 | V                      | 84                          | 43.5           | -14.14      |
| 875.2369                 | 22.59                        | 168                 | V                      | 331                         | 46             | -23.41      |
| Middle Channel, 2437 MHz |                              |                     |                        |                             |                |             |
| 999.988                  | 48.83                        | 139                 | V                      | 311                         | 54             | -5.17       |
| 38.94475                 | 34.59                        | 107                 | V                      | 143                         | 40             | -5.41       |
| 375.0015                 | 36.84                        | 139                 | V                      | 64                          | 46             | -9.16       |
| 108.8185                 | 32.81                        | 100                 | V                      | 65                          | 43.5           | -10.69      |
| 151.4993                 | 31.86                        | 100                 | V                      | 47                          | 43.5           | -11.64      |
| 875.1093                 | 22.4                         | 156                 | V                      | 302                         | 46             | -23.60      |
| High Channel, 2462 MHz   |                              |                     |                        |                             |                |             |
| 999.978                  | 50.47                        | 100                 | H                      | 314                         | 54             | -3.53       |
| 38.961                   | 31.46                        | 119                 | V                      | 195                         | 40             | -8.54       |
| 108.7983                 | 34.09                        | 100                 | V                      | 240                         | 43.5           | -9.41       |
| 577.847                  | 14.27                        | 353                 | H                      | 87                          | 46             | -31.73      |
| 300.4328                 | 11.23                        | 337                 | H                      | 0                           | 46             | -34.77      |
| 305.9678                 | 8.89                         | 343                 | V                      | 88                          | 46             | -37.11      |



## 2) 1–25 GHz, Measured at 3 meters

## Bluetooth 4.0

| Frequency<br>(MHz)                         | S.A.<br>Reading<br>(dBμV) | Turntable<br>Azimuth<br>(degrees) | Test Antenna   |                   |                  | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>(dB) | Cord.<br>Reading<br>(dBμV/m) | FCC               |                | Comments |
|--------------------------------------------|---------------------------|-----------------------------------|----------------|-------------------|------------------|-----------------------|----------------------|------------------------------|-------------------|----------------|----------|
|                                            |                           |                                   | Height<br>(cm) | Polarity<br>(H/V) | Factor<br>(dB/m) |                       |                      |                              | Limit<br>(dBμV/m) | Margin<br>(dB) |          |
| Low Channel 2402 MHz, measured at 3 meters |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |          |
| 2402                                       | 71.18                     | 317                               | 100            | V                 | 29.0             | 2.94                  | 0                    | 103.076                      | Fund.             | -              | Peak     |
| 2402                                       | 67.16                     | 302                               | 100            | H                 | 29.0             | 2.94                  | 0                    | 99.056                       | Fund.             | -              | Peak     |
| 2402                                       | 46.89                     | 317                               | 100            | V                 | 29.0             | 2.94                  | 0                    | 78.786                       | Fund.             | -              | Ave      |
| 2402                                       | 44.19                     | 302                               | 100            | H                 | 29.0             | 2.94                  | 0                    | 76.086                       | Fund.             | -              | Ave      |
| 2390                                       | 25.39                     | 317                               | 100            | V                 | 29.0             | 2.94                  | 0                    | 57.286                       | 74                | -16.714        | Peak     |
| 2390                                       | 25.31                     | 302                               | 100            | H                 | 29.0             | 2.94                  | 0                    | 57.206                       | 74                | -16.794        | Peak     |
| 2390                                       | 12.57                     | 317                               | 100            | V                 | 29.0             | 2.94                  | 0                    | 44.466                       | 54                | -9.534         | Ave      |
| 2390                                       | 12.53                     | 302                               | 100            | H                 | 29.0             | 2.94                  | 0                    | 44.426                       | 54                | -9.574         | Ave      |
| 4804                                       | 38.97                     | 58                                | 100            | V                 | 33.1             | 4.06                  | 27.78                | 48.334                       | 74                | -25.666        | Peak     |
| 4804                                       | 37.7                      | 333                               | 100            | H                 | 33.1             | 4.06                  | 27.78                | 47.064                       | 74                | -26.936        | Peak     |
| 4804                                       | 25.92                     | 58                                | 100            | V                 | 33.1             | 4.06                  | 27.78                | 35.284                       | 54                | -18.716        | Ave      |
| 4804                                       | 25.53                     | 333                               | 100            | H                 | 33.1             | 4.06                  | 27.78                | 34.894                       | 54                | -19.106        | Ave      |
| 7206                                       | 35.31                     | 126                               | 100            | V                 | 35.9             | 4.93                  | 27.59                | 48.578                       | 83.076            | -34.498        | Peak     |
| 7206                                       | 34.25                     | 320                               | 100            | H                 | 35.9             | 4.93                  | 27.59                | 47.518                       | 79.056            | -31.538        | Peak     |
| 7206                                       | 21.93                     | 126                               | 100            | V                 | 35.9             | 4.93                  | 27.59                | 35.198                       | 58.786            | -23.588        | Ave      |
| 7206                                       | 20.32                     | 320                               | 100            | H                 | 35.9             | 4.93                  | 27.59                | 33.588                       | 56.086            | -22.498        | Ave      |
| 9608                                       | 33.66                     | 42                                | 100            | V                 | 37.9             | 5.82                  | 27.05                | 50.376                       | 83.076            | -32.700        | Peak     |
| 9608                                       | 32.23                     | 0                                 | 100            | H                 | 37.9             | 5.82                  | 27.05                | 48.946                       | 79.056            | -30.110        | Peak     |
| 9608                                       | 19.88                     | 42                                | 100            | V                 | 37.9             | 5.82                  | 27.05                | 36.596                       | 58.786            | -22.190        | Ave      |
| 9608                                       | 16.56                     | 0                                 | 100            | H                 | 37.9             | 5.82                  | 27.05                | 33.276                       | 56.086            | -22.810        | Ave      |

**Bluetooth 4.0**

| Frequency<br>(MHz)                            | S.A.<br>Reading<br>(dBμV) | Turntable<br>Azimuth<br>(degrees) | Test Antenna   |                   |                  | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>(dB) | Cord.<br>Reading<br>(dBμV/m) | FCC               |                | Comments |
|-----------------------------------------------|---------------------------|-----------------------------------|----------------|-------------------|------------------|-----------------------|----------------------|------------------------------|-------------------|----------------|----------|
|                                               |                           |                                   | Height<br>(cm) | Polarity<br>(H/V) | Factor<br>(dB/m) |                       |                      |                              | Limit<br>(dBμV/m) | Margin<br>(dB) |          |
| Middle Channel 2442 MHz, measured at 3 meters |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |          |
| 2442                                          | 71.54                     | 339                               | 100            | V                 | 29.0             | 2.94                  | 0                    | 103.436                      | Fund.             | -              | Peak     |
| 2442                                          | 67.66                     | 200                               | 113            | H                 | 29.0             | 2.94                  | 0                    | 99.556                       | Fund.             | -              | Peak     |
| 2442                                          | 47.41                     | 339                               | 100            | V                 | 29.0             | 2.94                  | 0                    | 79.306                       | Fund.             | -              | Ave      |
| 2442                                          | 44.76                     | 200                               | 113            | H                 | 29.0             | 2.94                  | 0                    | 76.656                       | Fund.             | -              | Ave      |
| 4884                                          | 35.00                     | 45                                | 101            | V                 | 33.3             | 4.10                  | 27.67                | 44.757                       | 74                | -29.243        | Peak     |
| 4884                                          | 33.57                     | 305                               | 100            | H                 | 33.3             | 4.10                  | 27.67                | 43.327                       | 74                | -30.673        | Peak     |
| 4884                                          | 22.31                     | 45                                | 101            | V                 | 33.3             | 4.10                  | 27.67                | 32.067                       | 54                | -21.933        | Ave      |
| 4884                                          | 19.67                     | 305                               | 101            | H                 | 33.3             | 4.10                  | 27.67                | 29.427                       | 54                | -24.573        | Ave      |
| 7320                                          | 33.66                     | 162                               | 100            | V                 | 36.4             | 4.88                  | 27.50                | 47.397                       | 74                | -26.603        | Peak     |
| 7320                                          | 33.31                     | 318                               | 100            | H                 | 36.4             | 4.88                  | 27.51                | 47.037                       | 74                | -26.963        | Peak     |
| 7320                                          | 19.77                     | 162                               | 100            | V                 | 36.4             | 4.88                  | 27.51                | 33.497                       | 54                | -20.503        | Ave      |
| 7320                                          | 19.39                     | 318                               | 100            | H                 | 36.4             | 4.88                  | 27.51                | 33.117                       | 54                | -20.883        | Ave      |
| 9760                                          | 29.95                     | 0                                 | 100            | V                 | 38.1             | 5.77                  | 27.03                | 46.747                       | 83.436            | -36.689        | Peak     |
| 9760                                          | 31.84                     | 0                                 | 100            | H                 | 38.1             | 5.77                  | 27.03                | 48.637                       | 79.556            | -30.919        | Peak     |
| 9760                                          | 16.43                     | 0                                 | 100            | V                 | 38.1             | 5.77                  | 27.03                | 33.227                       | 59.306            | -26.079        | Ave      |
| 9760                                          | 16.42                     | 0                                 | 100            | H                 | 38.1             | 5.77                  | 27.03                | 33.217                       | 56.656            | -23.439        | Ave      |

**Bluetooth 4.0**

| Frequency<br>(MHz)                          | S.A.<br>Reading<br>(dBμV) | Turntable<br>Azimuth<br>(degrees) | Test Antenna   |                   |                  | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>(dB) | Cord.<br>Reading<br>(dBμV/m) | FCC               |                | Comments |
|---------------------------------------------|---------------------------|-----------------------------------|----------------|-------------------|------------------|-----------------------|----------------------|------------------------------|-------------------|----------------|----------|
|                                             |                           |                                   | Height<br>(cm) | Polarity<br>(H/V) | Factor<br>(dB/m) |                       |                      |                              | Limit<br>(dBμV/m) | Margin<br>(dB) |          |
| High Channel 2480 MHz, measured at 3 meters |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |          |
| 2480                                        | 71.36                     | 296                               | 129            | V                 | 29.2             | 3.01                  | 0                    | 103.525                      | Fund.             | -              | Peak     |
| 2480                                        | 68.71                     | 201                               | 110            | H                 | 29.2             | 3.01                  | 0                    | 100.875                      | Fund.             | -              | Peak     |
| 2480                                        | 47.26                     | 296                               | 129            | V                 | 29.2             | 3.01                  | 0                    | 79.425                       | Fund.             | -              | Ave      |
| 2480                                        | 45.51                     | 201                               | 110            | H                 | 29.2             | 3.01                  | 0                    | 77.675                       | Fund.             | -              | Ave      |
| 2483.5                                      | 26.53                     | 296                               | 129            | V                 | 29.2             | 3.01                  | 0                    | 58.695                       | 74                | -15.305        | Peak     |
| 2483.5                                      | 25.66                     | 201                               | 110            | H                 | 29.2             | 3.01                  | 0                    | 57.825                       | 74                | -16.175        | Peak     |
| 2483.5                                      | 13.09                     | 296                               | 129            | V                 | 29.2             | 3.01                  | 0                    | 45.255                       | 54                | -8.745         | Ave      |
| 2483.5                                      | 12.95                     | 201                               | 110            | H                 | 29.2             | 3.01                  | 0                    | 45.115                       | 54                | -8.885         | Ave      |
| 4960                                        | 34.88                     | 33                                | 100            | V                 | 33.5             | 4.21                  | 27.70                | 44.847                       | 74                | -29.153        | Peak     |
| 4960                                        | 32.89                     | 0                                 | 100            | H                 | 33.5             | 4.21                  | 27.70                | 42.857                       | 74                | -31.143        | Peak     |
| 4960                                        | 21.45                     | 33                                | 100            | V                 | 33.5             | 4.21                  | 27.70                | 31.417                       | 54                | -22.583        | Ave      |
| 4960                                        | 17.80                     | 0                                 | 100            | H                 | 33.5             | 4.21                  | 27.70                | 27.767                       | 54                | -26.233        | Ave      |
| 7440                                        | 33.91                     | 81                                | 102            | V                 | 36.5             | 4.89                  | 27.53                | 47.775                       | 74                | -26.225        | Peak     |
| 7440                                        | 32.62                     | 0                                 | 100            | H                 | 36.5             | 4.89                  | 27.53                | 46.485                       | 74                | -27.515        | Peak     |
| 7440                                        | 20.343                    | 81                                | 102            | V                 | 36.5             | 4.89                  | 27.53                | 34.208                       | 54                | -19.792        | Ave      |
| 7440                                        | 17.69                     | 0                                 | 100            | H                 | 36.5             | 4.89                  | 27.53                | 31.555                       | 54                | -22.445        | Ave      |
| 9920                                        | 31.59                     | 0                                 | 100            | V                 | 38.5             | 5.92                  | 27.01                | 49.041                       | 83.525            | -34.484        | Peak     |
| 9920                                        | 32.865                    | 317                               | 100            | H                 | 38.5             | 5.92                  | 27.01                | 50.316                       | 80.875            | -30.559        | Peak     |
| 9920                                        | 16.89                     | 0                                 | 100            | V                 | 38.5             | 5.92                  | 27.01                | 34.341                       | 59.425            | -25.084        | Ave      |
| 9920                                        | 18.22                     | 317                               | 100            | H                 | 38.5             | 5.92                  | 27.01                | 35.671                       | 57.675            | -22.004        | Ave      |

## 802.11b mode

| Frequency<br>(MHz)                         | S.A.<br>Reading<br>(dBμV) | Turntable<br>Azimuth<br>(degrees) | Test Antenna   |                   |                  | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>(dB) | Cord.<br>Reading<br>(dBμV/m) | FCC               |                | Comments |
|--------------------------------------------|---------------------------|-----------------------------------|----------------|-------------------|------------------|-----------------------|----------------------|------------------------------|-------------------|----------------|----------|
|                                            |                           |                                   | Height<br>(cm) | Polarity<br>(H/V) | Factor<br>(dB/m) |                       |                      |                              | Limit<br>(dBμV/m) | Margin<br>(dB) |          |
| Low Channel 2412 MHz, measured at 3 meters |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |          |
| 2412                                       | 81.34                     | 298                               | 100            | V                 | 28.96            | 2.94                  | 0                    | 113.236                      | Fund.             | -              | Peak     |
| 2412                                       | 73.12                     | 202                               | 100            | H                 | 28.96            | 2.94                  | 0                    | 105.016                      | Fund.             | -              | Peak     |
| 2412                                       | 77.53                     | 298                               | 100            | V                 | 28.96            | 2.94                  | 0                    | 109.426                      | Fund.             | -              | Ave      |
| 2412                                       | 69.35                     | 202                               | 100            | H                 | 28.96            | 2.94                  | 0                    | 101.246                      | Fund.             | -              | Ave      |
| 2390                                       | 27.20                     | 298                               | 100            | V                 | 28.96            | 2.94                  | 0                    | 59.096                       | 74                | -14.904        | Peak     |
| 2390                                       | 25.08                     | 202                               | 100            | H                 | 28.96            | 2.94                  | 0                    | 56.976                       | 74                | -17.024        | Peak     |
| 2390                                       | 15.21                     | 298                               | 100            | V                 | 28.96            | 2.94                  | 0                    | 47.106                       | 54                | -6.894         | Ave      |
| 2390                                       | 12.92                     | 202                               | 100            | H                 | 28.96            | 2.94                  | 0                    | 44.816                       | 54                | -9.184         | Ave      |
| 4824                                       | 36.17                     | 0                                 | 158            | V                 | 33.1             | 4.06                  | 27.70                | 45.614                       | 74                | -28.386        | Peak     |
| 4828                                       | 35.40                     | 78                                | 149            | H                 | 33.1             | 4.06                  | 27.70                | 44.844                       | 74                | -29.156        | Peak     |
| 4828                                       | 28.07                     | 0                                 | 158            | V                 | 33.1             | 4.06                  | 27.70                | 37.514                       | 54                | -16.486        | Ave      |
| 4828                                       | 27.92                     | 78                                | 149            | H                 | 33.1             | 4.06                  | 27.70                | 37.364                       | 54                | -16.636        | Ave      |
| 7236                                       | 34.64                     | 33                                | 169            | V                 | 35.9             | 4.93                  | 27.58                | 47.918                       | 93.236            | -45.318        | Peak     |
| 7236                                       | 32.66                     | 0                                 | 100            | H                 | 35.9             | 4.93                  | 27.58                | 45.938                       | 85.016            | -39.078        | Peak     |
| 7236                                       | 21.08                     | 33                                | 169            | V                 | 35.9             | 4.93                  | 27.58                | 34.358                       | 89.426            | -55.068        | Ave      |
| 7236                                       | 18.00                     | 0                                 | 100            | H                 | 35.9             | 4.93                  | 27.58                | 31.278                       | 81.246            | -49.968        | Ave      |
| 9648                                       | 41.58                     | 42                                | 118            | V                 | 37.9             | 5.82                  | 27.06                | 58.286                       | 93.236            | -34.950        | Peak     |
| 9648                                       | 37.53                     | 130                               | 152            | H                 | 37.9             | 5.82                  | 27.06                | 54.236                       | 85.016            | -30.780        | Peak     |
| 9648                                       | 38.97                     | 42                                | 118            | V                 | 37.9             | 5.82                  | 27.06                | 55.676                       | 89.426            | -33.750        | Ave      |
| 9648                                       | 34.02                     | 130                               | 152            | H                 | 37.9             | 5.82                  | 27.06                | 50.726                       | 81.246            | -30.520        | Ave      |

**802.11b mode**

| Frequency<br>(MHz)                            | S.A.<br>Reading<br>(dBμV) | Turntable<br>Azimuth<br>(degrees) | Test Antenna   |                   |                  | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>(dB) | Cord.<br>Reading<br>(dBμV/m) | FCC               |                | Comments |
|-----------------------------------------------|---------------------------|-----------------------------------|----------------|-------------------|------------------|-----------------------|----------------------|------------------------------|-------------------|----------------|----------|
|                                               |                           |                                   | Height<br>(cm) | Polarity<br>(H/V) | Factor<br>(dB/m) |                       |                      |                              | Limit<br>(dBμV/m) | Margin<br>(dB) |          |
| Middle Channel 2437 MHz, measured at 3 meters |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |          |
| 2442                                          | 80.86                     | 298                               | 100            | V                 | 28.96            | 2.94                  | 0                    | 112.756                      | Fund.             | -              | Peak     |
| 2442                                          | 72.36                     | 203                               | 100            | H                 | 28.96            | 2.94                  | 0                    | 104.256                      | Fund.             | -              | Peak     |
| 2442                                          | 77.14                     | 298                               | 100            | V                 | 28.96            | 2.94                  | 0                    | 109.036                      | Fund.             | -              | Ave      |
| 2442                                          | 68.69                     | 203                               | 100            | H                 | 28.96            | 2.94                  | 0                    | 100.586                      | Fund.             | -              | Ave      |
| 4884                                          | 36.58                     | 152                               | 106            | V                 | 33.3             | 4.10                  | 27.76                | 46.247                       | 74                | -27.753        | Peak     |
| 4884                                          | 35.52                     | 72                                | 189            | H                 | 33.3             | 4.10                  | 27.76                | 45.187                       | 74                | -28.813        | Peak     |
| 4884                                          | 29.9                      | 152                               | 106            | V                 | 33.3             | 4.10                  | 27.76                | 39.567                       | 54                | -14.433        | Ave      |
| 4884                                          | 27.59                     | 72                                | 189            | H                 | 33.3             | 4.10                  | 27.76                | 37.257                       | 54                | -16.743        | Ave      |
| 7320                                          | 32.28                     | 0                                 | 100            | V                 | 36.4             | 4.88                  | 27.51                | 46.007                       | 74                | -27.993        | Peak     |
| 7320                                          | 32.35                     | 0                                 | 100            | H                 | 36.4             | 4.88                  | 27.51                | 46.077                       | 74                | -27.923        | Peak     |
| 7320                                          | 18.22                     | 0                                 | 100            | V                 | 36.4             | 4.88                  | 27.51                | 31.947                       | 54                | -22.053        | Ave      |
| 7320                                          | 17.25                     | 0                                 | 100            | H                 | 36.4             | 4.88                  | 27.51                | 30.977                       | 54                | -23.023        | Ave      |
| 9760                                          | 41.61                     | 42                                | 138            | V                 | 38.1             | 5.74                  | 26.98                | 58.427                       | 92.756            | -34.329        | Peak     |
| 9760                                          | 40.25                     | 302                               | 132            | H                 | 38.1             | 5.74                  | 26.98                | 57.067                       | 84.256            | -27.189        | Peak     |
| 9760                                          | 38.94                     | 42                                | 138            | V                 | 38.1             | 5.74                  | 26.98                | 55.757                       | 89.036            | -33.279        | Ave      |
| 9760                                          | 37.48                     | 302                               | 132            | H                 | 38.1             | 5.74                  | 26.98                | 54.297                       | 80.586            | -26.289        | Ave      |

## 802.11b mode

| Frequency<br>(MHz)                          | S.A.<br>Reading<br>(dBμV) | Turntable<br>Azimuth<br>(degrees) | Test Antenna   |                   |                  | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>(dB) | Cord.<br>Reading<br>(dBμV/m) | FCC               |                | Comments |
|---------------------------------------------|---------------------------|-----------------------------------|----------------|-------------------|------------------|-----------------------|----------------------|------------------------------|-------------------|----------------|----------|
|                                             |                           |                                   | Height<br>(cm) | Polarity<br>(H/V) | Factor<br>(dB/m) |                       |                      |                              | Limit<br>(dBμV/m) | Margin<br>(dB) |          |
| High Channel 2462 MHz, measured at 3 meters |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |          |
| 2462                                        | 79.32                     | 319                               | 100            | V                 | 29.16            | 3.01                  | 0                    | 111.485                      | Fund.             | -              | Peak     |
| 2462                                        | 71.67                     | 216                               | 100            | H                 | 29.16            | 3.01                  | 0                    | 103.835                      | Fund.             | -              | Peak     |
| 2462                                        | 75.61                     | 319                               | 100            | V                 | 29.16            | 3.01                  | 0                    | 107.775                      | Fund.             | -              | Ave      |
| 2462                                        | 67.93                     | 216                               | 100            | H                 | 29.16            | 3.01                  | 0                    | 100.095                      | Fund.             | -              | Ave      |
| 2483.5                                      | 26.65                     | 319                               | 100            | V                 | 29.16            | 3.01                  | 0                    | 58.815                       | 74                | -15.185        | Peak     |
| 2483.5                                      | 25.15                     | 216                               | 100            | H                 | 29.16            | 3.01                  | 0                    | 57.315                       | 74                | -16.685        | Peak     |
| 2483.5                                      | 14.6                      | 319                               | 100            | V                 | 29.16            | 3.01                  | 0                    | 46.765                       | 54                | -7.235         | Ave      |
| 2483.5                                      | 13.02                     | 216                               | 100            | H                 | 29.16            | 3.01                  | 0                    | 45.185                       | 54                | -8.815         | Ave      |
| 4924                                        | 35.96                     | 38                                | 137            | V                 | 33.3             | 4.10                  | 27.75                | 45.637                       | 74                | -28.363        | Peak     |
| 4924                                        | 34.5                      | 82                                | 126            | H                 | 33.3             | 4.10                  | 27.75                | 44.177                       | 74                | -29.823        | Peak     |
| 4924                                        | 28.92                     | 38                                | 137            | V                 | 33.3             | 4.10                  | 27.75                | 38.597                       | 54                | -15.403        | Ave      |
| 4924                                        | 26.39                     | 82                                | 126            | H                 | 33.3             | 4.10                  | 27.75                | 36.067                       | 54                | -17.933        | Ave      |
| 7386                                        | 34.09                     | 327                               | 146            | V                 | 36.5             | 4.89                  | 27.51                | 47.975                       | 74                | -26.025        | Peak     |
| 7386                                        | 32.8                      | 0                                 | 100            | H                 | 36.5             | 4.89                  | 27.51                | 46.685                       | 74                | -27.315        | Peak     |
| 7386                                        | 18.44                     | 327                               | 146            | V                 | 36.5             | 4.89                  | 27.51                | 32.325                       | 54                | -21.675        | Ave      |
| 7386                                        | 17.78                     | 0                                 | 100            | H                 | 36.5             | 4.89                  | 27.51                | 31.665                       | 54                | -22.335        | Ave      |
| 9848                                        | 40.5                      | 54                                | 136            | V                 | 38.3             | 5.77                  | 26.98                | 57.577                       | 91.485            | -33.908        | Peak     |
| 9848                                        | 39.15                     | 303                               | 138            | H                 | 38.3             | 5.77                  | 26.98                | 56.227                       | 83.835            | -27.608        | Peak     |
| 9848                                        | 36.99                     | 54                                | 136            | V                 | 38.3             | 5.77                  | 26.98                | 54.067                       | 87.775            | -33.708        | Ave      |
| 9848                                        | 35.56                     | 303                               | 138            | H                 | 38.3             | 5.77                  | 26.98                | 52.637                       | 80.095            | -27.458        | Ave      |

## 802.11g mode

| Frequency<br>(MHz)                         | S.A.<br>Reading<br>(dBμV) | Turntable<br>Azimuth<br>(degrees) | Test Antenna   |                   |                  | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>(dB) | Cord.<br>Reading<br>(dBμV/m) | FCC               |                | Comments |
|--------------------------------------------|---------------------------|-----------------------------------|----------------|-------------------|------------------|-----------------------|----------------------|------------------------------|-------------------|----------------|----------|
|                                            |                           |                                   | Height<br>(cm) | Polarity<br>(H/V) | Factor<br>(dB/m) |                       |                      |                              | Limit<br>(dBμV/m) | Margin<br>(dB) |          |
| Low Channel 2412 MHz, measured at 3 meters |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |          |
| 2412                                       | 79.88                     | 298                               | 100            | V                 | 28.96            | 2.94                  | 0                    | 111.776                      | Fund.             | -              | Peak     |
| 2412                                       | 72.15                     | 202                               | 100            | H                 | 28.96            | 2.94                  | 0                    | 104.046                      | Fund.             | -              | Peak     |
| 2412                                       | 66.91                     | 298                               | 100            | V                 | 28.96            | 2.94                  | 0                    | 98.806                       | Fund.             | -              | Ave      |
| 2412                                       | 59.25                     | 202                               | 100            | H                 | 28.96            | 2.94                  | 0                    | 91.146                       | Fund.             | -              | Ave      |
| 2390                                       | 41.7                      | 298                               | 100            | V                 | 28.96            | 2.94                  | 0                    | 73.596                       | 74                | -0.404         | Peak     |
| 2390                                       | 35.83                     | 202                               | 100            | H                 | 28.96            | 2.94                  | 0                    | 67.726                       | 74                | -6.274         | Peak     |
| 2390                                       | 17.61                     | 298                               | 100            | V                 | 28.96            | 2.94                  | 0                    | 49.506                       | 54                | -4.494         | Ave      |
| 2390                                       | 13.99                     | 202                               | 100            | H                 | 28.96            | 2.94                  | 0                    | 45.886                       | 54                | -8.114         | Ave      |
| 4824                                       | 33.28                     | 0                                 | 100            | V                 | 33.1             | 4.06                  | 27.70                | 42.724                       | 74                | -31.276        | Peak     |
| 4828                                       | 32.79                     | 0                                 | 100            | H                 | 33.1             | 4.06                  | 27.70                | 42.234                       | 74                | -31.766        | Peak     |
| 4828                                       | 18.42                     | 0                                 | 100            | V                 | 33.1             | 4.06                  | 27.70                | 27.864                       | 54                | -26.136        | Ave      |
| 4828                                       | 18.32                     | 0                                 | 100            | H                 | 33.1             | 4.06                  | 27.70                | 27.764                       | 54                | -26.236        | Ave      |
| 7236                                       | 33.2                      | 0                                 | 100            | V                 | 35.9             | 4.93                  | 27.58                | 46.478                       | 91.776            | -45.298        | Peak     |
| 7236                                       | 32.37                     | 0                                 | 100            | H                 | 35.9             | 4.93                  | 27.58                | 45.648                       | 84.046            | -38.398        | Peak     |
| 7236                                       | 17.87                     | 0                                 | 100            | V                 | 35.9             | 4.93                  | 27.58                | 31.148                       | 78.806            | -47.658        | Ave      |
| 7236                                       | 17.92                     | 0                                 | 100            | H                 | 35.9             | 4.93                  | 27.58                | 31.198                       | 71.146            | -39.948        | Ave      |
| 9648                                       | 37.51                     | 28                                | 134            | V                 | 37.9             | 5.82                  | 27.06                | 54.216                       | 91.776            | -37.560        | Peak     |
| 9648                                       | 33.99                     | 304                               | 128            | H                 | 37.9             | 5.82                  | 27.06                | 50.696                       | 84.046            | -33.350        | Peak     |
| 9648                                       | 30.7                      | 28                                | 134            | V                 | 37.9             | 5.82                  | 27.06                | 47.406                       | 78.806            | -31.400        | Ave      |
| 9648                                       | 25.16                     | 304                               | 128            | H                 | 37.9             | 5.82                  | 27.06                | 41.866                       | 71.146            | -29.280        | Ave      |

**802.11g mode**

| Frequency<br>(MHz)                            | S.A.<br>Reading<br>(dBμV) | Turntable<br>Azimuth<br>(degrees) | Test Antenna   |                   |                  | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>(dB) | Cord.<br>Reading<br>(dBμV/m) | FCC               |                | Comments |
|-----------------------------------------------|---------------------------|-----------------------------------|----------------|-------------------|------------------|-----------------------|----------------------|------------------------------|-------------------|----------------|----------|
|                                               |                           |                                   | Height<br>(cm) | Polarity<br>(H/V) | Factor<br>(dB/m) |                       |                      |                              | Limit<br>(dBμV/m) | Margin<br>(dB) |          |
| Middle Channel 2437 MHz, measured at 3 meters |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |          |
| 2437                                          | 81.57                     | 297                               | 100            | V                 | 28.96            | 2.94                  | 0                    | 113.466                      | Fund.             | -              | Peak     |
| 2437                                          | 75.01                     | 319                               | 100            | H                 | 28.96            | 2.94                  | 0                    | 106.906                      | Fund.             | -              | Peak     |
| 2437                                          | 69.47                     | 297                               | 100            | V                 | 28.96            | 2.94                  | 0                    | 101.366                      | Fund.             | -              | Ave      |
| 2437                                          | 62.50                     | 319                               | 100            | H                 | 28.96            | 2.94                  | 0                    | 94.396                       | Fund.             | -              | Ave      |
| 4874                                          | 32.61                     | 0                                 | 100            | V                 | 33.3             | 4.10                  | 27.76                | 42.277                       | 74                | -31.723        | Peak     |
| 4874                                          | 33.16                     | 0                                 | 100            | H                 | 33.3             | 4.10                  | 27.76                | 42.827                       | 74                | -31.173        | Peak     |
| 4874                                          | 18.94                     | 0                                 | 100            | V                 | 33.3             | 4.10                  | 27.76                | 28.607                       | 54                | -25.393        | Ave      |
| 4874                                          | 18.43                     | 0                                 | 100            | H                 | 33.3             | 4.10                  | 27.76                | 28.097                       | 54                | -25.903        | Ave      |
| 7311                                          | 33.92                     | 0                                 | 100            | V                 | 36.4             | 4.88                  | 27.51                | 47.647                       | 74                | -26.353        | Peak     |
| 7311                                          | 32.73                     | 0                                 | 100            | H                 | 36.4             | 4.88                  | 27.51                | 46.457                       | 74                | -27.543        | Peak     |
| 7311                                          | 17.72                     | 0                                 | 100            | V                 | 36.4             | 4.88                  | 27.51                | 31.447                       | 54                | -22.553        | Ave      |
| 7311                                          | 17.50                     | 0                                 | 100            | H                 | 36.4             | 4.88                  | 27.51                | 31.227                       | 54                | -22.773        | Ave      |
| 9748                                          | 40.8                      | 40                                | 129            | V                 | 38.1             | 5.74                  | 26.98                | 57.617                       | 93.466            | -35.849        | Peak     |
| 9748                                          | 35.87                     | 53                                | 126            | H                 | 38.1             | 5.74                  | 26.98                | 52.687                       | 86.906            | -34.219        | Peak     |
| 9748                                          | 28.55                     | 40                                | 129            | V                 | 38.1             | 5.74                  | 26.98                | 45.367                       | 81.366            | -35.999        | Ave      |
| 9748                                          | 23.22                     | 53                                | 126            | H                 | 38.1             | 5.74                  | 26.98                | 40.037                       | 74.396            | -34.359        | Ave      |



## 802.11g mode

| Frequency<br>(MHz)                          | S.A.<br>Reading<br>(dBμV) | Turntable<br>Azimuth<br>(degrees) | Test Antenna   |                   |                  | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>(dB) | Cord.<br>Reading<br>(dBμV/m) | FCC               |                | Comments |
|---------------------------------------------|---------------------------|-----------------------------------|----------------|-------------------|------------------|-----------------------|----------------------|------------------------------|-------------------|----------------|----------|
|                                             |                           |                                   | Height<br>(cm) | Polarity<br>(H/V) | Factor<br>(dB/m) |                       |                      |                              | Limit<br>(dBμV/m) | Margin<br>(dB) |          |
| High Channel 2462 MHz, measured at 3 meters |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |          |
| 2462                                        | 77.66                     | 298                               | 100            | V                 | 29.16            | 3.01                  | 0                    | 109.825                      | Fund.             | -              | Peak     |
| 2462                                        | 71.49                     | 318                               | 100            | H                 | 29.16            | 3.01                  | 0                    | 103.655                      | Fund.             | -              | Peak     |
| 2462                                        | 65.11                     | 298                               | 100            | V                 | 29.16            | 3.01                  | 0                    | 97.275                       | Fund.             | -              | Ave      |
| 2462                                        | 59.07                     | 318                               | 100            | H                 | 29.16            | 3.01                  | 0                    | 91.235                       | Fund.             | -              | Ave      |
| 2483.5                                      | 40.1                      | 298                               | 100            | V                 | 29.16            | 3.01                  | 0                    | 72.265                       | 74                | -1.735         | Peak     |
| 2483.5                                      | 31.67                     | 318                               | 100            | H                 | 29.16            | 3.01                  | 0                    | 63.835                       | 74                | -10.165        | Peak     |
| 2483.5                                      | 15.02                     | 298                               | 100            | V                 | 29.16            | 3.01                  | 0                    | 47.185                       | 54                | -6.815         | Ave      |
| 2483.5                                      | 13.25                     | 318                               | 100            | H                 | 29.16            | 3.01                  | 0                    | 45.415                       | 54                | -8.585         | Ave      |
| 4924                                        | 31.85                     | 0                                 | 100            | V                 | 33.3             | 4.10                  | 27.75                | 41.527                       | 74                | -32.473        | Peak     |
| 4924                                        | 32.26                     | 0                                 | 100            | H                 | 33.3             | 4.10                  | 27.75                | 41.937                       | 74                | -32.063        | Peak     |
| 4924                                        | 17.84                     | 0                                 | 100            | V                 | 33.3             | 4.10                  | 27.75                | 27.517                       | 54                | -26.483        | Ave      |
| 4924                                        | 17.78                     | 0                                 | 100            | H                 | 33.3             | 4.10                  | 27.75                | 27.457                       | 54                | -26.543        | Ave      |
| 7386                                        | 31.36                     | 0                                 | 100            | V                 | 36.5             | 4.89                  | 27.51                | 45.245                       | 74                | -28.755        | Peak     |
| 7386                                        | 31.45                     | 0                                 | 100            | H                 | 36.5             | 4.89                  | 27.51                | 45.335                       | 74                | -28.665        | Peak     |
| 7386                                        | 17.56                     | 0                                 | 100            | V                 | 36.5             | 4.89                  | 27.51                | 31.445                       | 54                | -22.555        | Ave      |
| 7386                                        | 17.53                     | 0                                 | 100            | H                 | 36.5             | 4.89                  | 27.51                | 31.415                       | 54                | -22.585        | Ave      |
| 9848                                        | 36.14                     | 42                                | 158            | V                 | 38.3             | 5.77                  | 26.98                | 53.217                       | 89.825            | -36.608        | Peak     |
| 9848                                        | 33.64                     | 307                               | 140            | H                 | 38.3             | 5.77                  | 26.98                | 50.717                       | 83.655            | -32.938        | Peak     |
| 9848                                        | 26.44                     | 42                                | 158            | V                 | 38.3             | 5.77                  | 26.98                | 43.517                       | 77.275            | -33.758        | Ave      |
| 9848                                        | 22.98                     | 307                               | 140            | H                 | 38.3             | 5.77                  | 26.98                | 40.057                       | 71.235            | -31.178        | Ave      |

## 802.11n-HT20 mode

| Frequency<br>(MHz)                         | S.A.<br>Reading<br>(dBμV) | Turntable<br>Azimuth<br>(degrees) | Test Antenna   |                   |                  | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>(dB) | Cord.<br>Reading<br>(dBμV/m) | FCC               |                | Comments |
|--------------------------------------------|---------------------------|-----------------------------------|----------------|-------------------|------------------|-----------------------|----------------------|------------------------------|-------------------|----------------|----------|
|                                            |                           |                                   | Height<br>(cm) | Polarity<br>(H/V) | Factor<br>(dB/m) |                       |                      |                              | Limit<br>(dBμV/m) | Margin<br>(dB) |          |
| Low Channel 2412 MHz, measured at 3 meters |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |          |
| 2142                                       | 79.12                     | 299                               | 100            | V                 | 28.96            | 2.94                  | 0                    | 111.016                      | Fund.             | -              | Peak     |
| 2142                                       | 70.87                     | 202                               | 100            | H                 | 28.96            | 2.94                  | 0                    | 102.766                      | Fund.             | -              | Peak     |
| 2142                                       | 66.57                     | 299                               | 100            | V                 | 28.96            | 2.94                  | 0                    | 98.466                       | Fund.             | -              | Ave      |
| 2142                                       | 58.79                     | 202                               | 100            | H                 | 28.96            | 2.94                  | 0                    | 90.686                       | Fund.             | -              | Ave      |
| 2390                                       | 41.95                     | 299                               | 100            | V                 | 28.96            | 2.94                  | 0                    | 73.846                       | 74                | -0.154         | Peak     |
| 2390                                       | 37.86                     | 202                               | 100            | H                 | 28.96            | 2.94                  | 0                    | 69.756                       | 74                | -4.244         | Peak     |
| 2390                                       | 19.09                     | 299                               | 100            | V                 | 28.96            | 2.94                  | 0                    | 50.986                       | 54                | -3.014         | Ave      |
| 2390                                       | 14.28                     | 202                               | 100            | H                 | 28.96            | 2.94                  | 0                    | 46.176                       | 54                | -7.824         | Ave      |
| 4824                                       | 32.29                     | 0                                 | 100            | V                 | 33.1             | 4.06                  | 27.70                | 41.734                       | 74                | -32.266        | Peak     |
| 4828                                       | 33.16                     | 0                                 | 100            | H                 | 33.1             | 4.06                  | 27.70                | 42.604                       | 74                | -31.396        | Peak     |
| 4828                                       | 18.36                     | 0                                 | 100            | V                 | 33.1             | 4.06                  | 27.70                | 27.804                       | 54                | -26.196        | Ave      |
| 4828                                       | 18.39                     | 0                                 | 100            | H                 | 33.1             | 4.06                  | 27.70                | 27.834                       | 54                | -26.166        | Ave      |
| 7236                                       | 31.47                     | 0                                 | 100            | V                 | 35.9             | 4.93                  | 27.58                | 44.748                       | 91.016            | -46.268        | Peak     |
| 7236                                       | 31.75                     | 0                                 | 100            | H                 | 35.9             | 4.93                  | 27.58                | 45.028                       | 82.766            | -37.738        | Peak     |
| 7236                                       | 17.2                      | 0                                 | 100            | V                 | 35.9             | 4.93                  | 27.58                | 30.478                       | 78.466            | -47.988        | Ave      |
| 7236                                       | 17.22                     | 0                                 | 100            | H                 | 35.9             | 4.93                  | 27.58                | 30.498                       | 70.686            | -40.188        | Ave      |
| 9648                                       | 37.15                     | 22                                | 133            | V                 | 37.9             | 5.82                  | 27.06                | 53.856                       | 91.016            | -37.160        | Peak     |
| 9648                                       | 34.29                     | 306                               | 145            | H                 | 37.9             | 5.82                  | 27.06                | 50.996                       | 82.766            | -31.770        | Peak     |
| 9648                                       | 30.62                     | 22                                | 133            | V                 | 37.9             | 5.82                  | 27.06                | 47.326                       | 78.466            | -31.140        | Ave      |
| 9648                                       | 24.77                     | 306                               | 145            | H                 | 37.9             | 5.82                  | 27.06                | 41.476                       | 70.686            | -29.210        | Ave      |

## 802.11n-HT20 mode

| Frequency<br>(MHz)                            | S.A.<br>Reading<br>(dBμV) | Turntable<br>Azimuth<br>(degrees) | Test Antenna   |                   |                  | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>(dB) | Cord.<br>Reading<br>(dBμV/m) | FCC               |                | Comments |
|-----------------------------------------------|---------------------------|-----------------------------------|----------------|-------------------|------------------|-----------------------|----------------------|------------------------------|-------------------|----------------|----------|
|                                               |                           |                                   | Height<br>(cm) | Polarity<br>(H/V) | Factor<br>(dB/m) |                       |                      |                              | Limit<br>(dBμV/m) | Margin<br>(dB) |          |
| Middle Channel 2437 MHz, measured at 3 meters |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |          |
| 2437                                          | 81.75                     | 299                               | 100            | V                 | 28.96            | 2.94                  | 0                    | 113.646                      | Fund.             | -              | Peak     |
| 2437                                          | 74.06                     | 204                               | 100            | H                 | 28.96            | 2.94                  | 0                    | 105.956                      | Fund.             | -              | Peak     |
| 2437                                          | 69.08                     | 299                               | 100            | V                 | 28.96            | 2.94                  | 0                    | 100.976                      | Fund.             | -              | Ave      |
| 2437                                          | 61.45                     | 204                               | 100            | H                 | 28.96            | 2.94                  | 0                    | 93.346                       | Fund.             | -              | Ave      |
| 4874                                          | 33.52                     | 0                                 | 100            | V                 | 33.3             | 4.10                  | 27.76                | 43.187                       | 74                | -30.813        | Peak     |
| 4874                                          | 32.51                     | 0                                 | 100            | H                 | 33.3             | 4.10                  | 27.76                | 42.177                       | 74                | -31.823        | Peak     |
| 4874                                          | 18.3                      | 0                                 | 100            | V                 | 33.3             | 4.10                  | 27.76                | 27.967                       | 54                | -26.033        | Ave      |
| 4874                                          | 18.17                     | 0                                 | 100            | H                 | 33.3             | 4.10                  | 27.76                | 27.837                       | 54                | -26.163        | Ave      |
| 7311                                          | 32.77                     | 0                                 | 100            | V                 | 36.4             | 4.88                  | 27.51                | 46.497                       | 74                | -27.503        | Peak     |
| 7311                                          | 31.93                     | 0                                 | 100            | H                 | 36.4             | 4.88                  | 27.51                | 45.657                       | 74                | -28.343        | Peak     |
| 7311                                          | 17.52                     | 0                                 | 100            | V                 | 36.4             | 4.88                  | 27.51                | 31.247                       | 54                | -22.753        | Ave      |
| 7311                                          | 17.52                     | 0                                 | 100            | H                 | 36.4             | 4.88                  | 27.51                | 31.247                       | 54                | -22.753        | Ave      |
| 9448                                          | 40.89                     | 47                                | 118            | V                 | 38.1             | 5.74                  | 26.98                | 57.707                       | 93.646            | -35.939        | Peak     |
| 9448                                          | 34.08                     | 139                               | 114            | H                 | 38.1             | 5.74                  | 26.98                | 50.897                       | 85.956            | -35.059        | Peak     |
| 9748                                          | 28.63                     | 47                                | 118            | V                 | 38.1             | 5.74                  | 26.98                | 45.447                       | 80.976            | -35.529        | Ave      |
| 9748                                          | 20.89                     | 139                               | 114            | H                 | 38.1             | 5.74                  | 26.98                | 37.707                       | 73.346            | -35.639        | Ave      |

## 802.11n-HT20 mode

| Frequency<br>(MHz)                          | S.A.<br>Reading<br>(dBμV) | Turntable<br>Azimuth<br>(degrees) | Test Antenna   |                   |                  | Cable<br>Loss<br>(dB) | Pre-<br>Amp.<br>(dB) | Cord.<br>Reading<br>(dBμV/m) | FCC               |                | Comments |
|---------------------------------------------|---------------------------|-----------------------------------|----------------|-------------------|------------------|-----------------------|----------------------|------------------------------|-------------------|----------------|----------|
|                                             |                           |                                   | Height<br>(cm) | Polarity<br>(H/V) | Factor<br>(dB/m) |                       |                      |                              | Limit<br>(dBμV/m) | Margin<br>(dB) |          |
| High Channel 2462 MHz, measured at 3 meters |                           |                                   |                |                   |                  |                       |                      |                              |                   |                |          |
| 2462                                        | 77.31                     | 298                               | 100            | V                 | 29.16            | 3.01                  | 0                    | 109.475                      | Fund.             | -              | Peak     |
| 2462                                        | 69.75                     | 205                               | 100            | H                 | 29.16            | 3.01                  | 0                    | 101.915                      | Fund.             | -              | Peak     |
| 2462                                        | 64.84                     | 298                               | 100            | V                 | 29.16            | 3.01                  | 0                    | 97.005                       | Fund.             | -              | Ave      |
| 2462                                        | 56.86                     | 205                               | 100            | H                 | 29.16            | 3.01                  | 0                    | 89.025                       | Fund.             | -              | Ave      |
| 2483.5                                      | 41.36                     | 298                               | 100            | V                 | 29.16            | 3.01                  | 0                    | 73.525                       | 74                | -0.475         | Peak     |
| 2483.5                                      | 32.75                     | 205                               | 100            | H                 | 29.16            | 3.01                  | 0                    | 64.915                       | 74                | -9.085         | Peak     |
| 2483.5                                      | 16.32                     | 298                               | 100            | V                 | 29.16            | 3.01                  | 0                    | 48.485                       | 54                | -5.515         | Ave      |
| 2483.5                                      | 12.98                     | 205                               | 100            | H                 | 29.16            | 3.01                  | 0                    | 45.145                       | 54                | -8.855         | Ave      |
| 4924                                        | 32.69                     | 0                                 | 100            | V                 | 33.3             | 4.10                  | 27.75                | 42.367                       | 74                | -31.633        | Peak     |
| 4924                                        | 32.7                      | 0                                 | 100            | H                 | 33.3             | 4.10                  | 27.75                | 42.377                       | 74                | -31.623        | Peak     |
| 4924                                        | 17.89                     | 0                                 | 100            | V                 | 33.3             | 4.10                  | 27.75                | 27.567                       | 54                | -26.433        | Ave      |
| 4924                                        | 17.77                     | 0                                 | 100            | H                 | 33.3             | 4.10                  | 27.75                | 27.447                       | 54                | -26.553        | Ave      |
| 7386                                        | 32.27                     | 0                                 | 100            | V                 | 36.5             | 4.89                  | 27.51                | 46.155                       | 74                | -27.845        | Peak     |
| 7386                                        | 32.38                     | 0                                 | 100            | H                 | 36.5             | 4.89                  | 27.51                | 46.265                       | 74                | -27.735        | Peak     |
| 7386                                        | 17.52                     | 0                                 | 100            | V                 | 36.5             | 4.89                  | 27.51                | 31.405                       | 54                | -22.595        | Ave      |
| 7386                                        | 17.45                     | 0                                 | 100            | H                 | 36.5             | 4.89                  | 27.51                | 31.335                       | 54                | -22.665        | Ave      |
| 9848                                        | 37.09                     | 46                                | 116            | V                 | 38.3             | 5.77                  | 26.98                | 54.167                       | 89.475            | -35.308        | Peak     |
| 9848                                        | 34.15                     | 310                               | 144            | H                 | 38.3             | 5.77                  | 26.98                | 51.227                       | 81.915            | -30.688        | Peak     |
| 9848                                        | 27.47                     | 46                                | 116            | V                 | 38.3             | 5.77                  | 26.98                | 44.547                       | 77.005            | -32.458        | Ave      |
| 9848                                        | 24.16                     | 310                               | 144            | H                 | 38.3             | 5.77                  | 26.98                | 41.237                       | 69.025            | -27.788        | Ave      |

## 9 FCC§15.247(a) (2) – 6 dB & 99% Emission Bandwidth

### 9.1 Applicable Standard

According to FCC §15.247(a)(2), systems using digital modulation techniques may operate in the 902~928 MHz, 2400~2483.5 MHz, and 5725~5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz

### 9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emissions bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### 9.3 Test Equipment List and Details

| Manufacturer | Description       | Model No. | Serial No. | Calibration Date | Calibration Interval |
|--------------|-------------------|-----------|------------|------------------|----------------------|
| Agilent      | Spectrum Analyzer | E4446A    | US44300386 | 2012-09-29       | 1 Year               |

**Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

### 9.4 Test Environmental Conditions

|                    |            |
|--------------------|------------|
| Temperature:       | 21-22 °C   |
| Relative Humidity: | 34-47 %    |
| ATM Pressure:      | 101-102kPa |

*The testing was performed by Jeffrey Wu from 2013-03-15 to 2013-03-26 at RF Site.*

## 9.5 Test Results

### Bluetooth 4.0

| Channel | Frequency (MHz) | 6 dB Emission Bandwidth (kHz) | 99% Emission Bandwidth (kHz) | Limit (kHz)   | Results |
|---------|-----------------|-------------------------------|------------------------------|---------------|---------|
| Low     | 2402            | 1044.7                        | 659.247                      | 6 dB BW > 500 | Pass    |
| Middle  | 2442            | 1045.0                        | 672.910                      | 6 dB BW > 500 | Pass    |
| High    | 2480            | 1043.2                        | 671.152                      | 6 dB BW > 500 | Pass    |

### 802.11b Mode

| Channel | Frequency (MHz) | 6 dB Emission Bandwidth (MHz) | 99% Emission Bandwidth (MHz) | Limit (kHz)   | Results |
|---------|-----------------|-------------------------------|------------------------------|---------------|---------|
| Low     | 2412            | 13.8758                       | 9.101                        | 6 dB BW > 500 | Pass    |
| Middle  | 2437            | 13.8743                       | 8.635                        | 6 dB BW > 500 | Pass    |
| High    | 2462            | 13.8468                       | 9.088                        | 6 dB BW > 500 | Pass    |

### 802.11g Mode

| Channel | Frequency (MHz) | 6 dB Emission Bandwidth (MHz) | 99% Emission Bandwidth (MHz) | Limit (kHz)   | Results |
|---------|-----------------|-------------------------------|------------------------------|---------------|---------|
| Low     | 2412            | 16.4711                       | 15.2                         | 6 dB BW > 500 | Pass    |
| Middle  | 2437            | 16.4812                       | 15.157                       | 6 dB BW > 500 | Pass    |
| High    | 2462            | 16.5                          | 15.339                       | 6 dB BW > 500 | Pass    |


### 802.11n-HT20 Mode

| Channel | Frequency (MHz) | 6 dB Emission Bandwidth (MHz) | 99% Emission Bandwidth (MHz) | Limit (kHz)   | Results |
|---------|-----------------|-------------------------------|------------------------------|---------------|---------|
| Low     | 2412            | 17.6161                       | 15.169                       | 6 dB BW > 500 | Pass    |
| Middle  | 2437            | 17.628                        | 15.167                       | 6 dB BW > 500 | Pass    |
| High    | 2462            | 17.6656                       | 15.133                       | 6 dB BW > 500 | Pass    |


Please refer to the following plots for detailed test results

Bluetooth 4.0


Low channel: 2402 MHz

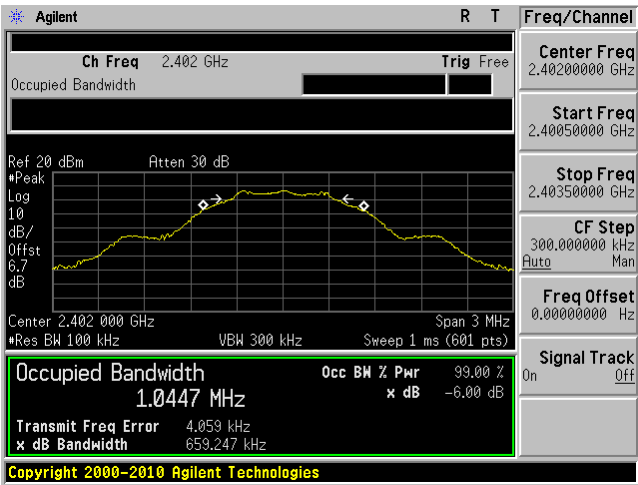

Middle channel: 2442 MHz

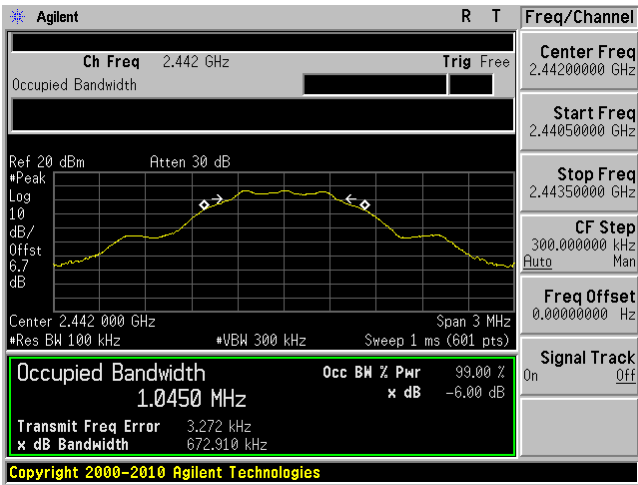


High channel: 2480 MHz

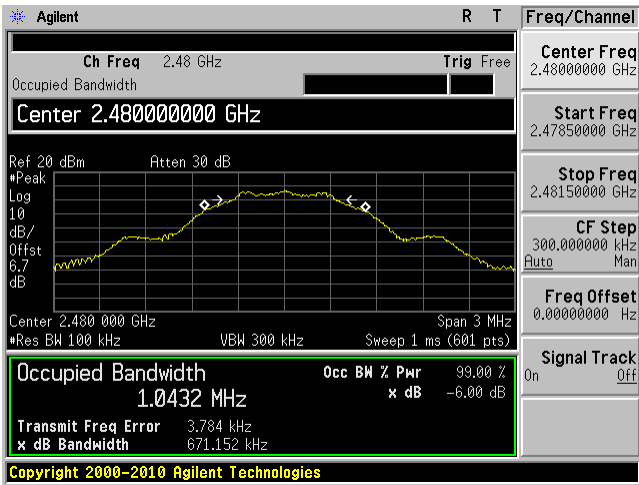


802.11b Mode


Low channel: 2412 MHz

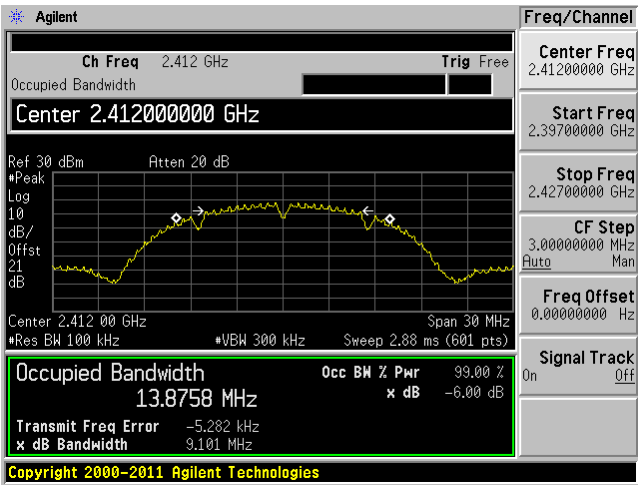

Middle channel: 2437 MHz

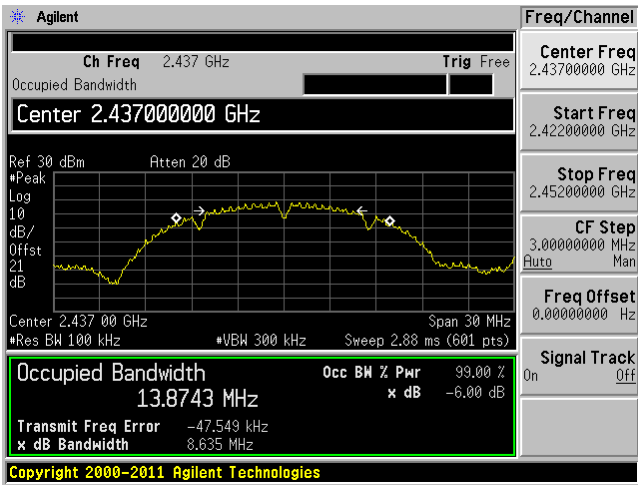

High channel: 2462 MHz


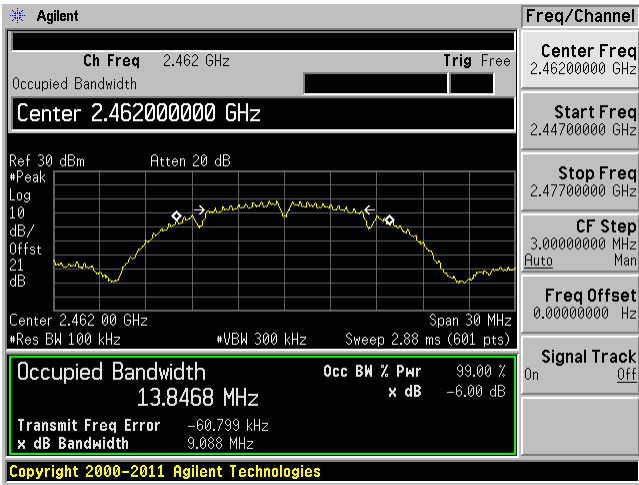





802.11g Mode

Low channel: 2412 MHz

Middle channel: 2437 MHz

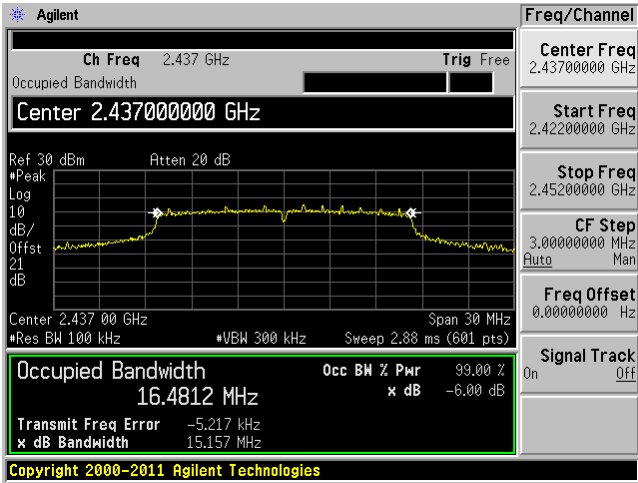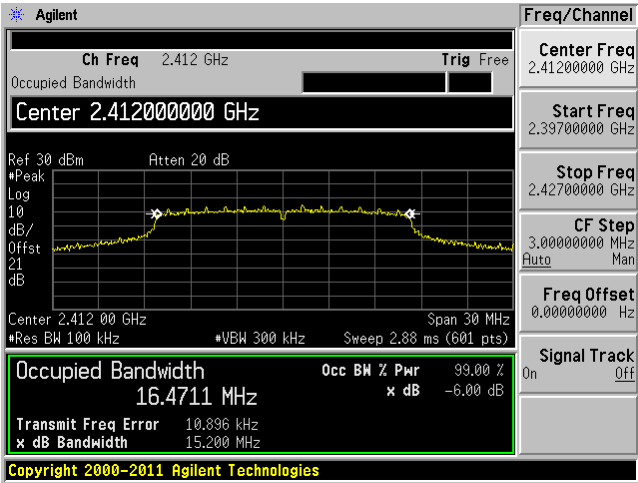


High channel: 2462 MHz

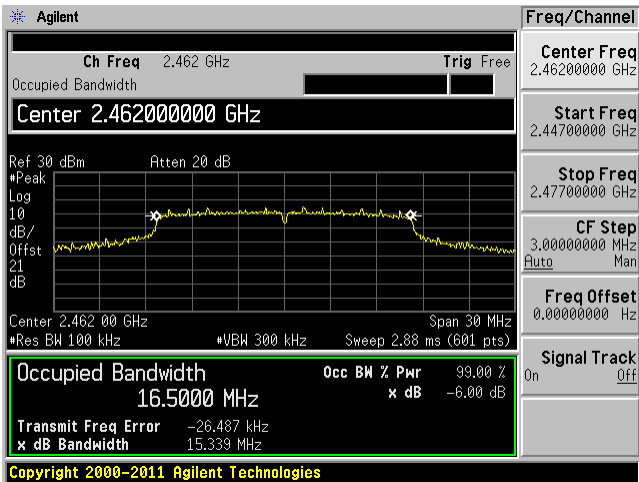


802.11n-HT20 Mode


Low channel: 2412 MHz

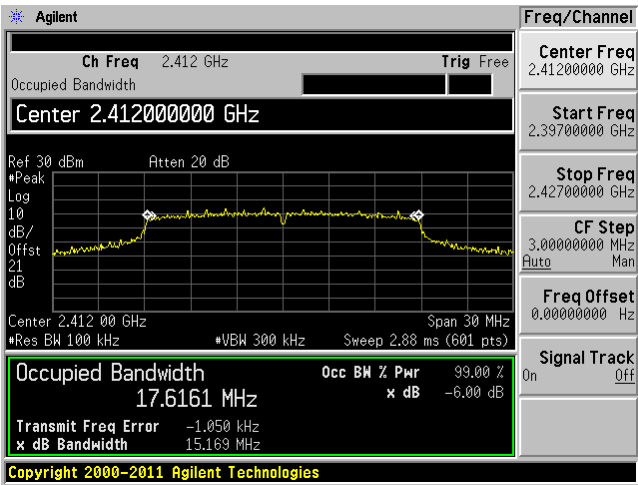

Middle channel: 2437 MHz

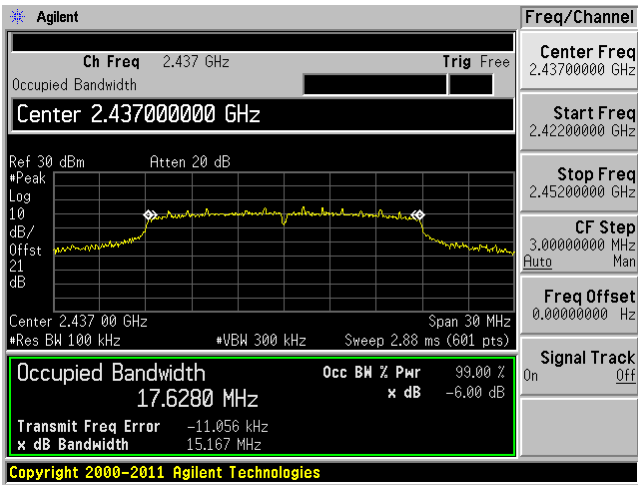

High channel: 2462 MHz

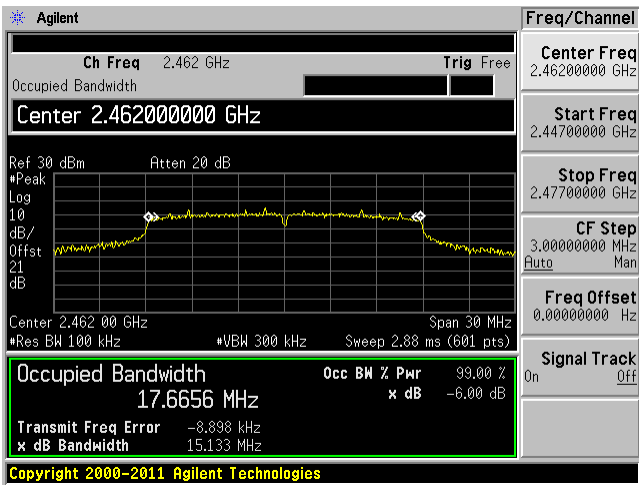


## 10 FCC §15.247(b) – Peak Output Power Measurement

### 10.1 Applicable Standard

According to FCC §15.247(b) for systems using digital modulation in the 902~928 MHz, 2400~2483.5 MHz, and 5725~5850 MHz bands: 1 Watt.

### 10.2 Measurement Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to a spectrum analyzer.
3. Add a correction factor to the display.

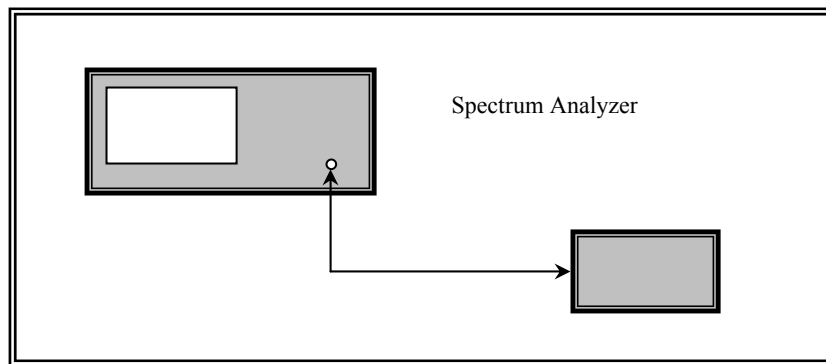

### 10.3 Test Equipment List and Details

| Manufacturer | Description       | Model No. | Serial No. | Calibration Date | Calibration Interval |
|--------------|-------------------|-----------|------------|------------------|----------------------|
| Agilent      | Spectrum Analyzer | E4446A    | US44300386 | 2012-09-29       | 1 Year               |

**Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

### 10.4 Test Environmental Conditions

|                    |            |
|--------------------|------------|
| Temperature:       | 21-22 °C   |
| Relative Humidity: | 34-47 %    |
| ATM Pressure:      | 101-102kPa |

The testing was performed by Jeffrey Wu from 2013-03-15 to 2013-03-26 at RF Site.

## 10.5 Test Results

### Bluetooth 4.0

| Channel | Frequency (MHz) | Conducted Output Power (dBm) | FCC Limit (dBm) | Margin (dB) |
|---------|-----------------|------------------------------|-----------------|-------------|
| Low     | 2402            | 6.70                         | 30              | -23.30      |
| Middle  | 2442            | 6.70                         | 30              | -23.30      |
| High    | 2480            | 6.15                         | 30              | -23.85      |

### 802.11b Mode

| Channel | Frequency (MHz) | Conducted Output Power (dBm) | FCC Limit (dBm) | Margin (dB) |
|---------|-----------------|------------------------------|-----------------|-------------|
| Low     | 2412            | 16.44                        | 30              | -13.56      |
| Middle  | 2437            | 16.76                        | 30              | -13.24      |
| High    | 2462            | 16.79                        | 30              | -13.21      |

### 802.11g Mode

| Channel | Frequency (MHz) | Conducted Output Power (dBm) | FCC Limit (dBm) | Margin (dB) |
|---------|-----------------|------------------------------|-----------------|-------------|
| Low     | 2412            | 11.51                        | 30              | -18.49      |
| Middle  | 2437            | 15.26                        | 30              | -14.74      |
| High    | 2462            | 11.96                        | 30              | -18.04      |


### 802.11n-HT20 Mode

| Channel | Frequency (MHz) | Conducted Output Power (dBm) | FCC Limit (dBm) | Margin (dB) |
|---------|-----------------|------------------------------|-----------------|-------------|
| Low     | 2412            | 11.42                        | 30              | -18.58      |
| Middle  | 2437            | 15.15                        | 30              | -14.85      |
| High    | 2462            | 11.91                        | 30              | -18.09      |


Please refer to the following plots for detailed test results

Bluetooth 4.0


Low channel: 2402 MHz

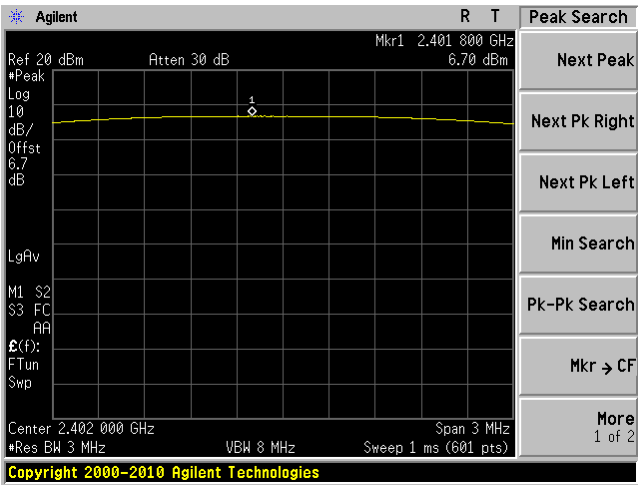

Middle channel: 2442 MHz

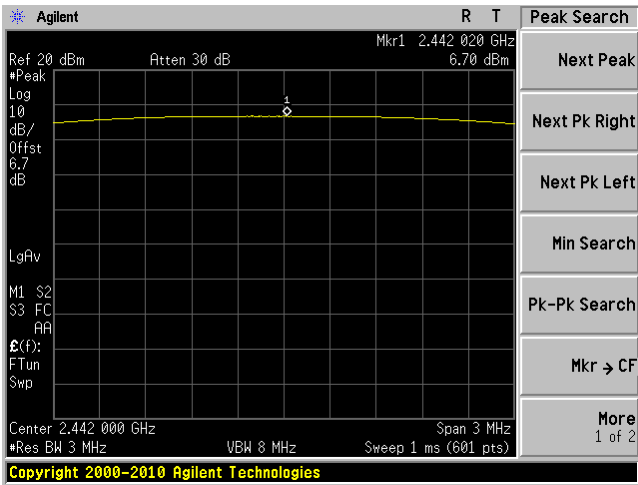



High channel: 2480 MHz

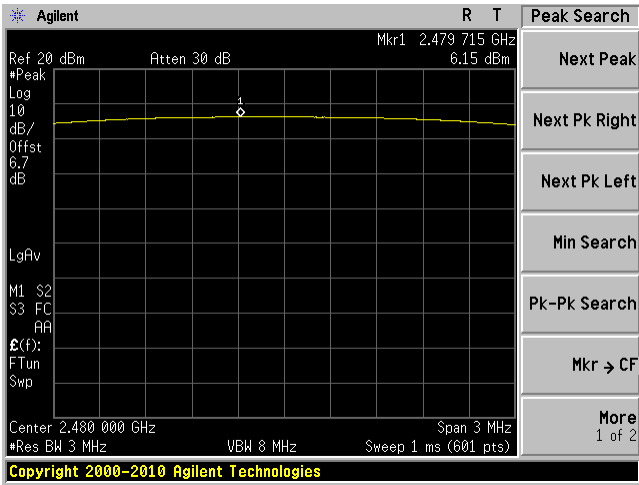


802.11b Mode

Low channel: 2412 MHz

Middle channel: 2437 MHz

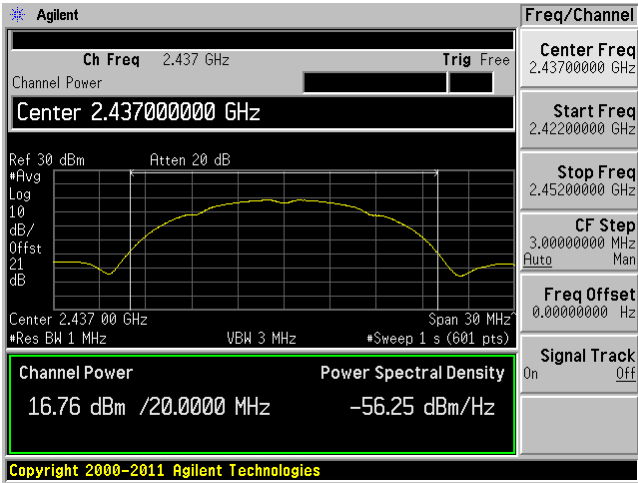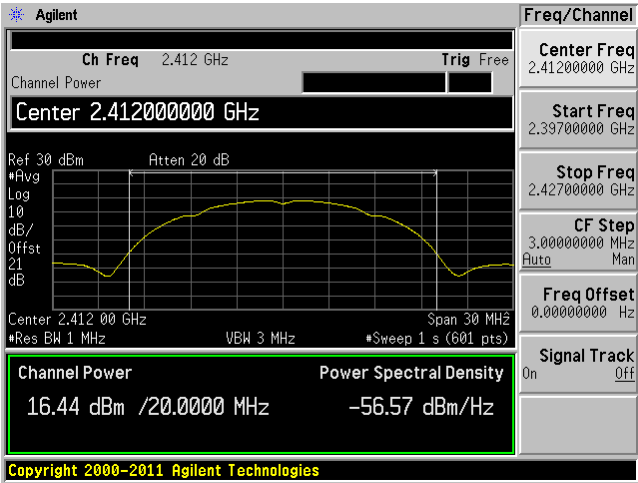



High channel: 2462 MHz

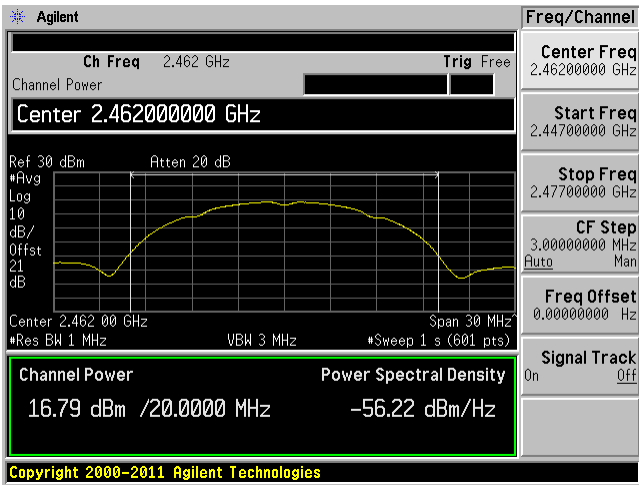


802.11g Mode

Low channel: 2412 MHz

Middle channel: 2437 MHz

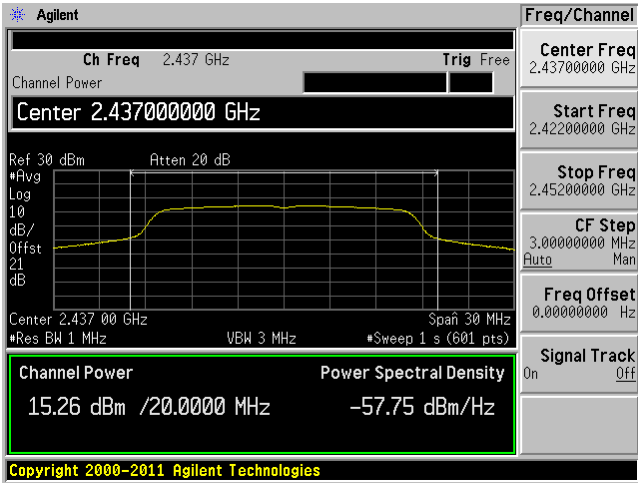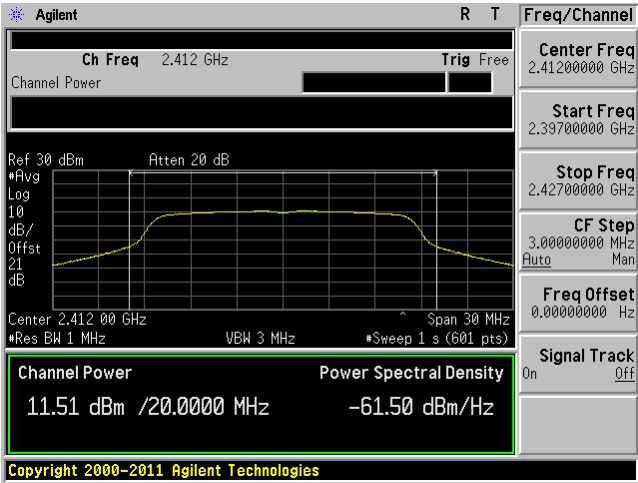


High channel: 2462 MHz

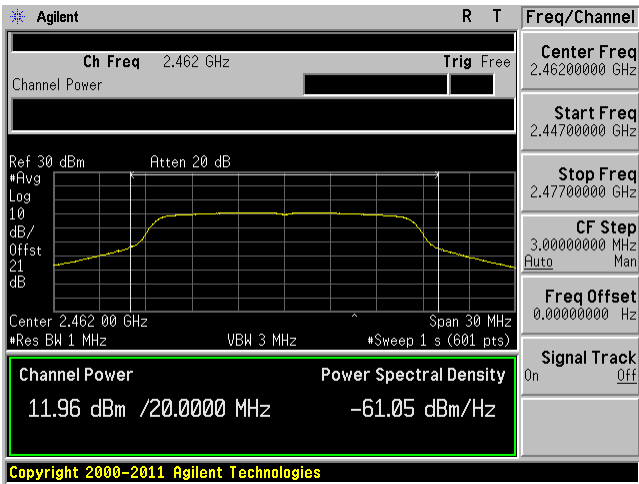


802.11n-HT20 Mode


Low channel: 2412 MHz

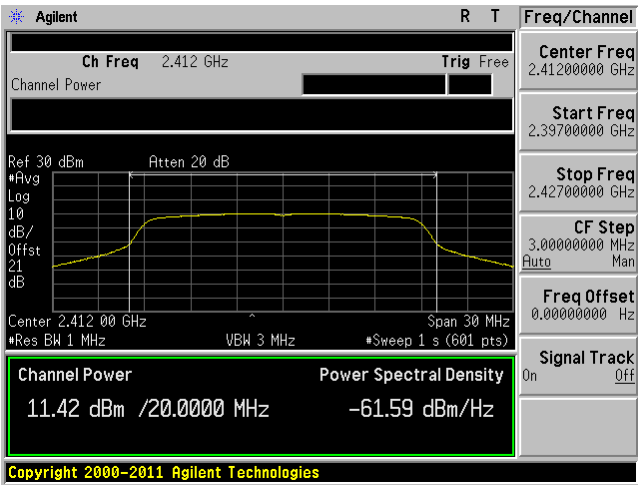

Middle channel: 2437 MHz

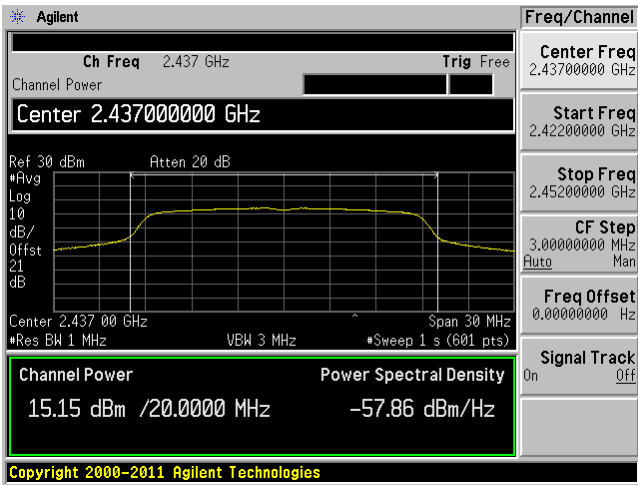

High channel: 2462 MHz

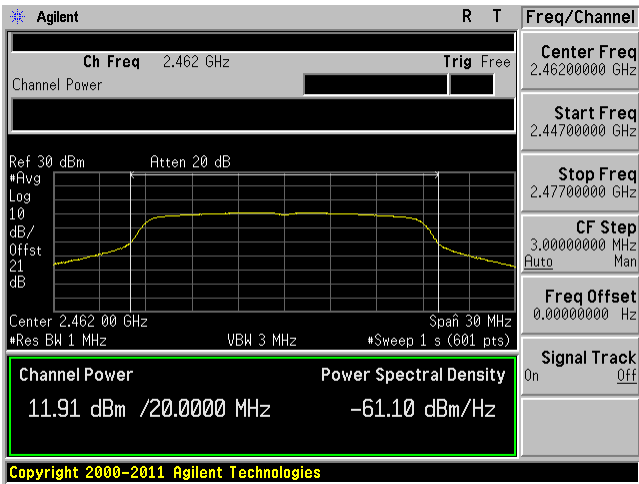



## 11 FCC §15.247(d) – 100 kHz Bandwidth of Band Edges

### 11.1 Applicable Standard

According to FCC §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emissions limits specified in §15.209(a) see §15.205(c).

### 11.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 11.3 Test Equipment List and Details

| Manufacturer | Description       | Model No. | Serial No. | Calibration Date | Calibration Interval |
|--------------|-------------------|-----------|------------|------------------|----------------------|
| Agilent      | Spectrum Analyzer | E4446A    | US44300386 | 2012-09-29       | 1 Year               |

**Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

### 11.4 Test Environmental Conditions

|                           |            |
|---------------------------|------------|
| <b>Temperature:</b>       | 21-22 °C   |
| <b>Relative Humidity:</b> | 34-47 %    |
| <b>ATM Pressure:</b>      | 101-102kPa |


*The testing was performed by Jeffrey Wu from 2013-03-15 to 2013-03-26 at RF Site.*

### 11.5 Test Results


Please refer to following pages for plots of band edge.

Bluetooth 4.0

Low Band Edge

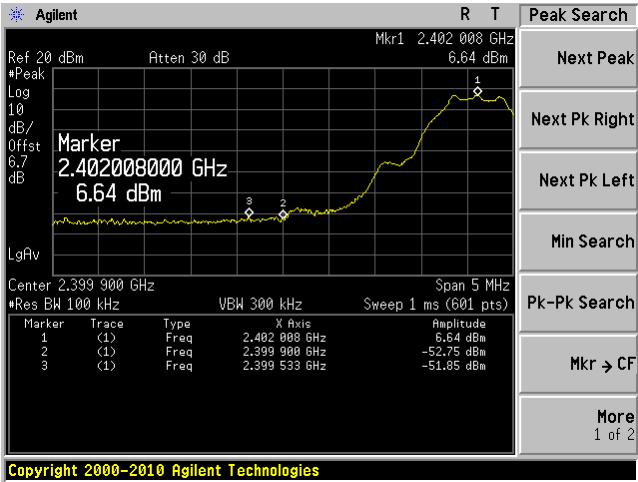


High Band Edge

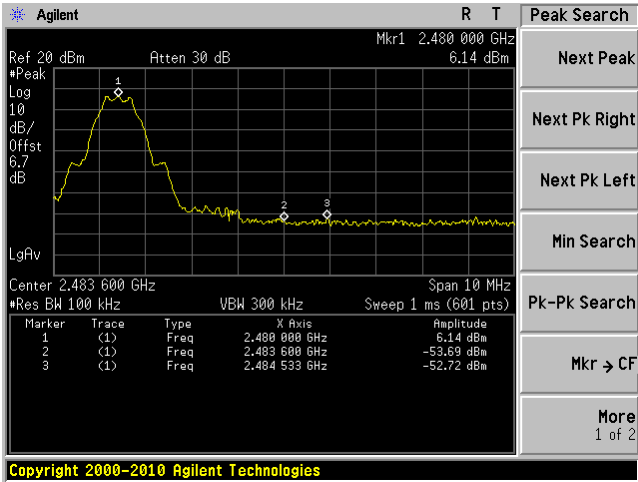


802.11b Mode

Low Band Edge

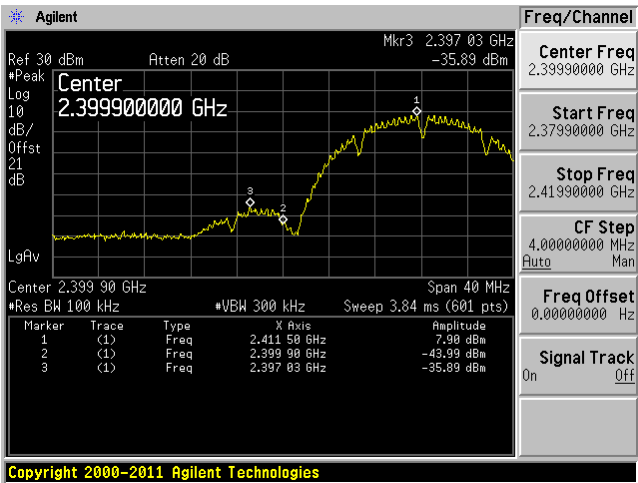


High Band Edge

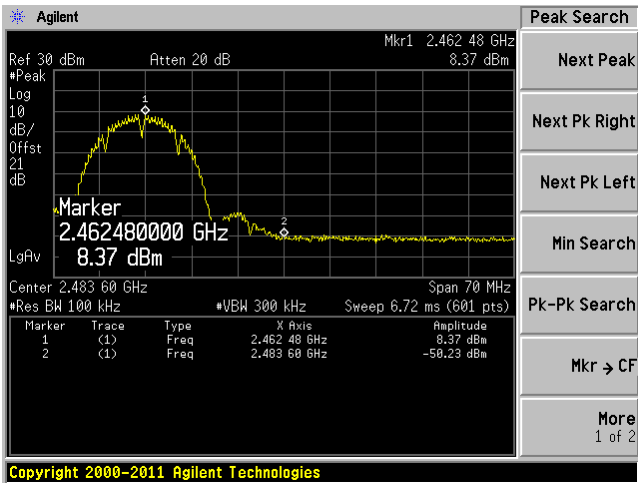


802.11g Mode

Low Band Edge

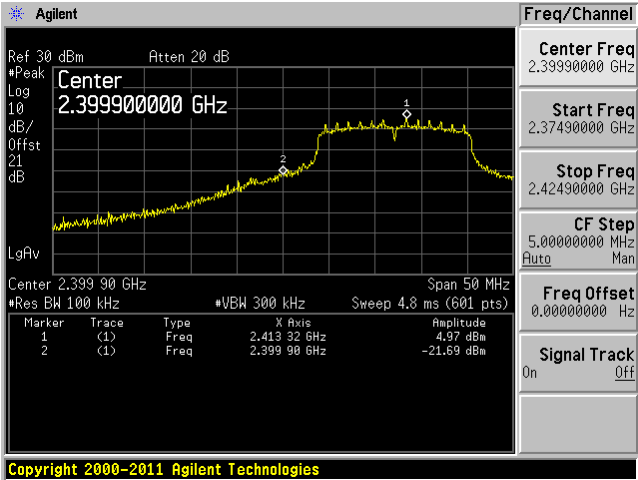


High Band Edge

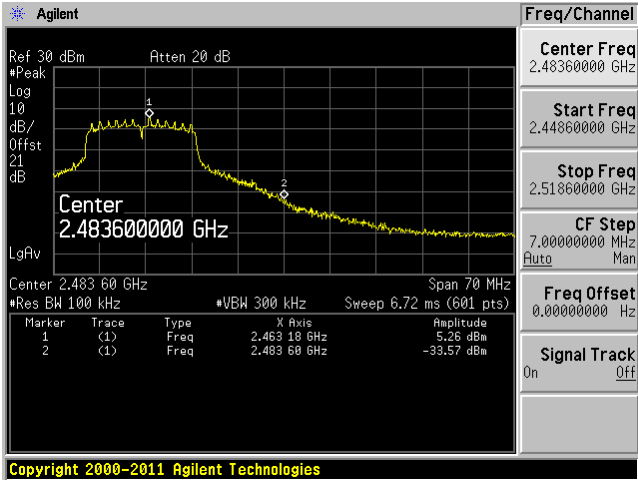


802.11n-HT20 Mode

Low Band Edge

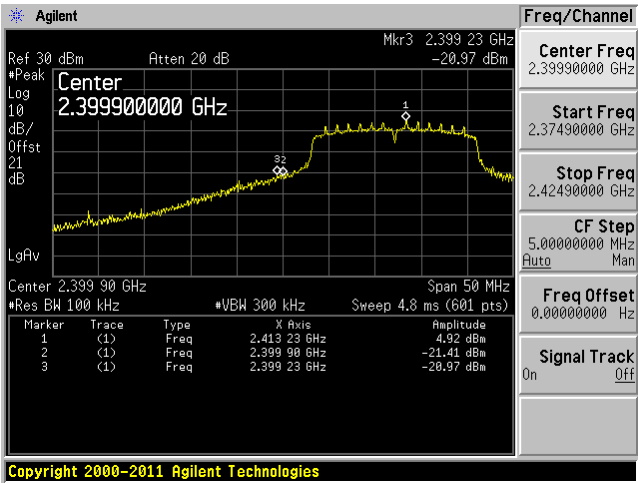

High Band Edge

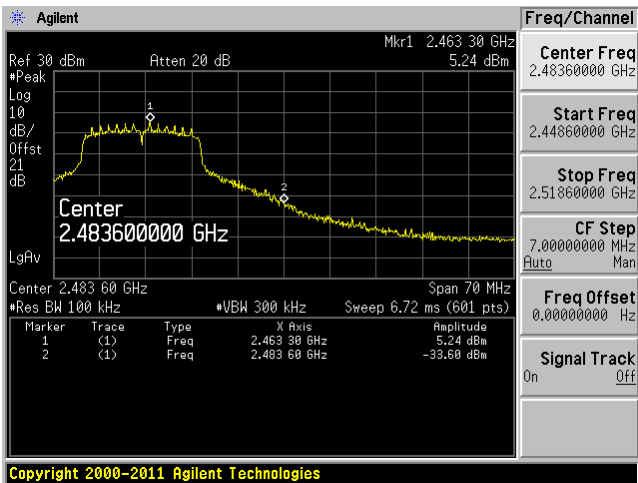

## 12 FCC §15.247(e) – Power Spectral Density

### 12.1 Applicable Standard

According to FCC §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 12.2 Measurement Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW  $\geq 3$  kHz.
3. Set the VBW  $\geq 3$  times of RBW
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. The resulting peak PSD level must be  $\leq 8$  dBm.

### 12.3 Test Equipment List and Details

| Manufacturer | Description       | Model No. | Serial No. | Calibration Date | Calibration Interval |
|--------------|-------------------|-----------|------------|------------------|----------------------|
| Agilent      | Spectrum Analyzer | E4446A    | US44300386 | 2012-09-29       | 1 Year               |

**Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

### 12.4 Test Environmental Conditions

|                    |            |
|--------------------|------------|
| Temperature:       | 21-22 °C   |
| Relative Humidity: | 34-47 %    |
| ATM Pressure:      | 101-102kPa |

*The testing was performed by Jeffrey Wu from 2013-03-15 to 2013-03-26 at RF Site.*

## 12.5 Test Results

### Bluetooth 4.0

| Channel | Frequency (MHz) | Power Spectral Density (dBm) | FCC Limit (dBm) | Results |
|---------|-----------------|------------------------------|-----------------|---------|
| Low     | 2402            | -8.71                        | 8               | Pass    |
| Mid     | 2442            | -8.47                        | 8               | Pass    |
| High    | 2480            | -9.11                        | 8               | Pass    |

### 802.11b Mode

| Channel | Frequency (MHz) | Power Spectral Density (dBm) | FCC Limit (dBm) | Results |
|---------|-----------------|------------------------------|-----------------|---------|
| Low     | 2412            | -4.8                         | 8               | Pass    |
| Mid     | 2437            | -4.02                        | 8               | Pass    |
| High    | 2462            | -4.91                        | 8               | Pass    |

### 802.11g Mode

| Channel | Frequency (MHz) | Power Spectral Density (dBm) | FCC Limit (dBm) | Results |
|---------|-----------------|------------------------------|-----------------|---------|
| Low     | 2412            | -14                          | 8               | Pass    |
| Mid     | 2437            | -9.54                        | 8               | Pass    |
| High    | 2462            | -12.12                       | 8               | Pass    |


### 802.11n-HT20 Mode

| Channel | Frequency (MHz) | Power Spectral Density (dBm) | FCC Limit (dBm) | Results |
|---------|-----------------|------------------------------|-----------------|---------|
| Low     | 2412            | -12.58                       | 8               | Pass    |
| Mid     | 2437            | -10.08                       | 8               | Pass    |
| High    | 2462            | -12.69                       | 8               | Pass    |


Please refer to the following plots for detailed test results:

Bluetooth 4.0


Low channel: 2402 MHz

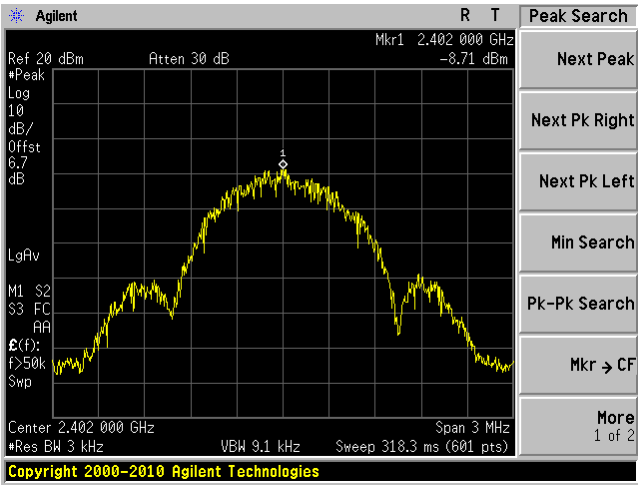

Middle channel: 2442 MHz

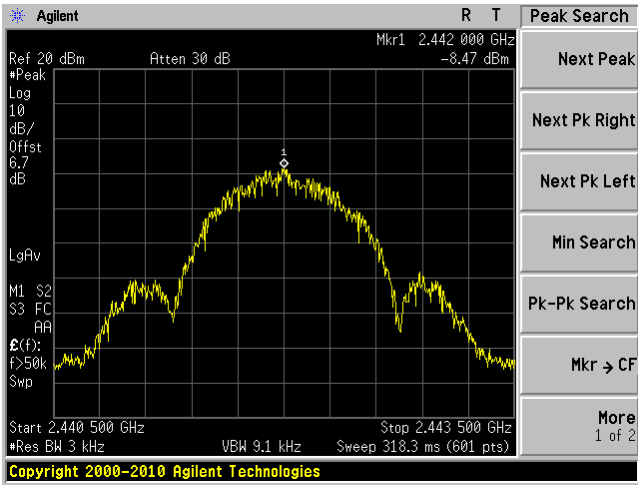


High channel: 2480 MHz

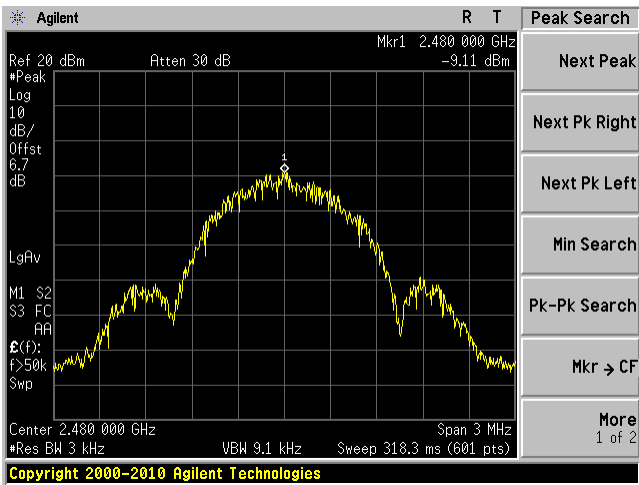


802.11b Mode


Low channel: 2412 MHz

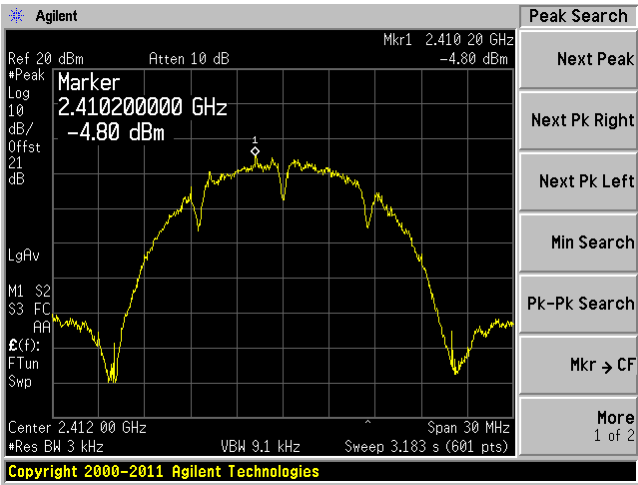

Middle channel: 2437 MHz

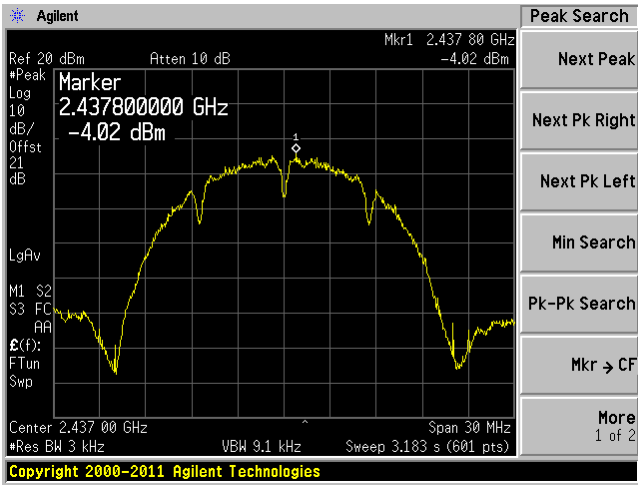


High channel: 2462 MHz

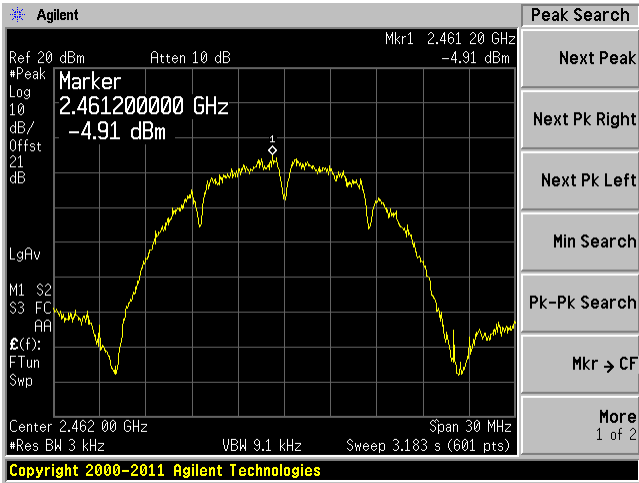


802.11g Mode


Low channel: 2412 MHz

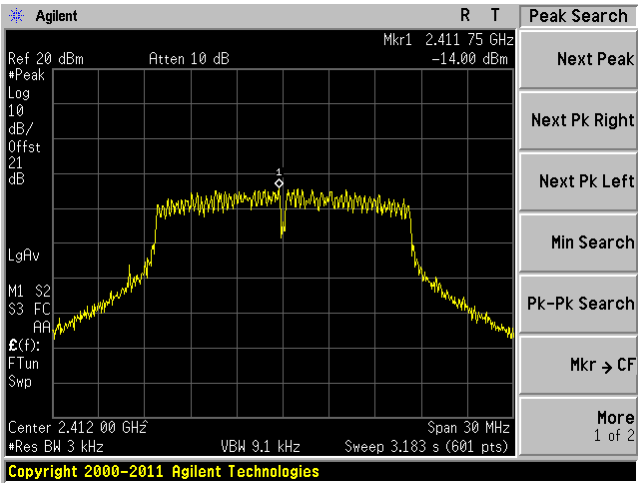

Middle channel: 2437 MHz

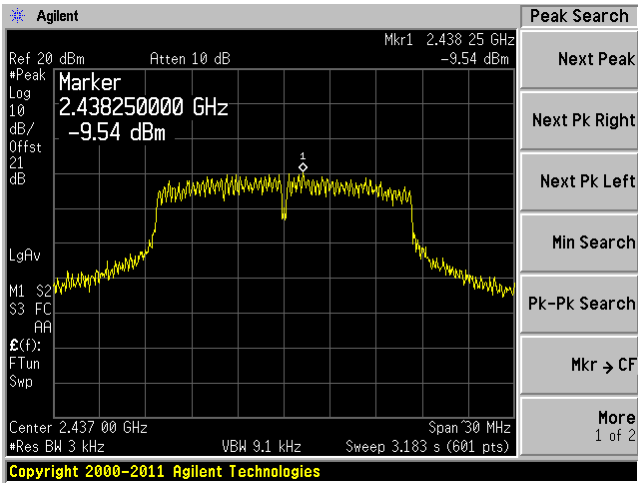


High channel: 2462 MHz

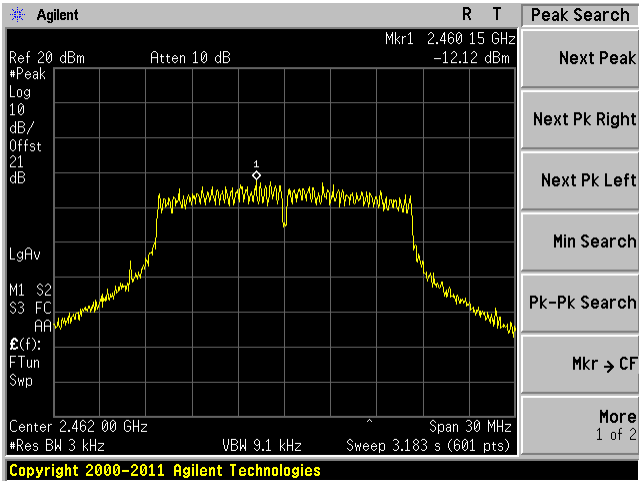




802.11n-HT20 Mode

Low channel: 2412 MHz

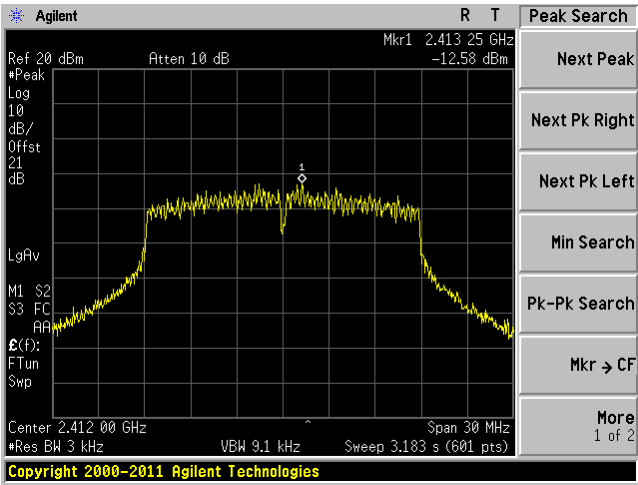

Middle channel: 2437 MHz

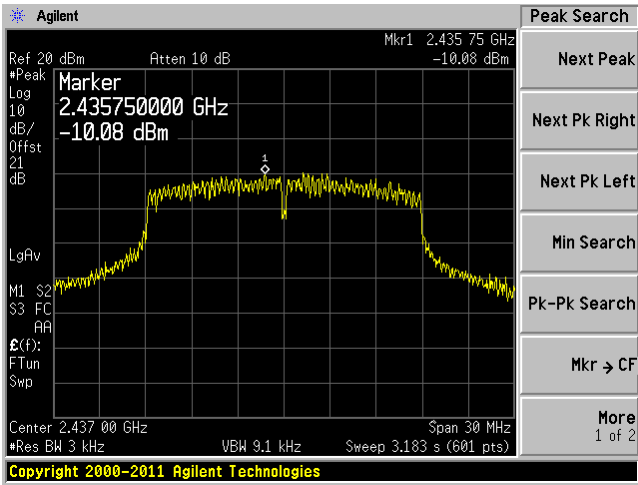

High channel: 2462 MHz

