



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*
33439 WESTERN AVENUE ! UNION CITY, CALIFORNIA 94587 ! PHONE (510) 489-6300 ! FAX (510) 489-6372

**Electromagnetic Compatibility Criteria
Test Report**

for the

**Advanced RF Technologies
Model Epoch-S02-800, Epoch-S02-8001W, Epoch-S02-8002W**

Tested under
FCC Certification Rules
Title 47 of the CFR, Part 22 Subpart H
for Cellular Devices

MET Report: EMCS80243B-FCC22

July 31, 2007

Prepared For:

**Advanced RF Technologies
2607 Colorado Blvd.
Los Angeles, CA 90041**



Advanced RF Technologies
Epoch-S02-800, Epoch-S02-8001W, Epoch-S02-8002W

Electromagnetic Compatibility
Cover Page
CFR Title 47 Part 22 Subpart H & Part 15 Subpart B

Electromagnetic Compatibility Criteria Test Report


for the

Advanced RF Technologies
Model Epoch-S02-800, Epoch-S02-8001W, Epoch-S02-8002W

Tested Under

FCC Certification Rules
Title 47 of the CFR, Part 22 Subpart H
for Cellular Devices


Shawn McMillen, Project Engineer
Electromagnetic Compatibility Lab


Jennifer Sanchez
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 22 Subpart H and Part 15 Subpart B of the FCC Rules under normal use and maintenance.


Tony Permsombut, Manager
Electromagnetic Compatibility Lab



Advanced RF Technologies
Epoch-S02-800, Epoch-S02-8001W, Epoch-S02-8002W

Electromagnetic Compatibility
Report Status
CFR Title 47 Part 22 Subpart H & Part 15 Subpart B

Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	July 31, 2007	Initial Issue.



Table of Contents

I.	Executive Summary	1
	A. Purpose of Test	2
	B. Executive Summary	2
II.	Equipment Configuration	3
	A. Overview.....	4
	B. References.....	5
	C. Test Site	6
	D. Description of Test Sample.....	6
	E. Equipment Configuration.....	13
	F. Support Equipment	13
	G. Ports and Cabling Information.....	14
	H. Mode of Operation.....	15
	I. Method of Monitoring EUT Operation	15
	J. Modifications	15
	Modifications to EUT	15
	Modifications to Test Standard	15
	K. Disposition of EUT	15
III.	Electromagnetic Compatibility Criteria for Unintentional Radiators	16
	§ 15.107(a) Conducted Emissions Limits.....	17
	§ 15.109(a) Radiated Emission Limits	21
IV.	Electromagnetic Compatibility Criteria for Intentional Radiators.....	24
	§ 2.1046 RF Power Output	25
	§ 2.1047 Modulation Characteristics	28
	§ 2.1049 Occupied Bandwidth	29
	§ 2.1053 Radiated Spurious Emissions	48
	§ 2.1051 Spurious Emissions at Antenna Terminals	51
	2-11-04/EAB/RF Out of Band Rejection	76
	§ 2.1055 Frequency Stability over Temperature and Voltage Variations	77
V.	Test Equipment	78
VI.	Certification & User's Manual Information.....	80
	A. Certification Information	81
	B. Label and User's Manual Information	85



List of Tables

Table 1. Executive Summary of EMC Compliance Testing	2
Table 2. EUT Specification	4
Table 3. References	5
Table 4. Equipment Configuration (Radiated Emissions)	13
Table 5. Support Equipment (Radiated Emissions)	13
Table 6. Ports and Cabling Information	14
Table 7. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Section 15.107(a) (b)	17
Table 8. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz)	18
Table 9. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz)	18
Table 10. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)	21
Table 11. Radiated Emissions Limits Test Results	22

List of Figures

Figure 1. Block Diagram of Test Configuration (Radiated Emissions)	7
Figure 2. Block Diagram of Test Configuration (Conducted Measurement-Downlink)	8
Figure 3. Block Diagram of Test Configuration (Conducted Measurement-Uplink)	9
Figure 4. Block Diagram of Test Configuration (Spurious Emission-Downlink)	10
Figure 5. Block Diagram of Test Configuration (Spurious Emission-Uplink)	11
Figure 6. Block Diagram of Test Configuration (Frequency Stability)	12



List of Plots

Plot 1. Conducted Emission, Phase Line Plots	19
Plot 2. Conducted Emission, Neutral Line Plots	19
Plot 3. Radiated Emissions Test Results Plot	22
Plot 4. CDMA Downlink Low Channel Input	30
Plot 5. CDMA Downlink Low Channel Output	30
Plot 6. CDMA Downlink Mid Channel Input	31
Plot 7. CDMA Downlink Mid Channel Output	31
Plot 8. CDMA Downlink High Channel Input	32
Plot 9. CDMA Downlink High Channel Output	32
Plot 10. CDMA Uplink Low Channel Input	33
Plot 11. CDMA Uplink Low Channel Output	33
Plot 12. CDMA Uplink Mid Channel Input	34
Plot 13. CDMA Uplink Mid Channel Output	34
Plot 14. CDMA Uplink High Channel Input	35
Plot 15. CDMA Uplink High Channel Output	35
Plot 16. GSM Downlink Low Channel Input	36
Plot 17. GSM Downlink Low Channel Output	36
Plot 18. GSM Downlink Mid Channel Input	37
Plot 19. GSM Downlink Mid Channel Output	37
Plot 20. GSM Downlink High Channel Input	38
Plot 21. GSM Downlink High Channel Output	38
Plot 22. GSM Uplink Low Channel Input	39
Plot 23. GSM Uplink Low Channel Output	39
Plot 24. GSM Uplink Mid Channel Input	40
Plot 25. GSM Uplink Mid Channel Output	40
Plot 26. GSM Uplink High Channel Input	41
Plot 27. GSM Uplink High Channel Output	41
Plot 28. TDMA Downlink Low Channel Input	42
Plot 29. TDMA Downlink Low Channel Output	42
Plot 30. TDMA Downlink Mid Channel Input	43
Plot 31. TDMA Downlink Mid Channel Output	43
Plot 32. TDMA Downlink High Channel Input	44
Plot 33. TDMA Downlink High Channel Output	44
Plot 34. TDMA Uplink Low Channel Input	45
Plot 35. TDMA Uplink Low Channel Output	45
Plot 36. TDMA Uplink Mid Channel Input	46
Plot 37. TDMA Uplink Mid Channel Output	46
Plot 38. TDMA Uplink High Channel Input	47
Plot 39. TDMA Uplink High Channel Output	47
Plot 40. CDMA Downlink Conducted Emissions 30 MHz – 1GHz, Low Channel	52
Plot 41. CDMA Downlink Conducted Emissions 1 GHz – 10GHz, Low Channel	52
Plot 42. CDMA Downlink Conducted Emissions 30 MHz – 1GHz, Mid Channel	53
Plot 43. CDMA Downlink Conducted Emissions 1 GHz – 10GHz, Mid Channel	53
Plot 44. CDMA Downlink Conducted Emissions 30 MHz – 1GHz, High Channel	54
Plot 45. CDMA Downlink Conducted Emissions 1 GHz – 10GHz, High Channel	54
Plot 46. CDMA Intermodulation Low End, Downlink	55
Plot 47. CDMA Intermodulation High End, Downlink	55



Plot 48. CDMA Uplink Conducted Emissions 30 MHz – 1GHz, Low Channel.....	56
Plot 49. CDMA Uplink Conducted Emissions 1 GHz – 10GHz, Low Channel.....	56
Plot 50. CDMA Uplink Conducted Emissions 30 MHz – 1GHz, Mid Channel.....	57
Plot 51. CDMA Uplink Conducted Emissions 1 GHz – 10GHz, Mid Channel.....	57
Plot 52. CDMA Uplink Conducted Emissions 30 MHz – 1GHz, High Channel.....	58
Plot 53. CDMA Uplink Conducted Emissions 1 GHz – 10GHz, High Channel.....	58
Plot 54. CDMA Intermodulation Low End, Uplink	59
Plot 55. CDMA Intermodulation High End, Uplink.....	59
Plot 56. GSM Downlink Conducted Emissions 30 MHz – 1GHz, Low Channel	60
Plot 57. GSM Downlink Conducted Emissions 1 GHz – 10GHz, Low Channel	60
Plot 58. GSM Downlink Conducted Emissions 30 MHz – 1GHz, Mid Channel	61
Plot 59. GSM Downlink Conducted Emissions 1 GHz – 10GHz, Mid Channel.....	61
Plot 60. GSM Downlink Conducted Emissions 30 MHz – 1GHz, High Channel.....	62
Plot 61. GSM Downlink Conducted Emissions 1 GHz – 10GHz, High Channel	62
Plot 62. GSM Intermodulation Low End, Downlink.....	63
Plot 63. GSM Intermodulation High End, Downlink	63
Plot 64. GSM Uplink Conducted Emissions 30 MHz – 1GHz, Low Channel	64
Plot 65. GSM Uplink Conducted Emissions 1 GHz – 10GHz, Low Channel	64
Plot 66. GSM Uplink Conducted Emissions 30 MHz – 1GHz, Mid Channel	65
Plot 67. GSM Uplink Conducted Emissions 1 GHz – 10GHz, Mid Channel.....	65
Plot 68. GSM Uplink Conducted Emissions 30 MHz – 1GHz, High Channel.....	66
Plot 69. GSM Uplink Conducted Emissions 1 GHz – 10GHz, High Channel	66
Plot 70. GSM Intermodulation Low End, Uplink	67
Plot 71. GSM Intermodulation High End, Uplink	67
Plot 72. TDMA Downlink Conducted Emissions 30 MHz – 1GHz, Low Channel	68
Plot 73. TDMA Downlink Conducted Emissions 1 GHz – 10GHz, Low Channel	68
Plot 74. TDMA Downlink Conducted Emissions 30 MHz – 1GHz, Mid Channel	69
Plot 75. TDMA Downlink Conducted Emissions 1 GHz – 10GHz, Mid Channel.....	69
Plot 76. TDMA Downlink Conducted Emissions 30 MHz – 1GHz, High Channel.....	70
Plot 77. TDMA Downlink Conducted Emissions 1 GHz – 10GHz, High Channel	70
Plot 78. TDMA Intermodulation Low End, Downlink.....	71
Plot 79. TDMA Intermodulation High End, Downlink	71
Plot 80. TDMA Uplink Conducted Emissions 30 MHz – 1GHz, Low Channel	72
Plot 81. TDMA Uplink Conducted Emissions 1 GHz – 10GHz, Low Channel	72
Plot 82. TDMA Uplink Conducted Emissions 30 MHz – 1GHz, Mid Channel	73
Plot 83. TDMA Uplink Conducted Emissions 1 GHz – 10GHz, Mid Channel	73
Plot 84. TDMA Uplink Conducted Emissions 30 MHz – 1GHz, High Channel	74
Plot 85. TDMA Uplink Conducted Emissions 1 GHz – 10GHz, High Channel	74
Plot 86. TDMA Intermodulation Low End, Uplink	75
Plot 87. TDMA Intermodulation High End, Uplink	75
Plot 88. Out of Band Rejection - Downlink	76
Plot 89. Out of Band Rejection - Uplink	76

List of Photographs

Photograph 1. Advanced RF Technologies Epoch-S02-800, Epoch-S02-8001W, Epoch-S02-8002W	6
Photograph 2. Conducted Emissions Test Setup	20
Photograph 3. Radiated Emission Limits Test Setup	23



List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dBμA	Decibels above one microamp
dBμV	Decibels above one microvolt
dBμA/m	Decibels above one microamp per meter
dBμV/m	Decibels above one microvolt per meter
DC	Direct Current μ
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GR-1089-CORE	(GR) General Requirement(s) imposed by the NEBS standard, (CORE) Central Office Recovery Express (AT&T), (I089) specifies various parts of the General Requirements under Bellcore Technical Standard, Requirements for Electromagnetic Compatibility and Electrical Safety - Generic Criteria for Network Telecommunications Equipment
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μH	microhenry
μ	microfarad
μs	microseconds
NEBS	Network Equipment-Building System
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane



I. Executive Summary



A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Advanced RF Technologies Epoch-S02-800, Epoch-S02-8001W, Epoch-S02-8002W, with the requirements of Part 22 Subpart H and Part 15 Subpart B. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the Epoch-S02-800, Epoch-S02-8001W, Epoch-S02-8002W. Advanced RF Technologies should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the Epoch-S02-800, Epoch-S02-8001W, Epoch-S02-8002W, has been **permanently** discontinued

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 22 Subpart H and Part 15 Subpart B, in accordance with Advanced RF Technologies, purchase order number 1204.

Reference	Description	Compliance
Part 15 Subpart B §15.109(a)	Conducted Emissions	Compliant
Part 15 Subpart B §15.107(a)	Radiated Emissions	Compliant
§2.1046; §22.913	RF Power Output	Compliant
§2.1047	Modulation Characteristics	Not Applicable
§2.1049	Occupied Bandwidth	Compliant
§2.1051; §22.917	Spurious Emissions at Antenna Terminals	Compliant
§2.1053; §22.917	Radiated Spurious Emissions	Compliant
§2.1055; §22.355	Frequency Stability	Not Applicable
2-11-04/EAB/RF	Out of Band Rejection	Compliant

Table 1 Executive Summary of EMC Compliance Testing



II. Equipment Configuration



A. Overview

MET Laboratories, Inc. was contracted by Advanced RF Technologies to perform testing on the Epoch-S02-800, Epoch-S02-8001W, Epoch-S02-8002W, under Advanced RF Technologies's purchase order number 1204.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Advanced RF Technologies, Epoch-S02-800, Epoch-S02-8001W, Epoch-S02-8002W.

The results obtained relate only to the item(s) tested.

Model(s) Tested:	Epoch-S02-8002W				
Model(s) Covered:	Epoch-S02-800, Epoch-S02-8001W, Epoch-S02-8002W				
EUT Specifications:	Primary Power: 120V/60Hz				
	FCC ID: S2O-EPOCHS028002W				
	Type of Modulations:	GSM, TDMA, CDMA			
	Equipment Code:	AMP			
	RF Output Power:	Downlink	Uplink		
		CDMA	33.10dBm		
		GSM	32.80dBm		
	EUT Frequency Ranges:	TDMA	32.37dBm		
		31.88dBm			
Analysis:	The results obtained relate only to the item(s) tested.				
Environmental Test Conditions:	Temperature: 15-35° C				
	Relative Humidity: 30-60%				
	Barometric Pressure: 860-1060 mbar				
Evaluated by:	Shawn McMillen				
Date(s):	July 17, 2007				

Table 2. EUT Specification



B. References

CFR 47, Part 22, Subpart H	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
CFR 47, Part 15, Subpart B	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
ANSI C63.4:2003	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI/NCSL Z540-1-1994	Calibration Laboratories and Measuring and Test Equipment - General Requirements
ANSI/ISO/IEC 17025:2000	General Requirements for the Competence of Testing and Calibration Laboratories
EIA/TIA-603-A-2001	Land Mobile FM or PM Communication Equipment Measurement and Performance Standards

Table 3. References

C. Test Site

All testing was performed at MET Laboratories, Inc., 4855 Patrick Henry Drive, Building 6, Santa Clara, California 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 10 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories. In accordance with §2.948(d), MET Laboratories has been accredited by A2LA (Certificate Number 591.02).

D. Description of Test Sample

The Advanced RF Technologies Epoch-S02-800, Epoch-S02-8001W, Epoch-S02-8002W, is an RF signal amplifier system for the wireless 800 MHz Cellular spectrum. Its main purpose is to extend wireless signal from the base station to shaded areas or to a region of poor wireless coverage within an in-building environment. A repeater is meant to be used in conjunction with a base station.



Photograph 1. Advanced RF Technologies Epoch-S02-800, Epoch-S02-8001W, Epoch-S02-8002W

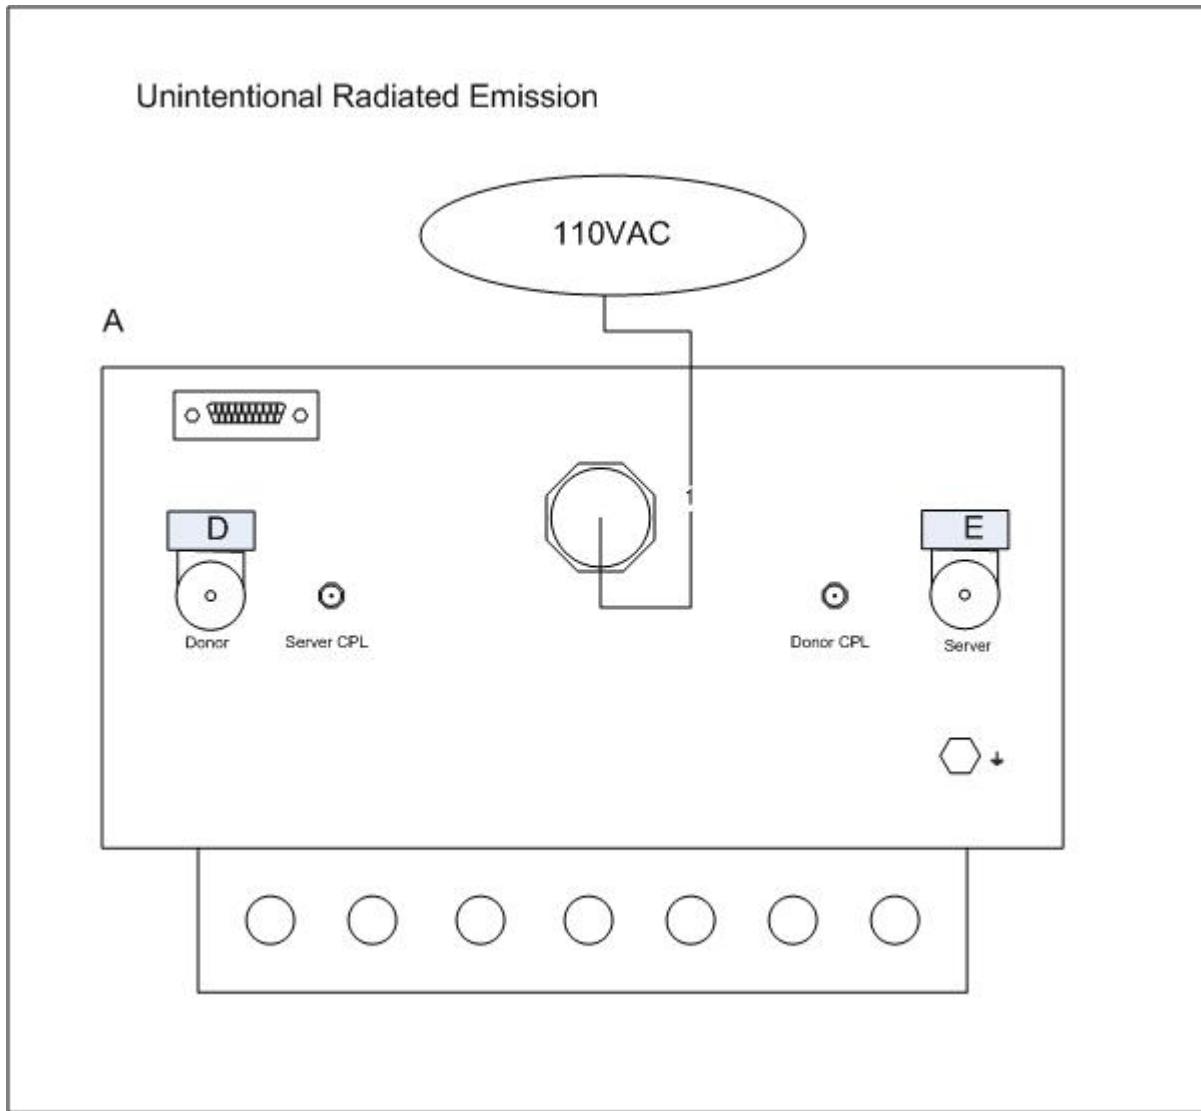


Figure 1. Block Diagram of Test Configuration (Radiated Emissions)

Conducted Measurement (Down-Link)

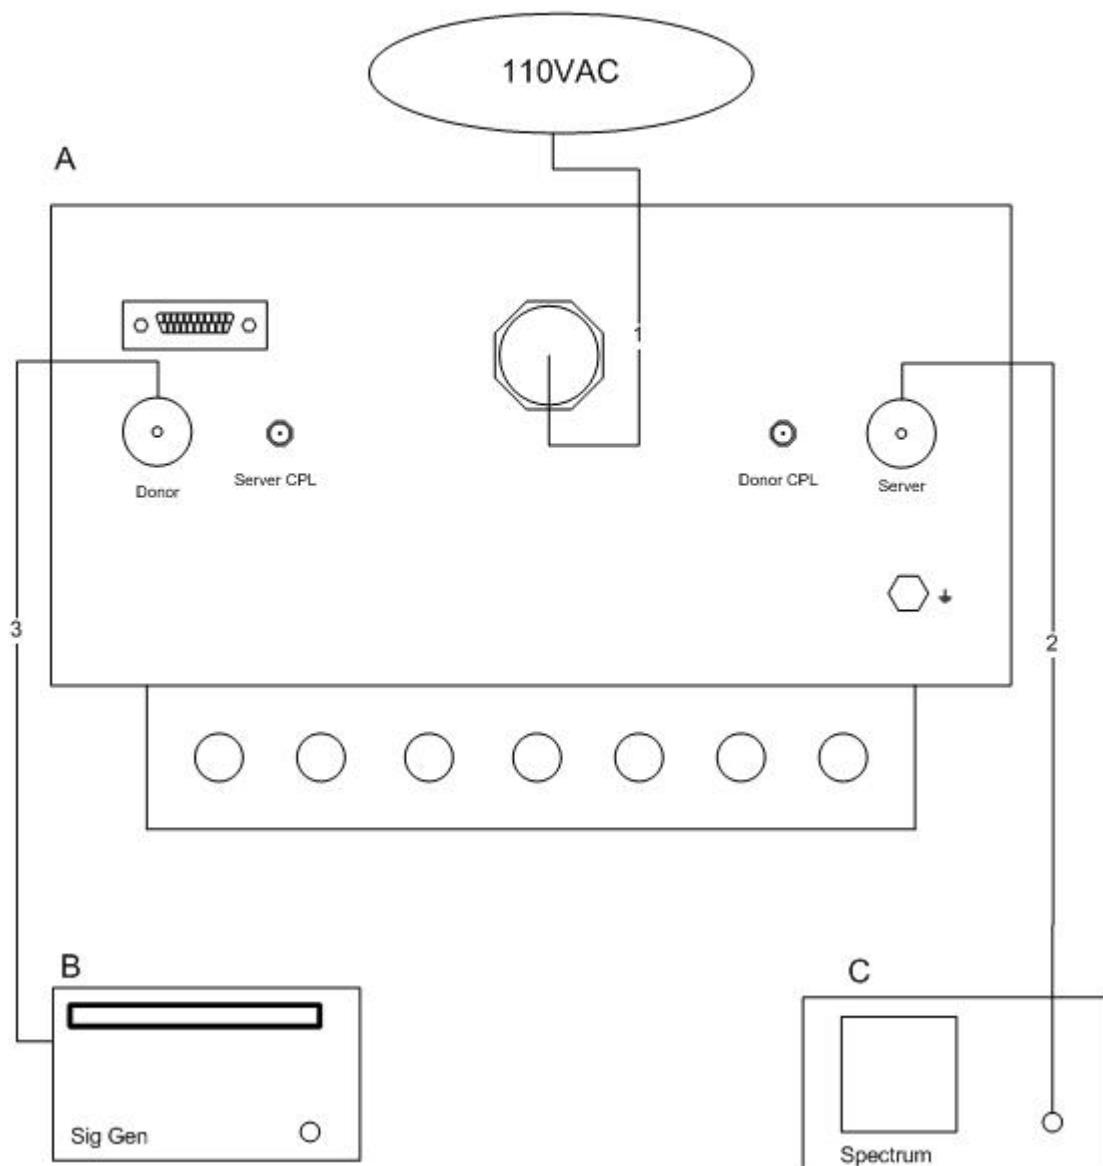


Figure 2. Block Diagram of Test Configuration (Conducted Measurement-Downlink)

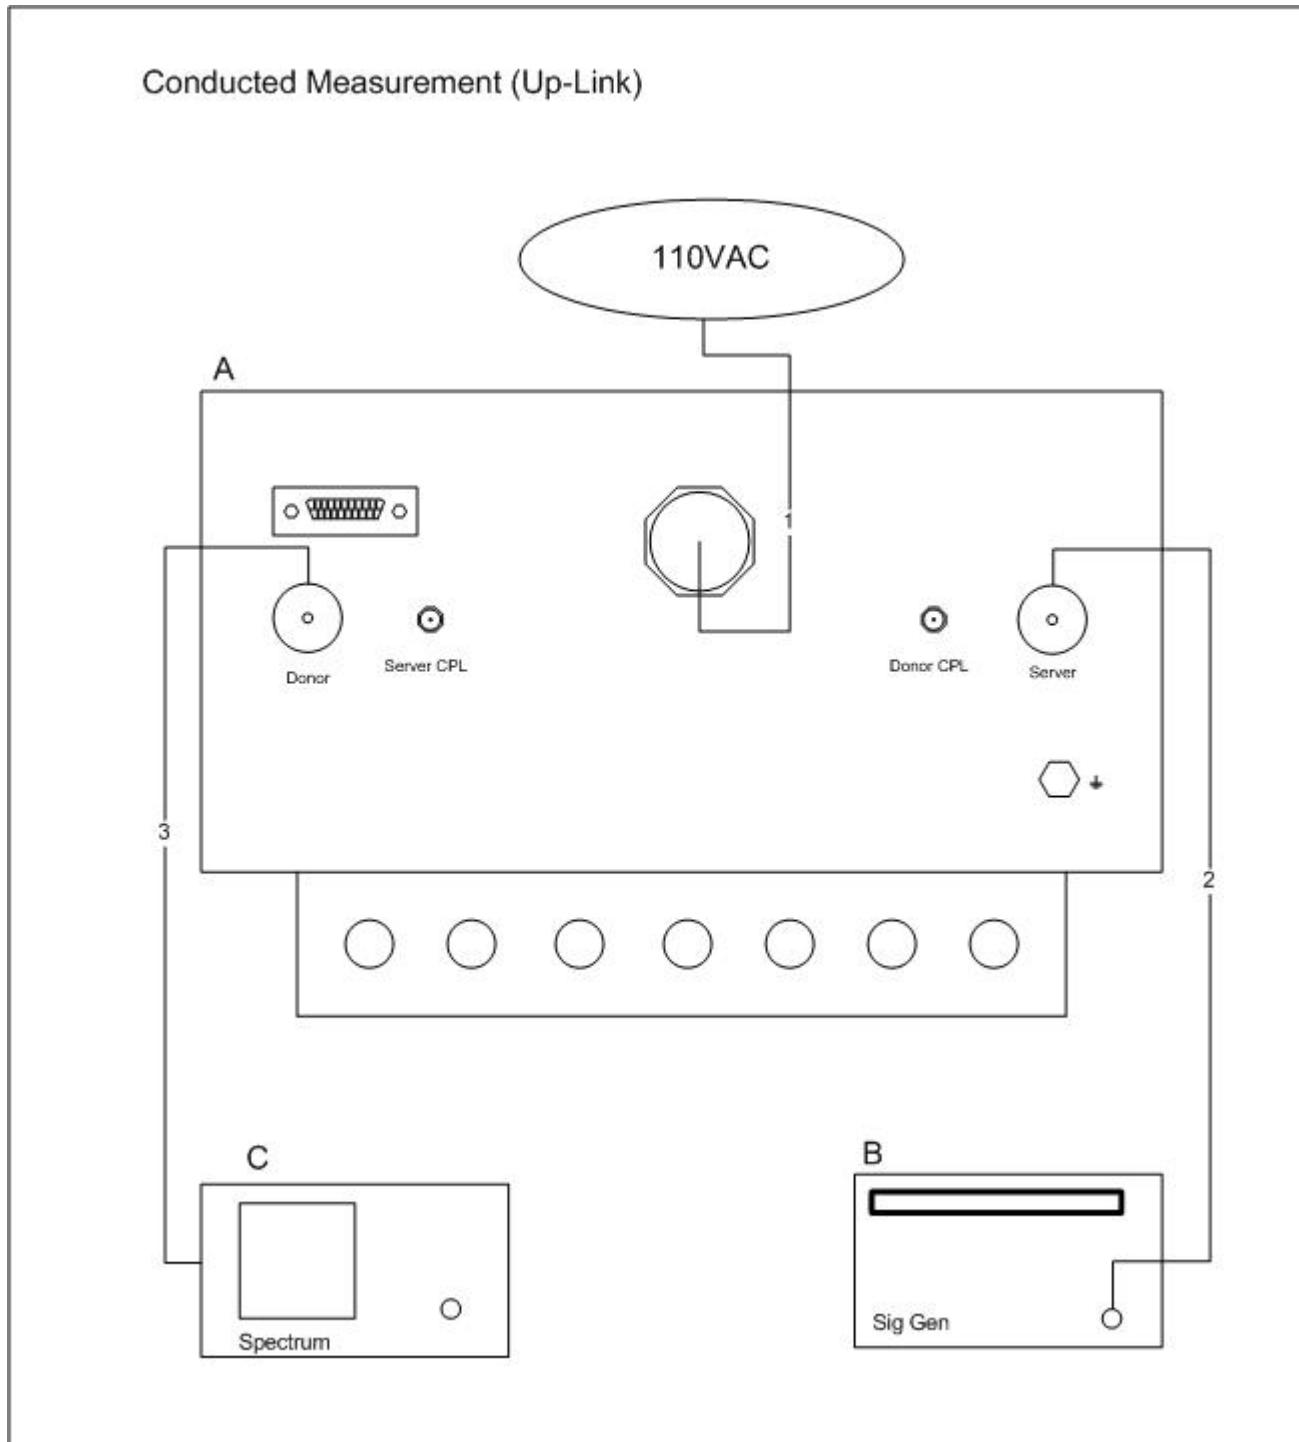


Figure 3. Block Diagram of Test Configuration (Conducted Measurement-Uplink)

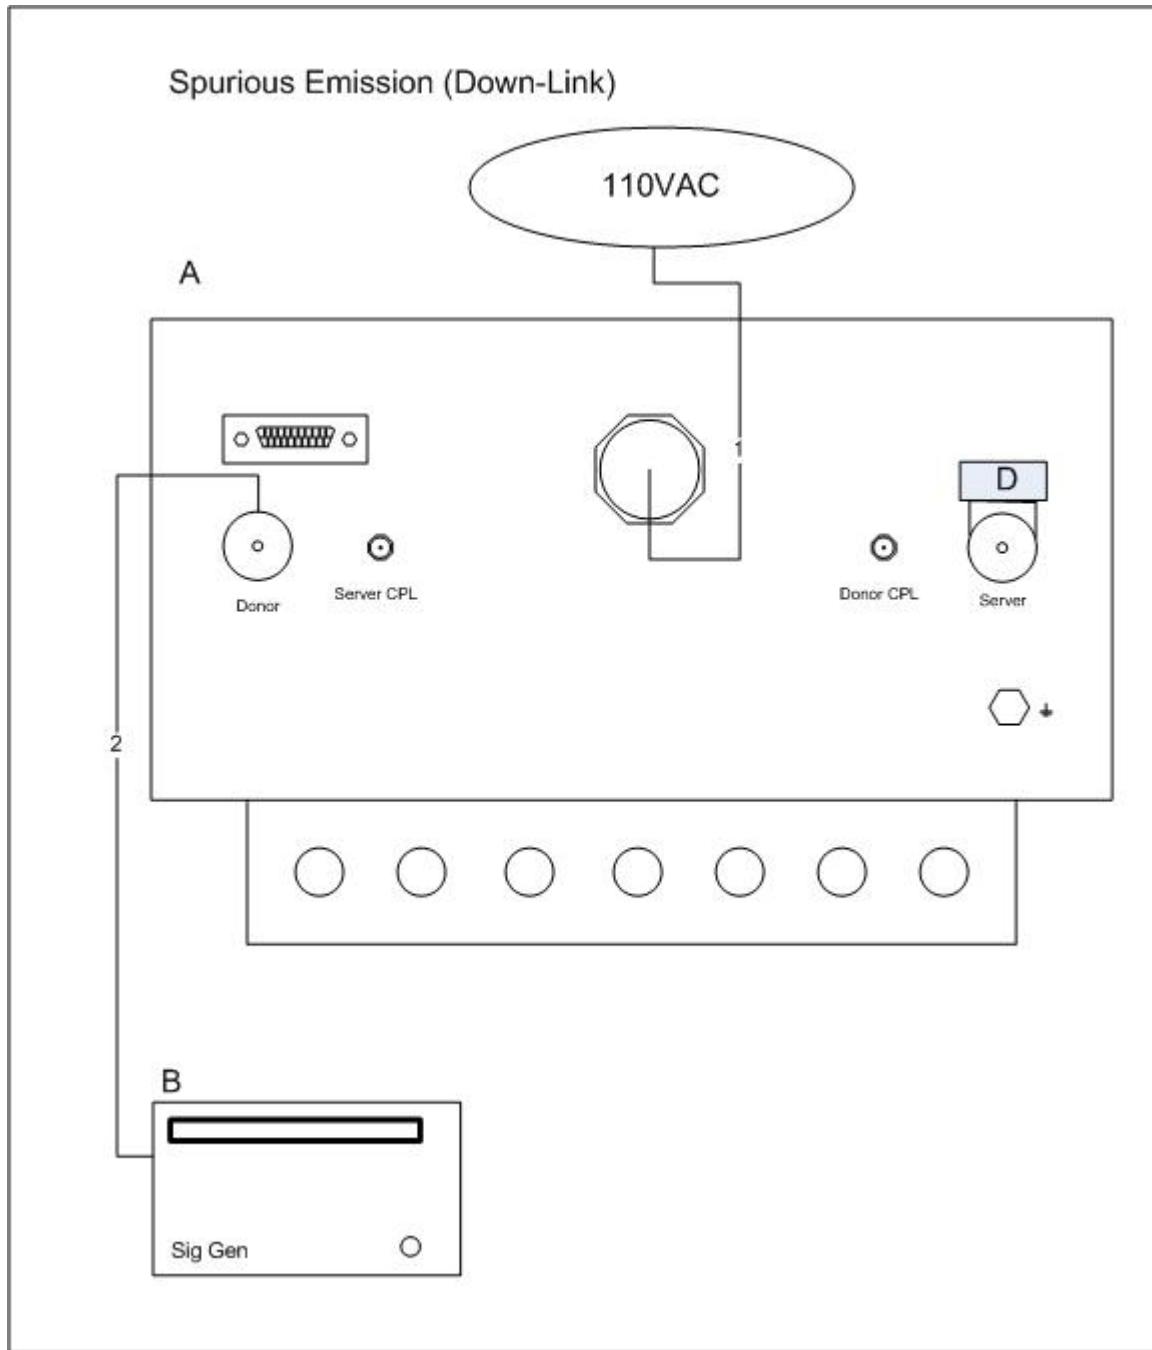


Figure 4. Block Diagram of Test Configuration (Spurious Emission-Downlink)

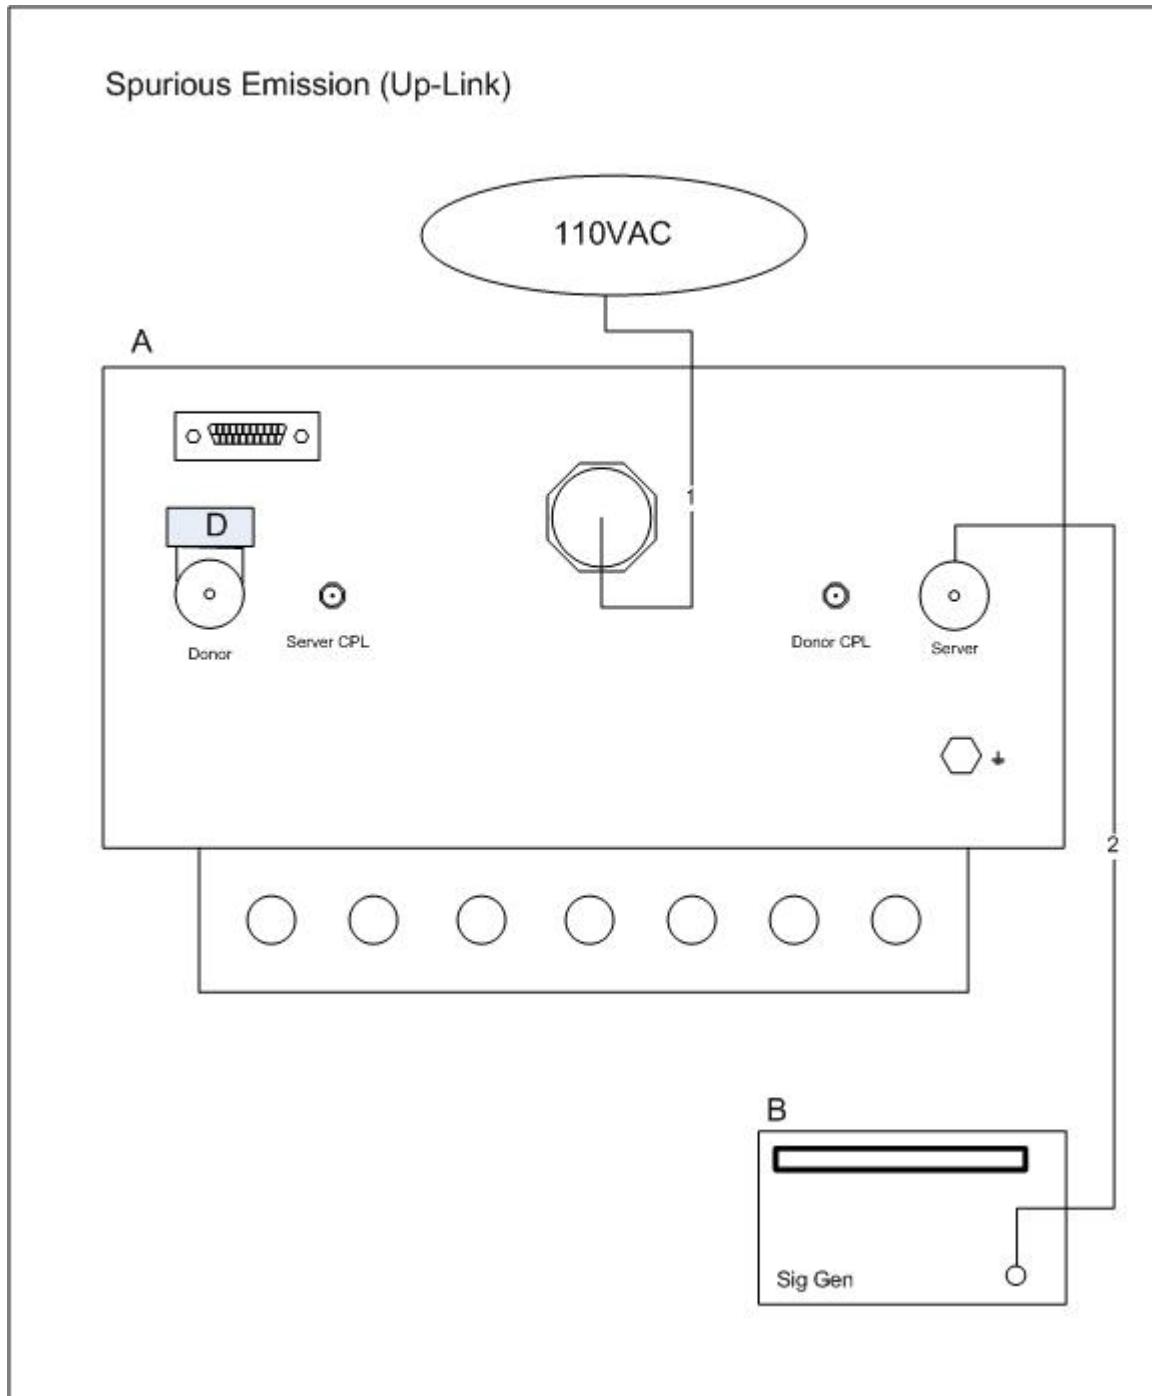


Figure 5. Block Diagram of Test Configuration (Spurious Emission-Uplink)

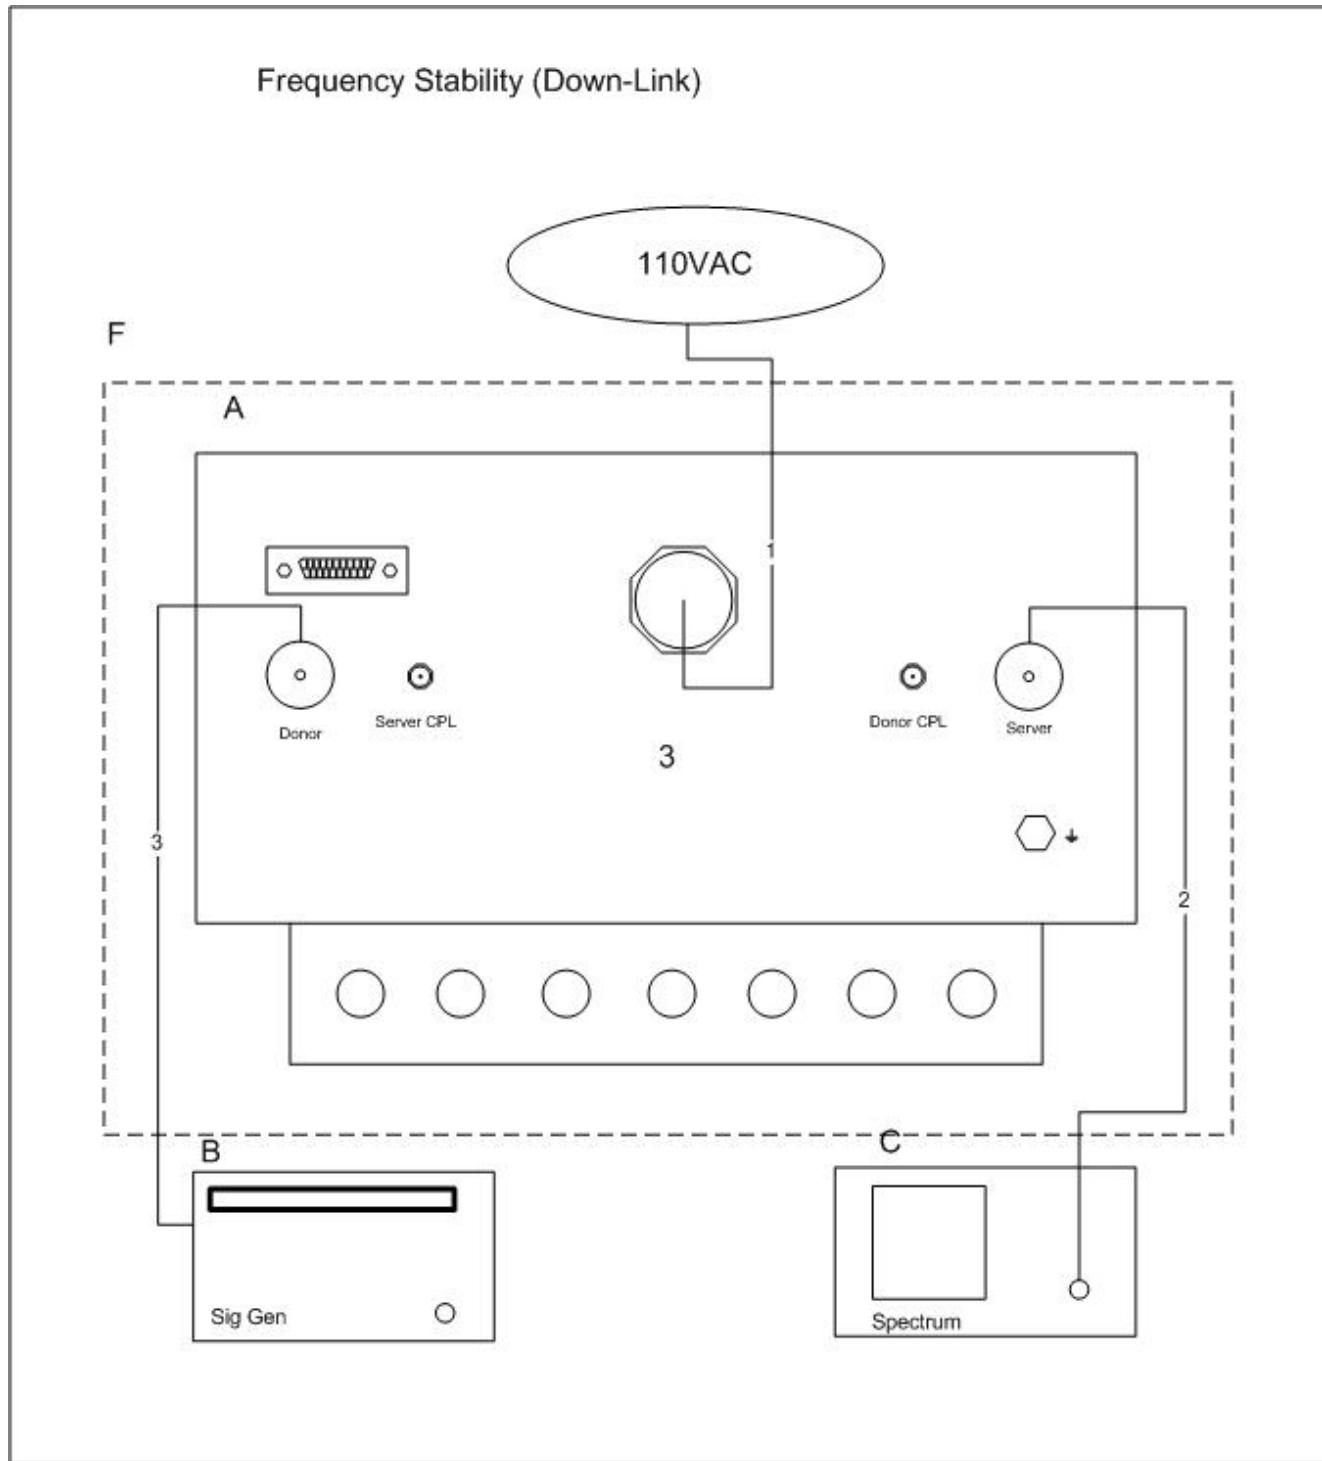


Figure 6. Block Diagram of Test Configuration (Frequency Stability)



E. Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Serial Number
A	Epoch-S02-800XX		

Table 4. Equipment Configuration (Radiated Emissions)

F. Support Equipment

Advanced RF Technologies supplied support equipment necessary for the operation and testing of the Epoch-S02-800, Epoch-S02-8001W, Epoch-S02-8002W. All support equipment supplied is listed in the following Support Equipment List.

Ref. ID	Name / Description	Manufacturer	Model Number	Serial Number
B	Signal Generator	HP	E4432B	US38080117
C	Spectrum Analyzer	HP	E4407B	MY45102898
D	50 Ohms Terminator	Narda	375BNM	07
E	50 Ohms Terminator	Narda	378BNM	53
F	Temperature Chamber	Tenny Engineering	T630	11939-5

Table 5. Support Equipment (Radiated Emissions)

* The 'Customer Supplied Calibration Data' column will be marked as either not applicable, not available, or will contain the calibration date supplied by the customer.

** The AC/DC Adapter was used to power the EUT for testing purpose only, will not be sold with radio.



G. Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty.	Length (m)	Shielded?	Termination Box ID & Port ID
Conducted Measurement (Up-Link)						
1	A, AC Input	AC PWR Cord (18AWG)	1	2	No	AC PWR Outlet
2	A Front, Up link	Coax	1	2	Yes	B
3	A Front, Down link	Coax	1	2	Yes	C
Conducted Measurement (Down-Link)						
1	A, AC Input	AC PWR Cord (18AWG)	1	2	No	AC PWR Outlet
2	A Front, Up link	Coax	1	2	Yes	C
3	A Front, Down link	Coax	1	2	Yes	B
Spurious Emission (Up-Link)						
1	A	AC PWR Cord (18AWG)	1	2	No	AC PWR Outlet
2	A Front, Uplink	Coax	1	2	Yes	B
Spurious Emission (Down-Link)						
1	A	AC PWR Cord (18AWG)	1	2	No	AC PWR Outlet
2	A Front, Downlink	Coax	1	2	Yes	B
Unintentional Radiated Emission						
1	A	AC PWR Cord (18AWG)	1	2	No	AC PWR Outlet
Frequency Stability (Down-Link)						
1	A, AC Input	AC PWR Cord (18AWG)	1	2	No	AC PWR Outlet
2	A Front, Up link	Coax	1	2	Yes	C
3	A Front, Down link	Coax	1	2	Yes	B

Table 6. Ports and Cabling Information



H. Mode of Operation

Uplink Mode: Signal flow from the mobile handset to the server antenna to the server port of the repeater to the donor port of the repeater to the donor antenna to the base station.

Down Link Mode: Signal flow from the base station to the donor antenna to donor port of the repeater to the server port of the repeater to the server antenna to the mobile handset.

I. Method of Monitoring EUT Operation

A Spectrum Analyzer and a Power Meter was use to monitor the EUT's transmitter channel and power output.

J. Modifications

a) Modifications to EUT

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

K. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Advanced RF Technologies upon completion of testing.



Advanced RF Technologies
Epoch-S02-800, Epoch-S02-8001W, Epoch-S02-8002W

Electromagnetic Compatibility
Unintentional Radiators
CFR Title 47 Part 22 Subpart H & Part 15 Subpart B

III. Electromagnetic Compatibility Criteria for Unintentional Radiators



Electromagnetic Compatibility Criteria for Unintentional Radiators

§ 15.107 Conducted Emissions Limits

Test Requirement(s):

15.107 (a) “Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 7. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.”

15.107 (b) “For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 7. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.”

Frequency range (MHz)	15.107(b), Class A Limits (dB μ V)		15.107(a), Class B Limits (dB μ V)	
	Quasi-Peak	Average	Quasi-Peak	Average
0.15- 0.5	79	66	66 - 56	56 - 46
0.5 - 5.0	73	60	56	46
5.0 - 30	73	60	60	50

Note 1 — The lower limit shall apply at the transition frequencies.

Table 7. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Section 15.107(a) (b)

Test Procedures:

The EUT was placed on a 0.8m-high wooden table inside a semi-anechoic chamber. The method of testing, test conditions, and test procedures of ANSI C63.4 were used. The EUT was powered through a 50 Ω /50 μ H LISN. An EMI receiver, connected to the measurement port of the LISN, scanned the frequency range from 150 kHz to 30 MHz in order to find the peak conducted emissions. All peak emissions within 6 dB of the limit were measured using a quasi-peak and/or average detector as appropriate.

Test Results:

The EUT was found compliant with the Class A requirement(s) of this section. Measured emissions were below applicable limits.

Test Engineer(s):

Billy Kwan

Test Date(s):

June 25, 2007



Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz)

Freq. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
0.218	59.02	79	PASS	-19.98	58.79	66	PASS	-7.21
0.361	46.75	79	PASS	-32.25	46.11	66	PASS	-19.89
7.086	47.07	73	PASS	-25.93	39.47	60	PASS	-20.53


Table 8. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz)

Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz)


Freq. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
0.216	60.06	79	PASS	-18.94	59.21	66	PASS	-6.79
0.361	57.17	79	PASS	-21.83	56.13	66	PASS	-9.87
7.379	44.92	73	PASS	-28.08	38.52	60	PASS	-21.48

Table 9. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz)

Conducted Emissions - Voltage, Worst Case Emissions, AC Power, (120 VAC, 60 Hz)

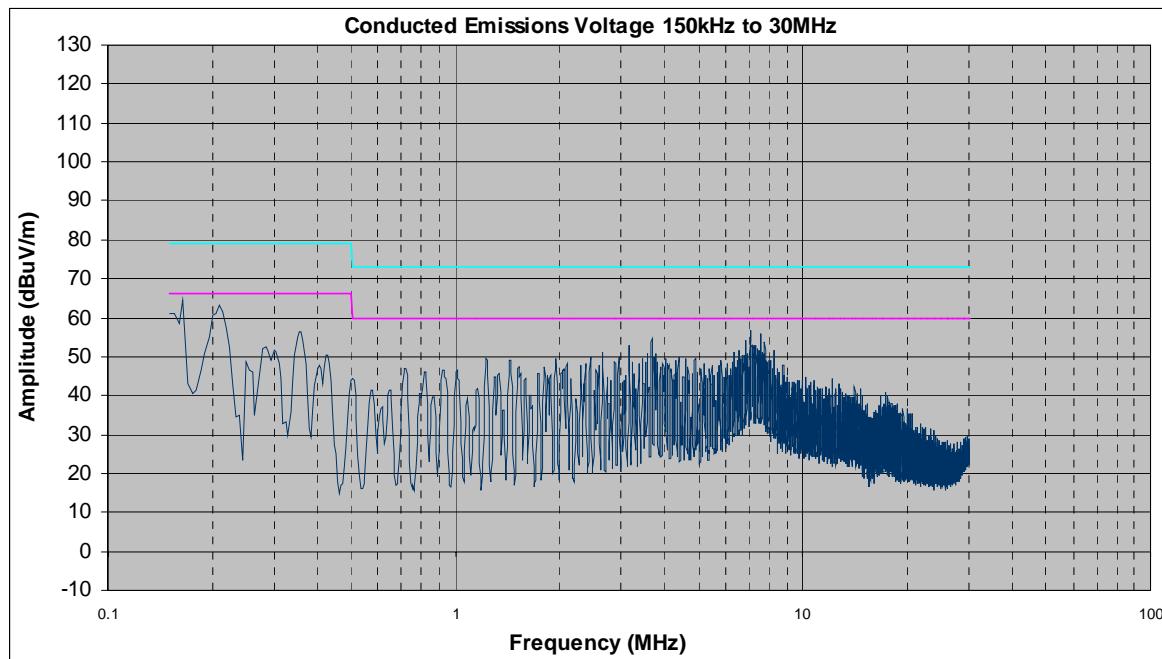


Plot 1. Conducted Emission, Phase Line Plots

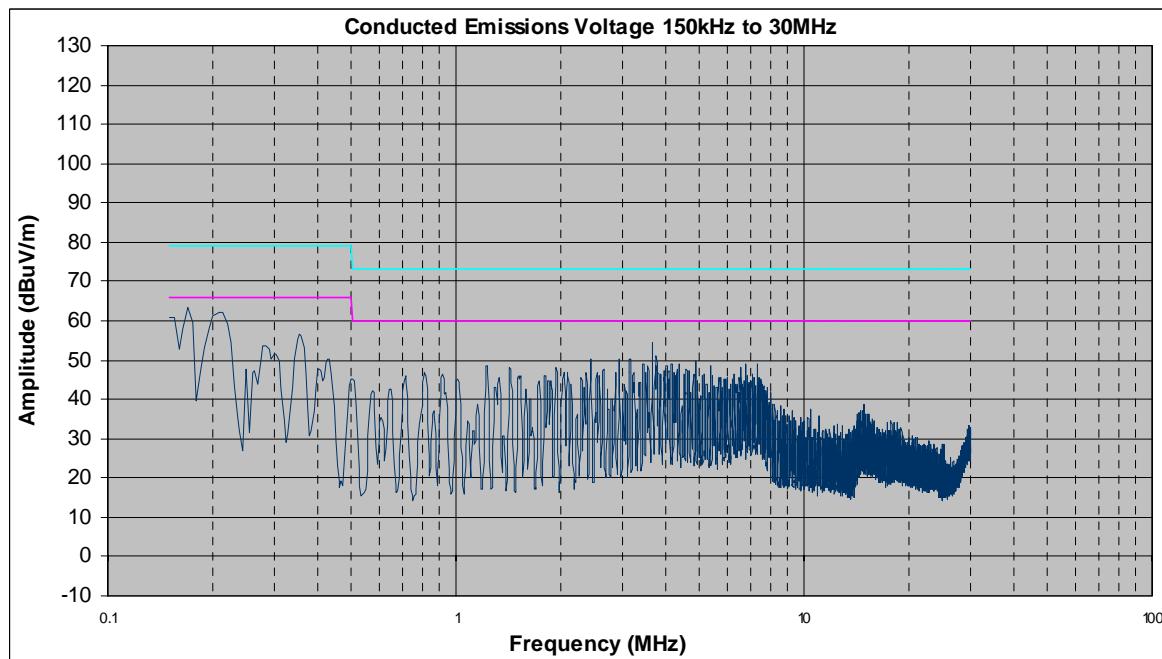

Plot 2. Conducted Emission, Neutral Line Plots

Conducted Emission Limits Test Setup

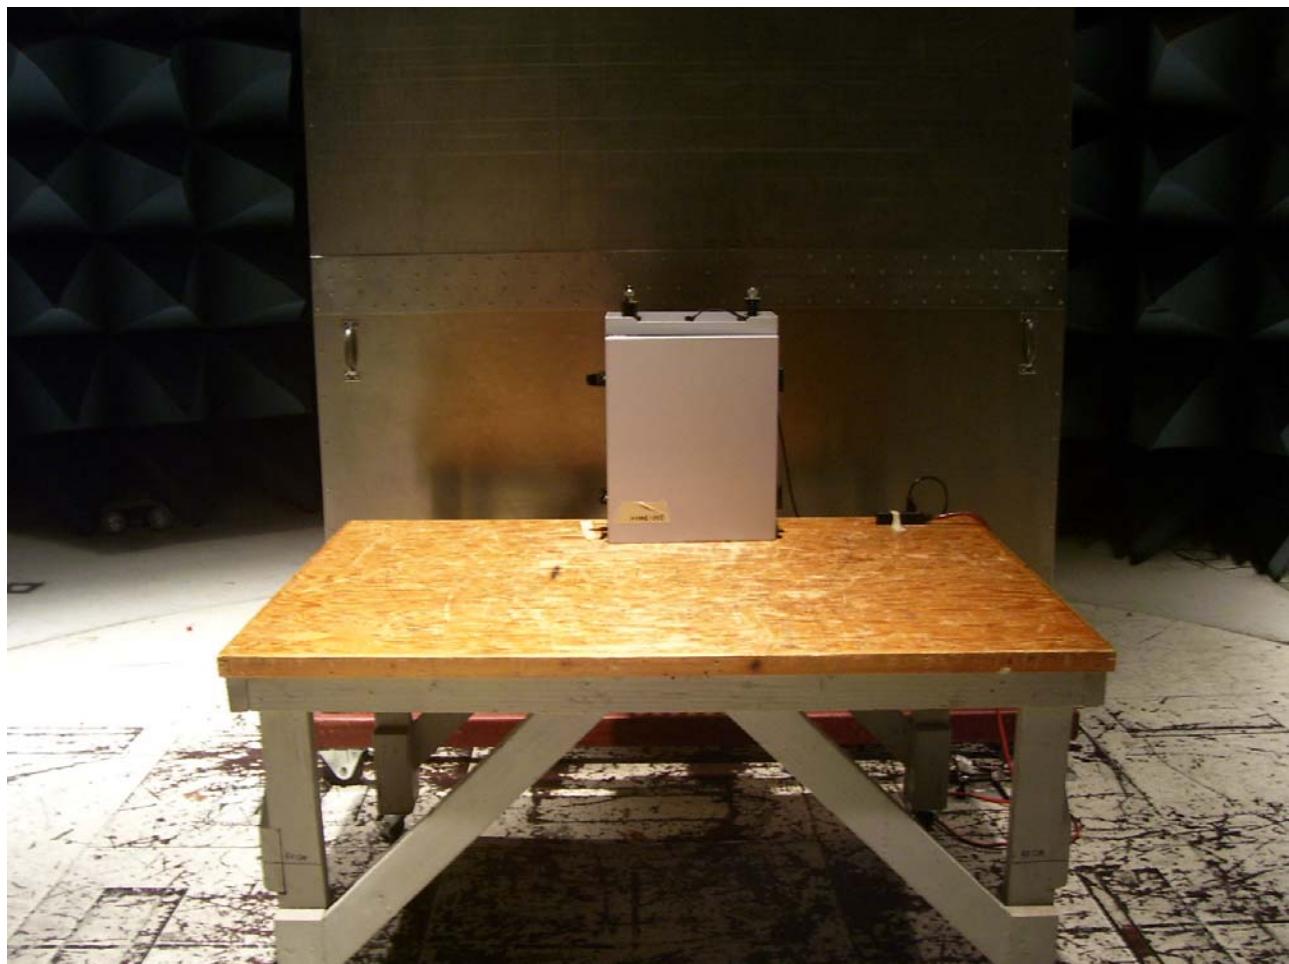

Photograph 2. Conducted Emissions Test Setup



Radiated Emission Limits

Test Requirement(s): **15.109 (a)** Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class B limits expressed in Table 10.

15.109 (b) The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 10.

Frequency (MHz)	Field Strength (dB μ V/m)	
	§15.109 (b), Class A Limit (dB μ V) @ 10m	§15.109 (a), Class B Limit (dB μ V) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

Table 10. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)

Test Procedures: The EUT was placed on a 0.8m-high wooden table inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4 were used. An antenna was located 3 m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

(Emissions measured at 3m were normalized using an inverse proportionality factor of 20dB per decade for comparison to the 10 m limit.)

Test Results: The EUT was found Compliant with the Class A requirement(s) of this section. Measured emissions were below applicable limits


Test Engineer(s): Billy Kwan

Test Date(s): June 25, 2007

Radiated Emissions Limits Test Results, Class A

Frequency (MHz)	Antenna Polarity (H/V)	EUT Azimuth (Degrees)	Antenna HEIGHT (m)	Uncorrected Amplitude QP Detector (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss (dB) (+)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
128.72	V	140	1	11.42	11.33	2.03	24.78	43.50	-18.73
156.32	V	112	1	18.34	9.97	2.28	30.59	43.50	-12.92
173.56	V	3.17	1	19.58	9.96	2.38	31.91	43.50	-11.59
306.88	H	2.35	2.18	5.83	13.20	2.97	22.00	46.40	-24.40
452.04	H	153	1.46	14.36	17.02	3.76	35.14	46.40	-11.26
497.64	H	318	1.41	14.66	17.80	4.02	36.48	46.40	-9.92

Table 11. Radiated Emissions Limits Test Results

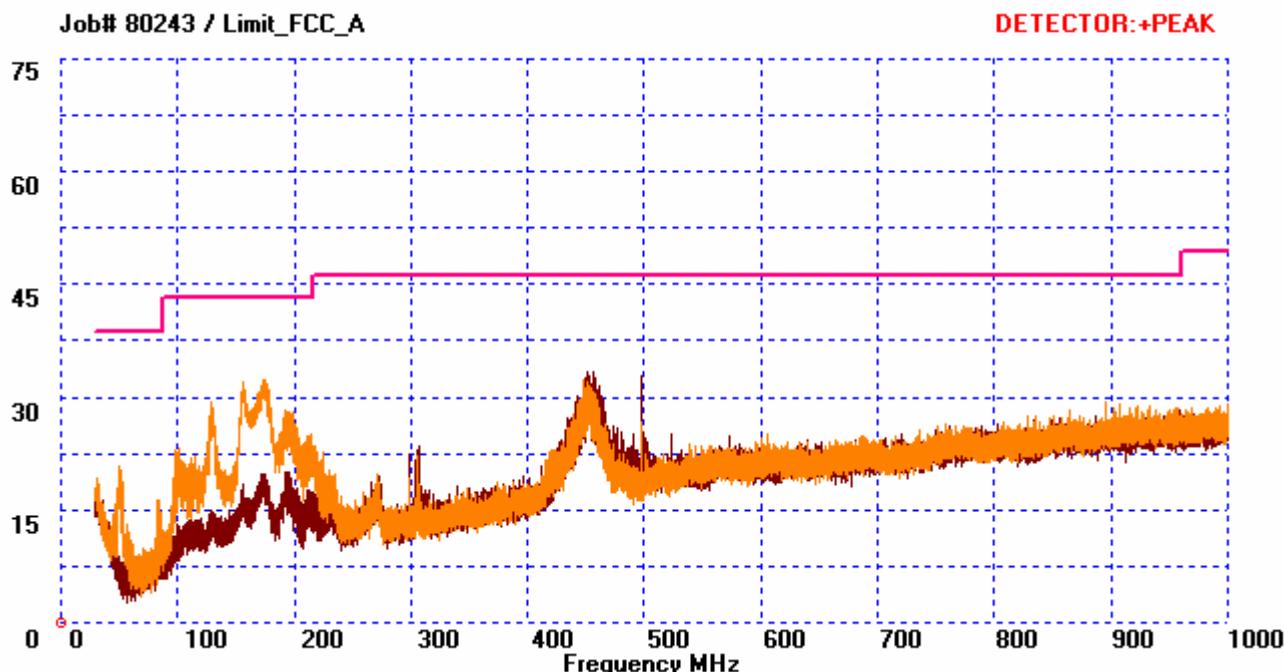

Plot 3. Radiated Emissions Test Results Plot

Radiated Emission Limits Test Setup



Photograph 3. Radiated Emission Limits Test Setup



IV. Electromagnetic Compatibility Criteria for Intentional Radiators



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 2.1046 RF Power Output

Test Requirements: **§ 2.1046 Measurements required: RF power output:**

§ 2.1046 (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

§ 2.1046 (b) For single sideband, independent sideband, and single channel, controlled carrier radiotelephone transmitters, the procedure specified in paragraph (a) of this section shall be employed and, in addition, the transmitter shall be modulated during the test as specified and as applicable in § 2.1046 (b) (1-5). In all tests, the input level of the modulating signal shall be such as to develop rated peak envelope power or carrier power, as appropriate, for the transmitter.

§ 2.1046 (c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations.

§ 22.913 Power and antenna height limits.

§ 22.913(a): The Effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 watts.



Test Procedures: As required by 47 CFR 2.1046, RF power output measurements were made at the RF output terminals using an attenuator and spectrum analyzer or power meter. This test was performed in all applicable modulations.

Test Results: The EUT complies with the requirements of this section. The EUT conducted power does not exceed limit at the carrier frequency.

CDMA UpLink			
Carrier Channel	Frequency (MHz)	Measured Average Input Power dBm	Measured Average Output Power dBm
Low	825.25	-58.0	33.36
Mid	836.50	-58.7	33.10
High	847.75	-58.5	31.76

CDMA DownLink			
Carrier Channel	Frequency (MHz)	Measured Average Input Power dBm	Measured Average Output Power dBm
Low	870.25	-59.0	33.05
Mid	881.50	-61.3	33.10
High	892.75	-61.2	32.74

TDMA UpLink			
Carrier Channel	Frequency (MHz)	Measured Average Input Power dBm	Measured Average Output Power dBm
Low	824.50	-59.59	31.88
Mid	836.50	-59.39	31.76
High	848.50	-59.49	30.56

TDMA DownLink			
Carrier Channel	Frequency (MHz)	Measured Average Input Power dBm	Measured Average Output Power dBm
Low	869.50	-62.79	31.56
Mid	881.50	-61.79	32.37
High	893.50	-63.59	31.50




GSM UpLink			
Carrier Channel	Frequency (MHz)	Measured Average Input Power dBm	Measured Average Output Power dBm
Low	824.50	-58.29	32.91
Mid	836.50	-59.49	32.04
High	848.50	-58.39	31.54

GSM DownLink			
Carrier Channel	Frequency (MHz)	Measured Average Input Power dBm	Measured Average Output Power dBm
Low	869.50	-62.19	32.56
Mid	881.50	-61.49	32.80
High	893.50	-62.49	32.54

Test Engineer(s): Shawn McMillen

Test Date(s): June 18, 2007



Block Diagram 1. RF Power Output Test Setup



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 2.1047 Modulation Characteristics

Test Requirement(s): § 2.1047 Measurements required: Modulation characteristics

§ 2.1047 (a): Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

Test Procedures: This EUT does not support the ability to modulate voice.

Test Results: N/A



§ 2.1049 Occupied Bandwidth

Test Requirement(s): **§ 2.1049 Measurements required: Occupied bandwidth:** The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the specified conditions of § 2.1049 (a) through (i) as applicable.


Test Procedures: As required by 47 CFR 2.1049, *occupied bandwidth measurements* were made with a Spectrum Analyzer connected to the RF ports for both Uplink and Downlink

The modulation characteristics of signal generator's carrier was measured first at a maximum RF level prescribed by the OEM. The signal generator was then connected to either the Uplink or Downlink input at the appropriate RF level. The resulting modulated signal through the EUT was measured and compared against the original signal.


Test Results: The EUT complies with the requirements of this section.

Test Engineer(s): Shawn McMillen


Test Date(s): June 18, 2007

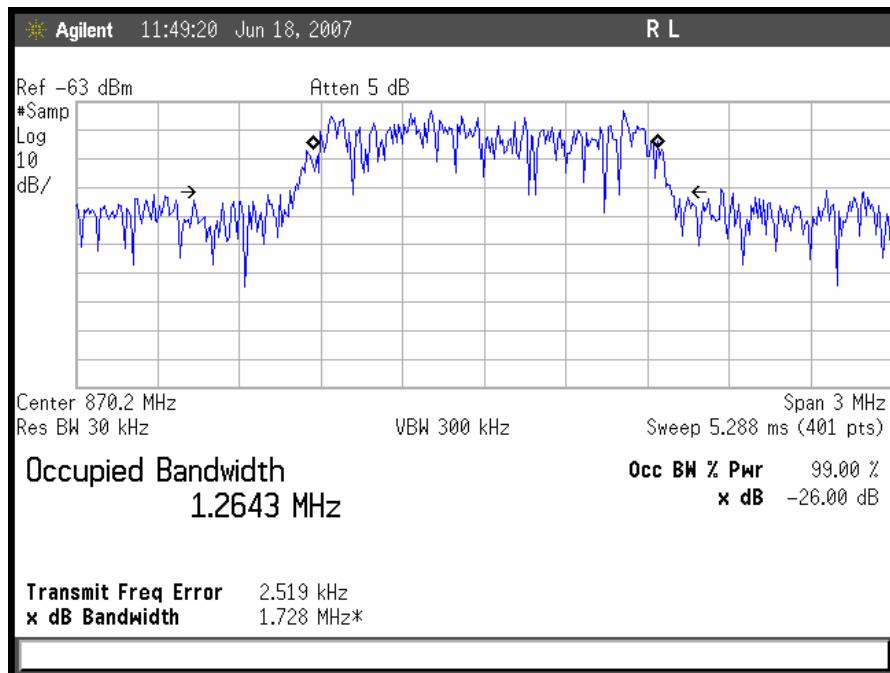


Plot 4. CDMA Downlink Low Channel Input

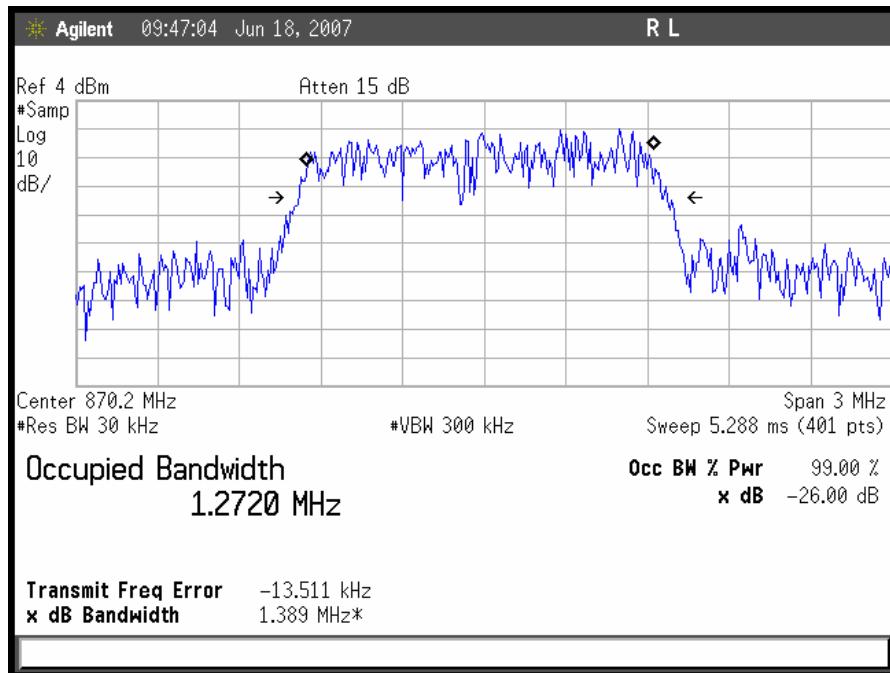


Plot 5. CDMA Downlink Low Channel Output

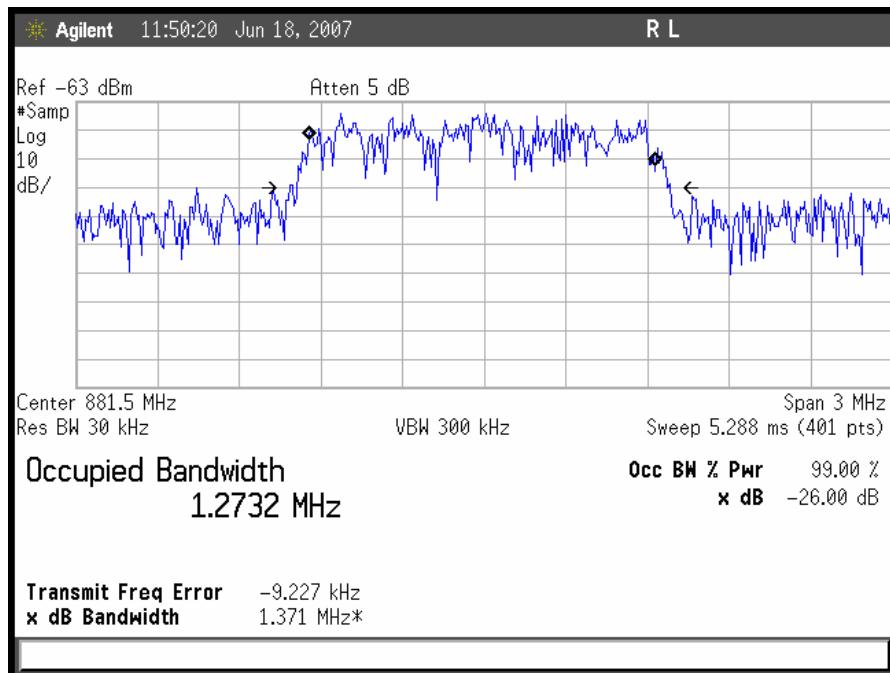


Plot 6. CDMA Downlink Mid Channel Input

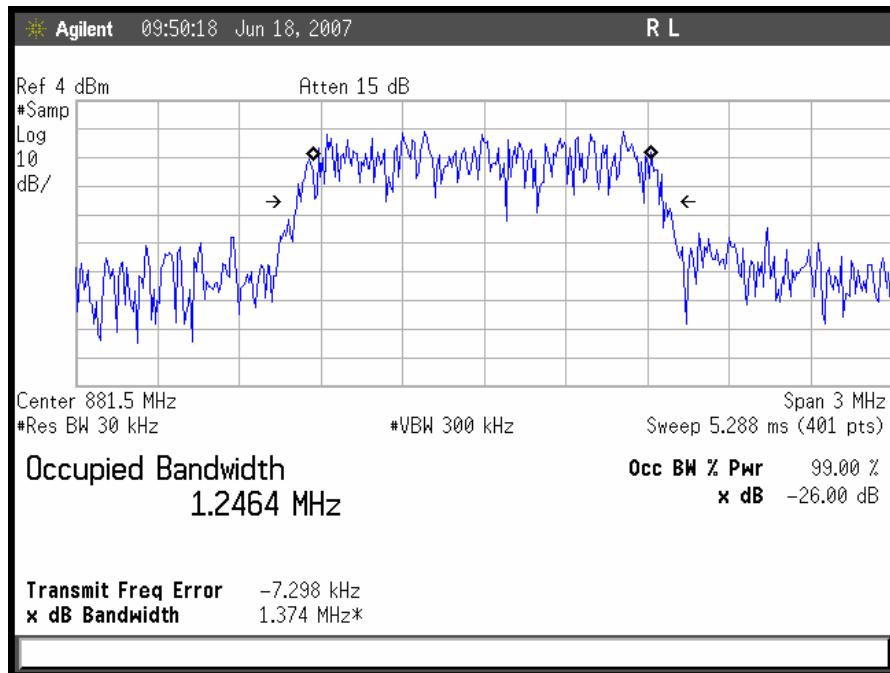


Plot 7. CDMA Downlink Mid Channel Output

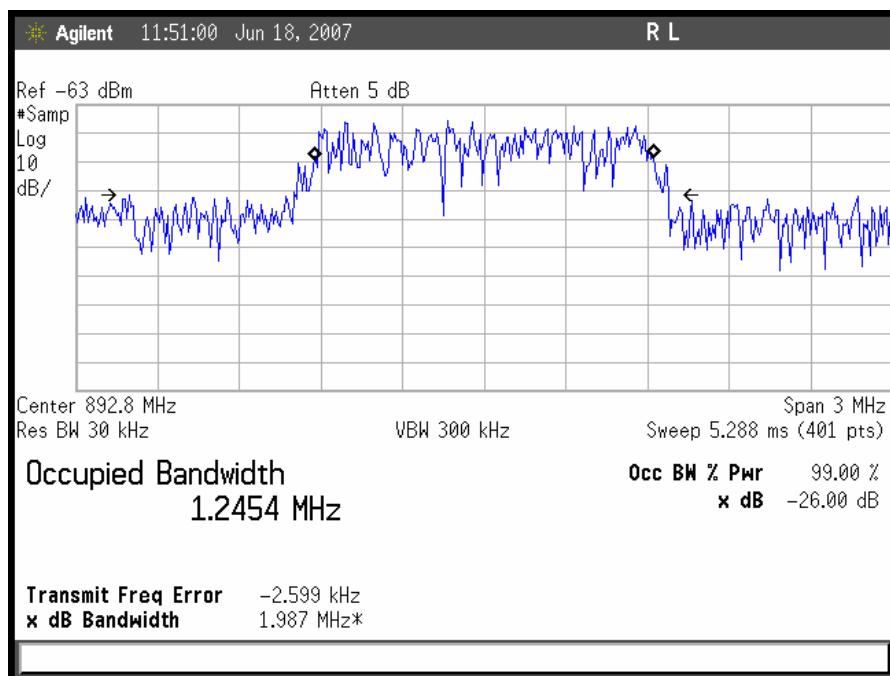


Plot 8. CDMA Downlink High Channel Input

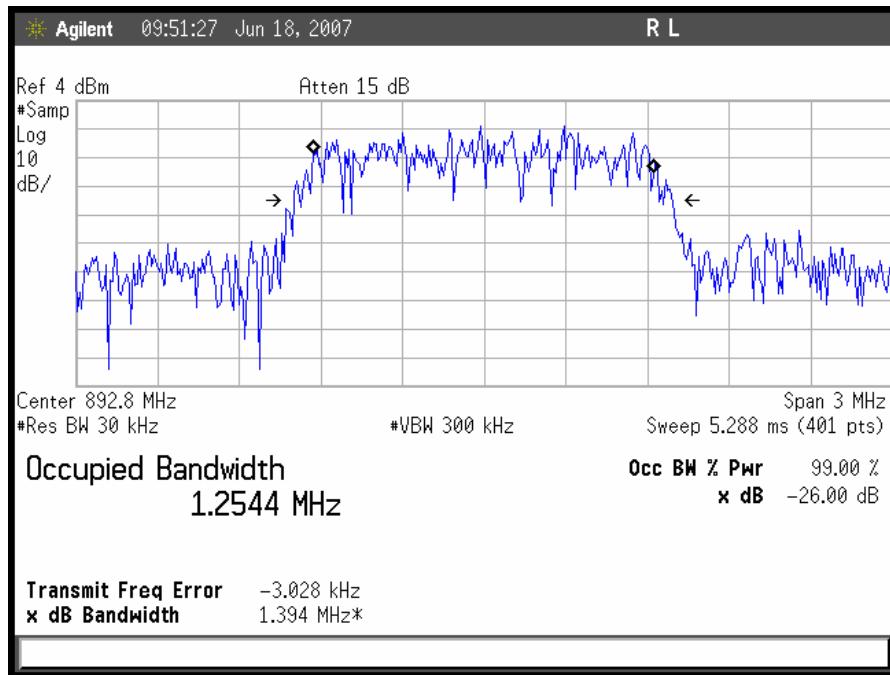



Plot 9. CDMA Downlink High Channel Output


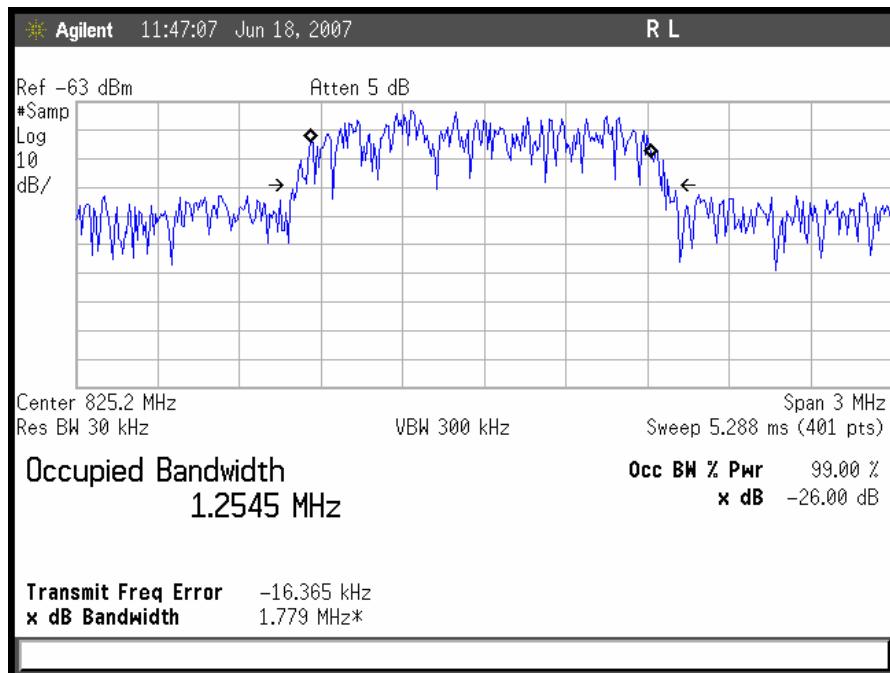



Plot 10. CDMA Uplink Low Channel Input

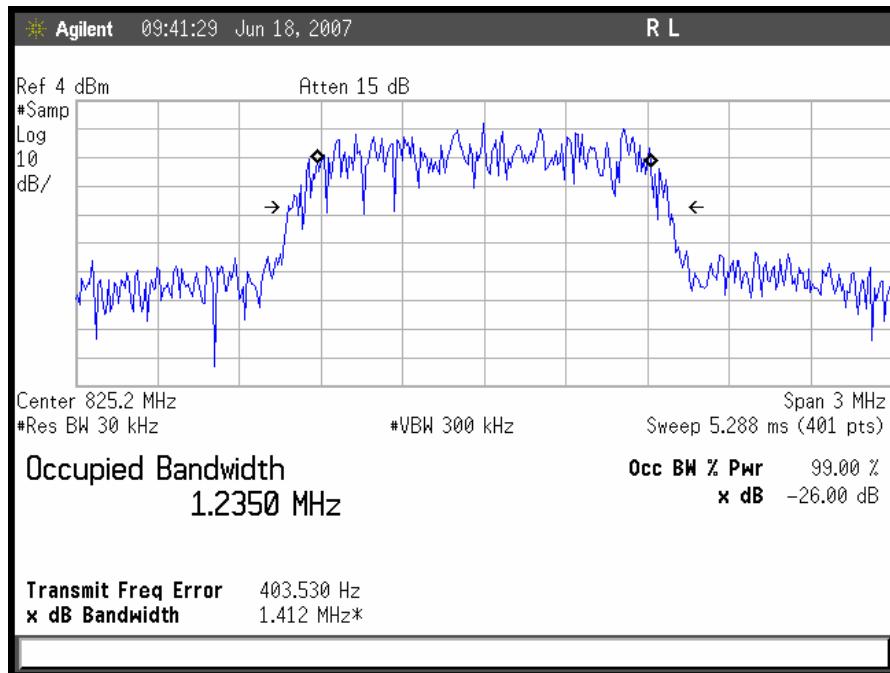


Plot 11. CDMA Uplink Low Channel Output

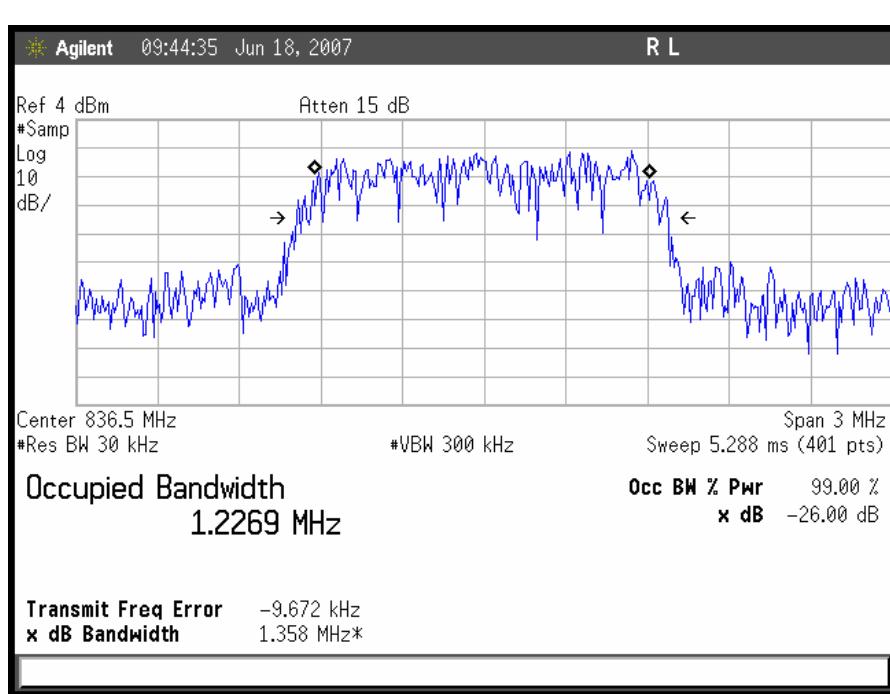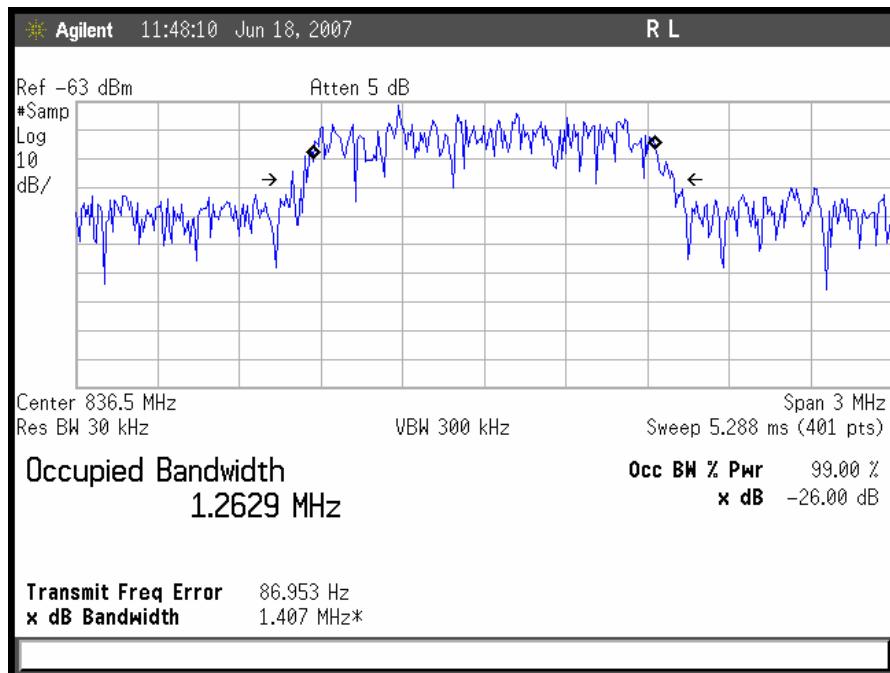

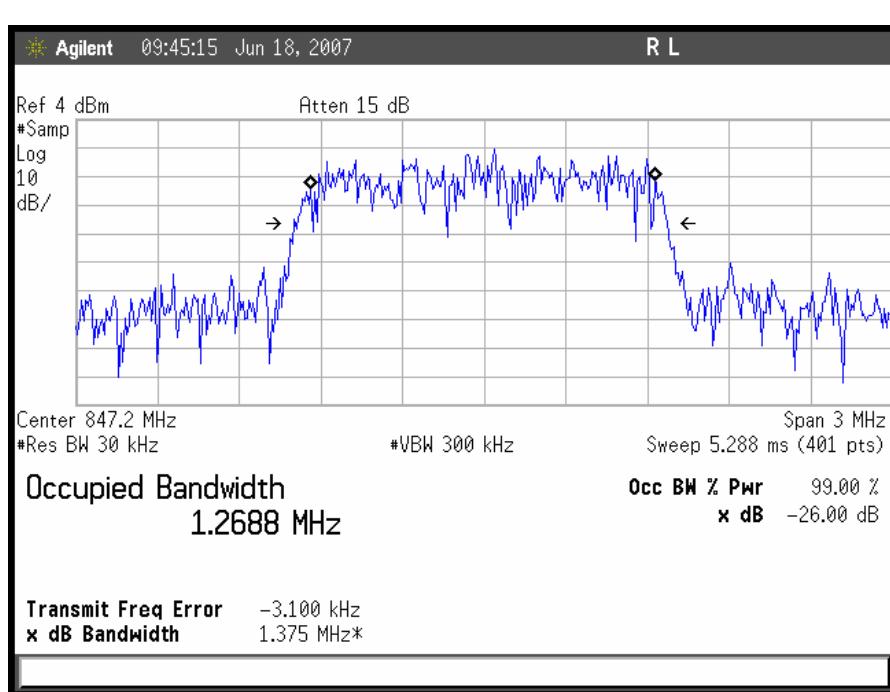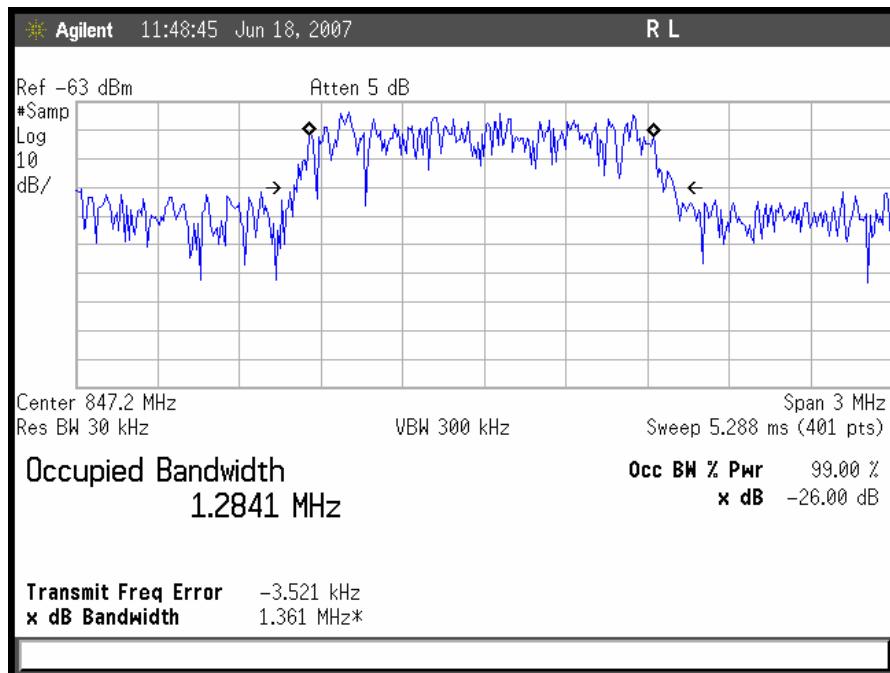


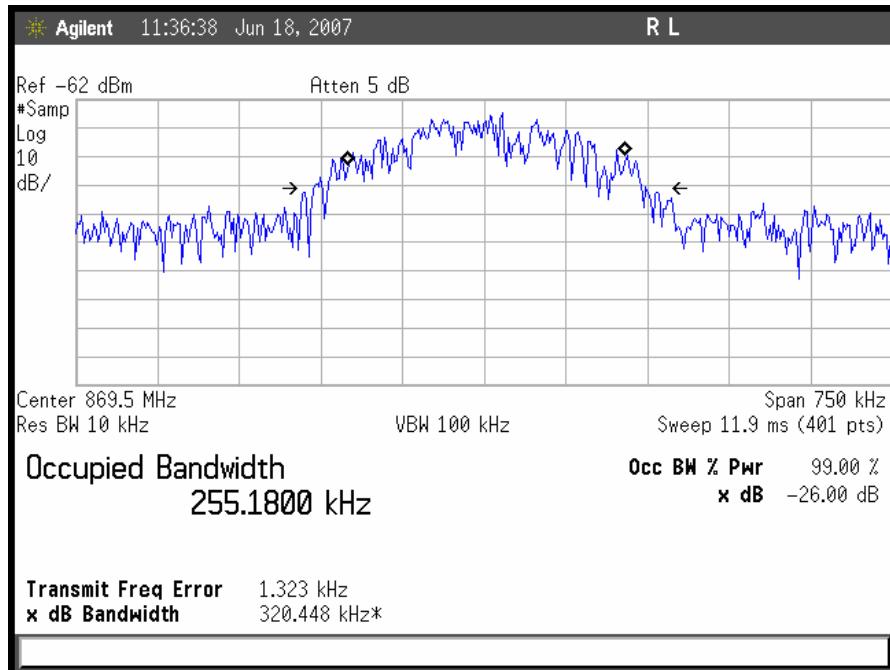


Plot 16. GSM Downlink Low Channel Input

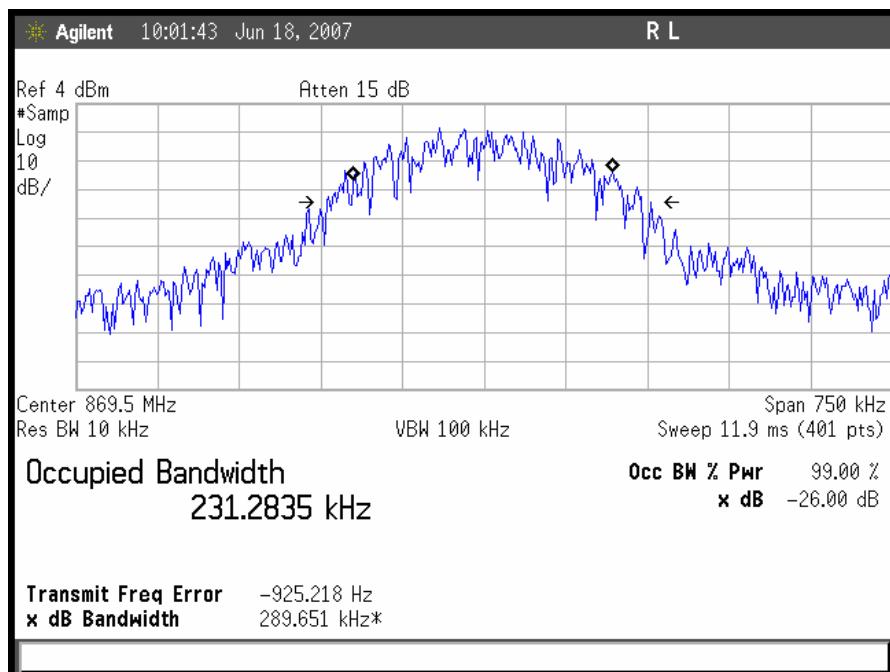


Plot 17. GSM Downlink Low Channel Output

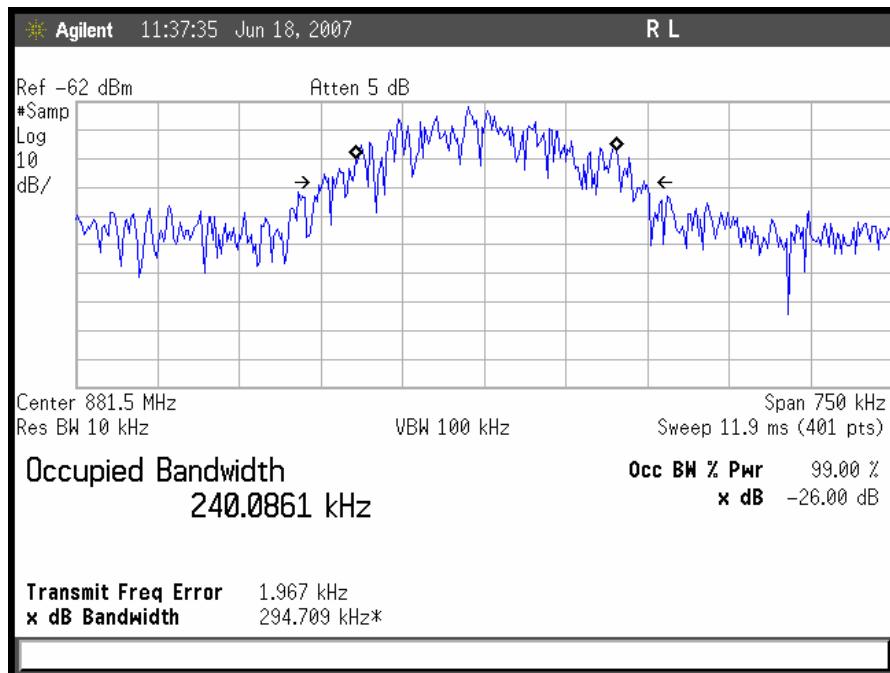


Plot 18. GSM Downlink Mid Channel Input

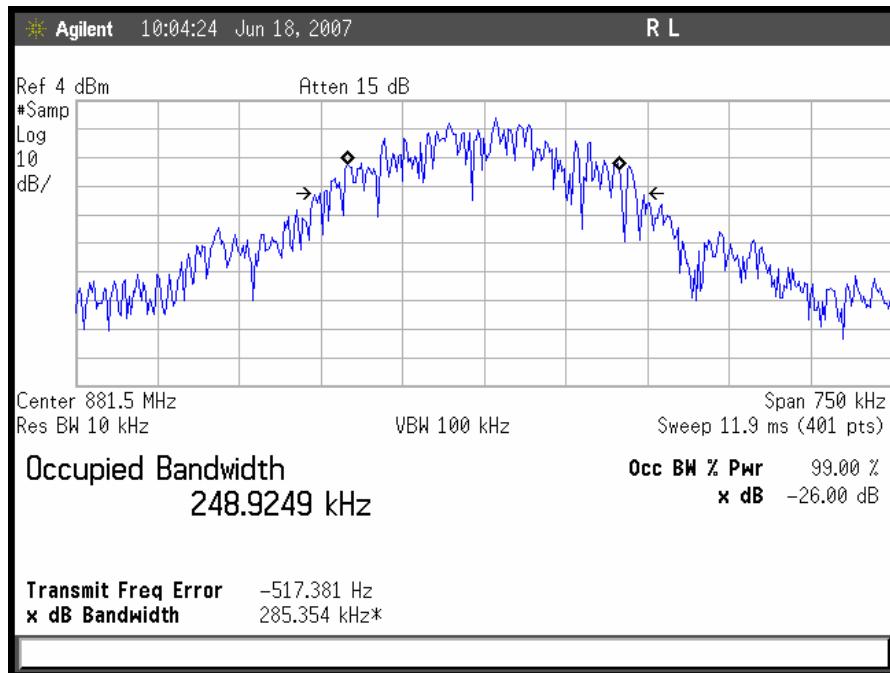


Plot 19. GSM Downlink Mid Channel Output

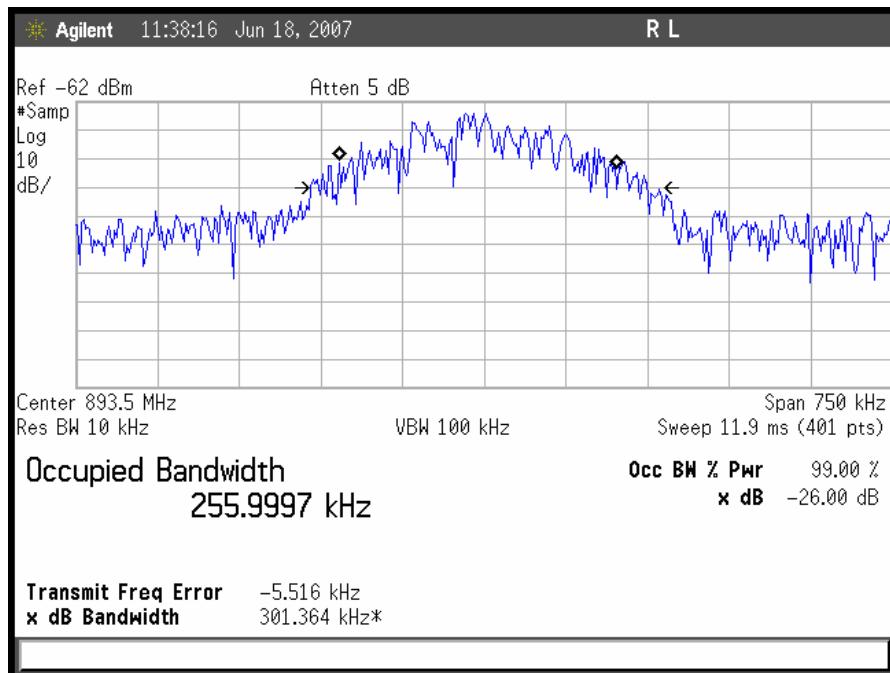


Plot 20. GSM Downlink High Channel Input

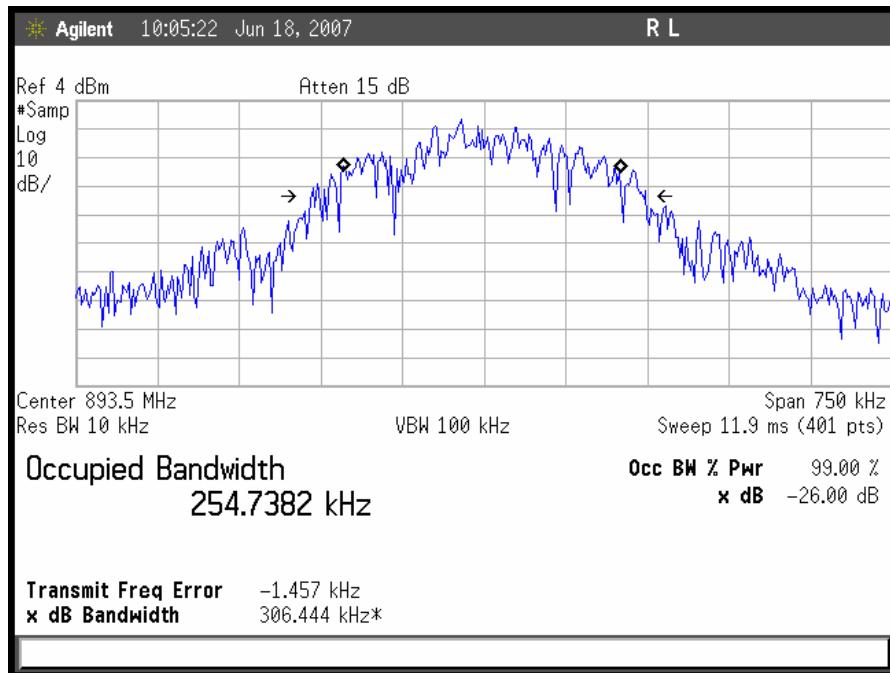


Plot 21. GSM Downlink High Channel Output

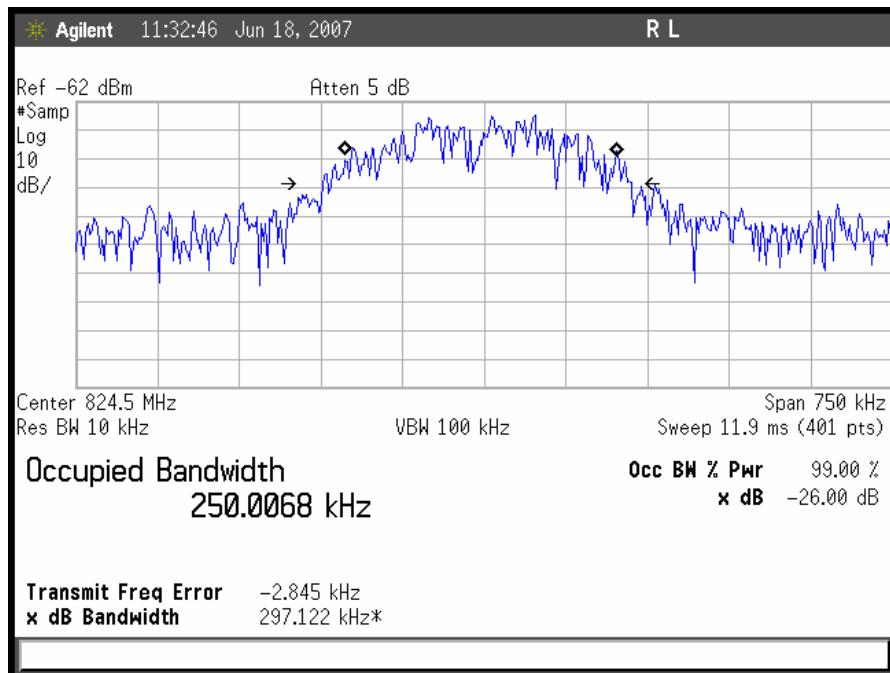


Plot 22. GSM Uplink Low Channel Input

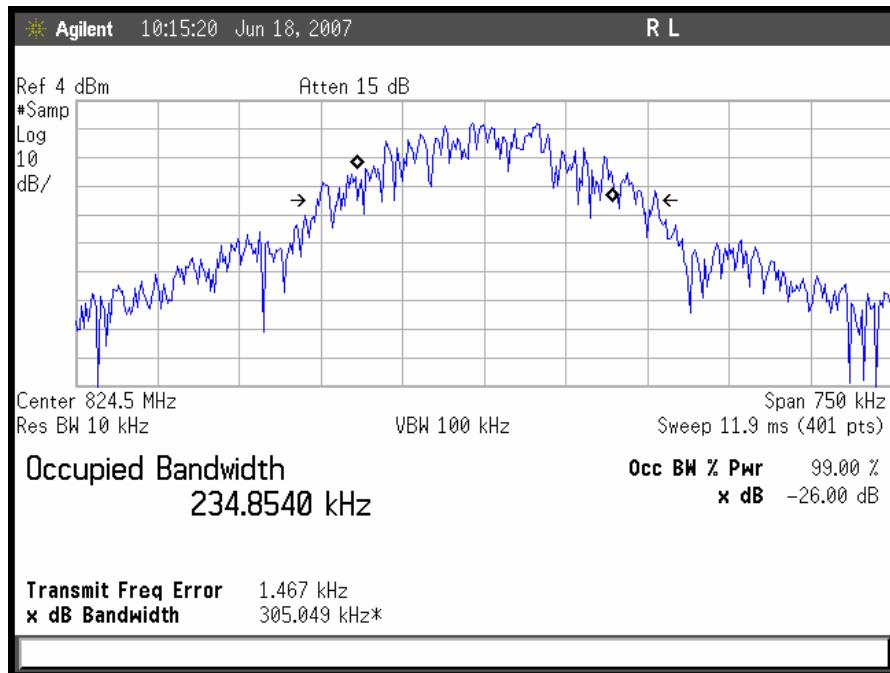


Plot 23. GSM Uplink Low Channel Output

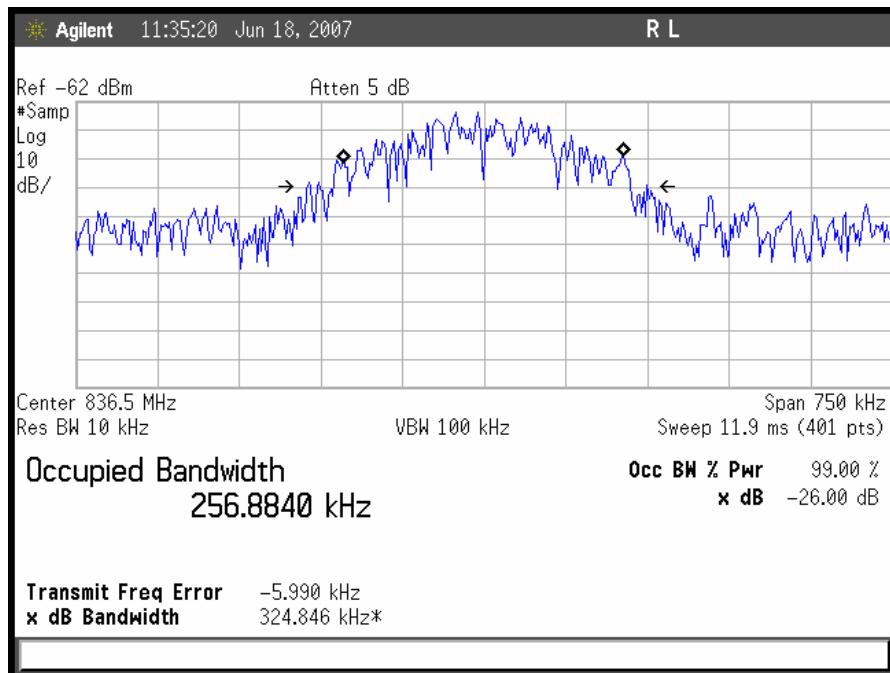


Plot 24. GSM Uplink Mid Channel Input

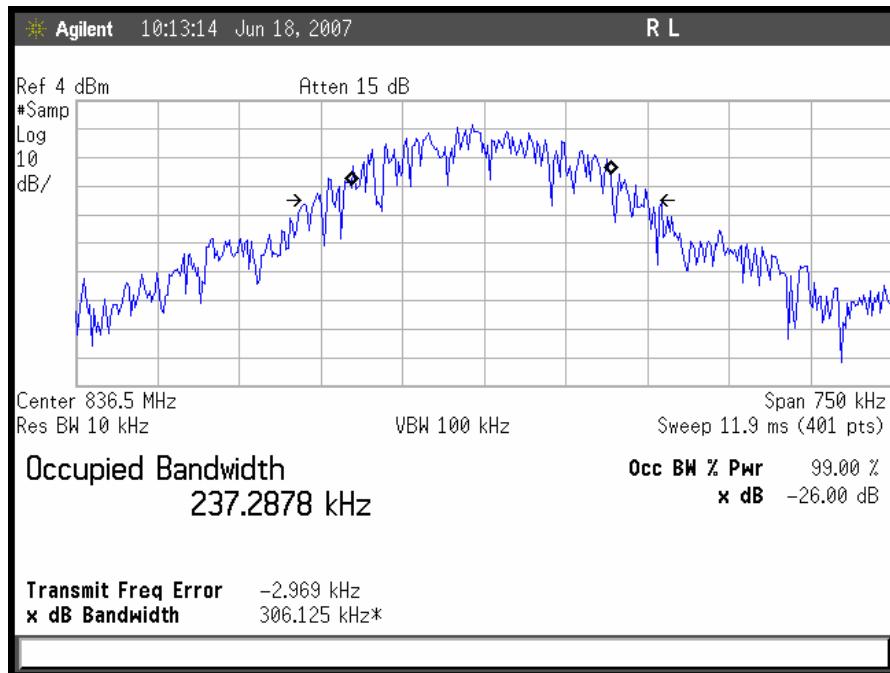


Plot 25. GSM Uplink Mid Channel Output

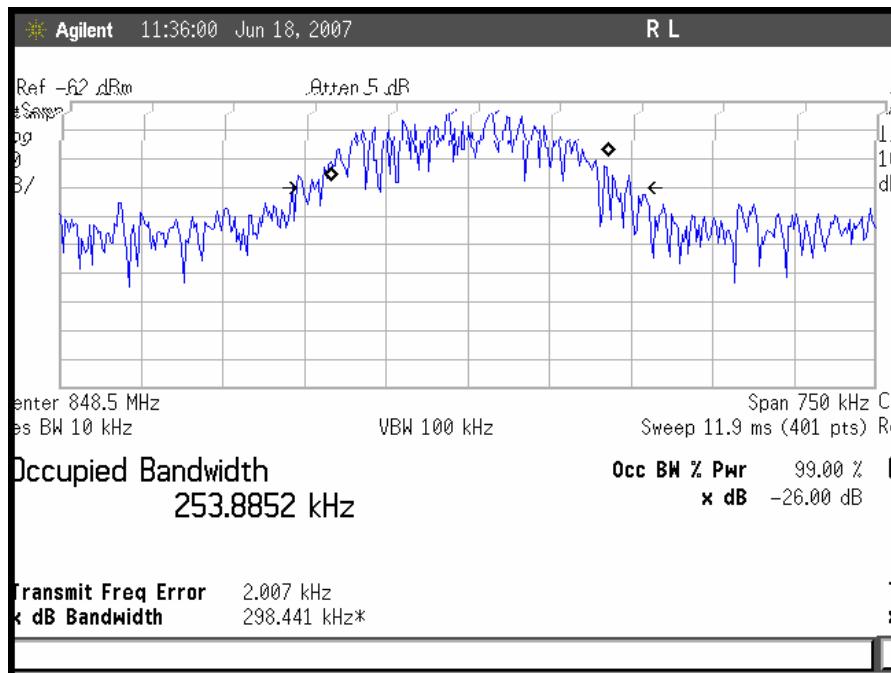


Plot 26. GSM Uplink High Channel Input

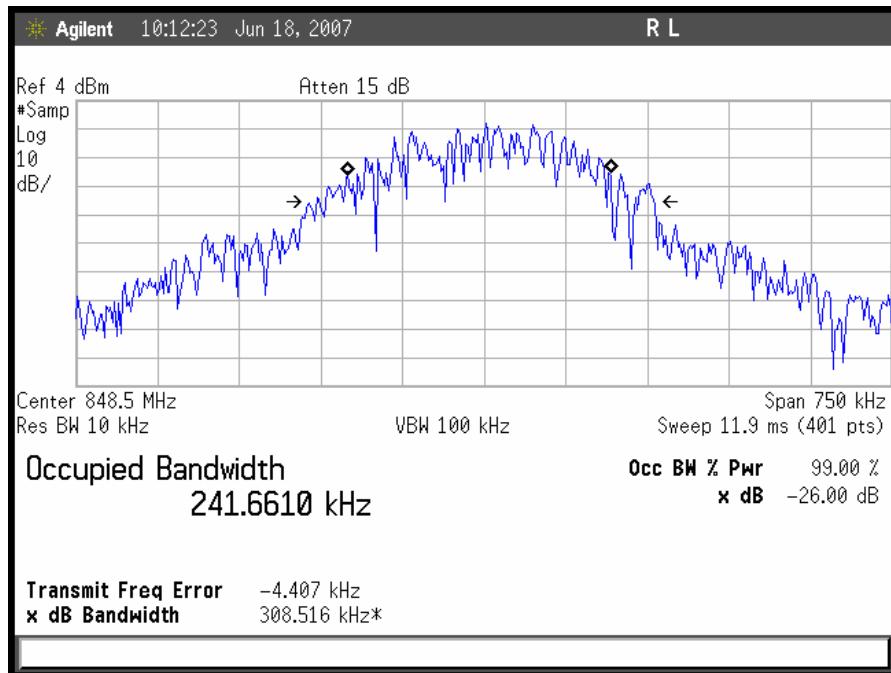


Plot 27. GSM Uplink High Channel Output

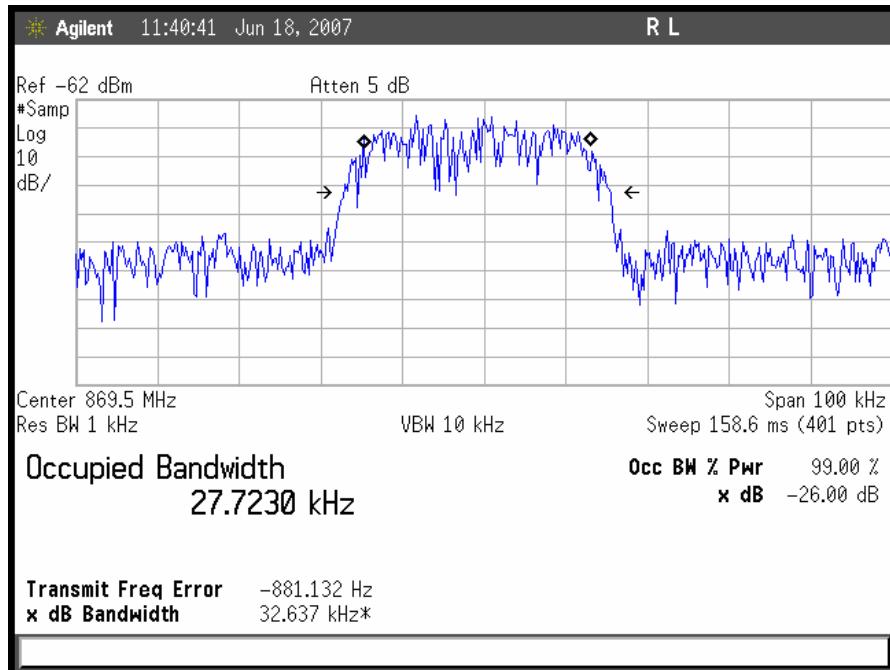


Plot 28. TDMA Downlink Low Channel Input

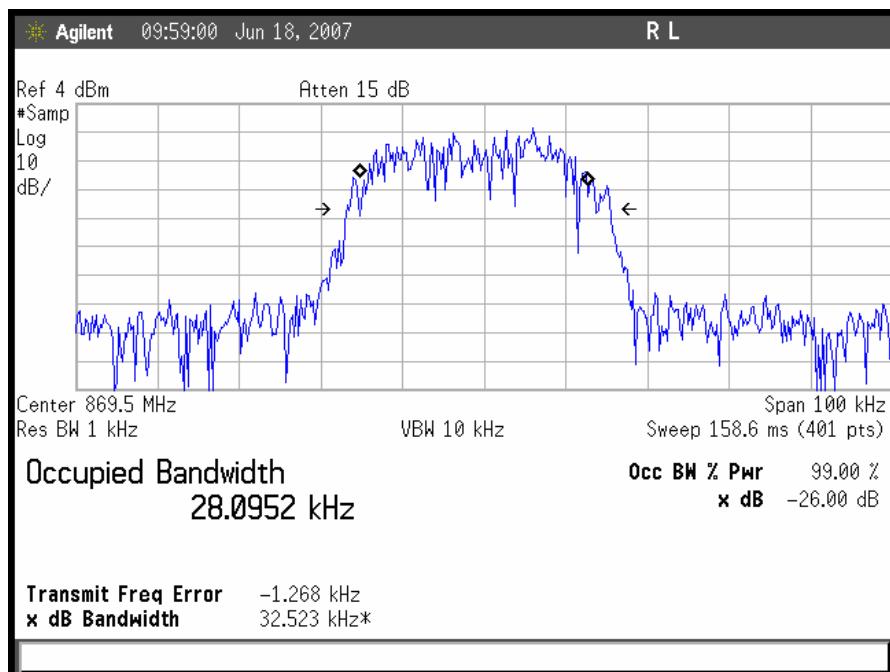


Plot 29. TDMA Downlink Low Channel Output

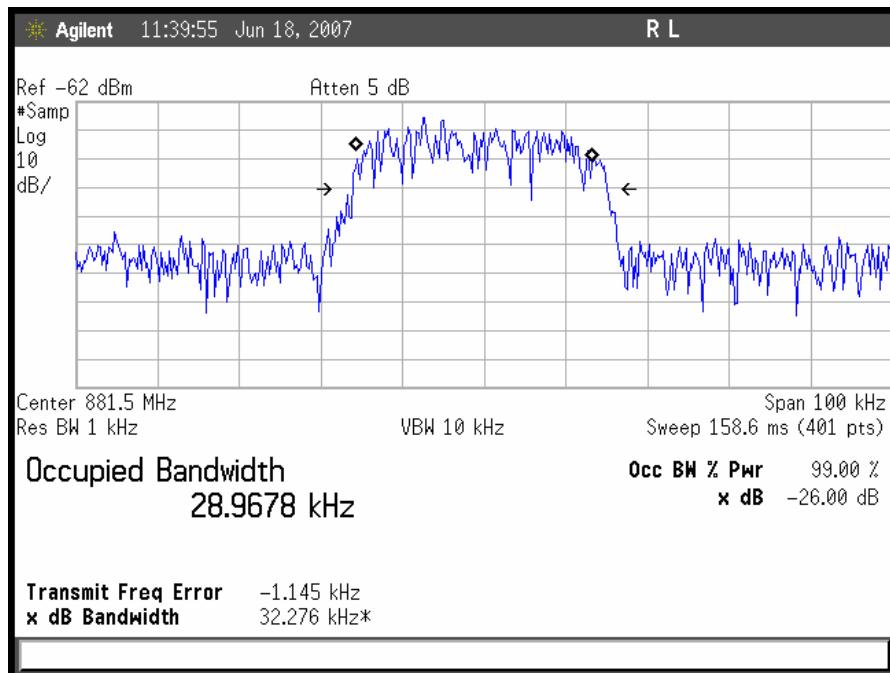


Plot 30. TDMA Downlink Mid Channel Input

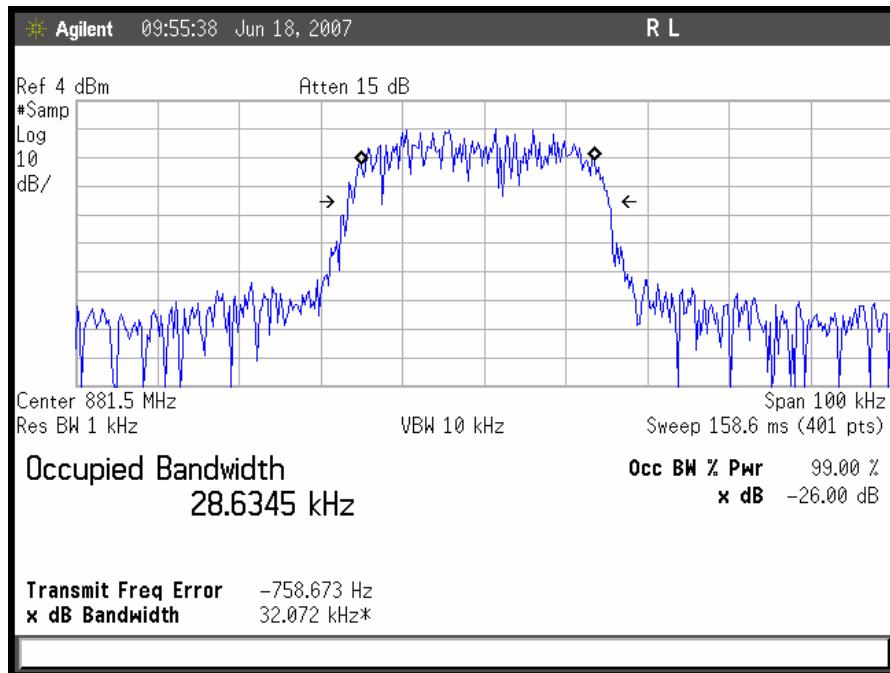


Plot 31. TDMA Downlink Mid Channel Output

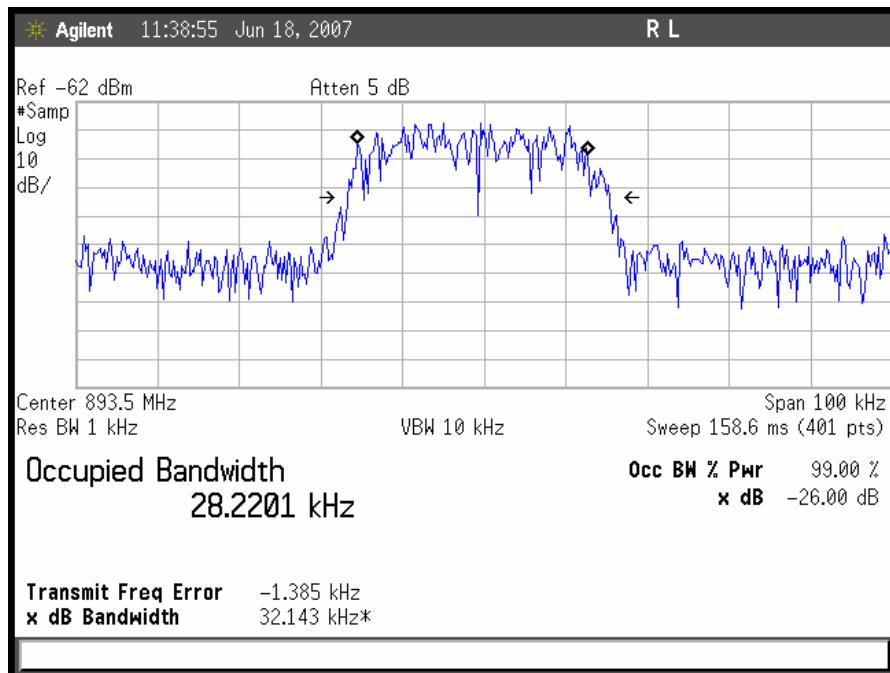


Plot 32. TDMA Downlink High Channel Input

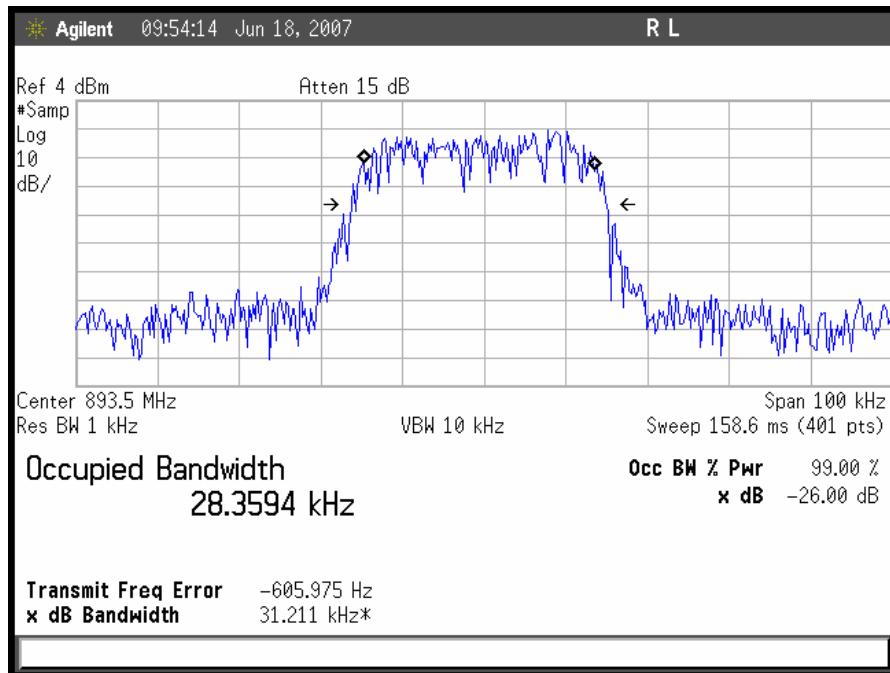


Plot 33. TDMA Downlink High Channel Output

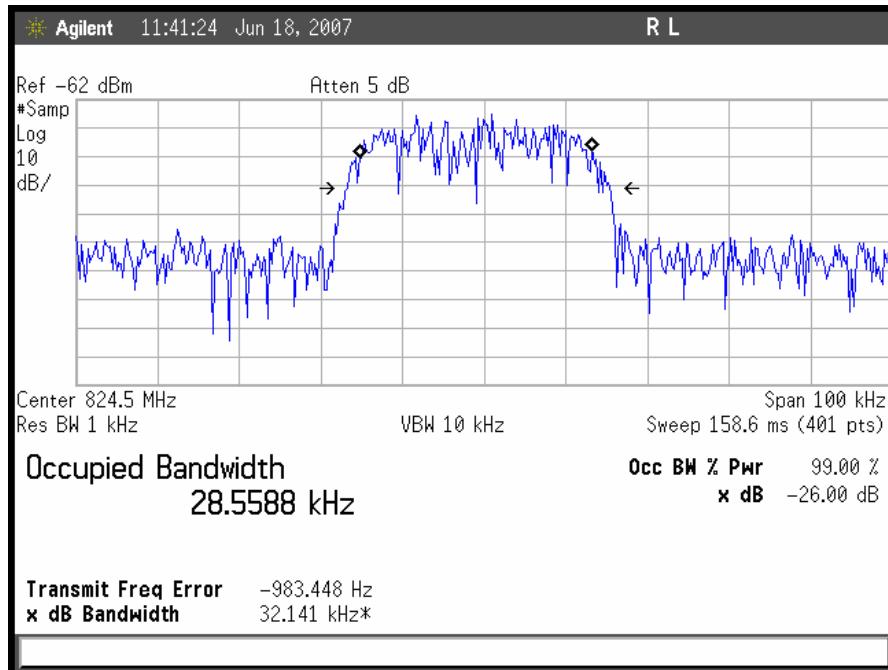


Plot 34. TDMA Uplink Low Channel Input

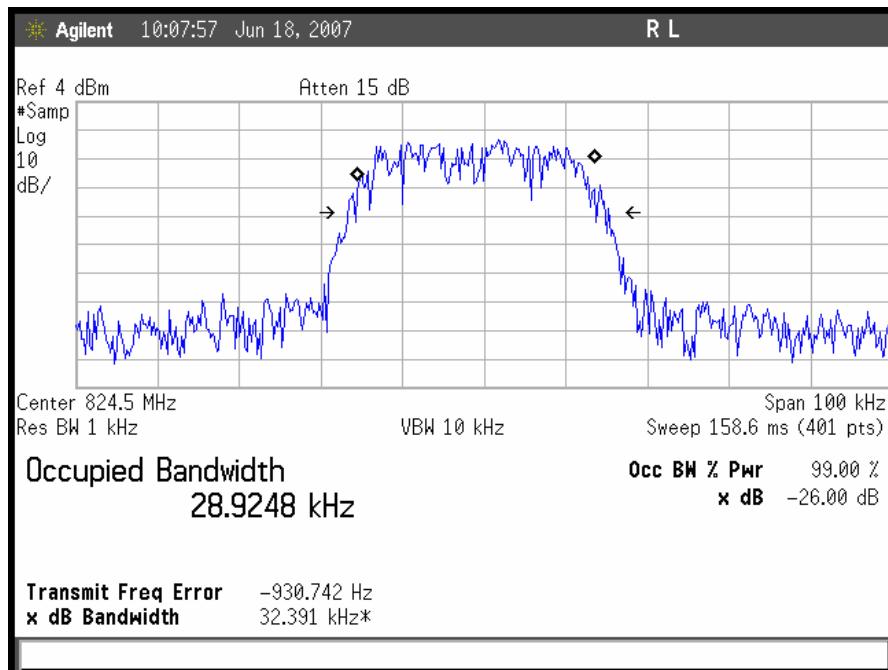


Plot 35. TDMA Uplink Low Channel Output

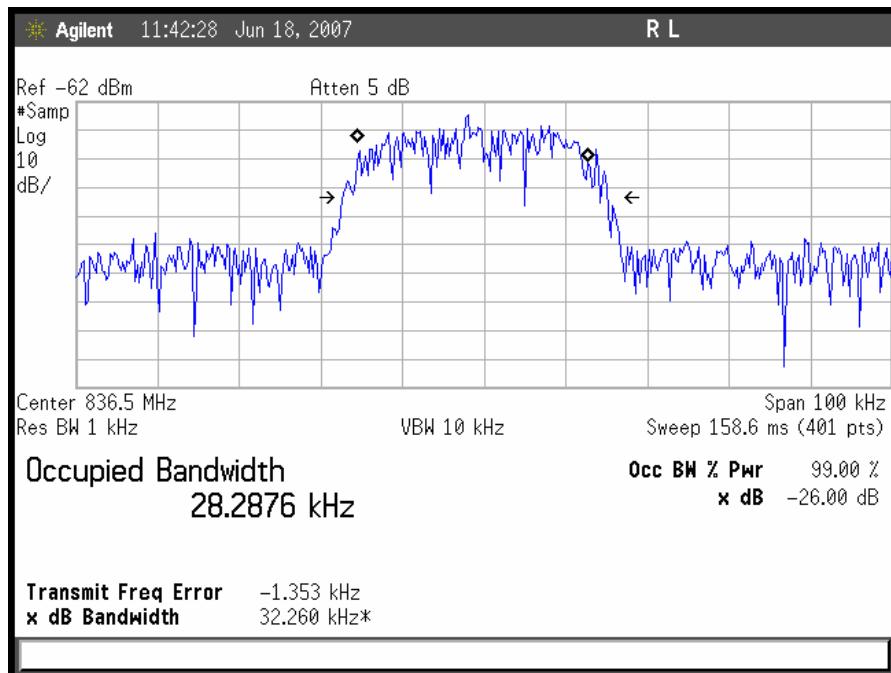


Plot 36. TDMA Uplink Mid Channel Input

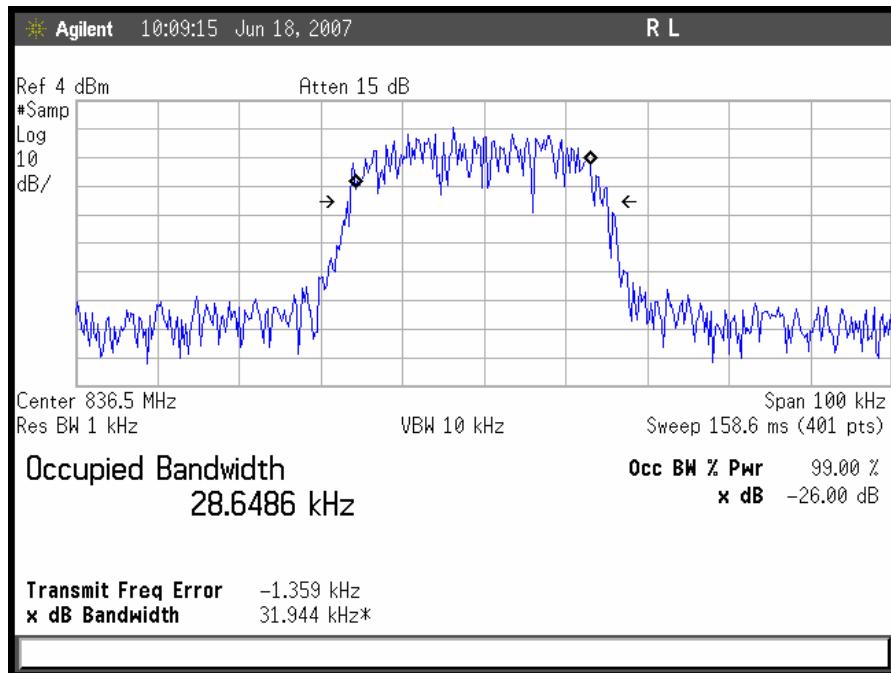

Plot 37. TDMA Uplink Mid Channel Output

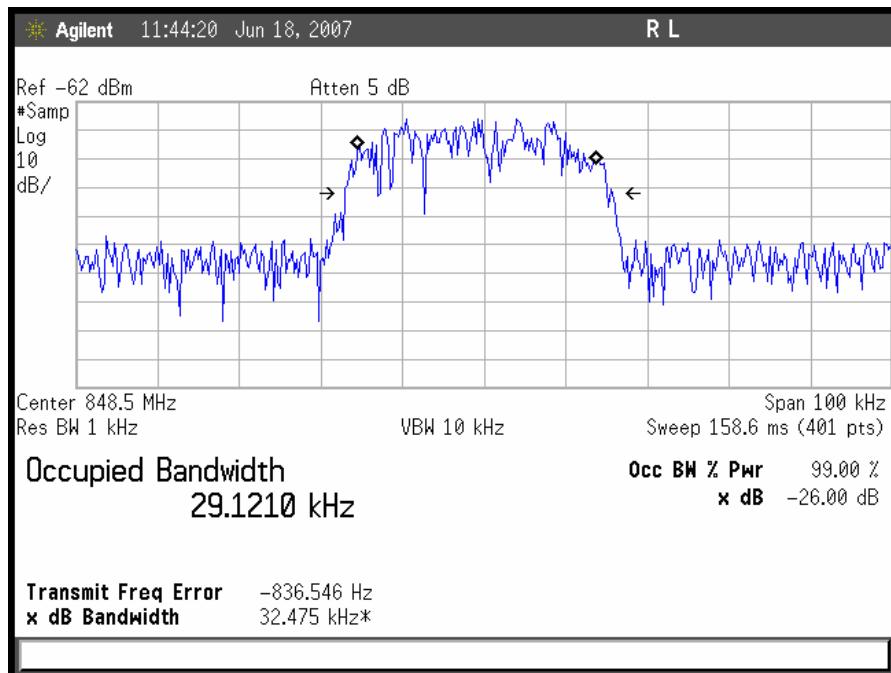

Plot 38. TDMA Uplink High Channel Input

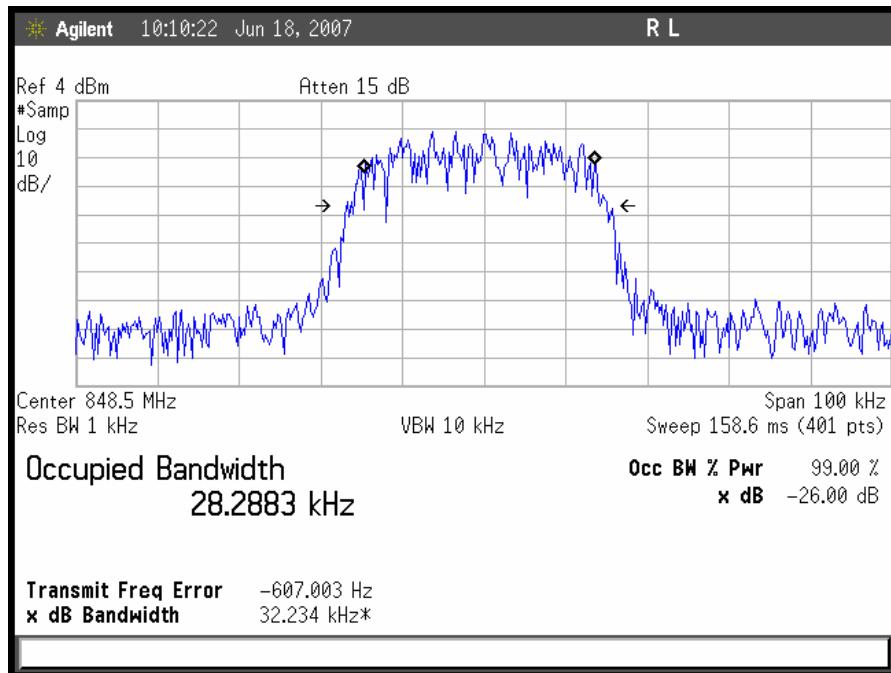

Plot 39. TDMA Uplink High Channel Output



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 2.1053 Radiated Spurious Emissions

Test Requirement(s): § 2.1053 Measurements required: Field strength of spurious radiation.

§ 2.1053 (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of § 2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.

§ 2.1053 (b): The measurements specified in paragraph (a) of this section shall be made for the following equipment:

- (1) Those in which the spurious emissions are required to be 60 dB or more below the mean power of the transmitter.
- (2) All equipment operating on frequencies higher than 25 MHz.
- (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
- (4) Other types of equipment as required, when deemed necessary by the Commission.

§ 22.917 Emission limitations Cellular equipment: The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

§ 22.917 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$.



Test Procedures: As required by 47 CFR 2.1053, *field strength of radiated spurious measurements* were made in accordance with the procedures of TIA/EIA-603-A-2001 "Land Mobile FM or PM Communications Equipment Measurement and Performance Standards".


Radiated emission measurements were performed inside a 10 meter semi-anechoic chamber. The EUT was set at a distance of 3m from the receiving antenna. The EUT's RF ports were terminated to 50ohm load. The EUT was set to transmit at the low, mid and high channels of the transmitter frequency range at its maximum power level. The EUT was rotated about 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission. A calibrated antenna source was positioned in place of the EUT and the previously recorded signal was duplicated. The maximum EIRP of the emission was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. Harmonic emissions up to the 10th or 40GHz, whichever was the lesser, were investigated.

Test Results: The EUT complies with the requirements of this section. Note: All spurious emissions were measured were at the noise floor of the spectrum analyzer

Test Engineer: Shawn McMillen

Test Date(s): June 18, 2007

Electromagnetic Compatibility Criteria for Intentional Radiators

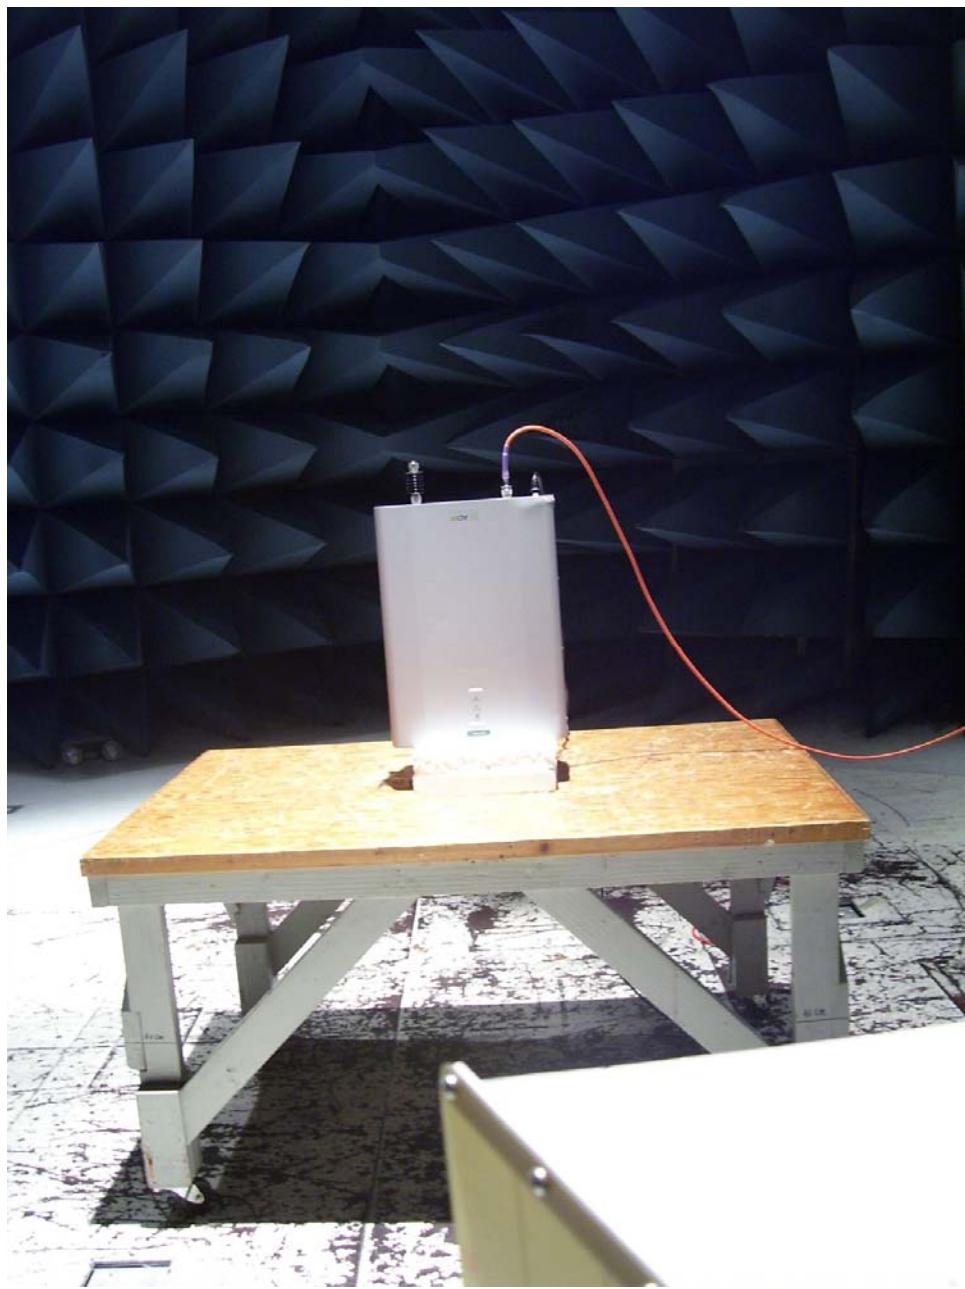

Photograph 3. Test Equipment and setup for various Radiated Measurements



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 2.1051 Spurious Emissions at Antenna Terminals

Test Requirement(s):

§ 2.1051 Measurements required: Spurious emissions at antenna terminals: The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

§ 22.917 Emission limitations for Broadband PCS equipment: The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

§ 22.917 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Test Procedures:

A modulated carrier generated by the signal generator carrier was connected to either the Uplink or Downlink RF port at a maximum level as determined by the OEM. A spectrum analyzer was connected to either the Uplink or Downlink port depending on the circuitry being measured. The spectrum analyzer was set to 1MHz RBW and 3MHz VBW. The spectrum was investigated from 30MHz to the 10th harmonic of the carrier.

The inter-modulation requirements were performed in a similar manner as described above. The spectrum analyzer was set to 100KHz RBW and 300KHz VBW. Two modulated carriers were injected into the EUT. One carrier was set at the band edge of either the Uplink or Downlink band and the other at carrier set at 6MHz deviation from the first carrier. The in band spurious emissions were investigated.

Test Results:

The EUT complies with the requirements of this section. There were no detectable spurious emissions for this EUT.


Test Engineer(s):

Shawn McMillen


Test Date(s):

June 18, 2007


Conducted Spurious Emissions – CDMA (Downlink)

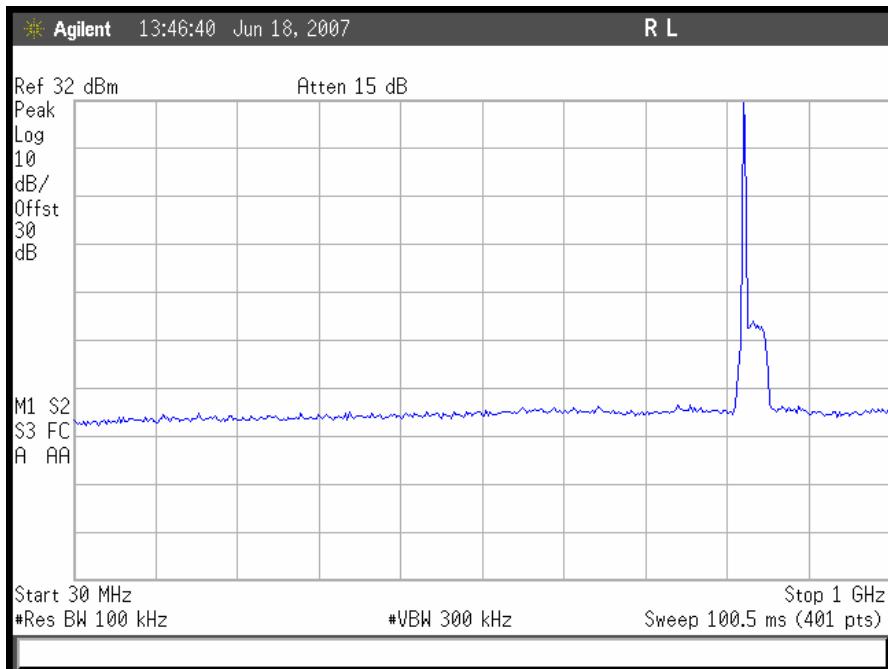


Plot 40. CDMA Downlink Conducted Emissions 30 MHz – 1GHz, Low Channel

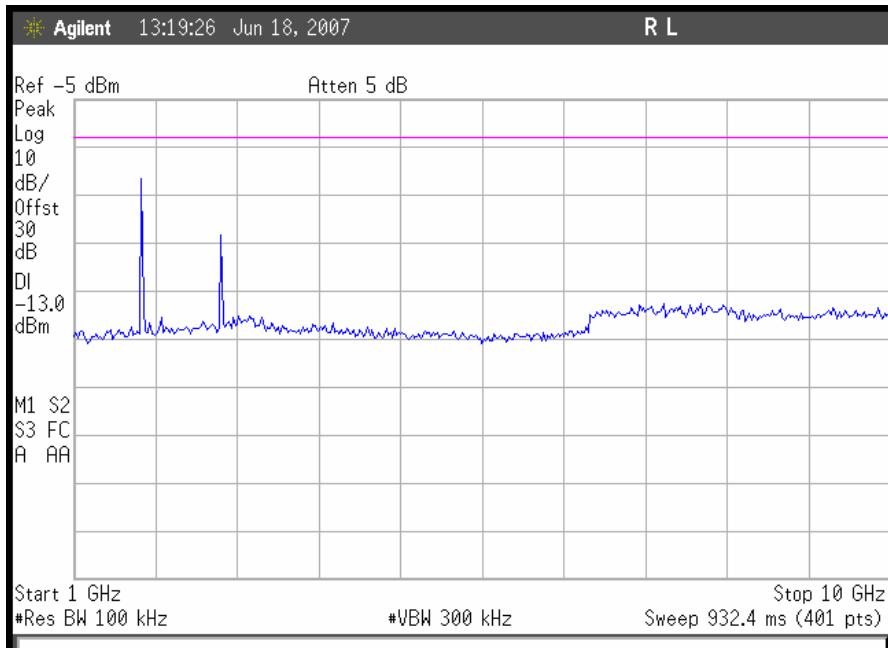


Plot 41. CDMA Downlink Conducted Emissions 1 GHz – 10GHz, Low Channel

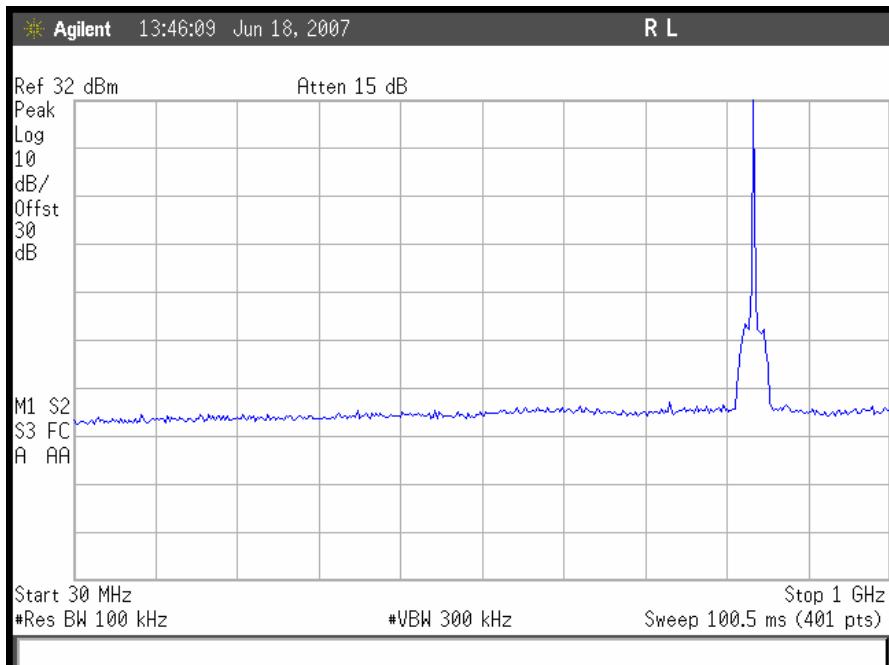


Plot 42. CDMA Downlink Conducted Emissions 30 MHz – 1GHz, Mid Channel

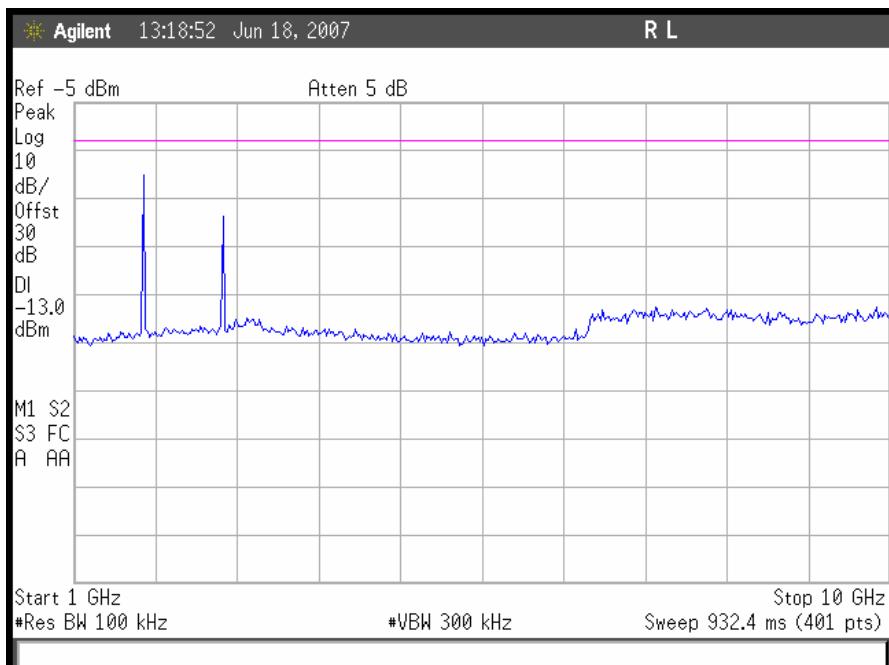

Plot 43. CDMA Downlink Conducted Emissions 1 GHz – 10GHz, Mid Channel

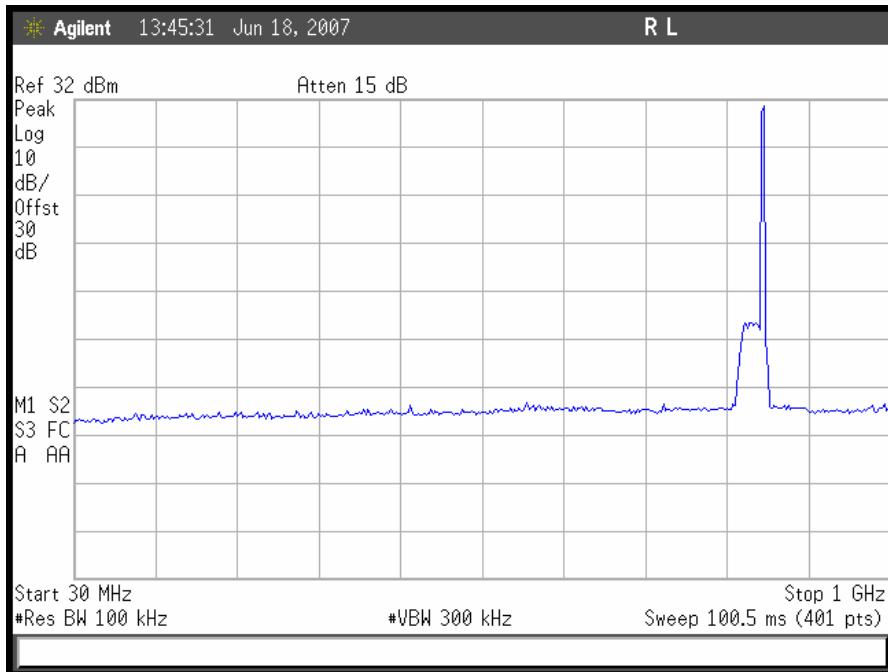


Plot 44. CDMA Downlink Conducted Emissions 30 MHz – 1GHz, High Channel

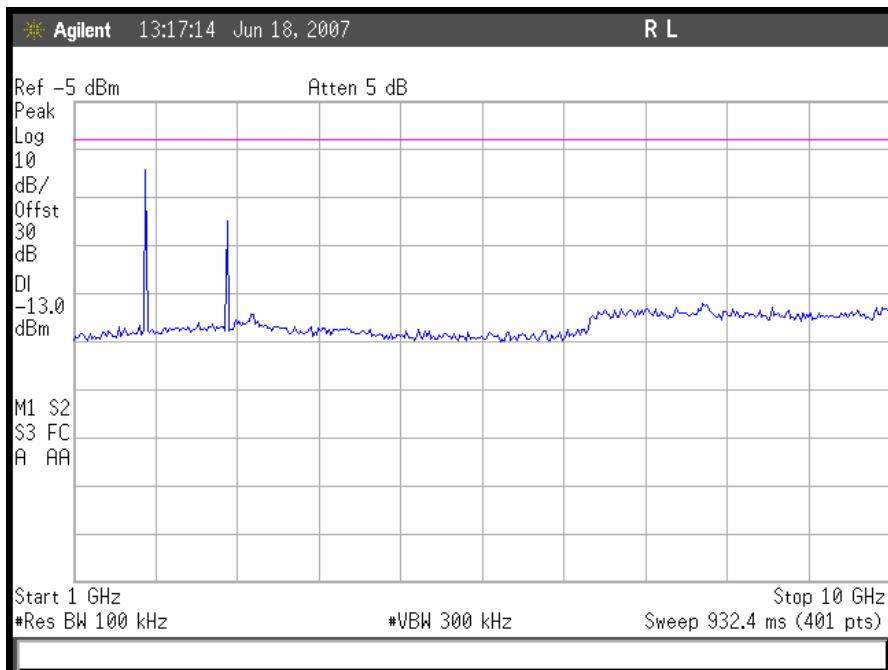


Plot 45. CDMA Downlink Conducted Emissions 1 GHz – 10GHz, High Channel

Intermodulation – CDMA

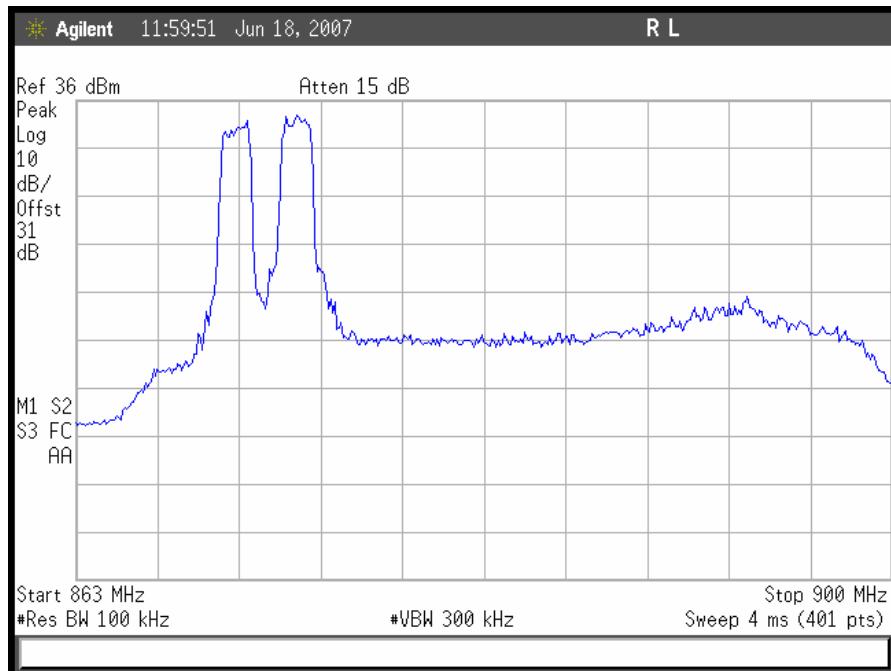


Plot 46. CDMA Intermodulation Low End, Downlink

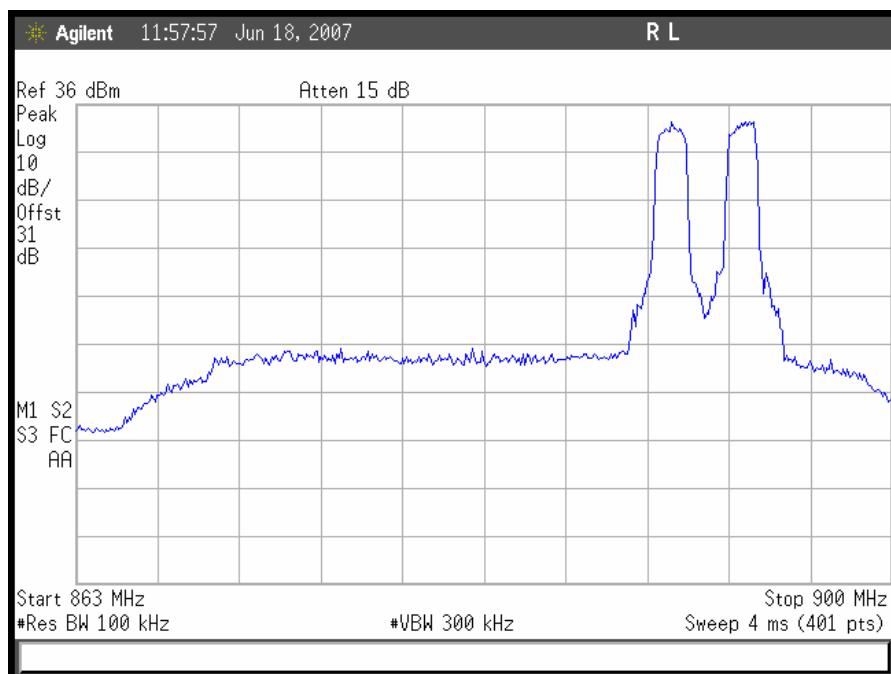


Plot 47. CDMA Intermodulation High End, Downlink


Conducted Spurious Emissions – CDMA (Uplink)

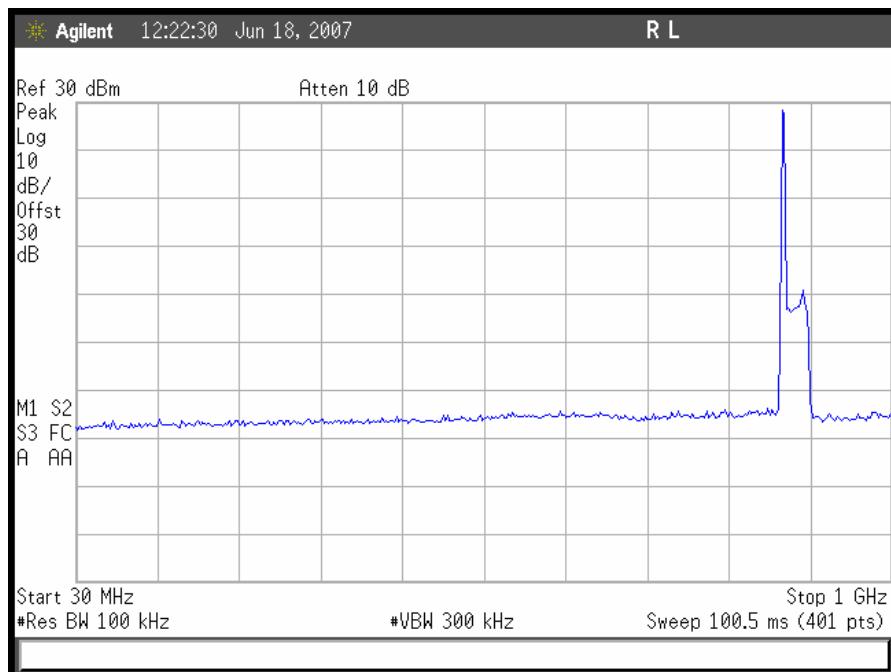


Plot 48. CDMA Uplink Conducted Emissions 30 MHz – 1GHz, Low Channel

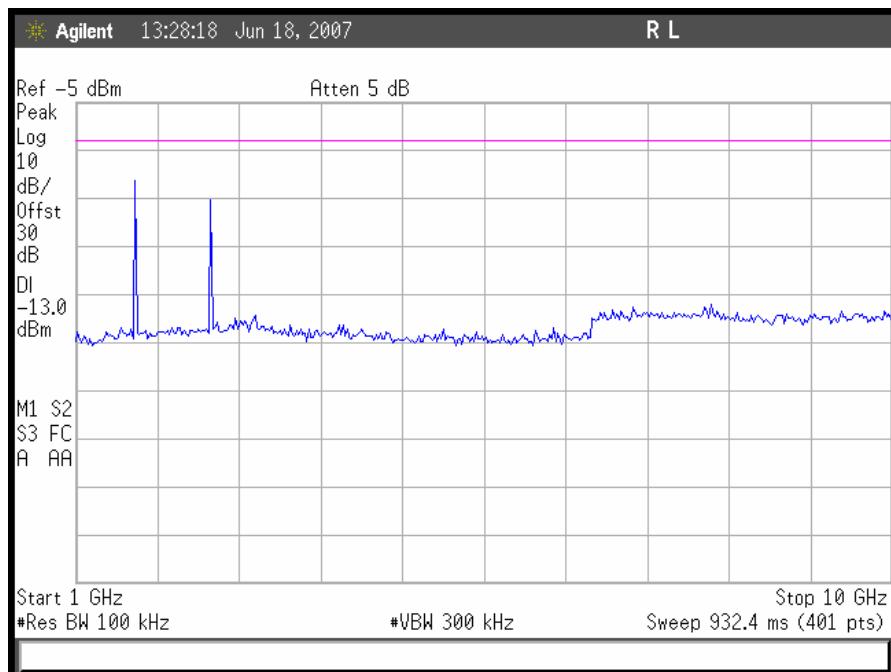


Plot 49. CDMA Uplink Conducted Emissions 1 GHz – 10GHz, Low Channel

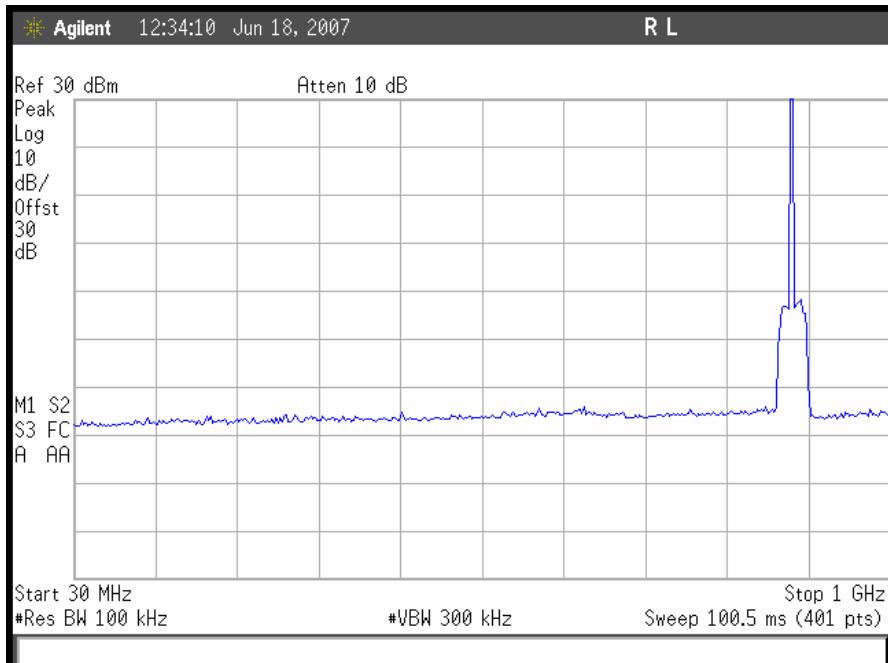


Plot 50. CDMA Uplink Conducted Emissions 30 MHz – 1GHz, Mid Channel

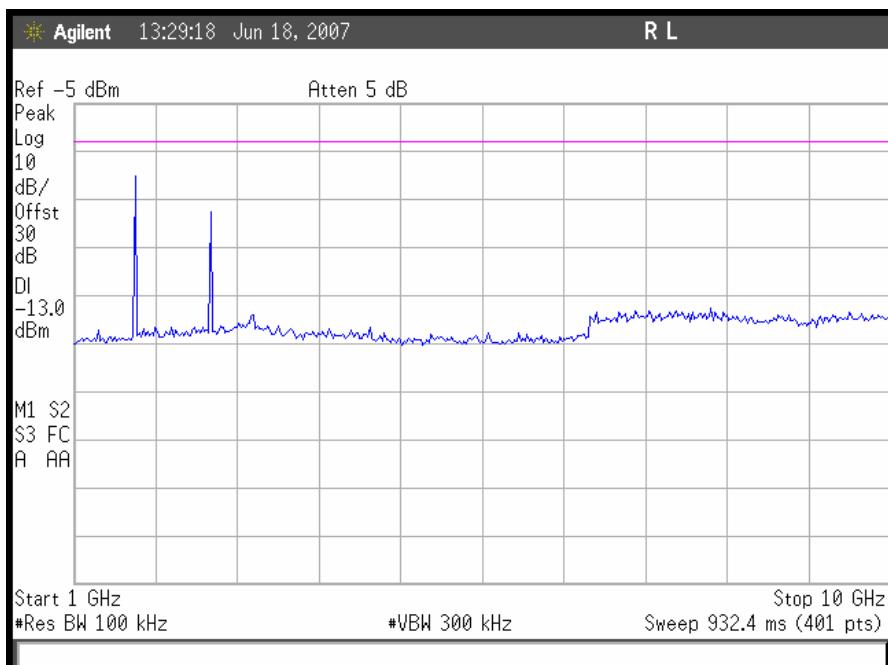

Plot 51. CDMA Uplink Conducted Emissions 1 GHz – 10GHz, Mid Channel

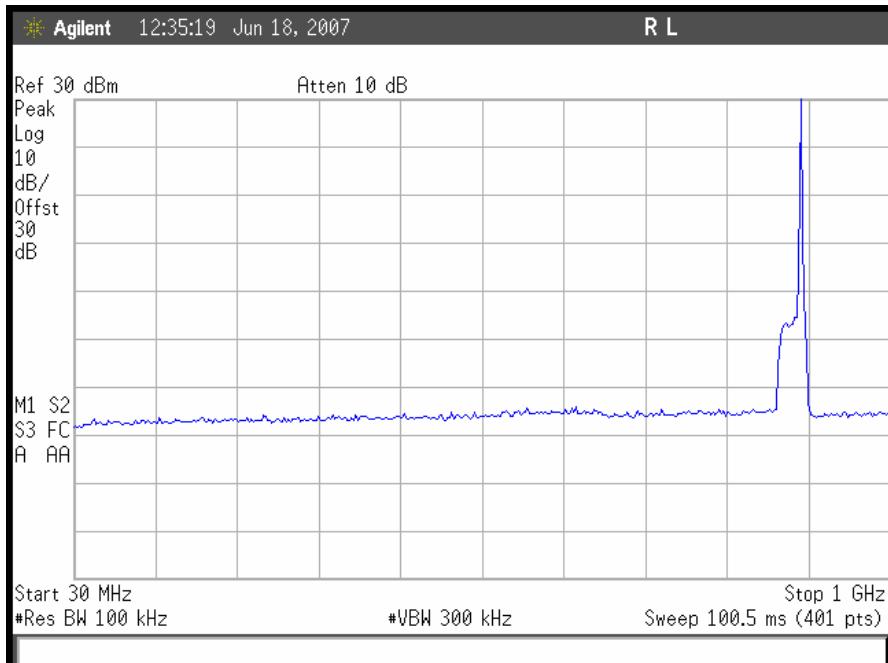


Plot 52. CDMA Uplink Conducted Emissions 30 MHz – 1GHz, High Channel

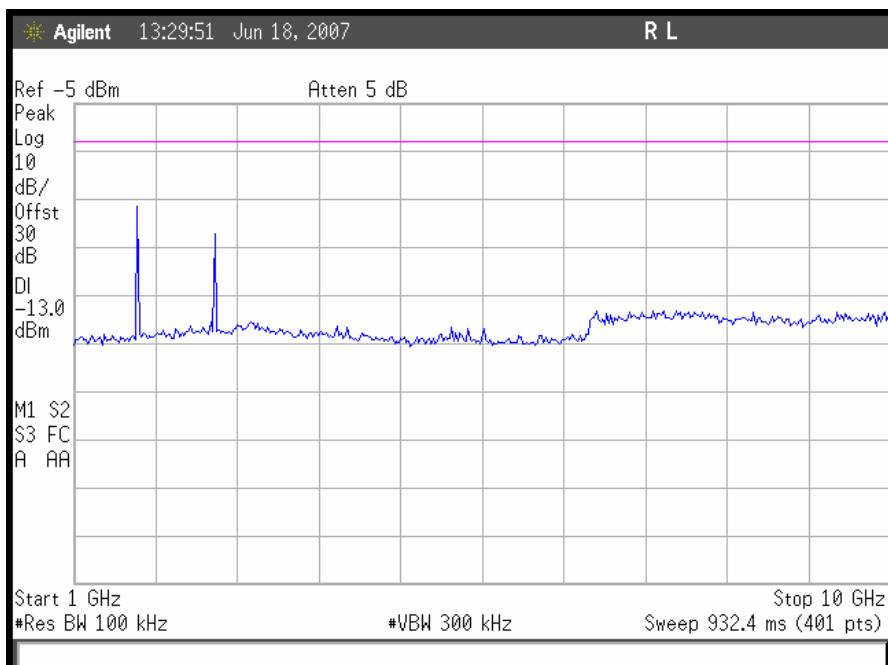


Plot 53. CDMA Uplink Conducted Emissions 1 GHz – 10GHz, High Channel

Intermodulation – CDMA

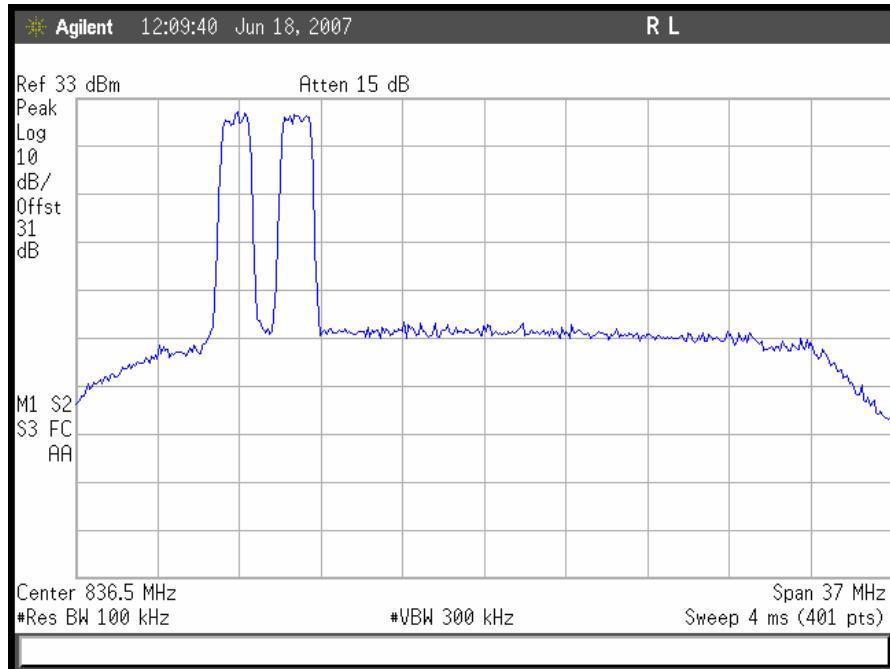


Plot 54. CDMA Intermodulation Low End, Uplink

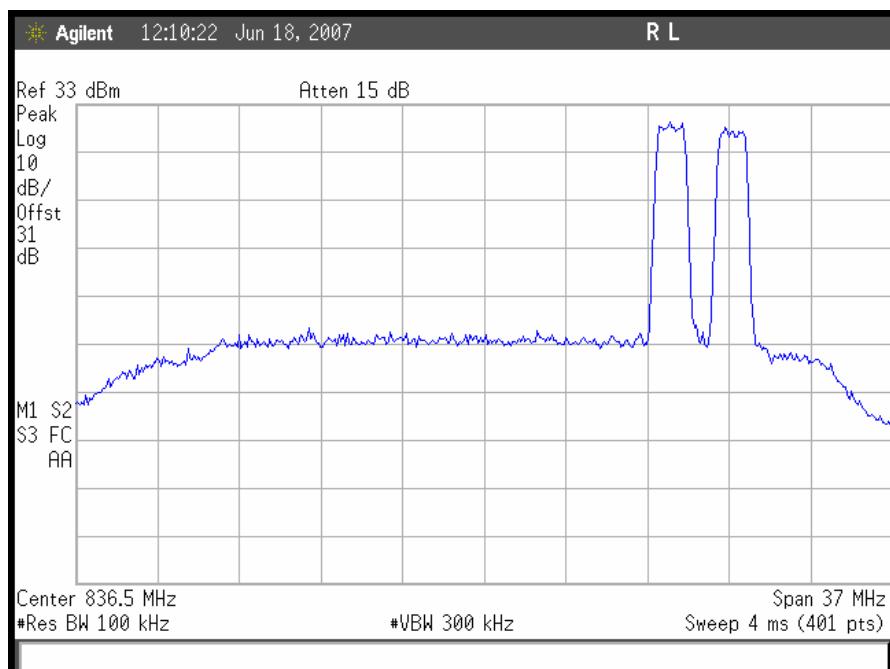


Plot 55. CDMA Intermodulation High End, Uplink


Conducted Spurious Emissions – GSM (Downlink)

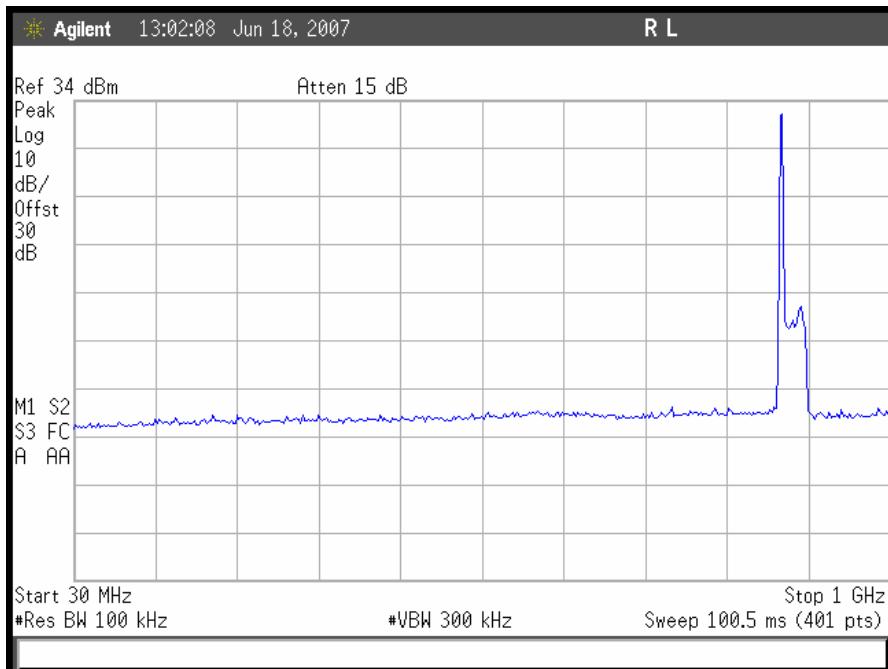


Plot 56. GSM Downlink Conducted Emissions 30 MHz – 1GHz, Low Channel

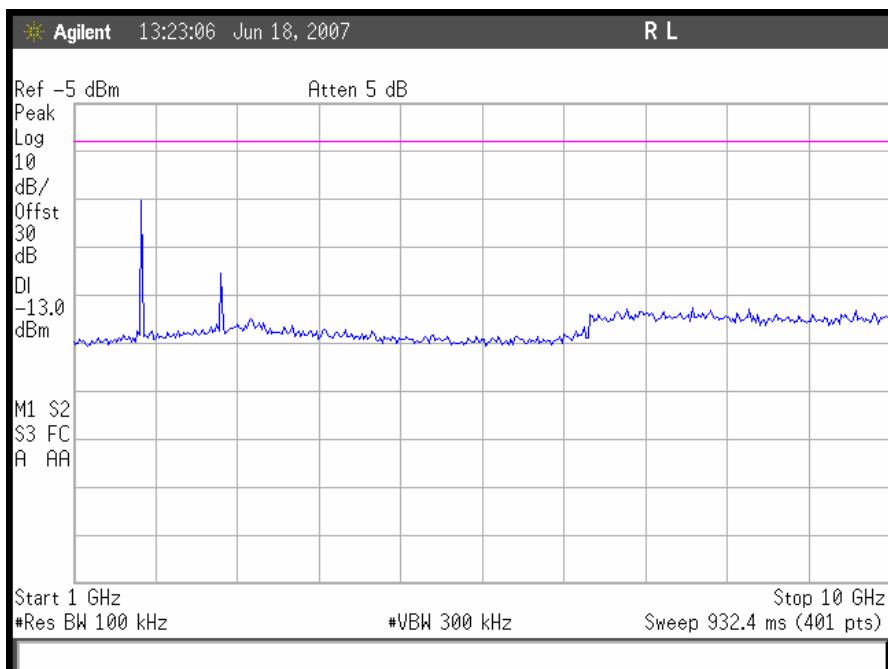


Plot 57. GSM Downlink Conducted Emissions 1 GHz – 10GHz, Low Channel

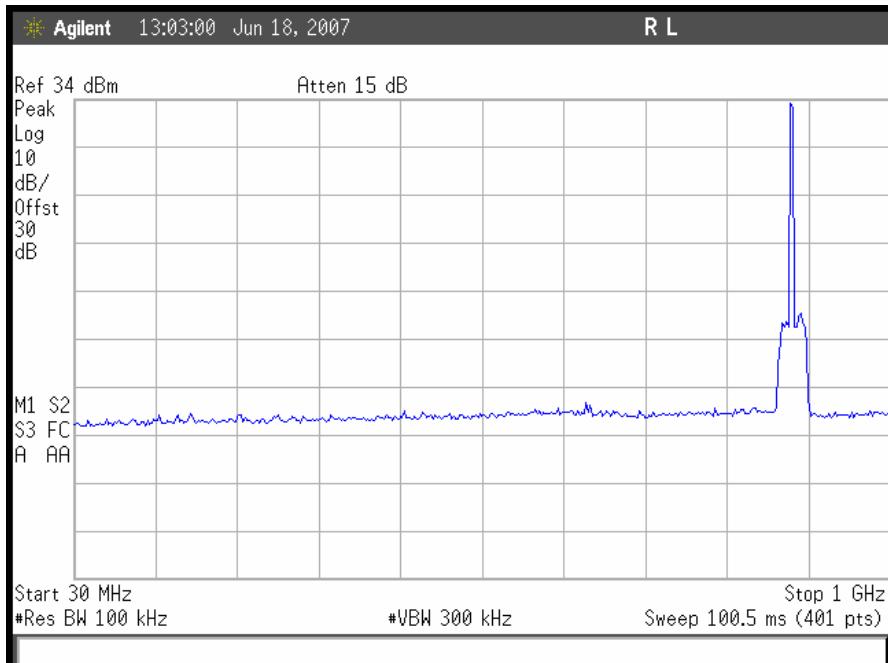


Plot 58. GSM Downlink Conducted Emissions 30 MHz – 1GHz, Mid Channel

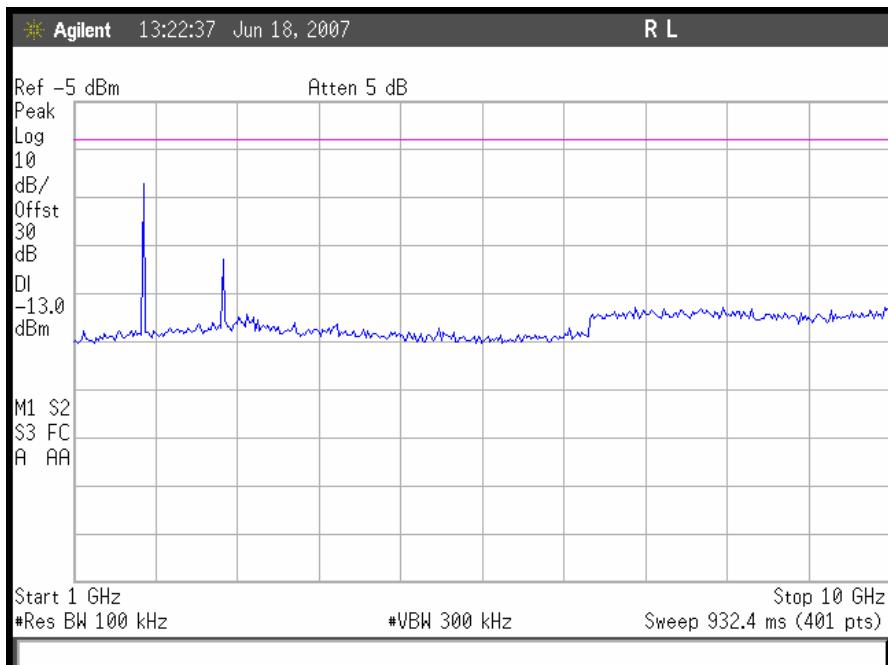

Plot 59. GSM Downlink Conducted Emissions 1 GHz – 10GHz, Mid Channel

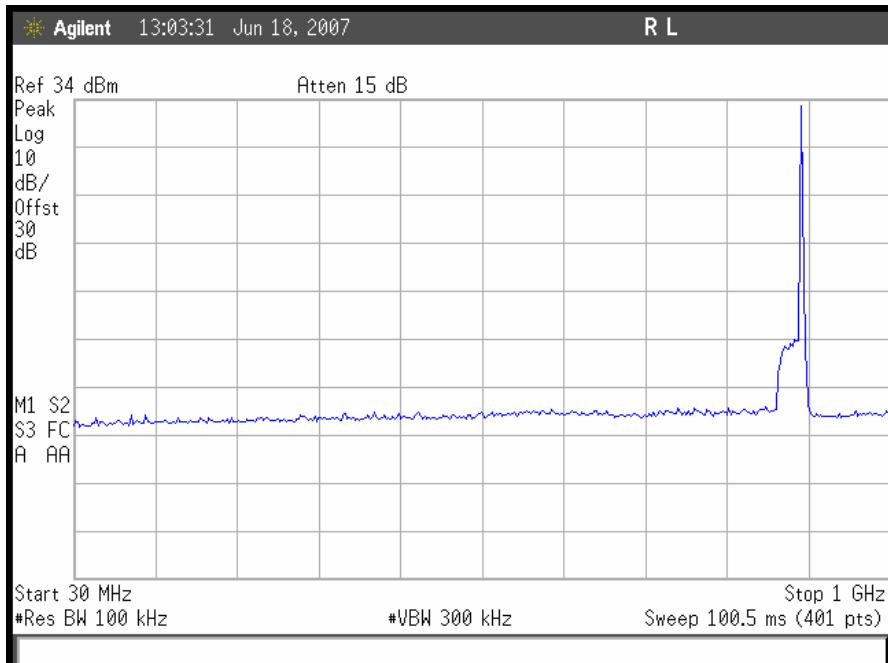


Plot 60. GSM Downlink Conducted Emissions 30 MHz – 1GHz, High Channel

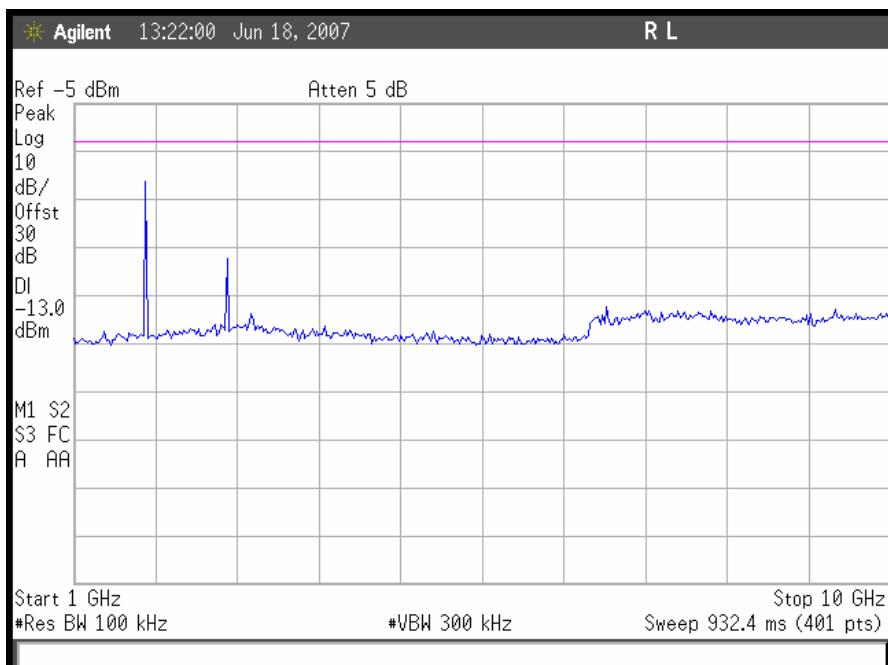


Plot 61. GSM Downlink Conducted Emissions 1 GHz – 10GHz, High Channel

Intermodulation – GSM

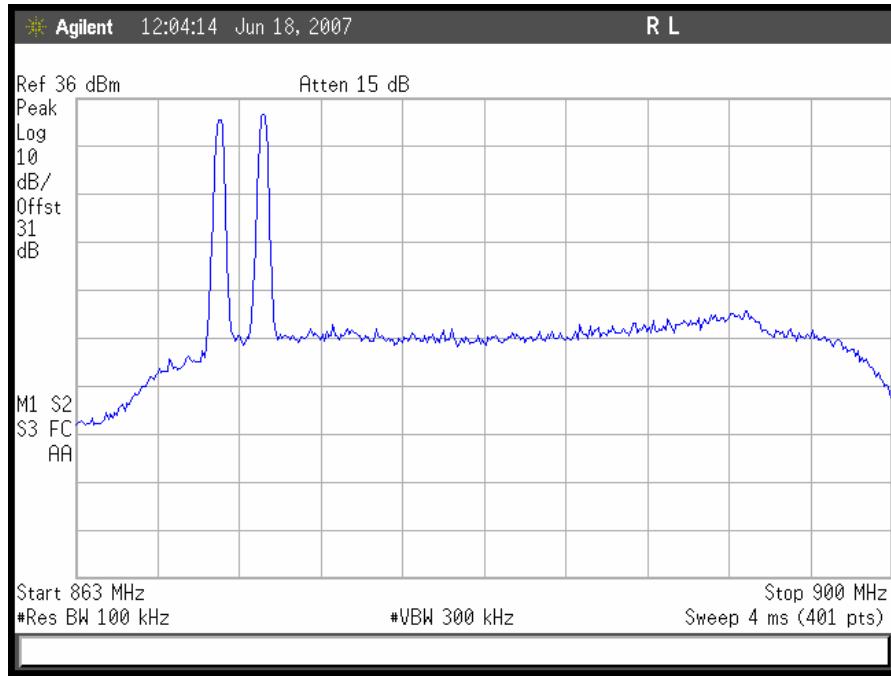


Plot 62. GSM Intermodulation Low End, Downlink

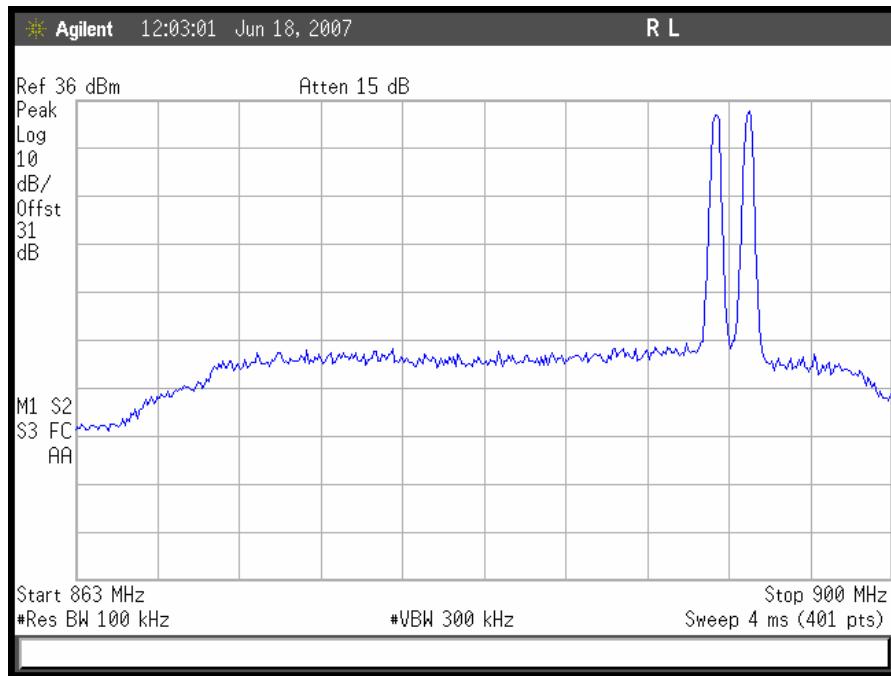


Plot 63. GSM Intermodulation High End, Downlink


Conducted Spurious Emissions – GSM (Uplink)

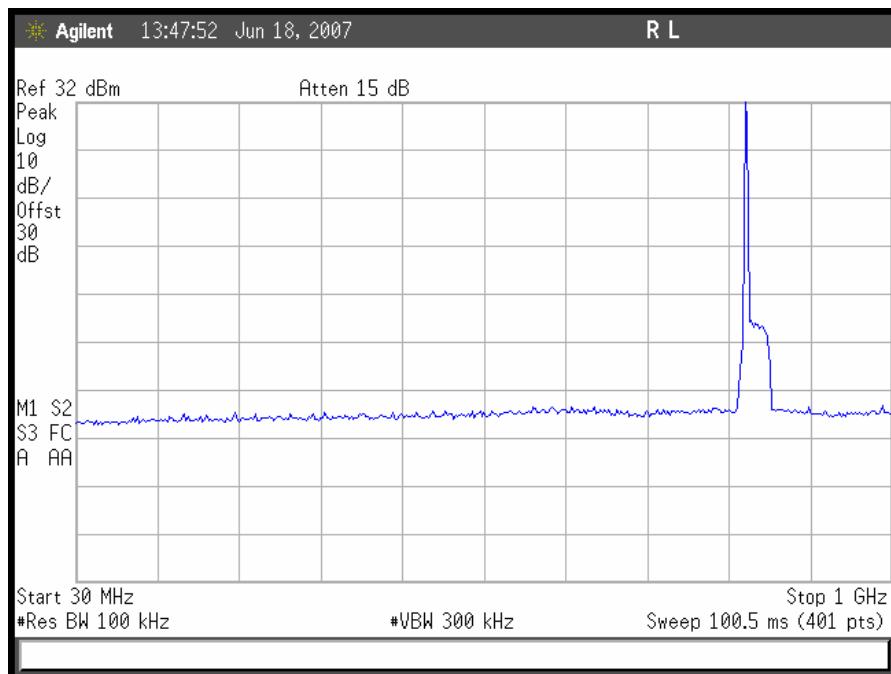


Plot 64. GSM Uplink Conducted Emissions 30 MHz – 1GHz, Low Channel

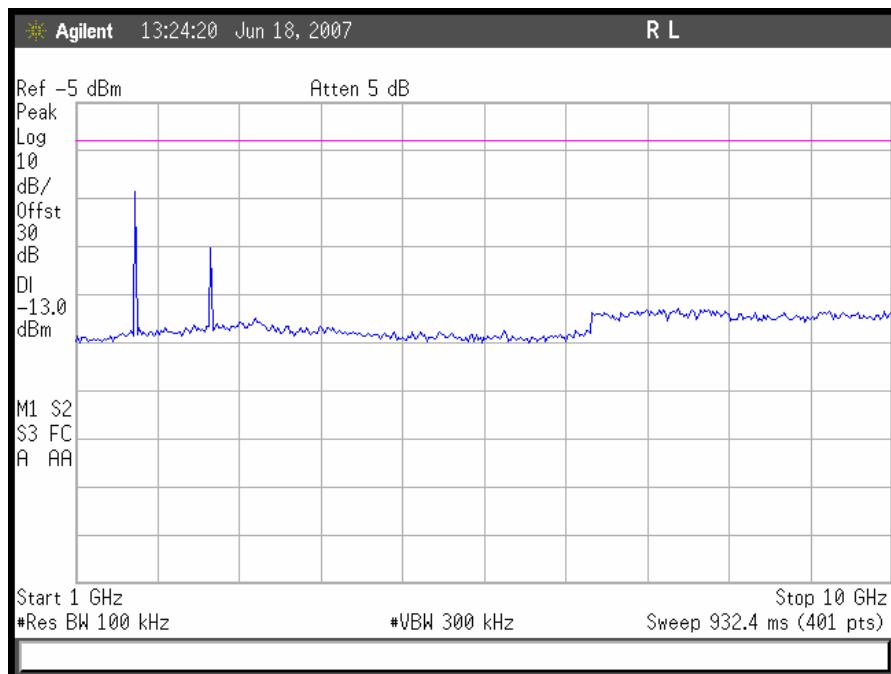


Plot 65. GSM Uplink Conducted Emissions 1 GHz – 10GHz, Low Channel

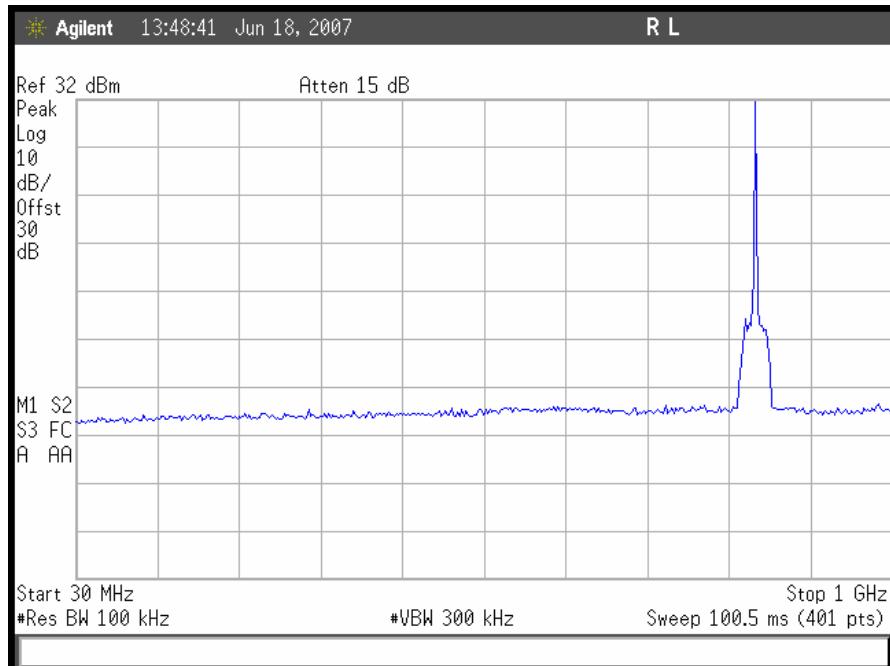


Plot 66. GSM Uplink Conducted Emissions 30 MHz – 1GHz, Mid Channel

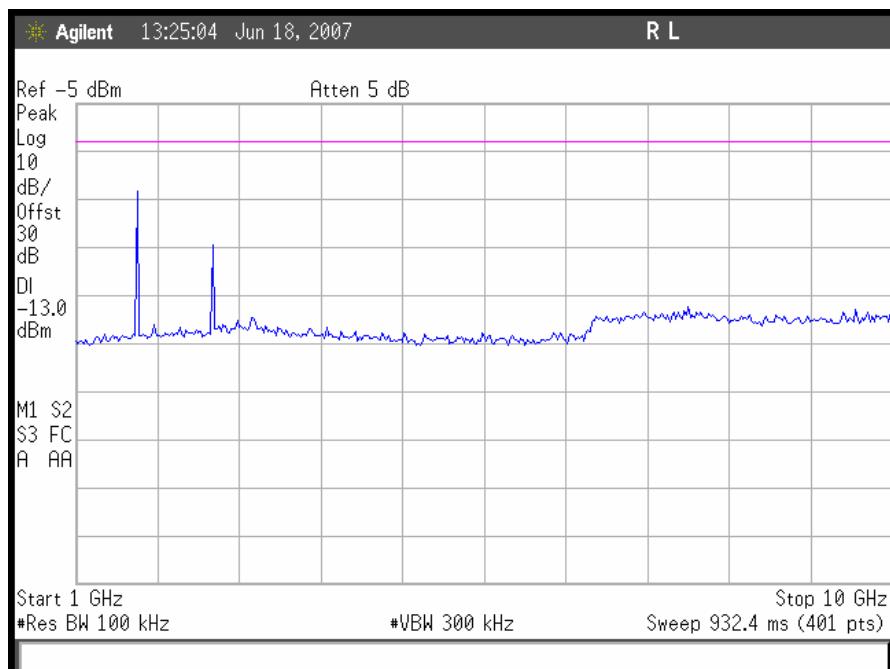

Plot 67. GSM Uplink Conducted Emissions 1 GHz – 10GHz, Mid Channel

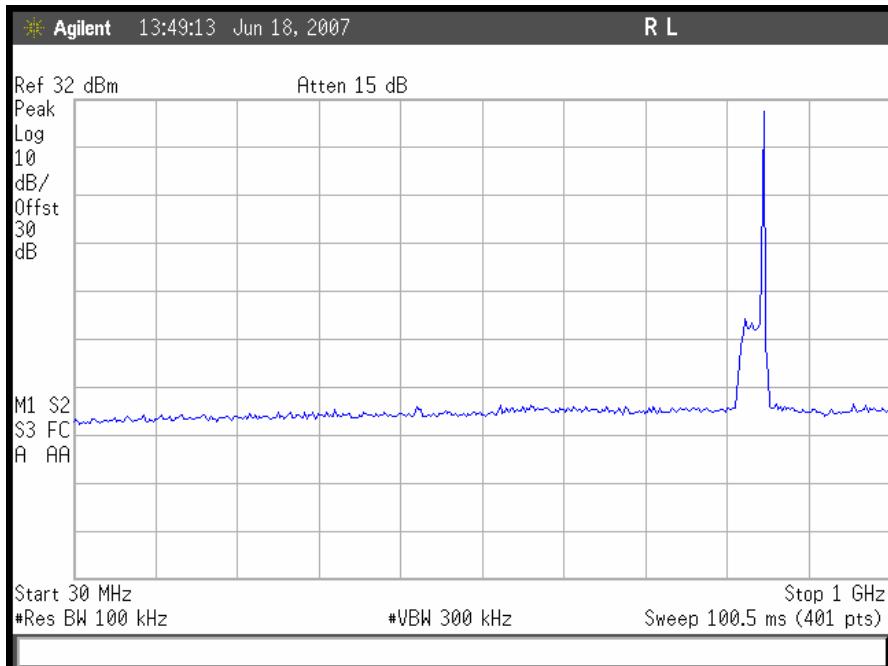


Plot 68. GSM Uplink Conducted Emissions 30 MHz – 1GHz, High Channel

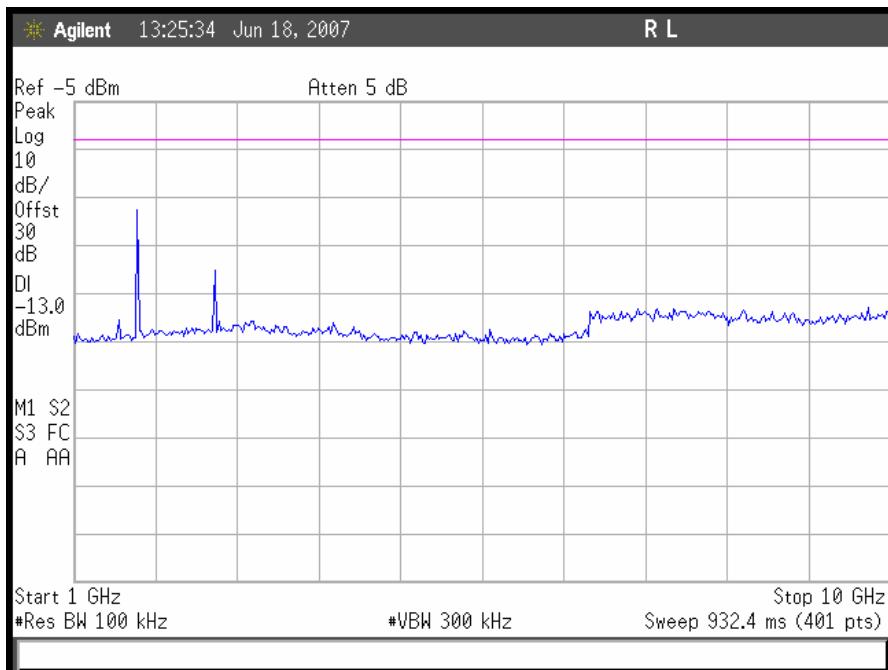


Plot 69. GSM Uplink Conducted Emissions 1 GHz – 10GHz, High Channel

Intermodulation – GSM

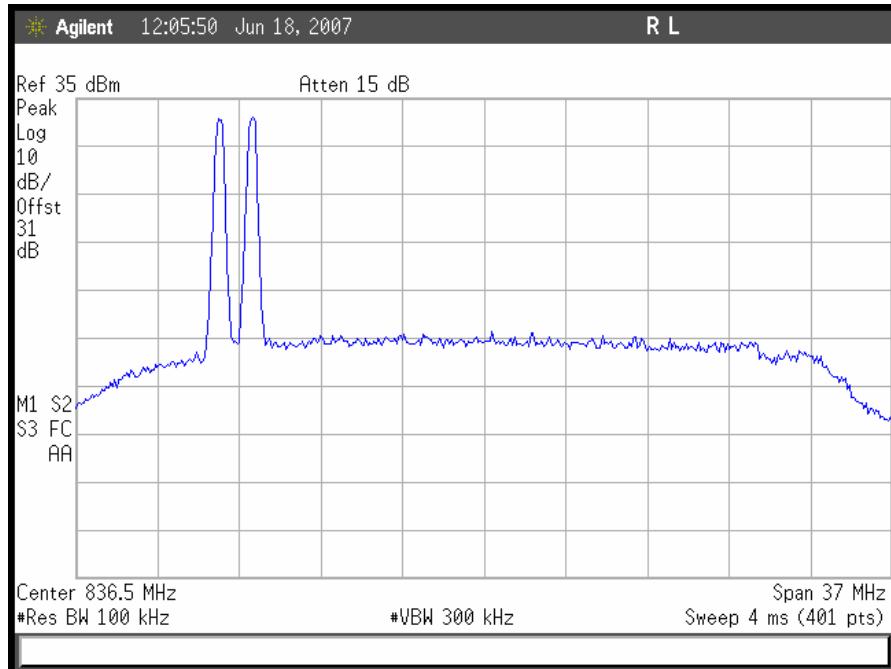


Plot 70. GSM Intermodulation Low End, Uplink

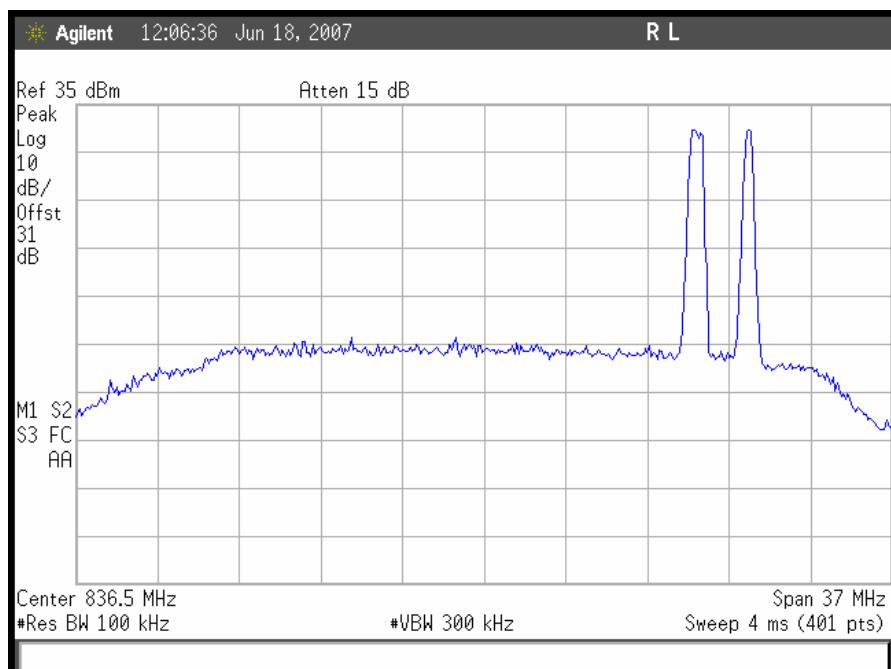


Plot 71. GSM Intermodulation High End, Uplink


Conducted Spurious Emissions – TDMA (Downlink)

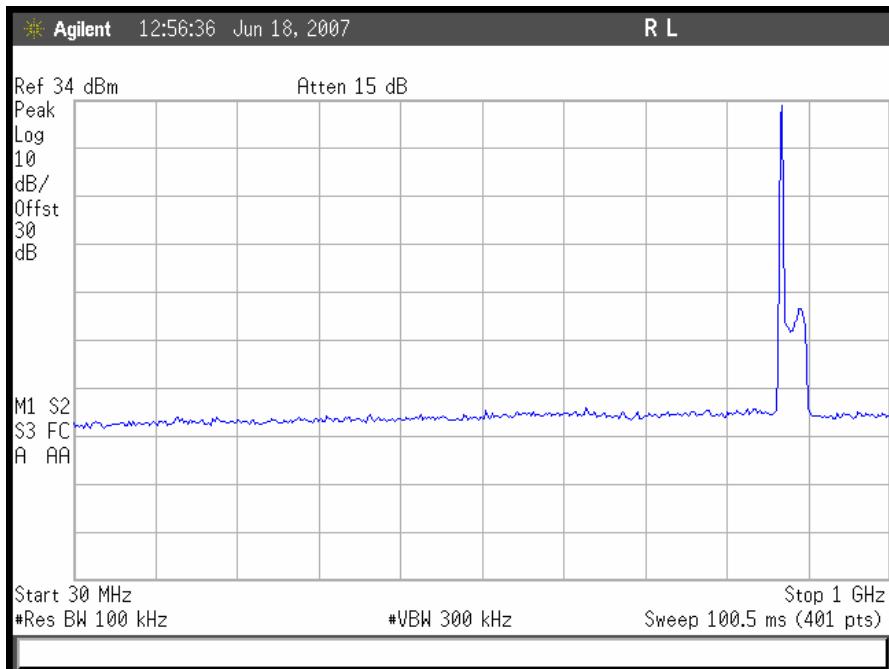


Plot 72. TDMA Downlink Conducted Emissions 30 MHz – 1GHz, Low Channel

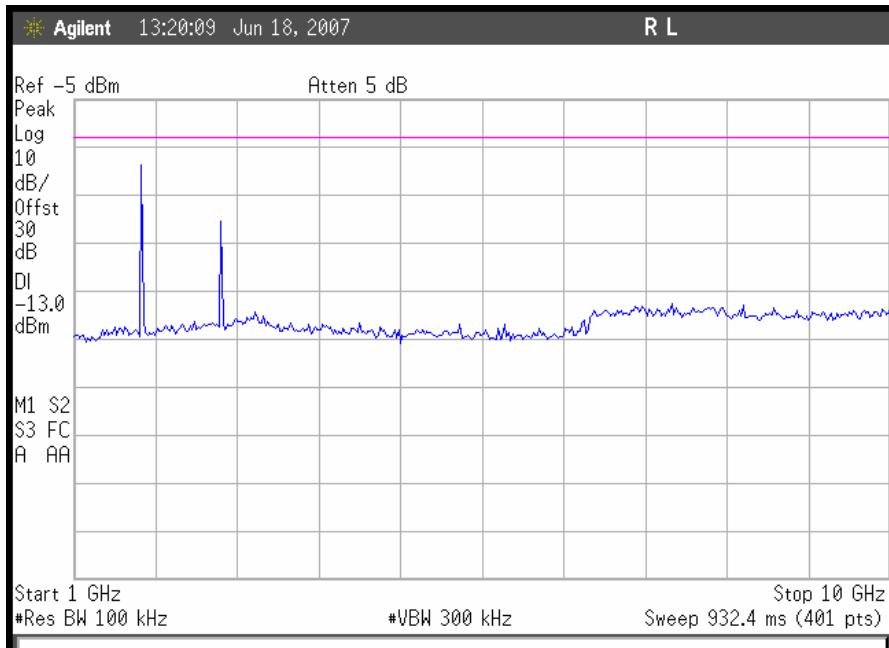


Plot 73. TDMA Downlink Conducted Emissions 1 GHz – 10GHz, Low Channel

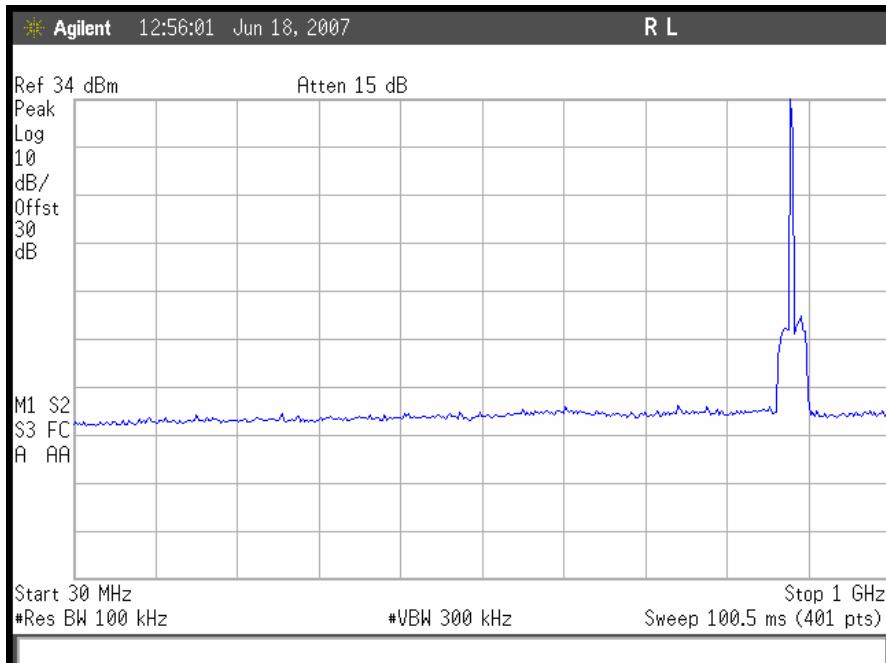


Plot 74. TDMA Downlink Conducted Emissions 30 MHz – 1GHz, Mid Channel

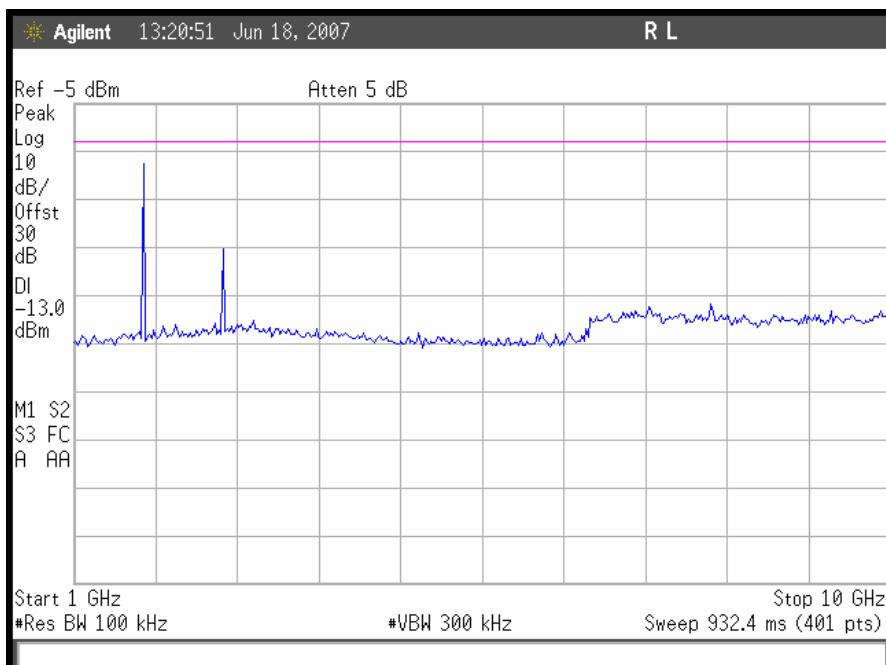

Plot 75. TDMA Downlink Conducted Emissions 1 GHz – 10GHz, Mid Channel

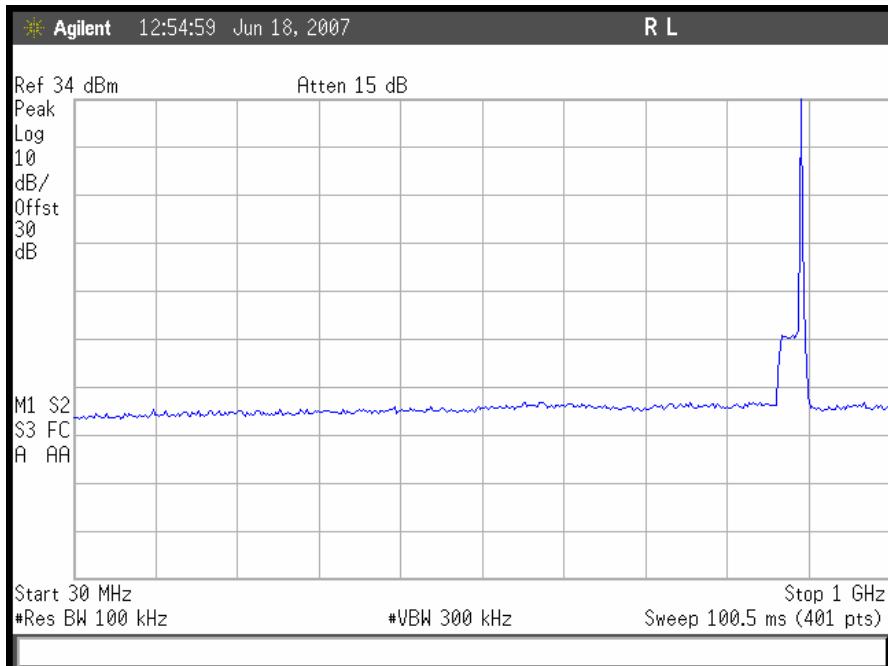


Plot 76. TDMA Downlink Conducted Emissions 30 MHz – 1GHz, High Channel

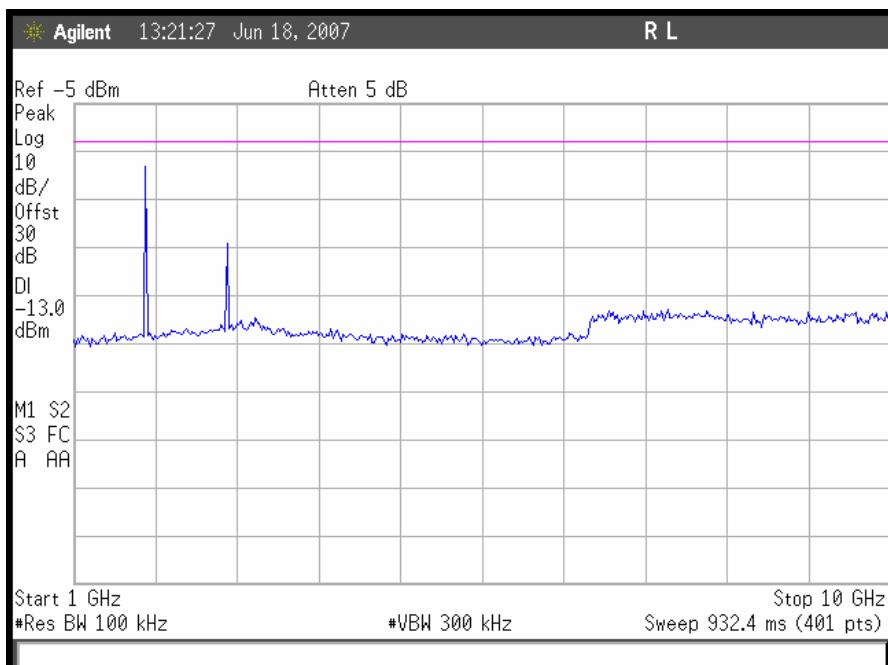


Plot 77. TDMA Downlink Conducted Emissions 1 GHz – 10GHz, High Channel

Intermodulation – TDMA

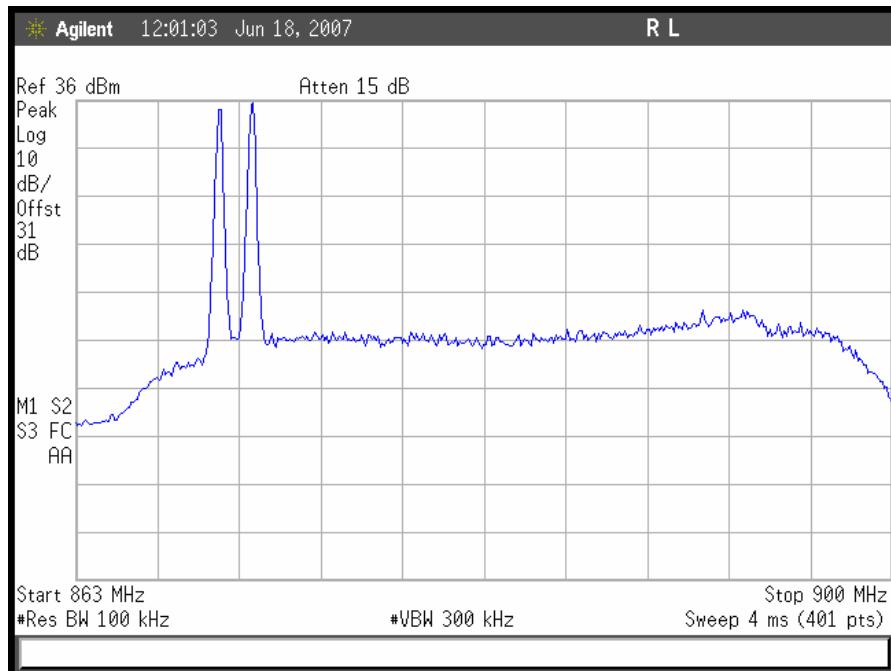


Plot 78. TDMA Intermodulation Low End, Downlink

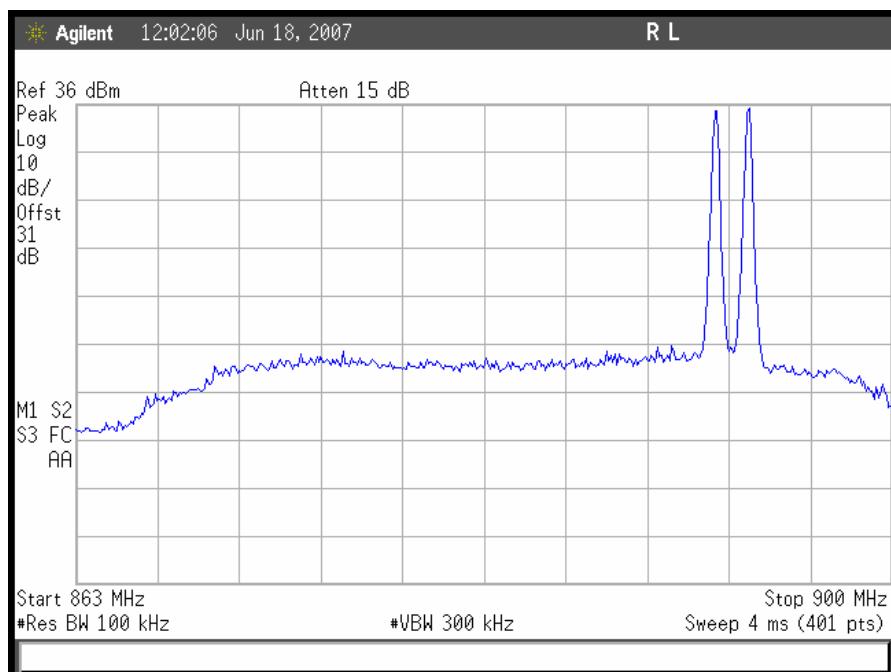


Plot 79. TDMA Intermodulation High End, Downlink


Conducted Spurious Emissions – TDMA (Uplink)

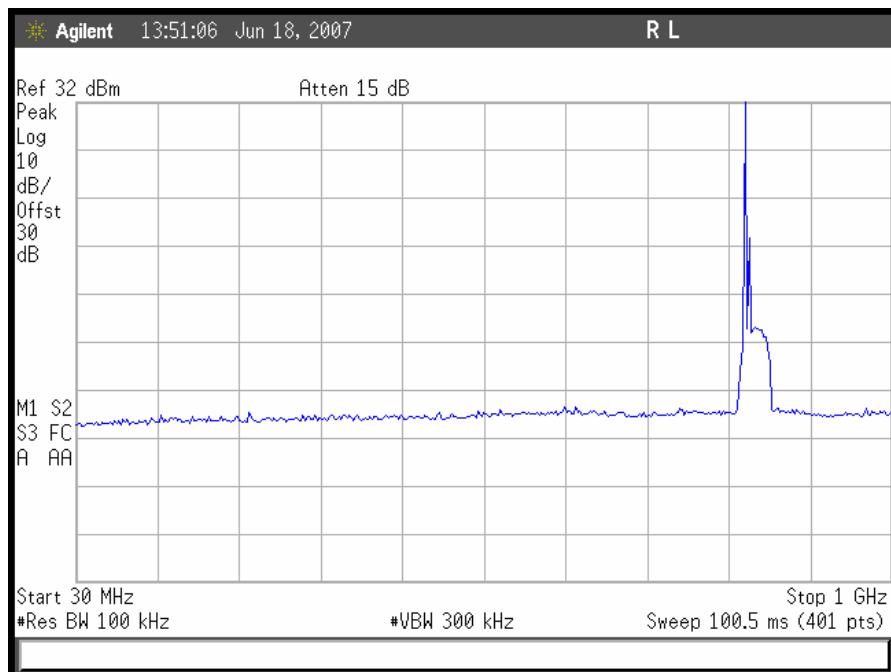


Plot 80. TDMA Uplink Conducted Emissions 30 MHz – 1GHz, Low Channel

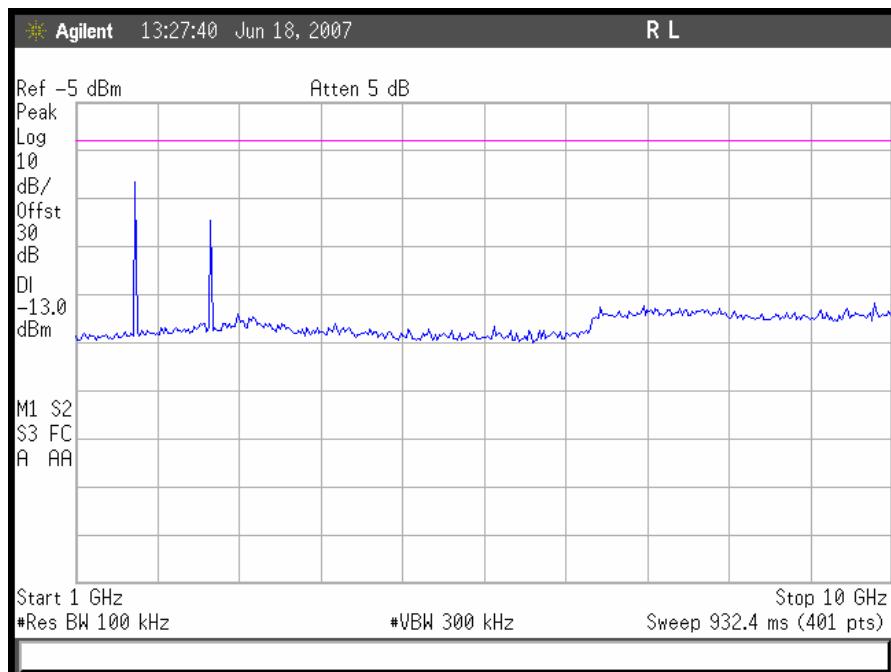


Plot 81. TDMA Uplink Conducted Emissions 1 GHz – 10GHz, Low Channel

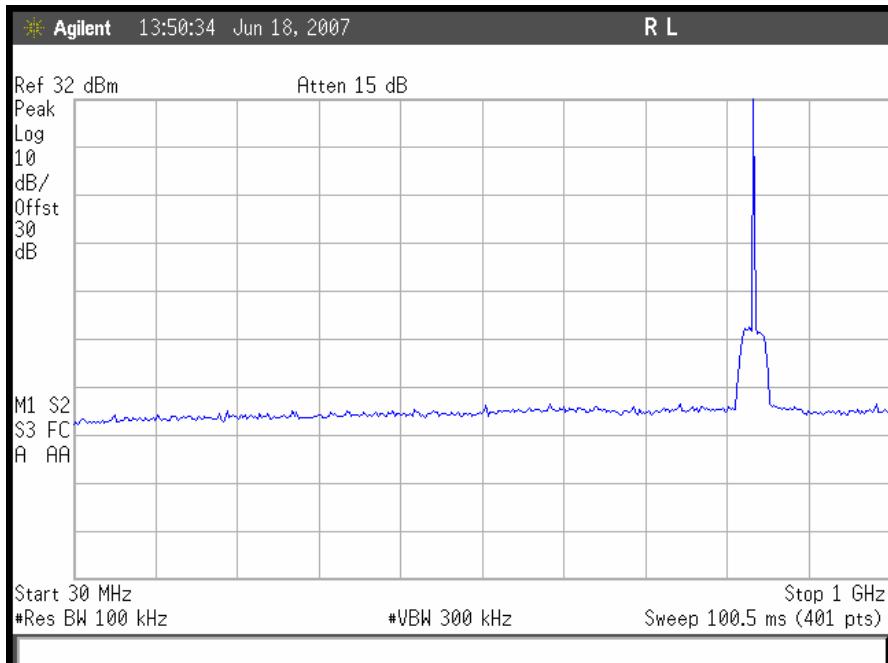


Plot 82. TDMA Uplink Conducted Emissions 30 MHz – 1GHz, Mid Channel

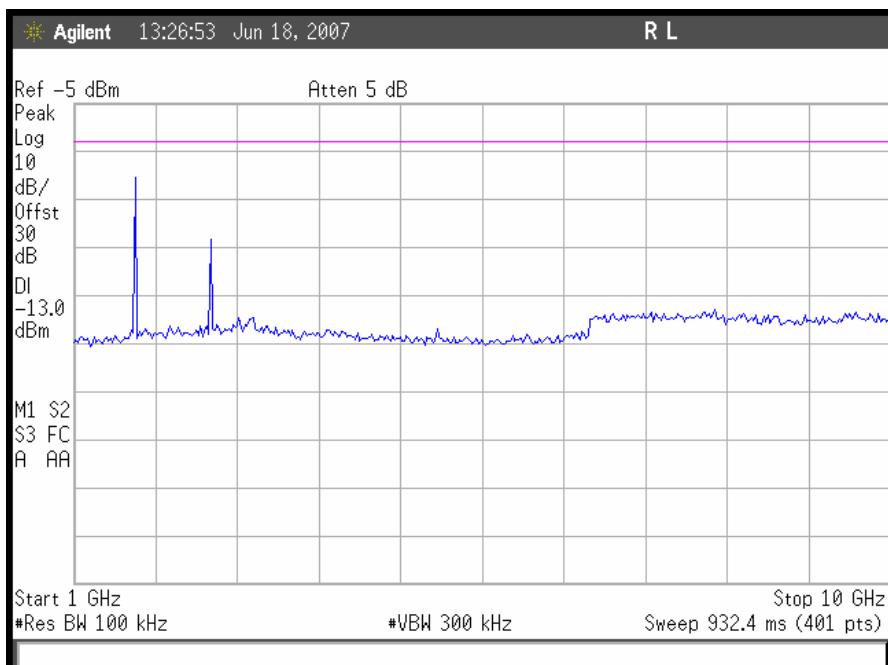

Plot 83. TDMA Uplink Conducted Emissions 1 GHz – 10GHz, Mid Channel

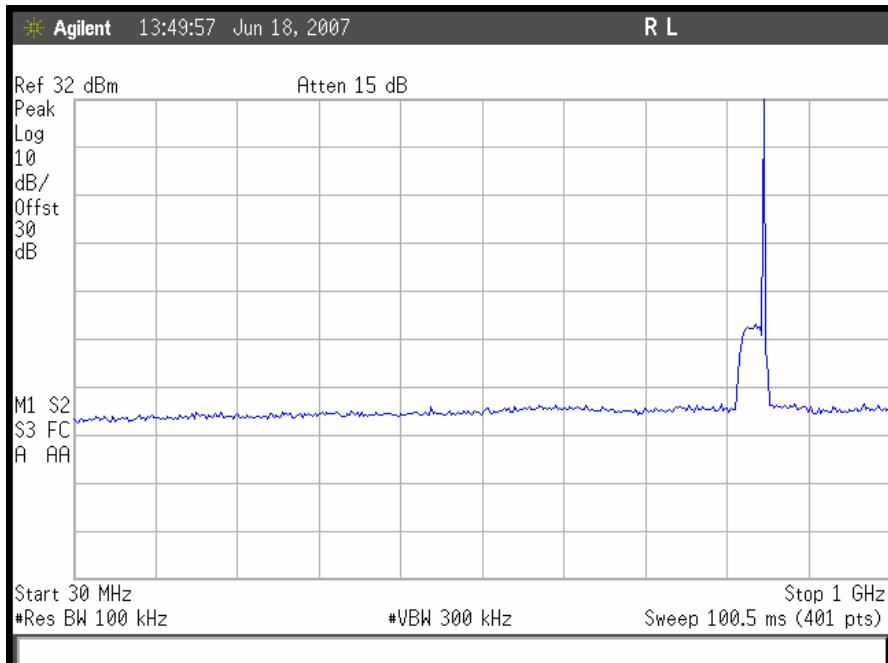


Plot 84. TDMA Uplink Conducted Emissions 30 MHz – 1GHz, High Channel

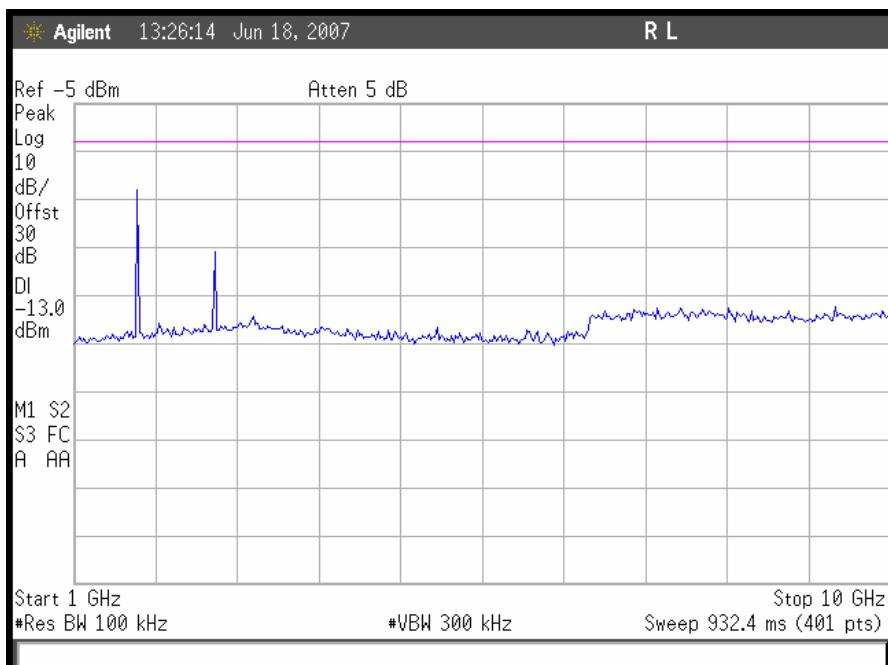


Plot 85. TDMA Uplink Conducted Emissions 1 GHz – 10GHz, High Channel

Intermodulation – TDMA

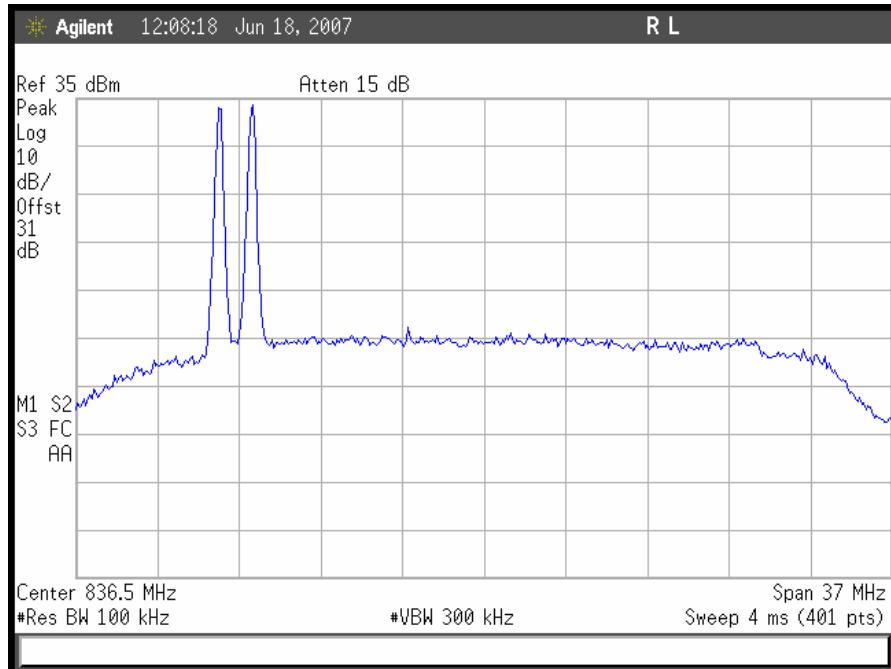


Plot 86. TDMA Intermodulation Low End, Uplink

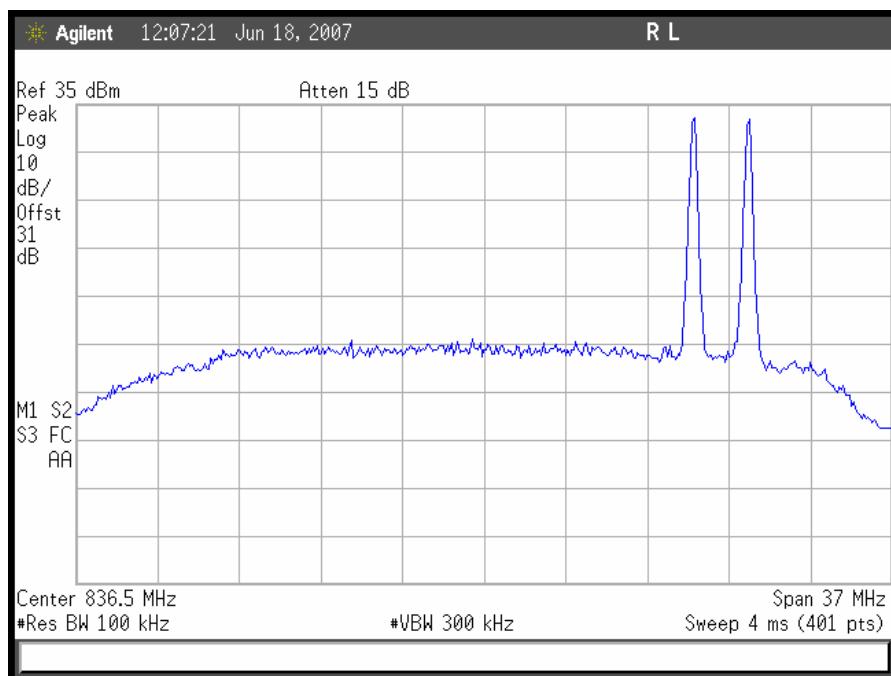


Plot 87. TDMA Intermodulation High End, Uplink

Electromagnetic Compatibility Criteria for Intentional Radiators

2-11-04/EAB/RF Out of Band Rejection

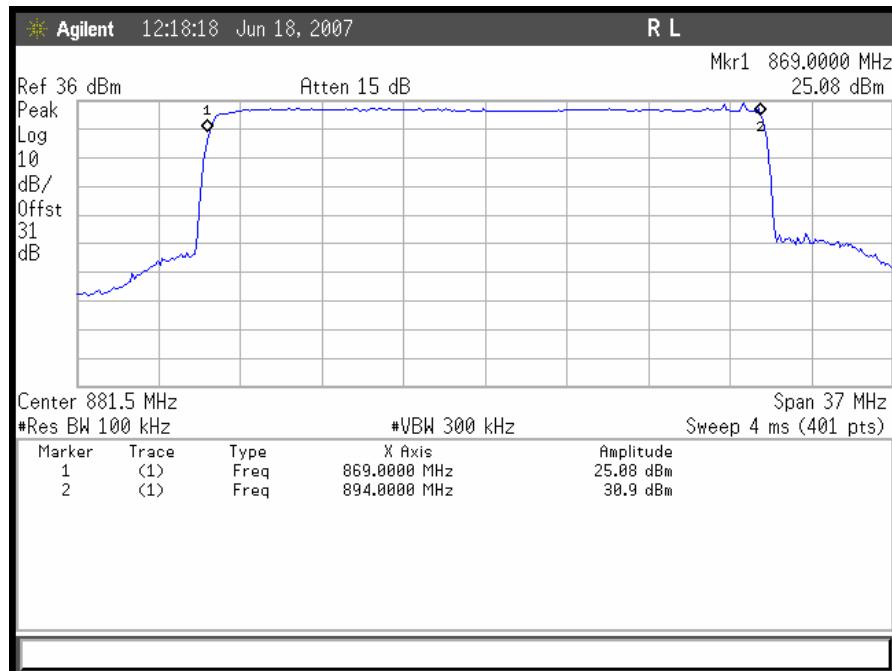

Plot 88. Out of Band Rejection - Downlink

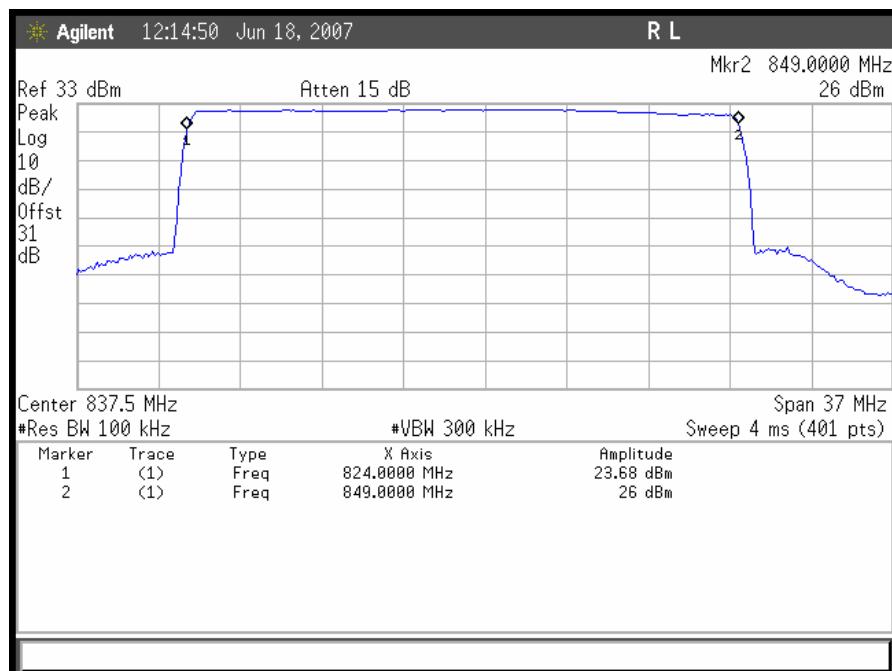

Plot 89. Out of Band Rejection - Uplink



Electromagnetic Compatibility Criteria for Intentional Radiators

§2.1055 Frequency Stability over Temperature and Voltage Variations

Test Requirement(s): §2.1055(a)(1) §22.355

Test Procedures: As required by 47 CFR 2.1055, *Frequency Stability measurements* were made at the RF output terminals using a Directional Coupler through a Spectrum Analyzer and Power Meter.

The EUT was placed in the Environmental Chamber and support equipments are outside the chamber on a table. A CW signal was injected into the EUT at the appropriate RF level. The frequency counter option on the Spectrum Analyzer was used to measure frequency deviations. The frequency drift was investigated for every 10°C increment until the unit is stabilized then recorded the reading in tabular format with the temperature range of -30 to 50°C .

Voltage supplied to EUT is 120 VAC reference temperature was done at 20°C . The voltage was varied by $\pm 15\%$ of nominal

Test Results: Not Applicable.



Advanced RF Technologies
Epoch-S02-800, Epoch-S02-8001W, Epoch-S02-8002W

Test Equipment
CFR Title 47 Part 22 Subpart H & Part 15 Subpart B

IV. Test Equipment



Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ANSI/NCSL Z540-1-1994 and ANSI/ISO/IEC 17025:2000.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2421	EMI RECEIVER	ROHDE&SCHWARZ	ESIB 7	03/27/2007	03/27/2008
1S2184	BILOG ANTENNA	CHASE	CBL6112A	01/03/2007	01/03/2008
1S2121	PRE-AMPLIFIER	HEWLETT PACKARD	8449B	11/28/2006	11/28/2007
1S2198	ANTENNA, HORN	EMCO	3115	08/17/2006	08/17/2007
1S2202	ANTENNA, HORN, 1 METER	EMCO	3116	04/10/2007	04/10/2010
N/A	HIGH PASS FILTER	MICRO-TRONICS	HPM13146	SEE NOTE	
1S2263	CHAMBER, 10 METER	RANTEC	N2-14	08/15/2007	08/15/2007
1S2041	COUPLER, BI DIRECTIONALCOAXIAL	NARDA	N/A	SEE NOTE	
1S2460	Analyzer, Spectrum 9 kHz-40GHz	Agilent	E4407B	07/06/2005	07/06/2008
1S2430	WIDEBAND POWER METER	ANRITSU COMPANY	ML2488A	03/12/2007	03/12/2008
1S2432	WIDEBAND POWER SENSOR	ANRITSU COMPANY	MA2491A	03/12/2007	03/12/2008
1S2034	COUPLER, DIRECTIONAL 1-20 GHz	KRYTAR	101020020	SEE NOTE	
1S2041	COUPLER, BI DIRECTIONALCOAXIAL	NARDA	N/A	SEE NOTE	
1S2128	Harmonic Mixer	Hewlett Packard	11970A	10/26/2006	10/26/2008
1S2129	Harmonic Mixer	Hewlett Packard	11970K	10/26/2006	10/26/2008

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.



Advanced RF Technologies
Epoch-S02-800, Epoch-S02-8001W, Epoch-S02-8002W

Electromagnetic Compatibility
Certification & User's Manual Information
CFR Title 47 Part 22 Subpart H & Part 15 Subpart B

V. Certification & User's Manual Information



Certification & User's Manual Information

A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.



(e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:

- (i) *Compliance testing;*
- (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
- (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.

(e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.

(f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.



Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.¹ *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer,* be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

§ 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

¹ In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.



Certification & User's Manual Information

§ 2.948 Description of measurement facilities.

(a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.

(1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.

(i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*

(ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.

(2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.



Certification & User's Manual Information

Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

(1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

(3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

(a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

(b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.



Advanced RF Technologies
Epoch-S02-800, Epoch-S02-8001W, Epoch-S02-8002W

Electromagnetic Compatibility
End of Report
CFR Title 47 Part 22 Subpart H & Part 15 Subpart B

End of Report