



# FCC REPORT

**Applicant:** Ambient, LLC dba Ambient Weather

**Address of Applicant:** 6845 W. Frye Road Chandler, AZ 85226

**Equipment Under Test (EUT)**

Product Name: Wireless Rain Gauge

Model No.: F009RT, F009RT-01

**FCC ID:** S2SF009RT

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.231:2014

**Date of sample receipt:** November 02, 2015

**Date of Test:** November 03-10, 2015

**Date of report issued:** November 11, 2015

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

**Robinson Lo**  
**Laboratory Manager**

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS or testing done by GTS in connection with, distribution or use of the product described in this report must be approved by GTS in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 2 Version

| Version No. | Date              | Description |
|-------------|-------------------|-------------|
| 00          | November 11, 2015 | Original    |
|             |                   |             |
|             |                   |             |
|             |                   |             |
|             |                   |             |

Prepared By:

*Sam. Gao*

Date:

November 11, 2015

Project Engineer

Check By:

*hank. yan*

Date:

November 11, 2015

Reviewer

## 3 Contents

|                                                       | Page |
|-------------------------------------------------------|------|
| 1 COVER PAGE .....                                    | 1    |
| 2 VERSION .....                                       | 2    |
| 3 CONTENTS .....                                      | 3    |
| 4 TEST SUMMARY .....                                  | 4    |
| 4.1 MEASUREMENT UNCERTAINTY .....                     | 4    |
| 5 GENERAL INFORMATION .....                           | 5    |
| 5.1 CLIENT INFORMATION .....                          | 5    |
| 5.2 GENERAL DESCRIPTION OF EUT .....                  | 5    |
| 5.3 TEST MODE .....                                   | 6    |
| 5.4 TEST FACILITY.....                                | 6    |
| 5.5 TEST LOCATION .....                               | 6    |
| 5.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER ..... | 6    |
| 6 TEST INSTRUMENTS LIST .....                         | 7    |
| 7 TEST RESULTS AND MEASUREMENT DATA.....              | 8    |
| 7.1 ANTENNA REQUIREMENT .....                         | 8    |
| 7.2 RADIATED EMISSION METHOD .....                    | 9    |
| 7.2.1 Field Strength of The Fundamental Signal .....  | 11   |
| 7.2.2 Spurious emissions.....                         | 13   |
| 7.3 20dB OCCUPY BANDWIDTH .....                       | 16   |
| 7.4 DWELL TIME .....                                  | 17   |
| 7.5 SILENT PERIOD .....                               | 18   |
| 8 TEST SETUP PHOTO .....                              | 19   |
| 9 EUT CONSTRUCTIONAL DETAILS .....                    | 20   |

## 4 Test Summary

| Test Item                                | Section in CFR 47 | Result |
|------------------------------------------|-------------------|--------|
| Antenna requirement                      | 15.203            | Pass   |
| Field strength of the fundamental signal | 15.231 (e)        | Pass   |
| Spurious emissions                       | 15.231 (e)/15.209 | Pass   |
| 20dB Bandwidth                           | 15.231 (c)        | Pass   |
| Dwell time                               | 15.231 (e)        | Pass   |
| Silent Period                            | 15.231 (e)        | Pass   |

*Pass: The EUT complies with the essential requirements in the standard.*

### 4.1 Measurement Uncertainty

| Test Item                                                                                             | Frequency Range | Measurement Uncertainty | Notes |
|-------------------------------------------------------------------------------------------------------|-----------------|-------------------------|-------|
| Radiated Emission                                                                                     | 9kHz ~ 30MHz    | $\pm 4.34\text{dB}$     | (1)   |
| Radiated Emission                                                                                     | 30MHz ~ 1000MHz | $\pm 4.24\text{dB}$     | (1)   |
| Radiated Emission                                                                                     | 1GHz ~ 26.5GHz  | $\pm 4.68\text{dB}$     | (1)   |
| AC Power Line Conducted Emission                                                                      | 0.15MHz ~ 30MHz | $\pm 3.45\text{dB}$     | (1)   |
| Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%. |                 |                         |       |

Remark : Test according to ANSI C63.4:2014 and ANSI C63.10:2013

## 5 General Information

### 5.1 Client Information

|                                      |                                                                                |
|--------------------------------------|--------------------------------------------------------------------------------|
| Applicant:                           | Ambient, LLC dba Ambient Weather                                               |
| Address of Applicant:                | 6845 W. Frye Road Chandler, AZ 85226                                           |
| Manufacturer/ Factory:               | Shenzhen Kello Sciece Technology Co., Ltd.                                     |
| Address of Manufacturer/<br>Factory: | 32nd Building Area B Tanglang Industrial Park Xili Shenzhen<br>Guangdong China |

### 5.2 General Description of EUT

|                        |                                |
|------------------------|--------------------------------|
| Product Name:          | Wireless Rain Gauge            |
| Model No.:             | F009RT, F009RT-01              |
| Operation Frequency:   | 433.92MHz                      |
| Modulation technology: | ASK                            |
| Antenna Type:          | Integral Antenna               |
| Antenna gain:          | 0dBi (declare by Manufacturer) |
| Power supply:          | DC 6V(SIZE AAA 1.5V*4 battery) |

## 5.3 Test mode

|                                                           |                                    |
|-----------------------------------------------------------|------------------------------------|
| Transmitting mode                                         | Keep the EUT in transmitting mode. |
| <i>Remark: During the test, the New Battery was used.</i> |                                    |

### Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

| Axis                   | X     | Y     | Z     |
|------------------------|-------|-------|-------|
| Field Strength(dBuV/m) | 71.12 | 73.72 | 72.42 |

### Final Test Mode:

According to ANSI C63.10 standards, the test results are both the “worst case” and “worst setup”:

Y axis (see the test setup photo)

## 5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 28, 2013.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

## 5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.  
Room 301-309, 3th Floor, Block A, Huafeng Jinyuan Business Building, No. 300 Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, China  
Tel: 0755-27798480  
Fax: 0755-27798960

## 5.6 Other Information Requested by the Customer

None.


## 6 Test Instruments list

| Radiated Emission: |                               |                                |                             |               |                     |                         |
|--------------------|-------------------------------|--------------------------------|-----------------------------|---------------|---------------------|-------------------------|
| Item               | Test Equipment                | Manufacturer                   | Model No.                   | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1                  | 3m Semi- Anechoic Chamber     | ZhongYu Electron               | 9.2(L)*6.2(W)* 6.4(H)       | GTS250        | Mar. 27 2015        | Mar. 26 2016            |
| 2                  | Control Room                  | ZhongYu Electron               | 6.2(L)*2.5(W)* 2.4(H)       | GTS251        | N/A                 | N/A                     |
| 3                  | Spectrum Analyzer             | Agilent                        | E4440A                      | GTS533        | Dec. 04 2014        | Dec. 03 2015            |
| 4                  | EMI Test Receiver             | Rohde & Schwarz                | ESU26                       | GTS203        | June 30 2015        | June 29 2016            |
| 5                  | BiConiLog Antenna             | SCHWARZBECK<br>MESS-ELEKTRONIK | VULB9163                    | GTS214        | Feb. 22 2015        | Feb. 21 2016            |
| 6                  | Double -ridged waveguide horn | SCHWARZBECK<br>MESS-ELEKTRONIK | 9120D-829                   | GTS208        | June 26 2015        | June 25 2016            |
| 7                  | Horn Antenna                  | ETS-LINDGREN                   | 3160                        | GTS217        | Mar. 27 2015        | Mar. 26 2016            |
| 8                  | EMI Test Software             | AUDIX                          | E3                          | N/A           | N/A                 | N/A                     |
| 9                  | Coaxial Cable                 | GTS                            | N/A                         | GTS213        | Mar. 28 2015        | Mar. 27 2016            |
| 10                 | Coaxial Cable                 | GTS                            | N/A                         | GTS211        | Mar. 28 2015        | Mar. 27 2016            |
| 11                 | Coaxial cable                 | GTS                            | N/A                         | GTS210        | Mar. 28 2015        | Mar. 27 2016            |
| 12                 | Coaxial Cable                 | GTS                            | N/A                         | GTS212        | Mar. 28 2015        | Mar. 27 2016            |
| 13                 | Amplifier(100kHz-3GHz)        | HP                             | 8347A                       | GTS204        | June 30 2015        | June 29 2016            |
| 14                 | Amplifier(2GHz-20GHz)         | HP                             | 8349B                       | GTS206        | June 30 2015        | June 29 2016            |
| 15                 | Amplifier (18-26GHz)          | Rohde & Schwarz                | AFS33-18002<br>650-30-8P-44 | GTS218        | June 26 2015        | June 29 2016            |
| 16                 | Band filter                   | Amindeon                       | 82346                       | GTS219        | Mar. 28 2015        | Mar. 27 2016            |
| 17                 | D.C. Power Supply             | Instek                         | PS-3030                     | GTS232        | Mar. 28 2015        | Mar. 27 2016            |
| 18                 | Thermo meter                  | KTJ                            | TA328                       | GTS256        | Dec. 04 2014        | Dec. 03 2015            |


| General used equipment: |                |              |           |               |                     |                         |
|-------------------------|----------------|--------------|-----------|---------------|---------------------|-------------------------|
| Item                    | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (dd-mm-yy) | Cal.Due date (dd-mm-yy) |
| 1                       | Barometer      | ChangChun    | DYM3      | GTS257        | July 07 2015        | July 06 2016            |


## 7 Test results and Measurement Data

### 7.1 Antenna requirement
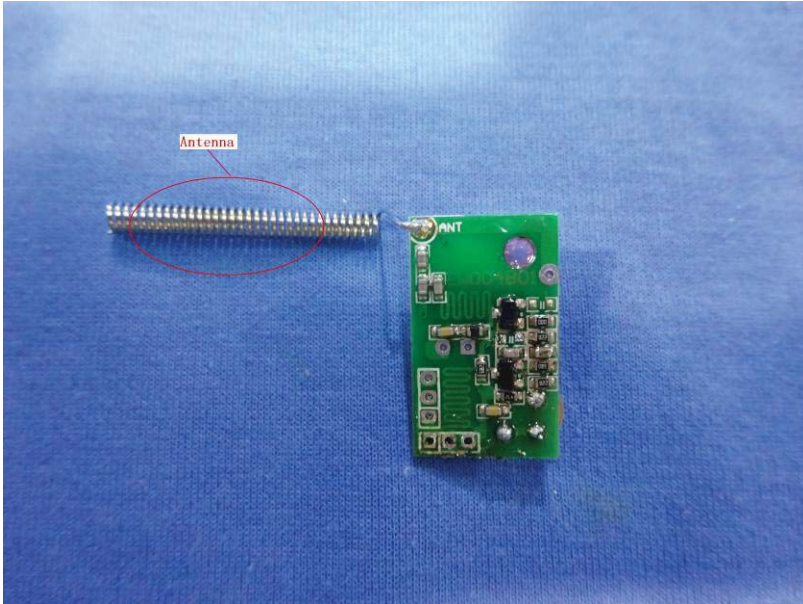
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|
| <b>Standard requirement:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                     | FCC Part15 C Section 15.203 |
| <b>15.203 requirement:</b><br>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. |                             |
| <b>EUT Antenna:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                             |
| The EUT make use of a Integral Antenna , the typical gain of the antenna is 0dBi.                                                                                                                                                                                                                                                                                                                                                                                                |                             |
|                                                                                                                                                                                                                                                                                                                                                                                               |                             |

## 7.2 Radiated Emission Method
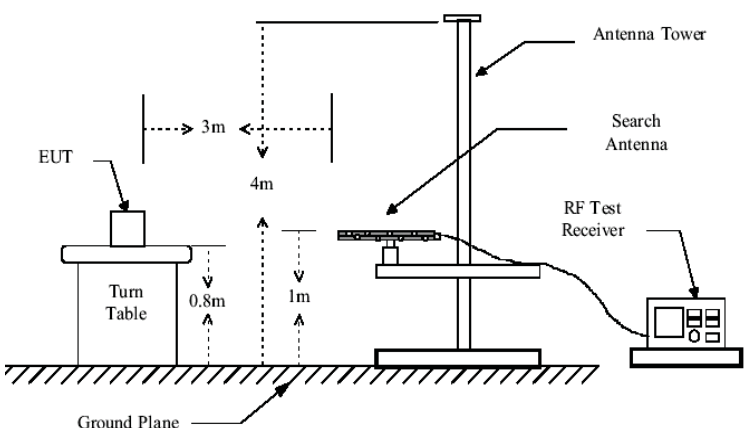
|                                                                                                                                                          |                                                                                      |            |                    |        |                  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|------------|--------------------|--------|------------------|
| Test Requirement:                                                                                                                                        | FCC Part15 C Section 15.209                                                          |            |                    |        |                  |
| Test Method:                                                                                                                                             | ANSI C63.10:2013                                                                     |            |                    |        |                  |
| Test Frequency Range:                                                                                                                                    | 30MHz to 5000MHz                                                                     |            |                    |        |                  |
| Test site:                                                                                                                                               | Measurement Distance: 3m                                                             |            |                    |        |                  |
| Receiver setup:                                                                                                                                          | Frequency                                                                            | Detector   | RBW                | VBW    | Remark           |
|                                                                                                                                                          | 30MHz-1GHz                                                                           | Quasi-peak | 120KHz             | 300KHz | Quasi-peak Value |
|                                                                                                                                                          | Above 1GHz                                                                           | Peak       | 1MHz               | 3MHz   | Peak Value       |
| Limit:<br>(Field strength of the<br>fundamental signal)                                                                                                  | Frequency                                                                            |            | Limit (dBuV/m @3m) |        | Remark           |
|                                                                                                                                                          | 433.92MHz                                                                            |            | 72.87              |        | Average Value    |
|                                                                                                                                                          |                                                                                      |            | 92.87              |        | Peak Value       |
| Limit:<br>(Spurious Emissions)                                                                                                                           | Frequency                                                                            |            | Limit (dBuV/m @3m) |        | Remark           |
|                                                                                                                                                          | 30MHz-88MHz                                                                          |            | 40.00              |        | Quasi-peak Value |
|                                                                                                                                                          | 88MHz-216MHz                                                                         |            | 43.50              |        | Quasi-peak Value |
|                                                                                                                                                          | 216MHz-960MHz                                                                        |            | 46.00              |        | Quasi-peak Value |
|                                                                                                                                                          | 960MHz-1GHz                                                                          |            | 54.00              |        | Quasi-peak Value |
|                                                                                                                                                          | Above 1GHz                                                                           |            | 54.00              |        | Average Value    |
|                                                                                                                                                          |                                                                                      |            | 74.00              |        | Peak Value       |
| Or The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level whichever limit permits a higher field strength. |                                                                                      |            |                    |        |                  |
| Test setup:                                                                                                                                              | Below 1GHz                                                                           |            |                    |        |                  |
|                                                                                                                                                          |  |            |                    |        |                  |
| Above 1GHz                                                                                                                                               |                                                                                      |            |                    |        |                  |
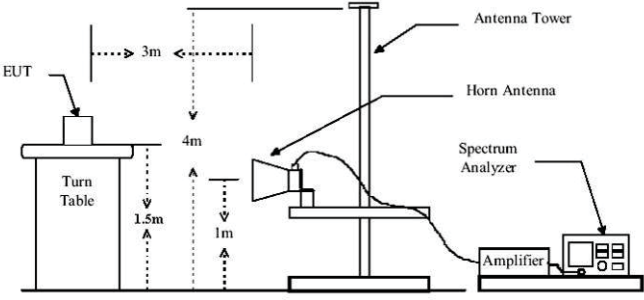
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Test Procedure:   | <ol style="list-style-type: none"> <li>1. During the test, the New Battery was used.</li> <li>2. The EUT was placed on the top of a rotating table (0.8 meters for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>3. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>4. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>5. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>6. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>7. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol> |
| Test Instruments: | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Test mode:        | Refer to section 5.3 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

Measurement data:

## 7.2.1 Field Strength of The Fundamental Signal

Peak value:(RBW 300KHz, VBW 1MHz, Peak detector)

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 433.92          | 73.15             | 17.53                 | 3.02            | 31.77                    | 61.93          | 92.87               | -30.94          | Horizontal   |
| 433.92          | 84.94             | 17.53                 | 3.02            | 31.77                    | 73.72          | 92.87               | -19.15          | Vertical     |

Average value:


| Frequency (MHz) | Peak Value (dBuV/m) | Duty cycle factor | Average value (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|---------------------|-------------------|------------------------|---------------------|-----------------|--------------|
| 433.92          | 61.93               | -8.78             | 53.15                  | 72.87               | -19.72          | Horizontal   |
| 433.92          | 73.72               | -8.78             | 64.94                  | 72.87               | -7.93           | Vertical     |

Average value:


|                    |                                              |
|--------------------|----------------------------------------------|
| Calculate Formula: | Average value=Peak value + Duty Cycle Factor |
|                    | Duty cycle factor=20 log(Duty cycle)         |
|                    | Duty cycle= T on time / T period             |
| Test data:         | T on time =58*0.4667+10*0.9333=36.4016ms     |
|                    | T period =100ms                              |
|                    | Duty cycle=36.4016/100=0.3640                |
|                    | duty cycle factor=-8.78                      |

Test plot as follows:

Ton time:

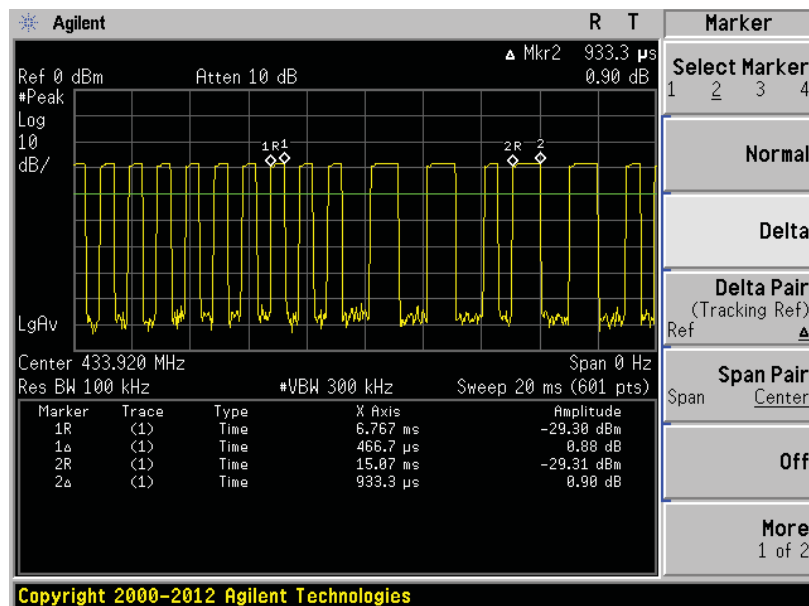

T period:

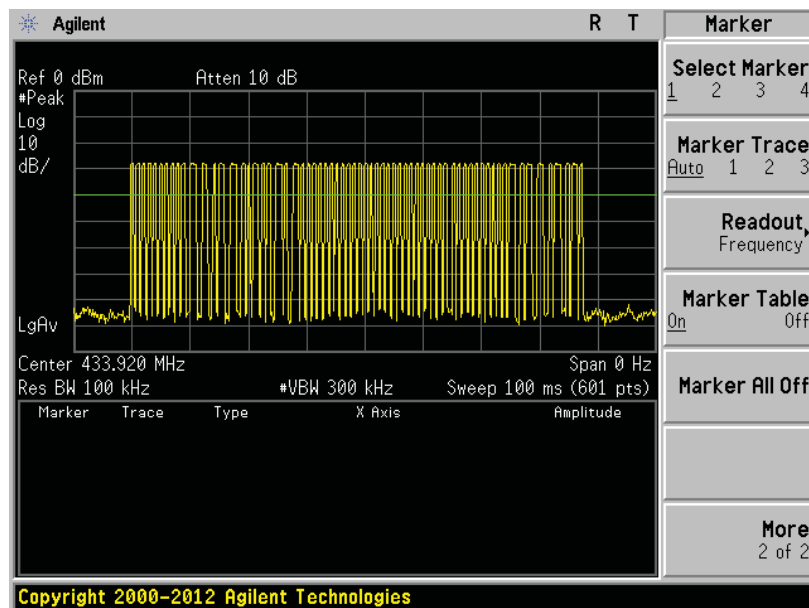

## 7.2.2 Spurious emissions

Quasi-peak Value

| Quasi-peak Value<br>Frequency<br>(MHz) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamplifier<br>Factor<br>(dB) | Level<br>(dBuV/m) | Limit Line<br>(dBuV/m) | Over<br>Limit<br>(dB) | Polarization |
|----------------------------------------|-------------------------|-----------------------------|-----------------------|--------------------------------|-------------------|------------------------|-----------------------|--------------|
| 42.90                                  | 25.17                   | 15.56                       | 0.69                  | 30.03                          | 11.39             | 40.00                  | -28.61                | Vertical     |
| 64.21                                  | 25.38                   | 12.97                       | 0.90                  | 29.89                          | 9.36              | 40.00                  | -30.64                | Vertical     |
| 129.92                                 | 22.88                   | 10.93                       | 1.44                  | 29.51                          | 5.74              | 43.50                  | -37.76                | Vertical     |
| 279.04                                 | 23.57                   | 14.63                       | 2.27                  | 29.86                          | 10.61             | 46.00                  | -35.39                | Vertical     |
| 438.66                                 | 23.68                   | 17.55                       | 3.04                  | 29.42                          | 14.85             | 46.00                  | -31.15                | Vertical     |
| 804.60                                 | 27.78                   | 22.10                       | 4.48                  | 29.20                          | 25.16             | 46.00                  | -20.84                | Vertical     |
| 39.02                                  | 24.09                   | 15.34                       | 0.65                  | 30.05                          | 10.03             | 40.00                  | -29.97                | Horizontal   |
| 63.31                                  | 24.55                   | 13.37                       | 0.89                  | 29.90                          | 8.91              | 40.00                  | -31.09                | Horizontal   |
| 111.74                                 | 25.01                   | 13.94                       | 1.29                  | 29.62                          | 10.62             | 43.50                  | -32.88                | Horizontal   |
| 229.29                                 | 24.13                   | 13.62                       | 2.01                  | 29.47                          | 10.29             | 46.00                  | -35.71                | Horizontal   |
| 350.48                                 | 26.73                   | 16.27                       | 2.62                  | 29.73                          | 15.89             | 46.00                  | -30.11                | Horizontal   |
| 638.37                                 | 27.28                   | 20.59                       | 3.87                  | 29.26                          | 22.48             | 46.00                  | -23.52                | Horizontal   |

## Harmonic emissions

### Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------------|
| 867.84          | 59.34             | 25.63                 | 4.54            | 33.27                    | 56.24          | 72.87               | -16.63          | Vertical     |
| 1301.76         | 45.32             | 25.05                 | 4.82            | 34.00                    | 41.19          | 74.00               | -32.81          | Vertical     |
| 1735.68         | 42.99             | 27.67                 | 5.15            | 34.27                    | 41.54          | 74.00               | -32.46          | Vertical     |
| 2169.60         | 41.95             | 27.82                 | 5.58            | 33.78                    | 41.57          | 74.00               | -32.43          | Vertical     |
| 2603.52         | 41.11             | 28.61                 | 6.00            | 33.28                    | 42.44          | 74.00               | -31.56          | Vertical     |
| 3037.44         | 41.12             | 28.90                 | 6.91            | 32.79                    | 44.14          | 74.00               | -29.86          | Vertical     |
| 3471.36         | 38.53             | 29.52                 | 7.69            | 32.29                    | 43.45          | 74.00               | -30.55          | Vertical     |
| 3905.28         | 37.18             | 30.88                 | 8.19            | 31.86                    | 44.39          | 74.00               | -29.61          | Vertical     |
| 4339.20         | 42.04             | 25.63                 | 4.54            | 33.27                    | 38.94          | 74.00               | -35.06          | Vertical     |
| 867.84          | 56.72             | 25.05                 | 4.82            | 34.00                    | 52.59          | 72.87               | -20.28          | Horizontal   |
| 1301.76         | 42.50             | 27.67                 | 5.15            | 34.27                    | 41.05          | 74.00               | -32.95          | Horizontal   |
| 1735.68         | 42.00             | 27.82                 | 5.58            | 33.78                    | 41.62          | 74.00               | -32.38          | Horizontal   |
| 2169.60         | 40.80             | 28.61                 | 6.00            | 33.28                    | 42.13          | 74.00               | -31.87          | Horizontal   |
| 2603.52         | 39.66             | 28.90                 | 6.91            | 32.79                    | 42.68          | 74.00               | -31.32          | Horizontal   |
| 3037.44         | 37.22             | 29.52                 | 7.69            | 32.29                    | 42.14          | 74.00               | -31.86          | Horizontal   |
| 3471.36         | 35.05             | 30.88                 | 8.19            | 31.86                    | 42.26          | 74.00               | -31.74          | Horizontal   |
| 3905.28         | 43.43             | 25.63                 | 4.54            | 33.27                    | 40.33          | 74.00               | -33.67          | Horizontal   |
| 4339.20         | 45.32             | 25.05                 | 4.82            | 34.00                    | 41.19          | 74.00               | -32.81          | Horizontal   |


**Average value:**

| Frequency<br>(MHz) | Level<br>(dBuV/m) | Duty cycle<br>factor | Average value<br>(dBuV/m) | Limit Line<br>(dBuV/m) | Over Limit<br>(dB) | Polarization |
|--------------------|-------------------|----------------------|---------------------------|------------------------|--------------------|--------------|
| 867.84             | 56.24             | -8.78                | 47.46                     | 52.87                  | -5.41              | Vertical     |
| 1301.76            | 41.19             | -8.78                | 32.41                     | 54.00                  | -21.59             | Vertical     |
| 1735.68            | 41.54             | -8.78                | 32.76                     | 54.00                  | -21.24             | Vertical     |
| 2169.60            | 41.57             | -8.78                | 32.79                     | 54.00                  | -21.21             | Vertical     |
| 2603.52            | 42.44             | -8.78                | 33.66                     | 54.00                  | -20.34             | Vertical     |
| 3037.44            | 44.14             | -8.78                | 35.36                     | 54.00                  | -18.64             | Vertical     |
| 3471.36            | 43.45             | -8.78                | 34.67                     | 54.00                  | -19.33             | Vertical     |
| 3905.28            | 44.39             | -8.78                | 35.61                     | 54.00                  | -18.39             | Vertical     |
| 4339.20            | 38.94             | -8.78                | 30.16                     | 54.00                  | -23.84             | Vertical     |
| 867.84             | 52.59             | -8.78                | 43.81                     | 52.87                  | -9.06              | Horizontal   |
| 1301.76            | 41.05             | -8.78                | 32.27                     | 54.00                  | -21.73             | Horizontal   |
| 1735.68            | 41.62             | -8.78                | 32.84                     | 54.00                  | -21.16             | Horizontal   |
| 2169.60            | 42.13             | -8.78                | 33.35                     | 54.00                  | -20.65             | Horizontal   |
| 2603.52            | 42.68             | -8.78                | 33.9                      | 54.00                  | -20.10             | Horizontal   |
| 3037.44            | 42.14             | -8.78                | 33.36                     | 54.00                  | -20.64             | Horizontal   |
| 3471.36            | 42.26             | -8.78                | 33.48                     | 54.00                  | -20.52             | Horizontal   |
| 3905.28            | 40.33             | -8.78                | 31.55                     | 54.00                  | -22.45             | Horizontal   |
| 4339.20            | 41.19             | -8.78                | 32.41                     | 54.00                  | -21.59             | Horizontal   |

**Remark:**

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *Average value = Peak value + Duty cycle factor*

## 7.3 20dB Occupy Bandwidth

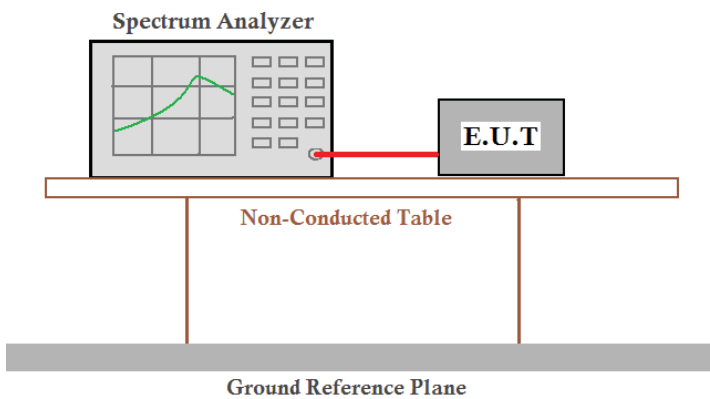
|                   |                                                                                                                                                                                                                                                                                                                             |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.231 (c)                                                                                                                                                                                                                                                                                             |
| Test Method:      | ANSI C63.10:2013                                                                                                                                                                                                                                                                                                            |
| Limit:            | The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier. |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>             |
| Test Instruments: | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                            |
| Test mode:        | Refer to section 5.3 for details                                                                                                                                                                                                                                                                                            |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                                        |

### Measurement Data


| Test Frequency (MHz) | 20dB bandwidth (MHz) | Limit (MHz) | Result |
|----------------------|----------------------|-------------|--------|
| 433.92               | 0.052                | 1.0848 MHz  | Pass   |

Note: Limit= Fundamental frequency×0.25%=433.92×0.25%=1.0848MHz

Test plot as follows:

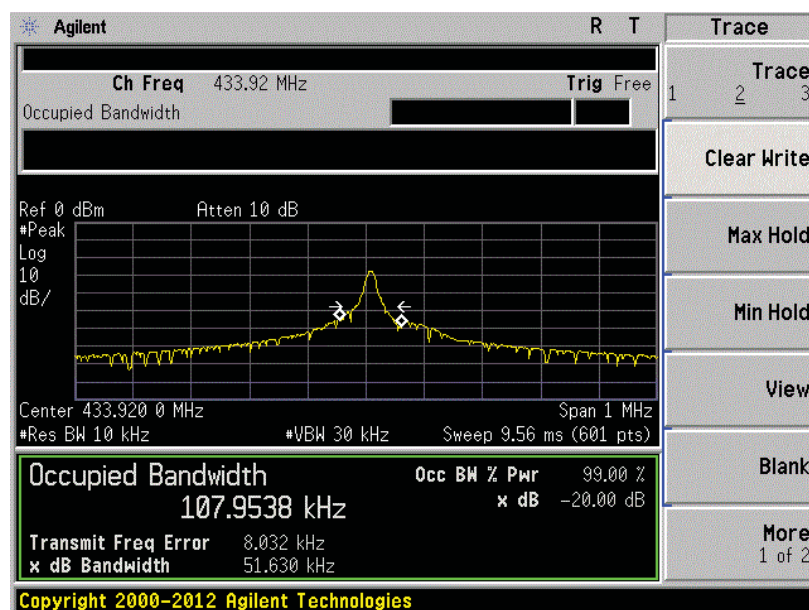


## 7.4 Dwell time
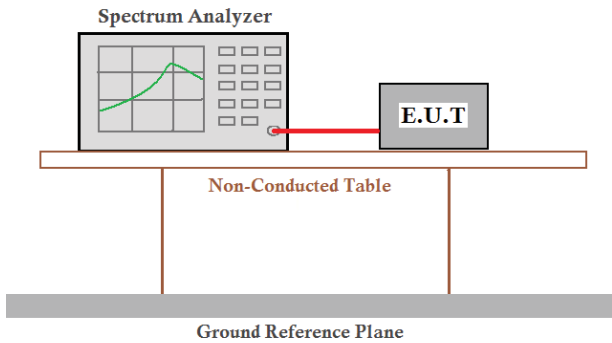
|                   |                                                                                                                                                                                                                                                                                                                |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.231 (e)                                                                                                                                                                                                                                                                                |
| Test Method:      | ANSI C63.10:2013                                                                                                                                                                                                                                                                                               |
| Receiver setup:   | RBW=100KHz, VBW=300KHz, span=0Hz, detector: Peak                                                                                                                                                                                                                                                               |
| Limit:            | Not more than 1 seconds                                                                                                                                                                                                                                                                                        |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 6.0 for details                                                                                                                                                                                                                                                                               |
| Test mode:        | Refer to section 5.3 for details                                                                                                                                                                                                                                                                               |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                           |


### Measurement data:

|                              |                |        |
|------------------------------|----------------|--------|
| Duration of each TX(second): | Limit (second) | Result |
| 0.07                         | <1.0           | Pass   |

Test plot as follows:

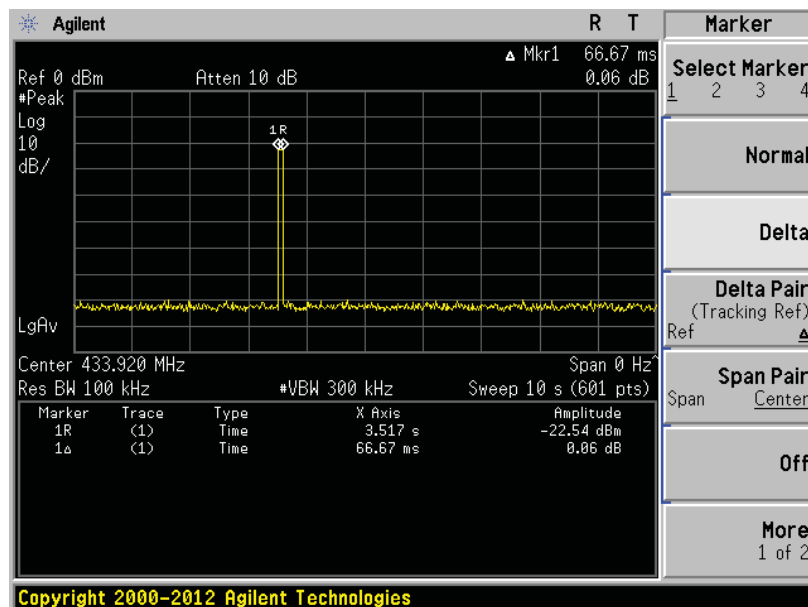


## 7.5 Silent period
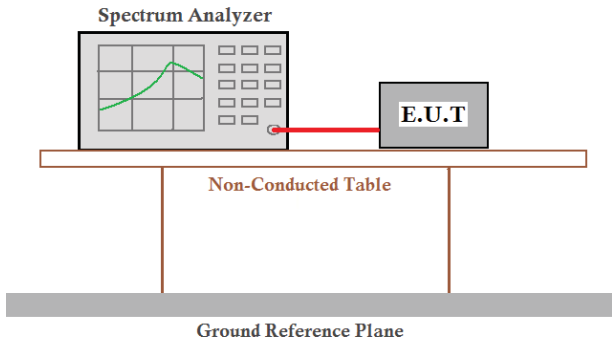
|                   |                                                                                                                                                                                                                                                                                                                 |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.231 (e)                                                                                                                                                                                                                                                                                 |
| Test Method:      | ANSI C63.10:2013                                                                                                                                                                                                                                                                                                |
| Receiver setup:   | RBW=100KHz, VBW=300KHz, span=0Hz, detector: Peak                                                                                                                                                                                                                                                                |
| Limit:            | at least 30 times the duration of the transmission<br>or more than 10 seconds                                                                                                                                                                                                                                   |
| Test Procedure:   | 1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT.<br>2. Set the EUT to proper test channel.<br>3. Single scan the transmit, and read the transmission time.                                                                                         |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 6.0 for details                                                                                                                                                                                                                                                                                |
| Test mode:        | Refer to section 5.3 for details                                                                                                                                                                                                                                                                                |
| Test results:     | Pass                                                                                                                                                                                                                                                                                                            |

### Measurement data:


| Silent period (second) | Limit (second) | Result |
|------------------------|----------------|--------|
| 60                     | >10            | Pass   |

Test plot as follows:

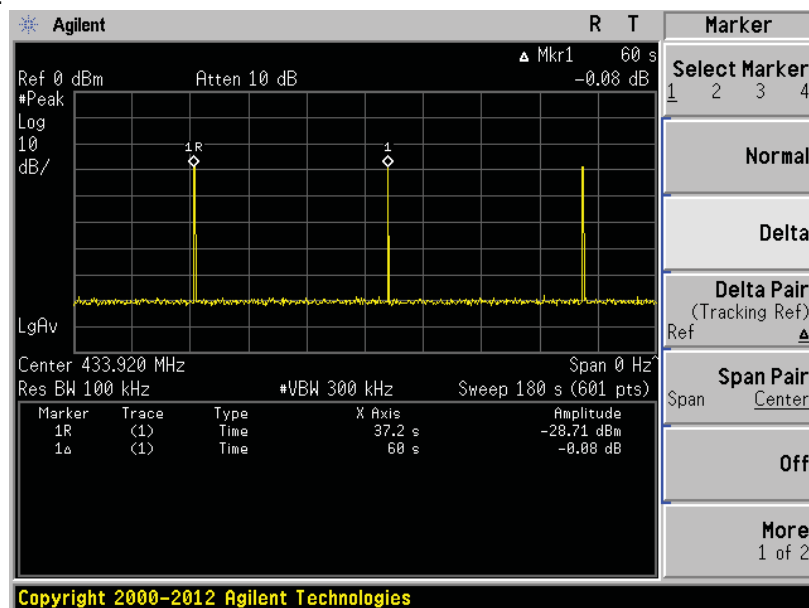




## 8 Test Setup Photo



Radiated Emission

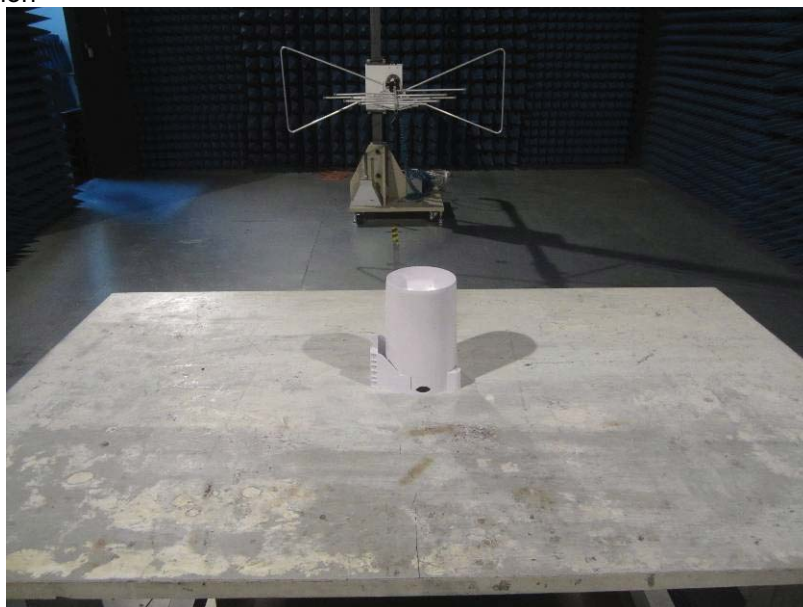




## 9 EUT Constructional Details


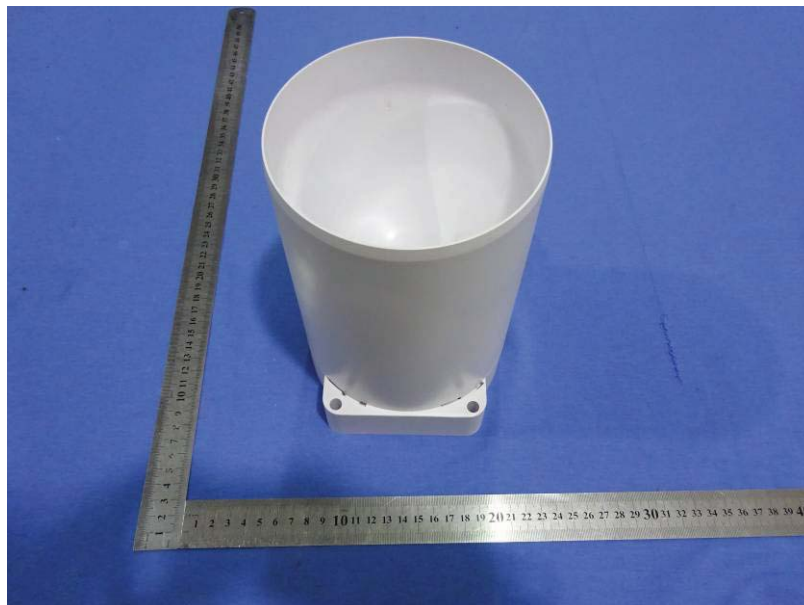


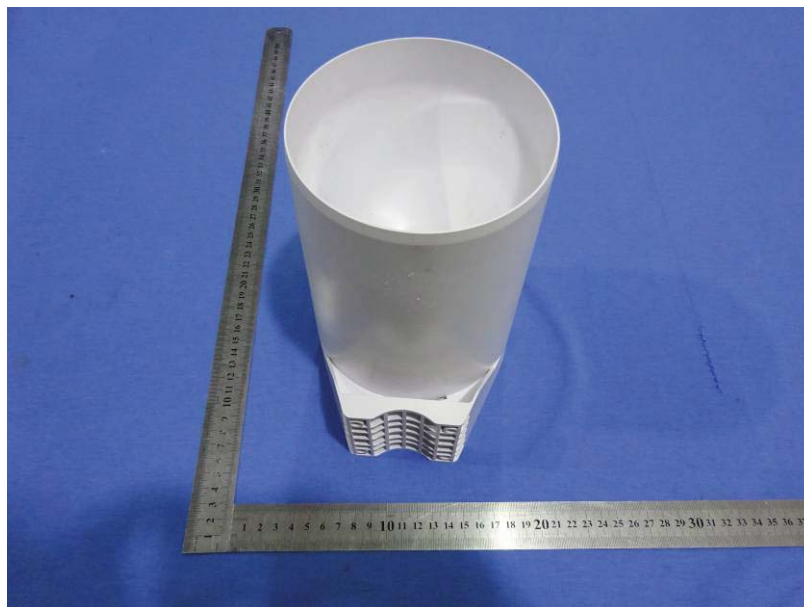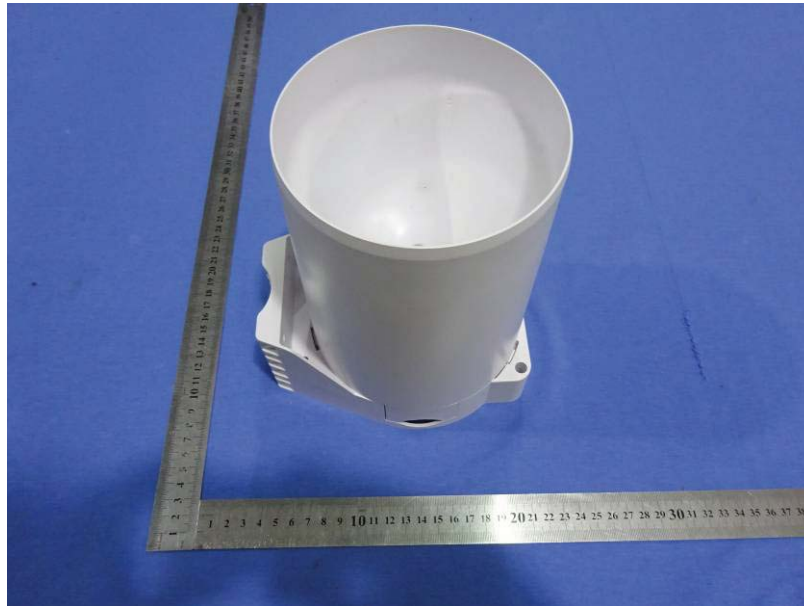

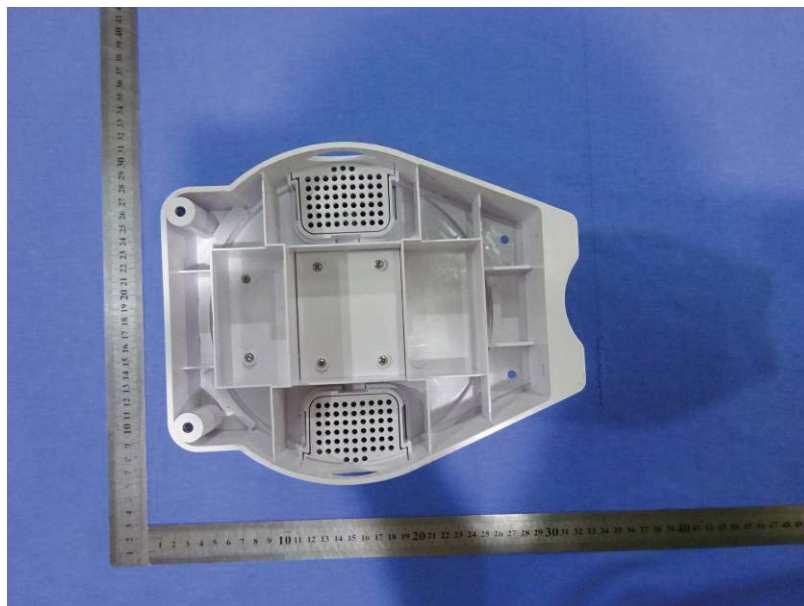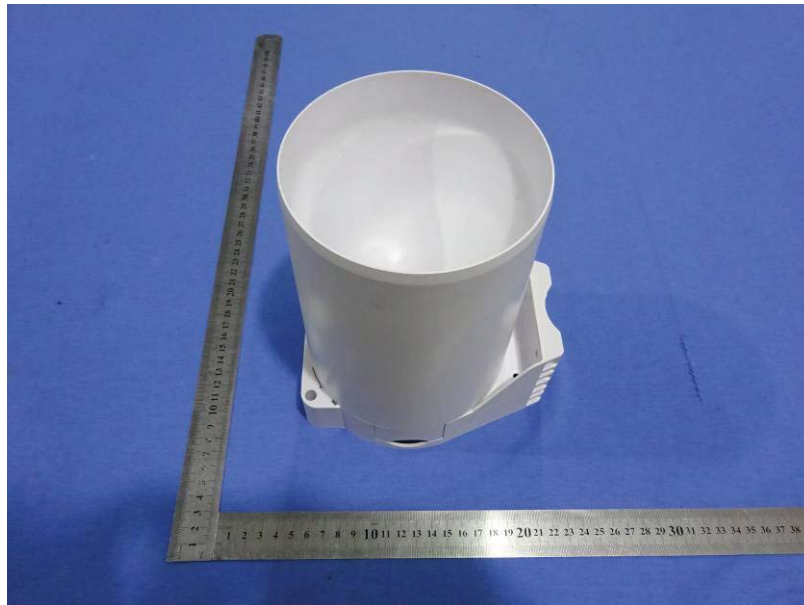

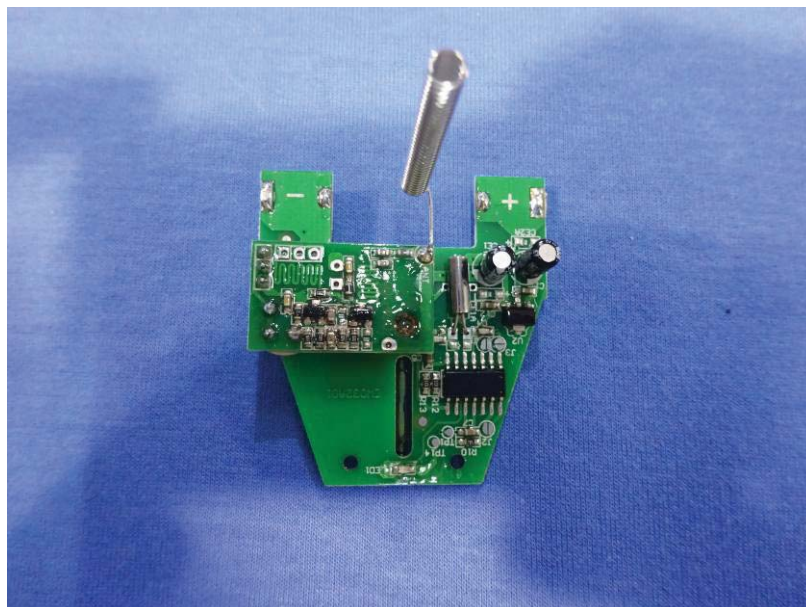

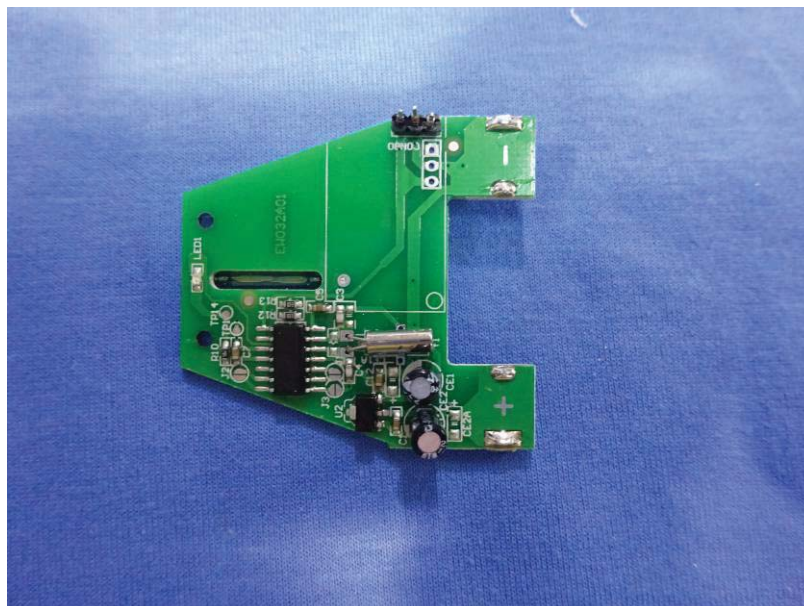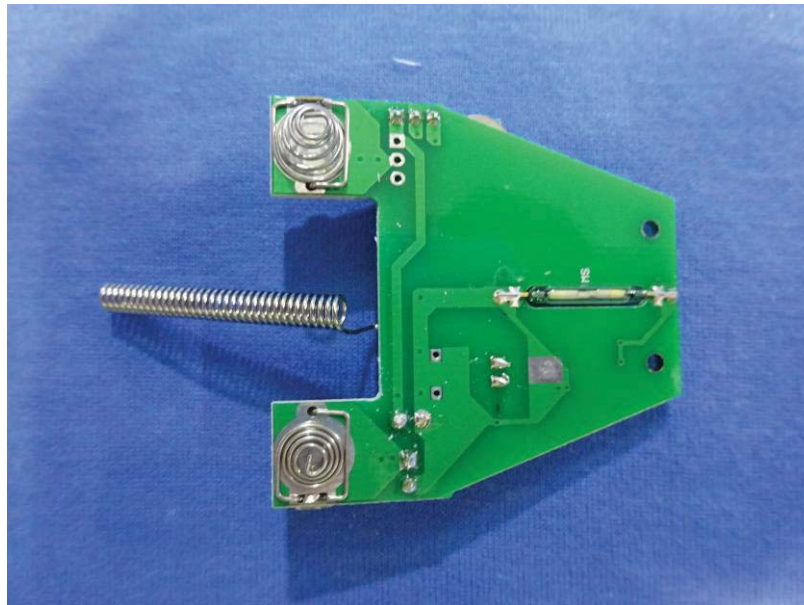

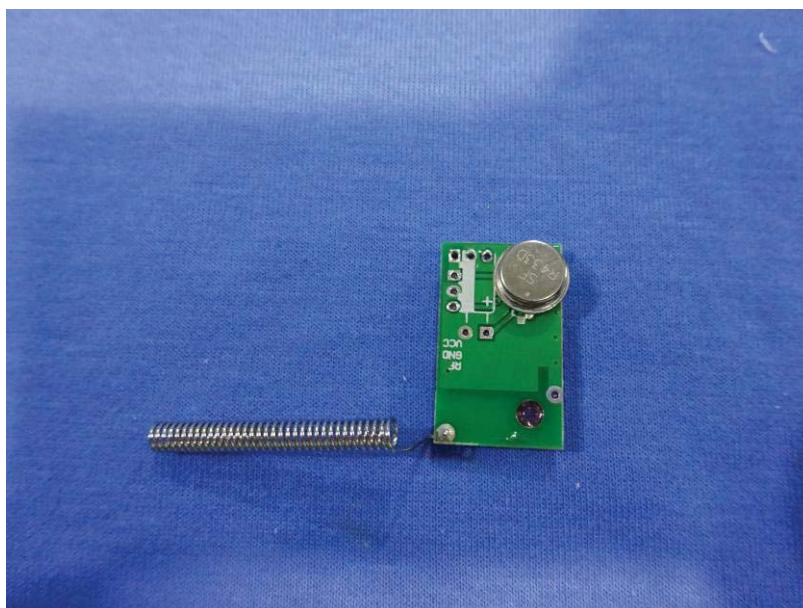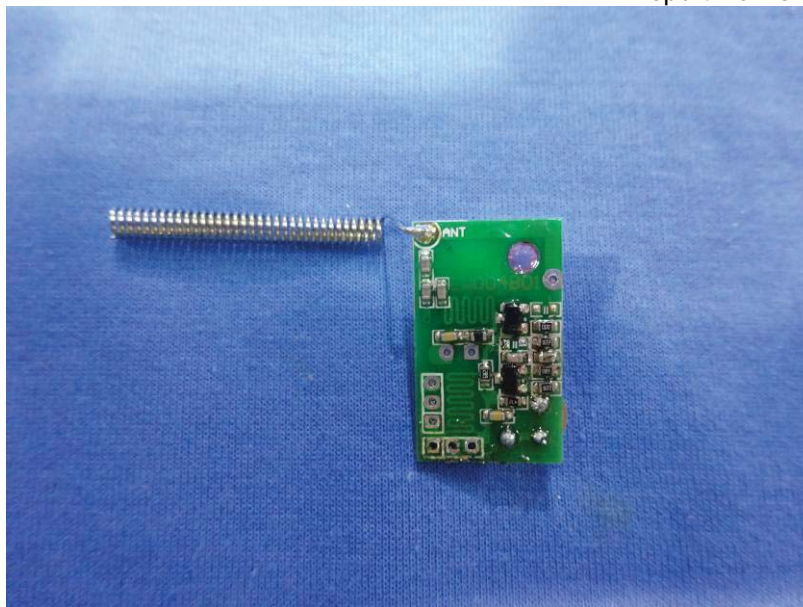



-----End-----