



TEST REPORT

Applicant: Ambient, LLC dba Ambient Weather

Address of Applicant: 6845 W. Frye Road Chandler, AZ 85226

Equipment Under Test (EUT)

Product Name: Wireless Thermo-Hygrometer

Model No.: WS07, WS07-C

FCC ID: S2SWS07

Applicable standards: FCC CFR Title 47 Part 15 Subpart B:2012

Date of sample receipt: March 20, 2013

Date of Test: March 21-28, 2013

Date of report issue: March 29, 2013

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS International Electrical Approvals or testing done by GTS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by GTS International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

2 Version

Version No.	Date	Description
00	March 29, 2013	Original

Prepared By:



Date:

March 29, 2013

Project Engineer

Check By:



Date:

March 29, 2013

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TEST MODE	5
5.4 TEST FACILITY	6
5.5 TEST LOCATION	6
5.6 DESCRIPTION OF SUPPORT UNITS	6
5.7 DEVIATION FROM STANDARDS	6
5.8 ABNORMALITIES FROM STANDARD CONDITIONS	6
5.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
6 TEST INSTRUMENTS LIST	7
7 TEST RESULTS AND MEASUREMENT DATA	8
7.1 RADIATED EMISSION	8
8 TEST SETUP PHOTO	14
9 EUT CONSTRUCTIONAL DETAILS	15

4 Test Summary

Test Item	Section in CFR 47	Result
Conducted Emission	Part15.107	N/A
Radiated Emissions	Part15.109	PASS

PASS: The EUT complies with the essential requirements in the standard.

N/A: not applicable.

5 General Information

5.1 Client Information

Applicant:	Ambient, LLC dba Ambient Weather
Address of Applicant:	6845 W. Frye Road Chandler, AZ 85226
Manufacturer:	Shenzhen Kello Sciece Technology Co., Ltd.
Address of Manufacturer:	32nd Building Area B Tanglang Industrial Park Xili Shenzhen Guangdong China
Factory:	Shenzhen Kello Sciece Technology Co., Ltd.
Address of Factory:	32nd Building Area B Tanglang Industrial Park Xili Shenzhen Guangdong China

5.2 General Description of EUT

Product Name:	Wireless Thermo-Hygrometer
Model No.:	WS07, WS07-C
Power supply:	DC 6.0V (4*1.5V "AAA" Size battery)

5.3 Test mode

Receiving mode	Keep the EUT in Receiving mode.
----------------	---------------------------------

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS —Registration No.: CNAS L5775**

CNAS has accredited Global United Technology Services Co., Ltd. To ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, July 20, 2010.

- **Industry Canada (IC)**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. Has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-1.

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China

Tel: 0755-27798480

Fax: 0755-27798960

5.6 Description of Support Units

None

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.

6 Test Instruments list



Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)* 6.0(H)	GTS250	Mar. 30 2011	Mar. 29 2013
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Jul. 03 2012	Jul. 02 2013
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	Feb. 24 2013	Feb. 23 2014
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 29 2012	June 28 2013
6	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	Jul. 03 2012	Jul. 02 2013
7	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	Jul. 03 2012	Jul. 02 2013
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial cable	GTS	N/A	GTS210	Mar. 31 2012	Mar. 30 2013
10	Coaxial Cable	GTS	N/A	GTS211	Mar. 31 2012	Mar. 30 2013
11	Thermo meter	N/A	N/A	GTS256	Jul. 06 2012	Jul. 05 2013

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)
1	Barometer	ChangChun	DYM3	GTS257	July 10 2012	July 09 2013

7 Test Results and Measurement Data

7.1 Radiated Emission

Test Requirement:	FCC Part15 B Section 15.109																									
Test Method:	ANSI C63.4:2003																									
Test Frequency Range:	30MHz to 2GHz																									
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																									
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120kHz</td> <td>300kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td></td> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average Value</td> </tr> </tbody> </table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value		Peak	1MHz	10Hz	Average Value	
Frequency	Detector	RBW	VBW	Remark																						
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value																						
Above 1GHz	Peak	1MHz	3MHz	Peak Value																						
	Peak	1MHz	10Hz	Average Value																						
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBuV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td> <td>40.00</td> <td>Quasi-peak Value</td> </tr> <tr> <td>88MHz-216MHz</td> <td>43.50</td> <td>Quasi-peak Value</td> </tr> <tr> <td>216MHz-960MHz</td> <td>46.00</td> <td>Quasi-peak Value</td> </tr> <tr> <td>960MHz-1GHz</td> <td>54.00</td> <td>Quasi-peak Value</td> </tr> <tr> <td>Above 1GHz</td> <td>54.00</td> <td>Average Value</td> </tr> <tr> <td></td> <td>74.00</td> <td>Peak Value</td> </tr> </tbody> </table>					Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.00	Quasi-peak Value	88MHz-216MHz	43.50	Quasi-peak Value	216MHz-960MHz	46.00	Quasi-peak Value	960MHz-1GHz	54.00	Quasi-peak Value	Above 1GHz	54.00	Average Value		74.00	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																								
30MHz-88MHz	40.00	Quasi-peak Value																								
88MHz-216MHz	43.50	Quasi-peak Value																								
216MHz-960MHz	46.00	Quasi-peak Value																								
960MHz-1GHz	54.00	Quasi-peak Value																								
Above 1GHz	54.00	Average Value																								
	74.00	Peak Value																								
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 																									
Test setup:	Below 1GHz																									

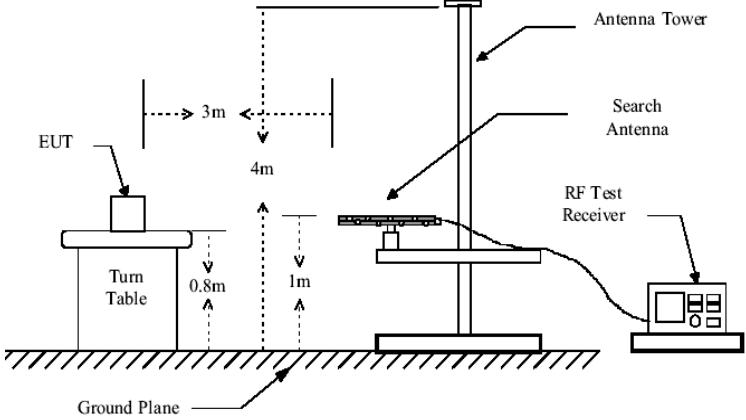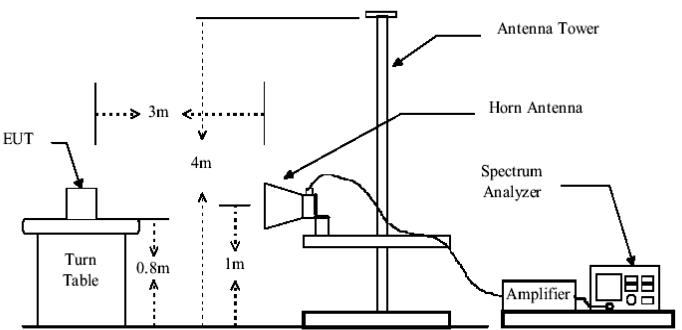	 <p>Above 1GHz</p> 
Test environment:	Temp.: 25 °C Humid.: 52% Press.: 1 012mbar
Measurement Record:	Uncertainty: $\pm 4.5\text{dB}$
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Note:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

Measurement Data

Below 1GHz


Horizontal:

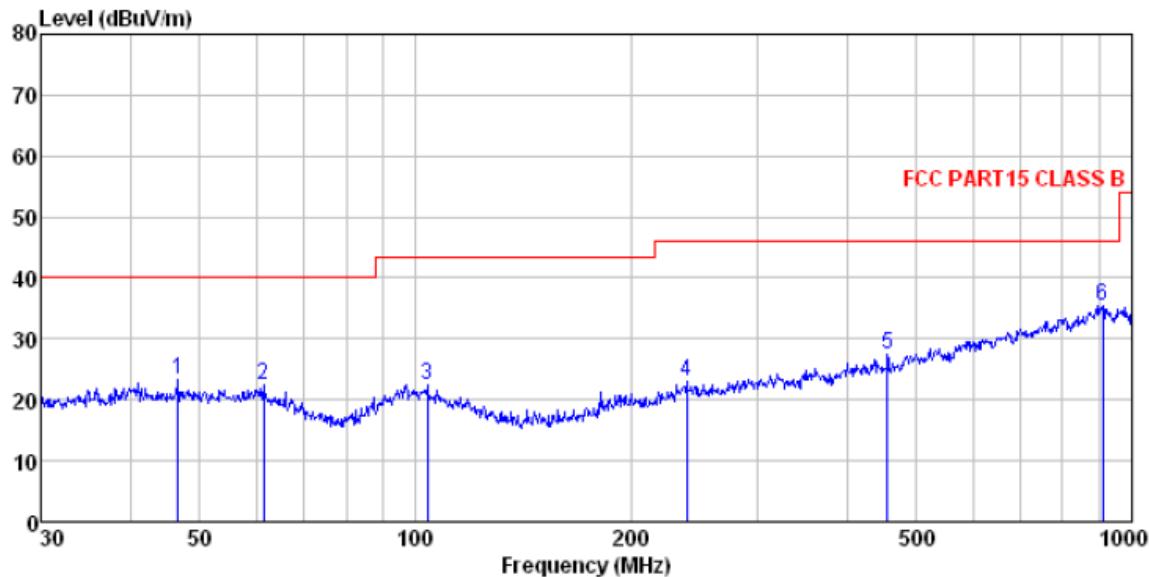

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163 -2012-05 HORIZONTAL
 Job No. : 258RF
 Test Mode : Receiving mode
 Test Engineer: Edward

Freq	ReadAntenna		Cable Preamp		Limit Level	Over Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB				
1	46.666	37.96	16.55	0.74	31.99	23.26	40.00	-16.74 QP
2	61.346	38.00	15.52	0.87	31.93	22.46	40.00	-17.54 QP
3	103.806	37.22	15.73	1.22	31.78	22.39	43.50	-21.11 QP
4	239.147	38.05	15.06	2.06	32.16	23.01	46.00	-22.99 QP
5	455.906	38.57	17.58	3.11	31.70	27.56	46.00	-18.44 QP
6	909.667	37.58	24.06	4.88	31.19	35.33	46.00	-10.67 QP

Vertical:

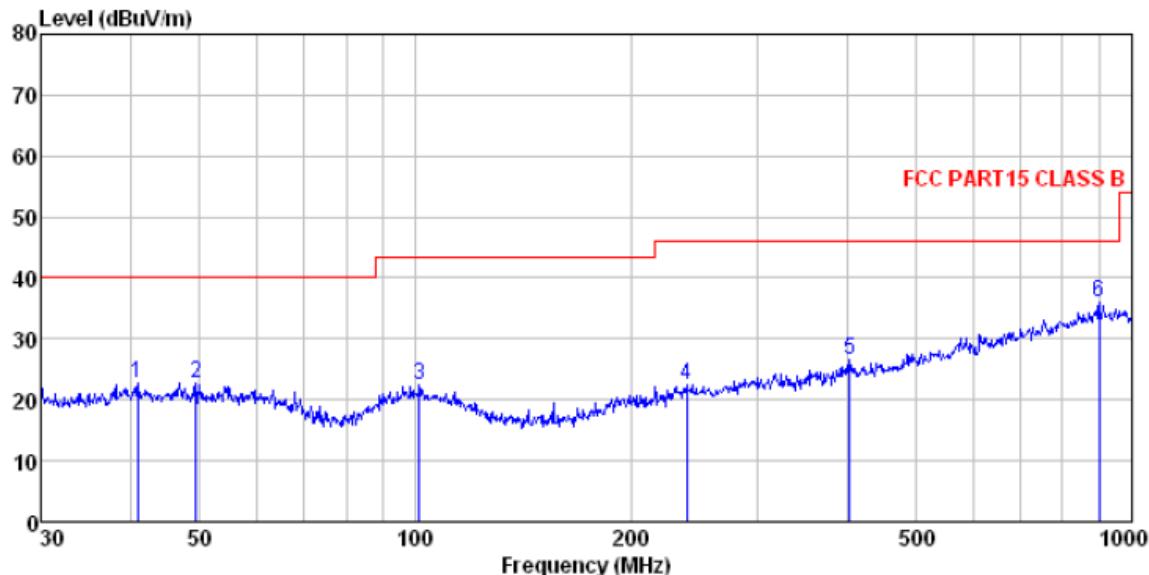

Site : 3m chamber

Condition : FCC PART15 CLASS B 3m VULB9163 -2012-05 VERTICAL

Job No. : 258RF


Test Mode : Receiving mode

Test Engineer: Edward

Freq	Read	Antenna	Cable	Preamp	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	
1	40.988	37.55	16.58	0.67	32.05	22.75	40.00 -17.25 QP
2	49.359	37.43	16.40	0.77	31.97	22.63	40.00 -17.37 QP
3	101.289	36.89	16.03	1.20	31.77	22.35	43.50 -21.15 QP
4	239.147	37.44	15.06	2.06	32.16	22.40	46.00 -23.60 QP
5	403.250	38.51	17.18	2.87	31.88	26.68	46.00 -19.32 QP
6	900.147	38.20	24.09	4.85	31.18	35.96	46.00 -10.04 QP

Above 1GHz


Horizontal:

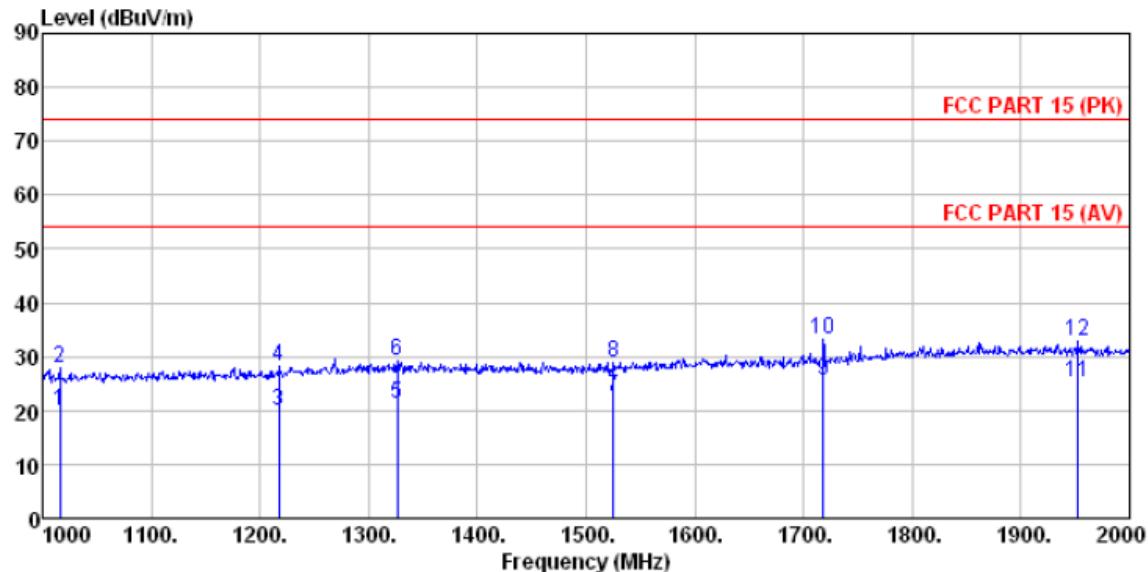

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m VULB9163 -2012-05 HORIZONTAL
 Job No. : 258RF
 Test Mode : Receiving mode
 Test Engineer: Edward

Freq	Read	Antenna	Cable	Preamp	Limit	Over	Remark	
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	1016.000	23.20	23.79	4.30	31.26	20.03	54.00	-33.97 Average
2	1016.000	30.94	23.79	4.30	31.26	27.77	74.00	-46.23 Peak
3	1217.000	22.40	24.53	4.48	31.49	19.92	54.00	-34.08 Average
4	1217.000	30.72	24.53	4.48	31.49	28.24	74.00	-45.76 Peak
5	1326.000	22.70	25.60	4.56	31.60	21.26	54.00	-32.74 Average
6	1326.000	30.52	25.60	4.56	31.60	29.08	74.00	-44.92 Peak
7	1525.000	23.86	25.59	4.70	31.71	22.44	54.00	-31.56 Average
8	1525.000	30.45	25.59	4.70	31.71	29.03	74.00	-44.97 Peak
9	1718.000	25.83	26.36	4.81	31.44	25.56	54.00	-28.44 Average
10	1718.000	33.64	26.36	4.81	31.44	33.37	74.00	-40.63 Peak
11	1952.000	23.74	27.70	4.93	31.15	25.22	54.00	-28.78 Average
12	1952.000	31.56	27.70	4.93	31.15	33.04	74.00	-40.96 Peak

Vertical:

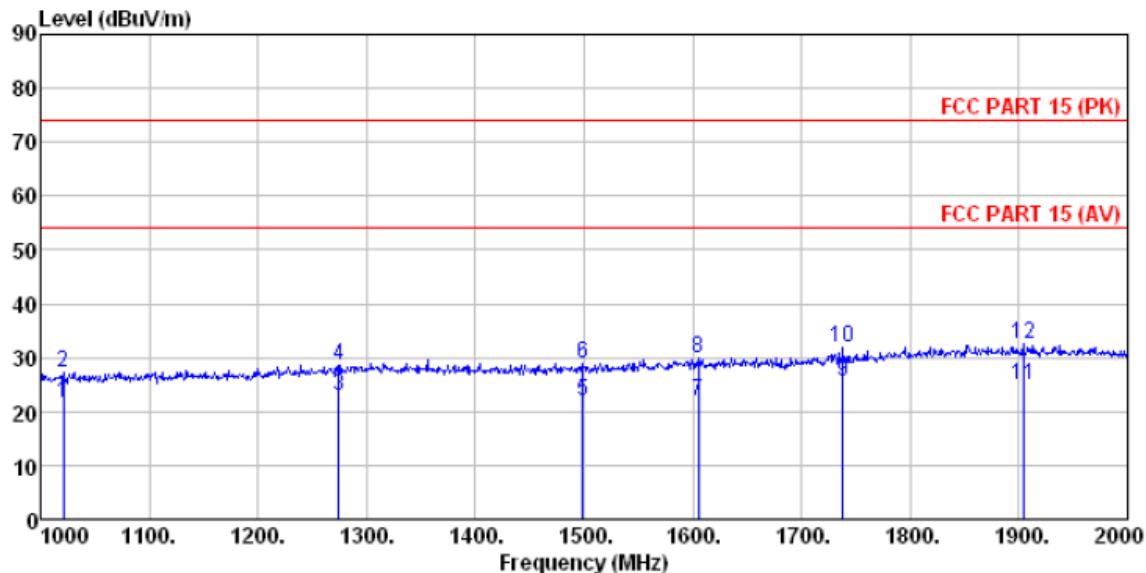

Site : 3m chamber

Condition : FCC PART 15 (PK) 3m VULB9163 -2012-05 VERTICAL

Job No. : 258RF



Test Mode : Receiving mode

Test Engineer: Edward


Freq	ReadAntenna		Cable Preamp		Limit Level	Over Line	Remark	
	MHz	Level	Factor	Loss				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	1021.000	24.70	23.81	4.31	31.27	21.55	54.00	-32.45 Average
2	1021.000	30.53	23.81	4.31	31.27	27.38	74.00	-46.62 Peak
3	1274.000	24.51	25.31	4.52	31.55	22.79	54.00	-31.21 Average
4	1274.000	30.28	25.31	4.52	31.55	28.56	74.00	-45.44 Peak
5	1499.000	23.60	25.48	4.68	31.75	22.01	54.00	-31.99 Average
6	1499.000	30.49	25.48	4.68	31.75	28.90	74.00	-45.10 Peak
7	1605.000	22.63	25.99	4.75	31.60	21.77	54.00	-32.23 Average
8	1605.000	30.71	25.99	4.75	31.60	29.85	74.00	-44.15 Peak
9	1738.000	25.41	26.66	4.82	31.42	25.47	54.00	-28.53 Average
10	1738.000	31.79	26.66	4.82	31.42	31.85	74.00	-42.15 Peak
11	1904.000	23.10	27.98	4.91	31.21	24.78	54.00	-29.22 Average
12	1904.000	30.97	27.98	4.91	31.21	32.65	74.00	-41.35 Peak


8 Test Setup Photo



Radiated Emission

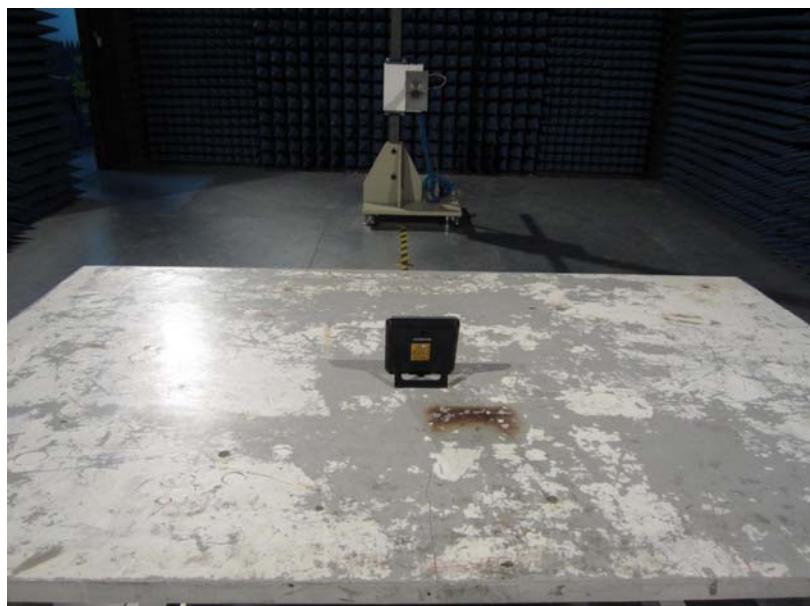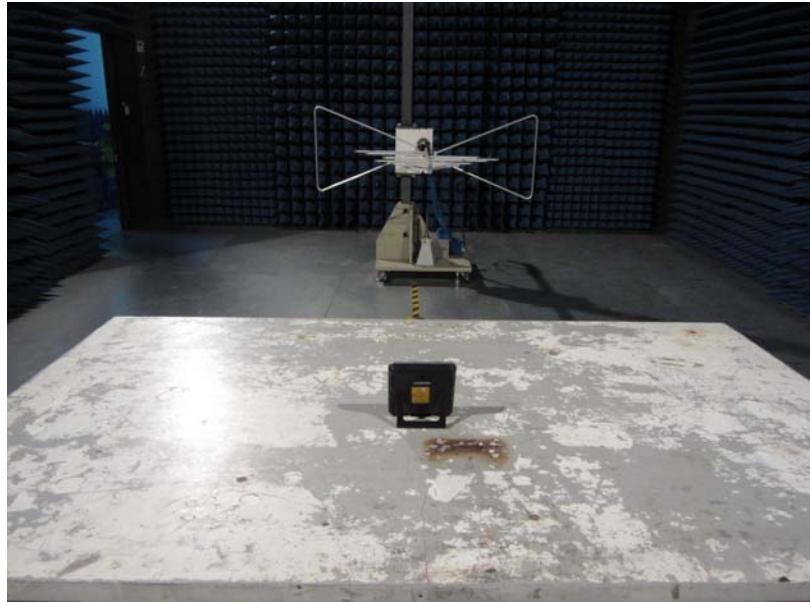



9 EUT Constructional Details

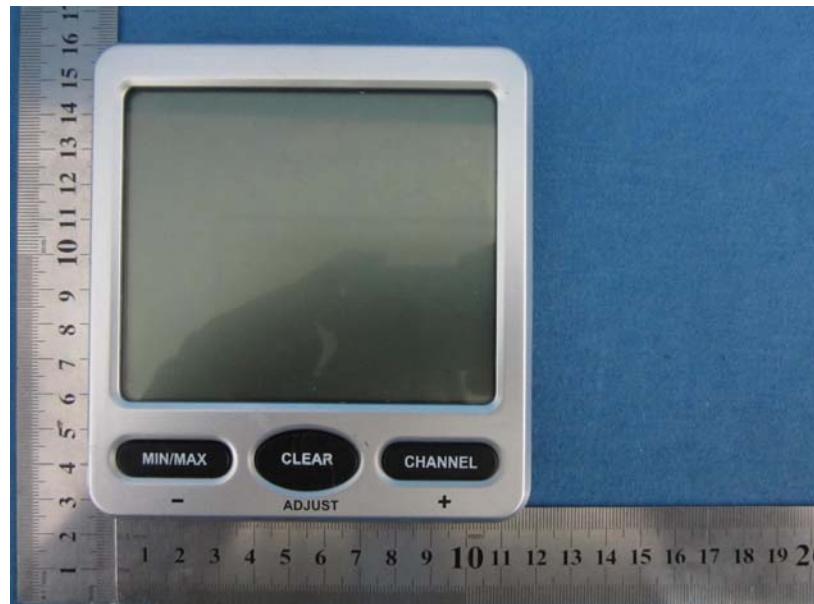

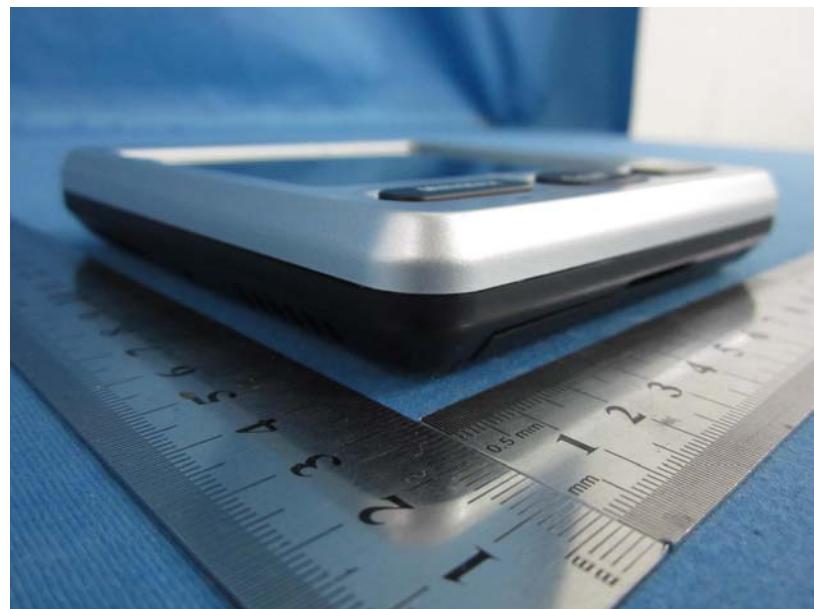

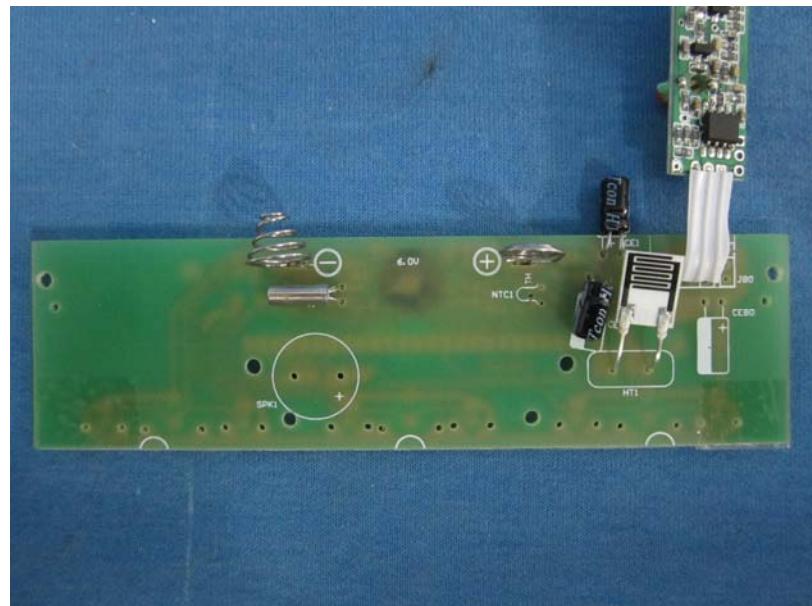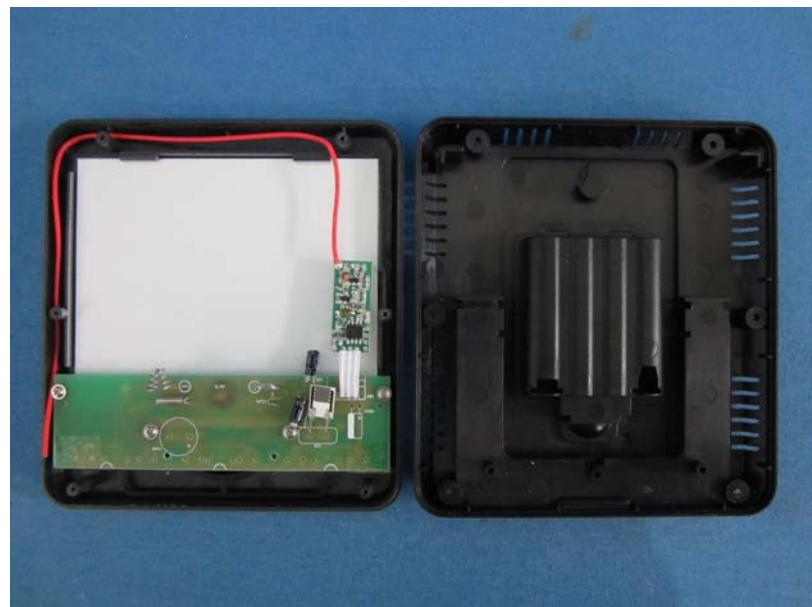

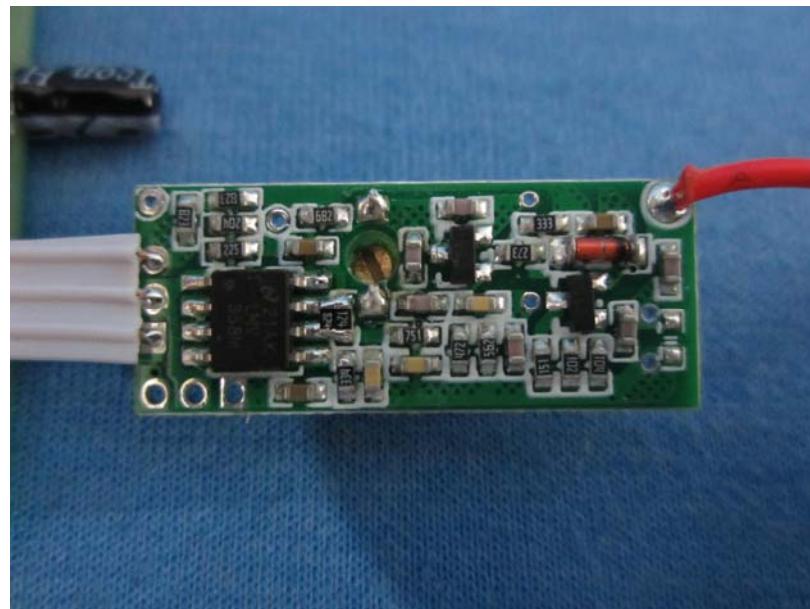

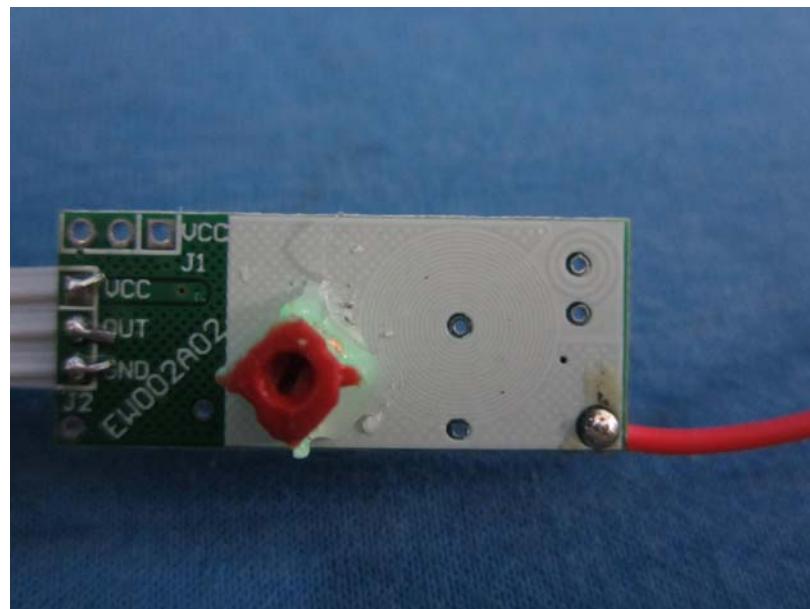

----- end -----