

**MEASUREMENT 3****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	High
Signal	GSM

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	1909.800000
Relative permittivity (real part)	40.205999
Relative permittivity (imaginary part)	13.669900
Conductivity (S/m)	1.420413
Variation (%)	-0.030000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	41.05, 42.35, 55.45
Crest factor:	1:8



SURFACE SAR

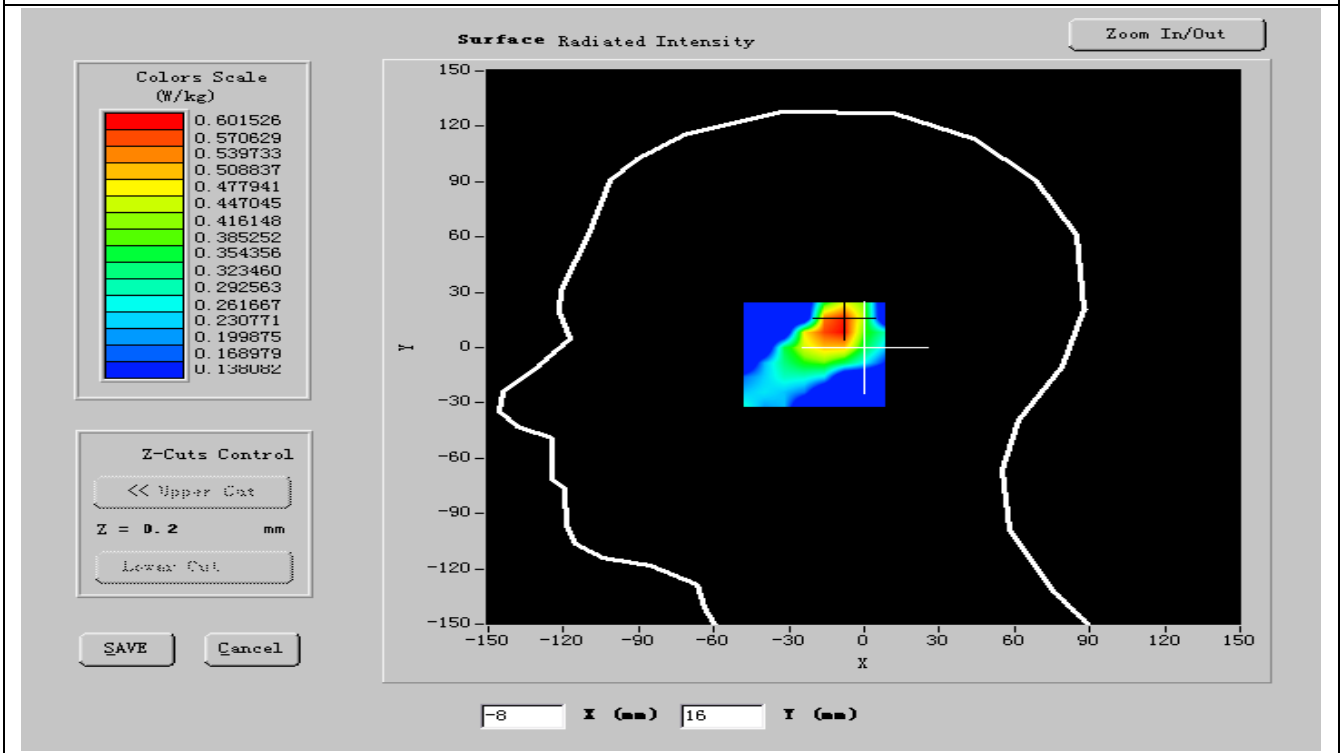

VOLUME SAR

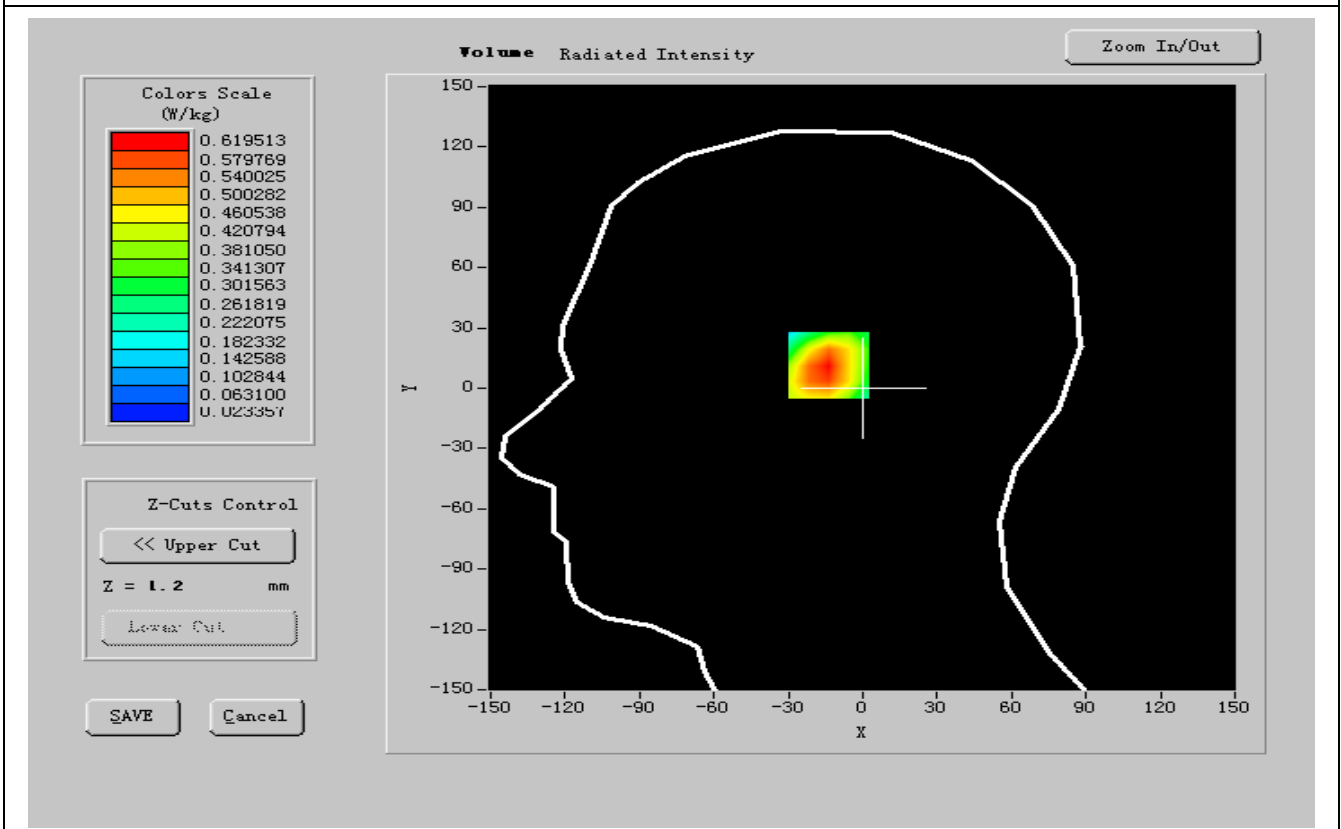




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.348952
SAR 1g (W/Kg)	0.573654

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.5736	0.3422	0.2264	0.1724	0.0889	0.0021

SAR, Z Axis Scan (X = -10, Y = 12)

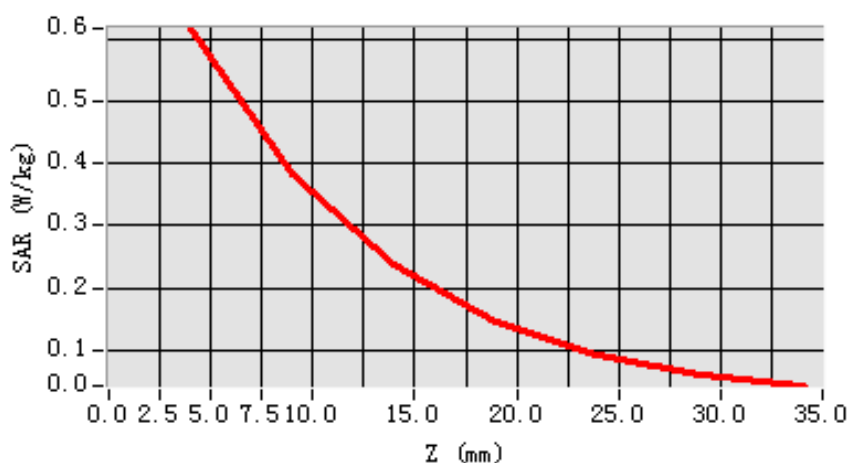

**MEASUREMENT 4****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Right head
Device Position	Tilt
Band	GSM1900
Channels	Low
Signal	GSM

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	1850.200000
Relative permittivity (real part)	40.213000
Relative permittivity (imaginary part)	13.584900
Conductivity (S/m)	1.426657
Variation (%)	-1.400000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	41.05, 42.35, 55.45
Crest factor:	1:8



SURFACE SAR

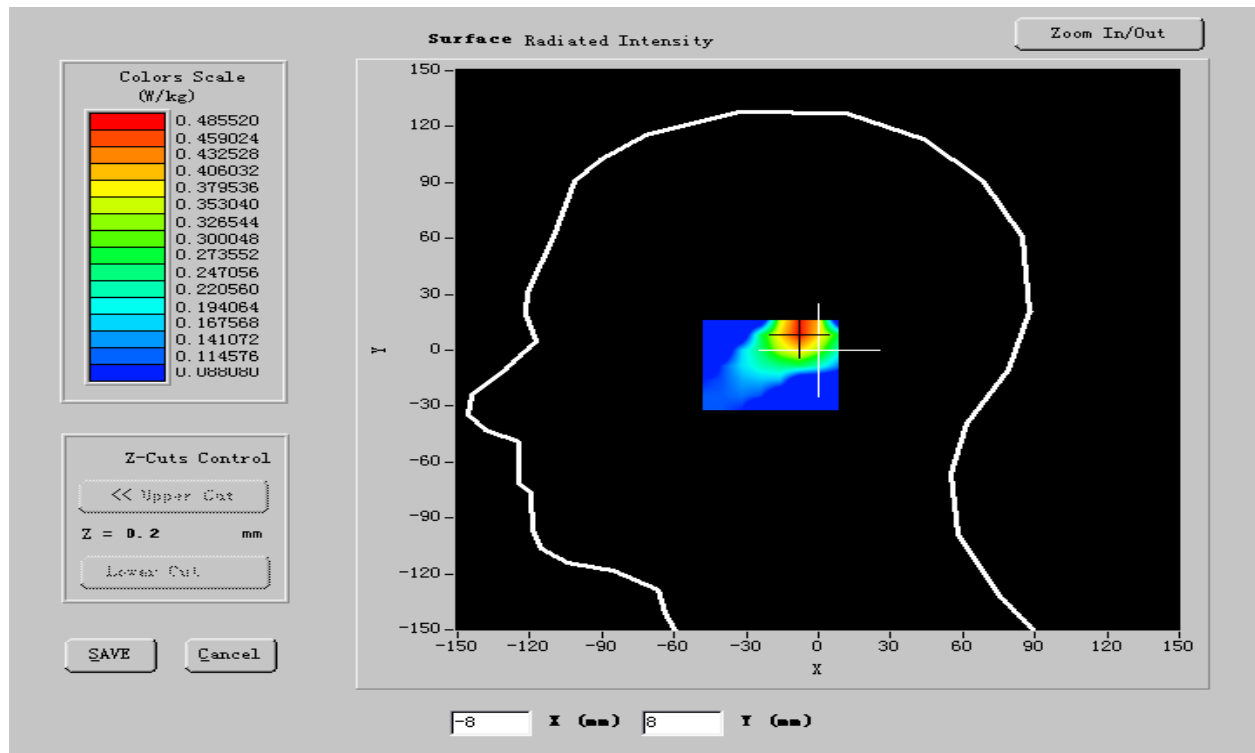

VOLUME SAR

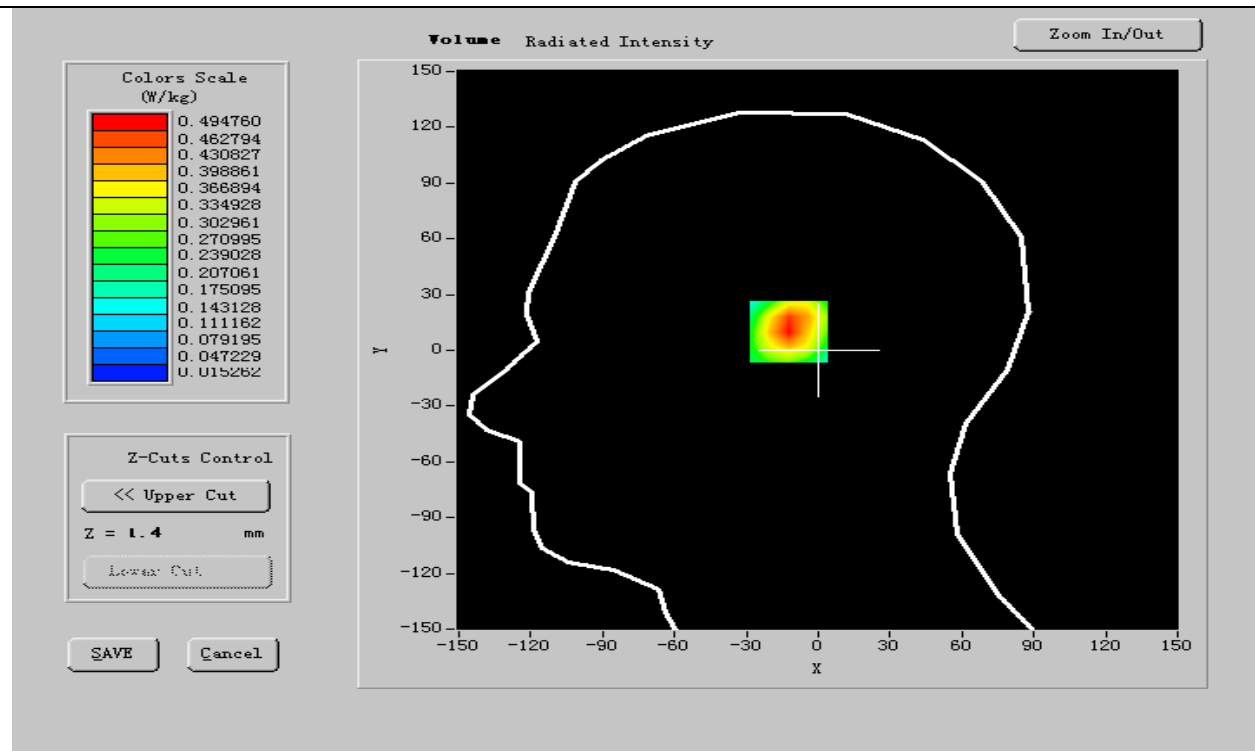




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.259871
SAR 1g (W/Kg)	0.456381

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.4563	0.2922	0.1864	0.1124	0.0787	0.0011

SAR, Z Axis Scan (X = -8, Y = 10)

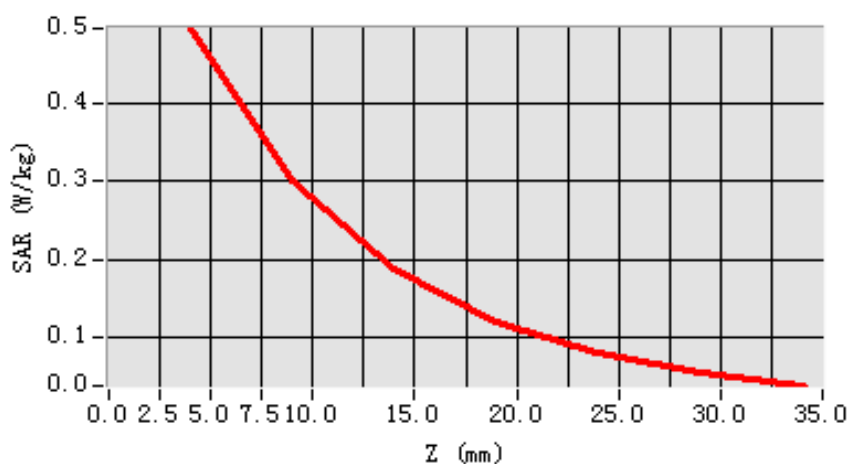

**MEASUREMENT 5****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Right head
Device Position	Tilt
Band	GSM1900
Channels	Middle
Signal	GSM

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.193001
Relative permittivity (imaginary part)	13.813800
Conductivity (S/m)	1.422173
Variation (%)	-0.420000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	41.05, 42.35, 55.45
Crest factor:	1:8



SURFACE SAR

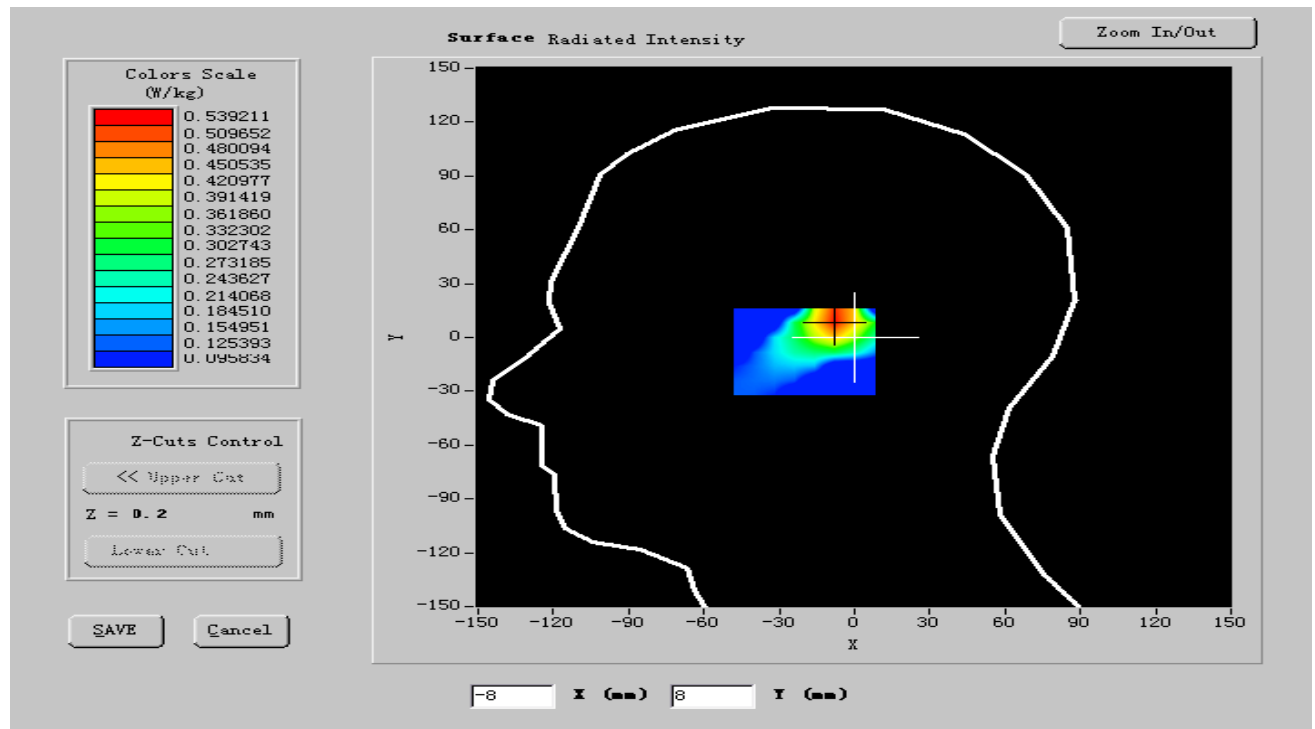

VOLUME SAR

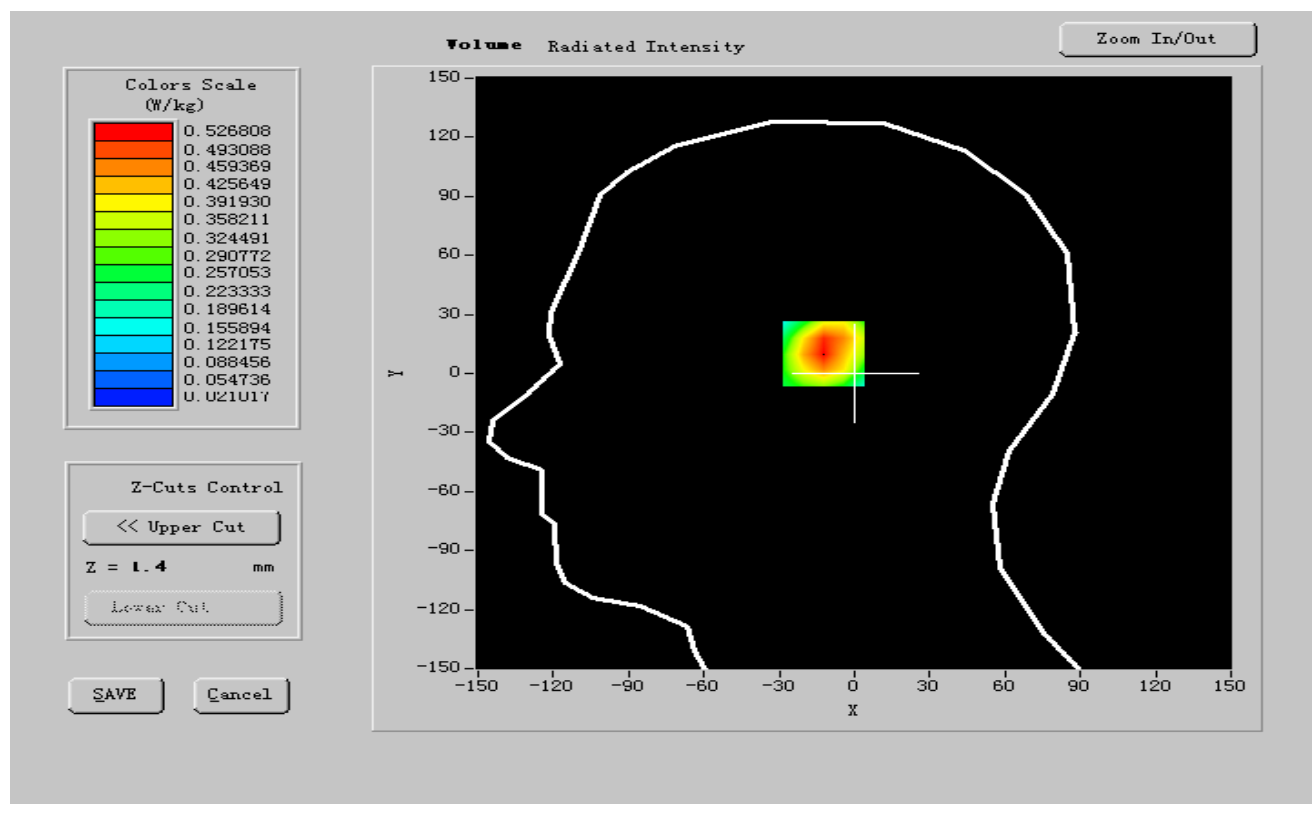




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.289652
SAR 1g (W/Kg)	0.481892

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.4818	0.3622	0.2064	0.1324	0.0887	0.0411

SAR, Z Axis Scan (X = -8, Y = 10)

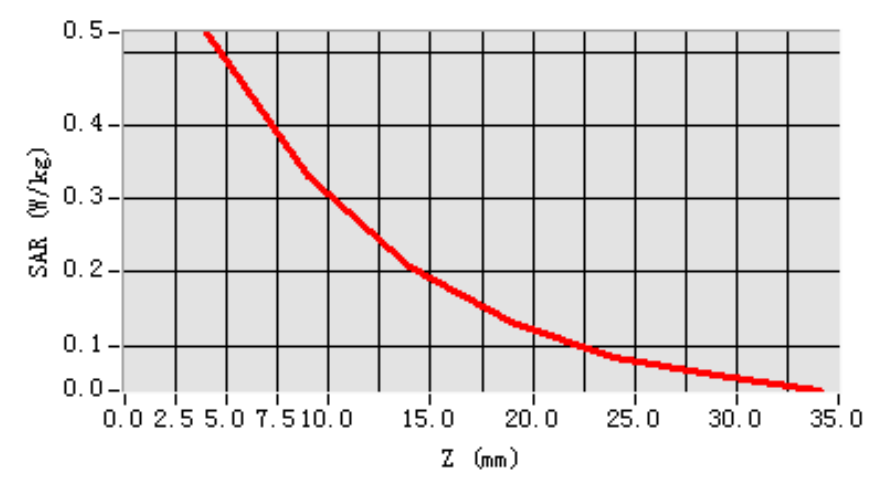

**MEASUREMENT 6****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Right head
Device Position	Tilt
Band	GSM1900
Channels	High
Signal	GSM

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	1909.800000
Relative permittivity (real part)	40.205999
Relative permittivity (imaginary part)	13.669900
Conductivity (S/m)	1.400224
Variation (%)	-1.500000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	41.05, 42.35, 55.45
Crest factor:	1:8



SURFACE SAR

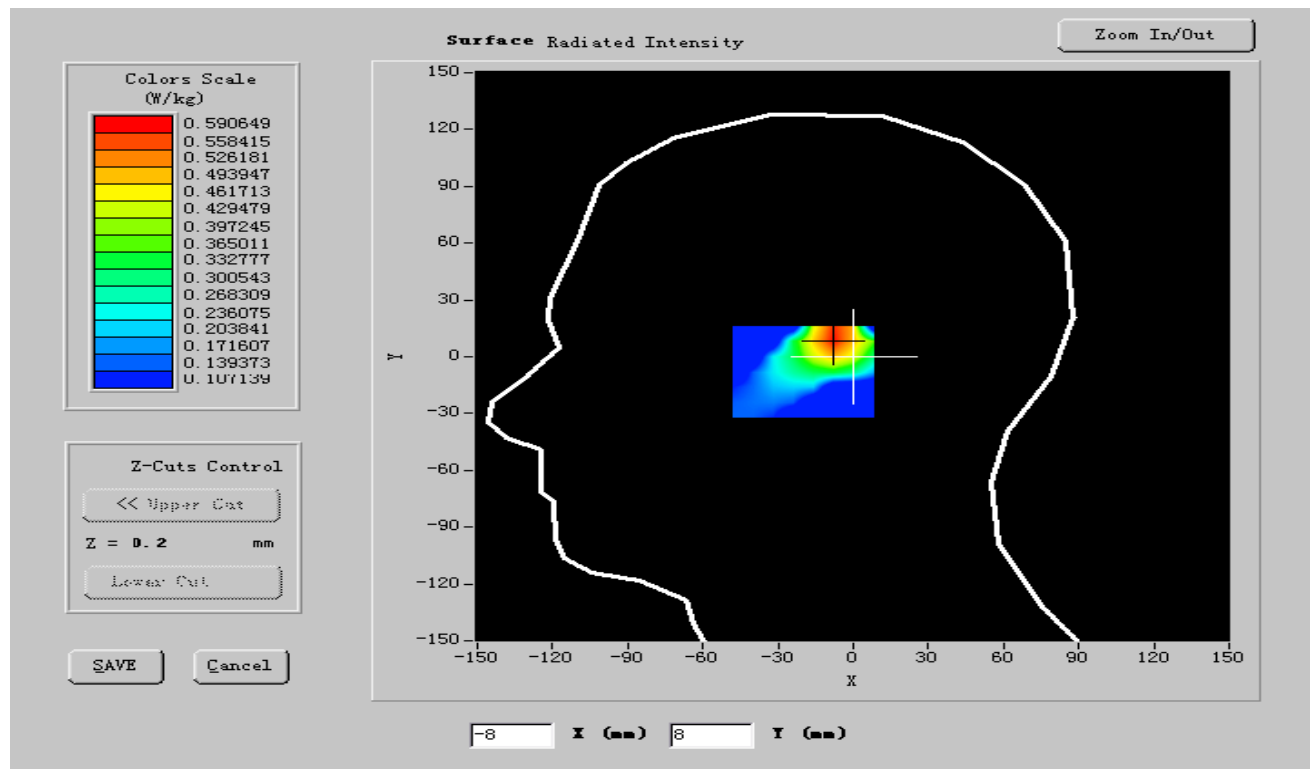

VOLUME SAR

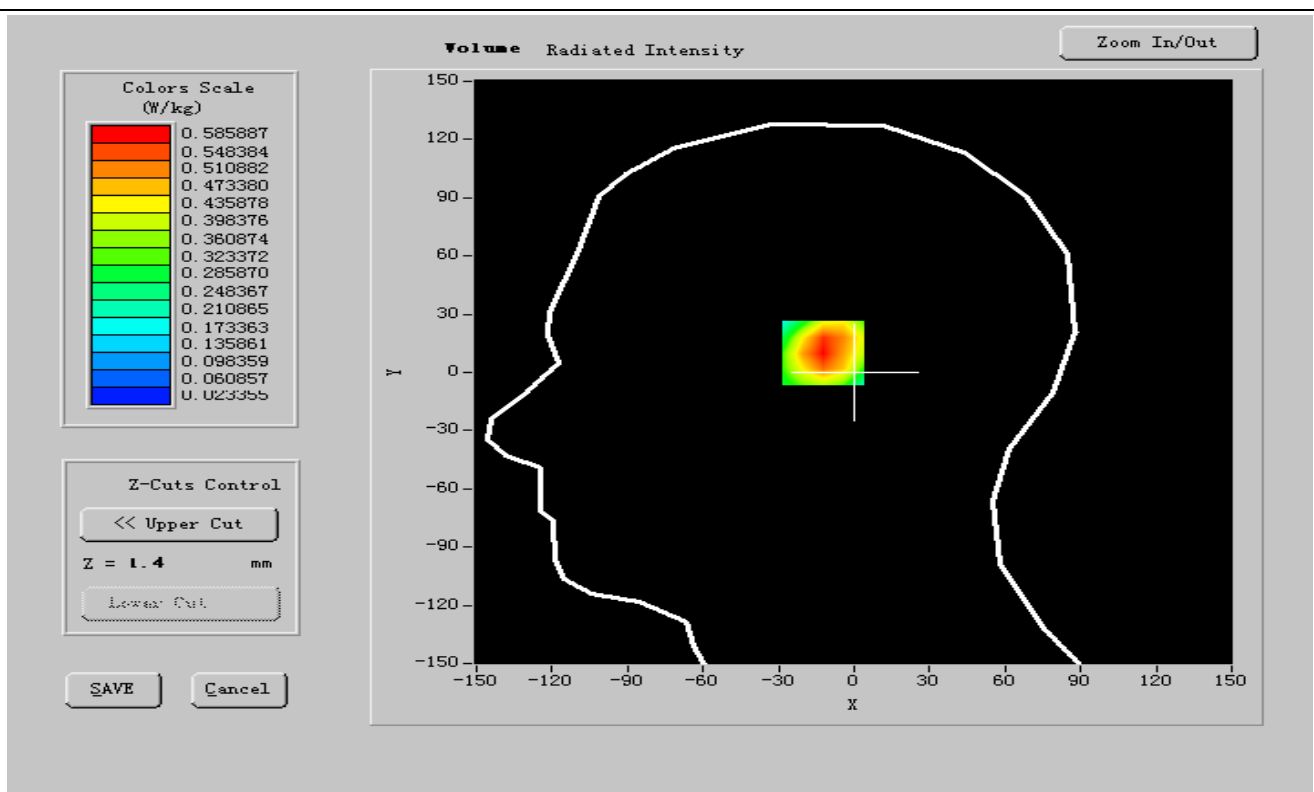




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.316982
SAR 1g (W/Kg)	0.535985

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.5359	0.3622	0.2064	0.1324	0.0864	0.0432

SAR, Z Axis Scan (X = -8, Y = 10)

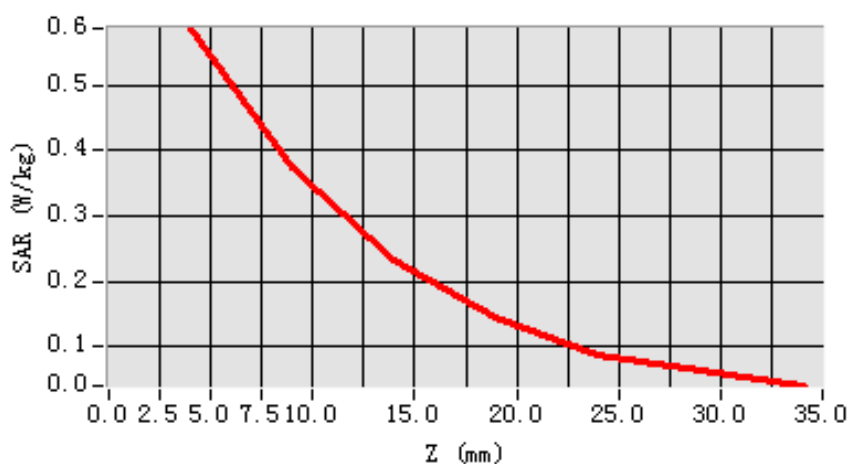

**MEASUREMENT 7****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels	Low
Signal	GSM

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	1850.200000
Relative permittivity (real part)	40.313000
Relative permittivity (imaginary part)	13.584900
Conductivity (S/m)	1.416528
Variation (%)	0.400000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	41.05, 42.35, 55.45
Crest factor:	1:8



SURFACE SAR

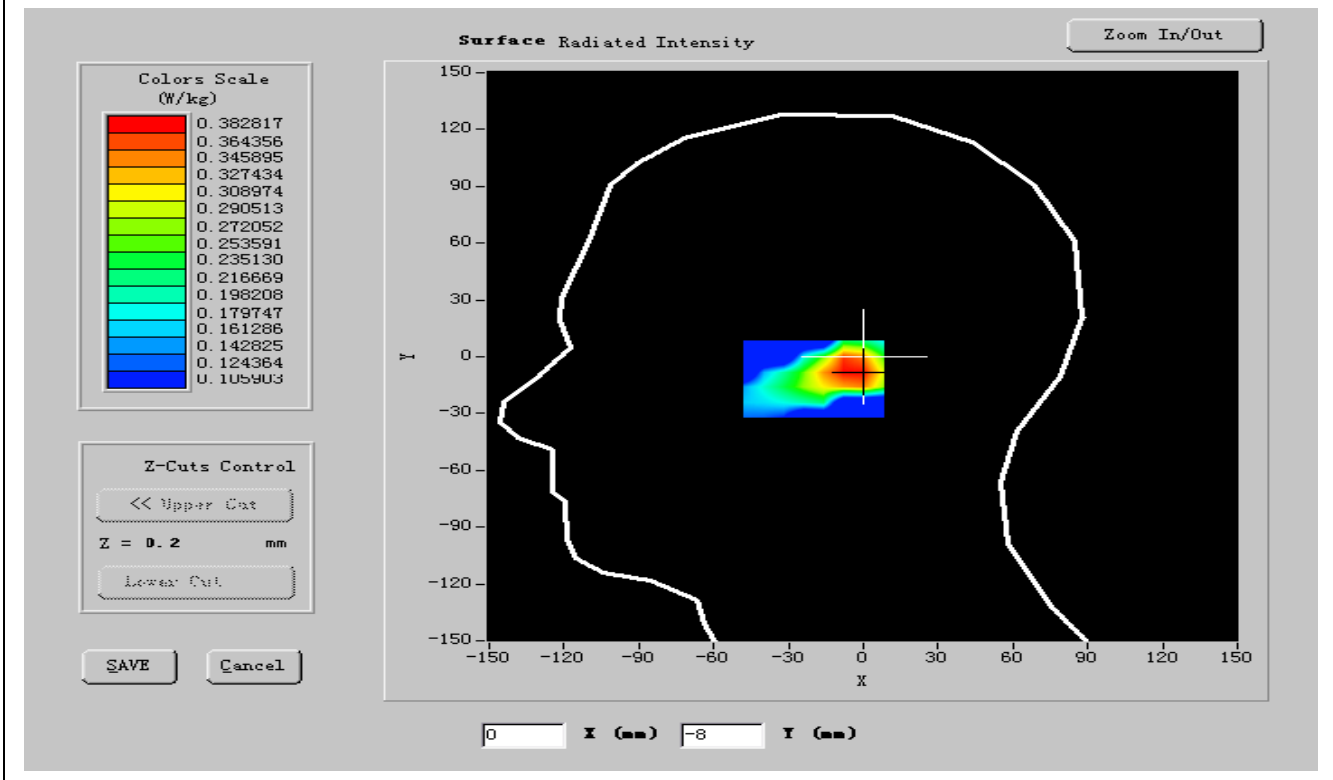

VOLUME SAR

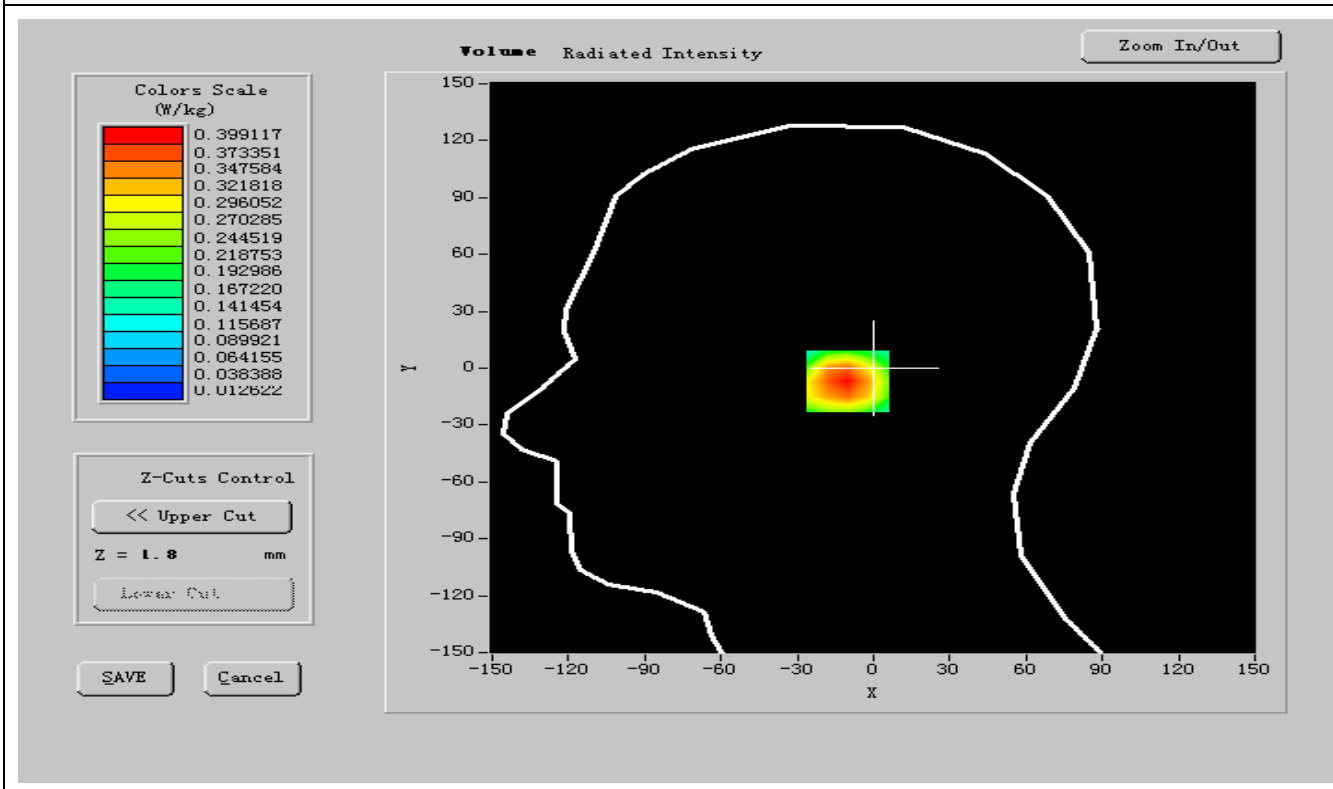




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.229650
SAR 1g (W/Kg)	0.361058

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.3610	0.2622	0.1764	0.1524	0.0764	0.0476

SAR, Z Axis Scan (X = -3, Y = -7)

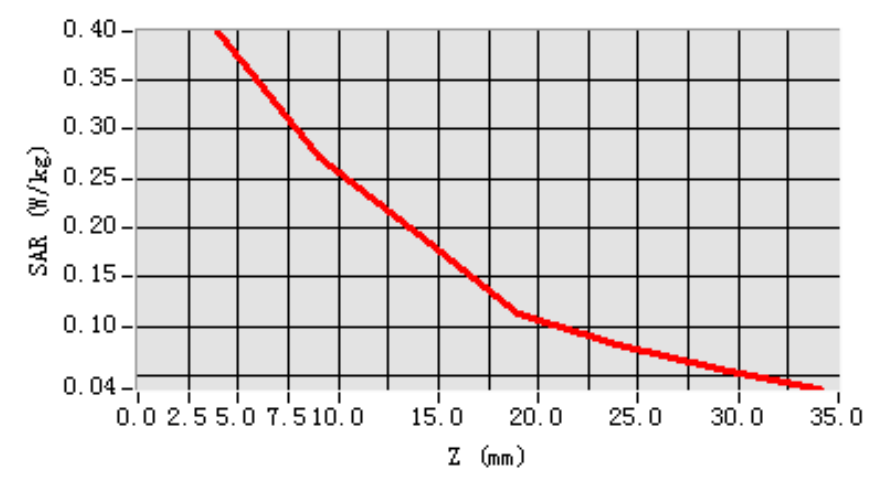

**MEASUREMENT 8****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels	Middle
Signal	GSM

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.193001
Relative permittivity (imaginary part)	13.813800
Conductivity (S/m)	1.412324
Variation (%)	1.300000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	41.05, 42.35, 55.45
Crest factor:	1:8



SURFACE SAR

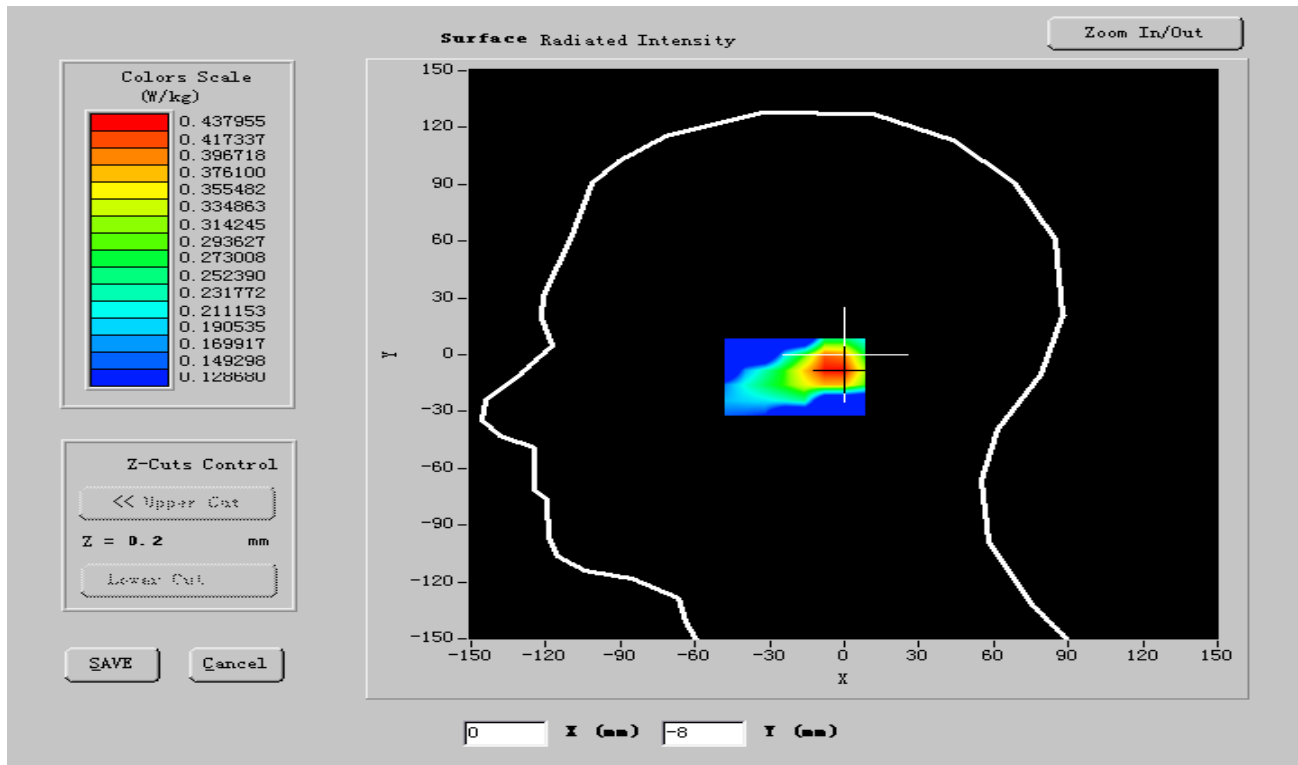

VOLUME SAR

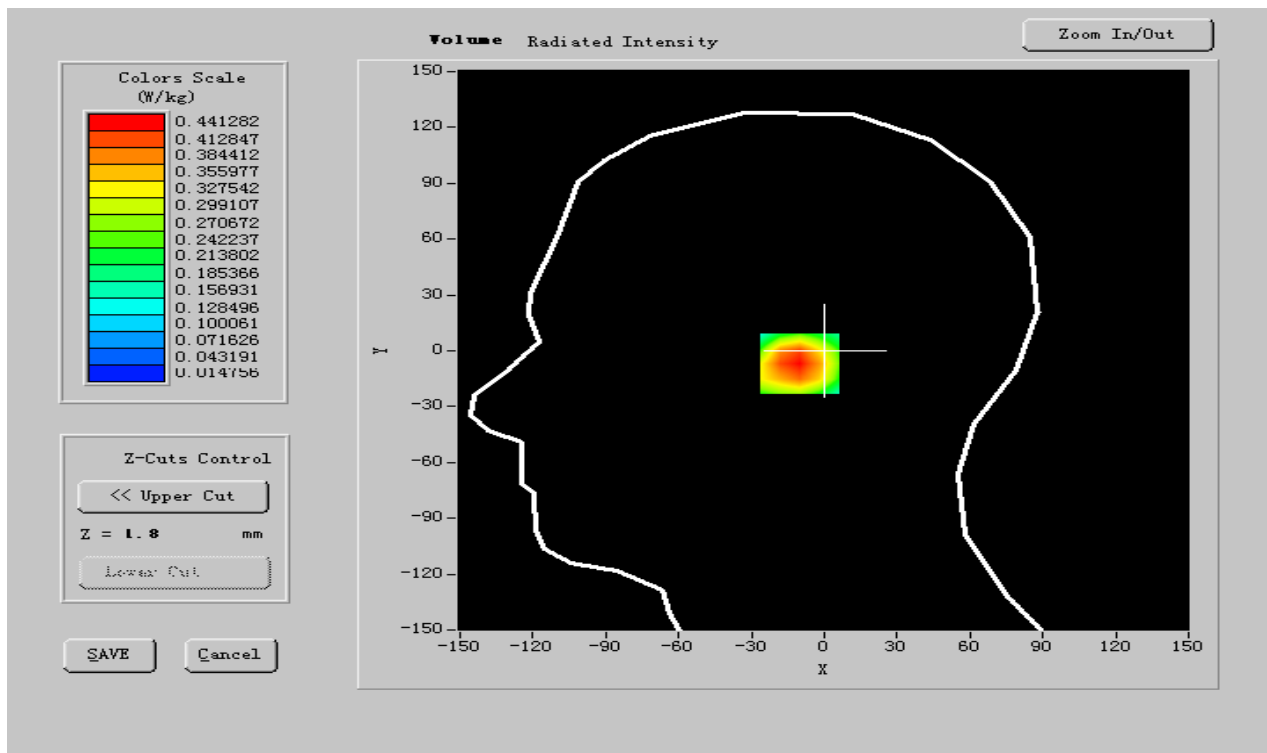




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.262184
SAR 1g (W/Kg)	0.423335

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.4233	0.2622	0.1764	0.1324	0.0664	0.0444

SAR, Z Axis Scan (X = -3, Y = -7)

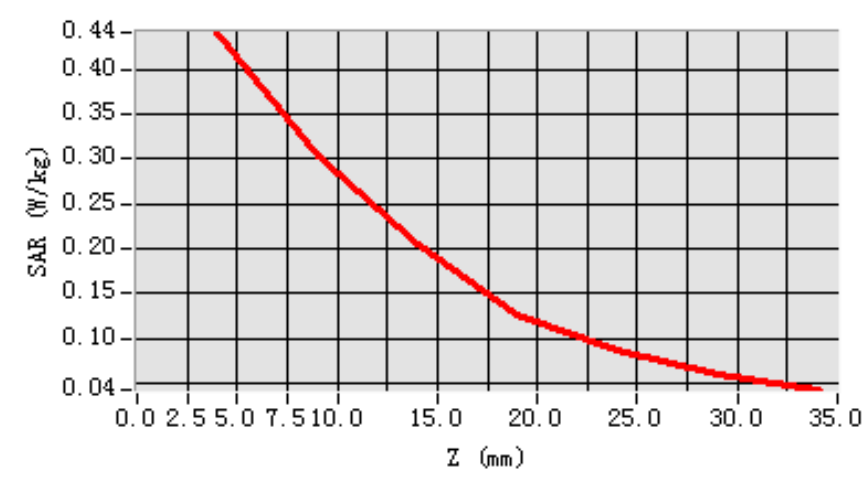

**MEASUREMENT 9****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels	High
Signal	GSM

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	1909.800000
Relative permittivity (real part)	40.285999
Relative permittivity (imaginary part)	13.669900
Conductivity (S/m)	1.410242
Variation (%)	0.400000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	41.05, 42.35, 55.45
Crest factor:	1:8



SURFACE SAR

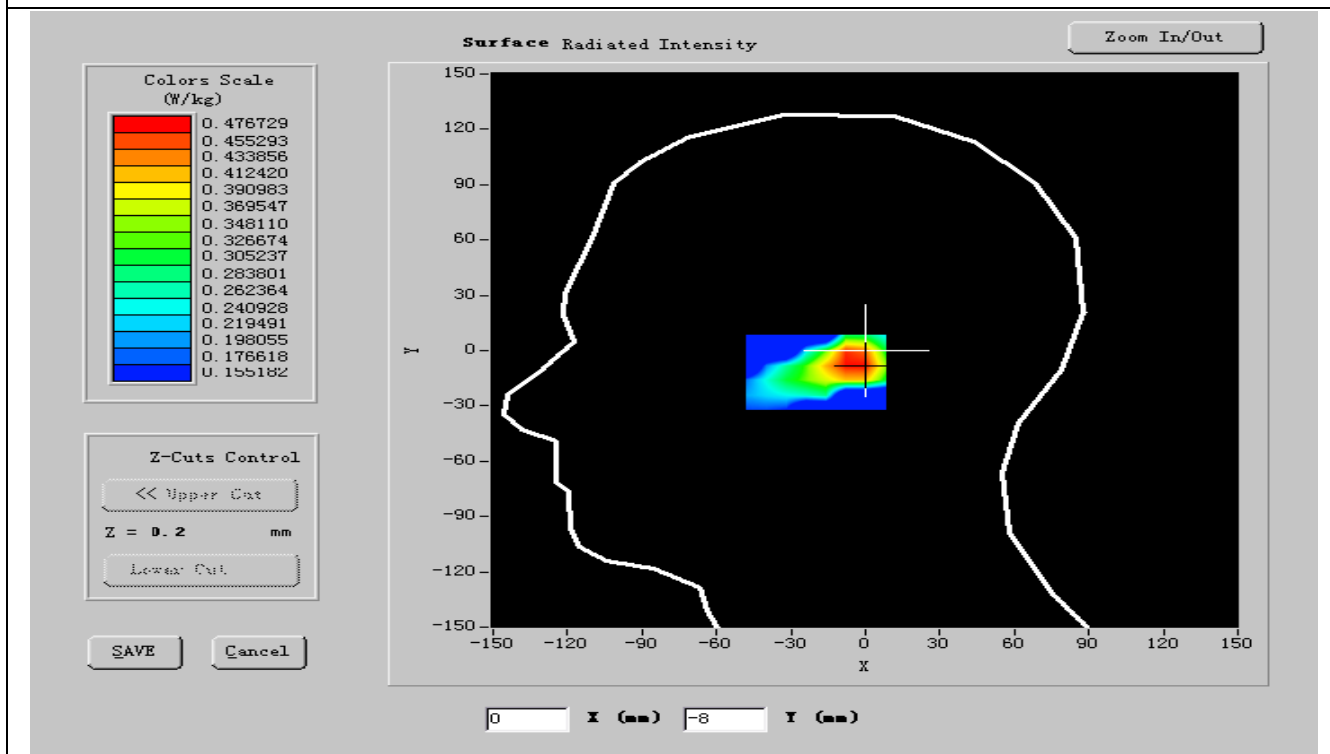

VOLUME SAR

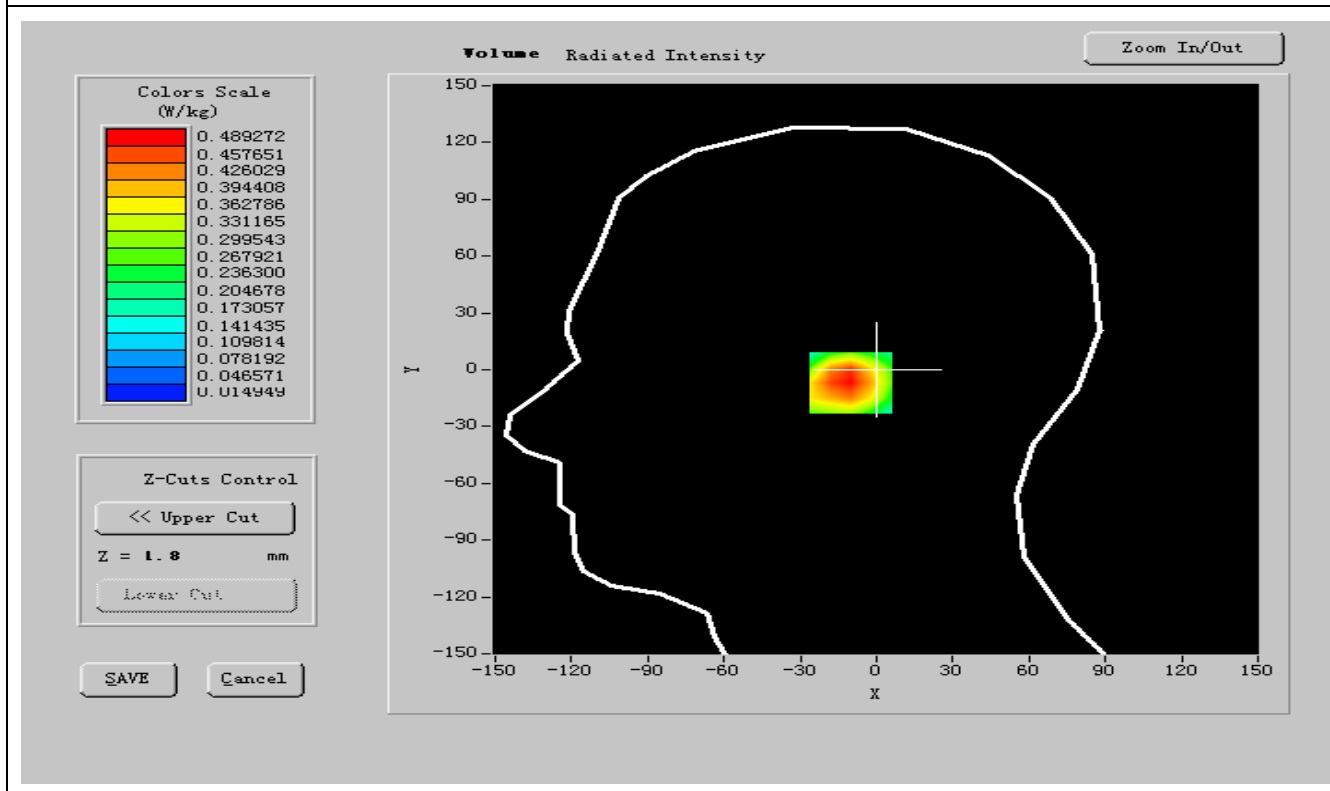




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.291874
SAR 1g (W/Kg)	0.449005

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.4490	0.3222	0.2164	0.1824	0.0864	0.0354

SAR, Z Axis Scan (X = -3, Y = -7)

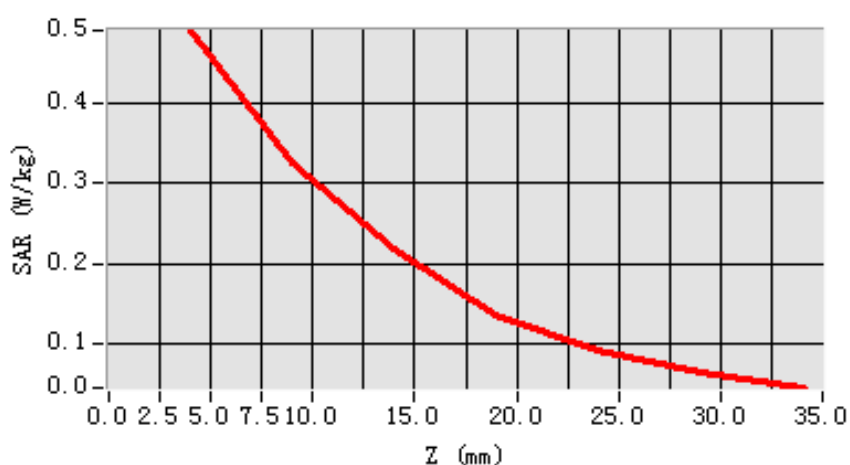

**MEASUREMENT 10****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Left head
Device Position	Tilt
Band	GSM1900
Channels	Low
Signal	GSM

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	1850.200000
Relative permittivity (real part)	40.313134
Relative permittivity (imaginary part)	13.584900
Conductivity (S/m)	1.416243
Variation (%)	-0.700000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	41.05, 42.35, 55.45
Crest factor:	1:8



SURFACE SAR

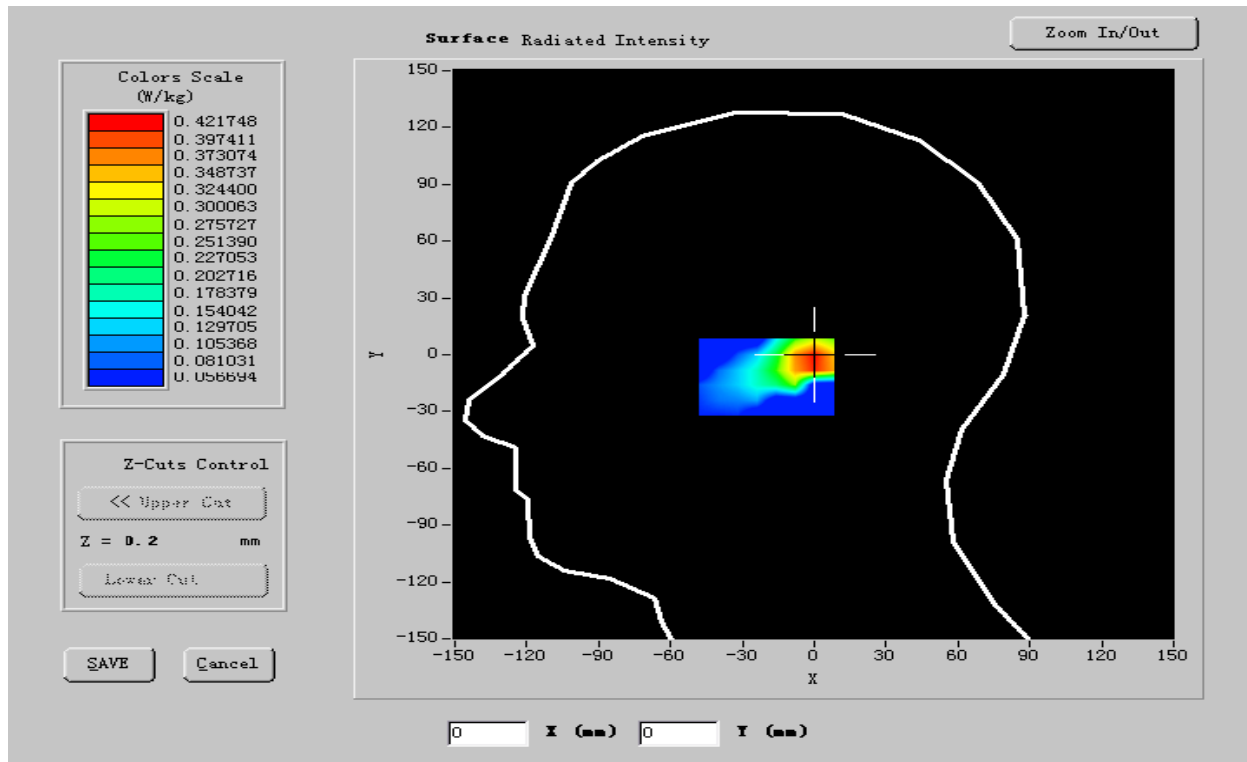

VOLUME SAR

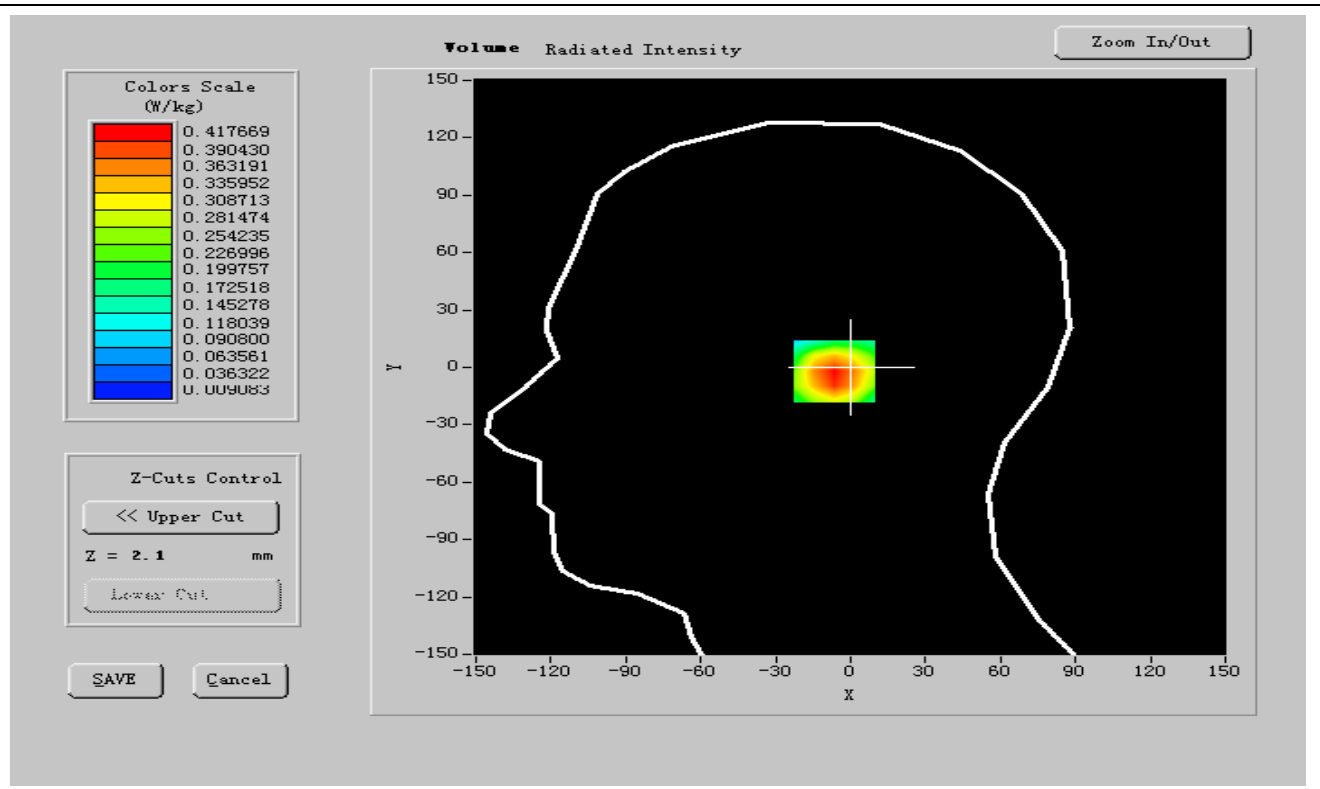




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.256978
SAR 1g (W/Kg)	0.403289

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.4032	0.3224	0.2134	0.1864	0.0864	0.0554

SAR, Z Axis Scan (X = 0, Y = -2)

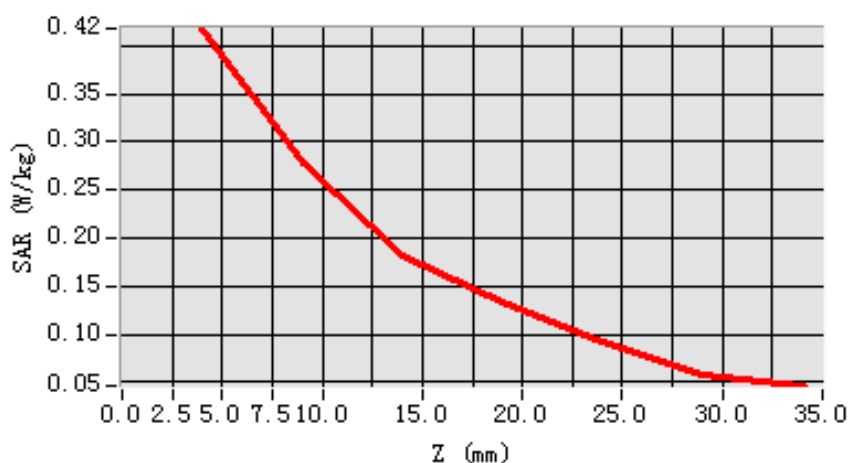

**MEASUREMENT 11****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Left head
Device Position	Tilt
Band	GSM1900
Channels	Middle
Signal	GSM

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.193001
Relative permittivity (imaginary part)	13.813800
Conductivity (S/m)	1.413245
Variation (%)	-1.100000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	41.05, 42.35, 55.45
Crest factor:	1:8



SURFACE SAR

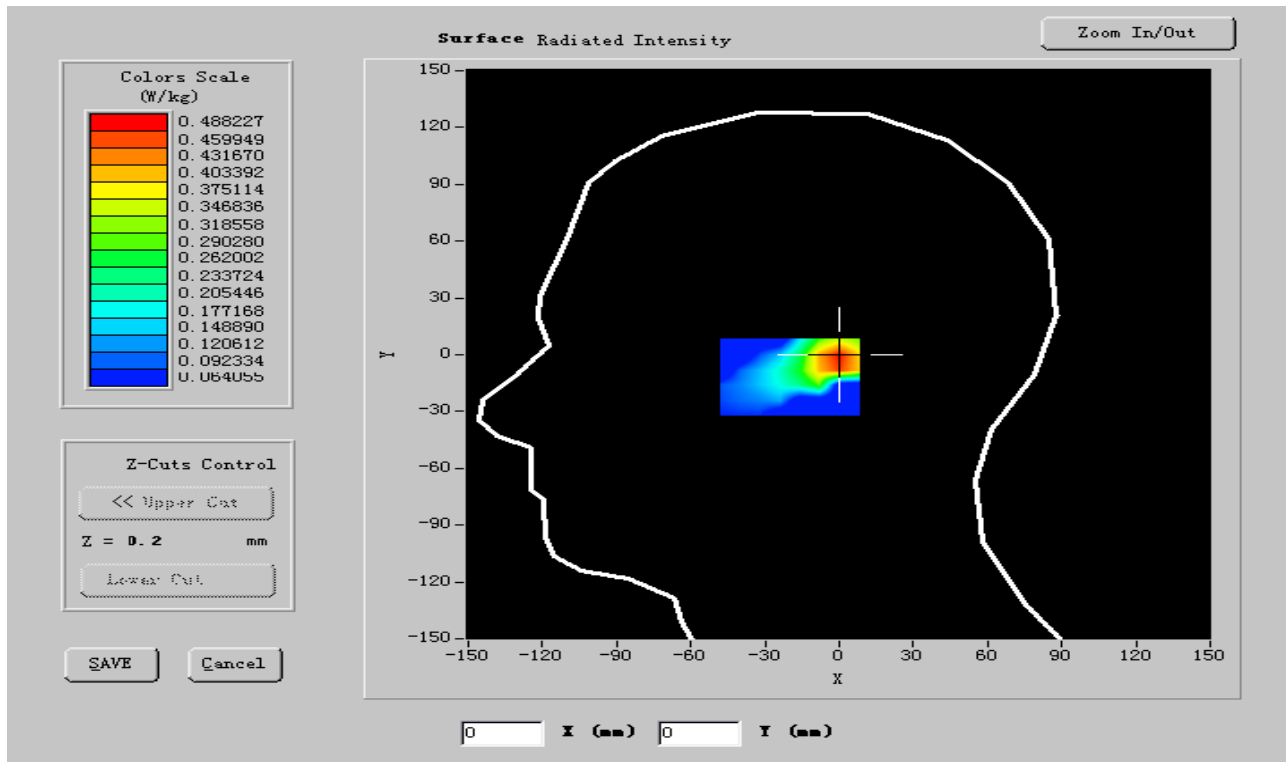

VOLUME SAR

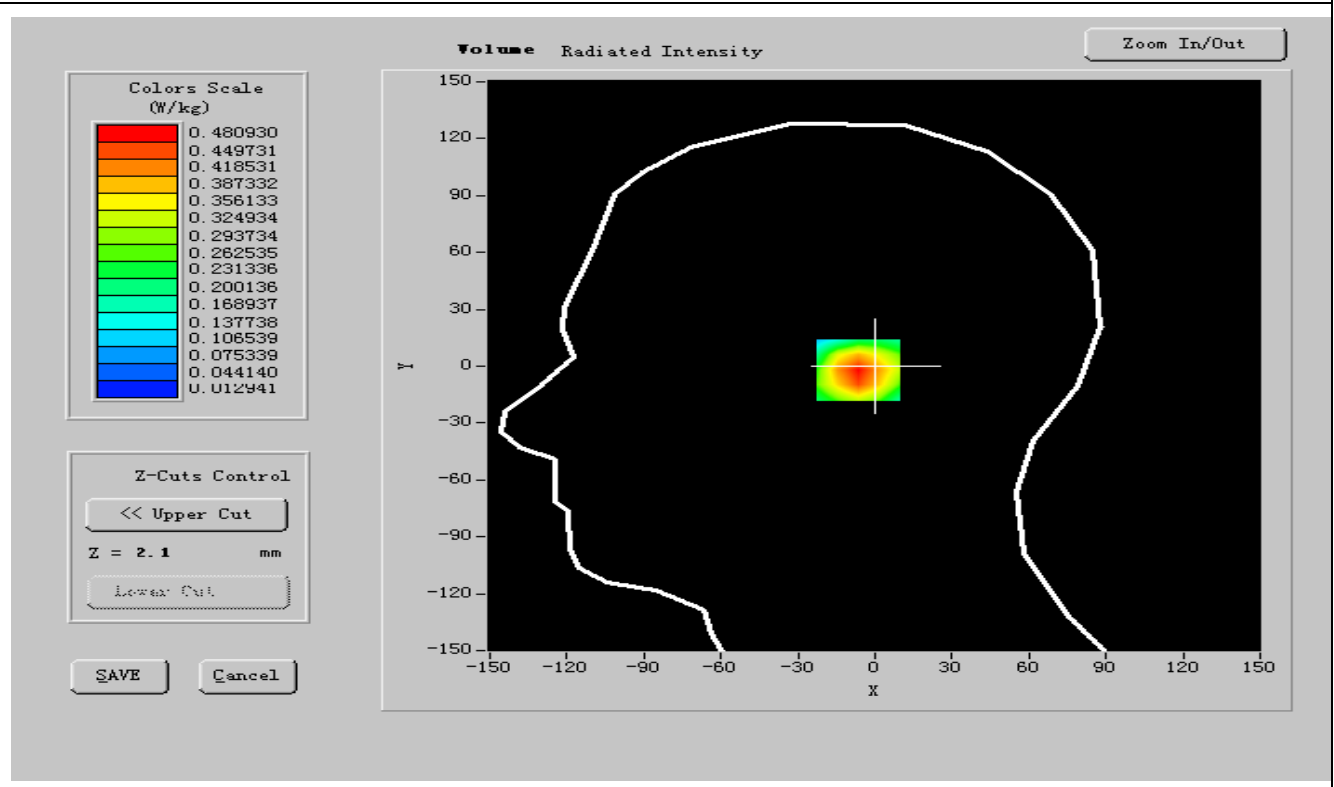




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.256123
SAR 1g (W/Kg)	0.446892

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.4468	0.3024	0.1934	0.1564	0.0864	0.0084

SAR, Z Axis Scan (X = 0, Y = -2)

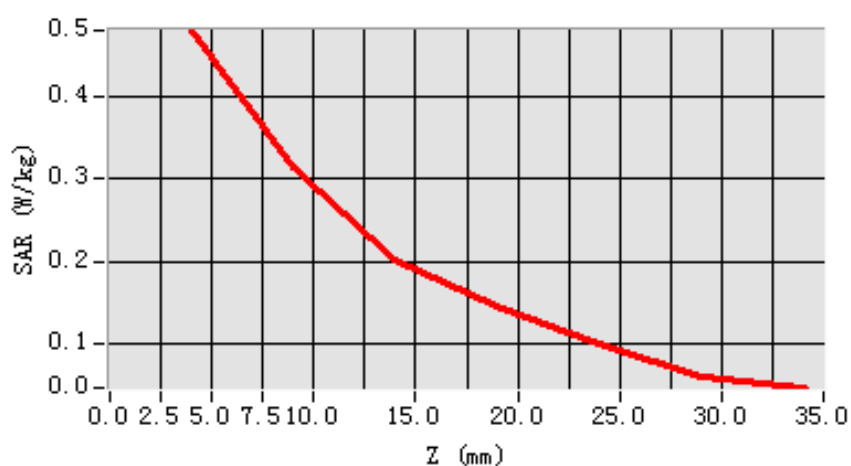

**MEASUREMENT 12****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Left head
Device Position	Tilt
Band	GSM1900
Channels	High
Signal	GSM

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	1909.800000
Relative permittivity (real part)	40.285999
Relative permittivity (imaginary part)	13.669900
Conductivity (S/m)	1.420225
Variation (%)	-1.130000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	41.05, 42.35, 55.45
Crest factor:	1:8



SURFACE SAR

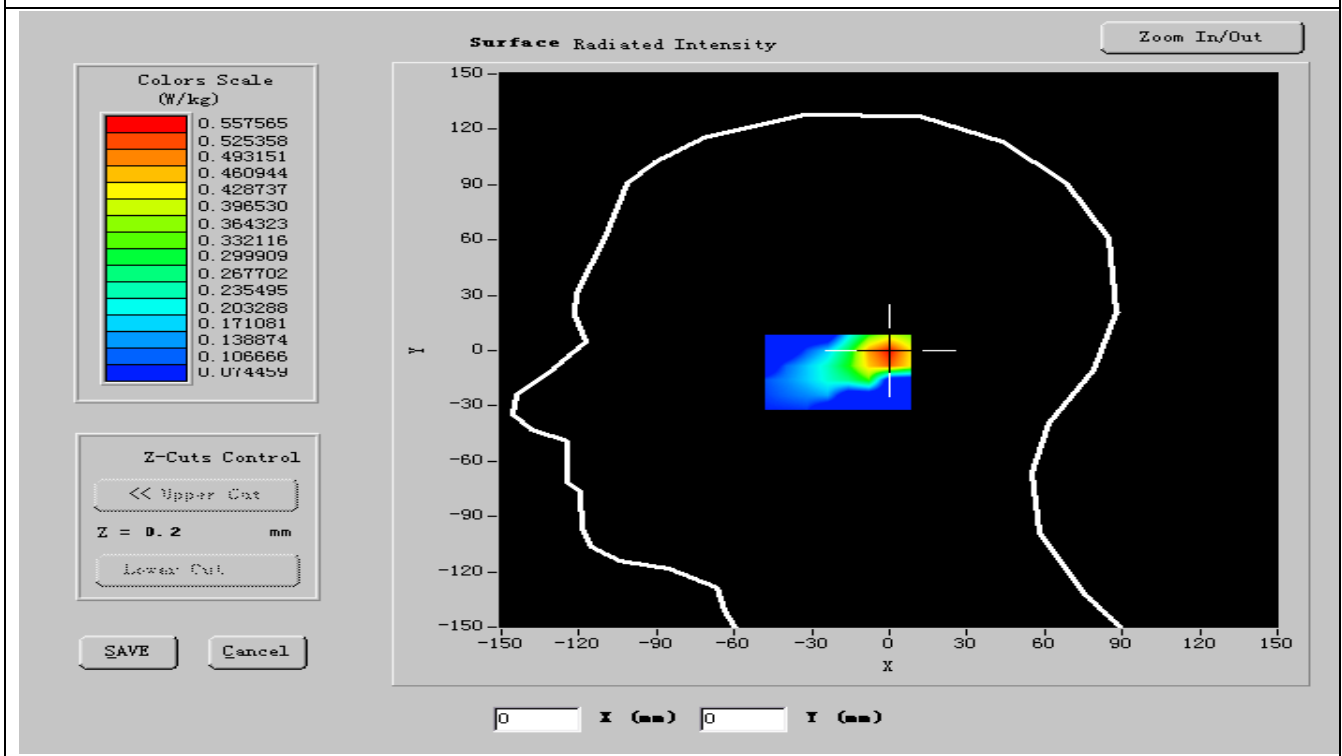

VOLUME SAR

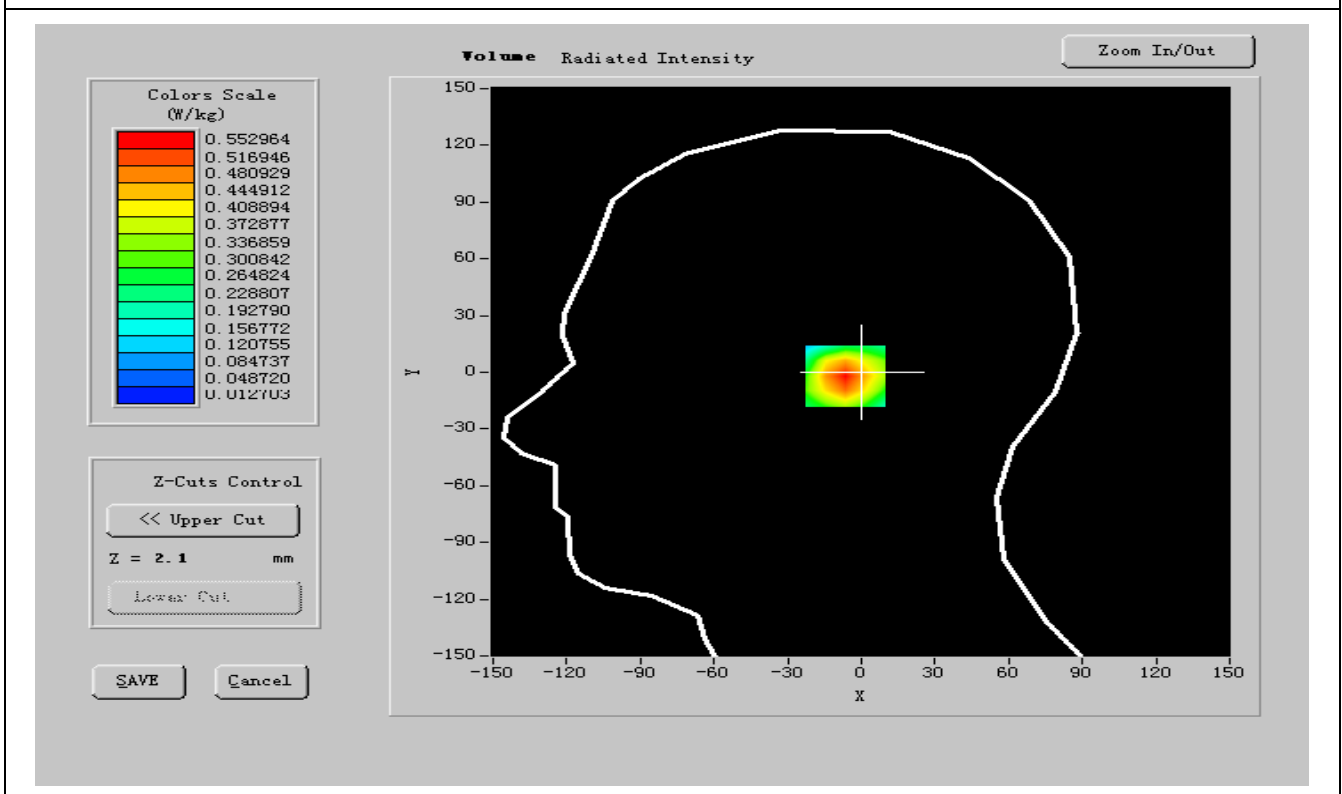




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.365651
SAR 1g (W/Kg)	0.487752

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.4877	0.3377	0.1934	0.1464	0.1264	0.0089

SAR, Z Axis Scan (X = 0, Y = -2)

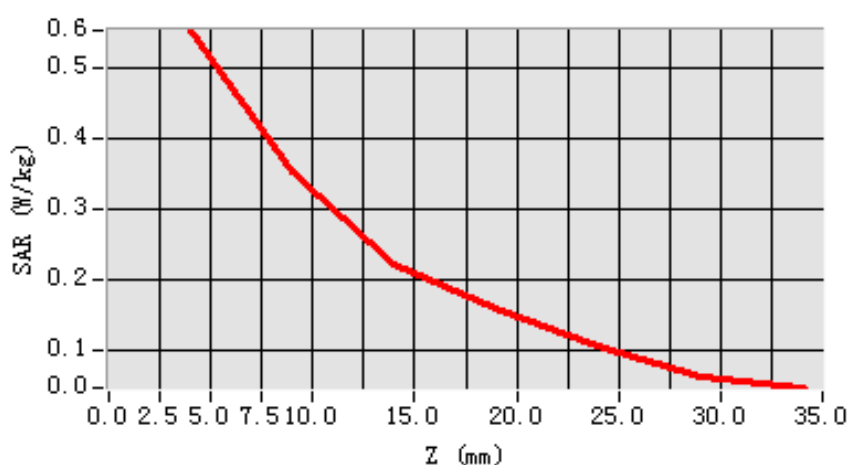

**MEASUREMENT 13****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	BackSide toward phantom
Band	GSM1900
Channels	Low
Signal	GSM

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	1850.200000
Relative permittivity (real part)	52.313000
Relative permittivity (imaginary part)	13.584900
Conductivity (S/m)	1.416522
Variation (%)	-0.130000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:8



SURFACE SAR

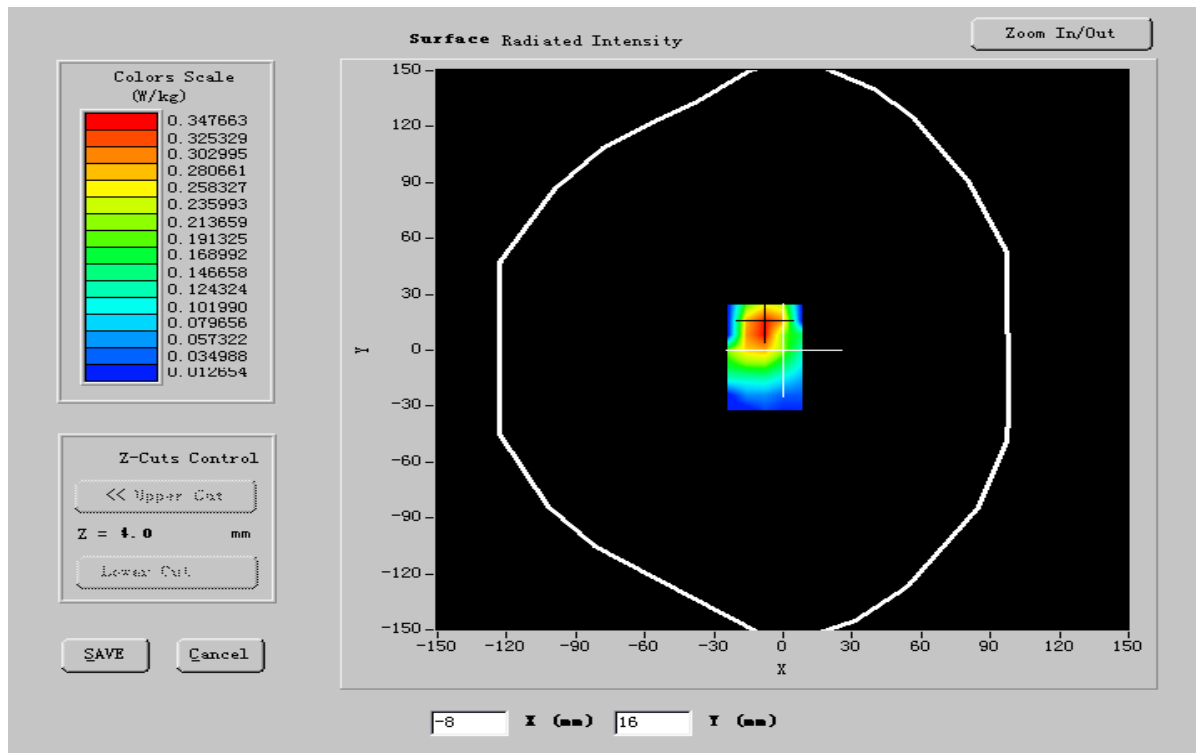

VOLUME SAR

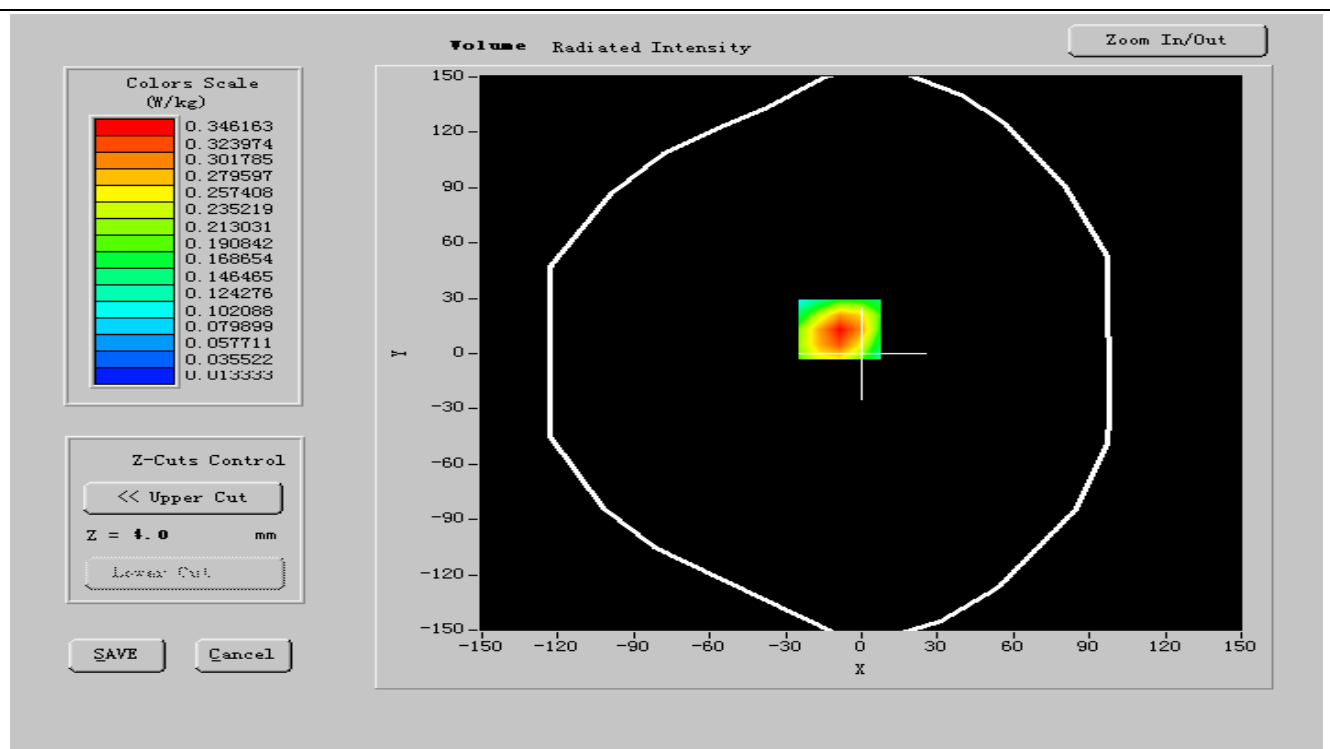




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.200652
SAR 1g (W/Kg)	0.313356

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.3133	0.2873	0.1934	0.1464	0.1264	0.0089

SAR, Z Axis Scan (X = -9, Y = 13)

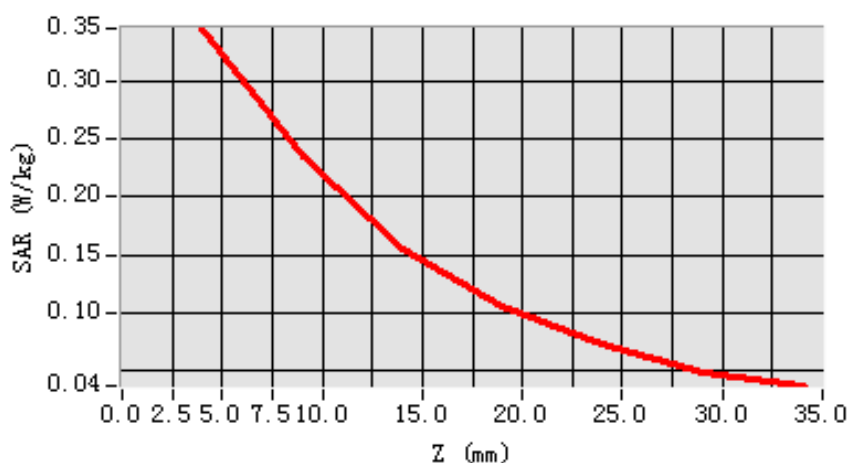

**MEASUREMENT 14****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	BackSide toward phantom
Band	GSM1900
Channels	Middle
Signal	GSM

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	1880.000000
Relative permittivity (real part)	52.893001
Relative permittivity (imaginary part)	13.813800
Conductivity (S/m)	1.512775
Variation (%)	-0.700000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:8



SURFACE SAR

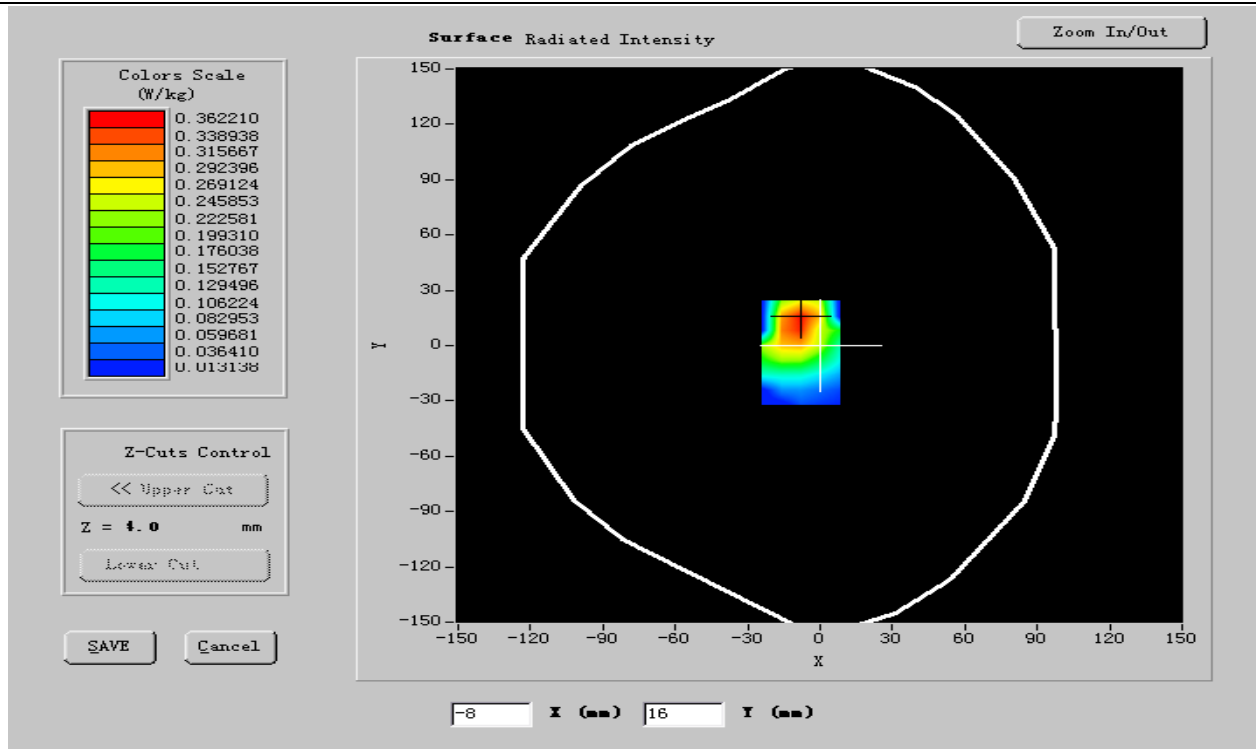

VOLUME SAR

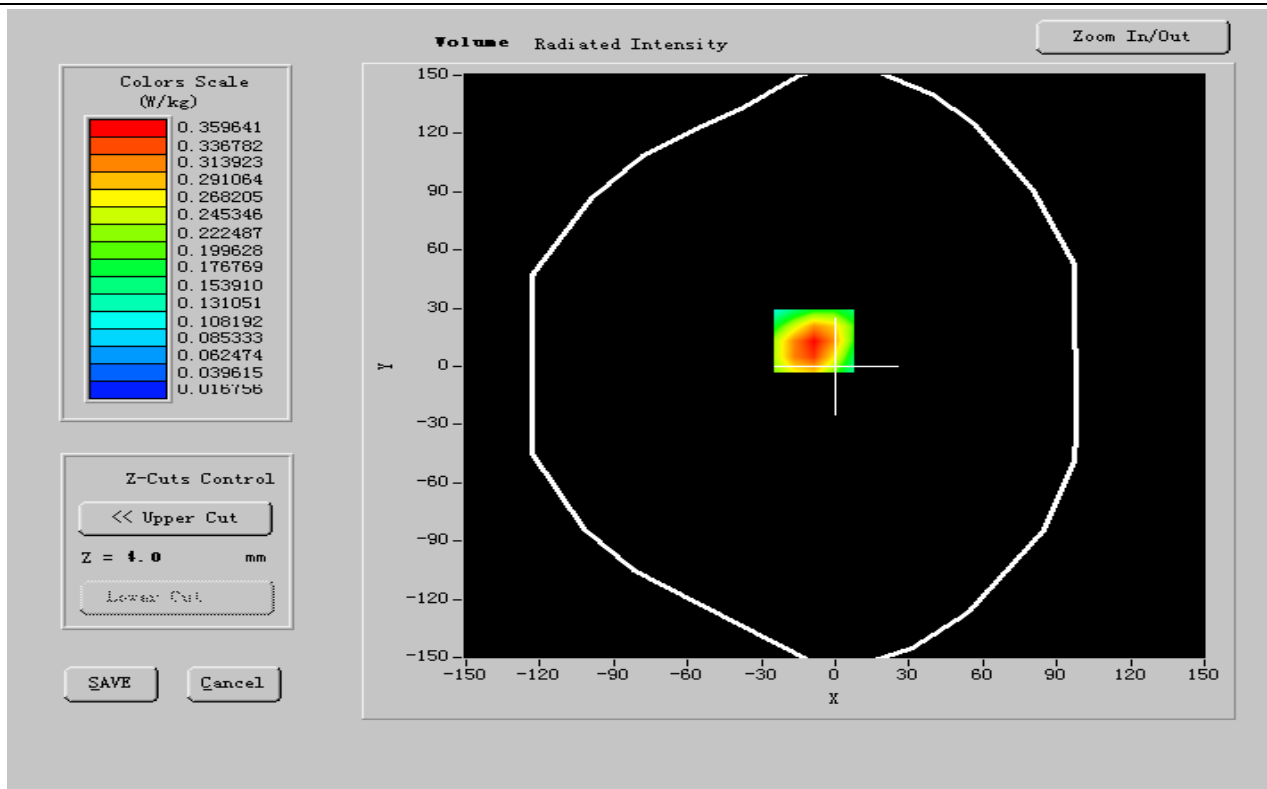




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.233691
SAR 1g (W/Kg)	0.325239

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.3152	0.2832	0.1923	0.1423	0.0932	0.0309

SAR, Z Axis Scan (X = -9, Y = 13)

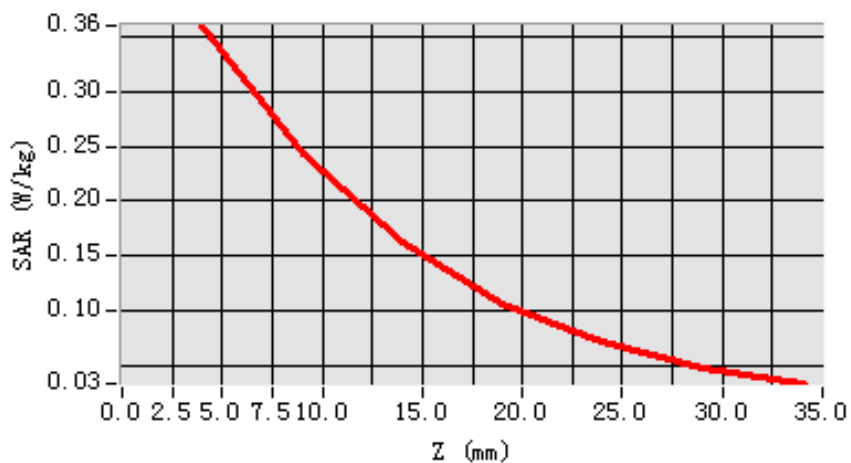

**MEASUREMENT 15****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	BackSide toward phantom
Band	GSM1900
Channels	High
Signal	GSM

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	1909.800000
Relative permittivity (real part)	52.885999
Relative permittivity (imaginary part)	13.669900
Conductivity (S/m)	1.510225
Variation (%)	-0.600000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:8



SURFACE SAR

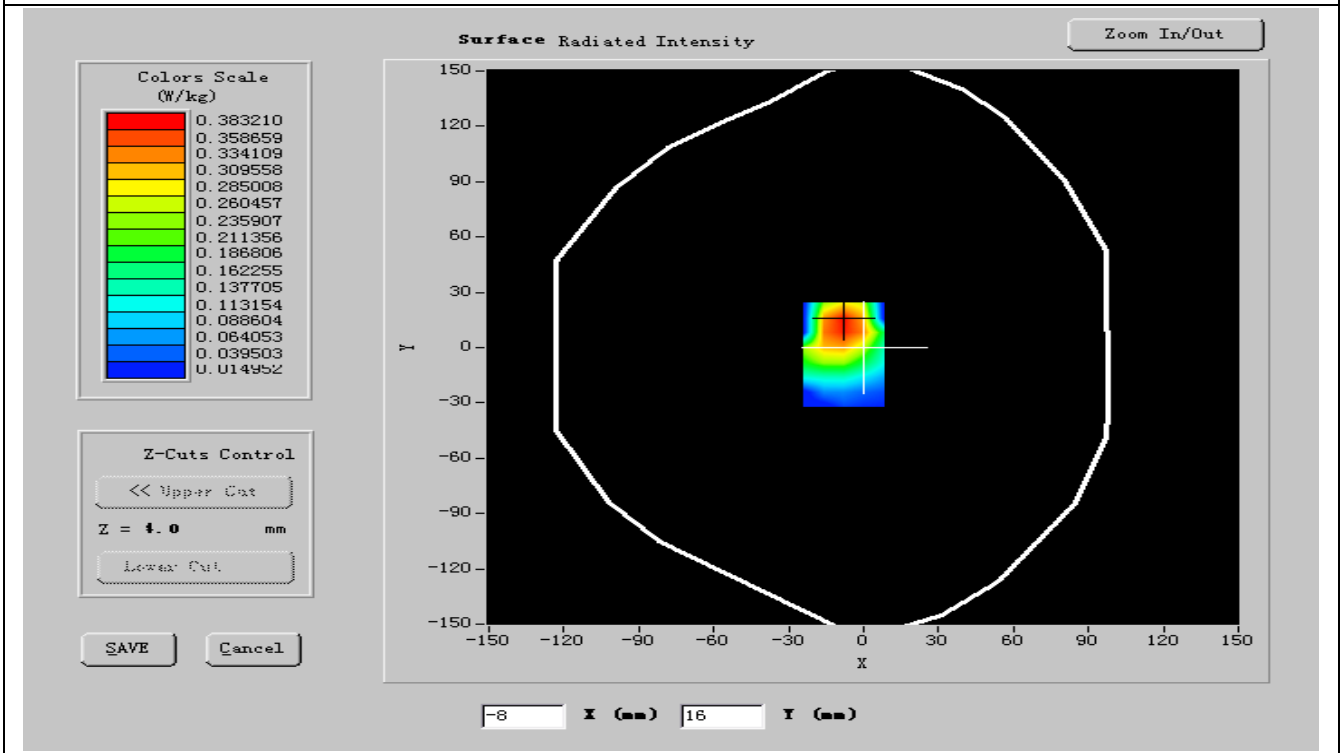

VOLUME SAR

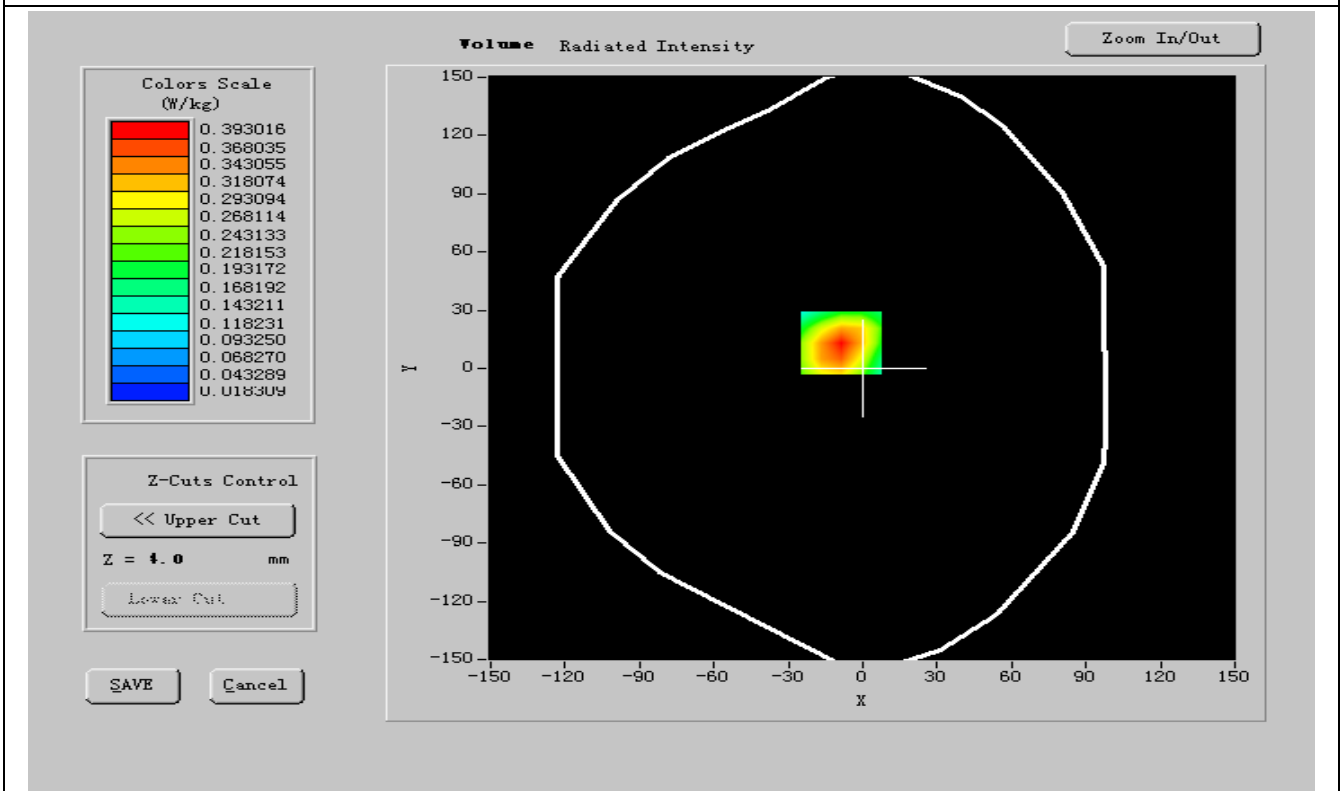




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.245223
SAR 1g (W/Kg)	0.357196

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.3571	0.2832	0.1823	0.1423	0.0923	0.0322

SAR, Z Axis Scan (X = -9, Y = 13)

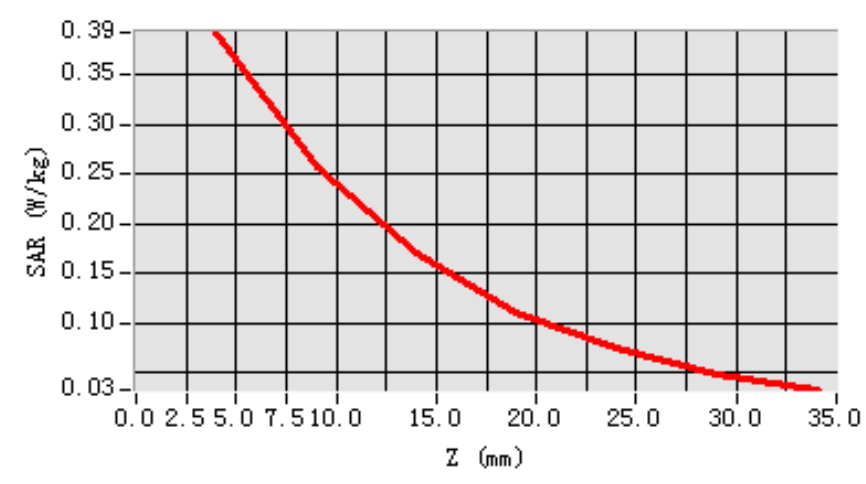

**MEASUREMENT 16****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	BackSide toward phantom
Band	GPRS1900
Channels	Low
Signal	GPRS

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	1850.200000
Relative permittivity (real part)	52.347400
Relative permittivity (imaginary part)	14.450693
Conductivity (S/m)	1.533698
Variation (%)	-0.400000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:2



SURFACE SAR

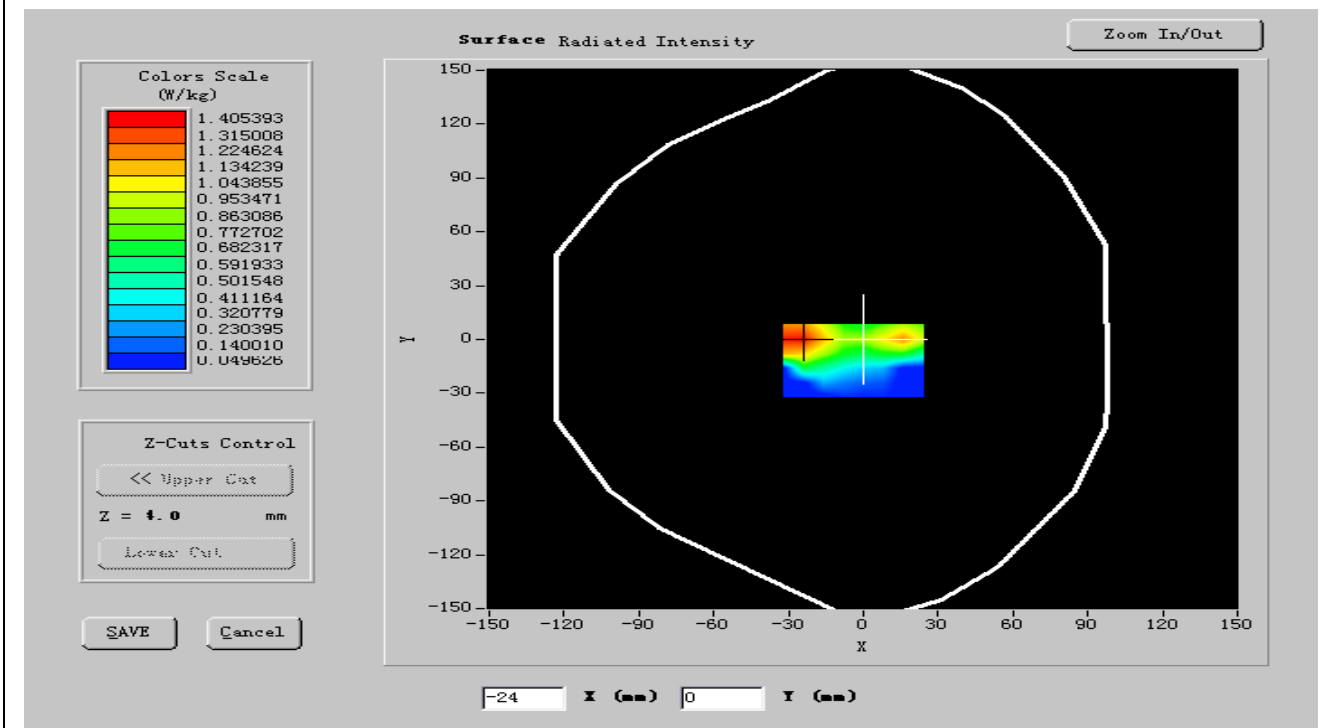

VOLUME SAR

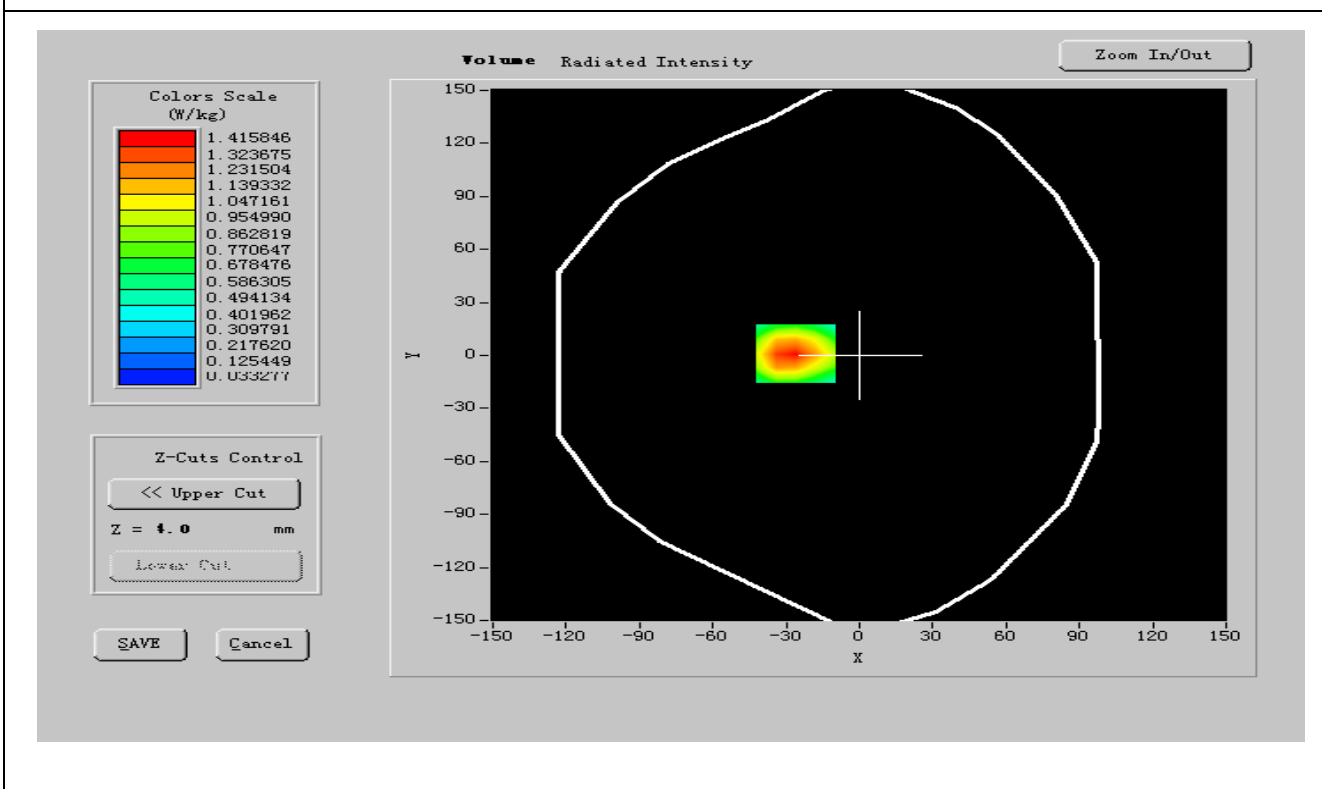




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.219562
SAR 1g (W/Kg)	0.418852

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.4188	0.2834	0.1920	0.1523	0.0854	0.0072

SAR, Z Axis Scan (X = -10, Y = 12)

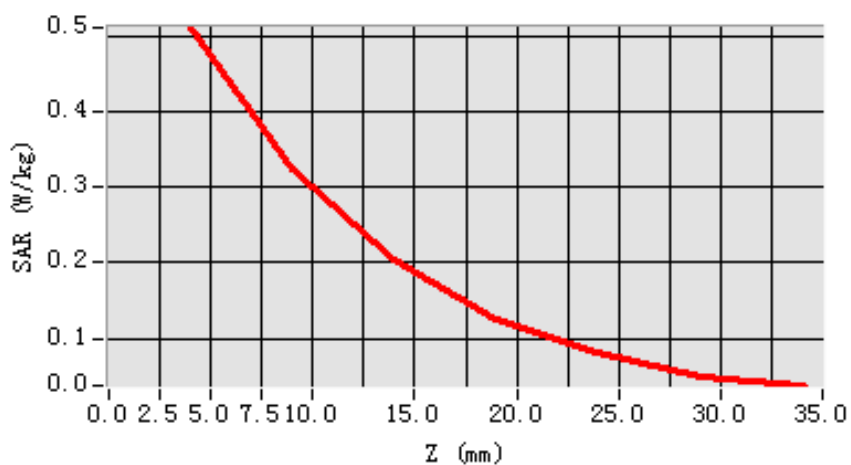

**MEASUREMENT 17****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	BackSide toward phantom
Band	GPRS1900
Channels	Middle
Signal	GPRS

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	1880.000000
Relative permittivity (real part)	51.417028
Relative permittivity (imaginary part)	14.293556
Conductivity (S/m)	1.514286
Variation (%)	-1.010000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:2



SURFACE SAR

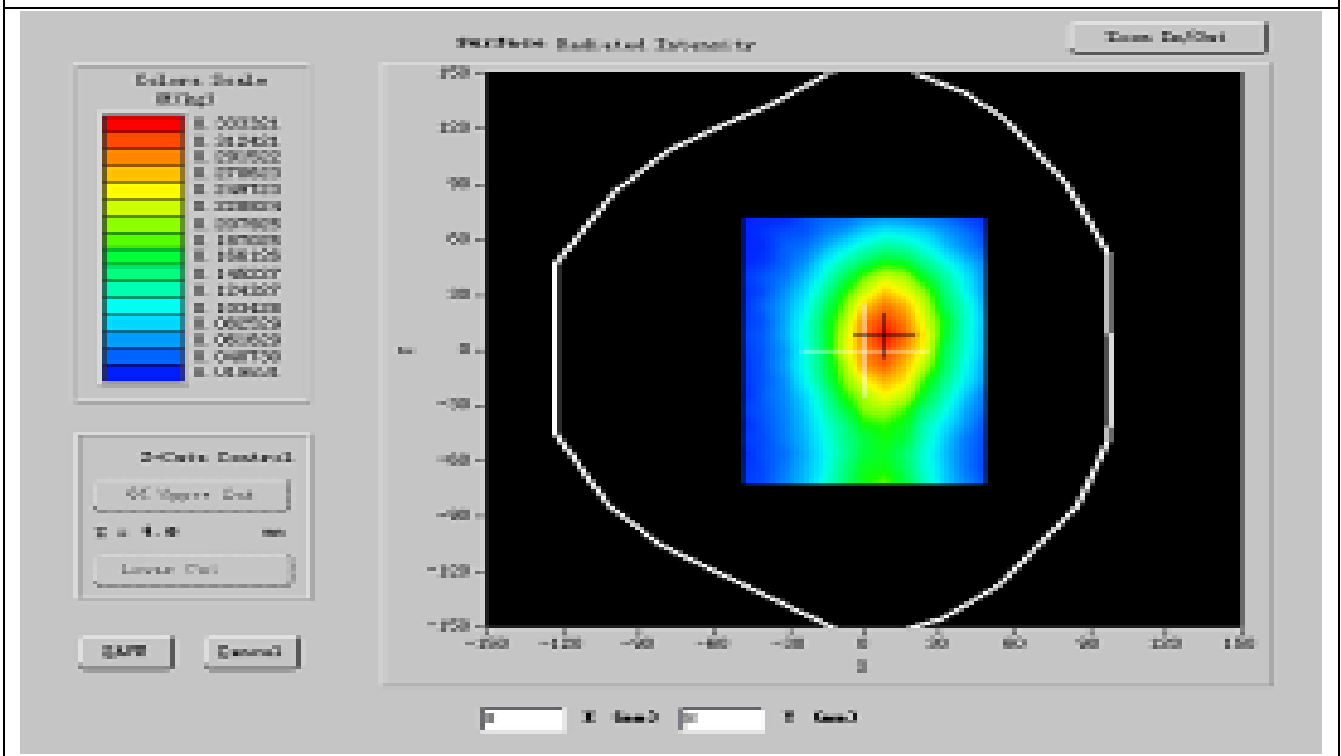

VOLUME SAR

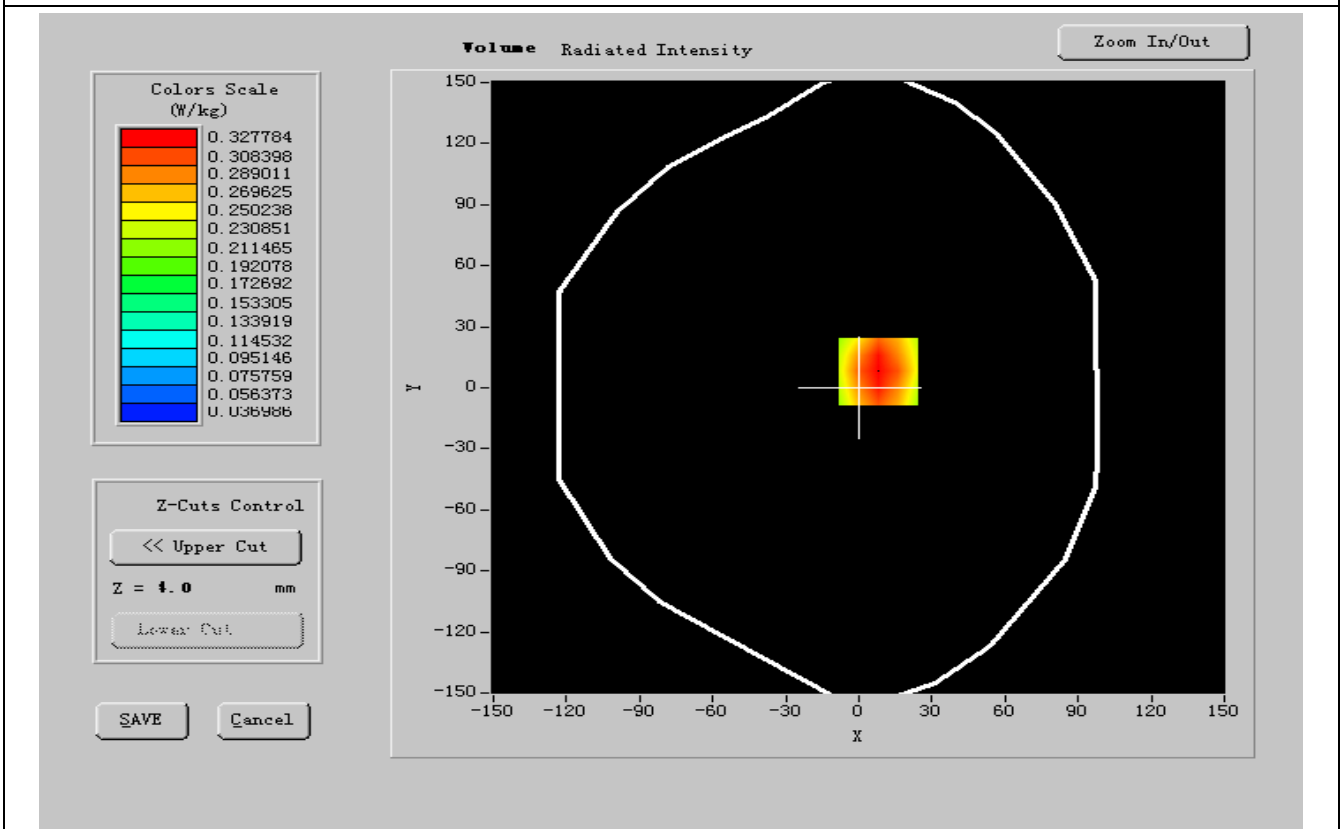




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.215362
SAR 1g (W/Kg)	0.424258

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.4242	0.3034	0.1820	0.1323	0.0954	0.0062

SAR, Z Axis Scan (X = -10, Y = 12)

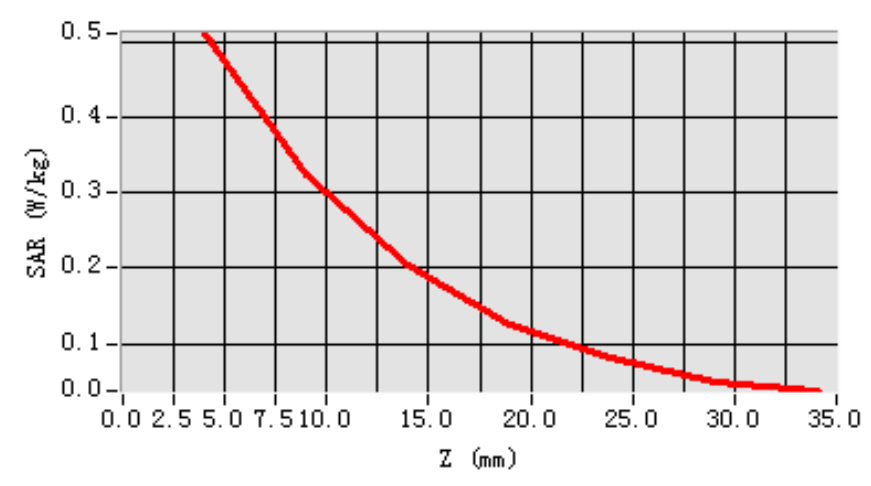

**MEASUREMENT 18****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	BackSide toward phantom
Band	GPRS1900
Channels	High
Signal	GPRS

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	1909.800000
Relative permittivity (real part)	51.813332
Relative permittivity (imaginary part)	14.319230
Conductivity (S/m)	1.513224
Variation (%)	-0.130000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:2



SURFACE SAR

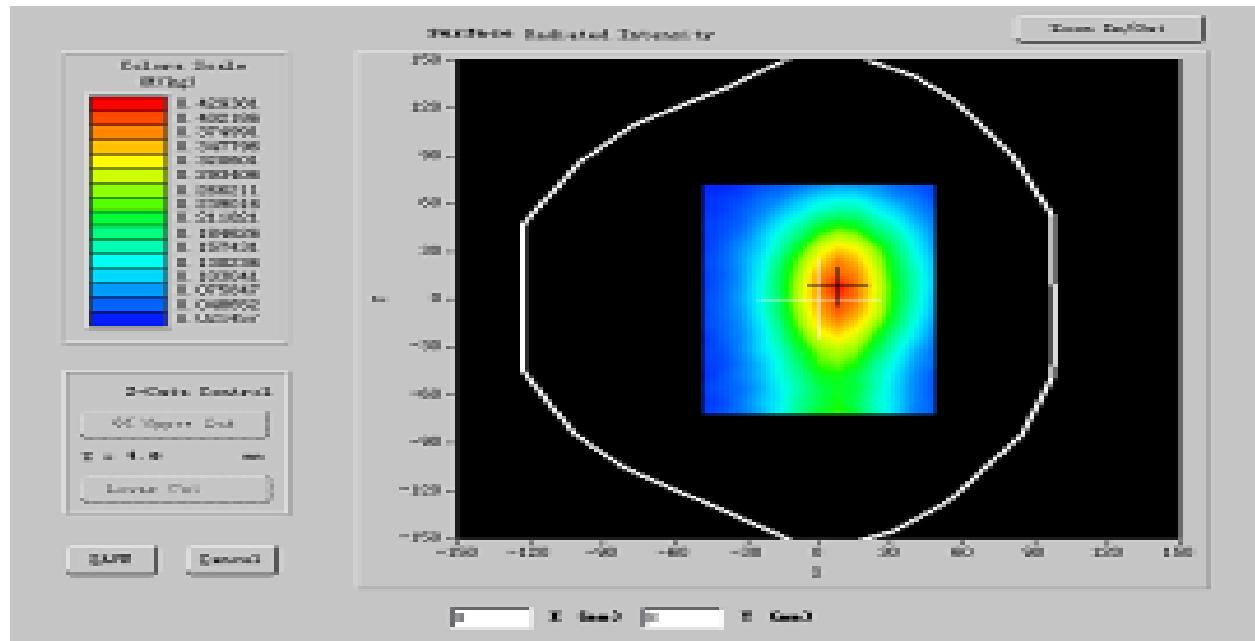

VOLUME SAR

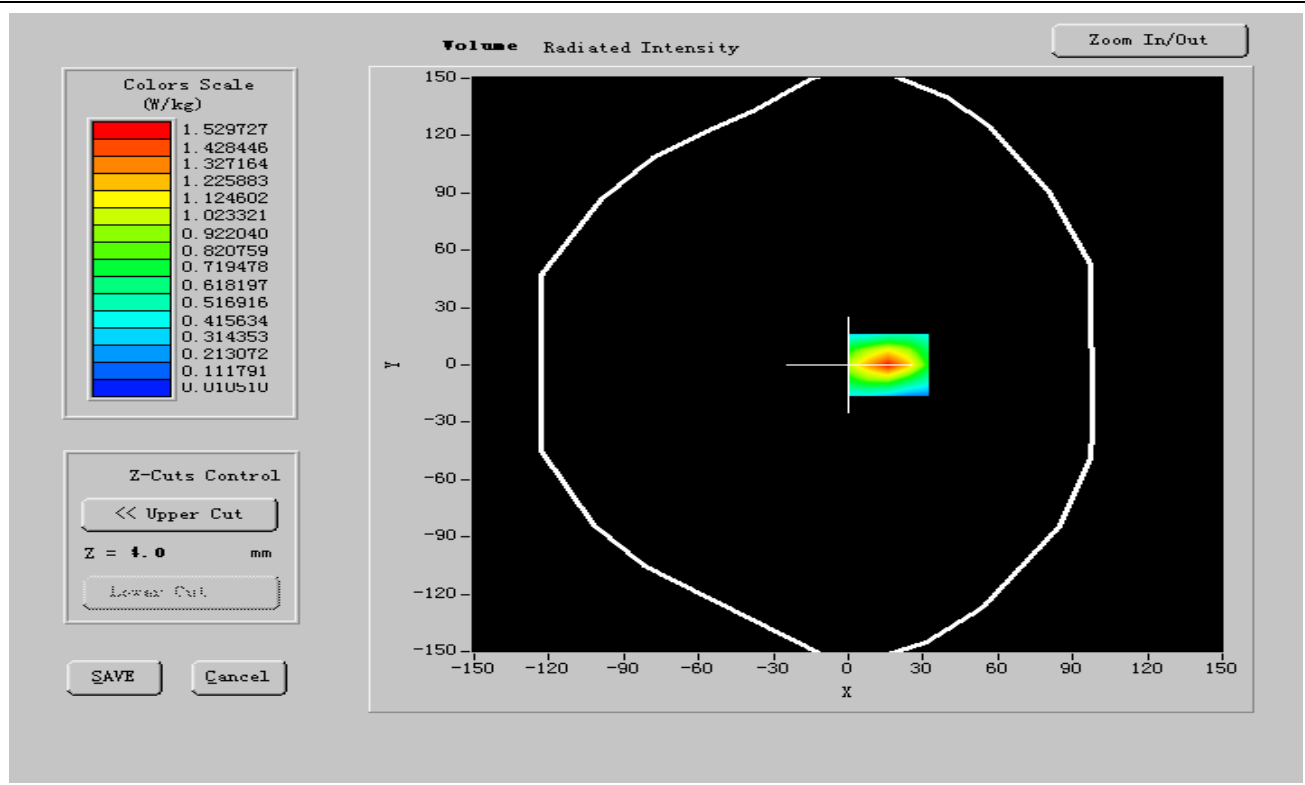




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.265841
SAR 1g (W/Kg)	0.446721

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.4467	0.3054	0.1865	0.1234	0.0754	0.0032

SAR, Z Axis Scan (X = -10, Y = 12)

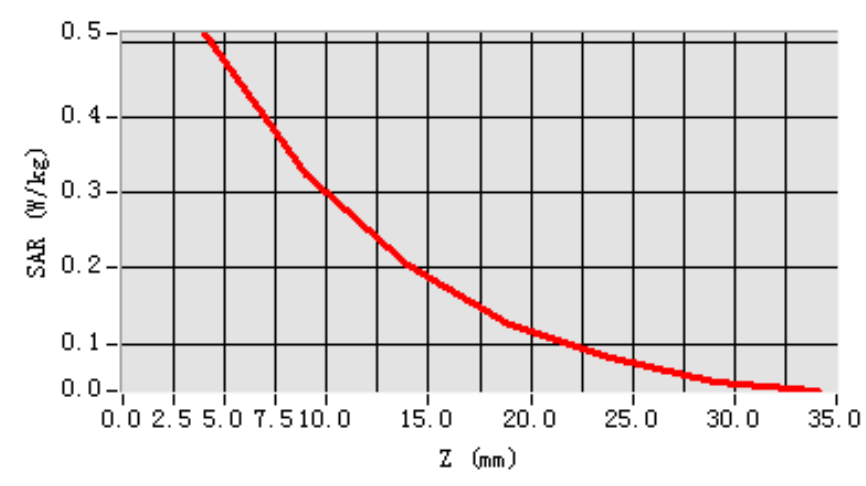

**MEASUREMENT 19****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	BackSide toward phantom
Band	EDGE1900
Channels	Low
Signal	EDGE

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	1850.200000
Relative permittivity (real part)	52.347400
Relative permittivity (imaginary part)	14.450693
Conductivity (S/m)	1.533698
Variation (%)	-0.400000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:2



SURFACE SAR

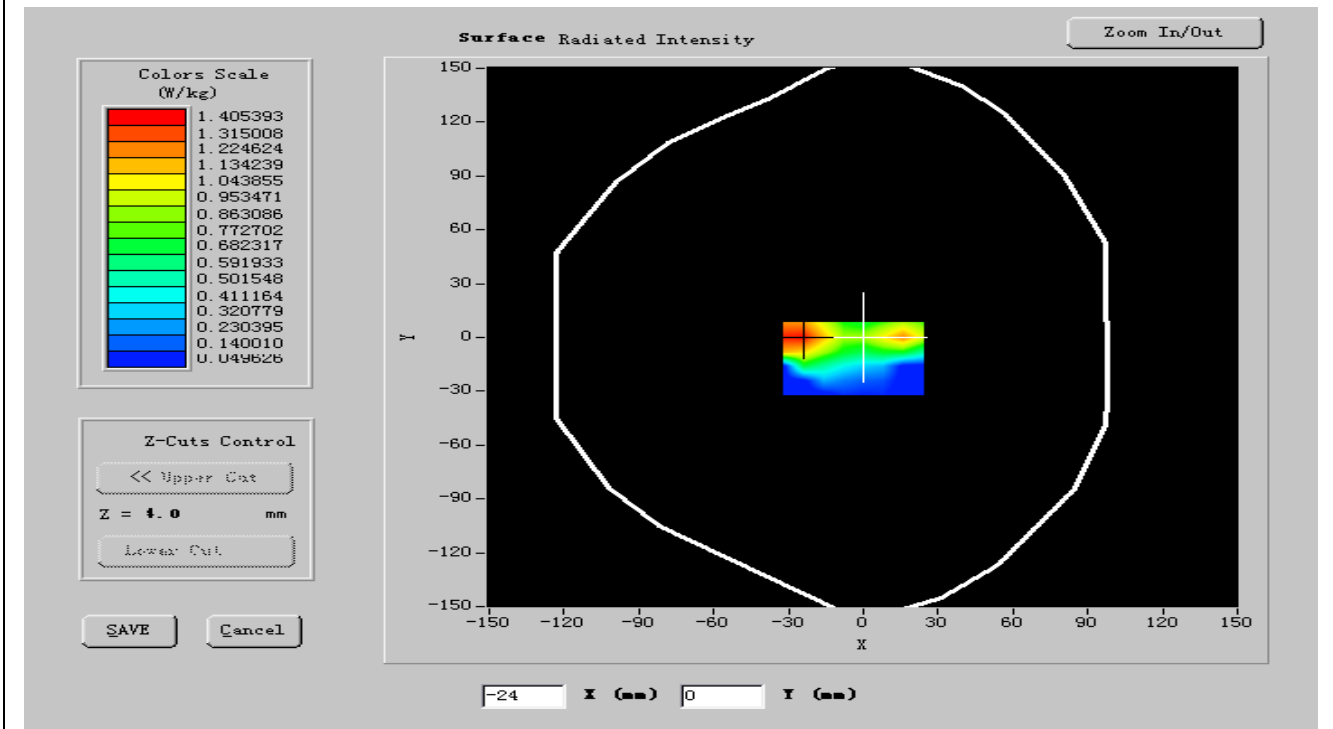

VOLUME SAR

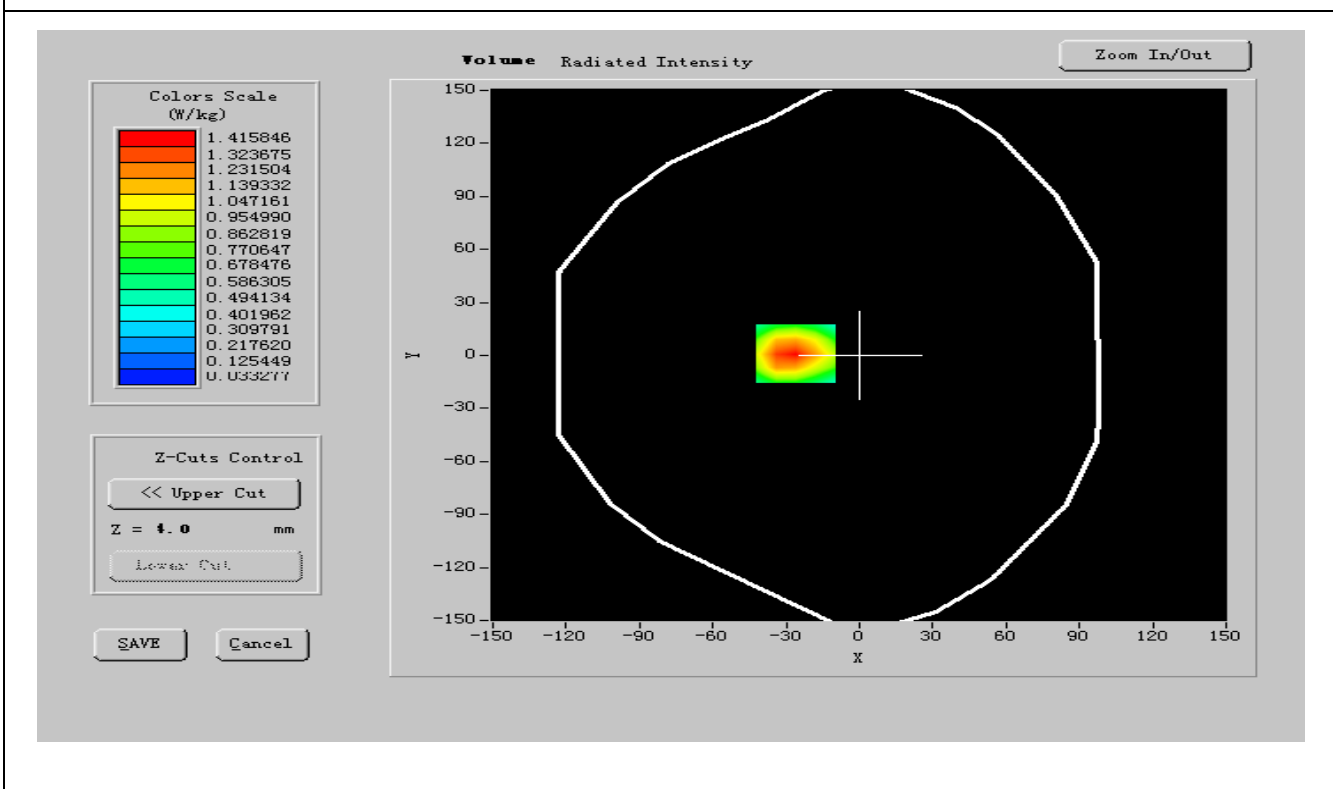




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.192140
SAR 1g (W/Kg)	0.452101

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.4188	0.2834	0.1918	0.1523	0.0849	0.0073

SAR, Z Axis Scan (X = -10, Y = 12)

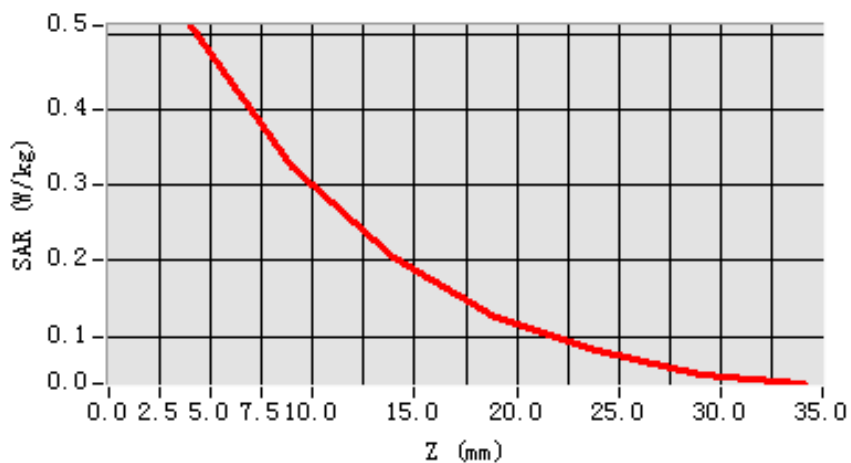

**MEASUREMENT 20****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	BackSide toward phantom
Band	EDGE 1900
Channels	Middle
Signal	EDGE

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	1880.000000
Relative permittivity (real part)	51.417028
Relative permittivity (imaginary part)	14.293556
Conductivity (S/m)	1.514286
Variation (%)	-1.010000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:2



SURFACE SAR

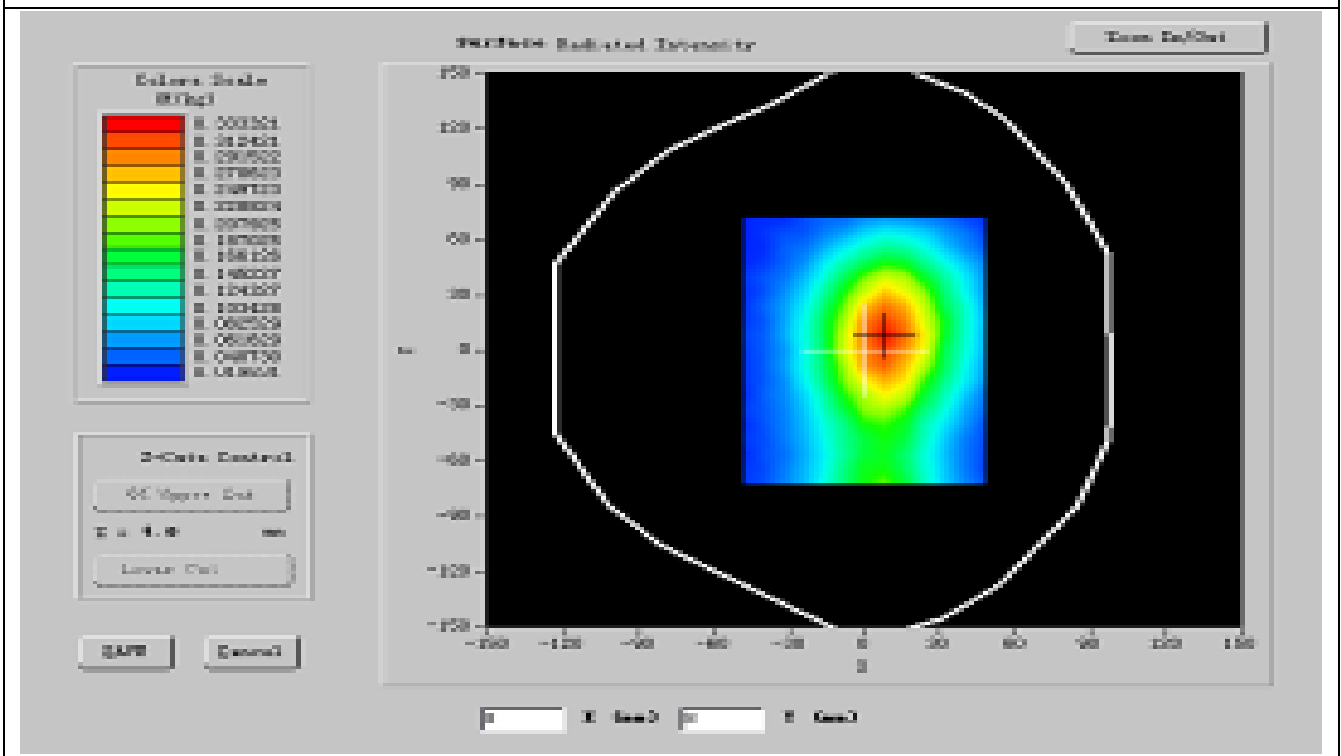

VOLUME SAR

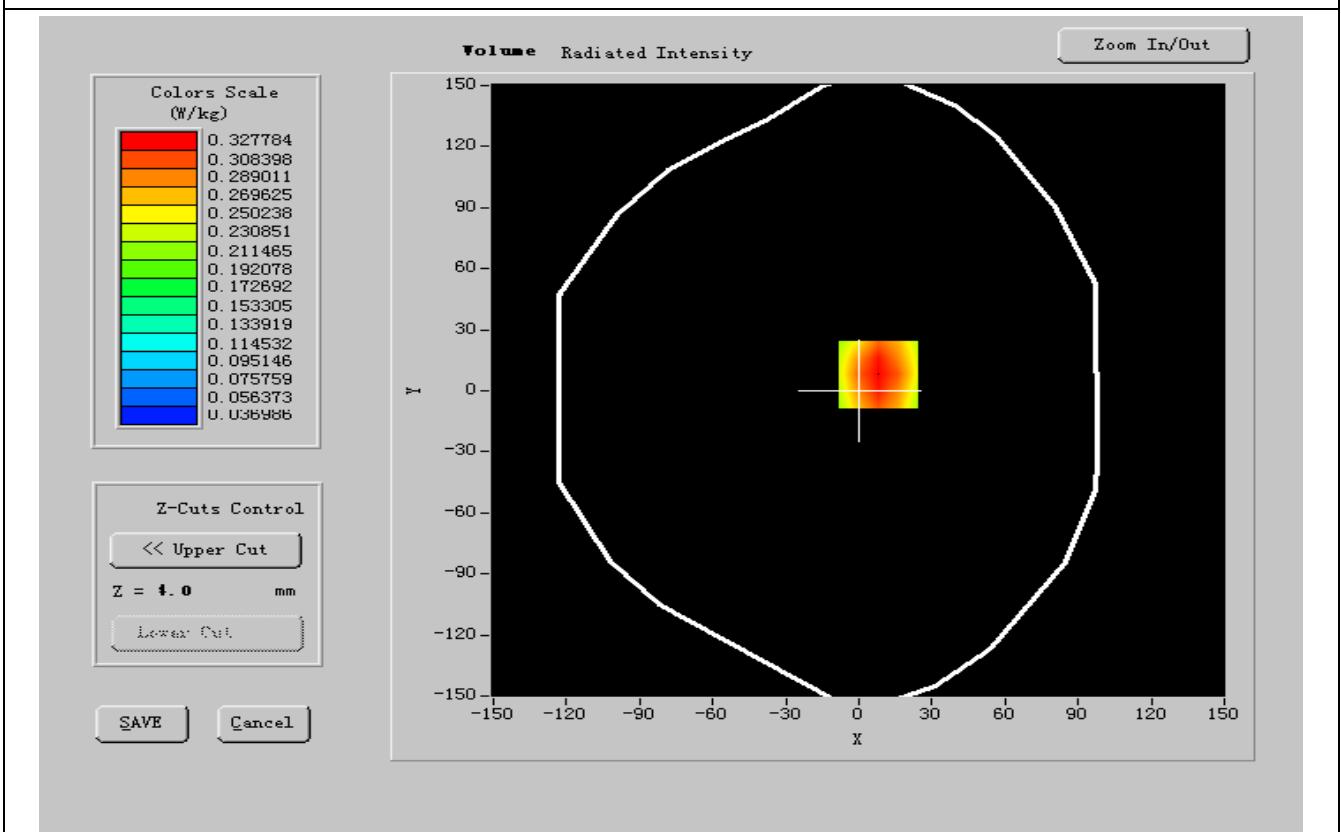




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.210212
SAR 1g (W/Kg)	0.403521

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.4241	0.3032	0.1816	0.1319	0.0964	0.0059

SAR, Z Axis Scan (X = -10, Y = 12)

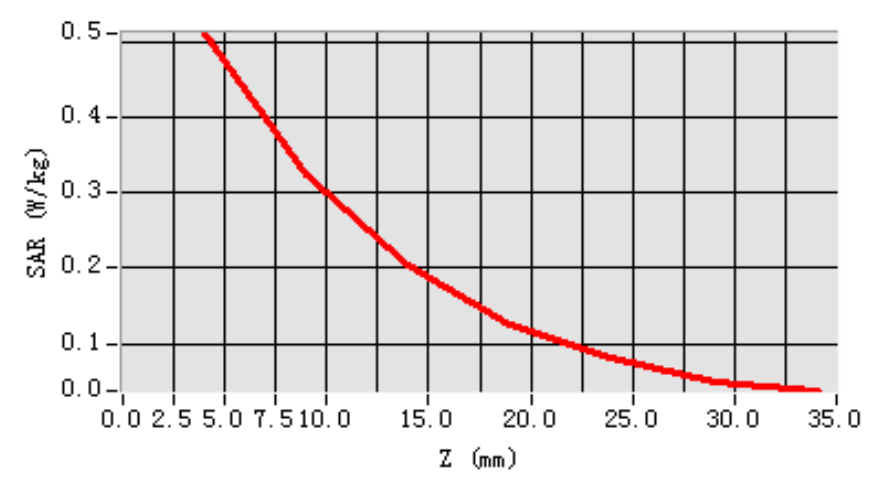

**MEASUREMENT 21****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	BackSide toward phantom
Band	EDGE 1900
Channels	High
Signal	EDGE

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	1909.800000
Relative permittivity (real part)	51.813332
Relative permittivity (imaginary part)	14.319230
Conductivity (S/m)	1.513224
Variation (%)	-0.130000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:2



SURFACE SAR

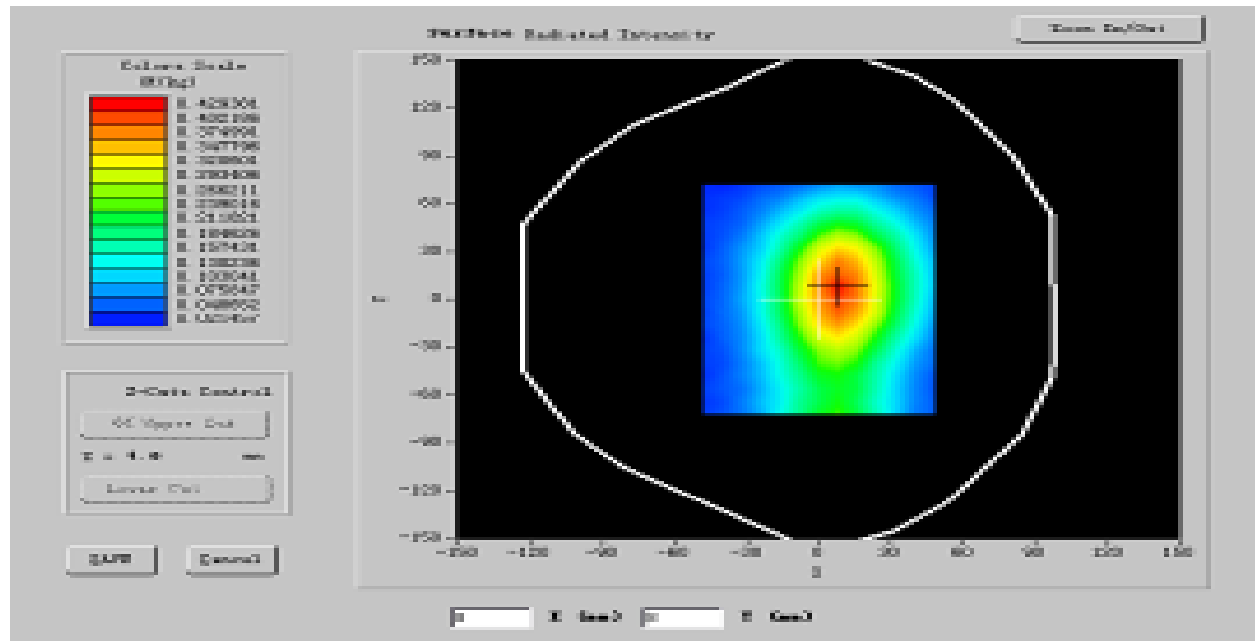

VOLUME SAR

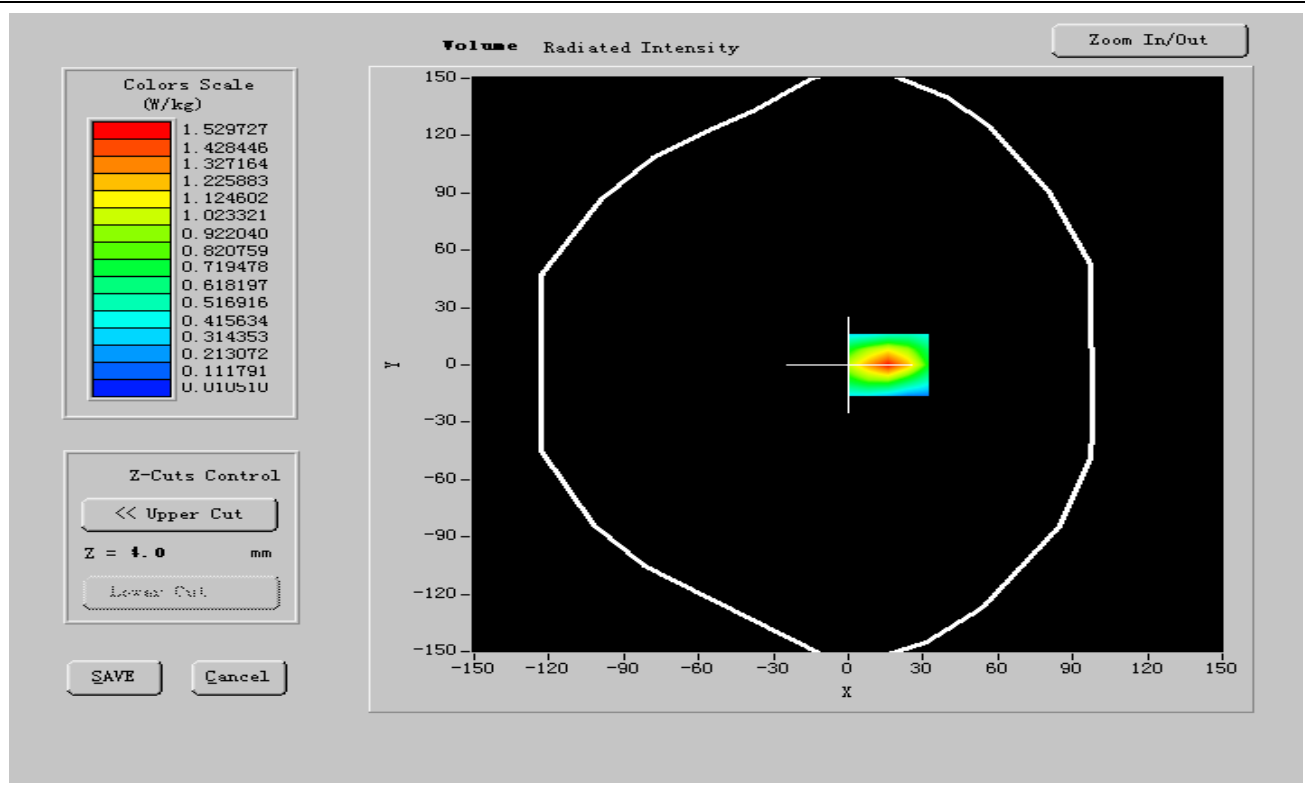




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.261441
SAR 1g (W/Kg)	0.405411

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.4468	0.3054	0.1861	0.1236	0.0752	0.0030

SAR, Z Axis Scan (X = -10, Y = 12)

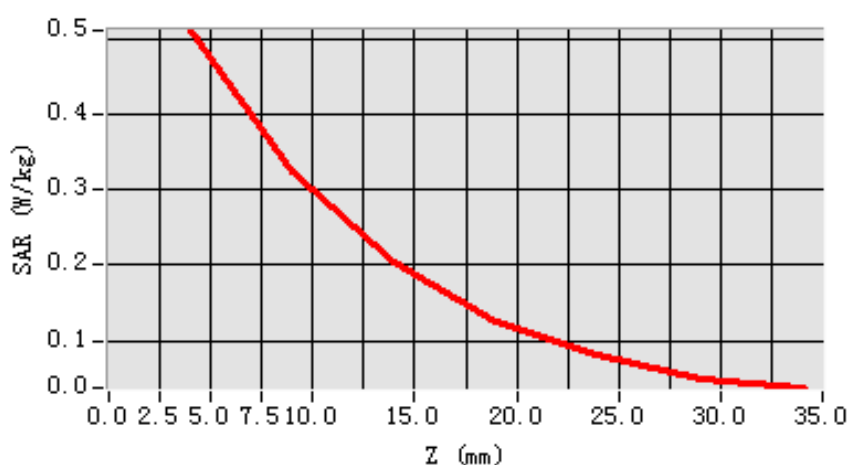

**MEASUREMENT 22****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	GSM1900
Channels	Low
Signal	GSM

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	1850.200000
Relative permittivity (real part)	52.313000
Relative permittivity (imaginary part)	13.584900
Conductivity (S/m)	1.416522
Variation (%)	-0.130000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:8



SURFACE SAR

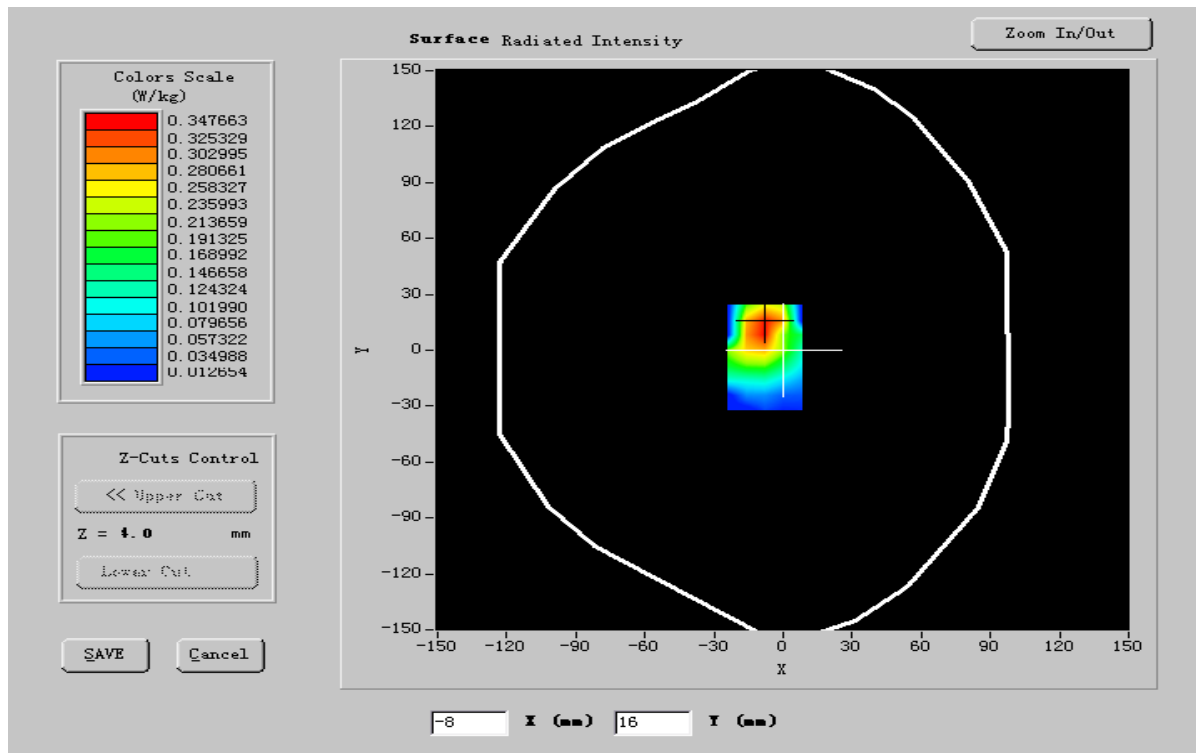

VOLUME SAR

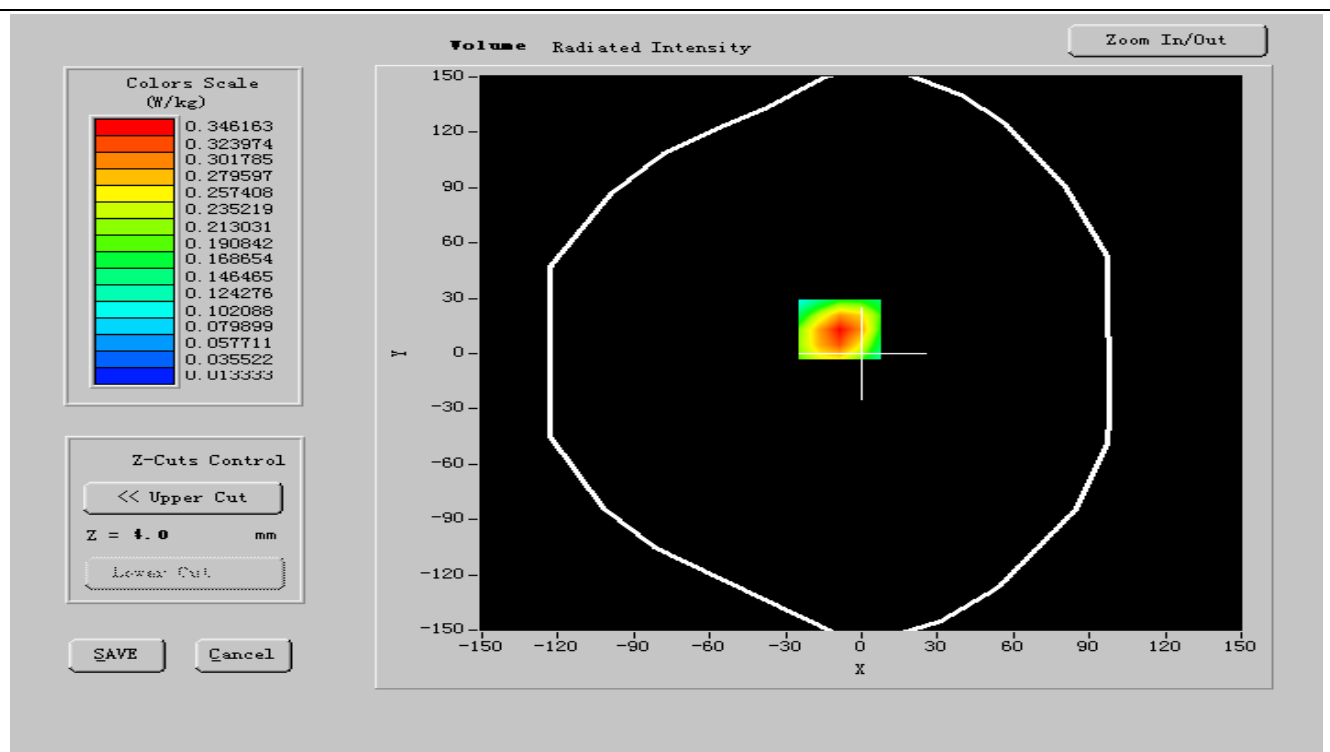




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.173212
SAR 1g (W/Kg)	0.281416

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.3133	0.2873	0.1934	0.1464	0.1264	0.0089

SAR, Z Axis Scan (X = -9, Y = 13)

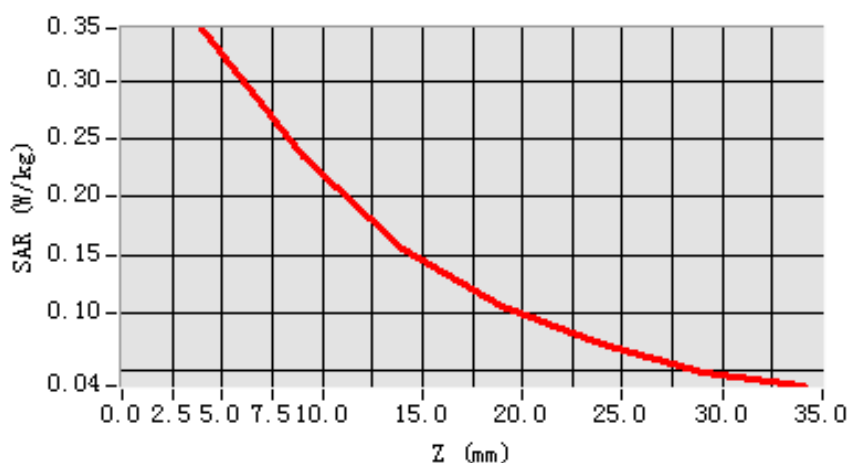

**MEASUREMENT 23****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	GSM1900
Channels	Middle
Signal	GSM

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	1880.000000
Relative permittivity (real part)	52.893001
Relative permittivity (imaginary part)	13.813800
Conductivity (S/m)	1.512775
Variation (%)	-0.700000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:8



SURFACE SAR

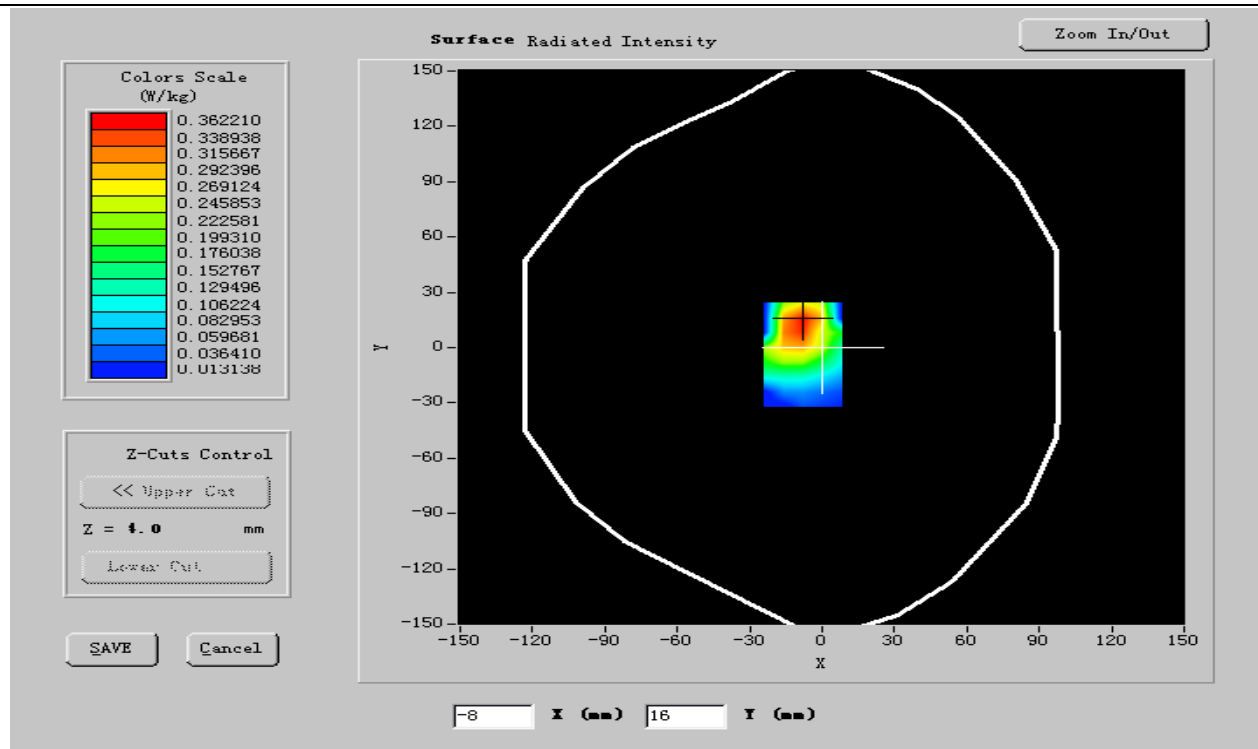

VOLUME SAR

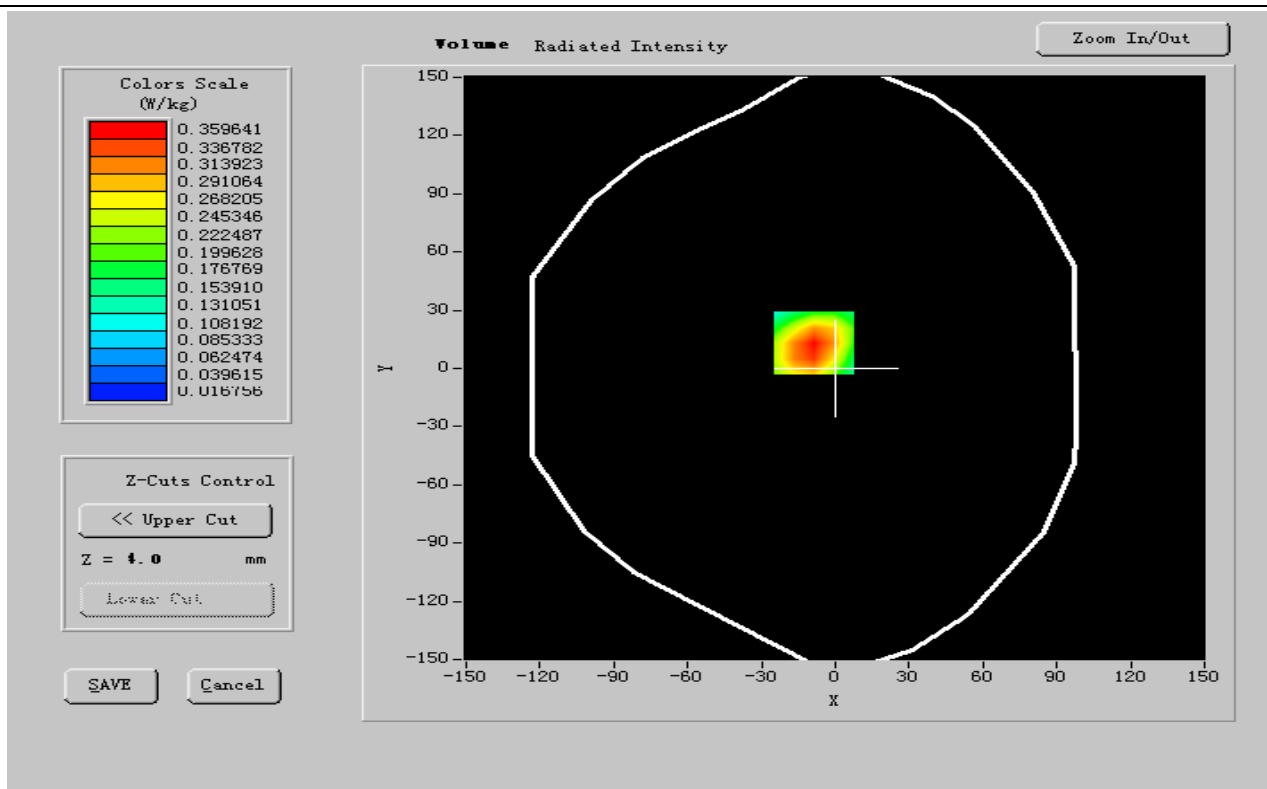




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.221491
SAR 1g (W/Kg)	0.302140

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.3152	0.2832	0.1923	0.1423	0.0932	0.0309

SAR, Z Axis Scan (X = -9, Y = 13)

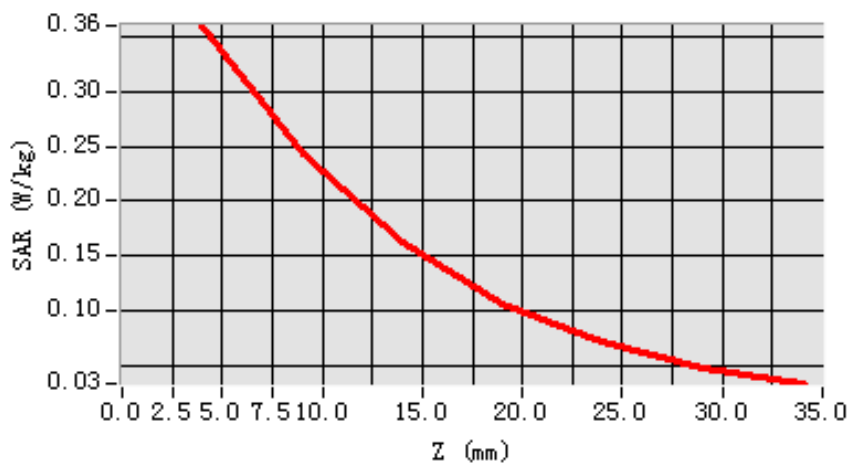

**MEASUREMENT 24****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	GSM1900
Channels	High
Signal	GSM

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	1909.800000
Relative permittivity (real part)	52.885999
Relative permittivity (imaginary part)	13.669900
Conductivity (S/m)	1.510225
Variation (%)	-0.600000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:8



SURFACE SAR

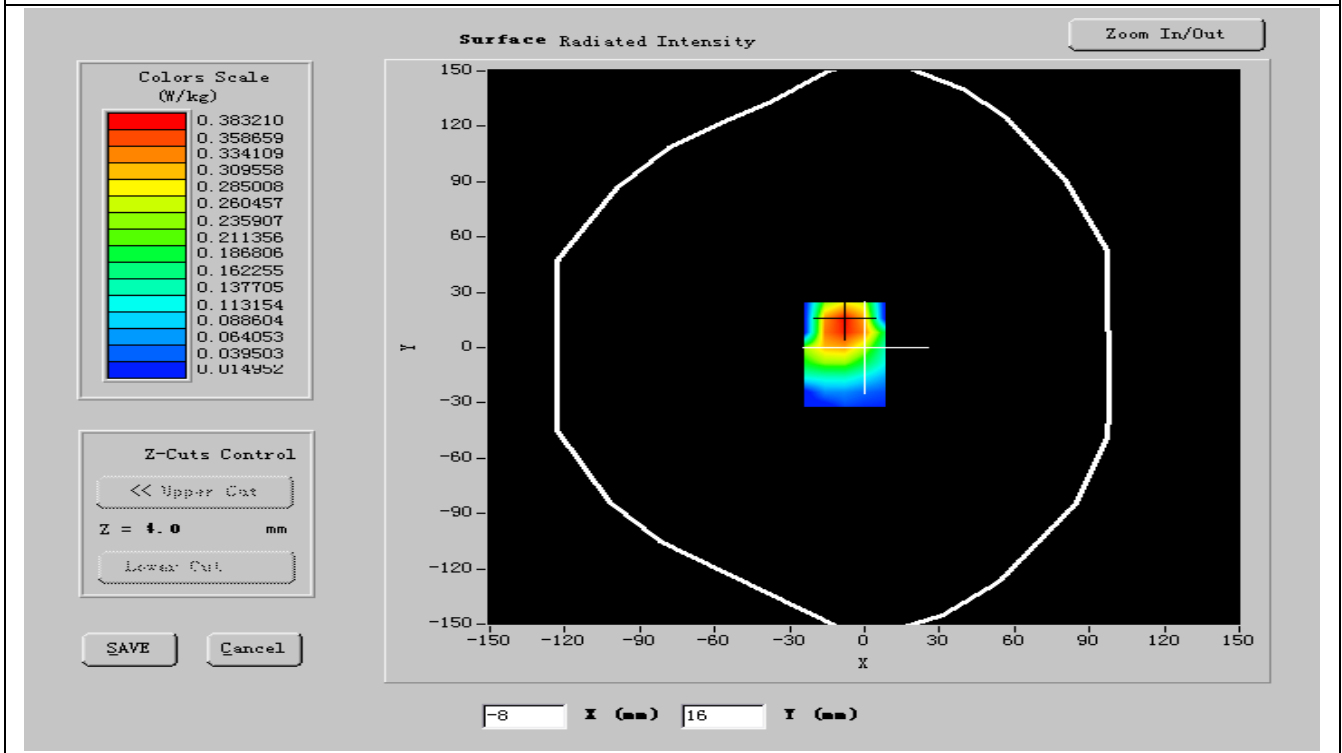

VOLUME SAR

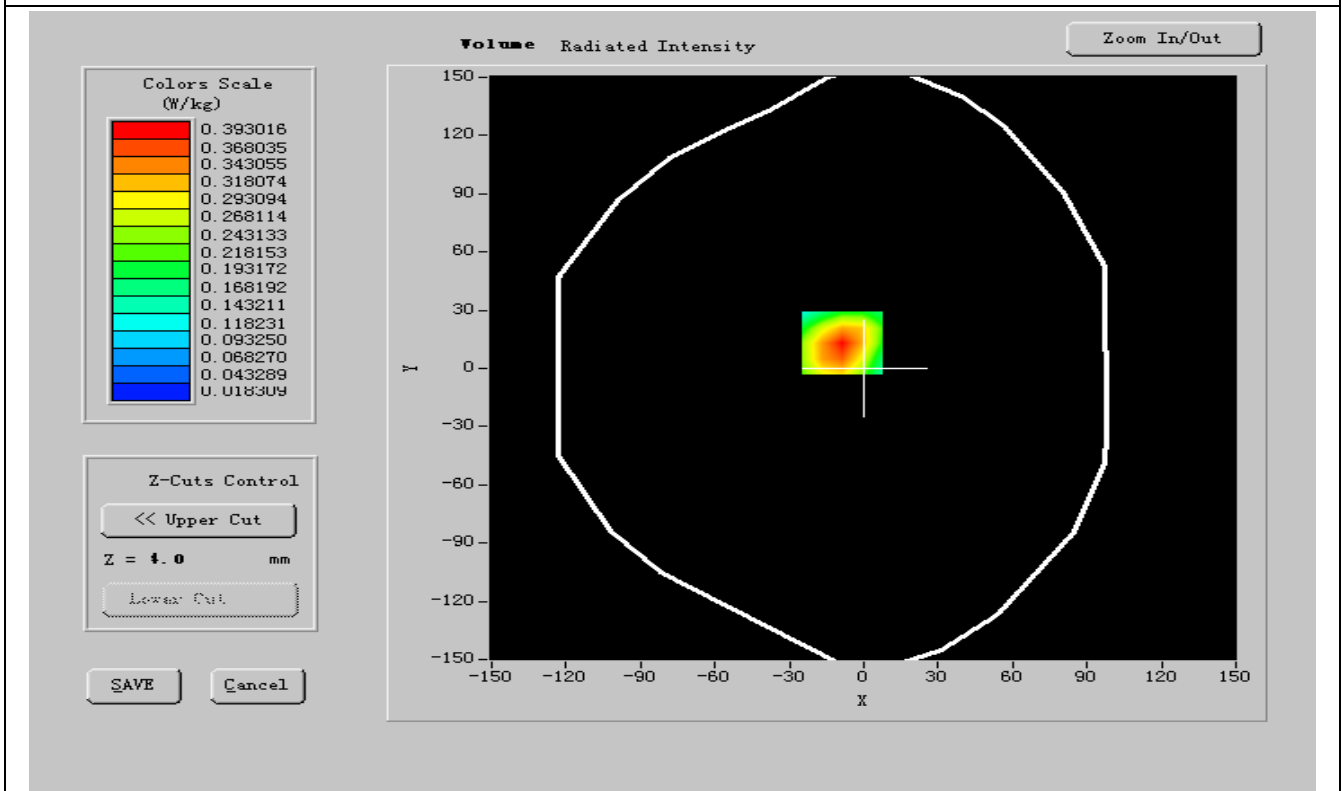




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.231412
SAR 1g (W/Kg)	0.312416

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.3571	0.2832	0.1823	0.1423	0.0923	0.0322

SAR, Z Axis Scan (X = -9, Y = 13)

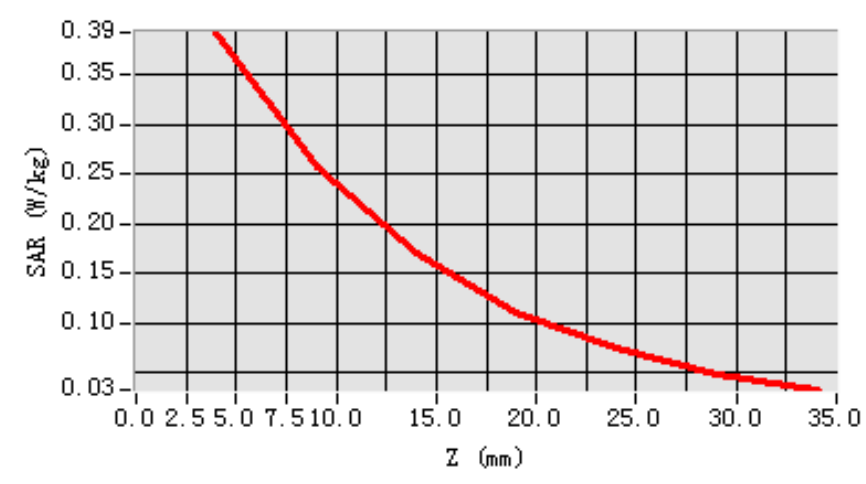

**MEASUREMENT 25****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	GPRS1900
Channels	Low
Signal	GPRS

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	1850.200000
Relative permittivity (real part)	52.347400
Relative permittivity (imaginary part)	14.450693
Conductivity (S/m)	1.533698
Variation (%)	-0.400000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:2



SURFACE SAR

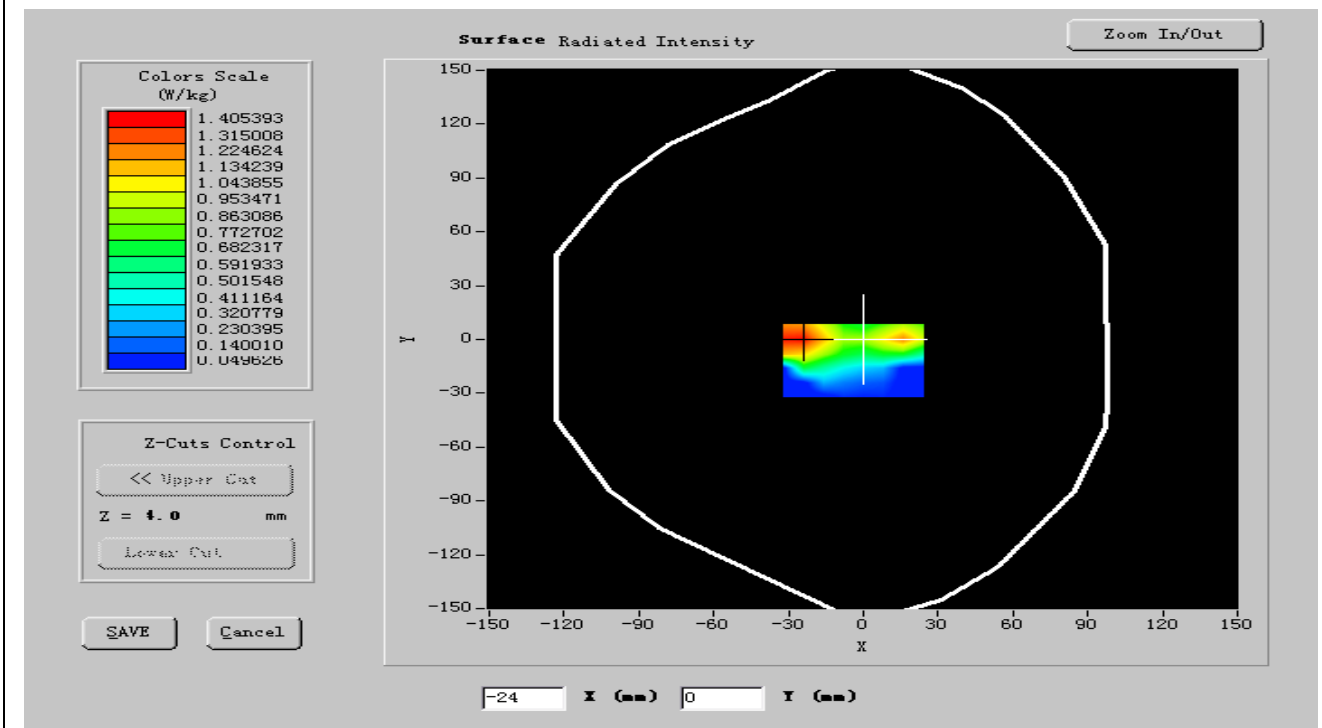

VOLUME SAR

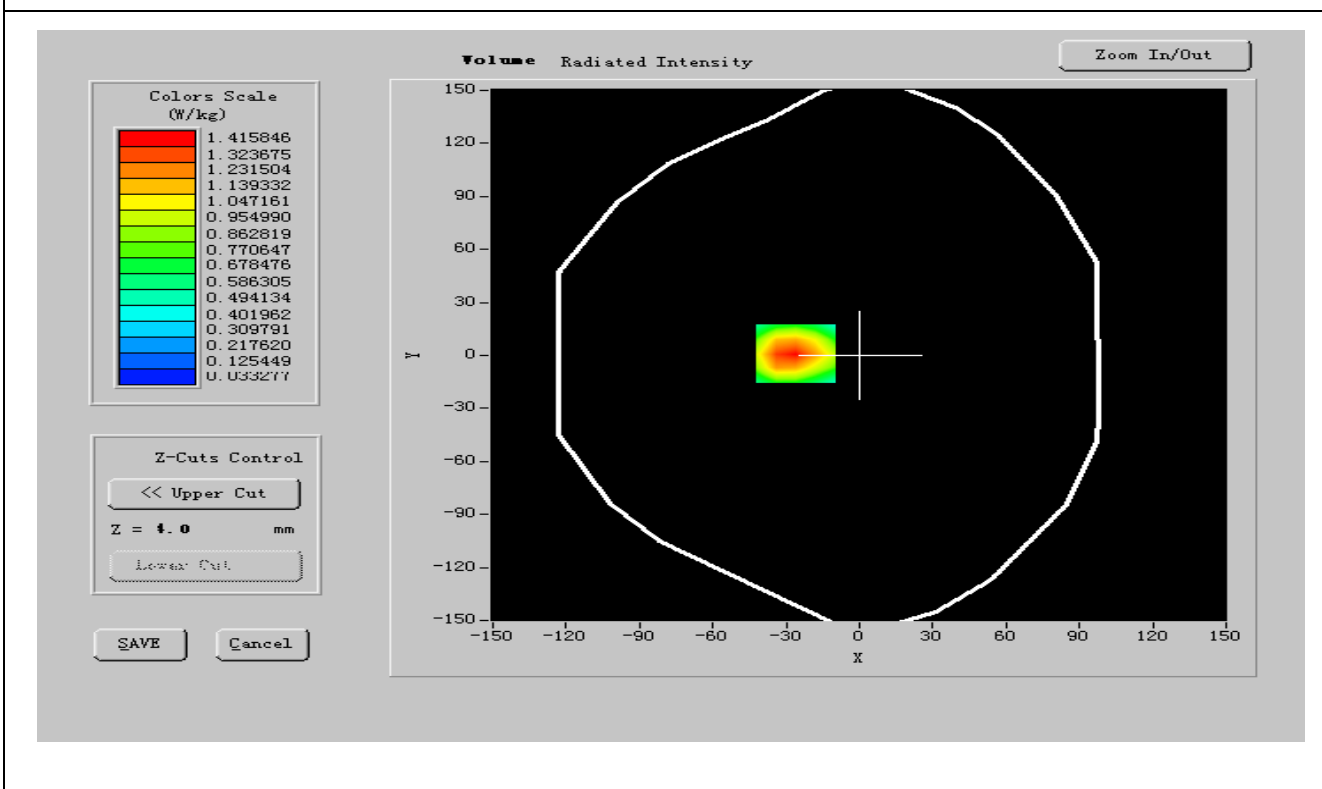




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.202162
SAR 1g (W/Kg)	0.381152

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.4188	0.2834	0.1920	0.1523	0.0854	0.0072

SAR, Z Axis Scan (X = -10, Y = 12)

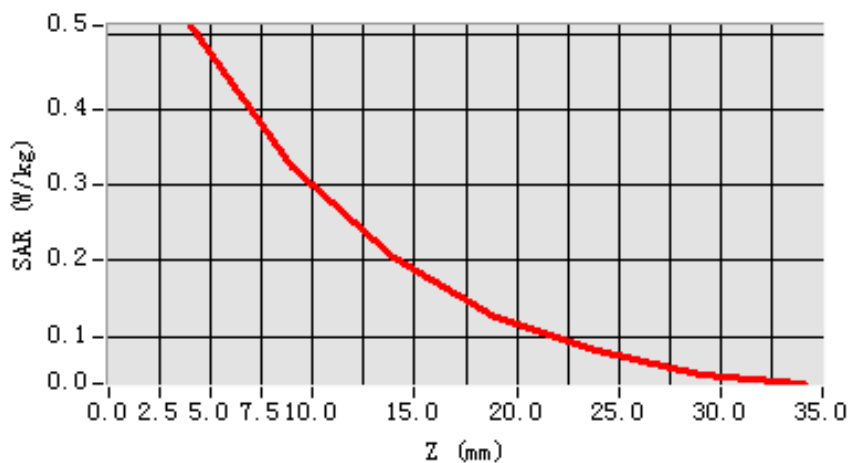

**MEASUREMENT 26****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	GPRS1900
Channels	Middle
Signal	GPRS

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	1880.000000
Relative permittivity (real part)	51.417028
Relative permittivity (imaginary part)	14.293556
Conductivity (S/m)	1.514286
Variation (%)	-1.010000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:2



SURFACE SAR

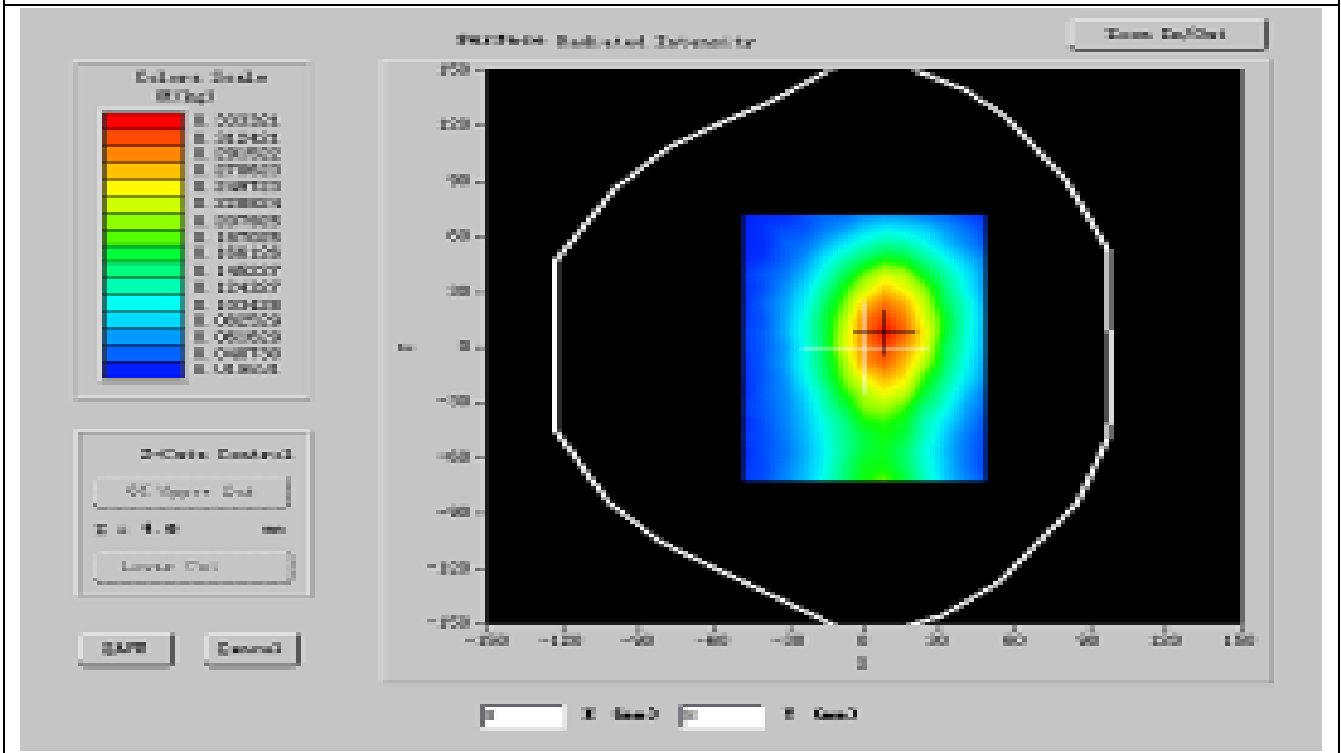

VOLUME SAR

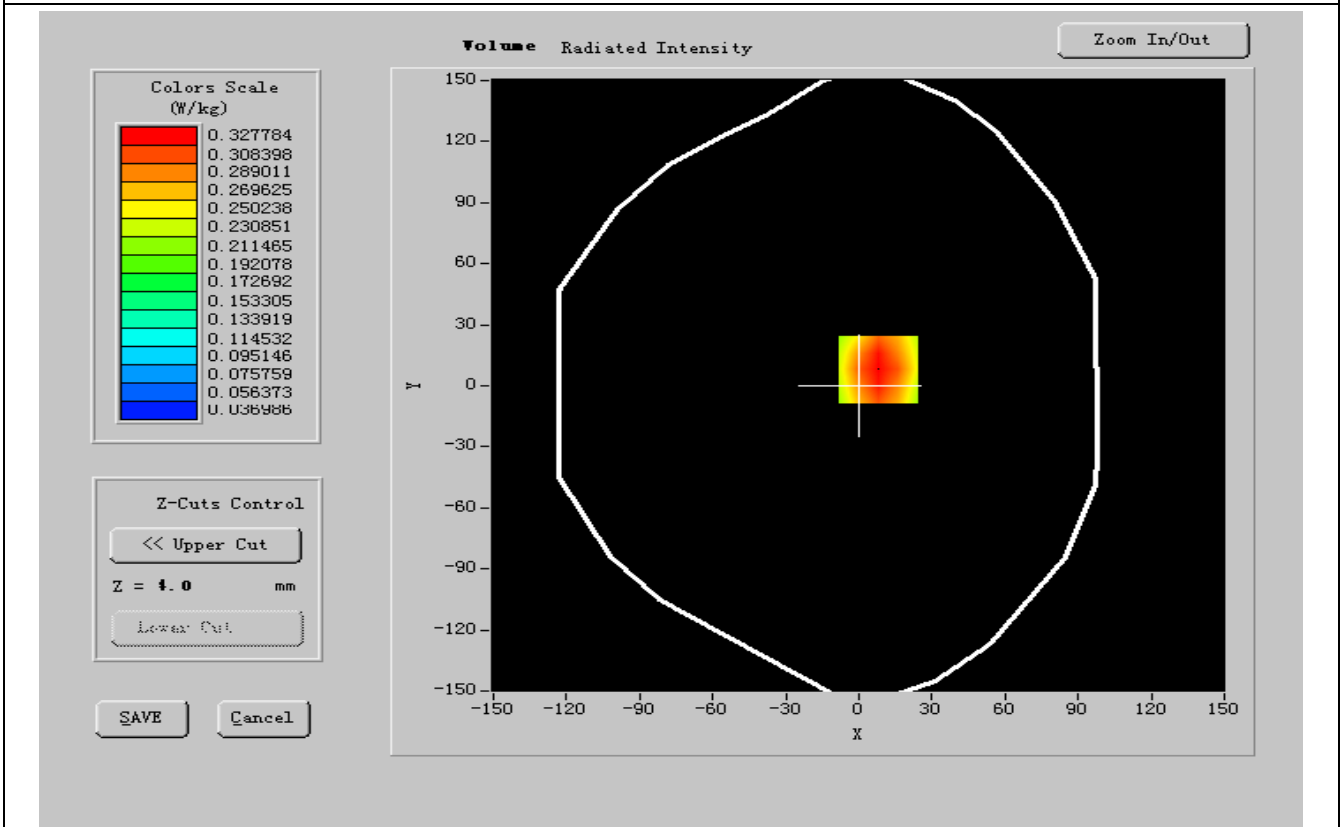




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.192412
SAR 1g (W/Kg)	0.392148

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.4242	0.3034	0.1820	0.1323	0.0954	0.0062

SAR, Z Axis Scan (X = -10, Y = 12)

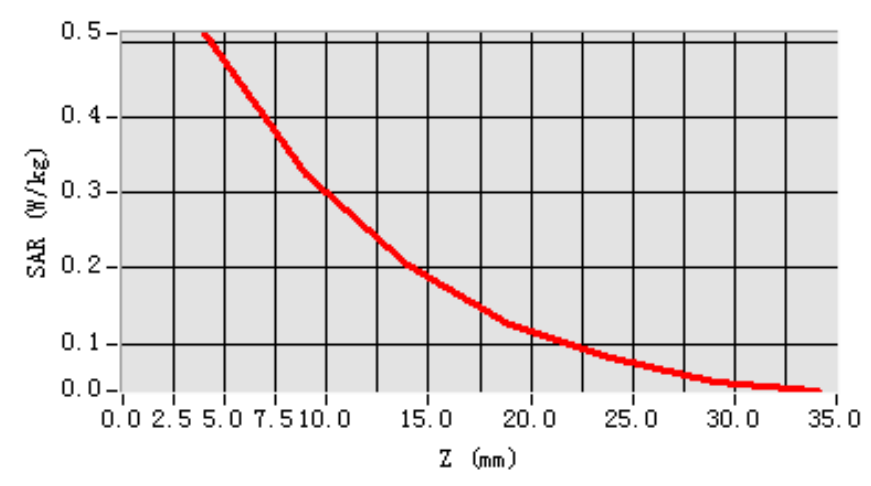

**MEASUREMENT 27****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	GPRS1900
Channels	High
Signal	GPRS

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	1909.800000
Relative permittivity (real part)	51.813332
Relative permittivity (imaginary part)	14.319230
Conductivity (S/m)	1.513224
Variation (%)	-0.130000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:2



SURFACE SAR

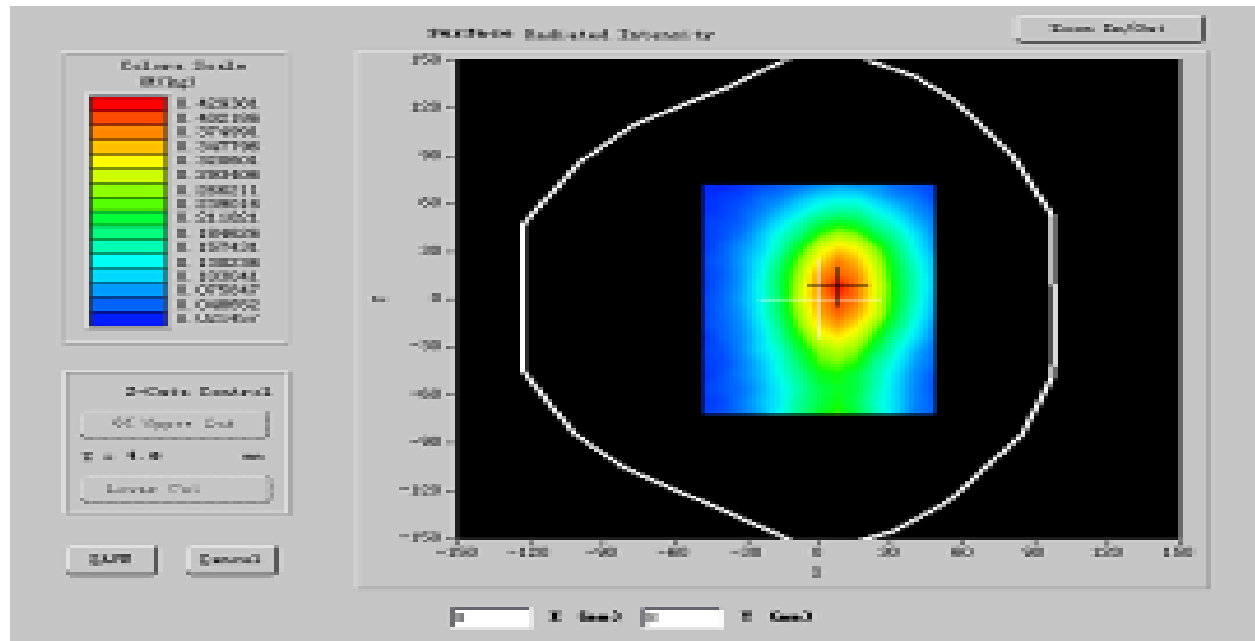

VOLUME SAR

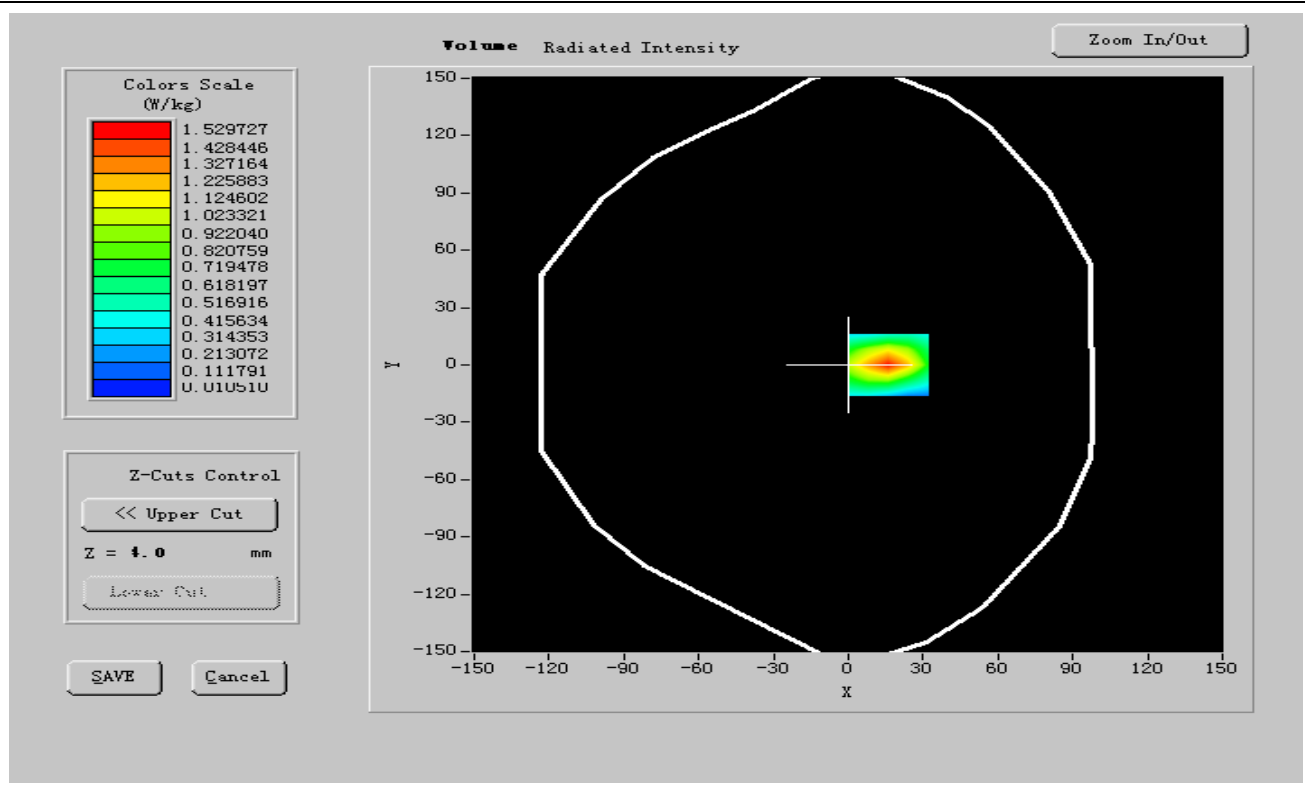




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.262411
SAR 1g (W/Kg)	0.412421

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.4467	0.3054	0.1865	0.1234	0.0754	0.0032

SAR, Z Axis Scan (X = -10, Y = 12)

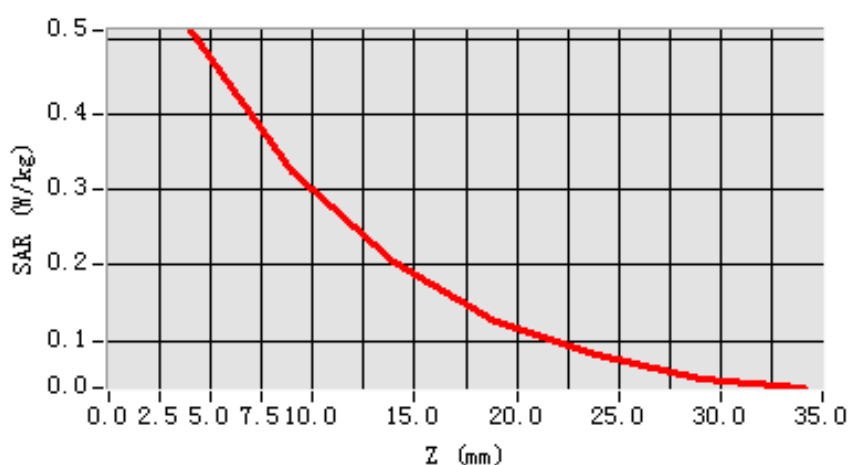

**MEASUREMENT 28****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	EDGE1900
Channels	Low
Signal	EDGE

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	1850.200000
Relative permittivity (real part)	52.347400
Relative permittivity (imaginary part)	14.450693
Conductivity (S/m)	1.533698
Variation (%)	-0.400000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:2



SURFACE SAR

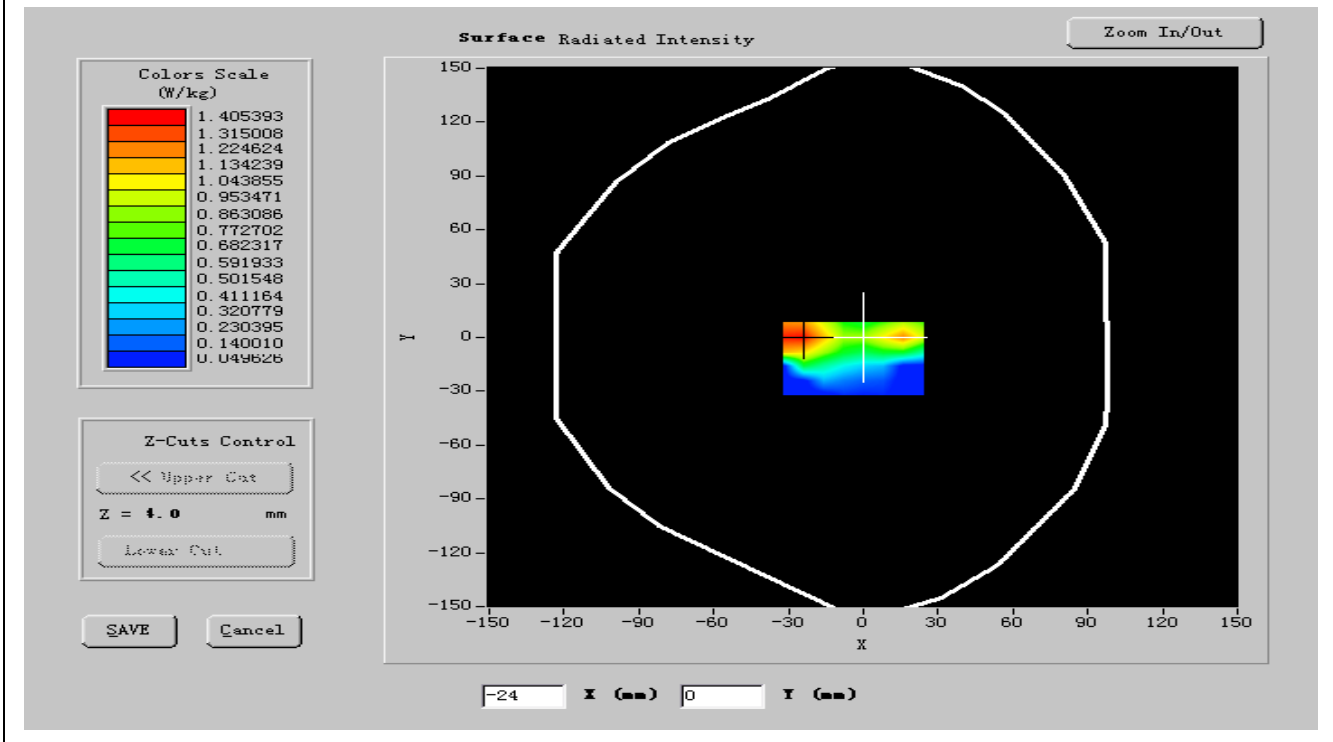

VOLUME SAR

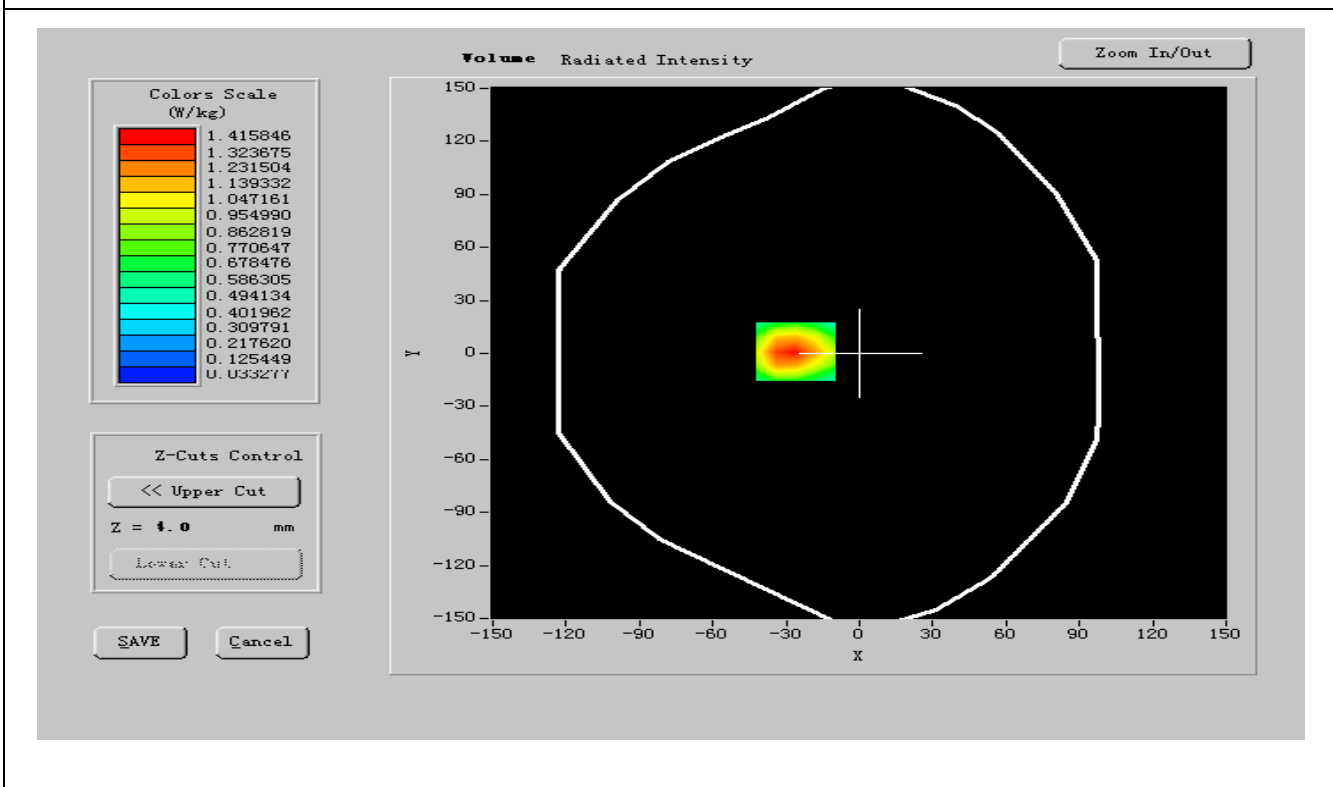




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.162470
SAR 1g (W/Kg)	0.423142

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.4188	0.2834	0.1918	0.1523	0.0849	0.0073

SAR, Z Axis Scan (X = -10, Y = 12)

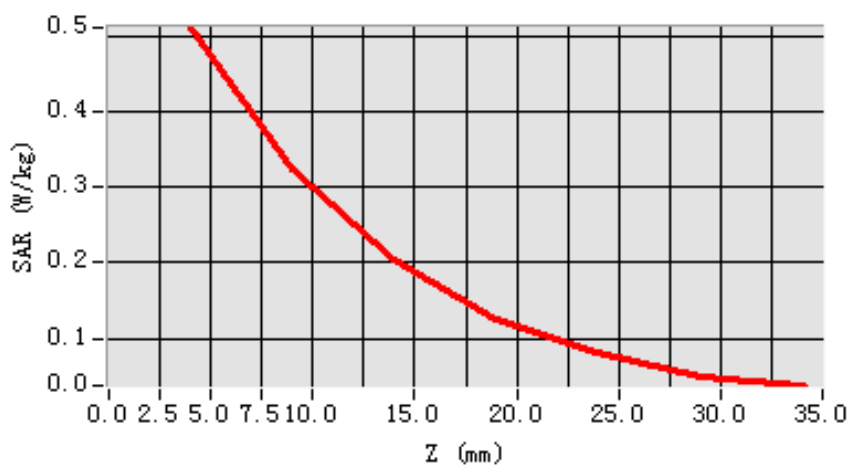

**MEASUREMENT 29****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	EDGE 1900
Channels	Middle
Signal	EDGE

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	51.417028
Relative permittivity (imaginary part)	14.293556
Conductivity (S/m)	1.514286
Variation (%)	-1.010000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:2




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.202312
SAR 1g (W/Kg)	0.392410

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.4241	0.3032	0.1816	0.1319	0.0964	0.0059

SAR, Z Axis Scan (X = -10, Y = 12)

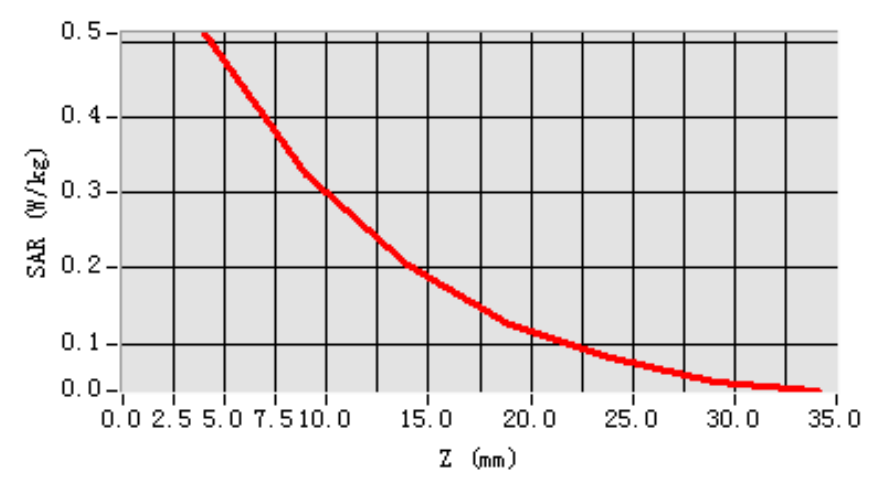

**MEASUREMENT 30****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	EDGE 1900
Channels	High
Signal	EDGE

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPG35,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	1909.800000
Relative permittivity (real part)	51.813332
Relative permittivity (imaginary part)	14.319230
Conductivity (S/m)	1.513224
Variation (%)	-0.130000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	40.42, 41.12, 54.75
Crest factor:	1:2



SURFACE SAR

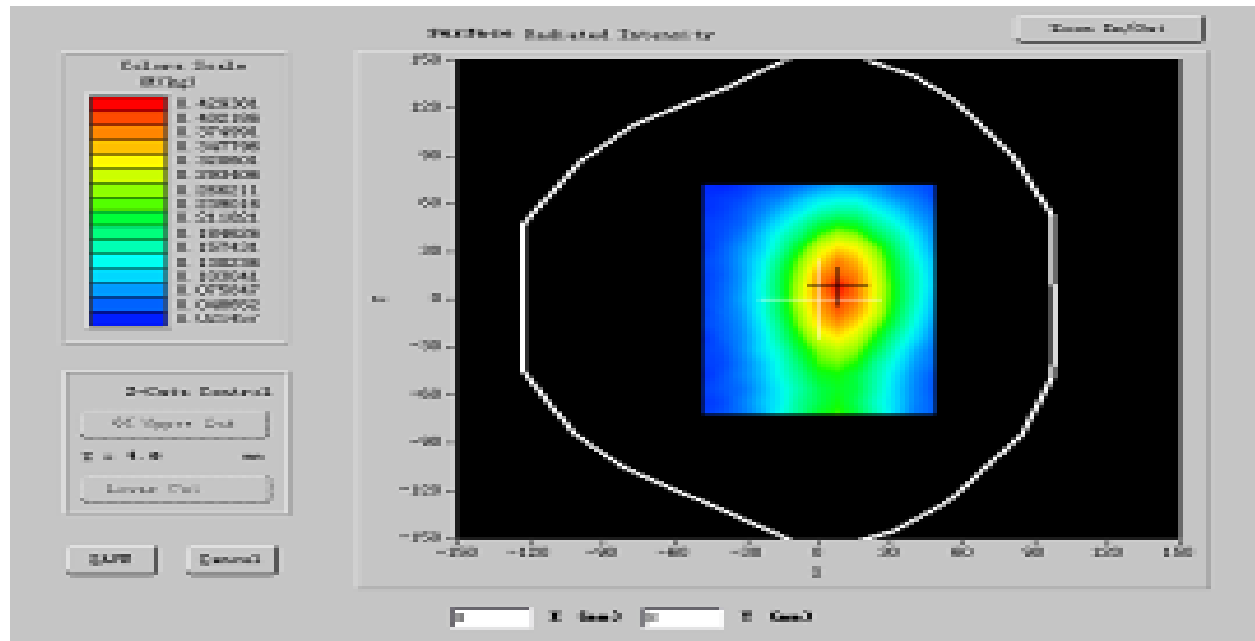

VOLUME SAR

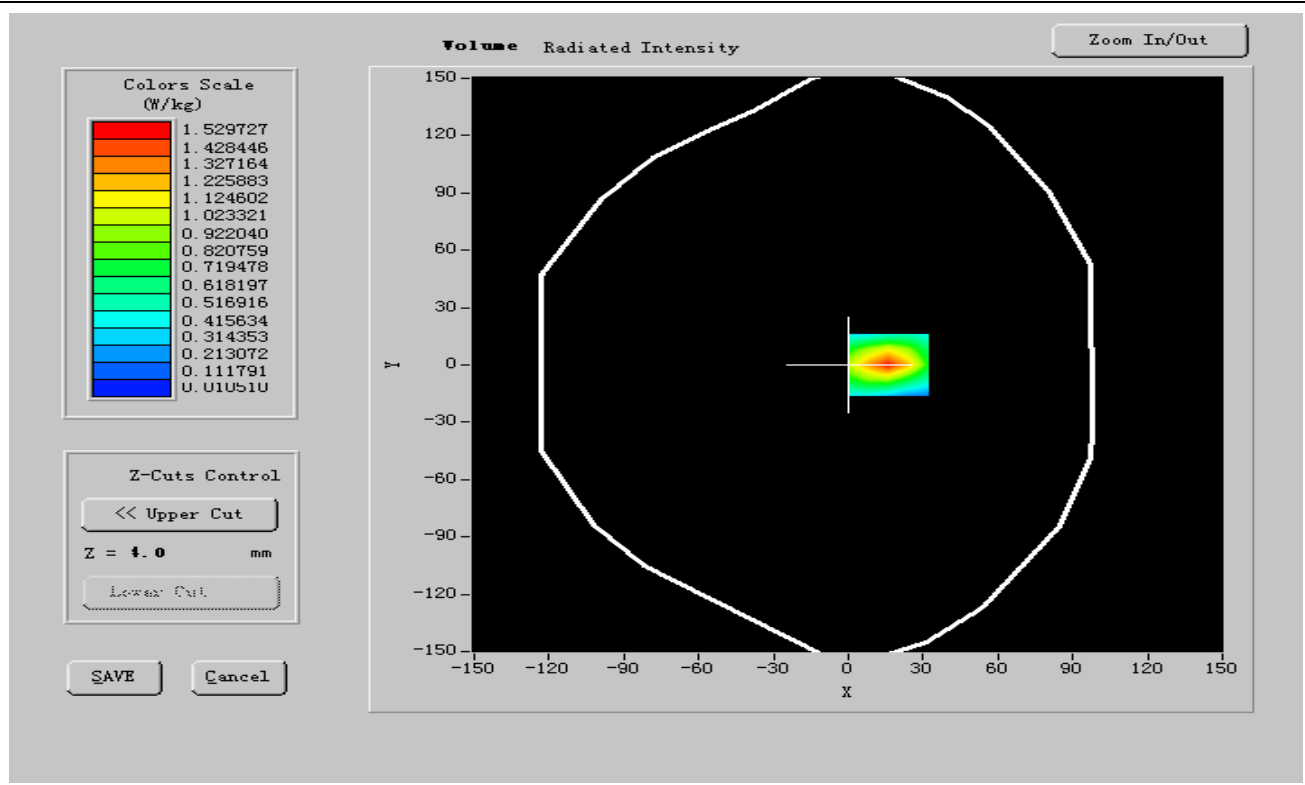




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.253710
SAR 1g (W/Kg)	0.382144

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.4468	0.3054	0.1861	0.1236	0.0752	0.0030

SAR, Z Axis Scan (X = -10, Y = 12)

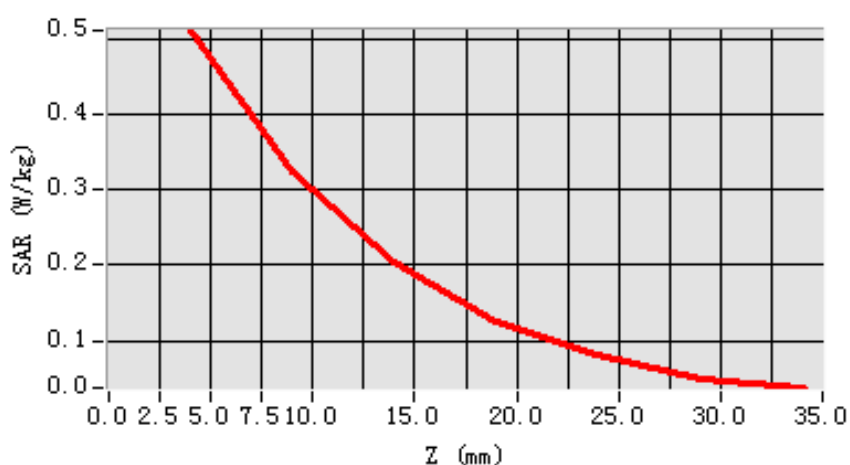



III. WCDMA BAND V RESULTS

<u>TYPE</u>	<u>PARAMETERS</u>
<u>Phone</u>	<u>Measurement 1:</u> Right Head with Cheek device position on Low Channel in WCDMA band V mode <u>Measurement 2:</u> Right Head with Cheek device position on Middle Channel in WCDMA band V mode <u>Measurement 3:</u> Right Head with Cheek device position on High Channel in WCDMA band V mode <u>Measurement 4:</u> Right Head with Tilt device position on Low Channel in WCDMA band V mode <u>Measurement 5:</u> Right Head with Tilt device position on Middle Channel in WCDMA band V mode <u>Measurement 6:</u> Right Head with Tilt device position on High Channel in WCDMA band V mode <u>Measurement 7:</u> Left Head with Cheek device position on Low Channel in WCDMA band V mode <u>Measurement 8:</u> Left Head with Cheek device position on Middle Channel in WCDMA band V mode <u>Measurement 9:</u> Left Head with Cheek device position on High Channel in WCDMA band V mode <u>Measurement 10:</u> Left Head with Tilt device position on Low Channel in WCDMA band V mode <u>Measurement 11:</u> Left Head with Tilt device position on Middle Channel in WCDMA band V mode <u>Measurement 12:</u> Left Head with Tilt device position on High Channel in WCDMA band V mode <u>Measurement 13:</u> BackSide toward phantom 15mm, Low Channel in WCDMA band V mode <u>Measurement 14:</u> BackSide toward phantom 15mm, Middle Channel in WCDMA band V mode <u>Measurement 15:</u> BackSide toward phantom 15mm, High Channel in WCDMA band V mode <u>Measurement 16:</u> BackSide toward phantom 15mm, Low Channel in HSDPA band V mode <u>Measurement 17:</u> BackSide toward phantom 15mm, Middle Channel in HSDPA band V mode <u>Measurement 18:</u> BackSide toward phantom 15mm, High Channel in HSDPA band V mode <u>Measurement 19:</u> FrontSide toward phantom 15mm, Low Channel in WCDMA band V mode <u>Measurement 20:</u> FrontSide toward phantom 15mm, Middle



	Channel in WCDMA band V mode <u>Measurement 21:</u> FrontSide toward phantom 15mm, High Channel in WCDMA band V mode <u>Measurement 22:</u> FrontSide toward phantom 15mm, Low Channel in HSDPA band V mode <u>Measurement 23:</u> FrontSide toward phantom 15mm, Middle Channel in HSDPA band V mode <u>Measurement 24:</u> FrontSide toward phantom 15mm, High Channel in HSDPA band V mode
--	--

**MEASUREMENT 1****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Right head
Device Position	Cheek
Band	WCDMA band V
Channels	Low
Signal	WCDMA

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPC32,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	826.400000
Relative permittivity (real part)	41.491777
Relative permittivity (imaginary part)	19.510000
Conductivity (S/m)	0.923144
Variation (%)	-1.450000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	20.66, 20.51, 28.36
Crest factor:	1:1



SURFACE SAR

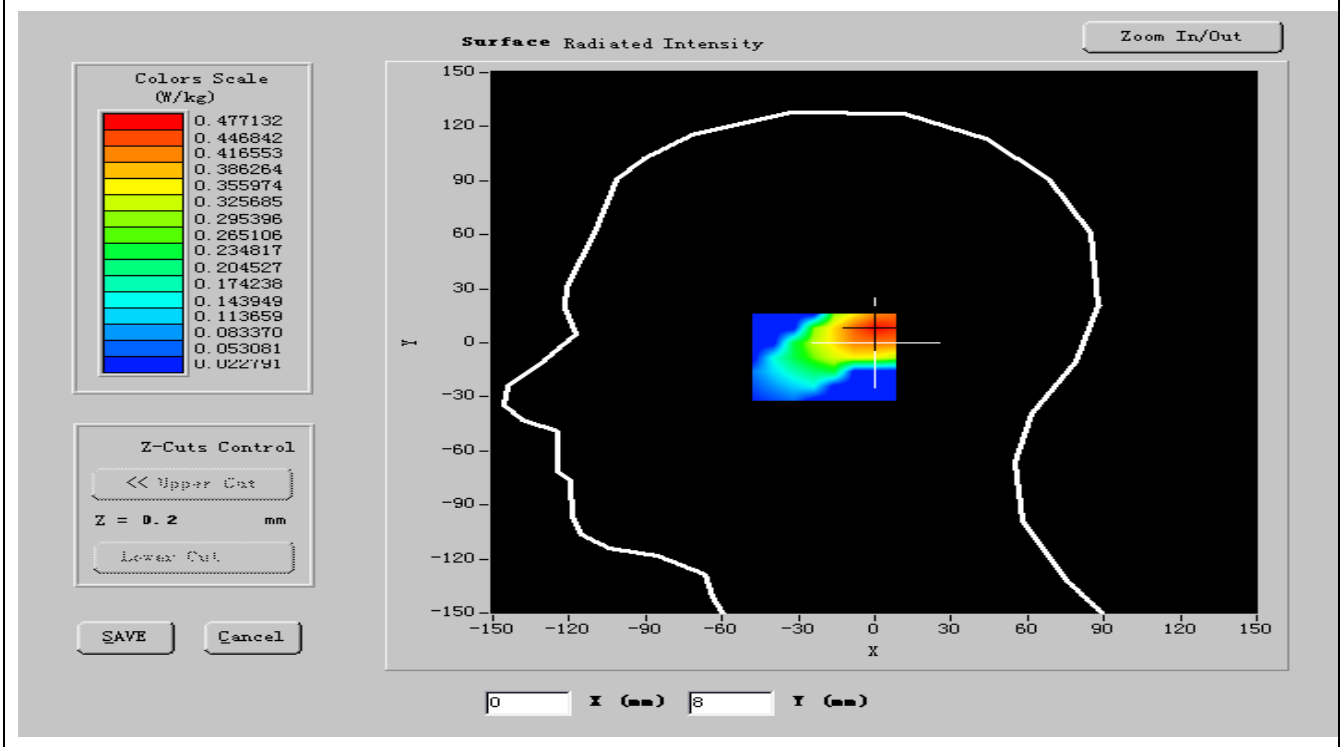

VOLUME SAR

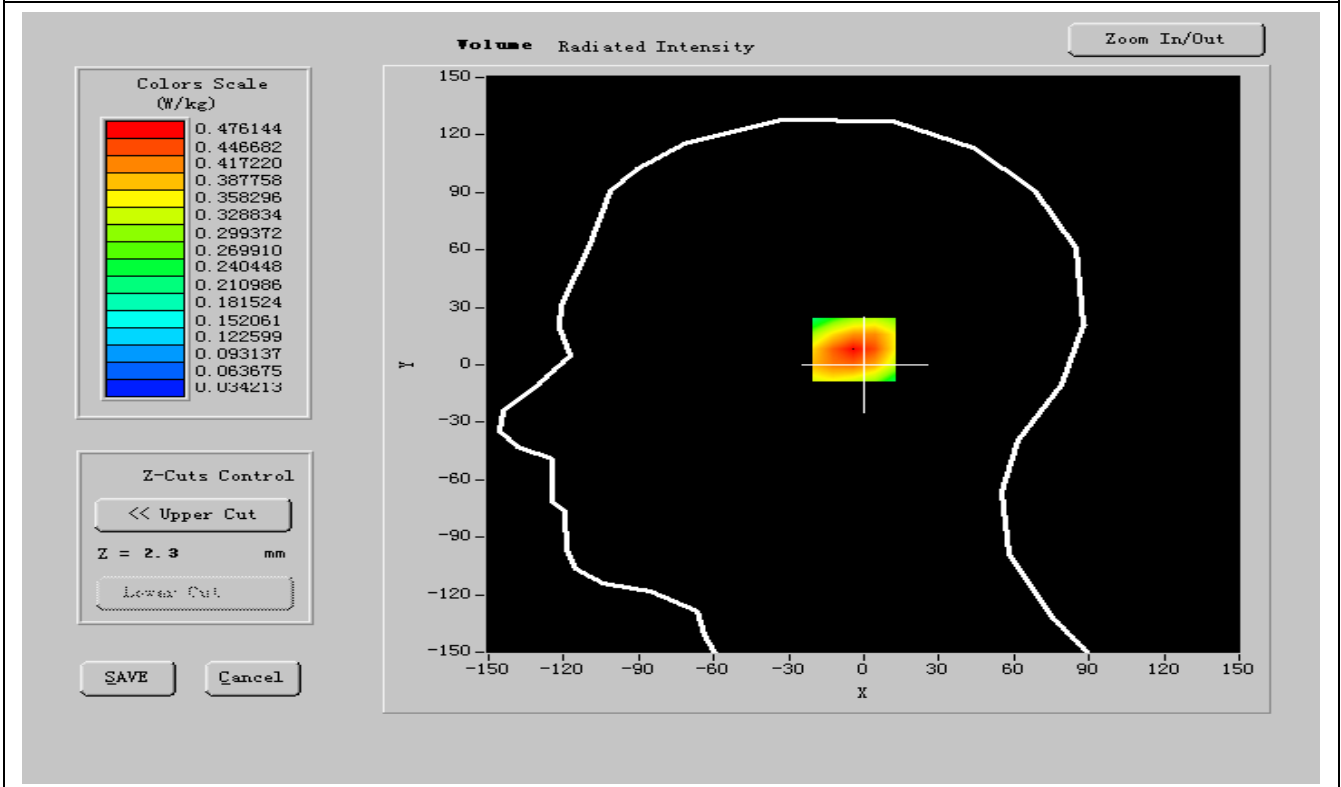




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.110129
SAR 1g (W/Kg)	0.243204

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.8491	0.5876	0.4532	0.2756	0.1985	0.1465

SAR, Z Axis Scan (X = -13, Y = -3)

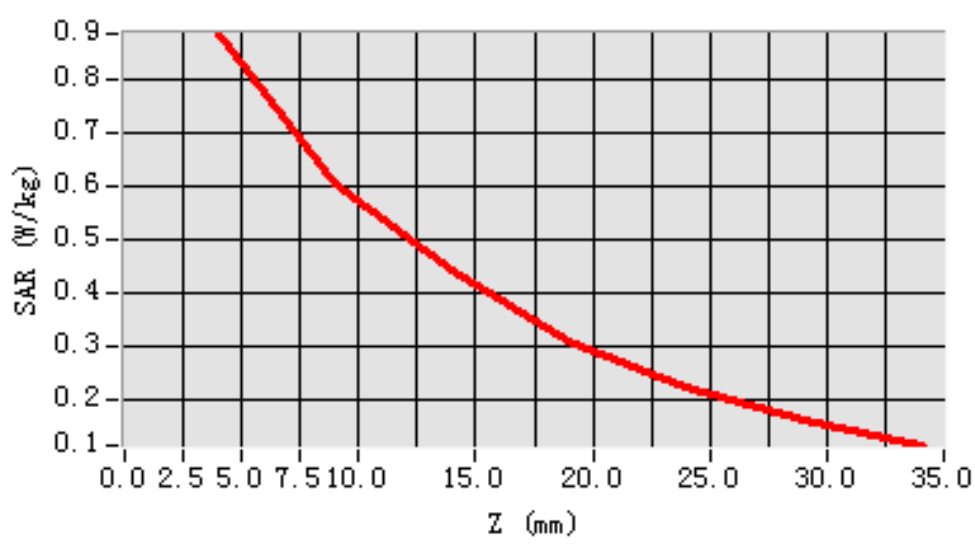

**MEASUREMENT 2****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Right head
Device Position	Cheek
Band	WCDMA band V
Channels	Middle
Signal	WCDMA

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPC32,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	836.400000
Relative permittivity (real part)	41.444610
Relative permittivity (imaginary part)	19.522697
Conductivity (S/m)	0.916555
Variation (%)	-0.200000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	20.66, 20.51, 28.36
Crest factor:	1:1



SURFACE SAR

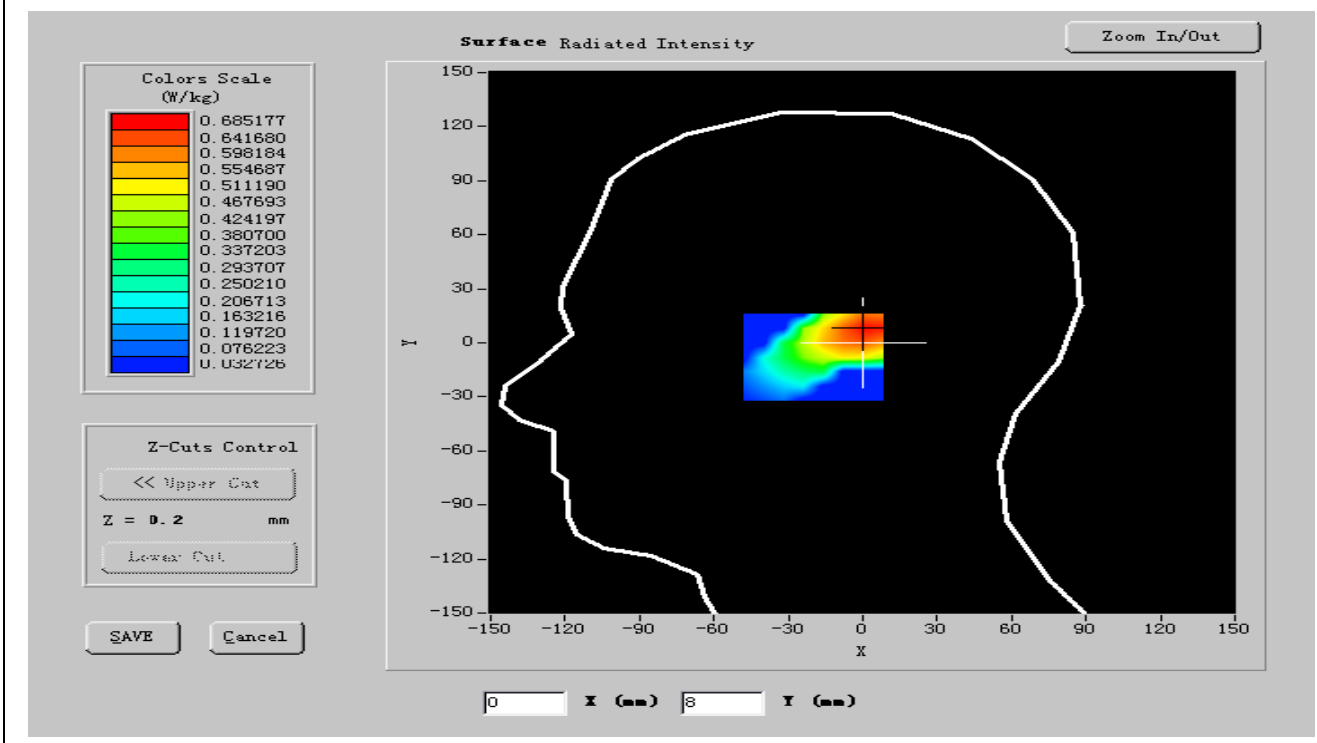

VOLUME SAR

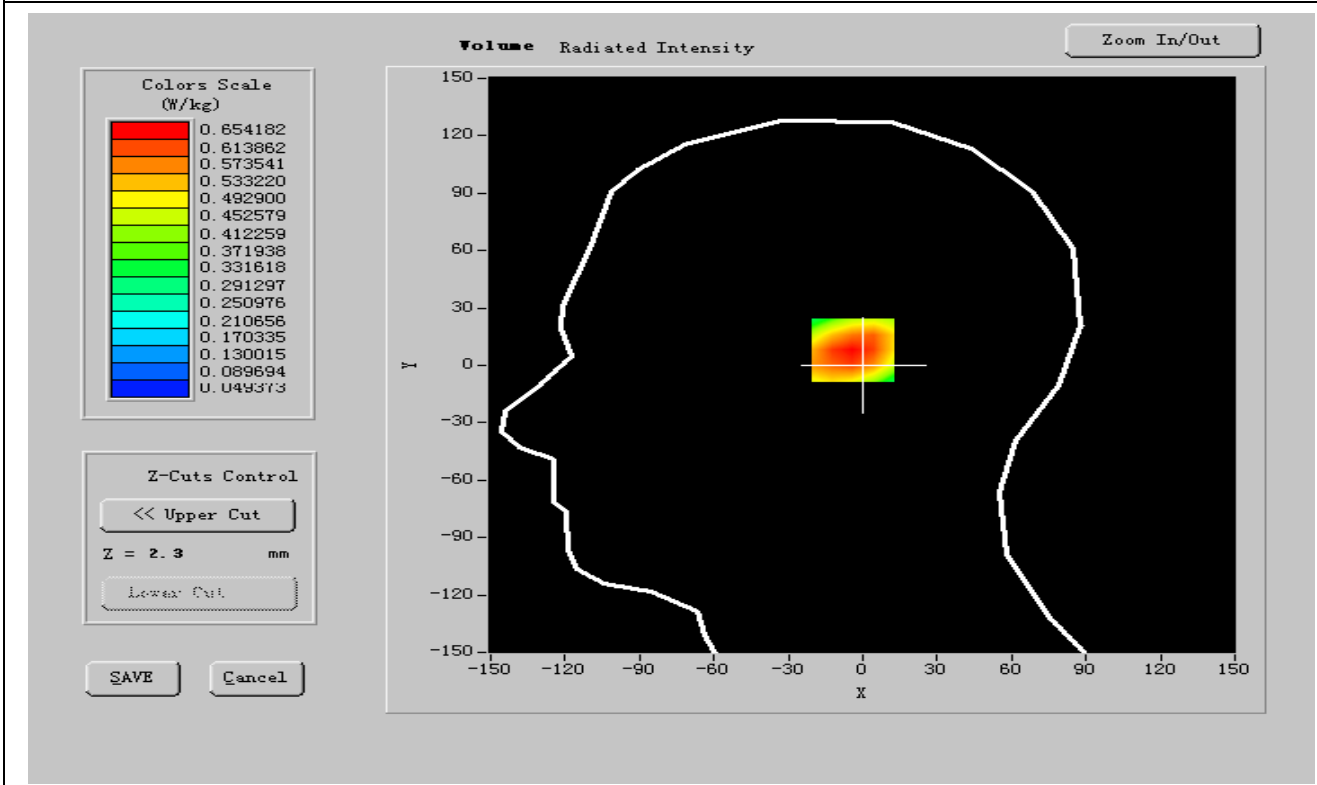




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.161427
SAR 1g (W/Kg)	0.284104

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.8683	0.5987	0.4463	0.4073	0.2345	0.1673

SAR, Z Axis Scan (X = -13, Y = -3)

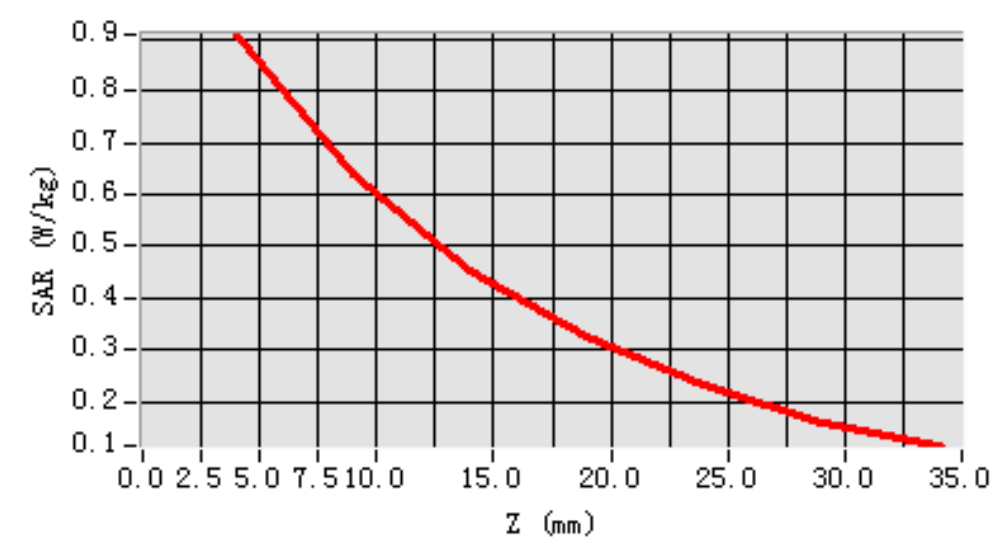

**MEASUREMENT 3****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Right head
Device Position	Cheek
Band	WCDMA band V
Channels	High
Signal	WCDMA

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPC32,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	846.600000
Relative permittivity (real part)	41.400523
Relative permittivity (imaginary part)	19.611047
Conductivity (S/m)	0.922155
Variation (%)	-0.200000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	20.66, 20.51, 28.36
Crest factor:	1:1



SURFACE SAR

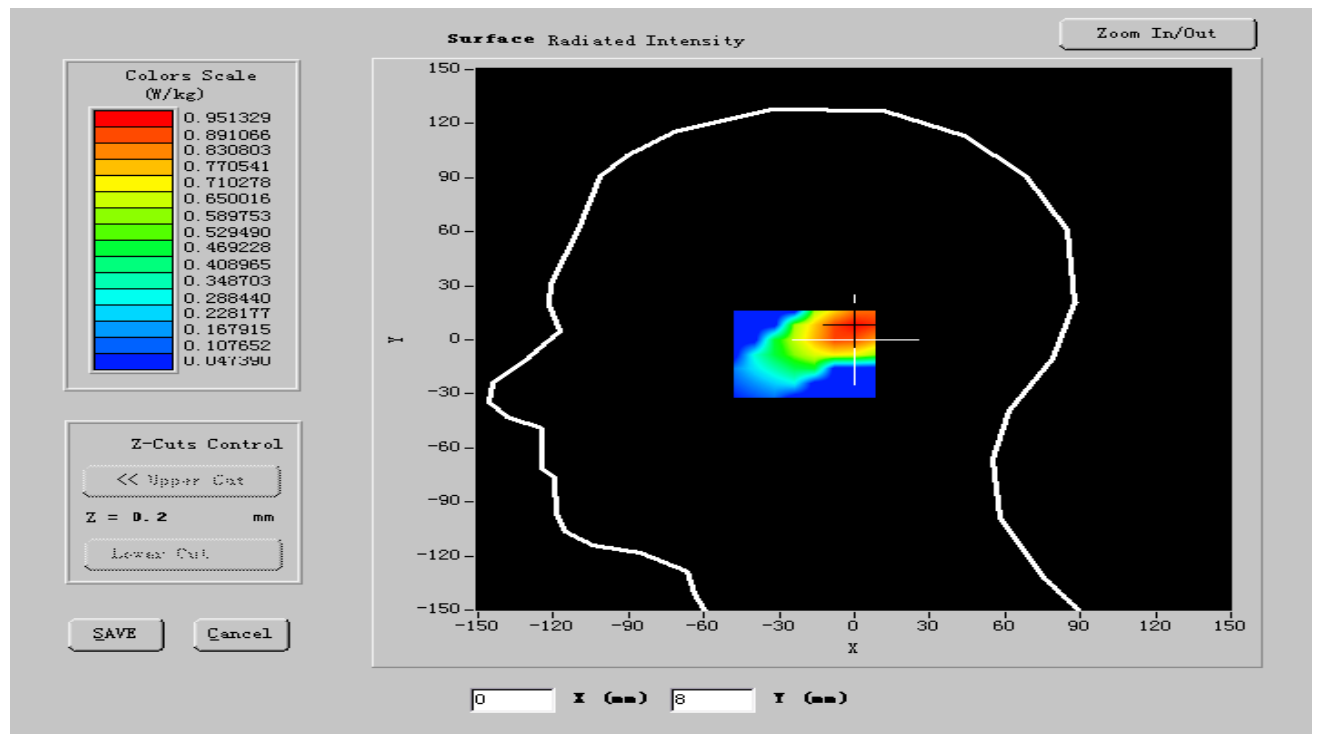

VOLUME SAR

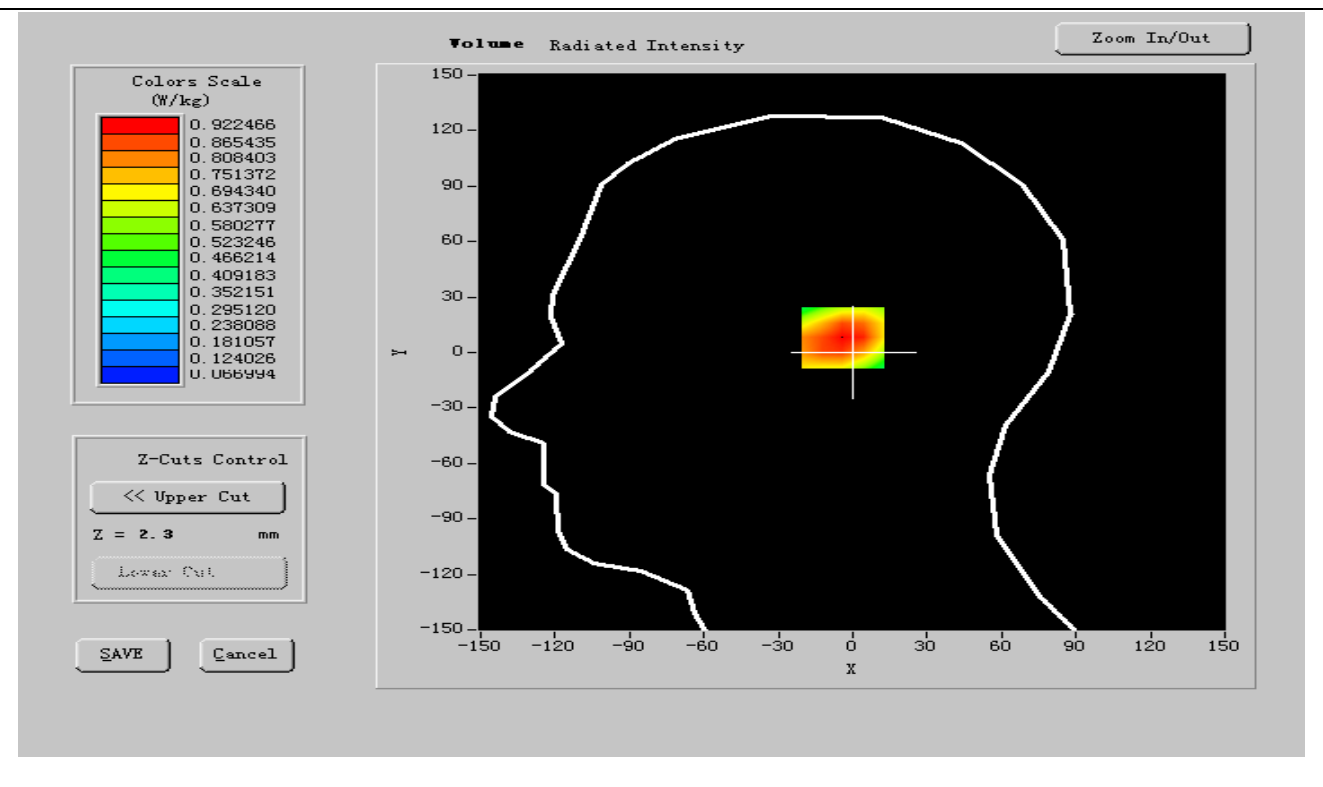




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.123215
SAR 1g (W/Kg)	0.262142

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.84446	0.58763	0.4127	0.2947	0.1987	0.1324

SAR, Z Axis Scan (X = -13, Y = -3)

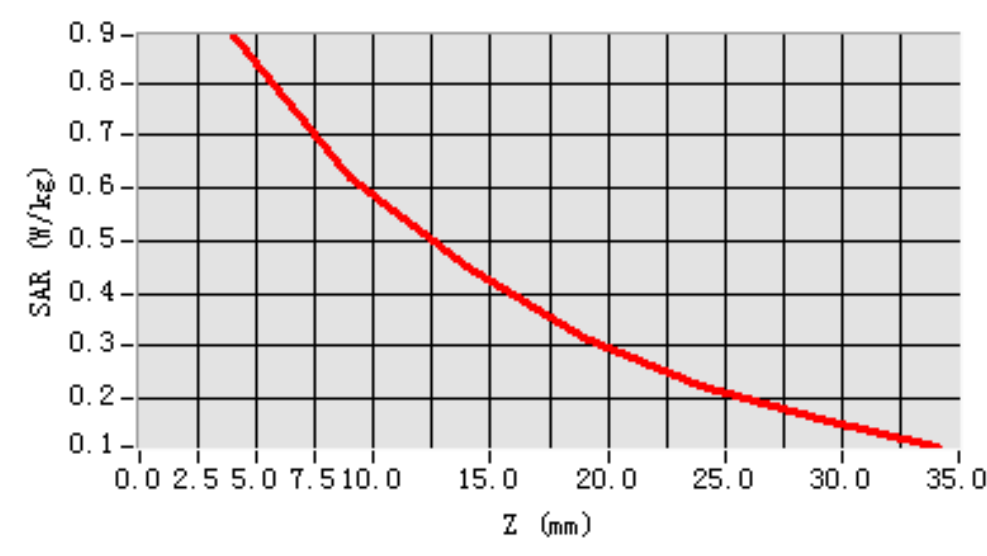

**MEASUREMENT 4****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Right head
Device Position	Tilt
Band	WCDMA band V
Channels	Low
Signal	WCDMA

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPC32,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results


Frequency (MHz)	826.400000
Relative permittivity (real part)	41.443276
Relative permittivity (imaginary part)	19.581064
Conductivity (S/m)	0.914617
Variation (%)	-1.300000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	20.66, 20.51, 28.36
Crest factor:	1:1



SURFACE SAR

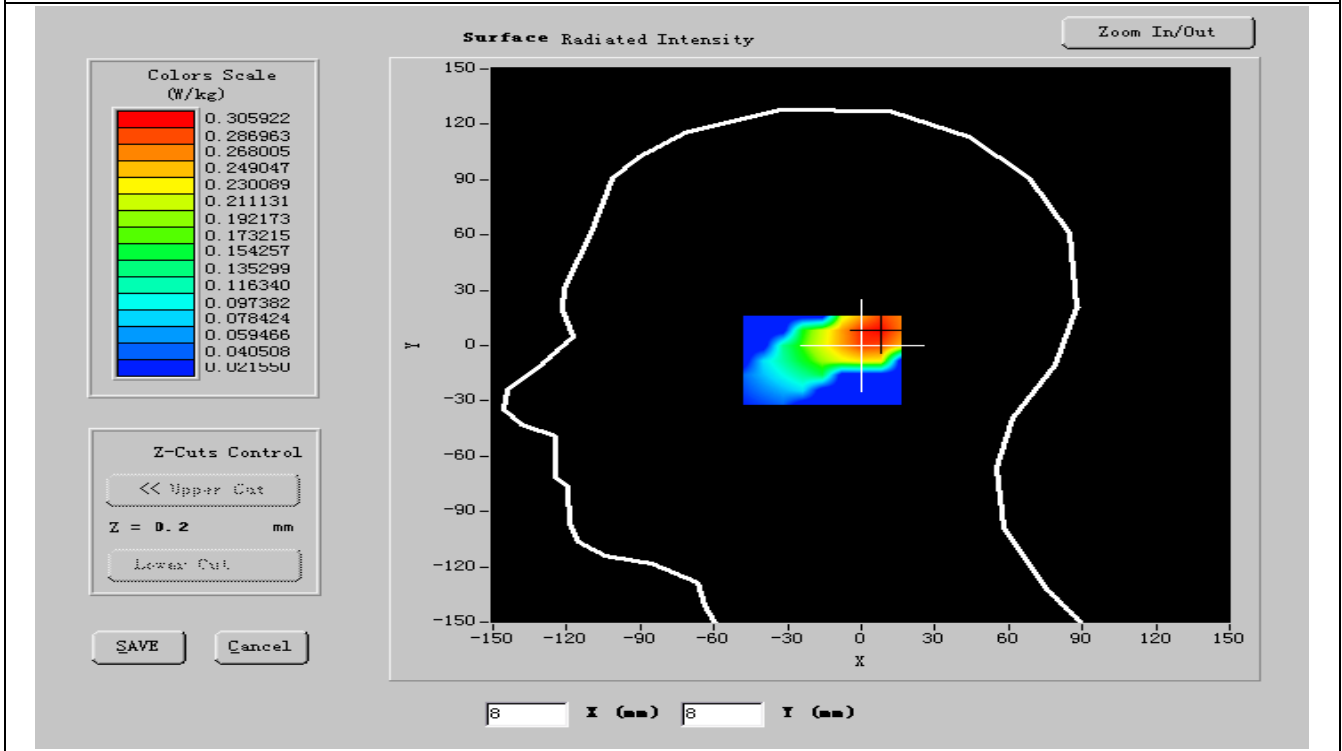

VOLUME SAR

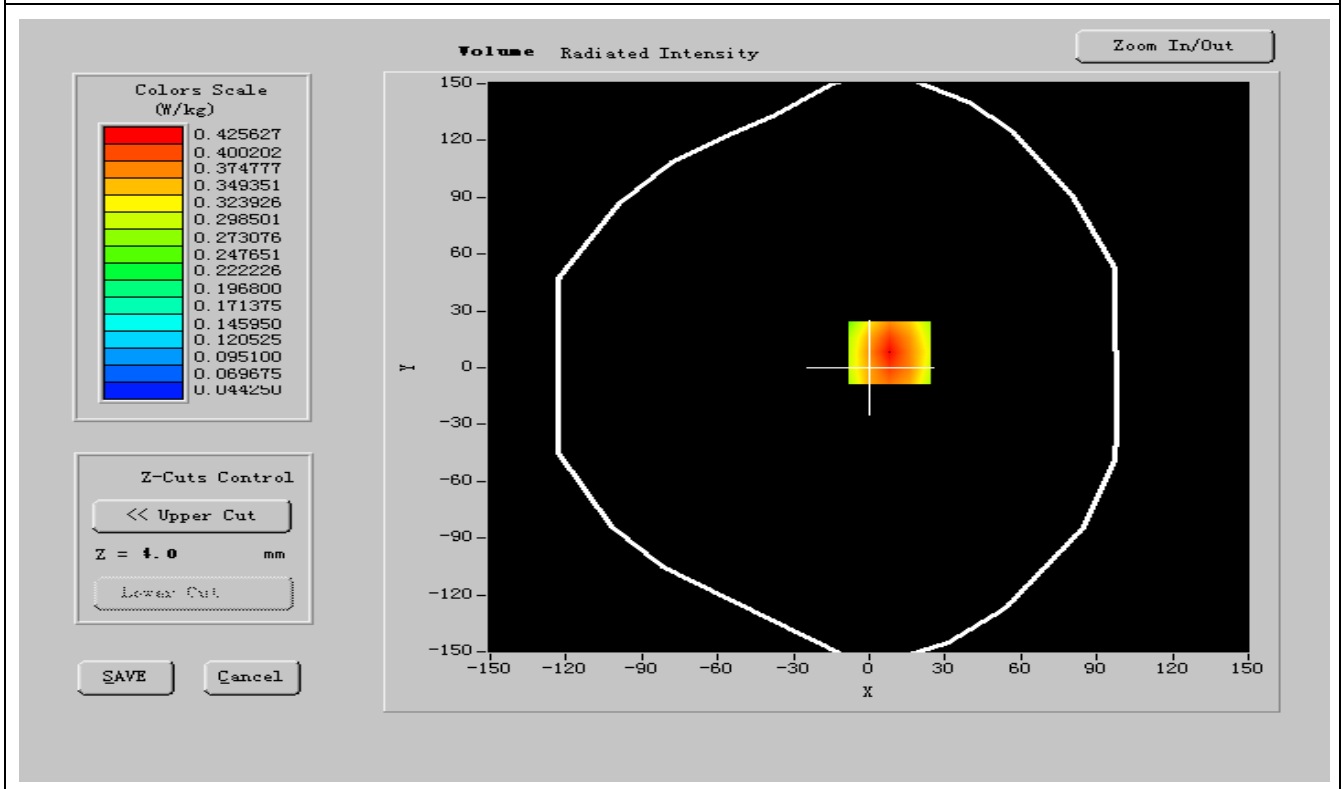




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.083021
SAR 1g (W/Kg)	0.140325

Z Axis Scan

Z(mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	0.0000	0.5756	0.4854	0.3354	0.2154	0.1911	0.0111

SAR, Z Axis Scan (X = -9, Y = -6)

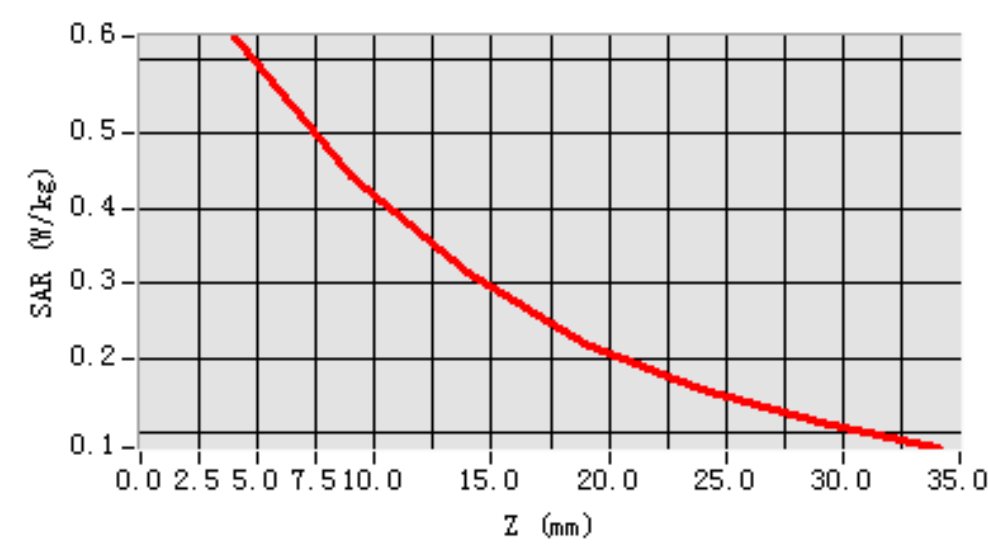

**MEASUREMENT 5****Date of measurement: 24/9/2010****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Right head
Device Position	Tilt
Band	WCDMA band V
Channels	Middle
Signal	WCDMA

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibration Due: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPC32,SN 48/05)	Calibration Due: 02/09/2011
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibration Due: N/A
Liquid	Antennessa	Calibration Due: N/A
Measurement SW	OPEN SAR V2.1	Calibration Due: N/A

C. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	41.470244
Relative permittivity (imaginary part)	19.571880
Conductivity (S/m)	0.921224
Variation (%)	-0.890000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	20.66, 20.51, 28.36
Crest factor:	1:1



SURFACE SAR

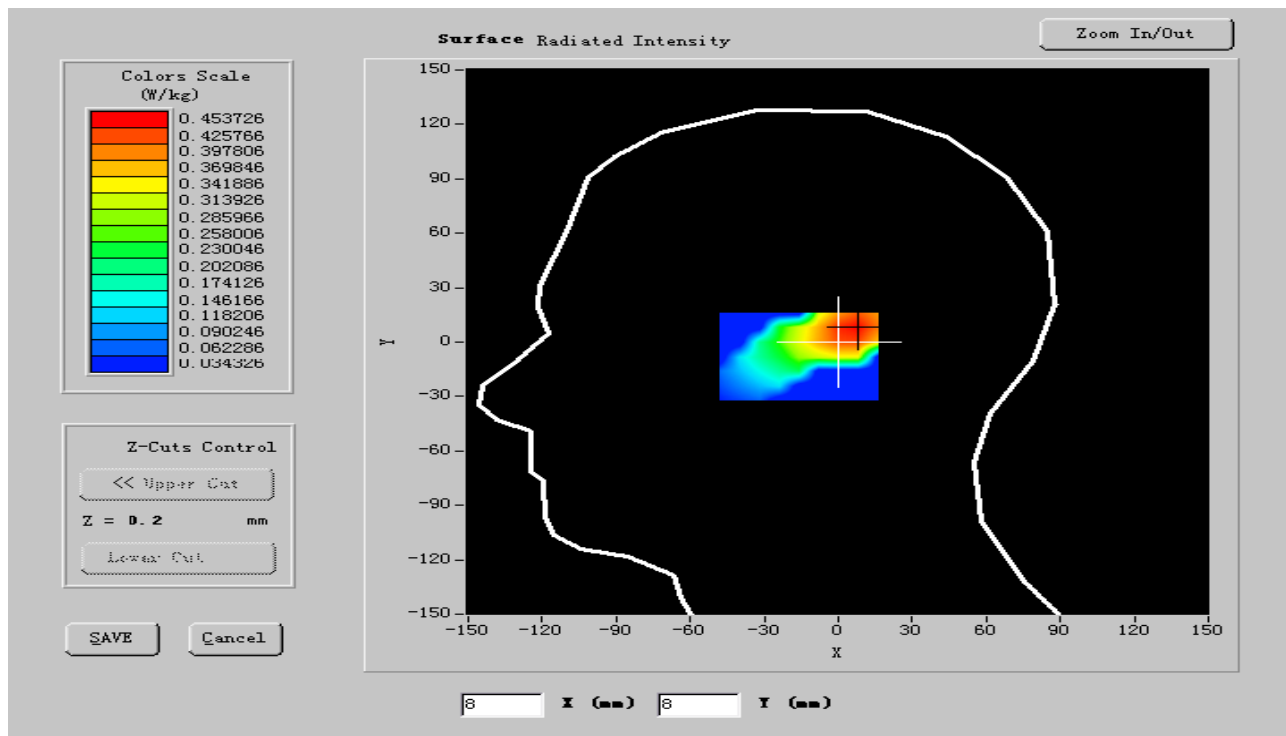

VOLUME SAR

