



**CONFORMANCE TEST REPORT
FOR
FCC 47 CFR, Part 15 Subpart C**

Report No.: 08-09-MAS-078-01

Client: **SPECTEC COMPUTER CO., LTD**
 Product: **Micro SDIO Wireless Lan-11b/g Card**
 Model: **SDW-823**
 FCC ID: **S2Y-MWLAN-11B-G**
 Manufacturer/supplier: **SPECTEC COMPUTER CO., LTD**

Date test item received: 2008/09/09

Date test campaign completed: 2008/11/26

Date of issue: 2008/12/01


The test result only corresponds to the tested sample. It is not permitted to copy this report, in part or in full, without the permission of the test laboratory.

Total number of pages of this test report: 58 pages

Total number of pages of photos: External photos 1 pages

Internal photos 2 pages

Setup photos 2 pages

Test Engineer	Checked By	Approved By
 Ivan Tsai	 David You	 Joe Hsieh

ELECTRONICS TESTING CENTER, TAIWAN
 NO.8, LANE 29, WENMING RD.,
 LESHAN TSUEN, GUISHAN SHIANG,
 TAOYUAN COUNTY, TAIWAN 33383,
 R.O.C.TAIWAN, R.O.C.

TEL: (03) 3276170~4
 INT: +886-3-3276170~4
 FAX: (03) 3276188
 INT: +886-3-3276188



Client : SPECTEC COMPUTER CO., LTD
Address : 6F No. 92 Nanking E. Rd. Sec. 5, Taipei 105, Taiwan, R.O.C
Manufacturer : SPECTEC COMPUTER CO., LTD
Address : 6F No. 92 Nanking E. Rd. Sec. 5, Taipei 105, Taiwan, R.O.C
EUT : Micro SDIO Wireless Lan-11b/g Card
Trade name : SPECTEC
Model No. : SDW-823
Power Source : 3.3Vdc
Regulations applied : FCC 47 CFR, Part 15 Subpart C (2007)

The testing described in this report has been carried out to the best of our knowledge and ability, and our responsibility is limited to the exercise of reasonable care. This certification is not intended to relieve the sellers from their legal and/or contractual obligations.

The compliance test is only certified for the test equipment and the results of the testing report relate only to the item tested. The compliance test of this report was conducted in accordance with the appropriate standards. It's not intention to assure the quality and performance of the product. This report shall not be reproduced except in full, without the approval of ETC. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

Laboratory Introduction: Electronics Testing Center, Taiwan is recognized, filed and mutual recognition arrangement as following:

- ① ISO9001: TÜV Product Service
- ② ISO/IEC 17025: BSMI, CNLA, DGT, NVLAP, CCIBLAC, UL, Compliance
- ③ Filing: FCC, Industry Canada, VCCI
- ④ MRA: Australia, Hong Kong, New Zealand, Singapore, USA, Japan, Korea, China, APLAC through CNLA
- ⑤ FCC Registration Number: 90588, 91094, 91095



NVLAP Lab Code 200133-0

Table of Contents	Page
1 GENERAL INFORMATION	5
1.1 Product Description.....	5
1.2 Characteristics of Device	5
1.3 Test Methodology	5
1.4 Test Facility.....	5
2 PROVISIONS APPLICABLE	6
2.1 Definition	6
2.2 Requirement for Compliance	7
2.3 Restricted Bands of Operation	9
2.4 Labeling Requirement.....	9
2.5 User Information	10
3. SYSTEM TEST CONFIGURATION	11
3.1 Devices for Tested System.....	11
4 CONDUCTED EMISSION MEASUREMENT	12
4.1 Standard Applicable.....	12
4.2 Measurement Procedure.....	12
4.3 Conducted Emission Data	13
4.4 Result Data Calculation	15
4.5 Conducted Measurement Equipment	15
5 ANTENNA REQUIREMENT	16
5.1 Standard Applicable.....	16
5.2 Antenna Construction and Directional Gain.....	16
6 EMISSION BANDWIDTH MEASUREMENT	17
6.1 Standard Applicable	17
6.2 Measurement Procedure	17
6.3 Measurement Equipment	17
6.4 Measurement Data	18
7 OUTPUT POWER MEASUREMENT	26
7.1 Standard Applicable	26
7.2 Measurement Procedure	26
7.3 Measurement Equipment	26
7.4 Measurement Data	27
8 POWER DENSITY MEASUREMENT	29

8.1 Standard Applicable	29
8.2 Measurement Procedure	29
8.3 Measurement Equipment	29
8.4 Measurement Data	30
8.4.1 IEEE 802.11b	30
8.4.2 IEEE 802.11g	34
9 SPURIOUS EMISSION - RF CONDUCTED MEASUREMENT	38
9.1 Standard Applicable	38
9.2 Measurement Procedure	38
9.3 Measurement Equipment	38
9.4 Measurement Data	39
9.4.1 IEEE 802.11b	39
9.4.2 IEEE 802.11g	39
10 RADIATED EMISSION MEASUREMENT	50
10.1 Standard Applicable	50
10.2 Measurement Procedure	50
10.3 Measuring Instrument	52
10.4 Radiated Emission Data	53
10.4.1 Harmonic	53
10.4.2 Spurious Emission	55
10.5 Field Strength Calculation	58

1 GENERAL INFORMATION

1.1 Product Description

- a) Type of EUT : Micro SDIO Wireless Lan-11b/g Card
- b) Trade Name : SPECTEC
- c) Model No. : SDW-823
- d) FCC ID : S2Y-MWLAN-11B-G

1.2 Characteristics of Device

The EUT is a 2.4 GHz Micro SDIO Wireless Lan-11b/g Card. It conforms to the IEEE 802.11b/g protocol and operates in the unlicensed ISM Band at 2.4 GHz. Support maximum 54 Mbps data rates and 11 channels (2412 MHz to 2462 MHz).

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

1.3 Test Methodology

All testing were performed according to the procedures in ANSI C63.4 (2003) and FCC CFR 47 Part 2 and Part 15.

1.4 Test Facility

The semi-anechoic chamber and conducted measurement facility used to collect the radiated and conducted data are located inside the Building at No.8, Lane 29, Wen-ming Road, Lo-shan Tsun, Kweishan Hsiang, Taoyuan, Taiwan, R.O.C.

This site has been accreditation as a FCC filing site.

2 PROVISIONS APPLICABLE

2.1 Definition

Unintentional radiator:

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

Class B Digital Device :

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business or industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

Intentional radiator:

A device that intentionally generates and emits radio frequency energy by radiation or induction.

2.2 Requirement for Compliance

(1) Conducted Emission Requirement

For unintentional device, according to §15.107(a) Line Conducted Emission Limits is as following:

Frequency MHz	Quasi Peak dB μ V	Average dB μ V
0.15 - 0.5	66-56*	56-46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

*Decreases with the logarithm of the frequency.

For intentional device, according to §15.207(a) Line Conducted Emission Limits is same as above table.

(2) Radiated Emission Requirement

For unintentional device, according to §15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency MHz	Distance Meters	Radiated dB μ V/m	Radiated μ V/m
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
above 960	3	54.0	500

For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

(3) Antenna Requirement

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

(4) Bandwidth Requirement

According to 15.247 (a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

(5) Output Power Requirement

For systems using digital modulation , according to 15.247(b), the maximum peak output power of the intentional radiator shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(6) Spurious Emissions Measurement

According to 15.247 (c) , in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

(7) Power Density Requirement

According to 15.247 (d) , for digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission..

2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.25
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

3. SYSTEM TEST CONFIGURATION

3.1 Devices for Tested System

Device	Manufacture	Model No.	Cable Description
Micro SDIO Wireless Lan- 11b/g Card*	SPECTEC COMPUTER CO., LTD	SDW-823	----
Notebook PC	TOSHIBA	S100	3.1m Unshielded Power Line

Note:

1. Remark “*” means equipment under test.

2.

Test Software:	mfc.exe
Parameter setting:	802.11b: 5E
	802.11g: 5E

4 CONDUCTED EMISSION MEASUREMENT


4.1 Standard Applicable

For unintentional and intentional device, Line Conducted Emission Limits are in accordance to § 15.107(a) and §15.207(a) respectively. Both Limits are identical specification.

4.2 Measurement Procedure

1. Setup the configuration per figure 1.
2. A preliminary scan with a spectrum monitor is performed to identify the frequency of emission that has the highest amplitude relative to the limit by operating the EUT in selected modes of operation, typical cable positions, and with a typical system configuration.
3. Record the 6 highest emissions relative to the limit.
4. Measure each frequency obtained from step 3 by a test receiver set on quasi peak detector function, and then record the accuracy frequency and emission level. If all emissions measured in the specified band are attenuated more than 20 dB from the limit, this step would be ignored, and the peak detector function would be used.
5. Confirm the highest three emissions with variation of the EUT cable configuration and record the final data.
6. Repeat all above procedures on measuring each operation mode of EUT.

Figure 1 : Conducted emissions measurement configuration

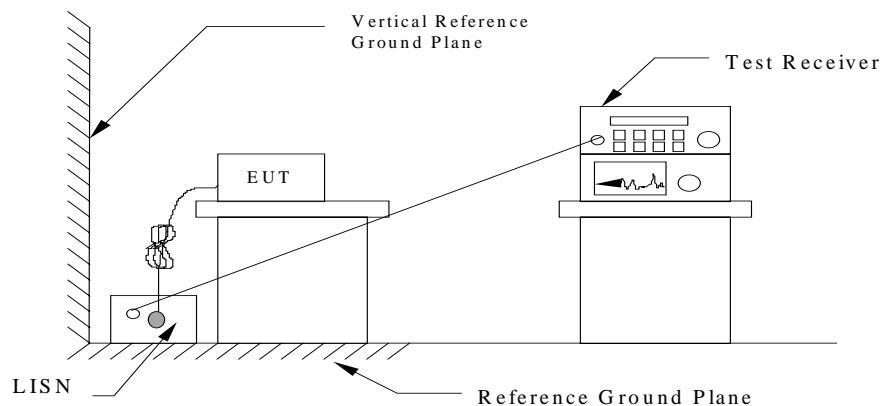

4.3 Conducted Emission Data

File: IVAN


Data: #90

Date: 2008/11/26

Time: 下午 06:15:49

Temperature: 20 °C

Humidity: 61 %

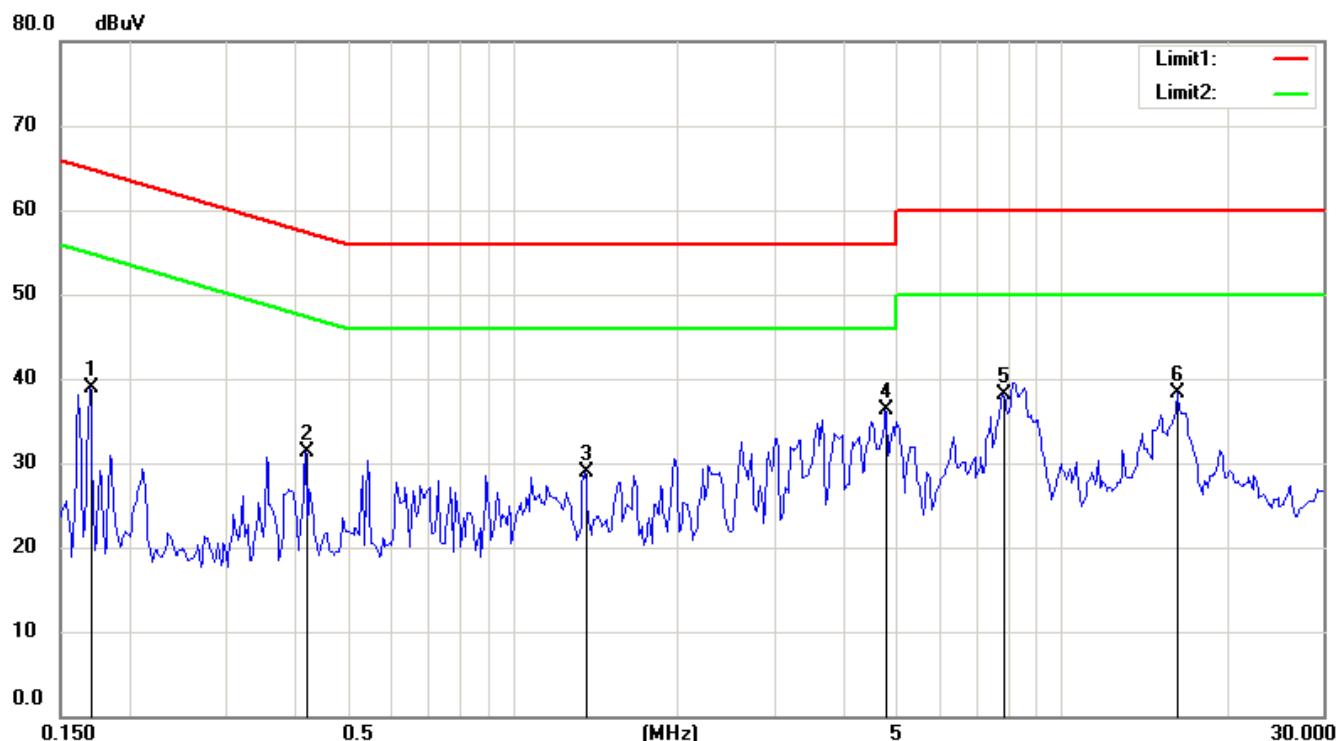

Condition:

FCC Part15 CE-Class B_QP

Phase:

L1

EUT:

Micro SDIO Wireless Lan-11b/g Card

Model:

SDW-823

Test Mode:

Note:

No.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	0.1695	28.86	peak	10.10	38.96	64.98	-26.02
2	0.4195	21.24	peak	10.10	31.34	57.46	-26.12
3	1.3531	18.90	peak	10.10	29.00	56.00	-27.00
4	4.7945	26.20	peak	10.19	36.39	56.00	-19.61
5	7.8414	27.82	peak	10.20	38.02	60.00	-21.98
6	16.2672	28.06	peak	10.33	38.39	60.00	-21.61

Note:

1. Place of measurement: EMC LAB. of the ETC.
2. “***” means the value was too low to be measured.
3. If the data table appeared symbol of “---” means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
4. “#” means the noise was too low, so record the peak value.
5. The estimated measurement uncertainty of the result measurement is ± 2.5 dB.

File: IVAN


Data: #89

Date: 2008/11/26

Time: 下午 06:14:11

Temperature: 20 °C

Humidity: 61 %

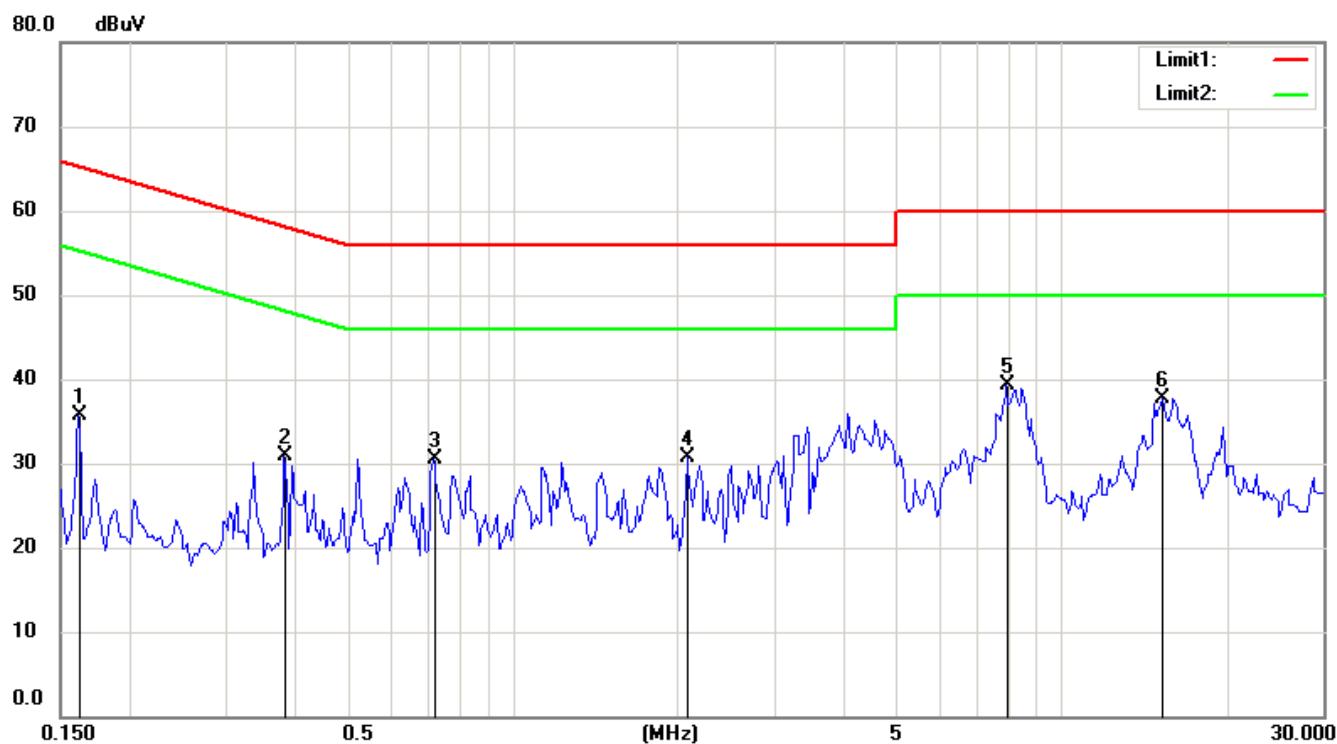

Condition:

FCC Part15 CE-Class B_QP

Phase:

L2

EUT:

Micro SDIO Wireless Lan-11b/g Card

Model:

SDW-823

Test Mode:

Note:

No.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	0.1617	25.57	peak	10.10	35.67	65.38	-29.71
2	0.3844	20.80	peak	10.10	30.90	58.18	-27.28
3	0.7164	20.35	peak	10.10	30.45	56.00	-25.55
4	2.0797	20.55	peak	10.10	30.65	56.00	-25.35
5	7.9508	29.07	peak	10.20	39.27	60.00	-20.73
6	15.2984	27.49	peak	10.31	37.80	60.00	-22.20

Note:

1. Place of measurement: EMC LAB. of the ETC.
2. “***” means the value was too low to be measured.
3. If the data table appeared symbol of “---” means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.
4. “#” means the noise was too low, so record the peak value.
5. The estimated measurement uncertainty of the result measurement is ± 2.5 dB.

4.4 Result Data Calculation

The result data is calculated by adding the LISN Factor to the measured reading. The basic equation with a sample calculation is as follows:

$$\text{RESULT} = \text{READING} + \text{LISN FACTOR} \text{ (Included Cable Loss)}$$

4.5 Conducted Measurement Equipment

The following test equipment are used during the conducted test.

Equipment	Manufacturer	Model No.	Next Cal. Due
RF Test Receiver	Rohde and Schwarz	ESCS30	08/13/2009
LISN	EMCO	37100/2M	02/12/2009

5 ANTENNA REQUIREMENT

5.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to §15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.2 Antenna Construction and Directional Gain

Antenna Type:	Printed Antenna
Antenna Gain:	-0.78 dBi
Antenna Connector:	N/A

6 EMISSION BANDWIDTH MEASUREMENT


6.1 Standard Applicable

According to 15.247(a)(2), system using digital modulation techniques, the minimum 6dB bandwidth shall be at least 500 kHz.

6.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Figure 2: Emission bandwidth measurement configuration.

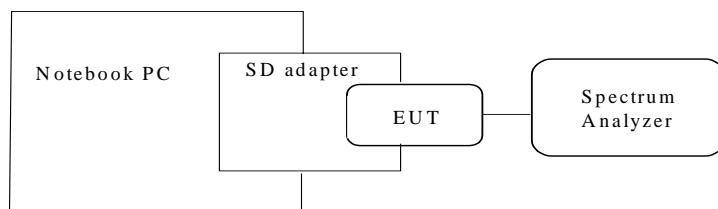

6.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	R & S	FSU46	11/24/2009

6.4 Measurement Data

6.4.1 IEEE 802.11b

Test Date: Nov. 25, 2008Temperature: 22°CHumidity: 61 %

Channel	Frequency (MHz)	Data Transfer Rate (Mbps)	6dB Bandwidth (MHz)	FCC Limit (kHz)	Chart
1	2412	1	10.25	500	Page 19
6	2437	1	10.25	500	Page 20
11	2462	1	10.25	500	Page 21

Note:

1. Please refer to page 19 to page 21 for chart
2. The estimated measurement uncertainty of the result measurement is 8.25×10^{-7} ($1\text{GHz} \leq f \leq 18\text{GHz}$)

File: SPECTEC


Data: #63

Date: 2008/11/25

Temperature: 22 °C

Time: AM 11:54:43

Humidity: 61 %

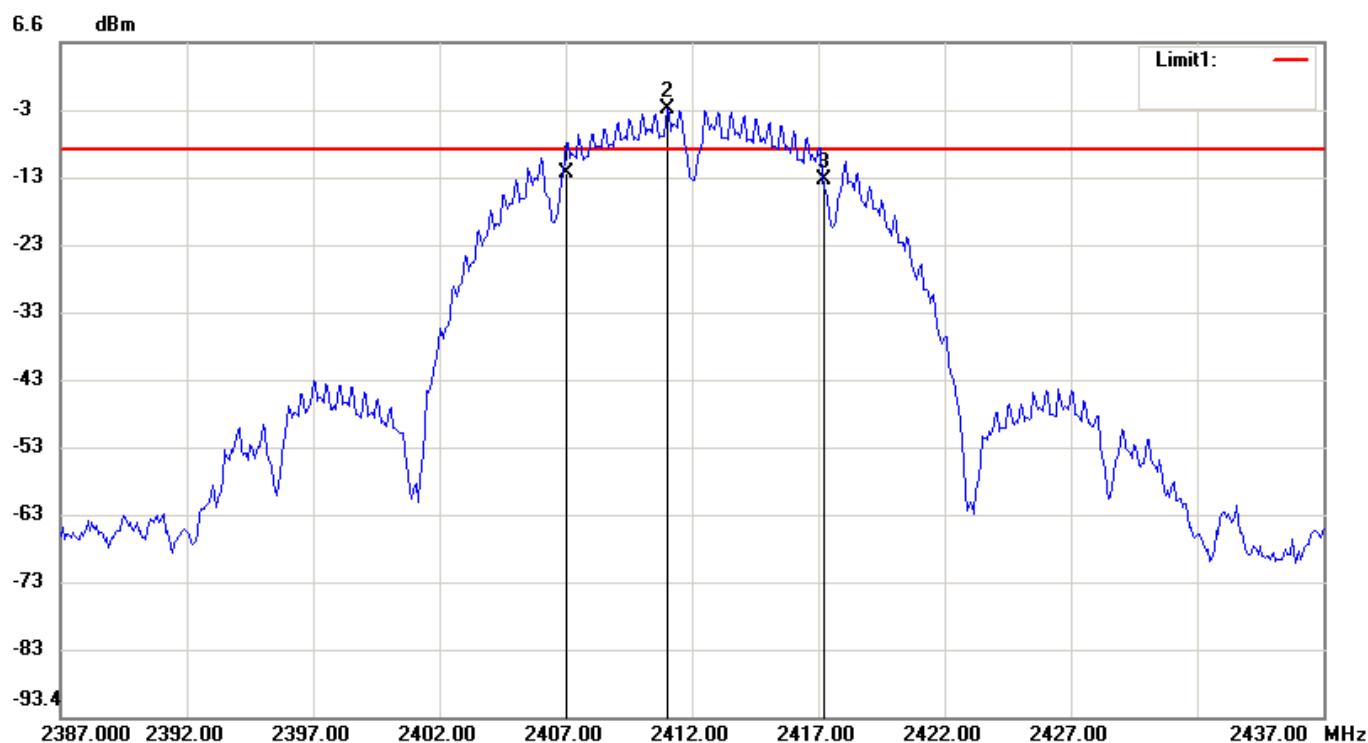

Condition: SYST:PRES

RF Conducted

EUT: Micro SDIO Wireless Lan-11b/g Card

Sweep Time: 500ms Att.: 0dB

Model: SDW-823

RBW: 100 KHz VBW: 300 KHz

Test Mode:

Note: FCC-802.11B Channel 01-6dB EBW

No.	Frequency(MHz)	Level(dBm)
1	2406.917	-12.86
2	2411.000	-3.35
3	2417.167	-13.65

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	10.25	-0.79

File: SPECTEC


Data: #69

Date: 2008/11/25

Temperature: 22 °C

Time: PM 12:37:52

Humidity: 61 %

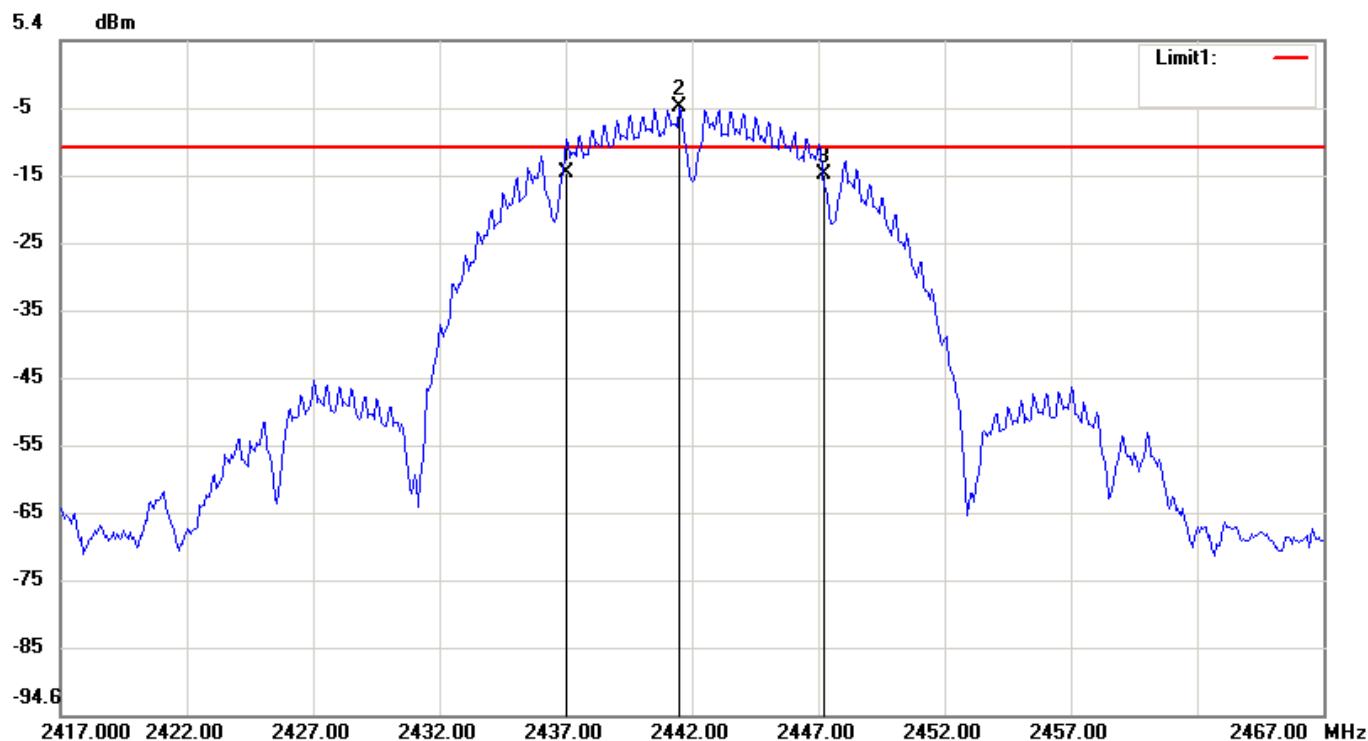**Condition:****RF Conducted****EUT:** Micro SDIO Wireless Lan-11b/g Card**Sweep Time:** 500ms **Att.:** 0dB**Model:** SDW-823**RBW:** 100 KHz **VBW:** 300 KHz**Test Mode:****Note:** FCC-802.11B Channel 07-6dB EBW

No.	Frequency(MHz)	Level(dBm)
1	2436.917	-14.17
2	2441.500	-4.42
3	2447.167	-14.48

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	10.25	-0.31

File: SPECTEC


Data: #73

Date: 2008/11/25

Temperature: 22 °C

Time: PM 12:49:37

Humidity: 61 %

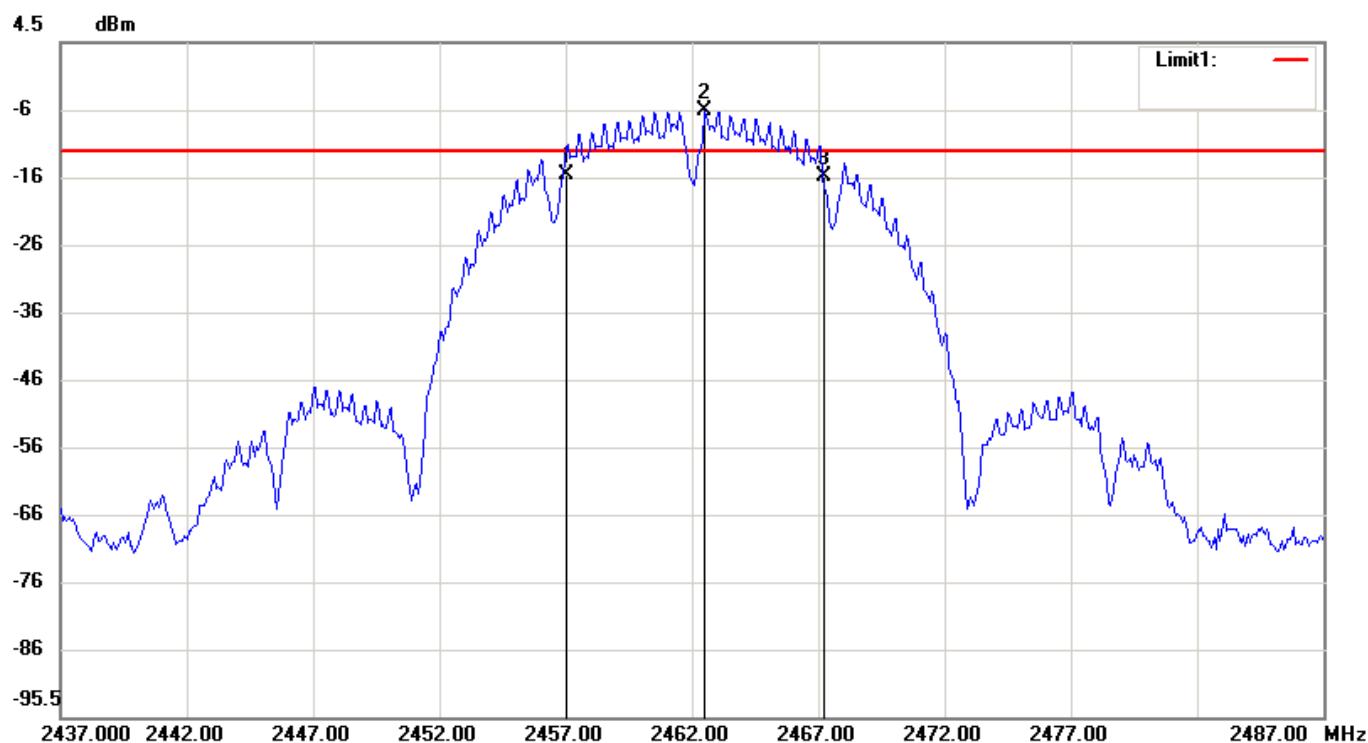**Condition:****RF Conducted****EUT:** Micro SDIO Wireless Lan-11b/g Card**Sweep Time:** 500ms **Att.:** 0dB**Model:** SDW-823**RBW:** 100 KHz **VBW:** 300 KHz**Test Mode:****Note:** FCC-802.11B Channel 11-6dB EBW

No.	Frequency(MHz)	Level(dBm)
1	2456.917	-15.11
2	2462.500	-5.68
3	2467.167	-15.45

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	10.25	-0.34


6.4.2 IEEE 802.11gTest Date: Nov. 25, 2008Temperature: 22°CHumidity: 61 %

Channel	Frequency (MHz)	Data Transfer Rate (Mbps)	6dB Bandwidth (MHz)	FCC Limit (kHz)	Chart
1	2412	6	16.666	500	Page 23
6	2437	6	16.666	500	Page 24
11	2462	6	16.666	500	Page 25

Note:

1. Please refer to page 23 to page 25 for chart
2. The estimated measurement uncertainty of the result measurement is 8.25×10^{-7} ($1GHz \leq f \leq 18GHz$)


File: SPECTEC Data: #47 Date: 2008/11/25 Temperature: 22 °C
 Time: AM 11:15:38 Humidity: 61 %

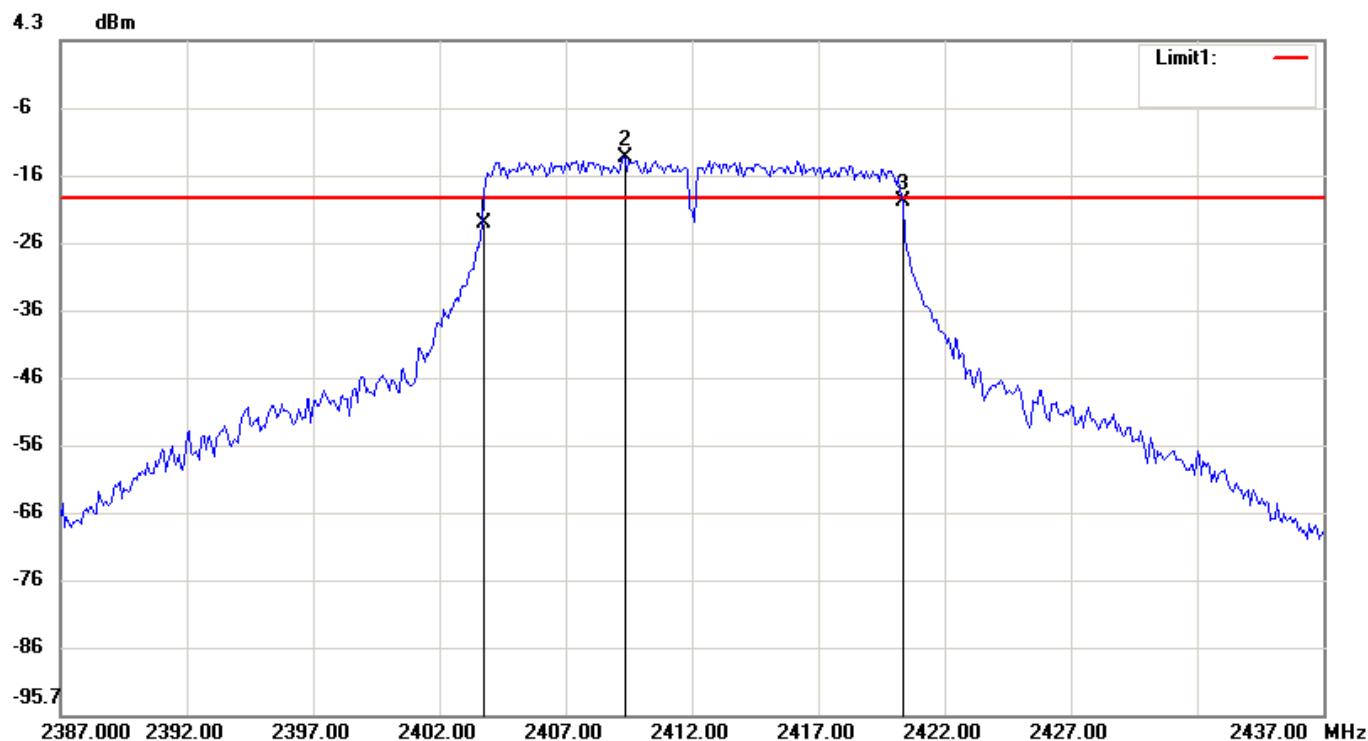**Condition:****RF Conducted****EUT:** Micro SDIO Wireless Lan-11b/g Card**Sweep Time:** 500ms **Att.:** 0dB**Model:** SDW-823**RBW:** 100 KHz **VBW:** 300 KHz**Test Mode:****Note:** FCC-802.11G Channel 01-6dB EBW

No.	Frequency(MHz)	Level(dBm)
1	2403.667	-22.74
2	2409.333	-13.15
3	2420.333	-19.53

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	16.666	3.21


File: SPECTEC Data: #53 Date: 2008/11/25 Temperature: 22 °C
 Time: AM 11:29:45 Humidity: 61 %

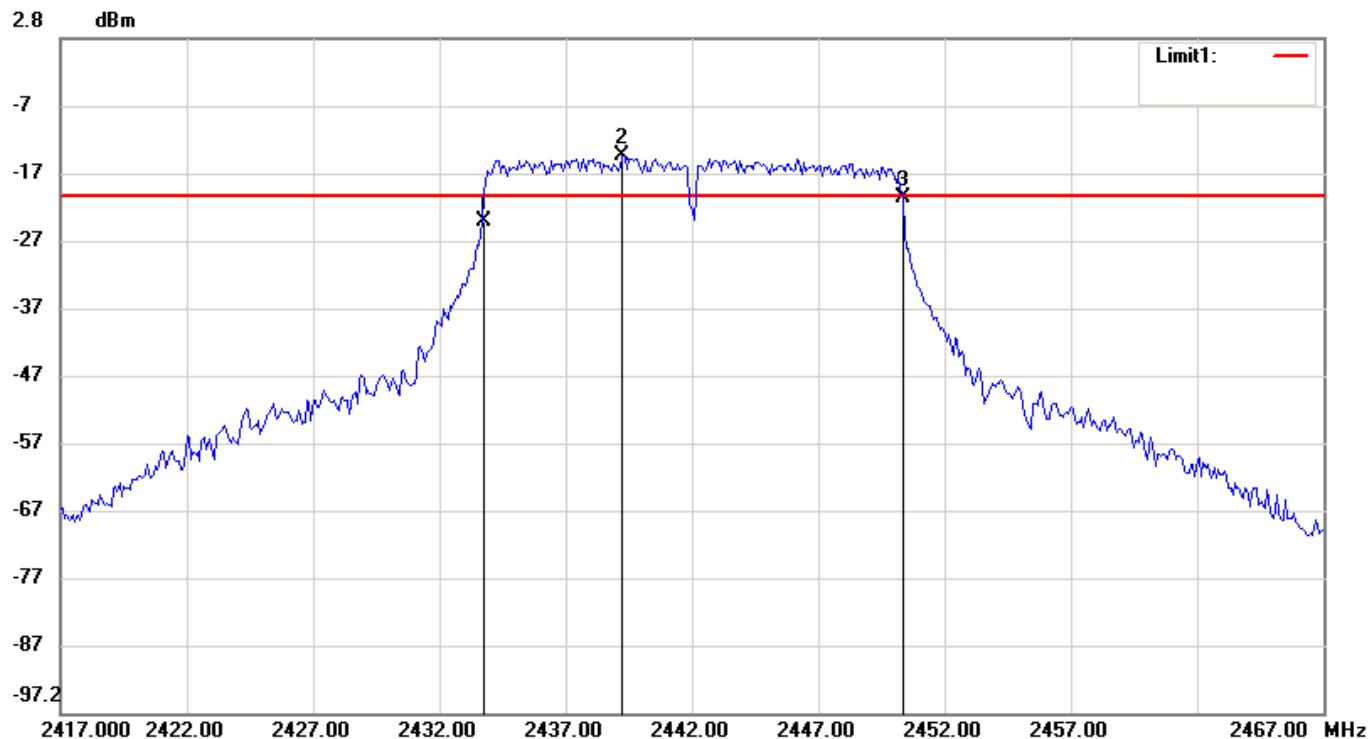**Condition:****RF Conducted****EUT:** Micro SDIO Wireless Lan-11b/g Card**Sweep Time:** 500ms **Att.:** 0dB**Model:** SDW-823**RBW:** 100 KHz **VBW:** 300 KHz**Test Mode:****Note:** FCC-802.11G Channel 07-6dB EBW

No.	Frequency(MHz)	Level(dBm)
1	2433.667	-24.37
2	2439.250	-14.62
3	2450.333	-20.89

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	16.666	3.48

File: SPECTEC Data: #57 Date: 2008/11/25 Temperature: 22 °C
Time: AM 11:37:54 Humidity: 61 %

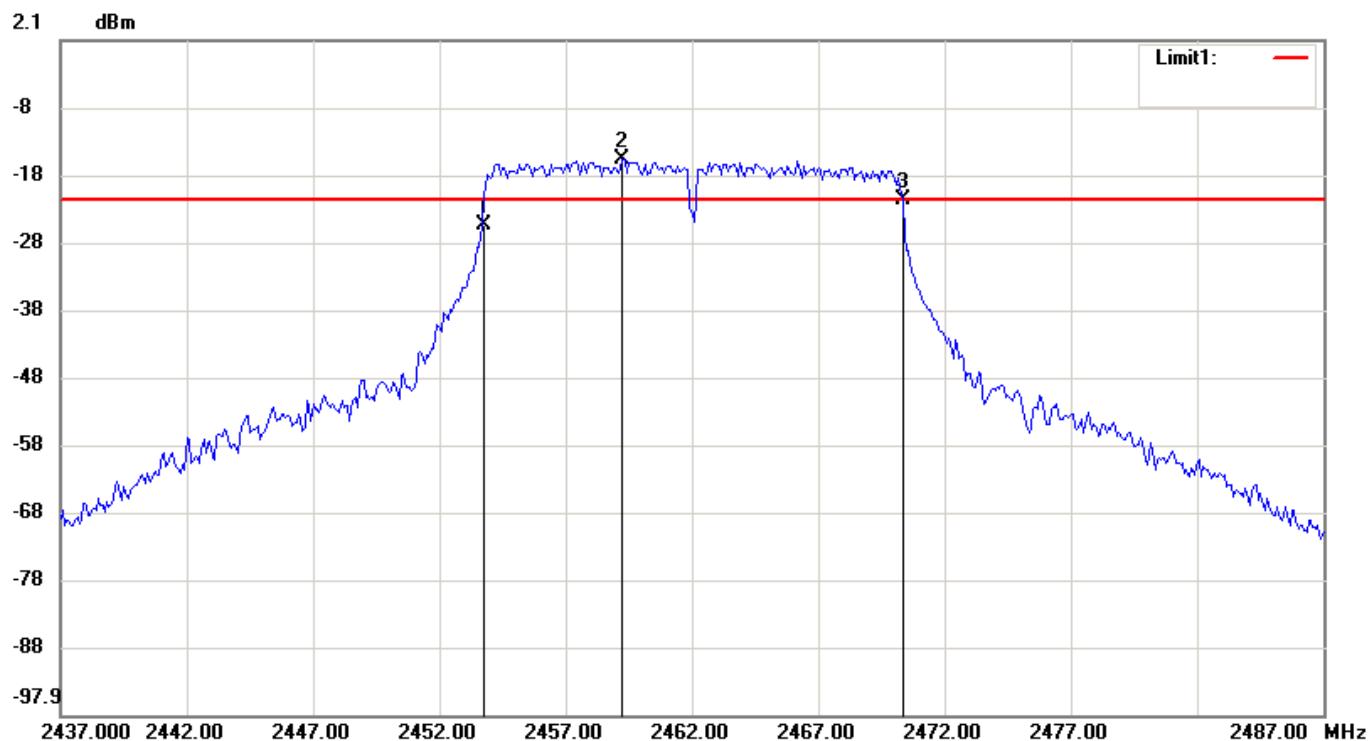**Condition:****RF Conducted****EUT:** Micro SDIO Wireless Lan-11b/g Card**Sweep Time:** 500ms **Att.:** 0dB**Model:** SDW-823**RBW:** 100 KHz **VBW:** 300 KHz**Test Mode:****Note:** FCC-802.11G Channel 11-6dB EBW

No.	Frequency(MHz)	Level(dBm)
1	2453.667	-25.26
2	2459.250	-15.43
3	2470.333	-21.60

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	16.666	3.66

7 OUTPUT POWER MEASUREMENT


7.1 Standard Applicable

For direct sequence system, according to 15.247(b), the maximum peak output power of the transmitter shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 3. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range.
3. Measure the highest value appearing on power meter and record the level to calculate result data.
4. Repeat above procedures until all frequencies measured were complete.

Figure 3: Output power measurement configuration.

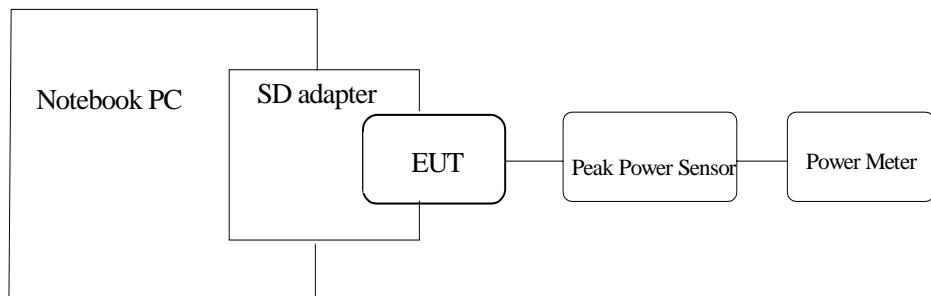

7.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Power Meter	Boonton	4532-0102	05/04/2009
Peak Power Sensor	Boonton	57518	11/07/2009

7.4 Measurement Data

7.4.1 IEEE 802.11b

Test Date: Nov. 25, 2008Temperature: 22°CHumidity: 61 %

Maximum Peak Output Power

Channel	Frequency (MHz)	Data Transfer Rate (Mbps)	Reading (dBm)	Attenuator & Cable Loss (dB)	Maximum Peak Output Power (dBm)	Maximum Peak Output Power (mW)	FCC Limit (mW)	Chart
1	2412	1	-0.84	10.0	9.17	8.251	1000	-
6	2437	1	-1.79	10.0	8.21	6.618	1000	-
11	2462	1	-1.15	10.0	8.85	7.681	1000	-

Average Output Power

Channel	Frequency (MHz)	Data Transfer Rate (Mbps)	Reading (dBm)	Attenuator & Cable Loss (dB)	Average Output Power (dBm)
1	2412	1	-4.34	10.0	5.67
6	2437	1	-5.51	10.0	4.49
11	2462	1	-6.75	10.0	3.25

Note:

The estimated measurement uncertainty of the result measurement is $\pm 1.5\text{dB}$ ($1\text{GHz} \leq f \leq 18\text{GHz}$)

7.4.2 IEEE 802.11gTest Date: Nov. 25, 2008Temperature: 22°CHumidity: 61 %**Maximum Peak Output Power**

Channel	Frequency (MHz)	Data Transfer Rate (Mbps)	Reading (dBm)	Attenuator & Cable Loss (dB)	Maximum Peak Output Power (dBm)	Maximum Peak Output Power (mW)	FCC Limit (mW)	Chart
1	2412	6	-0.47	10.0	9.53	8.978	1000	-
6	2437	6	-1.97	10.0	8.03	6.347	1000	-
11	2462	6	-3.07	10.0	6.93	4.929	1000	-

Average Output Power

Channel	Frequency (MHz)	Data Transfer Rate (Mbps)	Reading (dBm)	Attenuator & Cable Loss (dB)	Average Output Power (dBm)
1	2412	6	-5.88	10.0	4.12
6	2437	6	-6.34	10.0	3.66
11	2462	6	-7.30	10.0	2.70

Note:

The estimated measurement uncertainty of the result measurement is $\pm 1.5\text{dB}$ ($1\text{GHz} \leq f \leq 18\text{GHz}$)

8 POWER DENSITY MEASUREMENT

8.1 Standard Applicable

According to 15.247(d), for direct sequence systems, the transmitted power density averaged over any 1 second interval shall not be greater than 8 dBm in any 3 kHz bandwidth within these bands.

8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 2. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set EUT to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of spectrum analyzer on highest level appearing on spectral display within a 300 kHz frequency span.
4. Set the spectrum analyzer on a 3 kHz resolution bandwidth and 10 kHz video bandwidth as well as max. hold function, then record the measurement result.
5. Repeat above procedures until all measured frequencies were complete.

8.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	R & S	FSU46	11/24/2009

8.4 Measurement Data

8.4.1 IEEE 802.11b


Test Date: Nov. 25, 2008Temperature: 22°CHumidity: 61 %

Channel	Frequency (MHz)	Data Transfer Rate (Mbps)	Reading (dBm)	Cable Loss (dB)	Peak Power Spectral Density (dBm)	FCC Limit (dBm)	Chart
1	2412	1	-26.41	10.0	-16.41	8	Page 31
6	2437	1	-27.84	10.0	-17.84	8	Page 32
11	2462	1	-28.71	10.0	-18.71	8	Page 33

Note:

1. Please refer to page 31 to page 33 for chart
2. The estimated measurement uncertainty of the result measurement is $\pm 1.5\text{dB}$ ($1\text{GHz} \leq f \leq 18\text{GHz}$)


File: SPECTEC Data: #81 Date: 2008/11/25 Temperature: 22 °C
 Time: PM 04:48:30 Humidity: 61 %

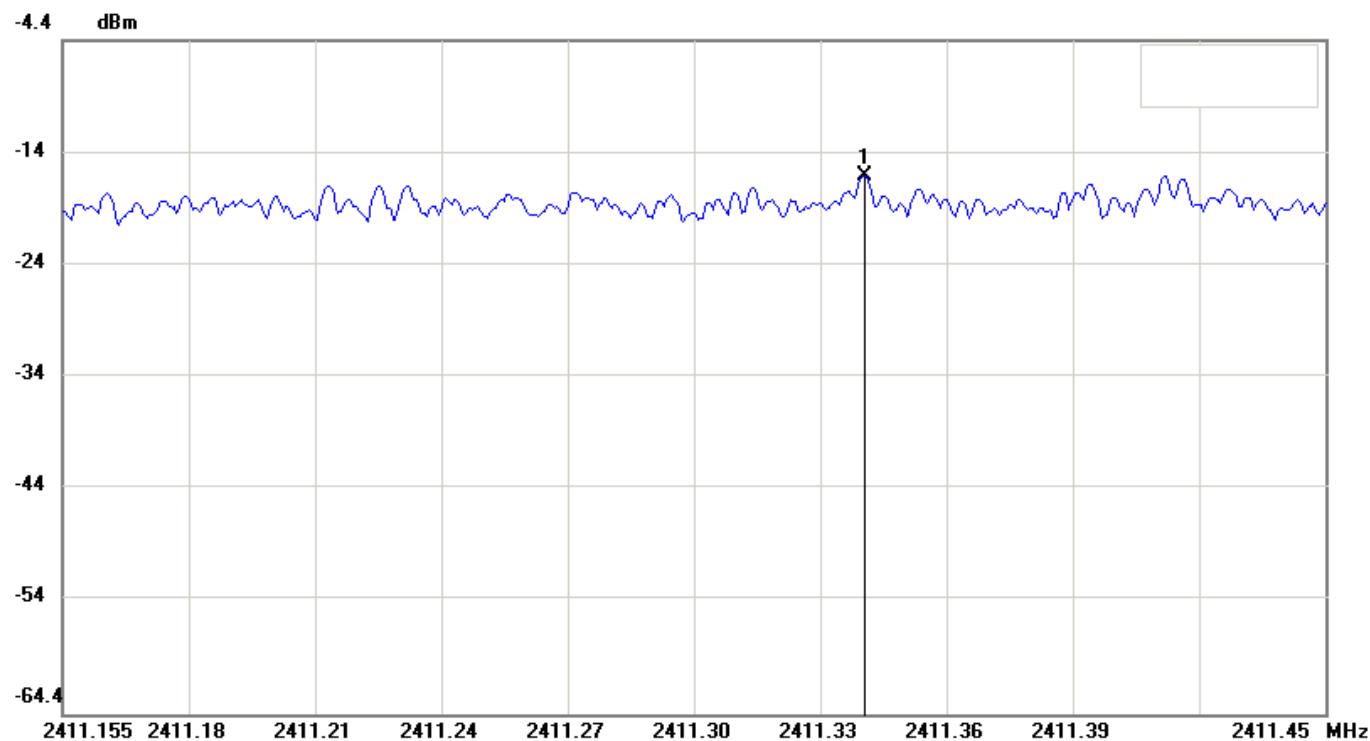

Condition: RF Conducted
EUT: Micro SDIO Wireless Lan-11b/g Card **Sweep Time:** 1000ms **Att.:** 0dB
Model: SDW-823 **RBW:** 3 KHz **VBW:** 10 KHz
Test Mode:
Note: FCC-802.11B Channel 01-Power Density (PK)

No.	Frequency(MHz)	Level(dBm)
1	2411.345	-16.41


File: SPECTEC Data: #84 Date: 2008/11/25 Temperature: 22 °C
 Time: PM 04:53:55 Humidity: 61 %

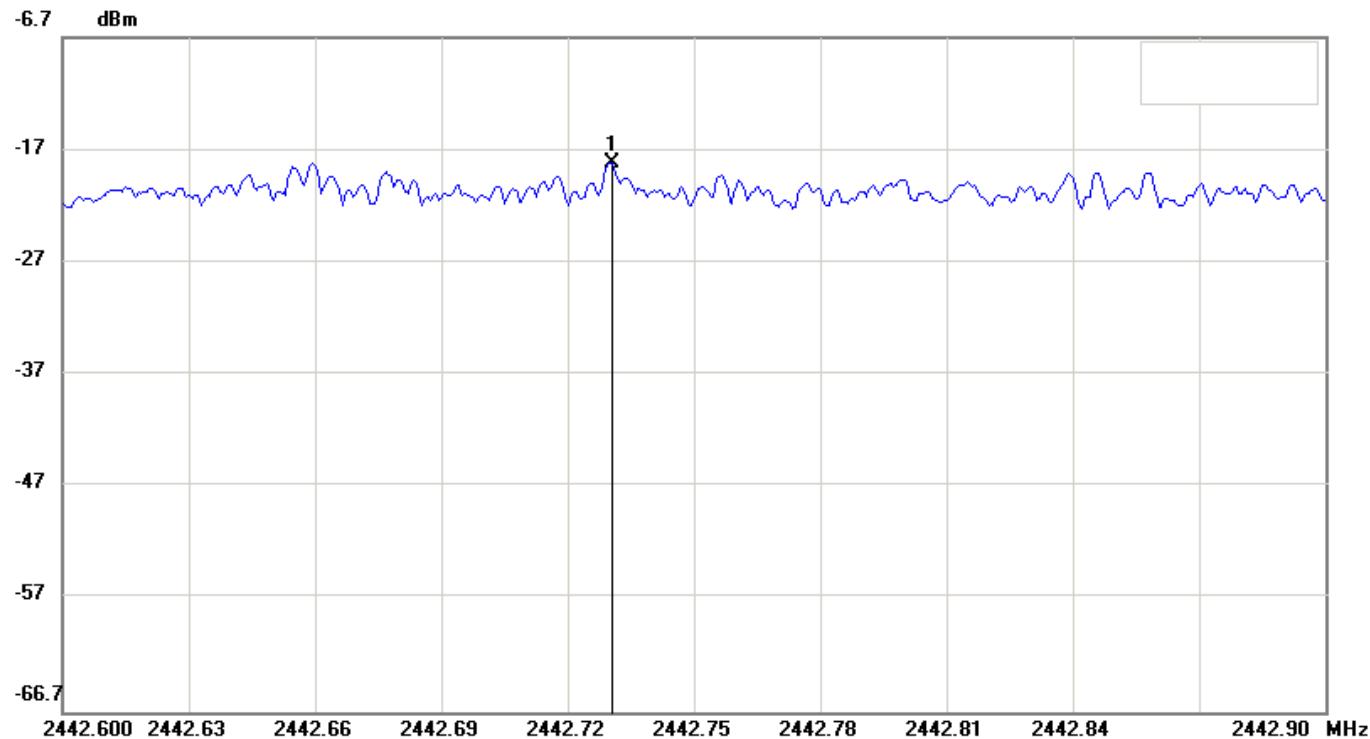

Condition: **RF Conducted**
 EUT: Micro SDIO Wireless Lan-11b/g Card Sweep Time: 1000ms Att.: 0dB
 Model: SDW-823 RBW: 3 KHz VBW: 10 KHz
 Test Mode:
 Note: FCC-802.11B Channel 07-Power Density (PK)

No.	Frequency(MHz)	Level(dBm)
1	2442.730	-17.84

File: SPECTEC Data: #86 Date: 2008/11/25 Temperature: 22 °C
 Time: PM 04:59:05 Humidity: 61 %

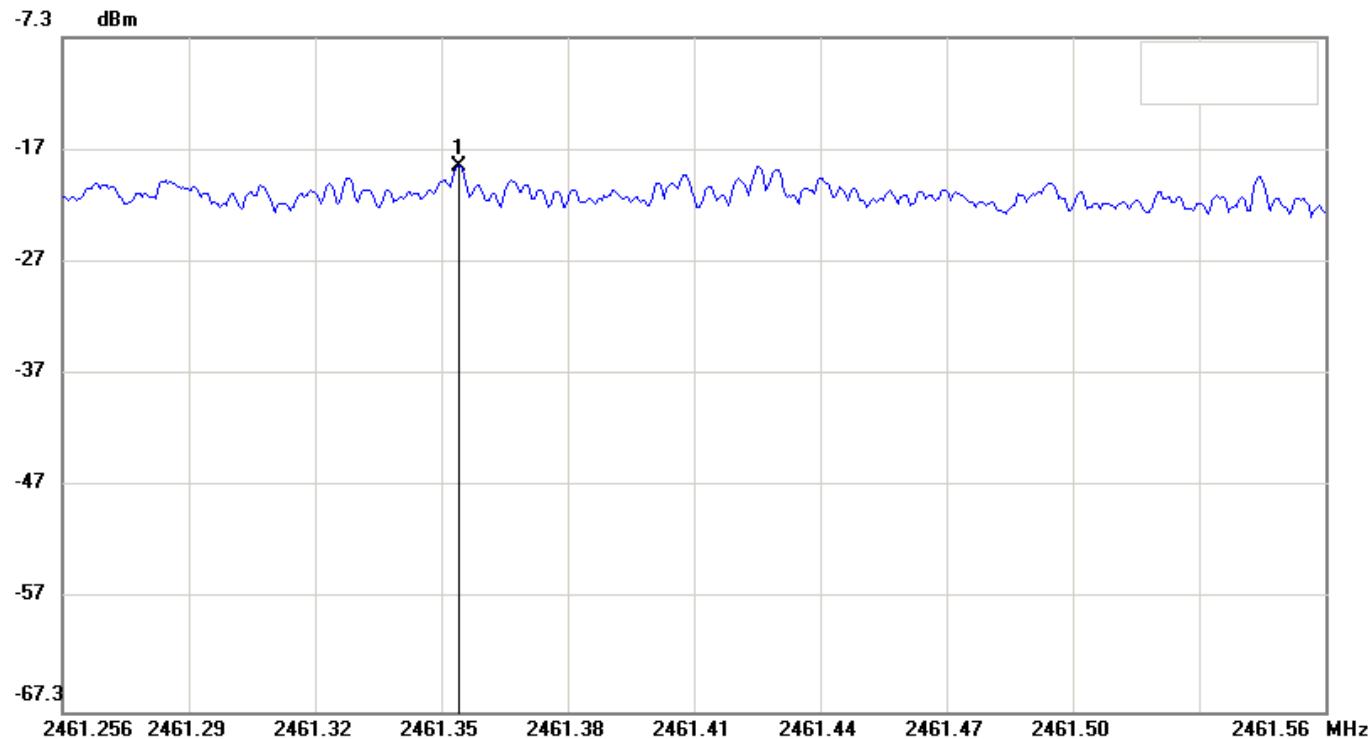

Condition: **RF Conducted**
 EUT: Micro SDIO Wireless Lan-11b/g Card Sweep Time: 1000ms Att.: 0dB
 Model: SDW-823 RBW: 3 KHz VBW: 10 KHz
 Test Mode:
 Note: FCC-802.11B Channel 11-Power Density (PK)

No.	Frequency(MHz)	Level(dBm)
1	2461.350	-18.71


8.4.2 IEEE 802.11gTest Date: Nov. 25, 2008Temperature: 22°CHumidity: 61 %

Channel	Frequency (MHz)	Data Transfer Rate (Mbps)	Reading (dBm)	Cable Loss (dB)	Peak Power Spectral Density (dBm)	FCC Limit (dBm)	Chart
1	2412	6	-38.71	10.0	-28.71	8	Page 35
6	2437	6	-40.11	10.0	-30.11	8	Page 36
11	2462	6	-40.91	10.0	-30.91	8	Page 37

Note:

1. Please refer to page 35 to page 37 for chart
2. The estimated measurement uncertainty of the result measurement is $\pm 1.5 \text{ dB}$ ($1 \text{ GHz} \leq f \leq 18 \text{ GHz}$)


File: SPECTEC **Data: #89** **Date: 2008/11/25** **Temperature: 22 °C**
Time: PM 05:08:38 **Humidity: 61 %**

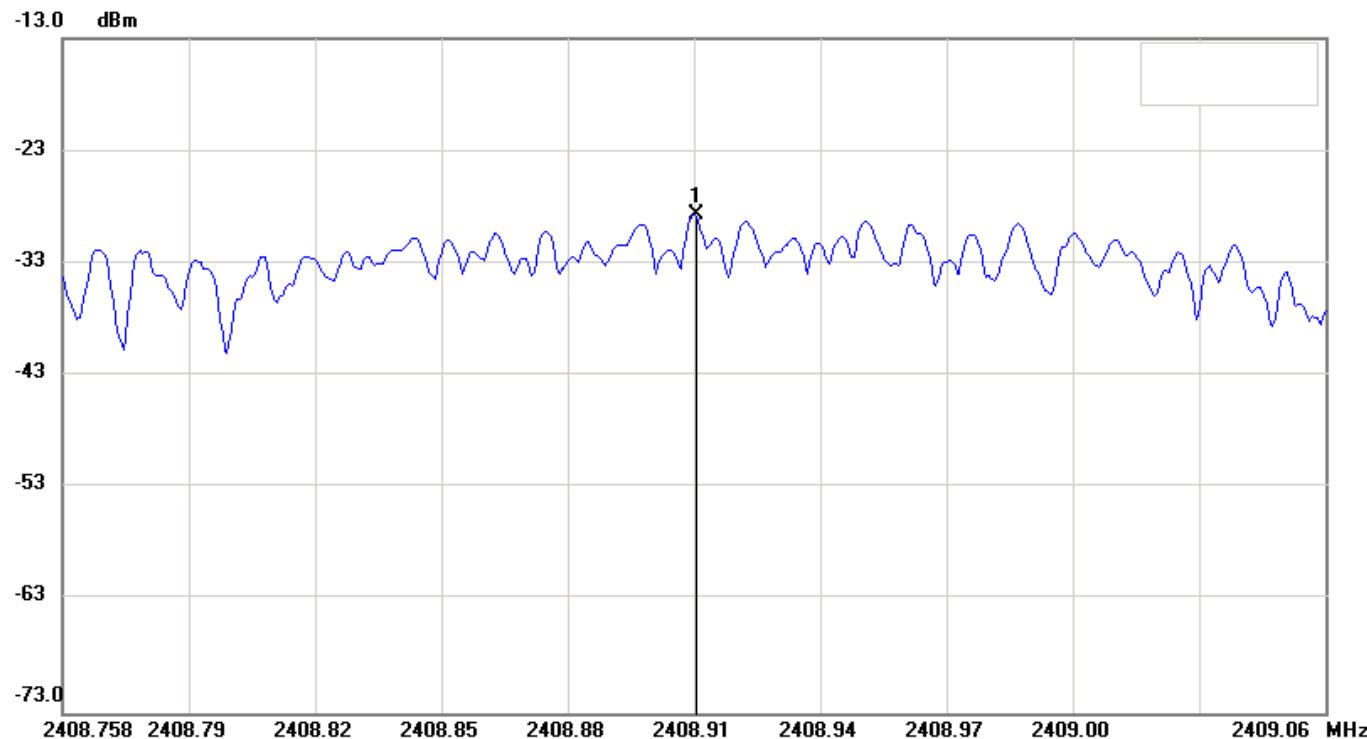

Condition: 200 **RF Conducted**
EUT: Micro SDIO Wireless Lan-11b/g Card **Sweep Time:** 1000ms **Att.:** 0dB
Model: SDW-823 **RBW:** 3 KHz **VBW:** 10 KHz
Test Mode:
Note: FCC-802.11G Channel 01-Power Density (PK)

No.	Frequency(MHz)	Level(dBm)
1	2408.908	-28.71


File: SPECTEC Data: #92 Date: 2008/11/25 Temperature: 22 °C
 Time: PM 05:14:39 Humidity: 61 %

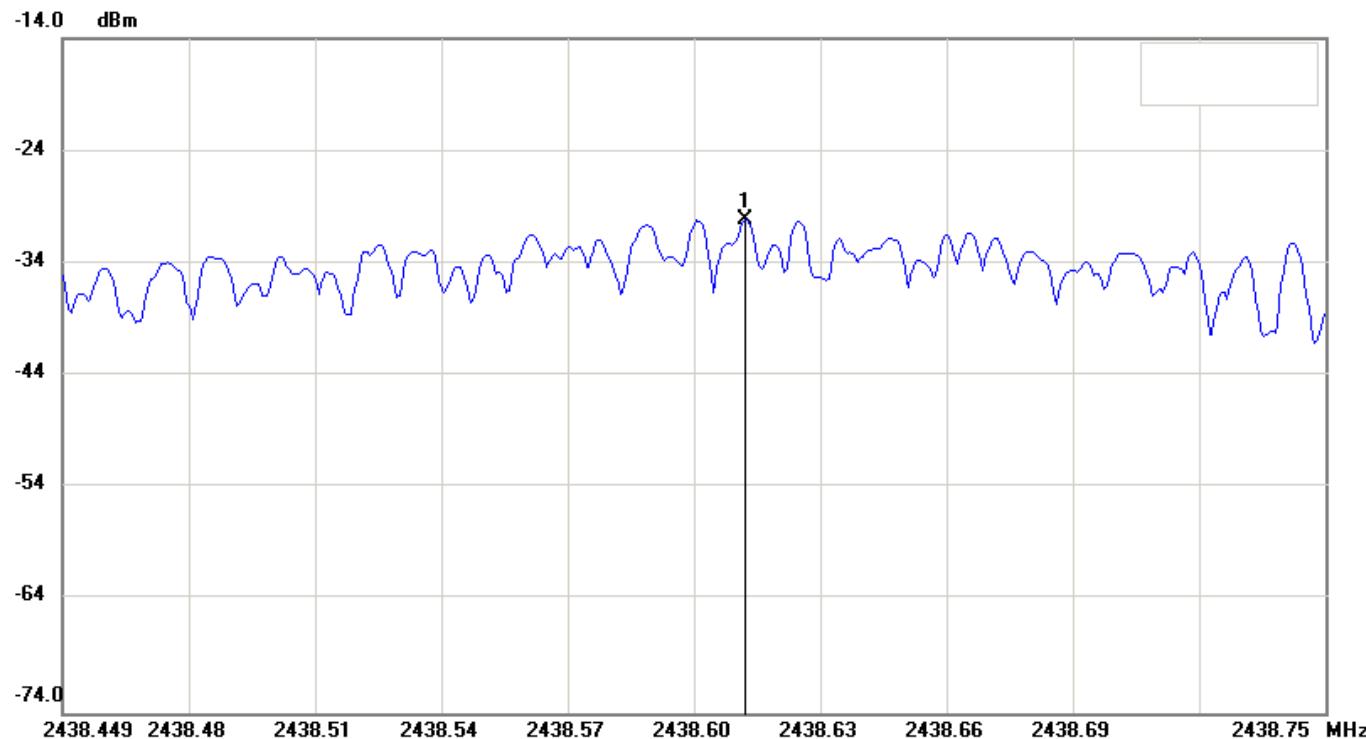

Condition: RF Conducted
EUT: Micro SDIO Wireless Lan-11b/g Card **Sweep Time:** 1000ms **Att.:** 0dB
Model: SDW-823 **RBW:** 3 KHz **VBW:** 10 KHz
Test Mode:
Note: FCC-802.11G Channel 07-Power Density (PK)

No.	Frequency(MHz)	Level(dBm)
1	2438.611	-30.11

File: SPECTEC **Data:** #94 **Date:** 2008/11/25 **Temperature:** 22 °C
Time: PM 05:23:04 **Humidity:** 61 %

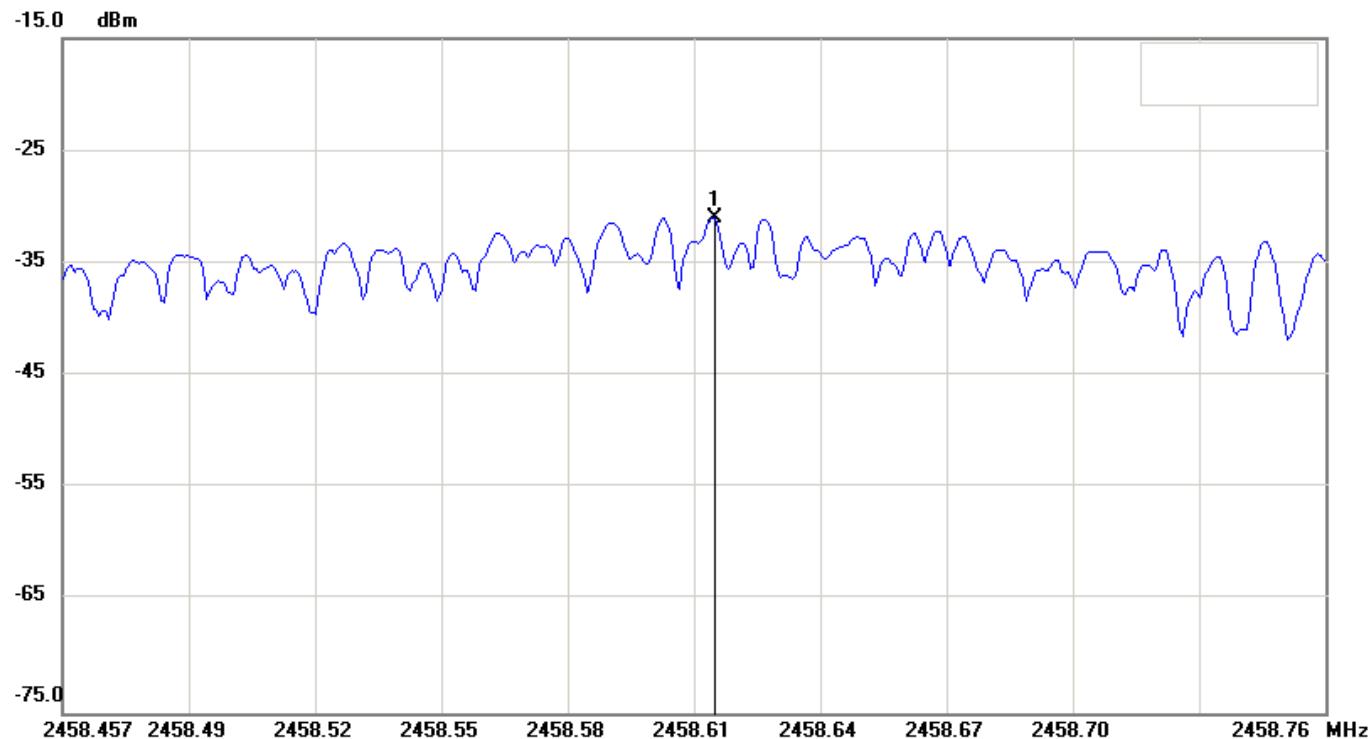

Condition: RF Conducted
EUT: Micro SDIO Wireless Lan-11b/g Card **Sweep Time:** 1000ms **Att.:** 0dB
Model: SDW-823 **RBW:** 3 KHz **VBW:** 10 KHz
Test Mode:
Note: FCC-802.11G Channel 11-Power Density (PK)

No.	Frequency(MHz)	Level(dBm)
1	2458.612	-30.91

9 SPURIOUS EMISSION - RF CONDUCTED MEASUREMENT

9.1 Standard Applicable

According to 12.247 (c) , in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 2. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

9.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	R & S	FSU46	11/24/2009

9.4 Measurement Data

9.4.1 IEEE 802.11b

Test Date: Nov. 25, 2008Temperature: 22°CHumidity: 61 %

Channel	Frequency(MHz)	Chart
1	2412	Page 40, Page 42
6	2437	Page 43
11	2462	Page 41 Page 44

All out-of –band conducted emissions were more than 20dB below the carrier.

Note: Please refer to page 40 to page 44 for chart

9.4.2 IEEE 802.11g

Test Date: Nov. 25, 2008Temperature: 22°CHumidity: 61 %

Channel	Frequency(MHz)	Chart
1	2412	Page 45, Page 47
6	2437	Page 48
11	2462	Page 46 Page 49

All out-of –band conducted emissions were more than 20dB below the carrier.

Note: Please refer to page 45 to page 49 for chart


File: SPECTEC **Data:** #67 **Date:** 2008/11/25 **Temperature:** 22 °C
Time: PM 12:00:21 **Humidity:** 61 %



Condition: SYST:PRES **RF Conducted**
EUT: Micro SDIO Wireless Lan-11b/g Card **Sweep Time:** 500ms **Att.:** 0dB
Model: SDW-823 **RBW:** 100 KHz **VBW:** 300 KHz
Test Mode:
Note: FCC-802.11B Channel 01-Bandedge

No.	Frequency(MHz)	Level(dBm)
1	2397.000	-44.16
2	2411.500	-3.69


File: SPECTEC Data: #76 Date: 2008/11/25 Temperature: 22 °C
Time: PM 12:53:59 Humidity: 61 %

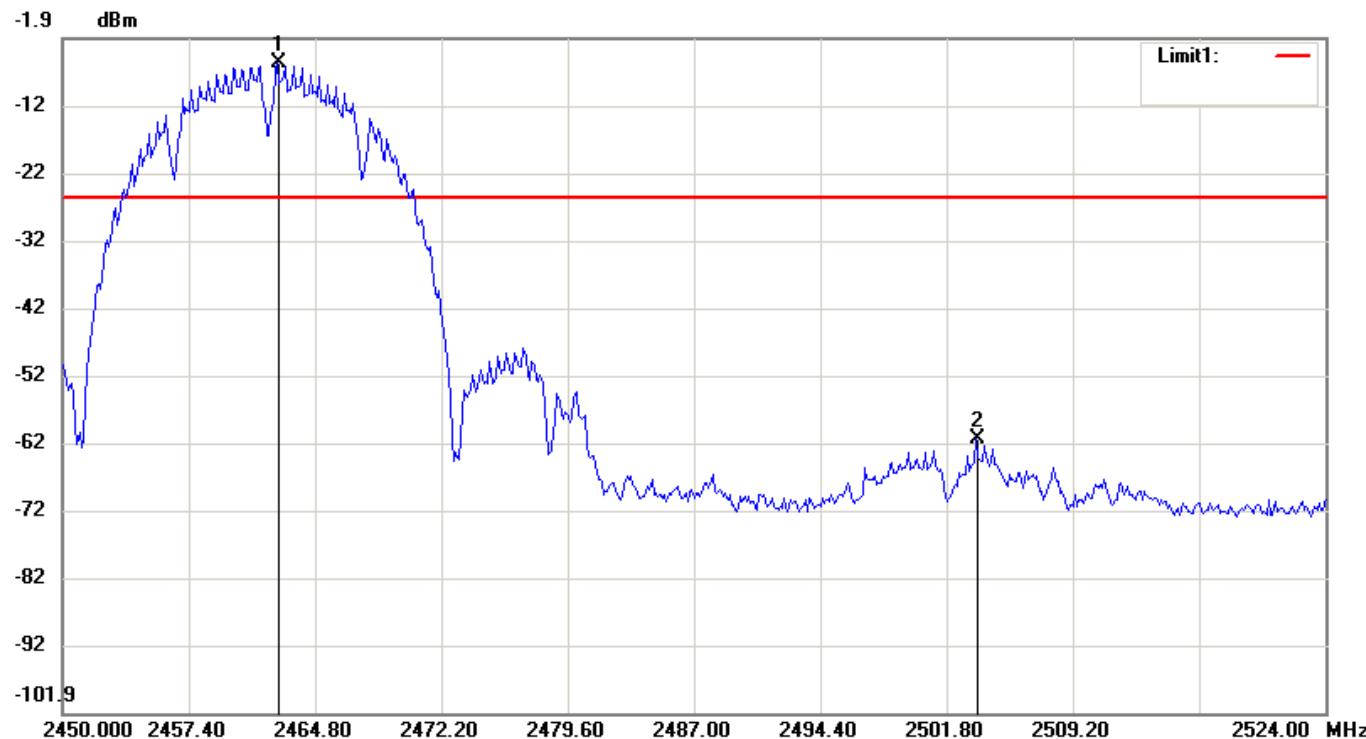

Condition: RF Conducted
 EUT: Micro SDIO Wireless Lan-11b/g Card Sweep Time: 500ms Att.: 0dB
 Model: SDW-823 RBW: 100 KHz VBW: 300 KHz
 Test Mode:
 Note: FCC-802.11B Channel 11-Bandedge

No.	Frequency(MHz)	Level(dBm)
1	2462.580	-5.55
2	2503.527	-61.27


File: SPECTEC Data: #106 Date: 2008/11/25 Temperature: 22 °C
 Time: PM 07:51:01 Humidity: 61 %

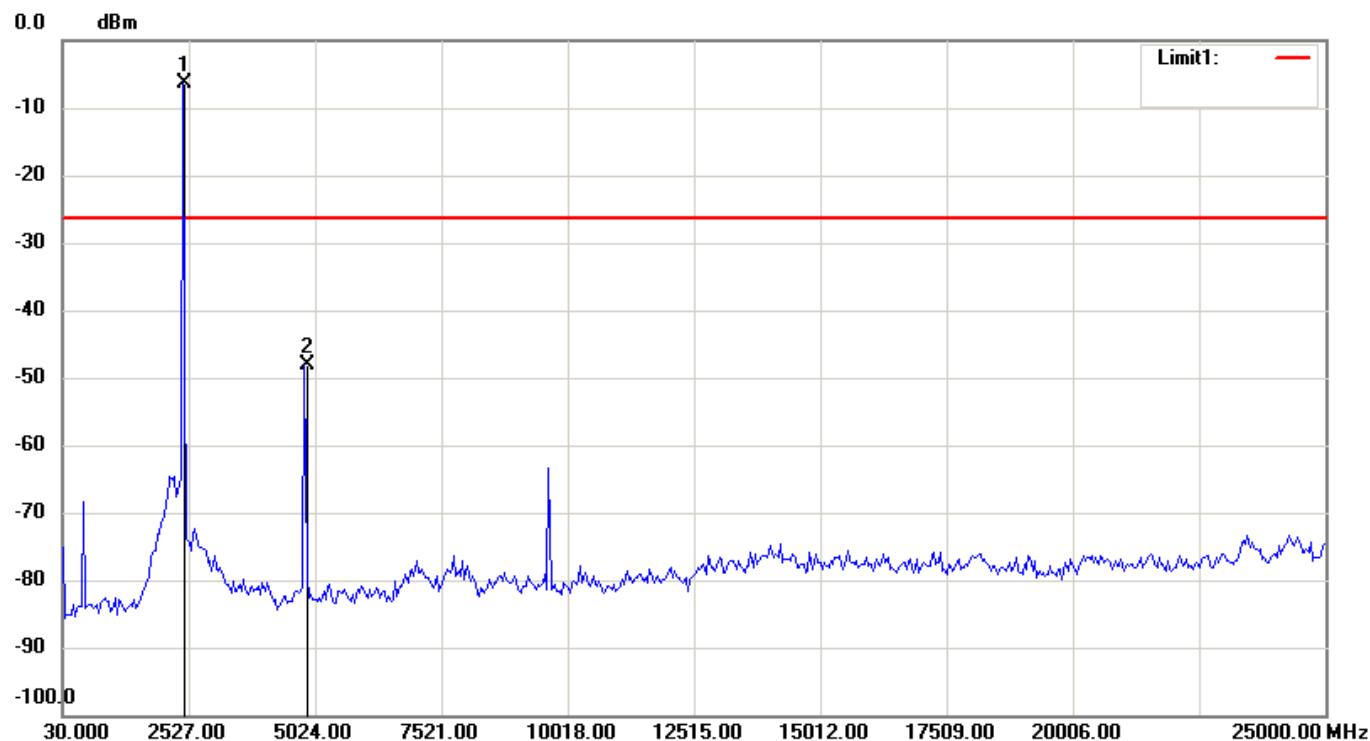

Condition: RF Conducted
EUT: Micro SDIO Wireless Lan-11b/g Card **Sweep Time:** 3000ms **Att.:** 0dB
Model: SDW-823 **RBW:** 100 KHz **VBW:** 300 KHz
Test Mode:
Note: FCC-802.11B Channel 01- Bandedge_All

No.		△Frequency(MHz)	△Level(dB)
1	mk1-mk2	2413.767	41.81


File: SPECTEC Data: #107 Date: 2008/11/25 Temperature: 22 °C
 Time: PM 07:53:00 Humidity: 61 %

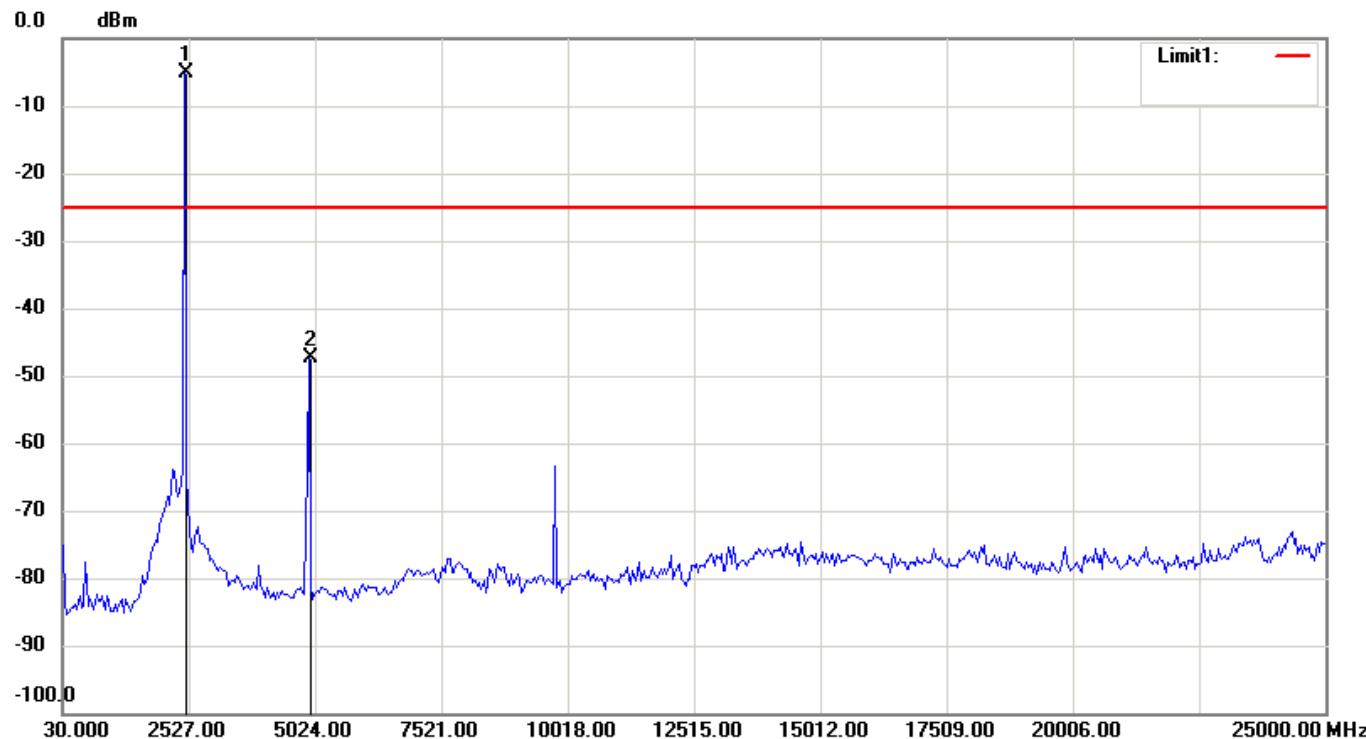

Condition: RF Conducted
EUT: Micro SDIO Wireless Lan-11b/g Card **RF Conducted**
Model: SDW-823 **Sweep Time:** 3000ms **Att.:** 0dB
Test Mode: **RBW:** 100 KHz **VBW:** 300 KHz
Note: FCC-802.11B Channel 07- Bandedge_All

No.		△Frequency(MHz)	△Level(dB)
1	mk1-mk2	2455.383	42.38


File: SPECTEC Data: #108 Date: 2008/11/25 Temperature: 22 °C
 Time: PM 07:55:04 Humidity: 61 %

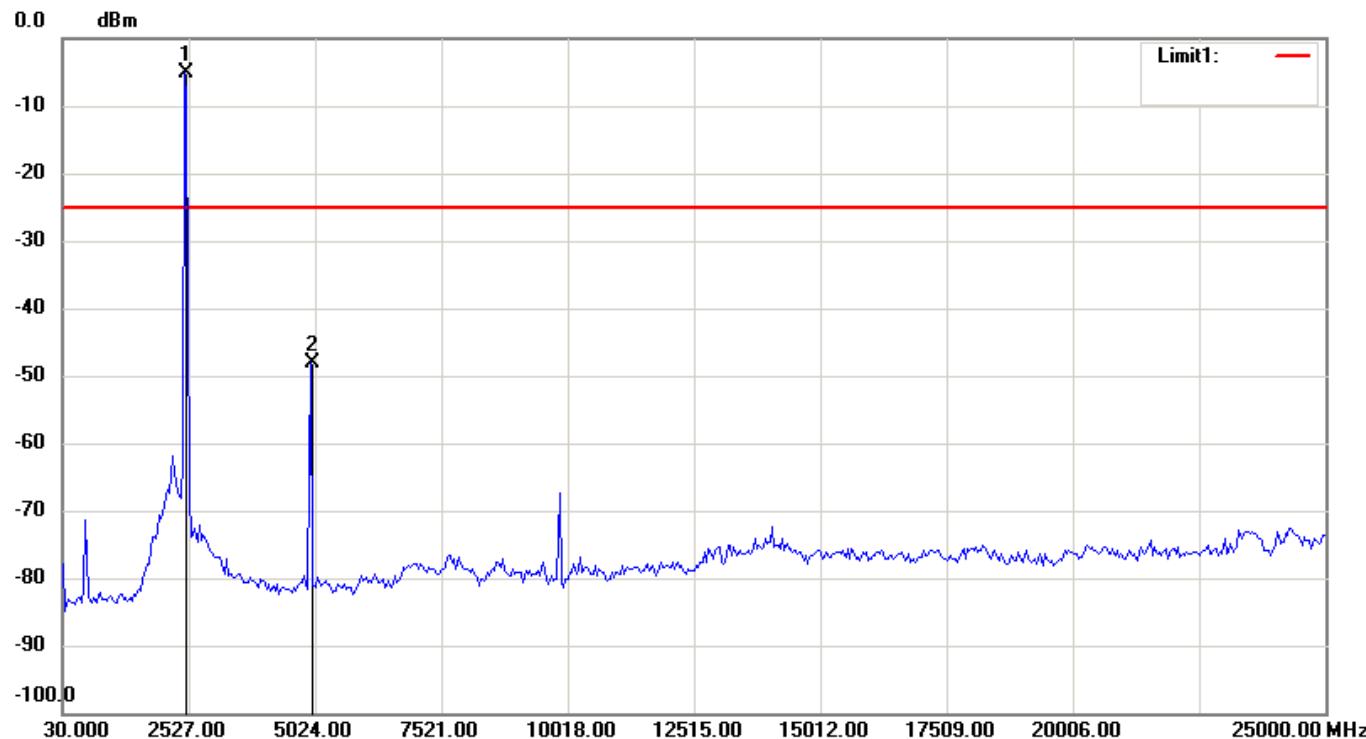

Condition: RF Conducted
EUT: Micro SDIO Wireless Lan-11b/g Card **Sweep Time:** 3000ms **Att.:** 0dB
Model: SDW-823 **RBW:** 100 KHz **VBW:** 300 KHz
Test Mode:
Note: FCC-802.11B Channel 11- Bandedge_All

No.		△Frequency(MHz)	△Level(dB)
1	mk1-mk2	2497	42.86


File: SPECTEC Data: #51 Date: 2008/11/25 Temperature: 22 °C
 Time: AM 11:21:16 Humidity: 61 %

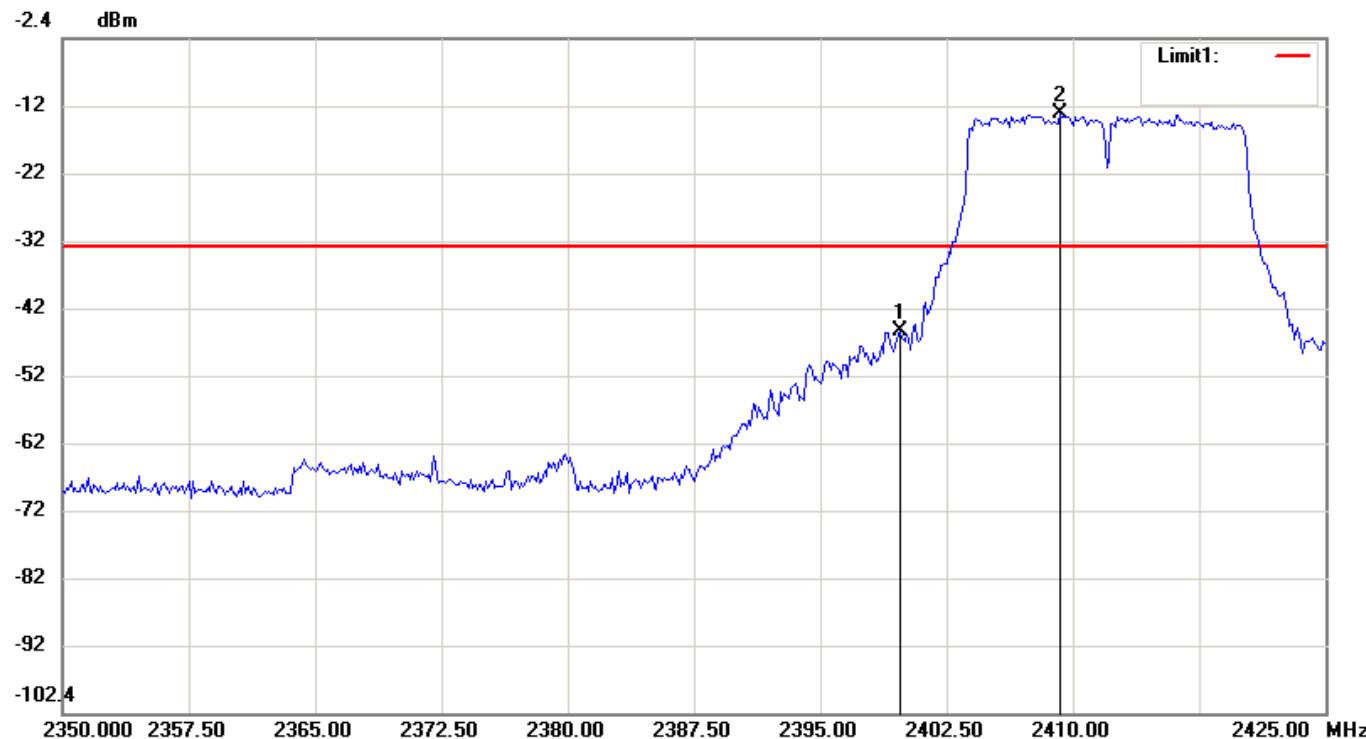

Condition: RF Conducted
EUT: Micro SDIO Wireless Lan-11b/g Card **Sweep Time:** 500ms **Att.:** 0dB
Model: SDW-823 **RBW:** 100 KHz **VBW:** 300 KHz
Test Mode:
Note: FCC-802.11G Channel 01-Bandedge

No.	Frequency(MHz)	Level(dBm)
1	2399.750	-45.82
2	2409.250	-13.40


File: SPECTEC Data: #60 Date: 2008/11/25 Temperature: 22 °C
Time: AM 11:42:17 Humidity: 61 %

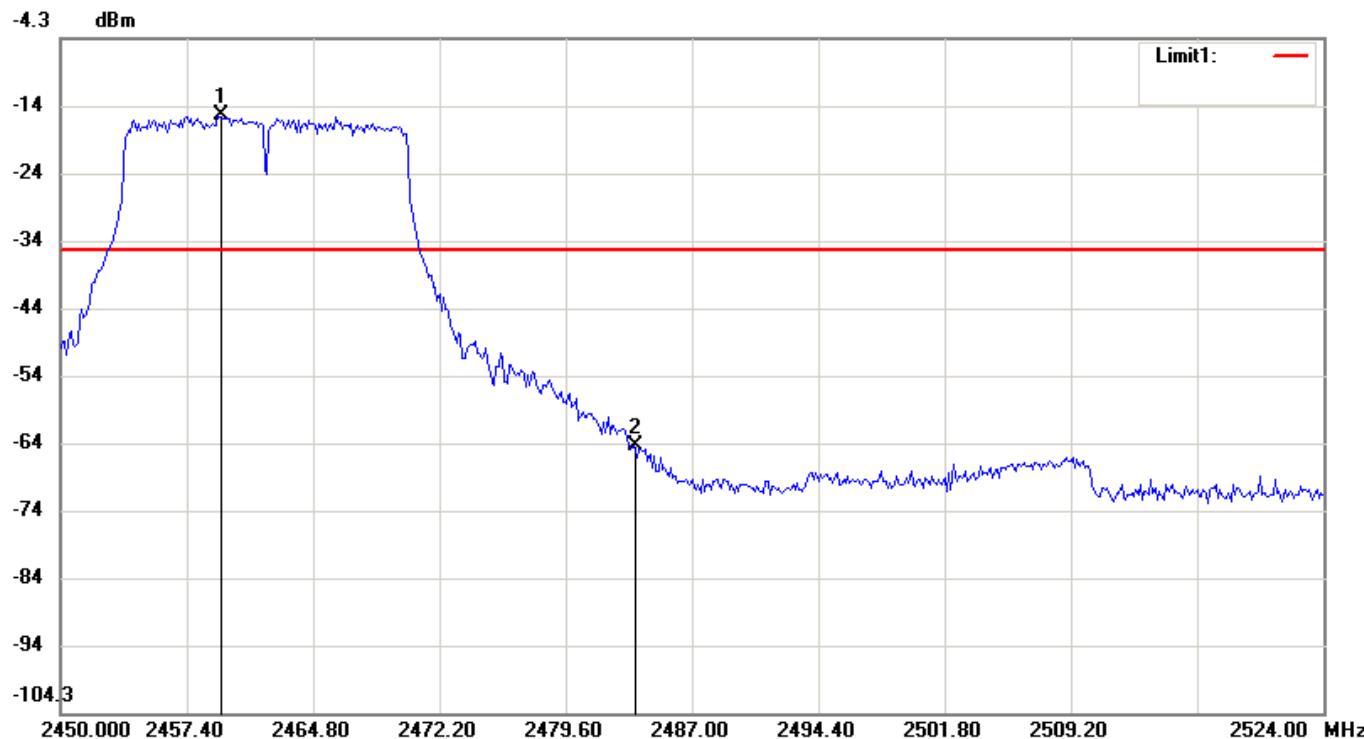

Condition: RF Conducted
 EUT: Micro SDIO Wireless Lan-11b/g Card Sweep Time: 500ms Att.: 0dB
 Model: SDW-823 RBW: 100 KHz VBW: 300 KHz
 Test Mode:
 Note: FCC-802.11G Channel 11-Bandedge

No.	Frequency(MHz)	Level(dBm)
1	2459.250	-15.66
2	2483.547	-64.67


File: SPECTEC Data: #105 Date: 2008/11/25 Temperature: 22 °C
 Time: PM 07:48:50 Humidity: 61 %

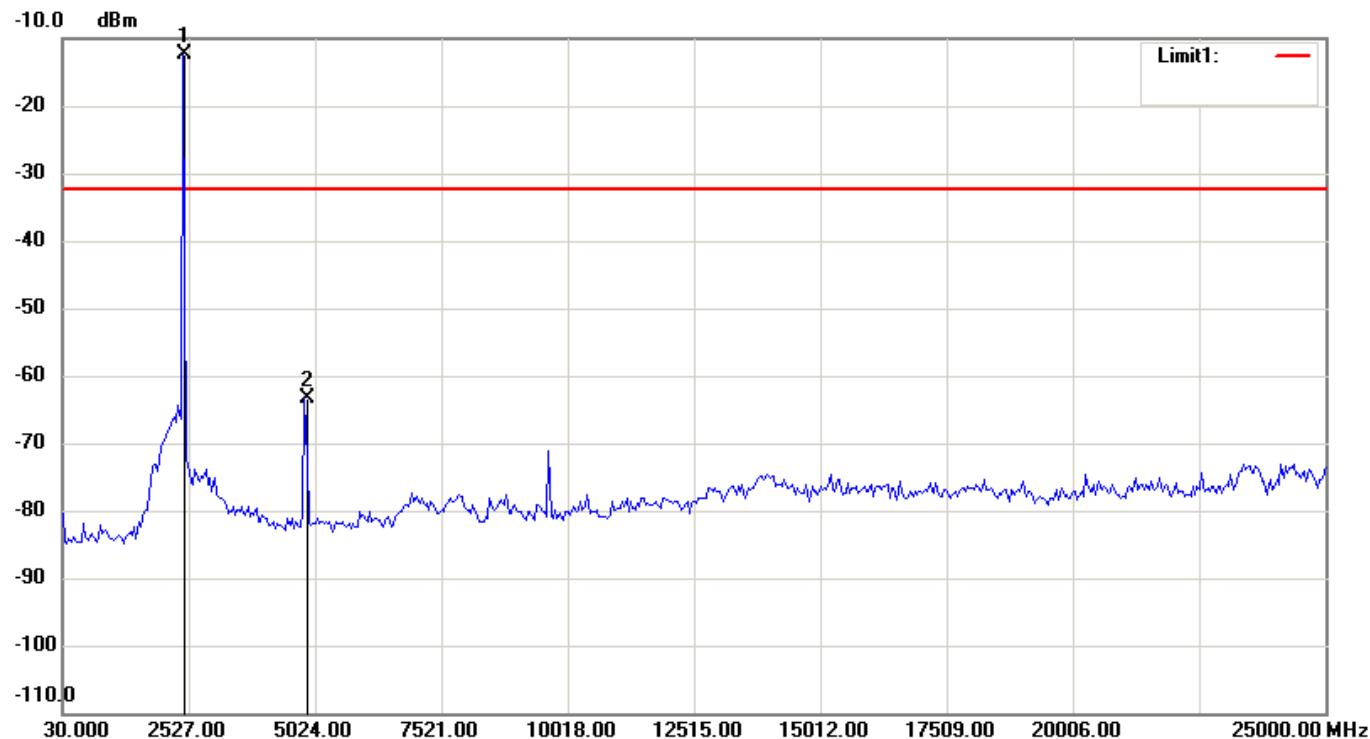

Condition: RF Conducted
EUT: Micro SDIO Wireless Lan-11b/g Card **Sweep Time:** 3000ms **Att.:** 0dB
Model: SDW-823 **RBW:** 100 KHz **VBW:** 300 KHz
Test Mode:
Note: FCC-802.11G Channel 01-Bandedge_All

No.		△Frequency(MHz)	△Level(dB)
1	mk1-mk2	2413.767	50.93


File: SPECTEC Data: #104 Date: 2008/11/25 Temperature: 22 °C
 Time: PM 07:45:42 Humidity: 61 %

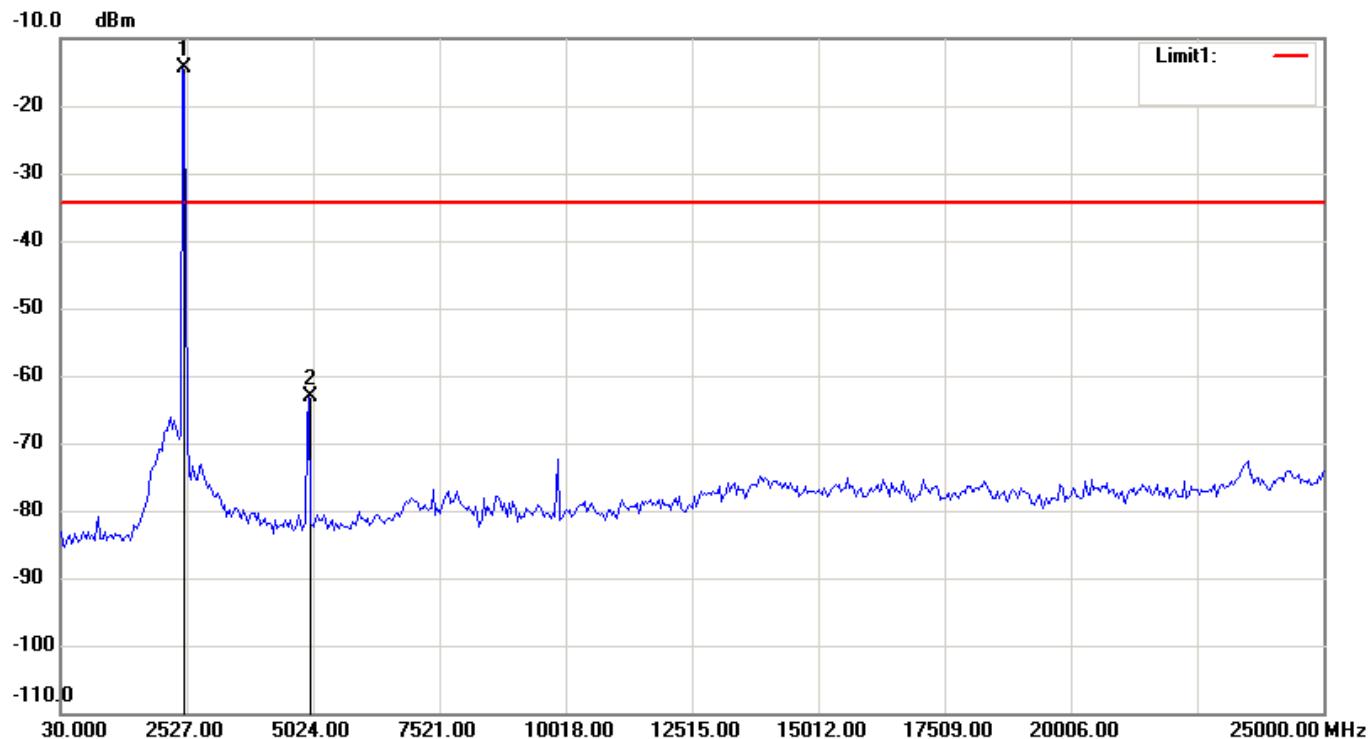

Condition: RF Conducted
EUT: Micro SDIO Wireless Lan-11b/g Card **Sweep Time:** 3000ms **Att.:** 0dB
Model: SDW-823 **RBW:** 100 KHz **VBW:** 300 KHz
Test Mode:
Note: FCC-802.11G Channel 07- Bandedge_All

No.		△Frequency(MHz)	△Level(dB)
1	mk1-mk2	2497	48.83

File: SPECTEC Data: #103 Date: 2008/11/25 Temperature: 22 °C
 Time: PM 07:40:23 Humidity: 61%

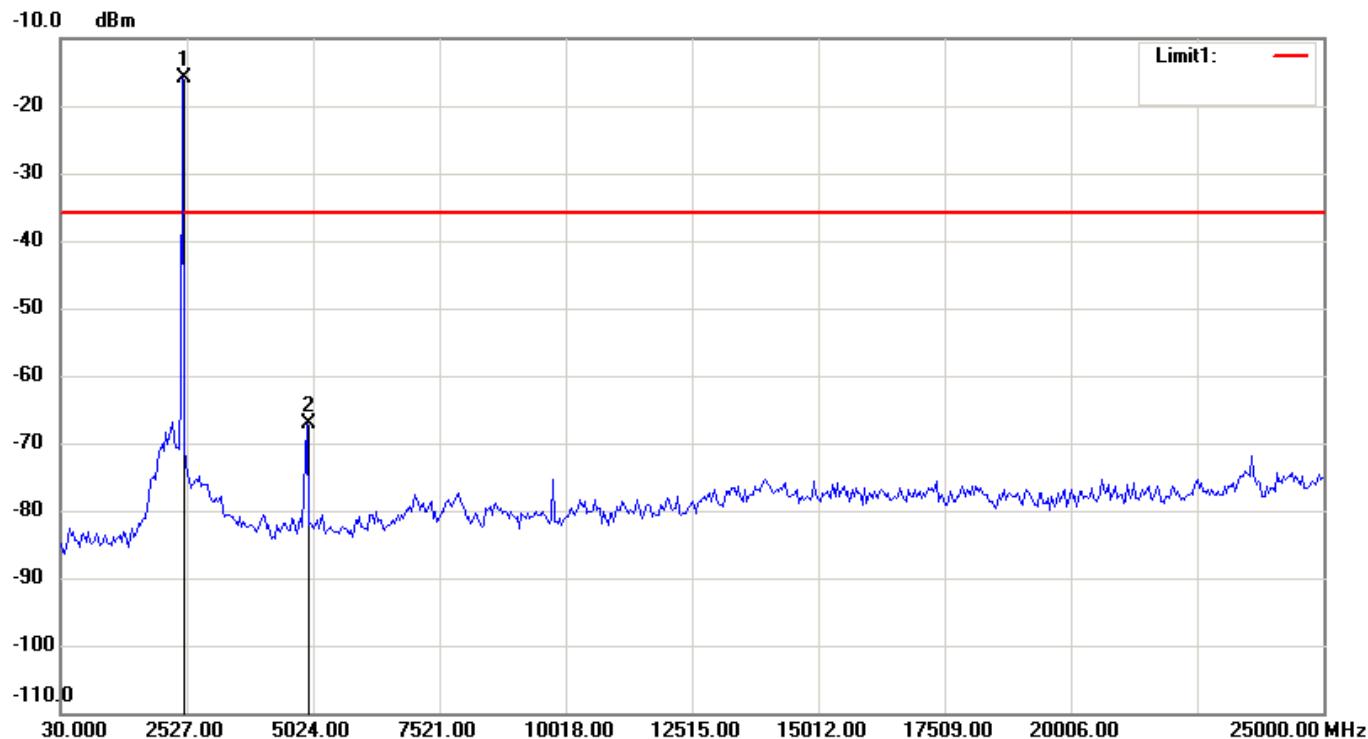

Condition: RF Conducted
EUT: Micro SDIO Wireless Lan-11b/g Card **Sweep Time:** 3000ms **Att.:** 0dB
Model: SDW-823 **RBW:** 100 KHz **VBW:** 300 KHz
Test Mode:
Note: FCC-802.11G Channel 11-Bandedge_All

No.	Frequency(MHz)	Level(dBm)
1	2443.767	-15.98
2	4899.150	-67.19

No.		△Frequency(MHz)	△Level(dB)
1	mk1-mk2	2455.383	51.21

10 RADIATED EMISSION MEASUREMENT

10.1 Standard Applicable

For unintentional radiator, the radiated emission shall comply with §15.109(a).

For intentional radiators, according to §15.247 (a), operation under this provision is limited to frequency hopping and direct sequence spread spectrum, and the out band emission shall be comply with §15.247 (c)

10.2 Measurement Procedure

A.Preliminary Measurement For Portable Devices.

For portable devices, the following procedure was performed to determine the maximum emission axis of EUT (X and Y axis):

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. The axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.
4. The position in which the maximum noise occurred was “X axis”. (Please see the test setup photos)

B. Final Measurement

1. Setup the configuration per figure 4 and 5 for frequencies measured below and above 1 GHz respectively.
2. For emission frequencies measured below 1 GHz, it is performed in a semi-anechoic chamber to determine the accurate frequencies of higher emissions. For emission frequencies measured above 1 GHz, a pre-scan be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 120 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.

Note : A filter was used to avoid pre-amplifier saturated when measure TX operation mode.

5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Check the three frequencies of highest emission with varying the datarate, placement of ANT. cables associated with EUT to obtain the worse case and record the result.

Figure 4 : Frequencies measured below 1 GHz configuration


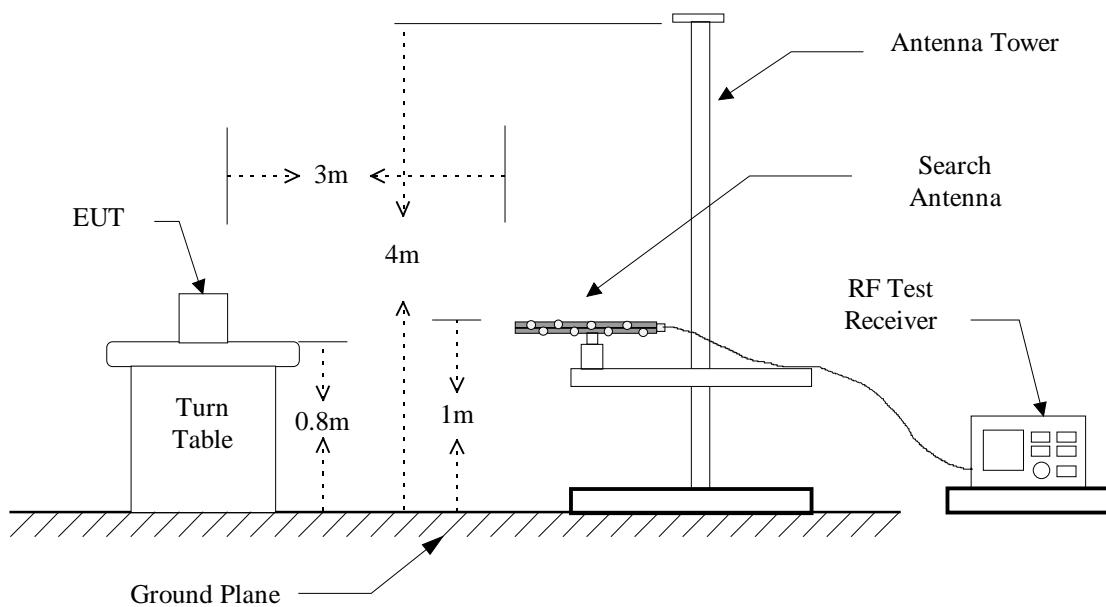


Figure 5 : Frequencies measured above 1 GHz configuration

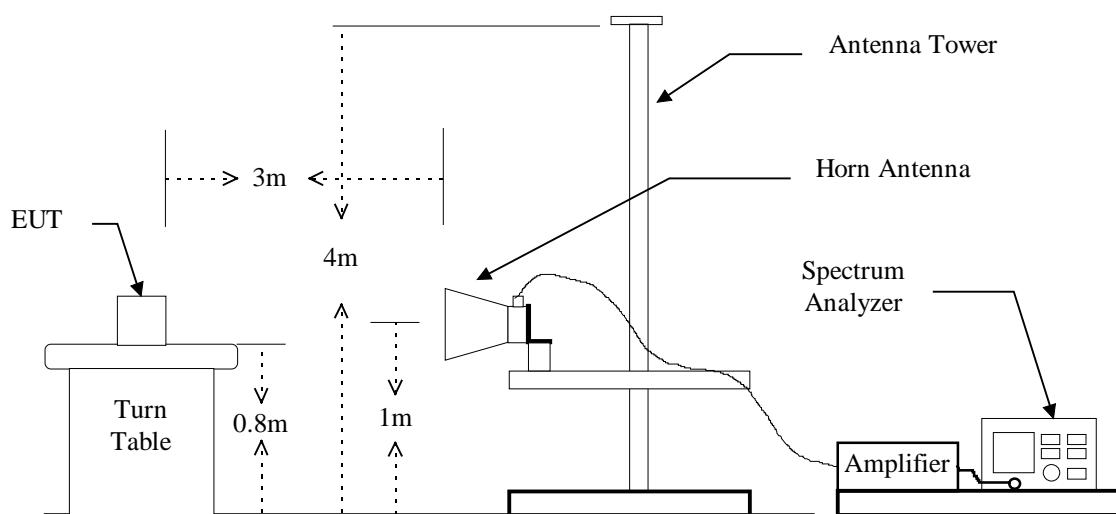

10.3 Measuring Instrument

The following instrument are used for radiated emissions measurement :

Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
EMI Receiver	R&S	ESIB7	13054414-001	07/17/2009
BiLog Antenna	Schaffner	CBL 6112B	2927	07/03/2009
Horn Antenna	EMCO	3115	9107-3729	06/12/2009
PRE-Amplifier	Agilent	8449B	3008A01648	10/08/2009
Spectrum Analyzer	R&S	FSU46	13040904-001	11/24/2009
Spectrum Analyzer	Agilent	8564EC	4123A00585	10/13/2009

Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution Bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi-Peak	120 kHz	300 kHz
	Spectrum Analyzer	Peak	120 kHz	300 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	10 Hz

10.4 Radiated Emission Data

10.4.1 Harmonic

10.4.1.1 IEEE 802.11b

Test Date: Nov. 26, 2008Temperature: 20°CHumidity: 67 %

a) Channel 1

Fundamental Frequency: 2412 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m		Limit @3m		
	H		V			(dBuV/m)	Peak	Ave	(dBuV/m)	
	Peak	Ave	Peak	Ave						
4824.000	---	---	---	---	0.5	---	---	74.0	54.0	
12060.000	---	---	---	---	5.8	---	---	74.0	54.0	
14472.000	---	---	---	---	10.5	---	---	74.0	54.0	
19296.000	---	---	---	---	13.3	---	---	74.0	54.0	

b) Channel 6

Fundamental Frequency: 2437 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m		Limit @3m		
	H		V			(dBuV/m)	Peak	Ave	(dBuV/m)	
	Peak	Ave	Peak	Ave						
4874.000	---	---	---	---	0.5	---	---	74.0	54.0	
7311.000	---	---	---	---	3.7	---	---	74.0	54.0	
12185.000	---	---	---	---	5.8	---	---	74.0	54.0	
19496.000	---	---	---	---	13.3	---	---	74.0	54.0	

c) Channel 11

Fundamental Frequency: 2462 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m		Limit @3m		
	H		V			(dBuV/m)	Peak	Ave	(dBuV/m)	
	Peak	Ave	Peak	Ave						
4924.000	---	---	---	---	0.5	---	---	74.0	54.0	
7386.000	---	---	---	---	3.7	---	---	74.0	54.0	
12310.000	---	---	---	---	5.8	---	---	74.0	54.0	
19696.000	---	---	---	---	13.3	---	---	74.0	54.0	
22158.000	---	---	---	---	13.5	---	---	74.0	54.0	

Note :

1. Item of margin shown in above table refer to average limit.
2. Remark “---” means that the emissions level is too low to be measured.

10.4.1.2 IEEE 802.11g

Test Date: Nov. 26, 2008Temperature: 20°CHumidity: 67 %

a) Channel 1

Fundamental Frequency: 2412 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m		Limit @3m		
	H		V			(dBuV/m)	Peak	Ave	(dBuV/m)	
	Peak	Ave	Peak	Ave						
4824.000	---	---	---	---	0.5	---	---	74.0	54.0	
12060.000	---	---	---	---	5.8	---	---	74.0	54.0	
14472.000	---	---	---	---	10.5	---	---	74.0	54.0	
19296.000	---	---	---	---	13.3	---	---	74.0	54.0	

b) Channel 6

Fundamental Frequency: 2437 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m		Limit @3m		
	H		V			(dBuV/m)	Peak	Ave	(dBuV/m)	
	Peak	Ave	Peak	Ave						
4874.000	---	---	---	---	0.5	---	---	74.0	54.0	
7311.000	---	---	---	---	3.7	---	---	74.0	54.0	
12185.000	---	---	---	---	5.8	---	---	74.0	54.0	
19496.000	---	---	---	---	13.3	---	---	74.0	54.0	

c) Channel 11

Fundamental Frequency: 2462 MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m		Limit @3m		
	H		V			(dBuV/m)	Peak	Ave	(dBuV/m)	
	Peak	Ave	Peak	Ave						
4924.000	---	---	---	---	0.5	---	---	74.0	54.0	
7386.000	---	---	---	---	3.7	---	---	74.0	54.0	
12310.000	---	---	---	---	5.8	---	---	74.0	54.0	
19696.000	---	---	---	---	13.3	---	---	74.0	54.0	
22158.000	---	---	---	---	13.5	---	---	74.0	54.0	


Note :

1. Item of margin shown in above table refer to average limit.
2. Remark “---” means that the emissions level is too low to be measured.

10.4.2 Spurious Emission

a) Emission frequencies below 1 GHz

File: SPECTEC Data: #1 Date: 2008/11/26 Temperature: 20 °C
 Time: AM 09:03:50 Humidity: 67 %

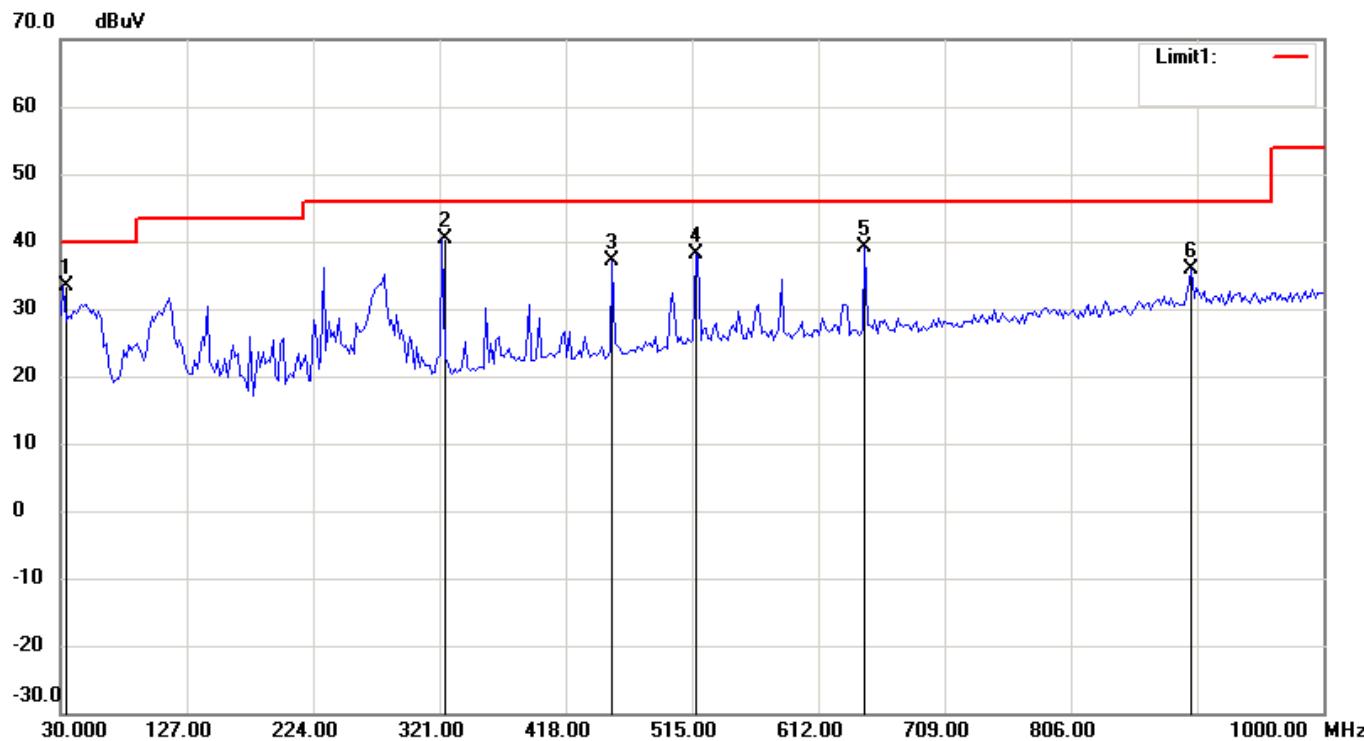

Condition: FCC Part15 RE-Class B_30-1000MHz Polarization: Horizontal
 EUT: Micro SDIO Wireless Lan-11b/g Card Distance: 3m
 Model: SDW-823

Test Mode:

Note:

No.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Degree (°)	Height (cm)
1	31.9440	14.61	peak	18.79	33.40	40.00	-6.60	185	100
2	323.5271	22.75	peak	17.65	40.40	46.00	-5.60	100	100
3	453.7675	15.94	peak	21.11	37.05	46.00	-8.95	195	100
4	517.9158	15.52	peak	22.54	38.06	46.00	-7.94	114	100
5	648.1563	14.82	peak	24.27	39.09	46.00	-6.91	198	100
6	898.9178	8.42	peak	27.58	36.00	46.00	-10.00	185	100

File: SPECTEC


Data: #3

Date: 2008/11/26

Temperature: 20 °C

Time: AM 09:07:09

Humidity: 67 %

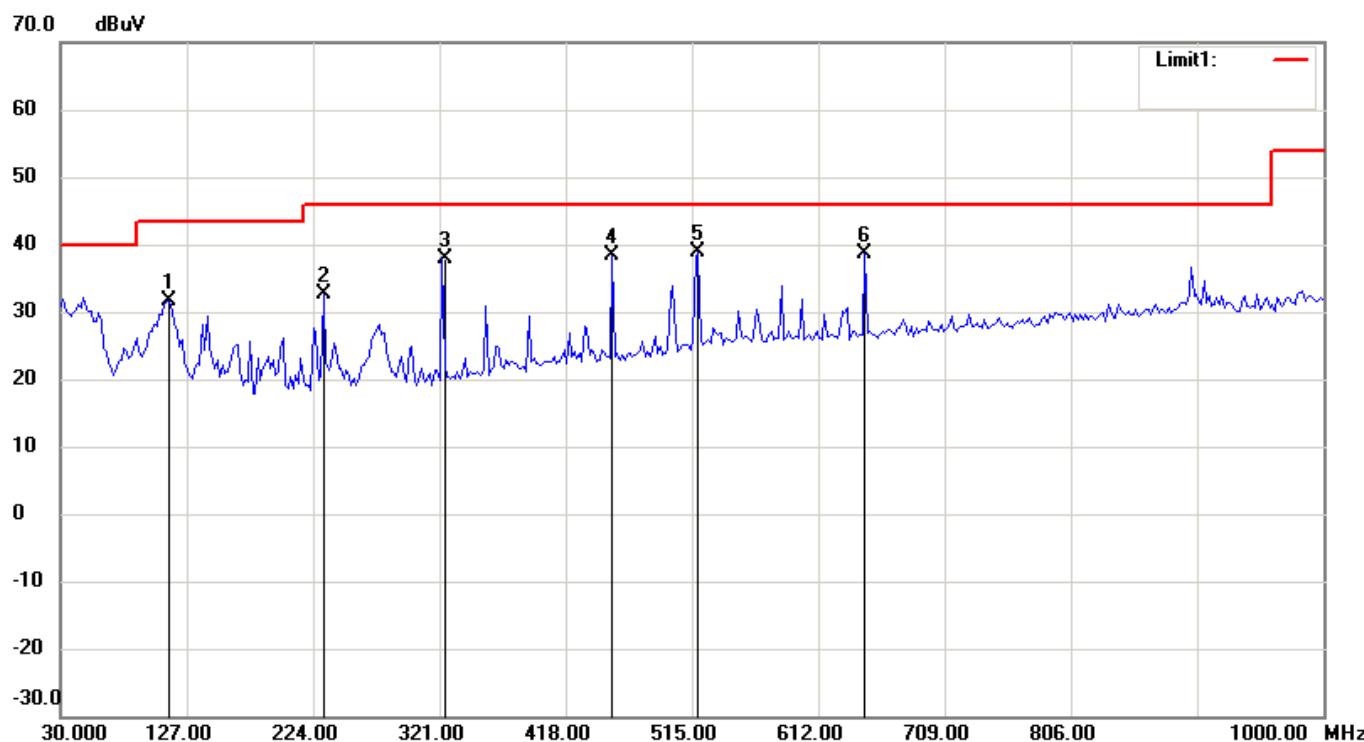

Condition:

FCC Part15 RE-Class B_30-1000MHz

Polarization:

Vertical

EUT:

Micro SDIO Wireless Lan-11b/g Card

Distance:

3m

Model:

SDW-823

Test Mode:

Note:

No.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Degree (°)	Height (cm)
1	111.6433	17.60	peak	14.10	31.70	43.50	-11.80	126	100
2	232.1643	18.47	peak	14.13	32.60	46.00	-13.40	106	100
3	323.5271	20.14	peak	17.65	37.79	46.00	-8.21	58	100
4	453.7675	17.30	peak	21.11	38.41	46.00	-7.59	19	100
5	519.8597	16.27	peak	22.61	38.88	46.00	-7.12	7	100
6	648.1563	14.32	peak	24.27	38.59	46.00	-7.41	16	100

b) Emission frequencies above 1 GHz

Frequency (MHz)	Ant Pol H / V	Reading (dBuV) Peak	Correct Factor (dB)	Duty Factor (dB)	Result @3m (dBuV/m) Peak AVG	Limit @3m (dBuV/m) Peak AVG	Margins (dB)
Radiated emission frequencies above 1 GHz to 25 GHz were too low to be measured.							

Note:

1. Place of Measurement: Measuring site of the ETC.
2. If the data table appeared symbol of "****" means the value was too low to be measured.
3. The estimated measurement uncertainty of the result measurement is
 $\pm 4.6\text{dB}$ ($30\text{MHz} \leq f < 300\text{MHz}$).
 $\pm 4.4\text{dB}$ ($300\text{MHz} \leq f \leq 1000\text{MHz}$).

10.4.2.3 IEEE 802.11b

Test Date: Nov. 26, 2008Temperature: 20°CHumidity: 67 %Operation Mode: TX

Operation Channel	Test Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)	
		H		V			Peak	Ave	Peak	Ave.
1	2390.000	26.51	15.11	24.64	13.88	30.3	56.81	46.07	74.0	54.0
11	2483.500	25.43	15.42	24.73	13.45	30.3	55.73	45.72	74.0	54.0

10.4.2.4 IEEE 802.11g

Test Date: Nov. 26, 2008Temperature: 20°CHumidity: 67 %Operation Mode: TX

Operation Channel	Test Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)	
		H		V			Peak	Ave	Peak	Ave.
1	2390.000	27.49	16.81	23.76	13.62	30.3	57.79	47.11	74.0	54.0
11	2483.500	29.64	16.83	25.49	13.78	30.3	59.94	47.13	74.0	54.0

Note :

1. Remark “---” means that the emissions level is too low to be measured.
2. The result is the highest value of radiated emission from restrict band of 2310 ~ 2390 MHz and 2483.5 ~ 2500 MHz.

10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss(if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

where

$$\text{Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$