



1/F., Building No. 1 Building, Agriculture Machinery Materials Co.  
Wushan Road, Shipai, Tianhe District, Guangzhou, China  
Telephone: +86 (0) 20 3848 1001 Fax: +86 (0) 20 3848 1006  
Email: sgs\_internet\_operations@sgs.com

**FEDERAL COMMUNICATIONS COMMISSION**  
Registration number: 282399

Report No.: GLEMO050300530RFT  
Page: 1 of 14  
FCC ID:

## **FCC TEST REPORT**

**Application No.** : GLEMO050300530RF ( SGS NO.: 2009312/EL)

**Applicant** : FREEWELL TRADING LIMITED

**FCC ID** : S3E-05FLT05169

**Fundamental Frequency** : 315.000MHz

**Equipment under Test (EUT):**

Name : REMOTE CONTROL SPOOKY SOUND

Model : 05169

**Standards** : FCC PART 15, SUBPART C : 2004 (Section 15.231)

**Date of Receipt** : 05 March 2004

**Date of Test** : 07 March to 16 May 2004

**Date of Issue** : 28 May 2004

<b>Test Result :</b>	<b>PASS *</b>
----------------------	---------------

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Kent Hsu  
Laboratory Manager

This report refers to the General Conditions for Inspection and Testing Services, printed overleaf. This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the SGS PRODUCT CERTIFICATION MARK.. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

All test results in this report can be traceable to National or International Standards.

## 2 Test Summary

Test	Test Requirement	Stanadard Paragraph	Result
Radiated Emission (30MHz to 1000MHz)	FCC PART 15 :2004	Section 15.231	PASS
Occupied Bandwidth	FCC PART 15 :2004	Section 15.231	PASS
Calculation Of Duty Cycle	FCC PART 15 :2004	Section 15.231	PASS

**Remark:**

The EUT passed Occupied Bandwidth test after the modification by the applicant.

### **3 Contents**

	Page
<b>1 COVER PAGE</b> .....	1
<b>2 TEST SUMMARY</b> .....	2
<b>3 CONTENTS</b> .....	3
<b>4 GENERAL INFORMATION</b> .....	4
4.1 CLIENT INFORMATION .....	4
4.2 DETAILS OF E.U.T. .....	4
4.3 DESCRIPTION OF SUPPORT UNITS .....	4
4.4 TEST LOCATION .....	4
4.5 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	4
4.6 TEST FACILITY.....	5
<b>5 TEST RESULTS</b> .....	6
5.1 TEST INSTRUMENTS.....	6
5.2 E.U.T. OPERATION .....	6
5.3 TEST PROCEDURE & MEASUREMENT DATA.....	7
5.3.1 <i>Radiated Emissions</i> .....	7
5.3.2 <i>Occupied Bandwidth</i> .....	9
<b>6 PHOTOGRAPHS - TEST SETUP</b> .....	12
<b>7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS</b> .....	13-14

## **4 General Information**

### **4.1 Client Information**

Applicant: FREEWELL TRADING LIMITED  
Address of Applicant: FLT R, 8/F, BLK 2, GOLDFIELD IND. BLDG., 144 TAI LIN PAI RD, KWAI CHUNG, HK.

### **4.2 Details of E.U.T.**

Product Name: REMOTE CONTROL SPOOKY SOUND  
( Transmitter Part)  
Model: 05169  
Power Supply: 12Vdc ( 1 x Alkaline Battery) for transmitter,  
6.0Vdc ( 4 x 'AAA' Size Batteries) for receiver.

### **4.3 Description of Support Units**

The EUT was tested as an independent unit: a 315MHz radio transmitter.

### **4.4 Test Location**

All tests were performed at:

SGS-CSTC Standards Technical Services Ltd., Guangzhou EMC Laboratory, 1/F, Building No. 1, Agriculture Machinery Materials Company Warehouse Ltd., Wushan Road Shipai, Tianhe District, Guangzhou, China. P.C. 510630.

Tel: +86 20 3848 1001

Fax: +86 20 3848 1006

### **4.5 Other Information Requested by the Customer**

None.

## 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP – Lab Code: 200611-0**  
SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0. Effective through December 31, 2005.
- **ACA**  
SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.
- **VCCI**  
The 3m Semi-anechoic chamber and Shielded Room (11.5m x 4m x 4m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-1599 and C-1706 respectively.  
Date of Registration: February 28, 2003. Valid until May 30, 2005
- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**  
Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.
- **CNAL – LAB Code: L0141**  
SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of Testing Laboratories.
- **FCC – Registration No.: 282399**  
SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002. With the above and NVLAP's accreditation, SGS-CSTC is an authorised test laboratory for the DoC process.
- **Industry Canada (IC)**  
The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5169.

## 5 Test Results

### 5.1 Test Instruments

RE in Chamber						
No:	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)
1	3m Semi- Anechoic Chamber	Frankonia	N/A	N/A	31-01-2005	30-01-2006
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	100085	10-10-2004	09-10-2005
3	EMI Test Software	Rohde & Schwarz	ES-K1	N/A	N/A	N/A
4	Coaxial cable	SGS	N/A	N/A	05-12-2003	04-12-2005
5	Bilog Type Antenna	Schaffner -Chase	CBL6143	5070	17-01-2005	16-01-2006
6	Horn Antenna	Rohde & Schwarz	HF906	100095	02-04-2004	01-04-2005
7	Spectrum Analyzer	Rohde & Schwarz	FSP30	100324	29-10-2004	28-10-2005
8	0.1-1300 MHz Pre-Amplifier	HP	8447D OPT 010	2944A0625 2	31-05-2004	30-05-2005
9	1-26.5 GHz Pre-Amplifier	Agilent	8449B	3008A0164 9	26-01-2004	25-01-2006
10	Active Loop Antenna	EMCO	6502	00042963	14-Jan-2005	14-Jan-2006

### 5.2 E.U.T. Operation

Operating Environment:

Temperature: 24.0 °C

Humidity: 50 % RH

Atmospheric Pressure: 1006 mbar

EUT Operation:

Test in transmitting mode.

## 5.3 Test Procedure & Measurement Data

### 5.3.1 Radiated Emissions

Test Requirement: FCC Part15 C

Test Method: ANSI C63.4

Test Date: 20 May 2005

Measurement Distance: 3m (Semi-Anechoic Chamber)

Frequency range 30 MHz – 5.0GHz for transmitting mode.

Test instrumentation resolution bandwidth 120 kHz (30 MHz - 1000 MHz)

1 MHz (1000 MHz – 25GHz)

Receive antenna scan height 1 m - 4 m, polarization Vertical/Horizontal

Requirements:

Fundamental Frequency MHz	Field Strength of Fundamental (dB $\mu$ V/m @ 3m)	Field Strength of Harmonics and Spurious Emissions (dB $\mu$ V/m @ 3m)
40.66 to 40.70	67.04	47.04
70 to 130	61.94	41.94
130 to 174	61.94 to 71.48	41.94 to 51.48
174 to 260	71.48	51.48
260 to 470	71.48 to 81.94	51.48 to 61.94
470 and above	81.94	61.94

The fundamental frequency of the EUT is 314.830MHz

The limit for average field strength dB $\mu$ V/m for the fundamental frequency= 75.6dB $\mu$ V/m.

No fundamental is allowed in the restricted bands.

The limit for average field strength dB $\mu$ V/m for the harmonics and spurious frequencies = 55.6dB $\mu$ V/m. Spurious in the restricted bands must be less than 54.0 dB $\mu$ V/m or 15.209.

**Test Procedure:** The procedure used was ANSI Standard C63.4-2003. The receive was scanned from 30MHz to 5.0GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes.

The field strength is calculated by adding the Antenna Factor, Cable Factor & Peramplifier . The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Peramplifier Factor

An initial pre-scan was performed in the 3m chamber using the spectrum analyser in peak detection mode. The EUT was measured by Bilog antenna with 2 orthogonal polarities and peak emissions from the EUT were detected within 6dB of the class B limit line.

The following test results were performed on the EUT on 20 December 2003:

## 1. Fundamental emission

Test Frequency (MHz)	Peak (dB $\mu$ V/m)		Limits (dB $\mu$ V/m)	Margin (dB)	
	Vertical	Horizontal		Vertical	Horizontal
314.830	70.9	80.5	95.6	24.7	15.1

Test Frequency (MHz)	Avergae (dB $\mu$ V/m)		Limits (dB $\mu$ V/m)	Margin (dB)	
	Vertical	Horizontal		Vertical	Horizontal
314.830	62.5	60.9	75.6	13.1	14.7

## 2. Harmonics &amp; Spurious Emissions

**Peak Measurement**

Test Frequency (GHz)	Measuring Level (dB $\mu$ V/m)		Limits (dB $\mu$ V/m)	Margin (dB)	
	Vertical	Horizontal		Vertical	Horizontal
2) 629.660	60.2	61.8	75.6	15.4	13.8
3) 944.490	64.5	72.9	75.6	11.1	2.7
4) 1259.320	65.2	60.0	75.6	10.4	15.6
5) 1574.150	64.9	60.2	74.0	9.1	13.8
6) 1888.980	70.4	58.1	75.6	5.2	17.5
7) 2203.810	57.2	52.5	74.0	16.8	21.5
8) 2518.640	56.1	45.6	75.6	19.5	30.0
9) 2833.470	N/A	N/A	74.0	N/A	N/A
10) 3148.300	N/A	N/A	75.6	N/A	N/A

**Average Measurement**

2) 629.660	49.6	41.2	55.6	6.1	14.4
3) 944.490	50.4	39.2	55.6	5.2	16.4
4) 1259.320	48.1	48.4	55.6	7.5	7.2
5) 1574.150	47.5	46.7	54.0	6.5	7.3
6) 1888.980	44.5	43.9	55.6	11.1	11.7
7) 2203.810	48.6	42.8	54.0	5.4	11.2
8) 2518.640	49.6	45.0	55.6	6.1	10.6
9) 2833.470	N/A	N/A	54.0	N/A	N/A
10) 3148.300	N/A	N/A	55.6	N/A	N/A

## Remark:

According to 15.35 (b) When average radiated emission measurements are specified in the regulations, including emission measurements below 1000 MHz, there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules, e.g., see Section 15.255.

**TEST RESULTS: The unit does meet the FCC Part 15 C Section 15.231 requirements.**

FCC ID: S3E-05FLT05169

### 5.3.2 Occupied Bandwidth

Test Requirement: FCC Part15 C


Test Method: ANSI C63.4

Test Date: 20 May 2005 (Final Test)

Requirements: 15.231 (c3) The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Method of measurement: A small sample of the transmitter output was fed into the Spectrum Analyzer and the attached plot was taken. The vertical is set to 10dB per division. The horizontal scale is set to 100KHz per division.

The graph as below, represents the emissions take for this device.

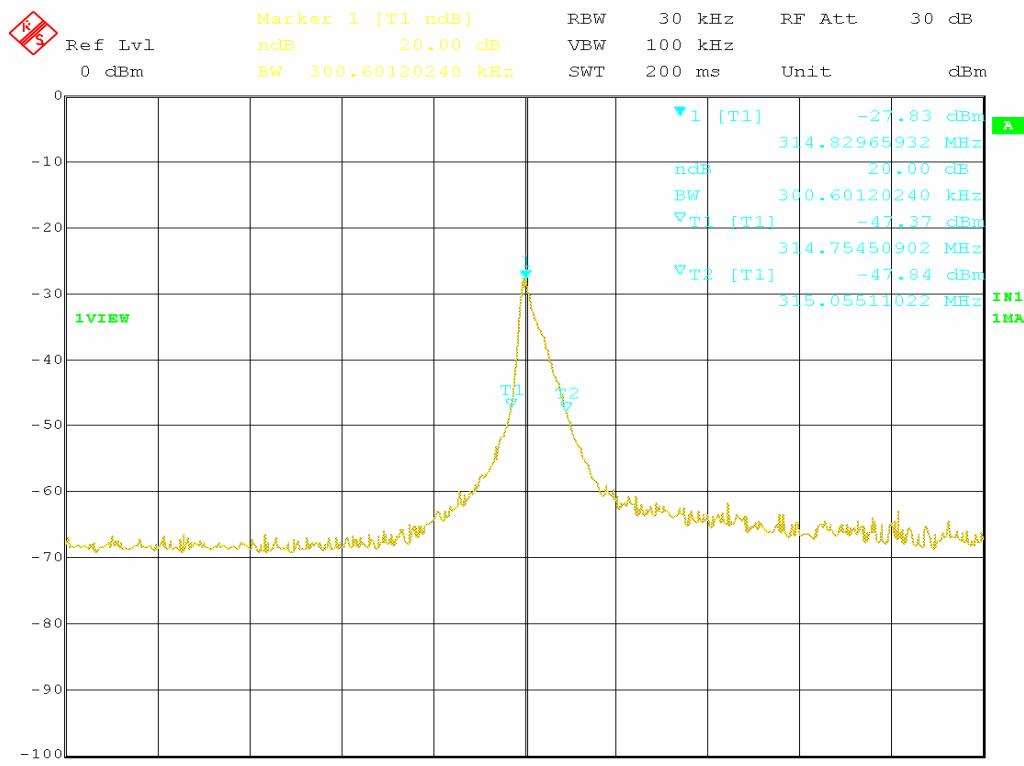

The bandwidth is 300.6KHz which is less than 315MHz \* 0.25% = 787.5KHz.

**The results: The unit does meet the FCC Part 15C Section 15.231 requirements.**

**4.3.5 Calculation Of Duty Cycle:**

Test Requirement: FCC Part15 C

Test Method: FCC Part15 C Section 15.231.

Test Date: 21 December 2003

Requirements:

**1. Regulation 15.231 (a)** The provisions of this Section are restricted to periodic operation within the band 40.66 40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of this Section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Radio control of toys is not permitted. Continuous transmissions, such as voice or video, and data transmissions are not permitted. The prohibition against data transmissions does not preclude the use of recognition codes. Those codes are used to identify the sensor that is activated or to identify the particular component as being part of the system.

**Result:**

The EUT is similar as a remote switch.


The EUT meets the requirements of this section.

**2. Regulation 15.231 (a1)** A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

**Result:**

Transmitter ceases immediately after being released.

Please refer to the duration of the each transmission as below:

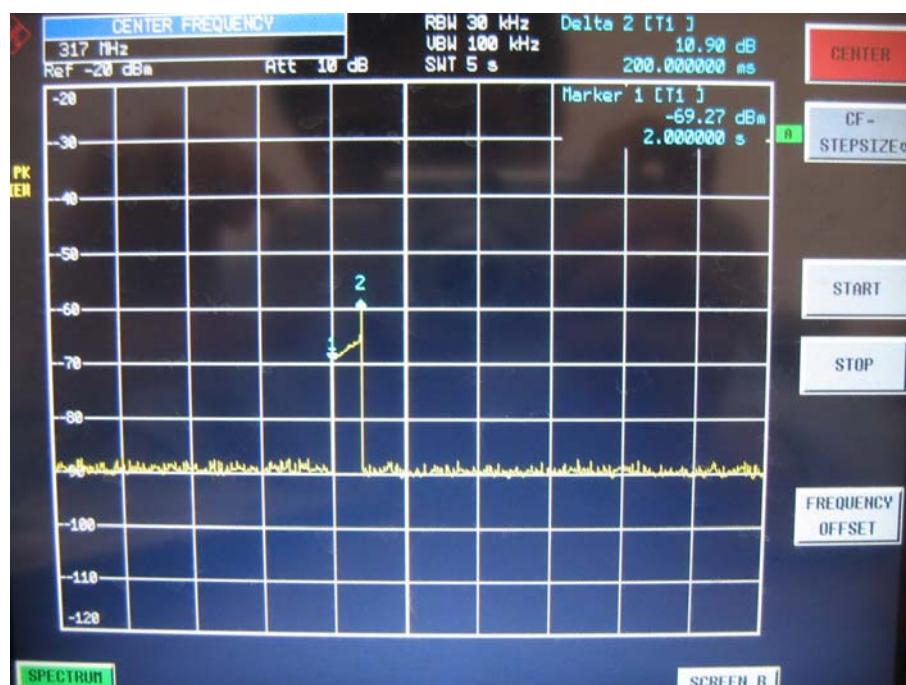

**The results:** The unit does meet the FCC Part 15C Section 15.231 requirements.

**3. Regulation 15.231 (a2)** A transmitter activated automatically shall cease transmission within 5 seconds after activation.

**Result:**

The EUT does not have automatic transmission.

**4. Regulation 15.231 (a3)** Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions to determine system integrity of transmitters used in security or safety applications are allowed if the periodic rate of transmission does not exceed one transmission of not more than one second duration per hour for each transmitter.

**Result:**

The EUT does not employ periodic transmission.

**5. Regulation 15.231 (a4)** Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.

**Result:**

This section is not applicable to the EUT.