



TEST REPORT NO: RU1175/6575

COPY NO: 2

ISSUE NO: 1

FCC ID: S30-CEL-TA

**REPORT ON THE CERTIFICATION TESTING OF A
VITEC GROUP COMMUNICATIONS
CELLCOM TRANSCEIVER/ANTENNA
WITH RESPECT TO
THE FCC RULES CFR 47, PART 15D June 2005
INTENTIONAL RADIATOR SPECIFICATION**

TEST DATE: 6th June 2005 – 30th September 2005

TESTED BY: _____ D WINSTANLEY

APPROVED BY: _____ P GREEN
EMC PRODUCT
MANAGER

DATE: 17th September 2005

Distribution:

Copy Nos: 1. VITEC GROUP COMMUNICATIONS
2. FCC EVALUATION LABORATORIES
3. TRL EMC

THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE

TRL COMPLIANCE SERVICES LTD EMC DIVISION

MOSS VIEW NIPE LANE UP HOLLAND WEST LANCASHIRE WN8 9PY UNITED KINGDOM

TELEPHONE +44 (0)1695 556666 FAX +44 (0)1695 557077

E-MAIL test@trl-emc.co.uk www.trlcompliance.com



FS 21805

CONTENTS

	PAGE
CERTIFICATE OF CONFORMITY & COMPLIANCE	3
APPLICANT'S SUMMARY	4
EQUIPMENT TEST CONDITIONS	5
TESTS REQUIRED	6
SYSTEM DESCRIPTION	6
TEST RESULTS	7-28
PHOTOGRAPHS	ANNEX A
PHOTOGRAPH No. 1: Test setup	
PHOTOGRAPH No. 2: Transmitter front view	
PHOTOGRAPH No. 3: Transmitter rear view	
PHOTOGRAPH No. 4: Transmitter rear view battery removed	
PHOTOGRAPH No. 5: Main PCB component & RF module side	
PHOTOGRAPH No. 6: Main PCB track side	
PHOTOGRAPH No. 7: Main PCB component side RF module removed	
PHOTOGRAPH No. 8: RF module track side	
PHOTOGRAPH No. 9: RF module component side	
PHOTOGRAPH No. 10: RF module component side can removed	
PHOTOGRAPH No. 11: Base unit overview	
PHOTOGRAPH No. 12: Base unit top removed	
APPLICANT'S SUBMISSION OF DOCUMENTATION LIST	B
AC POWERLINE CONDUCTION	C
EMISSION BANDWIDTH	D
PEAK TRANSMIT POWER	E
POWER SPECTRAL DENSITY	F
RANDOM WAITING INTERVAL	G
EMISSIONS INSIDE AND OUTSIDE THE SUB-BAND - RADIATED	H
BANDEDGE COMPLIANCE – CONDUCTED	I
FRAME PERIOD	J
EQUIPMENT CALIBRATION	K

Notes:

Notes:

1. Component failure during test YES NO
2. If Yes, details of failure:
3. The facilities used for the testing of the product contain in this report are FCC Listed.
4. The contents of the attached applicants declarations and other supplied information are not covered by the scope of this laboratory's UKAS or FCC accreditations' and is provided in good faith.



CERTIFICATE OF CONFORMITY & COMPLIANCE

FCC IDENTITY: S30-CEL-TA

PURPOSE OF TEST: Certification

TEST SPECIFICATION: FCC RULES CFR 47, Part 15D June 2005

TEST RESULT: Compliant to Specification

EQUIPMENT UNDER TEST: CellCom Transceiver/Antenna

EQUIPMENT SERIAL No: 359AX/12/05/370-2

EQUIPMENT TYPE: UPCS Transceiver

PRODUCT USE: Personal communications

CARRIER POWER: 19.00 dBm

ANTENNA TYPE: Integral

ALTERNATIVE ANTENNA: Not Applicable

BAND OF OPERATION: 1920 MHz – 1930 MHz

CHANNEL SPACING: Not Applicable

NUMBER OF CHANNELS: 5 Frequencies, 6 double time slots per frequency giving 30 channels

FREQUENCY GENERATION: SAW Resonator Crystal Synthesiser

MODULATION METHOD: Amplitude Digital Angle

POWER SOURCE(s): 24 Vdc or 110 Vac

TEST DATE(s): 6th June 2005 – 30th September 2005

ORDER No(s): 90482

APPLICANT: Vitec Group Communications

ADDRESS: 7400 Beach Drive
Cambridge Research Park
Cambridge
CB5 9TP

TESTED BY: _____ D WINSTANLEY

APPROVED BY: _____ P GREEN
EMC PRODUCT
MANAGER

APPLICANT'S SUMMARY

EQUIPMENT UNDER TEST (EUT): CellCom Transceiver/Antenna

EQUIPMENT TYPE: UPCS Transceiver

SERIAL NUMBER OF EUT: 359AX/12/05/370-2

PURPOSE OF TEST: Certification

TEST SPECIFICATION(s): FCC RULES CFR 47, Part 15D June 2005

TEST RESULT: COMPLIANT Yes No

APPLICANT'S CATEGORY: MANUFACTURER
IMPORTER
DISTRIBUTOR
TEST HOUSE
AGENT

APPLICANT'S ORDER No(s): 90482

APPLICANT'S CONTACT PERSON(s): Mr Jiou-pahn Lee

E-mail address: Jiou-Pahn.Lee@VitecGroup.com

APPLICANT: Vitec Group Communications

ADDRESS: 7400 Beach Drive
Cambridge Research Park
Cambridge
CB5 9TP

TEL: +44 (0) 1223 815 000

FAX: +44 (0) 1223 815 001

TEST LABORATORY: TRL EMC

UKAS ACCREDITATION No: 0728

TEST DATE(s) 6th June 2005 – 30th September 2005

TEST REPORT No: RU1175/6575

EQUIPMENT TEST / EXAMINATIONS REQUIRED

1.	TEST/EXAMINATION	RULE PART	APPLICABILITY
	Coordination with Fixed Microwave Service	15.307 (b)	Yes
	Cross reference to Subpart B	15.309 (b)	Yes
	Labelling Requirements	15.311 15.19 (a)(3)	Yes
	Measurement Procedures	15.313	Yes
	Antenna Requirement	15.317 15.203	Yes
	Modulation Techniques	15.319 (b)	Yes
	Conducted AC Powerline	15.315 15.207	Yes
	Emission Bandwidth	15.323 (a)	Yes
	Peak Transmit Power	15.319 (c)	Yes
	Power Spectral Density	15.319 (d)	Yes
	Antenna Gain	15.319 (e)	Yes
	Automatic Discontinuation of Transmission	15.319 (f)	Yes
	Radio Frequency Radiation Exposure	15.319 (i)	No note 2
	Monitoring Thresholds	15.323 (c)(2) 15.323 (c)(9)	Yes
	Monitoring of Intended Transmit Window and Maximum Reaction Time	15.323 (c)(1)	Yes
	Monitoring Bandwidth	15.323 (c)(7)	Yes
	Random Waiting Interval	15.323 (c)(6)	Yes
	Duration of Transmission	15.323 (c)(3)	Yes
	Connection Acknowledgement	15.323 (c)(4)	Yes
	Lower threshold Selected Channel, Power Accuracy, Segment Occupancy	15.323 (c)(5)	Yes
	Monitoring Antenna	15.323 (c)(8)	Yes
	Duplex Connections	15.323 (c)(10)	No note 3
	Alternative Monitoring Interval for Co-located Devices	15.323 (c)(11)	No note 4
	Fair Access to Spectrum Related to (c)(10) & (c)(11)	15.323 (c)(12)	Yes
	Emission Inside and Outside the Sub-band	15.323 (d)	Yes
	Frame Period	15.323 (e)	Yes
	Frequency Stability	15.323 (f)	Yes
note:		1. Requirement removed April 4 th 2005 see public notice DX 05-1005 2. EUT is not used within 20 cm of the body 3. The EUT is the responding device; see TRL report RU1175/6574 for results. 4. Not utilized by this EUT as devices will not be co-located within 1m of each other.	

2. Product Use:	Personal Communications	
3. Duty Cycle:	8.33%	
4. Transmitter bit or pulse rate and level:	2Mbps	
5. Temperatures:	Ambient (T _{nom})	20°C
6. Supply Voltages:	V _{nom}	+24 Vdc or +110 Vac

Note: V_{nom} voltages are as stated above unless otherwise shown on the test report page

7. Equipment Category:	Single channel	[]
	Two channel	[]
	Multi-channel	[X]
8. Channel spacing:	Narrowband	[]
	Wideband	[X]
9. System Description:		

The system is made up of two parts, a fixed part and a portable part. The portable part is a beltpack worn about the body. The fixed part constitutes two parts, an active antenna and a base unit. The base unit is rack mounted and is connected to the active antenna via a CAT-5 cable. This cable carries the data stream between the two units. It can also provide power from the base unit to the active antenna. The active antenna can also be powered from an additional power source.

The system operates in the 1920MHz -1930MHz band. The system use 5 different frequency channels 1.728MHz apart using MC/TDMA/TDD (Multi Carrier / Time Division Multiple Access / Time Division Duplex) using QPSK modulation.

The system employs a 10ms frame, divided into 24 equal timeslots, numbered 0-23. The system uses double-slots only, where a double-slot always begins on an even-numbered slot. The Base station always transmits in the first half of the frame, and the Portable always transmits on the duplex mate in the second half. A physical bearer is composed of a transmit double-slot and a receive double-slot. The two halves of a given bearer are always exactly half a frame (5ms, 12 slots) apart.

During the testing the belt pack was frequency administered to allow operation on only certain channels during the test. The frequency administration was performed using software.

CROSS REFERENCE TO SUBPART B – PART 15.309 (b)

The unit contains digital circuitry which is not directly related to the radio transmitter. See emissions inside and outside the sub-bands for results.

LABELLING INFORMATION – PART 15.311 & 15.19 (a)(3)

This information is contained in a separate document. See manufacturers label exhibit.

ANTENNA REQUIREMENTS – PART 15.317

The unit employs antenna with unique connectors.

MODULATION TECHNIQUES – PART 15.319 (b)

The CellCom Transceiver/Antenna is an isochronous device operating in the 1920 MHz – 1930 MHz frequency band.

The CellCom Transceiver/Antennas modulation technique is based on DECT technology as described in European standards EN 300 175-2 and EN 300 175-3.

The CellCom Transceiver/Antennas modulation techniques are MC/TDMA/TDD (Multi Carrier / Time Division Multiple Access / Time Division Duplex) using QPSK modulation.

TRANSMITTER CONDUCTED EMISSIONS – AC POWER LINE PART 15.315

SIGNIFICANT EMISSIONS

Frequency (MHz)	Measurement Receiver Reading (dB μ V)	Unit Powered by	Detector	Conductor (L or N)	Limit (dB μ V)
0.1600	39.60	RJ45	Quasi Peak	Live	65.46
0.1950	35.88	RJ45	Quasi Peak	Live	63.82
0.5300	34.42	110Vac	Average	Live	46.00
0.5900	34.19	110Vac	Average	Live	46.00
0.7050	31.68	110Vac	Average	Live	46.00
12.805	35.07	110Vac	Average	Neutral	50.00
14.340	36.17	110Vac	Average	Neutral	50.00
15.820	37.51	110Vac	Average	Live	50.00
15.875	37.83	110Vac	Average	Live	50.00
17.825	39.99	110Vac	Average	Live	50.00
17.940	40.58	110Vac	Average	Live	50.00
18.425	45.26	110Vac	Quasi Peak	Live	60.00
21.190	45.36	110Vac	Quasi Peak	Live	50.00
21.310	41.89	110Vac	Average	Live	50.00
21.315	45.34	110Vac	Quasi Peak	Live	60.00
21.425	42.74	110Vac	Average	Live	50.00
21.730	36.90	110Vac	Average	Neutral	50.00
21.895	39.24	110Vac	Average	Neutral	50.00

Notes:


- 1 See attached plot. Annex C
- 2 Emissions not within 15 dB's of the limit are not necessarily recorded
- 3 Applicable to active antenna powered via RJ45 cable from base unit, 110Vac not connected.
- 4 Applicable to active antenna powered by 110Vac with power via RJ45 cable removed.

Test Method: 1 As per Radio – Noise Emissions, ANSI C63.4: 2003

The test equipment used for the Transmitter Conducted Emissions – AC Power Line Part 15.207 test was:

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
RECEIVER	ROHDE & SCHWARZ	ESHS 10	830051/001	UH03	X
LISN/AMN	ROHDE & SCHWARZ	ESH3-Z5	863906/018	UH05	X


Quasi Peak and Average Limit Part 15.207
(Levels below the limit are only displayed if
within 15dB of the limit)

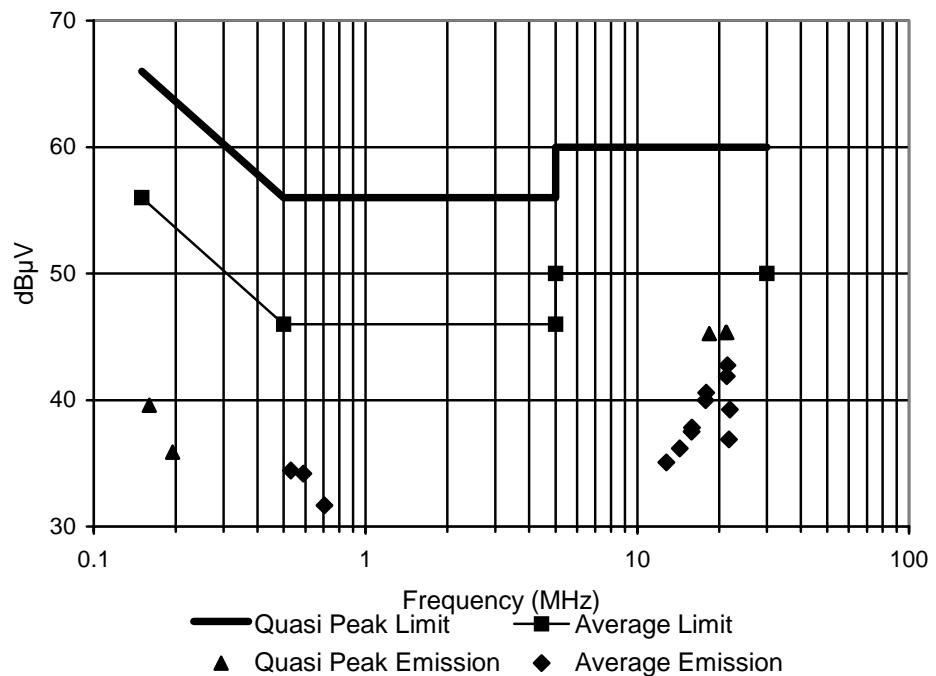

TRANSMITTER EMISSION BANDWIDTH – PART 15.323 (a)

The emission bandwidth is measured in accordance with ANSI C63.17 sub-clause 6.1.3 using the setup below. Measurements were taken on both of the EUTs antenna connectors labelled connectors 7 and 8.

TEST SETUP 1:

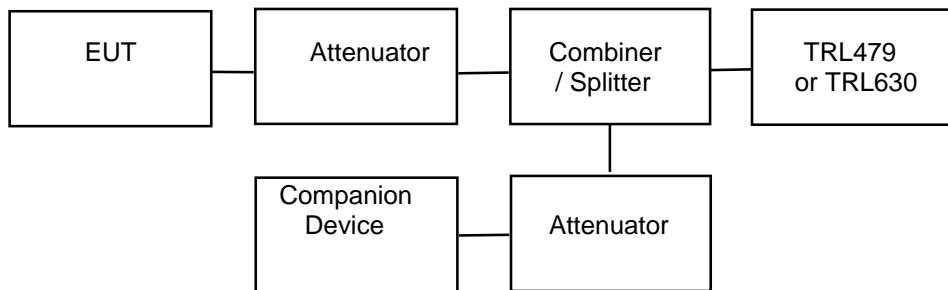

$f_x = 1921.536 \text{ MHz}$ Connector 7				
ΔP (dBc)	f_l (MHz)	f_h (MHz)	Δf (MHz)	Limit
-26	1920.816	1922.286	1.470	50kHz > Δf > 2.5MHz
-24	1920.836	1922.276	1.440	N/A
-12	1920.966	1921.156	1.190	N/A
-6	1920.096	1921.956	0.860	N/A

$f_x = 1924.992 \text{ MHz}$ Connector 7				
ΔP (dBc)	f_l (MHz)	f_h (MHz)	Δf (MHz)	Limit
-26	1924.282	1925.742	1.460	50kHz > Δf > 2.5MHz
-24	1924.292	1925.732	1.440	N/A
-12	1924.402	1925.602	1.200	N/A
-6	1924.522	1925.392	0.870	N/A

$f_x = 1928.448 \text{ MHz}$ Connector 7				
ΔP (dBc)	f_l (MHz)	f_h (MHz)	Δf (MHz)	Limit
-26	1927.728	1929.208	1.480	50kHz > Δf > 2.5MHz
-24	1927.738	1929.188	1.450	N/A
-12	1927.858	1929.078	1.220	N/A
-6	1928.018	1928.848	0.830	N/A

$f_x = 1921.536 \text{ MHz}$ Connector 8				
ΔP (dBc)	f_l (MHz)	f_h (MHz)	Δf (MHz)	Limit
-26	1920.830	1922.320	1.490	50kHz > Δf > 2.5Mhz
-24	1920.840	1922.290	1.450	N/A
-12	1920.950	1922.170	1.220	N/A
-6	1921.070	1922.030	0.960	N/A

$f_x = 1924.992 \text{ MHz}$ Connector 8				
ΔP (dBc)	f_l (MHz)	f_h (MHz)	Δf (MHz)	Limit
-26	1924.270	1925.760	1.490	50kHz > Δf > 2.5Mhz
-24	1924.290	1925.740	1.450	N/A
-12	1924.410	1925.610	1.200	N/A
-6	1924.510	1925.470	0.960	N/A

$f_x = 1928.448 \text{ MHz}$ Connector 8				
ΔP (dBc)	f_l (MHz)	f_h (MHz)	Δf (MHz)	Limit
-26	1927.720	1929.200	1.480	50kHz > Δf > 2.5Mhz
-24	1927.730	1929.190	1.460	N/A
-12	1927.850	1929.060	1.210	N/A
-6	1927.980	1928.900	0.920	N/A

Note: See emission bandwidth plot for 1924.992 MHz Connector 8 in Annex D

PEAK TRANSMIT POWER – PART 15.319 (c)

The peak transmit power is measured in accordance with ANSI C63.17 sub-clause 6.1.2 using test setup 1.(page 9)

The limit for Peak Transmit Power (PTP) is calculated using the following formula:

$$PTP = 100\mu W \times \sqrt{EBW}$$

This limit must be corrected to take into account any gain of the antenna greater than 3dBi.
Where: EBW is the transmitter emission bandwidth in Hz as determined in the previous test.

Limit $EBW = 1.490 \text{ MHz}$

$$PTP = 100\mu W \times \sqrt{1.490} \text{ MHz}$$

$$PTP = 20.8 \text{ dBm}$$

Results

Frequency (MHz)	Peak Transmit Power Connector 7 (dBm)	Peak Transmit Power Connector 8 (dBm)	Limit (dBm)
1921.536	19.00	18.99	20.8
1924.992	18.99	18.82	20.8
1928.448	18.86	18.13	20.8

Note:

1. Permanent antenna was replaced with temporary antenna connector to enable conducted measurement.
2. Antenna gain < 3dBi and so correction of the limit is not required.
3. See Annex E for 1921.536MHz Connector 7 Peak Transmit Power Plot

POWER SPECTRAL DENSITY – PART 15.319 (d)

The power spectral density is measured using test setup 1.(page 9) The peak emission level measured in a 3kHz resolution bandwidth was compared directly to the limit

Limit

The power spectral density shall not exceed 3mW in any 3 kHz bandwidth as measured with a spectrum analyser having a resolution bandwidth of 3kHz.

Results

Frequency (MHz)	Power Spectral Density Connector 7 (mW/3kHz)	Power Spectral Density Connector 8 (mW/3kHz)	Limit (mW/3kHz)
1921.536	2.84	2.82	3
1924.992	2.47	2.63	3
1928.448	2.75	2.82	3

Note:

1. See Annex F for 1921.536MHz Power Spectral Density Plot

ANTENNA GAIN – PART 15.319 (e)

Any directional gain of the antenna exceeding 3dBi has an effect on the limit applied to the measurements taken for the peak transmit power test. If the directional gain of the antenna is less than 3dBi it is not required to be taken into account.

Maximum Antenna Gain	Exceeds 3dbi by
+2dBi	N/A

Note: Statement by manufacturer declaring maximum antenna gain exhibit.

AUTOMATIC DISCONTINUATION OF TRANSMISSION – PART 15.319 (f)

Automatic discontinuation of transmission means break off of transmissions that are not control and signalling information.

This test is monitored using the test setup 1(page 9) as per transmitter emission bandwidth and an active channel.

The EUT is a fixed part and transmits control and signalling information. The counter part is the portable part and does not transmit control and signalling information.

Part	Transmits Control and Signaling Information	Equipment Under Test
Fixed Part	X	X
Portable Part		

Results

The following test are performed after a connections has been established with the counter part device

Number	Test	Reaction Of EUT	Pass / Fail
1	Power/Signal Cable removed from Active Antenna	A	Pass
2	Power removed from EUT	A	Pass
3	EUT powered down	A	Pass
4	Counter part (Beltpack) powered down	B	Pass
5	Power removed from Counter part (Beltpack)	B	Pass

Note: 1. Tests performed on both antenna connectors with same result.

A – Connection breakdown, Cease of all transmissions


B – Connection breakdown, EUT transmits control and signalling information

C – Connection breakdown, Counterpart transmits control and signalling information

MONITORING THRESHOLDS – PART 15.323 (c)(2); (c)(9)

The monitoring threshold tests are carried out in accordance with ANSI C63.17 sub-clause 7.3.2.1 using the test setup 2. The lower threshold level was determined following the procedure as laid out in ANSI C63.17 sub-clause 7.3.2.1.1 (a-g) Frequency administration was used to allow operation on only two of the EUT's possible carrier frequencies (f1 and f2).

TEST SETUP 2:

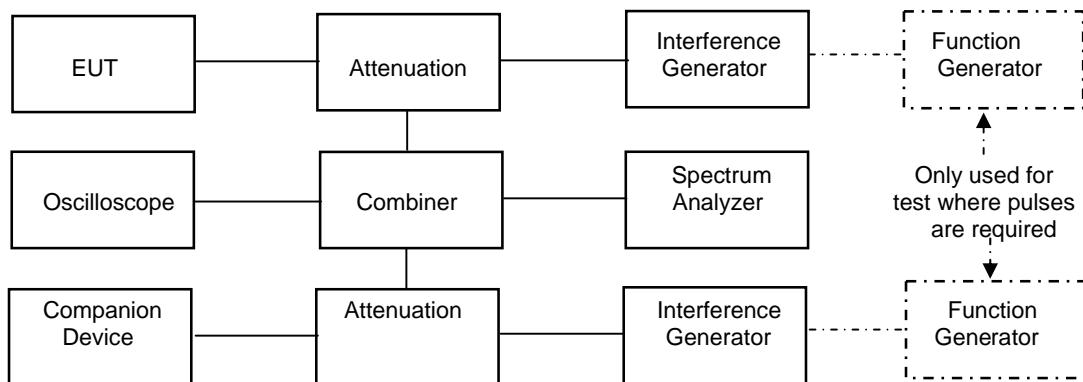

Calculation of monitoring threshold limits for isochronous devices:

$$\text{Lower threshold: } T_L = 15\log_{10}B - 184 + 30 - P \text{ (dBm)}$$

$$\text{Upper threshold: } T_L = 15\log_{10}B - 184 + 50 - P \text{ (dBm)}$$

Where:
 B = Emission bandwidth (Hz)
 P = Transmitted power (dBm)

Limits

Monitor Threshold	B (MHz)	P (dBm)	Limit (dBm)
Lower Limit	1.49	19.00	-80.5
Upper limit	1.49	19.00	-60.5

Note: 1. The upper threshold is only applicable for systems with a minimum of 40 channel

Results

Monitor threshold	Measured Threshold Level	Calculated Threshold level
Lower Threshold (dBm)	-83	-80.5
Upper threshold (dBm)	N/A	N/A

For a device with less than 40 channels ANSI C63.17 sub-clause 7.3.2.1.1 (h) applies to show that if all channels have interference on the transmit portion of the frame above the calculated lower threshold the EUT will not transmit.

Result

Interference	Transmission
TX portion only of f1 permanent on f2	No

MONITORING OF INTENDED TRANSMIT WINDOW AND MAXIMUM REACTION TIME – PART 15.323 (c)(1)

The monitoring of intended transmit window was carried out in accordance with ANSI C63.17 sub-clause 7.5 using test setup 2.(page 14)

The EUT was frequency administered to only one operating frequency channel and only one of the interference generators in the test setup was utilized. The interference generator was fed pulses from the function generator to produce a pulsed carrier of the specified time length and the output of the interference generator was set to the required level. The pulse generator and companion device were synchronized so the position of the pulses corresponded to the time-slot pattern in the frame of the EUT. The test is performed with the unit frequency administered to operate only on bottom, middle or top frequency and performed on connection 7 only.

For each of the required tests the pulse width and interference level are as below:

Test c)

With the interference generator output set at the calculated threshold level (lower) and the width of the pulse interference exceeds $50\sqrt{1.25/B}$ μ s verify that the EUT does not establish a connection.

Test d)

With the interference generator output set at 6dB above the calculated threshold level (lower) and the width of the pulse interference exceeds $35\sqrt{1.25/B}$ μ s verify that the EUT does not establish a connection.

Test e)

With the interference generator output set at 10dB above the calculated threshold level (lower) and the width of the pulse interference exceeds $75\sqrt{1.25/B}$ μ s verify that the EUT does not establish a connection.

Where B = Emission bandwidth of the EUT in MHz

Results

Test Equation (μ s)	Pulse Width (μ s)	Interferer Level (dBm)	Connection		
			F_L	F_M	F_H
$50\sqrt{1.25/B}$	32.1	>Calculated	No	No	No
$35\sqrt{1.25/B}$	45.8	>Calculated + 6	No	No	No
$75\sqrt{1.25/B}$	68.7	>Calculated + 10	No	No	No

MONITORING BANDWIDTH – PART 15.323 (c)(7)

The monitoring bandwidth test was carried out in accordance with ANSI C63.17 sub-clause 7.4.2 using test setup 2. (page 14)

The EUT was frequency administered to only one operating frequency and only one of the interference generators in the test setup was utilized. A carrier is set a frequency determined by the -6, -12 and -24dBc as found in the emission bandwidth test. The level of the carrier is set to 6dB, 12dB and 24dB respectively above the calculated threshold. It shall be verified that the EUT does not establish a connection. The test is performed with the unit frequency administered to only bottom, middle or top operating frequency and performed on connection 7 only.

Results

$f_x = 1921.536 \text{ MHz}$ Connector 7				
dBc	Freq. of Interferer	Level above Threshold	Connection Made	Pass / Fail
-24	1920.836	24 dB	No	Pass
-12	1920.966	12 dB	No	Pass
-6	1921.096	6 dB	No	Pass
-6	1921.956	6 dB	No	Pass
-12	1922.156	12 dB	No	Pass
-24	1922.276	24 dB	No	Pass

$f_x = 1924.992 \text{ MHz}$ Connector 7				
dBc	Freq. of Interferer	Level above Threshold	Connection Made	Pass / Fail
-24	1924.272	24 dB	No	Pass
-12	1924.402	12 dB	No	Pass
-6	1924.522	6 dB	No	Pass
-6	1924.392	6 dB	No	Pass
-12	1925.602	12 dB	No	Pass
-24	1925.732	24 dB	No	Pass

$f_x = 1928.448 \text{ MHz}$ Connector 7				
dBc	Freq. of Interferer	Level above Threshold	Connection Made	Pass / Fail
-24	1927.738	24 dB	No	Pass
-12	1927.858	12 dB	No	Pass
-6	1928.018	6 dB	No	Pass
-6	1928.848	6 dB	No	Pass
-12	1929.078	12 dB	No	Pass
-24	1929.188	24 dB	No	Pass

RANDOM WAITING INTERVAL – PART 15.323 (c)(6)

The random waiting interval tests were carried out in accordance with ANSI C63.17 sub-clause 7.4.2 using test setup 2.(page 14) These tests only apply to an EUT capable of transmitting control and signaling information.

The EUT was frequency administered to only one operating frequency. The interference generator was fed pulses from the function generator to produce a pulsed carrier of the specified time length and the output of the interference generator was set to the required level. The pulse generator and companion device were synchronized so the position of the pulses corresponded to the time-slot pattern in the frame of the EUT. The tests were performed to find the following:

Test c)

The time interval of repetitive transmissions. The repetitive transmission interval should be 30 seconds or less.

Test d)

The time interval between repetitive transmissions. The interval between repetitive transmission should be greater than 150ms for 5 consecutive transmissions or greater than 10ms for 100 consecutive transmissions but never less than 10ms.

Test e)

Verify that, with the upper 3MHz of the band containing interference, the EUT changes time/spectrum window every 30 seconds or less and does not choose interfered frequency channels. After the 30 second time limit the EUT should cease transmission on the current un-interfered time/spectrum window. Transmission may occur on a different time/spectrum window of which the frequency shall not be in the blocked range.

Test f)

The EUT selects the correct time/spectrum window when interference is removed. Remove all interference at least 10 seconds before the repetitive transmission interval is due to expire and verify that the EUT chooses the frequency at the preferred end of the band.

Results

Test	Test Data Required	Test Result	Limit	Pass/Fail
c	Time interval of Repetitive Transmission	1.525 Seconds	30 seconds	Pass
d	Time interval Between Repetitive Transmissions	10ms<100 samples<150	5 samples<150 OR 10ms<100 samples<150	Pass
e	Change of time/spectrum window within 30s or less	30 seconds or less note 3	30 seconds	Pass
f (note 2)	Verification of change of Time/Spectrum window	Transmit on 1928.448 MHz	Transmit on 1928.448 MHz	Pass

Note:

1. See Annex G for Repetitive Transmission plots.
2. Frequency of transmission before removal of interference 1926.720 MHz.
3. EUT continued to transmit on a different time/spectrum window.

DURATION OF TRANSMISSION – PART 15.323 (c)(3)

The duration of transmission test was carried out in accordance with ANSI C63.17 sub-clause 8.2.2 using test setup 2. (page14) (No interference generators were active during this test).

The time/spectrum window occupied by the connection was monitored using a spectrum analyzer for the spectrum window and an oscilloscope for the time slot. The connection was watched over a period of over 6 hours during this time the access criteria was repeated several times.

Result

Repetition of Access Criteria	Maximum Transmission Time	Maximum Transmission Time Limit
First	2Hours	<8 Hours
Second	2Hours	<8 Hours

CONNECTION ACKNOWLEDGEMENT – PART 15.323 (c)(4)

The connection acknowledgement test was carried out in accordance with ANSI C63.17 sub-clause 8.2.1 using test setup 2. (page 14)(No interference generators were active during this test).

The test was carried out in two parts. The first was to verify that with the companion device off the EUT does not transmit on the same time/spectrum window for more than the limit. The second was to verify that after a connection is broken the EUT terminates its transmission on the current time spectrum window.

Result

Test	Time Taken (seconds)	Limit (seconds)
Change of communication channel (note 1)	<1s (note 2)	1
Change of control Channel (note 1)	<30s	30
Connection Breakdown	(note 3)	30

Note:

1. The companion device is off for these tests.
2. The EUT will not transmit a communication channel with the companion device off.
3. On connection breakdown the EUT continues to transmit control information.

UPPER THRESHOLD SELECTED CHANNEL, POWER ACCURACY, SEGMENT OCCUPANCY – PART 15.323
(c)(5)

Least interfered Channel

As this system has less than 40 channels the least interfered channel relating to the lower monitoring threshold shall be assessed.

This test was carried out in accordance with ANSI C63.17 sub-clause 7.3.2.1.2 using test setup 2.(page14)

The EUT was frequency administered to operating on two frequencies only, f1 and f2.

$$\begin{aligned}f1 &= 1923.264 \text{ MHz} \\f2 &= 1621.536 \text{ MHz}\end{aligned}$$

For the first test, interference on f1 was set at 10dB above the measured lower threshold and 3dB above the measured lower threshold on f2. In this case the EUT should transmit on f2. The third part of the test interference on f1 was set at 3dB above the measured lower threshold and 10db above the measured lower threshold on f2. In this case the EUT should transmit on f1. The second part of the test is applicable as the system utilizes TDMA. The interference on f2 is set to 3dB above the measured lower threshold. The interference on f1 is set to 10 dB above the measured lower threshold. The interference is applied on over the transmit portion of the EUT's frame with one transmit double time slot free of interference. In this case the EUT should transmit in the interference free time slot.

Result

Test	Transmit on f1	Transmit on f2	Wanted Transmit Channel	Pass/Fail
1	No	Yes	f2	Pass
2 (note 1)	Yes	No	f1	Pass
3	Yes	No	f1	Pass

Note: 1. For test two due to the system having blind slots the test could only be performed when the position of the dummy bearer was in specific time slots relative to the interference free time slots. The system selected the interference free slot when the interference free slot was not a blind slot.

Selected Channel Confirmation

This test was carried out in accordance with ANSI C63.17 sub-clause 7.3.2.2 using test setup 2 (page 14) using the same frequencies and interferer levels as test 3 detailed above. The interference on f2 is removed and a connection established on this frequency. The connection is terminated. The interference is reapplied and the EUT is immediately caused to attempt transmission. In this case the EUT should transmit on f1

The test is to ensure the EUT monitors the time/spectrum window immediately prior to transmission.

Result

Test	Transmit on f1	Transmit on f2	Wanted Transmit Channel	Pass/Fail
1	Yes	No	f1	Pass

Power Accuracy

The power measurement resolution for the previous comparison must be accurate to within 6dB. The monitoring threshold test covered in Part 15.323 (c)(2) automatically proves that this requirement is met.

Segment Occupancy

This section is not applicable as no units will be located within 1 metre of each other.

MONITORING ANTENNA – PART 15.323 (c)(8)

The antenna of the EUT used for transmitting is the same antenna that is used for monitoring.

DUPLEX CONNECTIONS – PART 15.323 (c)(10)

Not applicable. The EUT is the responding device and the companion is the initiating device. For duplex test results for this system see TRL report RU1175/6574.

ALTERNATIVE MONITORING INTERVAL FOR CO-LOCATED DEVICES – PART 15.323 (c)(11)

This test is carried out in accordance with ANSI C63.17 sub-clause 7.3.2.1.2

The manufacturer declares that this provision is not utilized by the EUT

FAIR ACCESS TO SPECTRUM RELATED TO (c)(10) & (c)(11) – PART 15.323 (c)(12)

The provisions of (c)(10) & (c)(11) shall not be used to extend the range of spectrum occupied over space or time for the purposes of denying fair access to the spectrum to other devices.

The manufacturer declares that this device does not work in mode which denies fair access to the spectrum to others. See attached exhibit.

EMISSIONS INSIDE AND OUTSIDE THE SUB-BAND – RADIATED – PART 15.323 (d)

These measurements are carried out in accordance with ANSI C63.17 sub-clause 6.1.6.3 to measure emissions from digital circuitry not directly associated to the radio transmitter.

EUT transmitting control information	FREQ. (MHz)	MEAS. Rx. (dB μ V)	CABLE LOSS (dB)	ANT FACTOR	FIELD STRENGTH (dB μ V/m)	EXTRAP. FACTOR (dB)	FIELD STRENGTH (μ V/m)	LIMIT (μ V/m)
1.705MHz - 30MHz								
30MHz - 88MHz	49.15(m)	36.42	0.78	8.00	45.2	10	57.54	90
	73.75	26.27	1.13	5.60	33.0	-	44.66	90
	76.80	22.89	1.16	5.95	30.0	-	31.62	90
	82.95	23.57	1.23	7.10	31.9	-	39.35	90
	86.00	28.54	1.26	7.70	37.5	-	74.98	90
	88MHz - 216MHz	110.6	16.67	1.43	11.30	29.4	-	29.51
216MHz - 960MHz								
960MHz - 1GHz								
1GHz - 20GHz								
Limits	1.705MHz to 30MHz				30 μ V/m @ 30m			
	30MHz to 88MHz				90 μ V/m @ 10m			
	88MHz to 216MHz				150 μ V/m @ 10m			
	216MHz to 960MHz				210 μ V/m @ 10m			
	960MHz to 1GHz				300 μ V/m @ 10m			
	1GHz to 20GHz				300 μ V/m @ 10m			

Notes:

- 1 Results quoted are extrapolated as indicated
- 2 Emissions were searched to: (x) 1000MHz inclusive, as per Part 15.33a
- 3 Extrapolation factor 10dB from 3m to 10m, as per Part 15.31f
- 4 Measurements >1GHz @ 1m as per Part 15.31f(1)
- 5 Receiver detector >1GHz = CISPR, Quasi-Peak, 120kHz bandwidth
- 6 Receiver detector >1GHz = Peak Hold, 1MHz resolution bandwidth reduced to 10kHz for critical frequencies as per ANSI C63.17, 6.1.6.1.2
- 7 New batteries used for battery powered products.
- 8 See annex H for scan plot 30MHz – 1GHz
- 9 (m) Measurement at 3m, extrapolated to 10m as per 15.31f due to high ambient.

Test Method:

- 1 As per Radio – Noise Emissions, ANSI C63.4: 2003
- 2 Measuring distances as Notes 1 to 4 above
- 3 EUT 0.8 metre above ground plane
- 4 Emissions maximised by rotation of EUT, on an automatic turntable.
Raising and lowering the receiver antenna between 1m & 4m.
Horizontal and vertical polarisations, of the receive antenna.
EUT orientation in three orthogonal planes.
Maximum results recorded.

EMISSIONS INSIDE AND OUTSIDE THE SUB-BAND – CONDUCTED – PART 15.323 (d)

These measurements are carried out in accordance with ANSI C63.17 sub-clause 6.1.6.3 with the unit set to a channel near the lower sub-band edge on connection 7.

EUT set to channel nearest lower bandedge. Connection 7.	FREQ. (MHz)	MEASURED LEVEL (dBm)	ATTENUATOR/FILTER & CABLE LOSS (dB)	EMISSION (dBm)	LIMIT (dBm)
< -2.5MHz				note 7	
-2.5MHz - -1.25MHz				note 7	
-1.25MHz - Bandedge				note 7	
Bandedge - +1.25MHz				note 7	
+1.25MHz - +2.5MHz				note 7	
> +2.5MHz	1918.730 3842.480 5763.496	-78.96 -53.37 -63.40	22.00 6.42 5.60	-56.96 -46.95 -57.80	-39.5 -39.5 -39.5
Limits	Offset				
	Bandedge – ±1.25MHz			-9.5 dBm	
	±1.25MHz – ±2.5MHz			-29.5 dBm	
	> ±2.5MHz			-39.5 dBm	

Notes:

- 1 Results quoted are extrapolated as indicated
- 2 Emissions were searched to: (x) 1000MHz inclusive, as per Part 15.33a
- 3 Receiver detector <1GHz = Peak hold, 100kHz bandwidth reduced to 10kHz for critical frequencies as per ANSI C63.17, 6.1.6.1.2
- 4 Receiver detector >1GHz = Peak Hold, 1MHz bandwidth reduced to 10kHz for critical frequencies as per ANSI C63.17, 6.1.6.1.2
- 5 New batteries used for battery powered products.
- 6 See Annex I for conducted upper band edge compliance plot
- 7 Emissions not within 20dB of the limit are not necessarily recorded.
- 8 Attenuator for emissions below 3GHz. Filter for emissions above 3GHz
- 9 See Annex for bandedge compliance plots

Test Method:

- 1 As per Radio – Noise Emissions, ANSI C63.4: 2003

EMISSIONS INSIDE AND OUTSIDE THE SUB-BAND – CONDUCTED – PART 15.323 (d)

These measurements are carried out in accordance with ANSI C63.17 sub-clause 6.1.6.3 with the unit set to a channel near the upper sub-band edge on connection 7.

EUT set to channel nearest upper bandedge. Connection 7.	FREQ. (MHz)	MEASURED LEVEL (dBm)	ATTENUATOR/FILTER & CABLE LOSS (dB)	EMISSION (dBm)	LIMIT (dBm)
< -2.5MHz				note 7	
-2.5MHz - -1.25MHz				note 7	
-1.25MHz - Bandedge				note 7	
Bandedge - +1.25MHz				note 7	
+1.25MHz - +2.5MHz				note 7	
> +2.5MHz	1931.29 3875.50 5785.42	-79.98 -59.39 -71.12	22.00 6.42 5.60	-57.98 -52.97 -65.52	-39.5 -39.5 -39.5
Limits	Offset				
	Bandedge - \pm 1.25MHz			-9.5 dBm	
	\pm 1.25MHz - \pm 2.5MHz			-29.5 dBm	
	> \pm 2.5MHz			-39.5 dBm	

Notes:

- 1 Results quoted are extrapolated as indicated
- 2 Emissions were searched to: (x) 1000MHz inclusive, as per Part 15.33a
- 3 Receiver detector <1GHz = Peak hold, 100kHz bandwidth reduced to 10kHz for critical frequencies as per ANSI C63.17, 6.1.6.1.2
- 4 Receiver detector >1GHz = Peak Hold, 1MHz bandwidth reduced to 10kHz for critical frequencies as per ANSI C63.17, 6.1.6.1.2
- 5 New batteries used for battery powered products.
- 6 See Annex I for conducted upper band edge compliance plot
- 7 Emissions not within 20dB of the limit are not necessarily recorded.
- 8 Attenuator for emissions below 3GHz. Filter for emissions above 3GHz
- 9 See Annex for bandedge compliance plots

Test Method:

- 1 As per Radio – Noise Emissions, ANSI C63.4: 2003
- 2 Measuring distances as Notes 1 to 4 above

EMISSIONS INSIDE AND OUTSIDE THE SUB-BAND – CONDUCTED – PART 15.323 (d)

These measurements are carried out in accordance with ANSI C63.17 sub-clause 6.1.6.3 with the unit set to a channel near the lower sub-band edge on connection 8.

EUT set to channel nearest lower bandedge. Connection 8.	FREQ. (MHz)	MEASURED LEVEL (dBm)	ATTENUATOR/FILTER & CABLE LOSS (dB)	EMISSION (dBm)	LIMIT (dBm)
< -2.5MHz				note 7	
-2.5MHz - -1.25MHz				note 7	
-1.25MHz - Bandedge				note 7	
Bandedge - +1.25MHz				note 7	
+1.25MHz - +2.5MHz				note 7	
> +2.5MHz	1918.69 3843.68 5763.52	-80.09 -55.33 -63.06	22.00 6.42 5.60	-58.09 -48.91 -57.46	-39.5 -39.5 -39.5
Limits	Offset				
	Bandedge - \pm 1.25MHz			-9.5 dBm	
	\pm 1.25MHz - \pm 2.5MHz			-29.5 dBm	
	> \pm 2.5MHz			-39.5 dBm	

Notes:

- 1 Results quoted are extrapolated as indicated
- 2 Emissions were searched to: (x) 1000MHz inclusive, as per Part 15.33a
- 3 Receiver detector <1GHz = Peak hold, 100kHz bandwidth reduced to 10kHz for critical frequencies as per ANSI C63.17, 6.1.6.1.2
- 4 Receiver detector >1GHz = Peak Hold, 1MHz bandwidth reduced to 10kHz for critical frequencies as per ANSI C63.17, 6.1.6.1.2
- 5 New batteries used for battery powered products.
- 6 See Annex I for conducted upper band edge compliance plot
- 7 Emissions not within 20dB of the limit are not necessarily recorded.
- 8 Attenuator for emissions below 3GHz. Filter for emissions above 3GHz
- 9 See Annex for bandedge compliance plots

Test Method:

- 1 As per Radio – Noise Emissions, ANSI C63.4: 2003

EMISSIONS INSIDE AND OUTSIDE THE SUB-BAND – CONDUCTED – PART 15.323 (d)

These measurements are carried out in accordance with ANSI C63.17 sub-clause 6.1.6.3 with the unit set to a channel near the upper sub-band edge on connection 8.

EUT set to channel nearest upper bandedge. Connection 8.	FREQ. (MHz)	MEASURED LEVEL (dBm)	ATTENUATOR/FILTER & CABLE LOSS (dB)	EMISSION (dBm)	LIMIT (dBm)
< -2.5MHz				note 7	
-2.5MHz - -1.25MHz				note 7	
-1.25MHz - Bandedge				note 7	
Bandedge - +1.25MHz				note 7	
+1.25MHz - +2.5MHz				note 7	
> +2.5MHz	1931.31 3857.51 5784.12	-79.68 -59.42 -75.17	22.00 6.42 5.60	-57.68 -53.00 -69.57	-39.5 -39.5 -39.5
Limits	Offset				
	Bandedge - ±1.25MHz			-9.5 dBm	
	±1.25MHz - ±2.5MHz			-29.5 dBm	
	> ±2.5MHz			-39.5 dBm	

Notes:

- 1 Results quoted are extrapolated as indicated
- 2 Emissions were searched to: (x) 1000MHz inclusive, as per Part 15.33a
- 3 Receiver detector <1GHz = Peak hold, 100kHz bandwidth reduced to 10kHz for critical frequencies as per ANSI C63.17, 6.1.6.1.2
- 4 Receiver detector >1GHz = Peak Hold, 1MHz bandwidth reduced to 10kHz for critical frequencies as per ANSI C63.17, 6.1.6.1.2
- 5 New batteries used for battery powered products.
- 6 See Annex I for conducted upper band edge compliance plot
- 7 Emissions not within 20dB of the limit are not necessarily recorded.
- 8 Attenuator for emissions below 3GHz. Filter for emissions above 3GHz
- 9 See Annex for bandedge compliance plots

Test Method:

- 1 As per Radio – Noise Emissions, ANSI C63.4: 2003

Test Equipment used for PART 15.323 (d) tests

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
AE, LOOP, Z2, 9kHz - 30MHz	ROHDE & SCHWARZ	HFH2	881058 - 53	07	
HORN ANTENNA	EMCO	3115	9010-3580	138	
HORN ANTENNA	EMCO	3115	9010-3581	139	X
SPECTRUM ANALYSER	TEKTRONIX	2756P	B010109	164	
BICONIC ANTENNA	CHASE	BBA9106	N/A	193	
ANTENNA, LOG PERIODIC 300MHz – 1GHz	CHASE	UPA6108	1061	203	
RECEIVER	ROHDE & SCHWARZ	ESHS20	837960/003	237	
ANTENNA, BICONIC 20MHz - 300MHz	CHASE	VBA6106A	1193	251	
BILOG ANTENNA	CHASE	CBL6112	2098	274	
RECEIVER	ROHDE & SCHWARZ	ESVS10	837948/003	317	
RECEIVER	ROHDE & SCHWARZ	ESVS10	844594/003	352	
RECEIVER	ROHDE & SCHWARZ	ESHS10	844077/019	353	
V / UHF RECEIVER 20MHz - 1GHz	ROHDE & SCHWARZ	ESVS 20	838804 / 005	415	
BILOG ANTENNA	SCHAFFNER	CBL6112B	2761	431	
RECEIVER	ROHDE & SCHWARZ	ESHS 10	830051/001	UH03	
RECEIVER	ROHDE & SCHWARZ	ESVS 10	825892/003	UH04	X
RANGE 1	TRL	3 METRE	N/A	UH06	X
AE, LOOP, Z2, 9kHz - 30MHz	ROHDE & SCHWARZ	HFH2	881058 - 53	07	
BILOG ANTENNA	CHASE	CBL6112	2129	UH93	X
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	X

FRAME PERIOD 15.323 (e)

Frame repetition stability is tested according with ANSI C63.17 sub-clause 6.2.3. Frame period and jitter are tested in accordance with ANSI C63.17 sub-clause 6.2.4. The test setup below is used for the above measurements.



TEST SETUP 3:

Frame Repetition Stability

This is the mean value of the frame repetition rate recorded over 1000 samples. For devices that divide access in time the repetition rate shall not exceed 10ppm.

Result

Frame Repetition Stability (ppm)	Limit (ppm)	Pass/Fail
-7.66	±10	Pass

Frame Period and Jitter

Jitter is the difference in time between the rising edges of consecutive pulses.

Result

Maximum Jitter (μs)	3xSD Jitter (μs)	Frame period (ms)	Limit (μs)	
			Frame Period (ms)	Jitter (μs)
0.08	0.24	10.000024	2 or 10/X	±25

FREQUENCY STABILITY – PART 15.323 (e)

The frequency stability tests are carried out according with ANSI C63.17 sub-clause 6.2.2 using test setup 1(page 9).

The portable part is a battery powered device so voltage stability is not applicable.
This testing is carried out with the following conditions over 5000 samples.

Results

Temperature (°C)	Voltage (Vdc)	Fc (MHz)	offset (kHz)	offset (ppm)	Limit (ppm)
20	Vnom	1924.992	0	N/A	N/A
20	20.4	1924.993	+1	+0.5	±10
20	27.6	1924.992	0	0	±10
-20	Vnom	1924.985	-7	-3.6	±10
+50	Vnom	1925.001	+9	+4.6	±10

Temperature (°C)	Voltage (Vac)	Fc (MHz)	offset (kHz)	offset (ppm)	Limit (ppm)
20	Vnom	1924.992	0	N/A	N/A
20	93.5	1924.987	-5	-2.6	±10
20	126.5	1924.990	-2	-1.0	±10
-20	Vnom	1924.983	-9	-4.6	±10
+50	Vnom	1924.997	+5	+2.6	±10

ANNEX A
PHOTOGRAPHS

PHOTOGRAPH No. 1

TEST SETUP



PHOTOGRAPH No. 2

TRANSMITTER FRONT VIEW



PHOTOGRAPH No. 3

TRANSMITTER REAR VIEW



PHOTOGRAPH No. 4

TRANSMITTER COVER REMOVED



PHOTOGRAPH No. 5 **MAIN PCB COMPONENT & RF MODULE SIDE**



PHOTOGRAPH No. 6

MAIN PCB TRACK SIDE




PHOTOGRAPH No. 7 **MAIN PCB COMPONENT SIDE RF MODULE REMOVED**




PHOTOGRAPH No. 8

RF MODULE TRACK SIDE

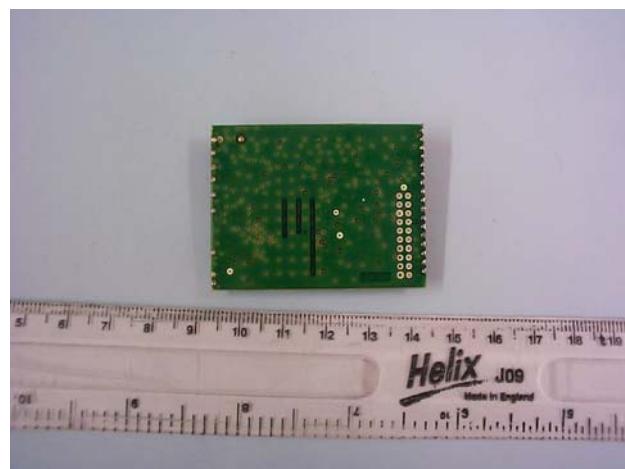

PHOTOGRAPH No. 9

RF MODULE COMPONENT SIDE

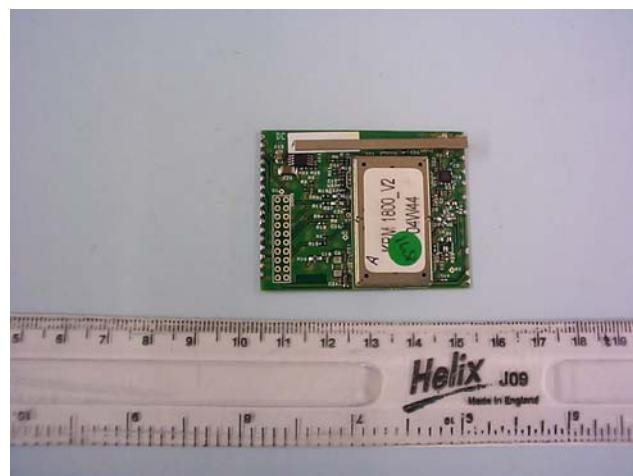

PHOTOGRAPH No. 10 **RF MODULE COMPONENT SIDE CAN REMOVED**



PHOTOGRAPH No. 11

BASE UNIT OVERVIEW



PHOTOGRAPH No. 12

BASE UNIT TOP REMOVED



ANNEX B
APPLICANT'S SUBMISSION OF DOCUMENTATION LIST

APPLICANT'S SUBMISSION OF DOCUMENTATION LIST

a.	TCB	-	APPLICATION	[X]
		-	FEE	[X]
b.	AGENT'S LETTER OF AUTHORISATION	-		[X]
c.	MODEL(s) vs IDENTITY	-		[]
d.	ALTERNATIVE TRADE NAME DECLARATION(s)	-		[]
e.	LABELLING	-	PHOTOGRAPHS	[]
		-	DECLARATION	[]
		-	DRAWINGS	[X]
f.	TECHNICAL DESCRIPTION	-		[X]
g.	BLOCK DIAGRAMS	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
h.	CIRCUIT DIAGRAMS	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
i.	COMPONENT LOCATION	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
j.	PCB TRACK LAYOUT	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
k.	BILL OF MATERIALS	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
l.	USER INSTALLATION / OPERATING INSTRUCTIONS	-		[X]

ANNEX C
AC POWERLINE CONDUCTION

Powerline Conduction


08 Aug 2005 14:40

150kHz - 30MHz

EUT: CellCom Active Antenna
 Manuf: Vitec
 Op Cond: LISN UH195, cable UH21 & Receiver UH03
 Operator: D Winstanley
 Test Spec: EN55022 Class B (or Variant)
 Comment: Unit On Top Channel only. Comms with Beltpack. Active Antenna Powered Liss
 110 Vac line Line

NEUTRAL

Scan Settings		(1 Range)				Receiver Settings				
		Frequencies		IF BW	Detector	M-Time	Atten	Preamp	OpRge	
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge		
150kHz	30MHz	5kHz	10kHz	PK+AV	50msec	Auto	OFF	60dB		
Transducer	No.	Start	Stop	Name						
	1	150kHz	30MHz	UH21						
Final Measurement:		Detectors:	X GP / + AV							
		Meas Time:	2sec							
		Subranges:	25							
		Acc Margin:	20 dB							

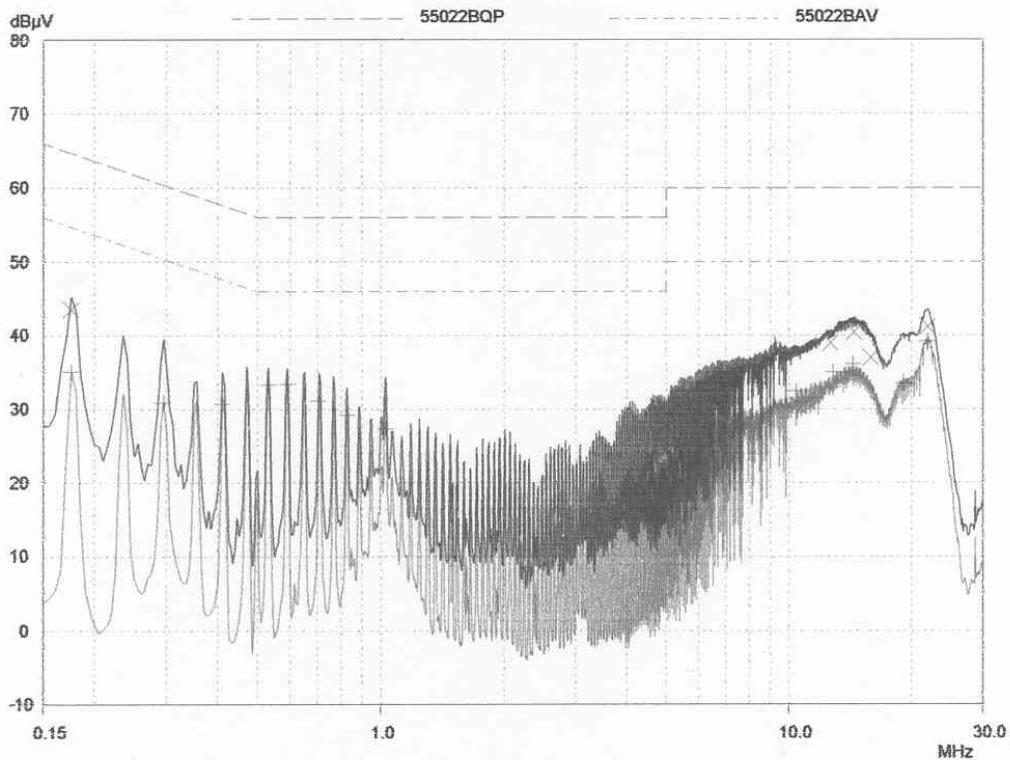

PAGE 1

Active Antenna powered by RJ45 Cable from Base unit 110Vac not connected


Powerline Conduction

08 Aug 2005 11:01

150kHz - 30MHz

EUT: CellCom Base
 Manuf: Vitec
 Op Cond: LISN UH195, cable UH21 & Receiver UH03
 Operator: D Winstanley
 Test Spec: EN55022 Class B (or Variant)
 Comment: Unit On Top Channel only. Comms with Beltpack. Active Antenna Powered Via RJ45 Lead
 110 Vac Live Line

Scan Settings		(1 Range)				Receiver Settings				
		Frequencies		Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
Transducer	No.	Start	Stop	5kHz	10kHz	PK+AV	50msec	Auto	OFF	60dB
	1	150kHz	30MHz							
Final Measurement:		Detectors:		X QP / + AV						
		Meas Time:		2sec						
		Subranges:		25						
		Acc Margin:		20 dB						

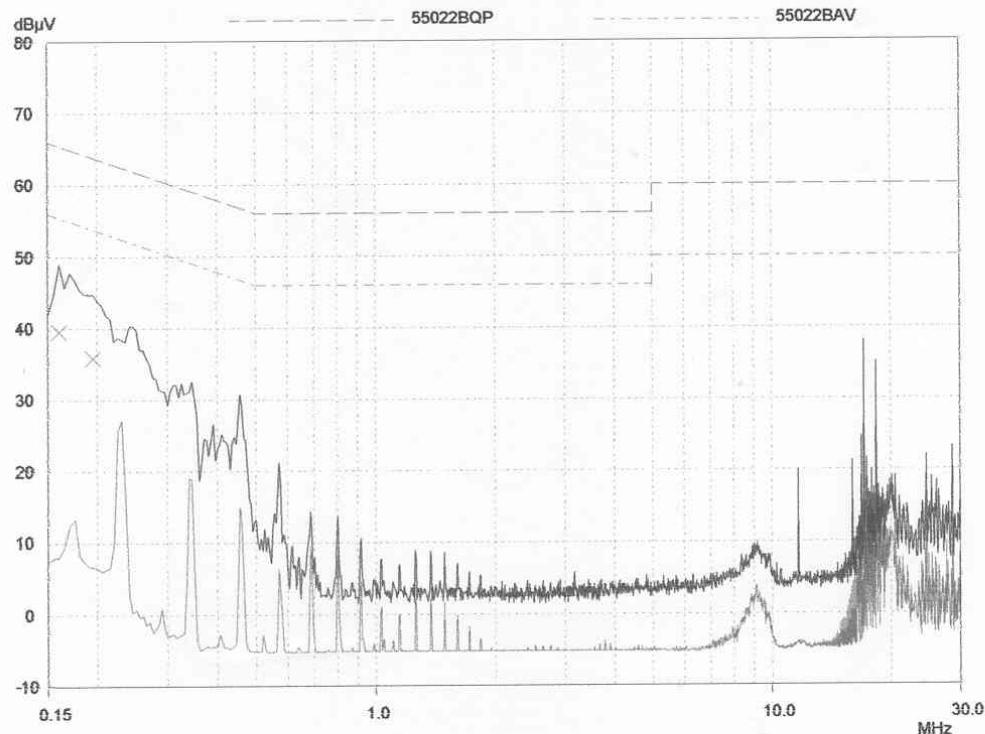


PAGE 1

Active Antenna Powered by 110Vac from LISN RJ45 power removed.


ANNEX D
EMISSION BANDWIDTH

EMISSION BANDWIDTH

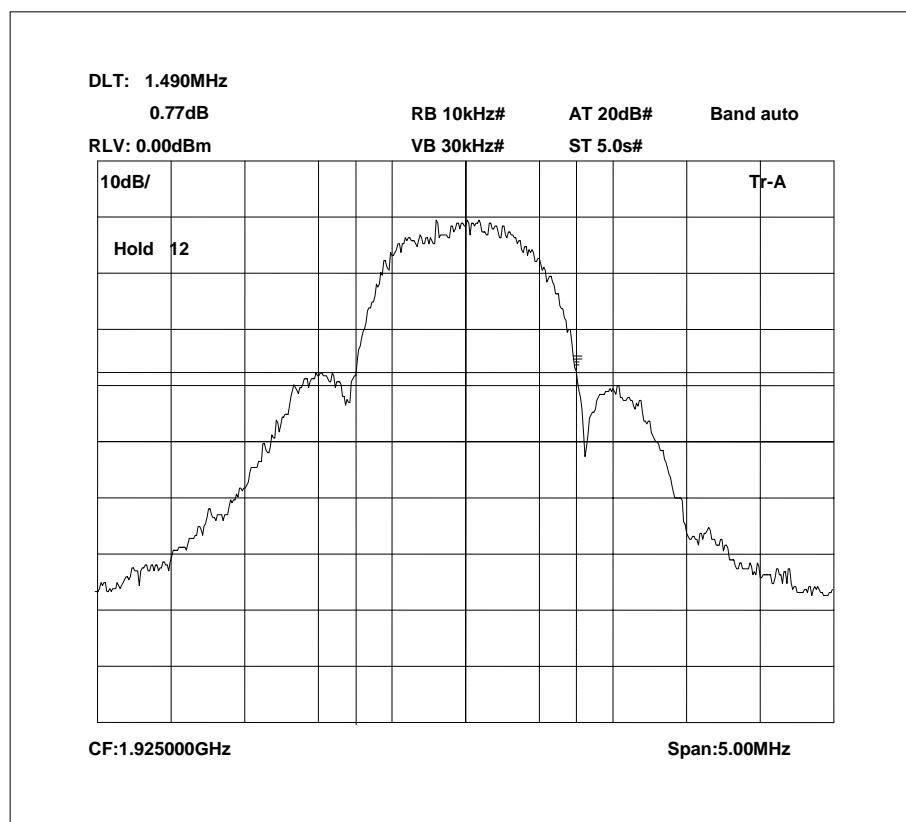


ANNEX E
PEAK TRANSMIT POWER

PEAK TRANSMIT POWER

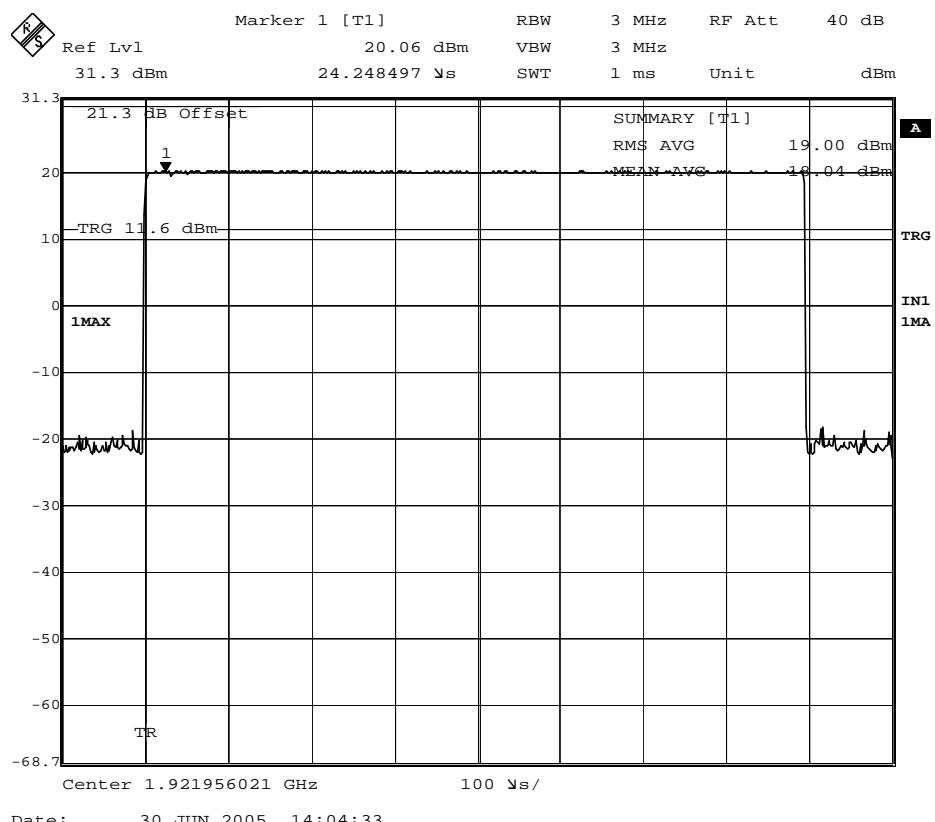


ANNEX F
POWER SPECTRAL DENSITY


POWER SPECTRAL DENSITY

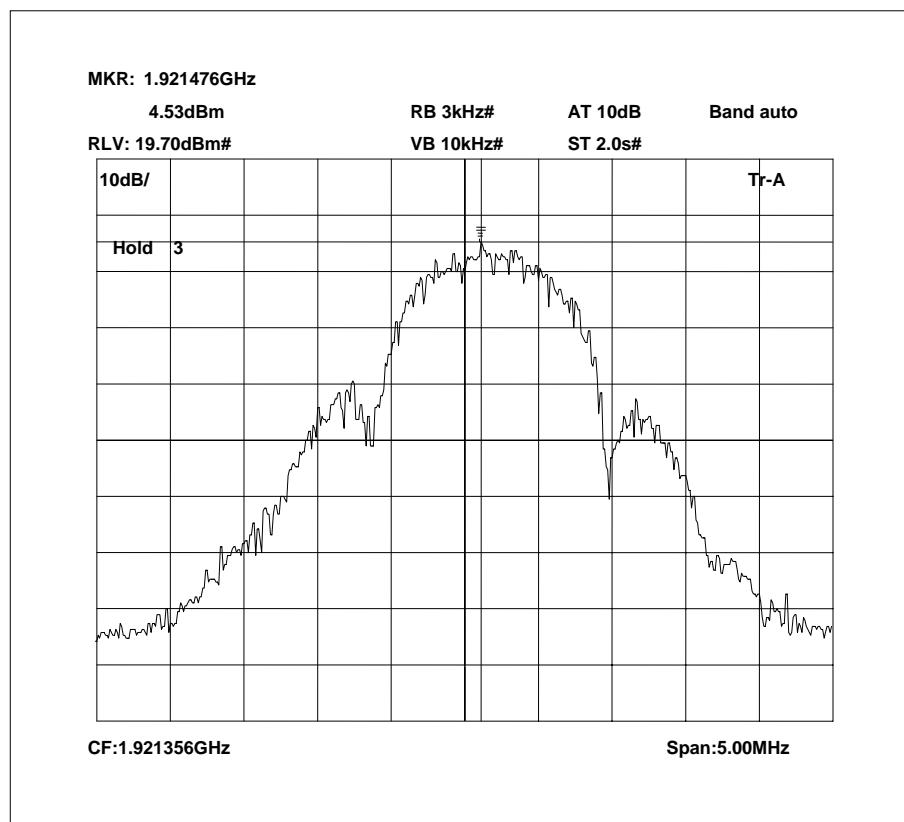

ANNEX G
RANDOM WAITING INTERVAL

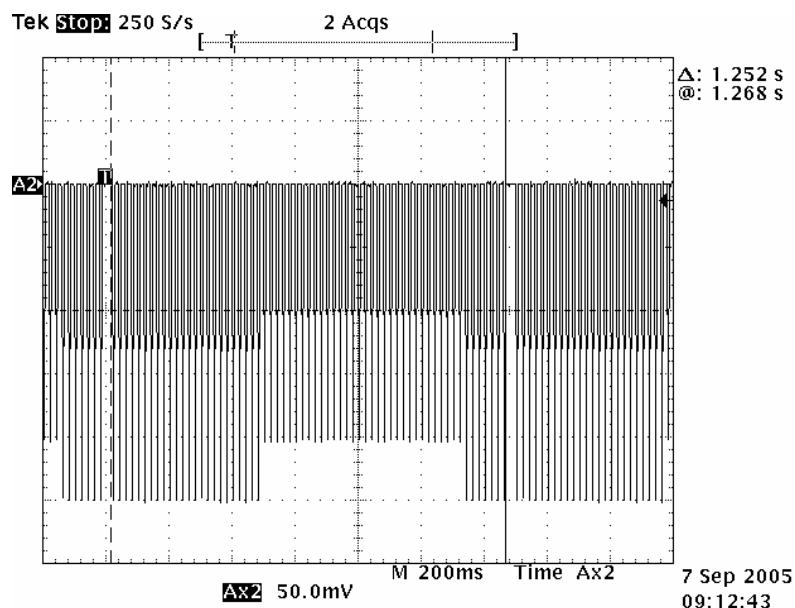

Length of Repetitive Transmission

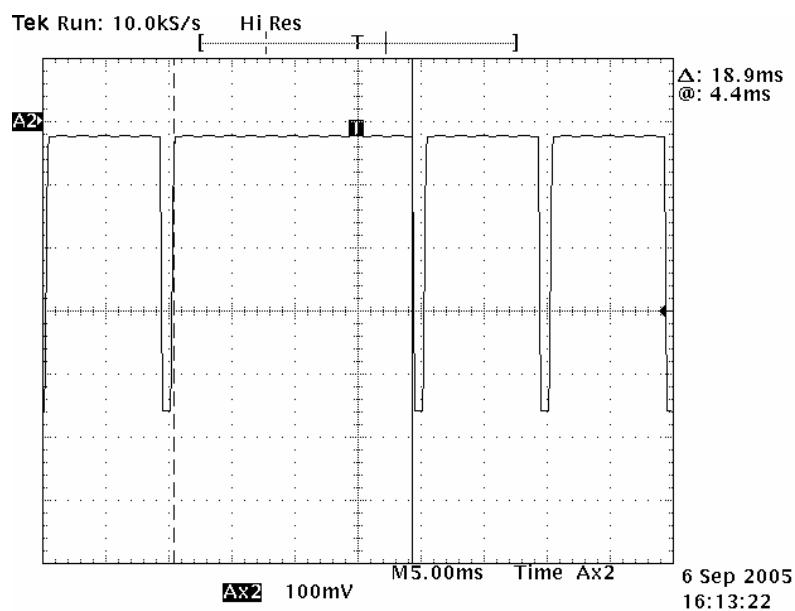

Time between Repetitive Transmissions

ANNEX H


EMISSIONS INSIDE AND OUTSIDE THE SUB-BAND – RADIATED

TRL Compliance Services Ltd
E-Field Radiation (30MHz-1GHz)

19 Sep 2005 15:53


EUT: Base Unit
Manuf: Vitec
Op Cond: Prescan 30MHz - 1000MHz
Operator: D Winstanley
Test Spec: Part15
Comment: Unit on. Control and Signalling Info. Ports Populated. Active Antenna outside room
RX Antenna Vertical

Scan Settings		(1 Range)			Receiver Settings					
		Frequencies			IF BW	Detector	M-Time	Atten	Preamp	OpRge
Start	Stop	Step		120kHz	PK	1msec	Auto	ON	60dB	
Start 30MHz	Stop 1000MHz	Step 50kHz								
Transducer 1	No. 21	Start 30MHz	Stop 1000MHz		Name UH72					
	22	30MHz	1000MHz		UH93					
Final Measurement:		Detector:	X QP							
		Meas Time:	2sec							
		Subranges:	50							
		Acc Margin:	10 dB							

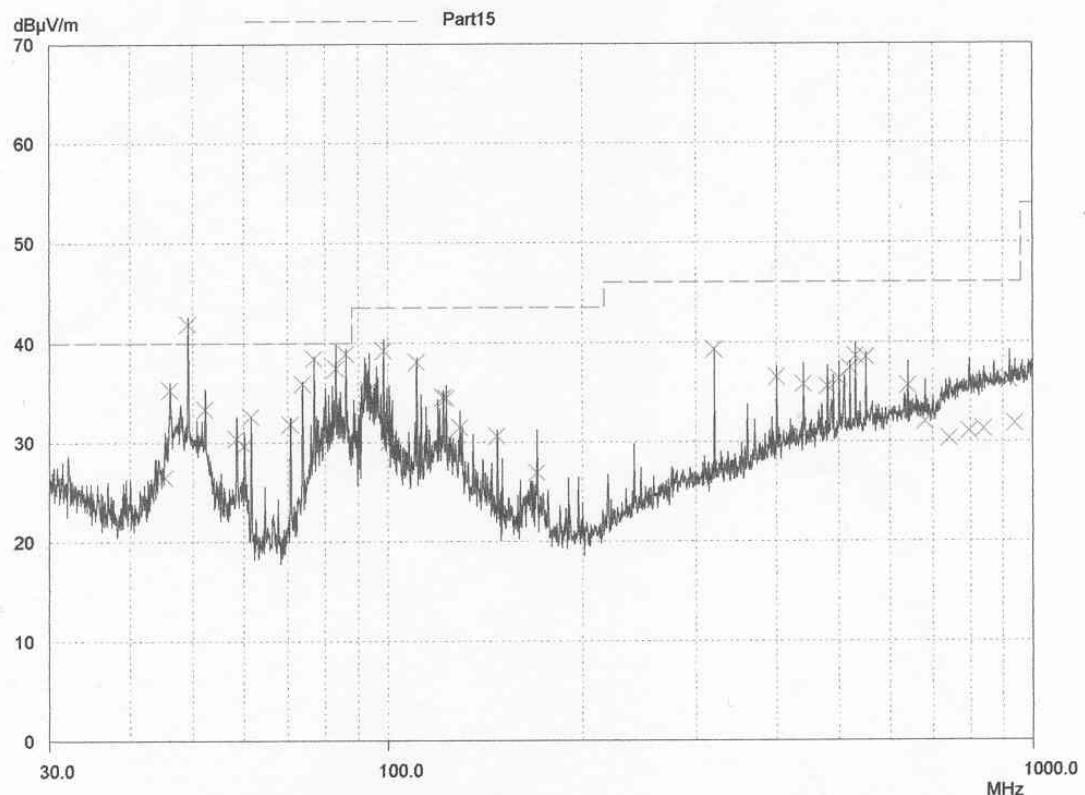


ANNEX I
BANDEDGE COMPLIANCE - CONDUCTED

LOWER BANDEdge COMPLIANCE

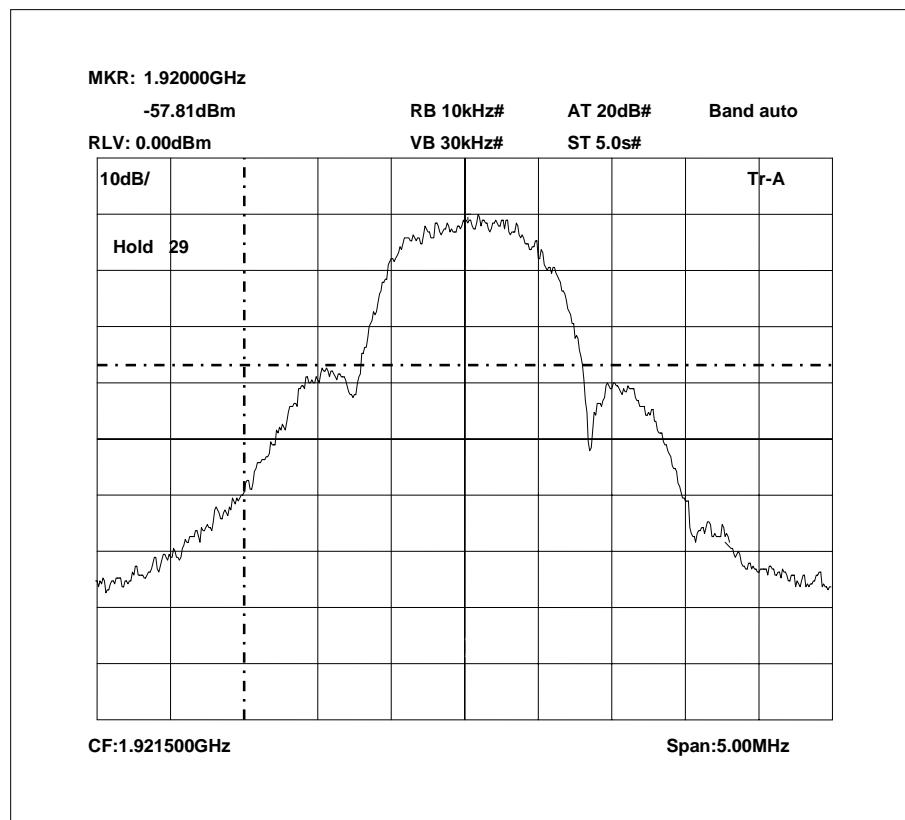


UPPER BANDEDGE COMPLIANCE

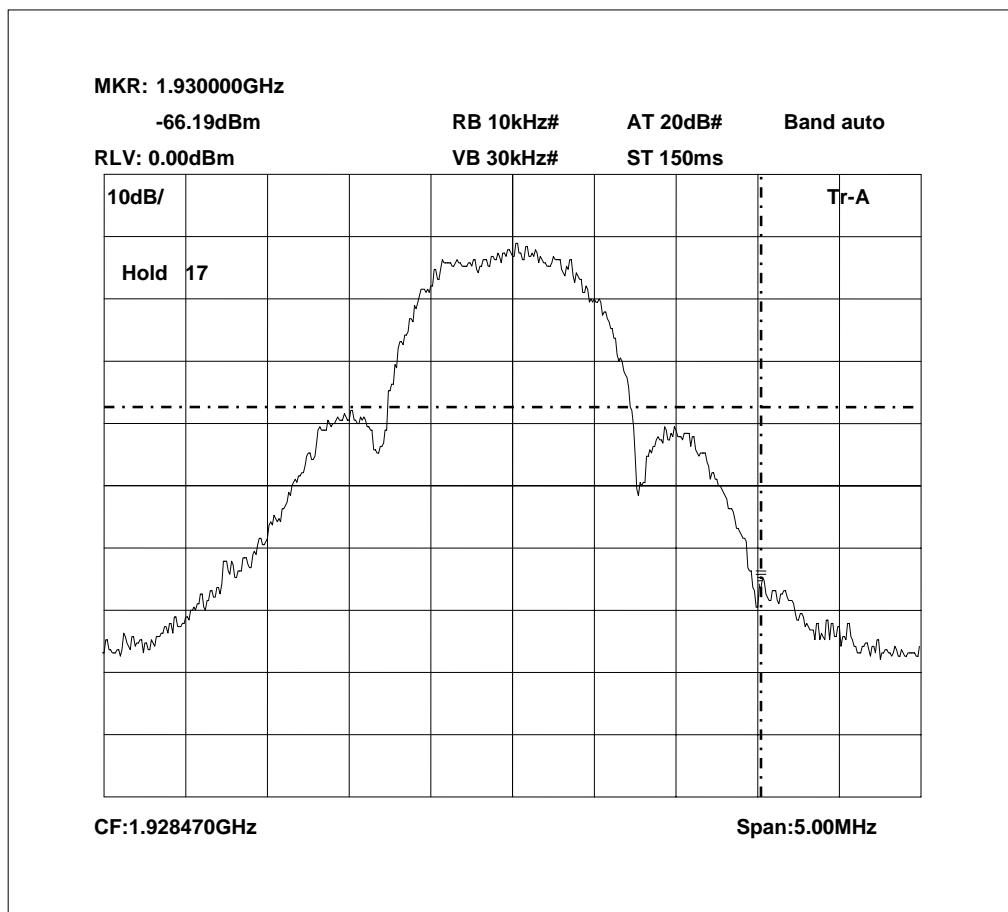

ANNEX J
FRAME PERIOD

FRAME PERIOD

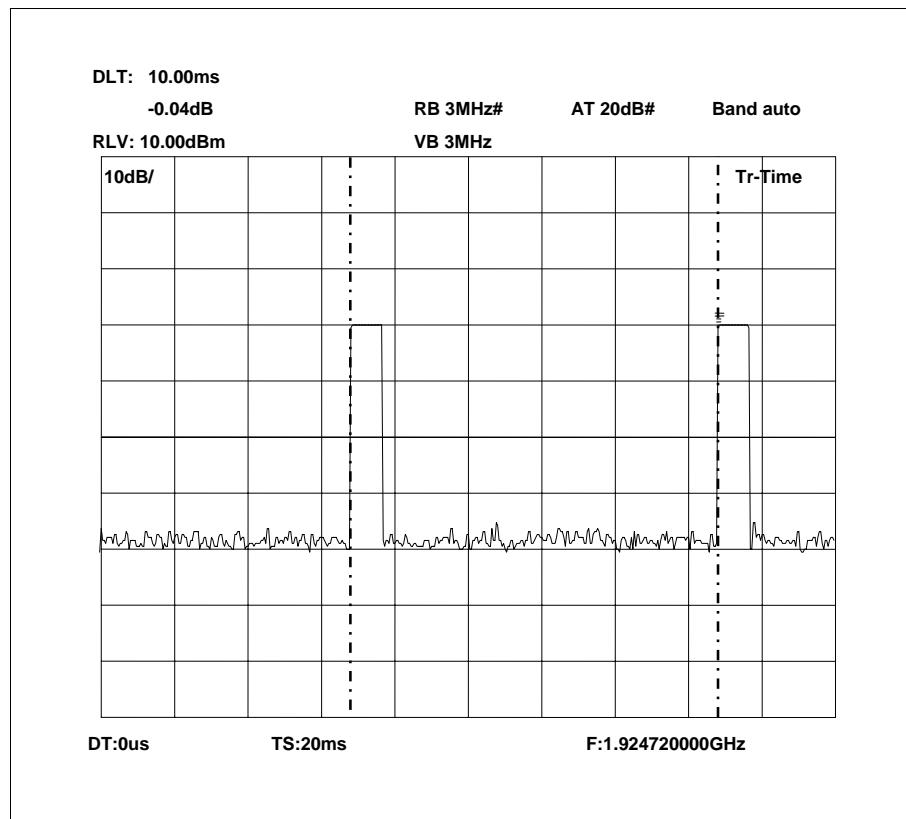

ANNEX K
EQUIPMENT CALIBRATION

3m Range ERP						
UH006	CAL	TRL	01/03/2005	12	01/03/2006	
UH028	Log Periodic Ant	Schwarbeck	28/04/2005	24	28/04/2007	
UH029	Bicone Antenna	Schwarbeck	27/04/2005	24	27/04/2007	
UH041	Multimeter	AVOMeter	14/12/2004	12	14/12/2005	
UH120	Spectrum Analyser	Marconi	15/03/2005	12	15/03/2006	
UH122	Oscilloscope	Tektronix	07/06/2005	24	07/06/2007	
UH162	ERP Cable Cal	TRL	23/05/2005	12	23/05/2006	
UH179	Power Sensor	Marconi	14/12/2004	12	14/12/2005	
UH228	Power Sensor	Marconi	17/01/2005	12	17/01/2006	
UH253	1m Cable N type	TRL	10/01/2005	12	10/01/2006	
UH254	1m Cable N type	TRL	10/01/2005	12	10/01/2006	
UH265	Notch filer	Telonic	24/06/2005	12	24/06/2006	
L005	CMTA	R&S	22/10/2004	12	22/10/2005	
L007	Loop Antenna	R&S	29/03/2005	24	29/03/2007	
L138	1-18GHz Horn	EMCO	15/04/2005	24	15/04/2007	
L139	1-18GHz Horn	EMCO	03/05/2005	24	03/05/2007	
L176	Signal Generator	Marconi	31/01/2005	12	31/01/2006	
L193	Bicone Antenna	Chase	12/10/2003	24	12/10/2005	
L203	Log Periodic Ant	Chase	21/10/2003	24	21/10/2005	
L254	Signal Generator	Marconi	13/12/2004	12	13/12/2005	
L280	18GHz Cable	Rosenberger	10/01/2005	12	10/01/2006	
L343	CCIR Noise Filter	TRL	07/06/2005	12	07/06/2006	
	Temperature					
L426	Indicator	Fluke	14/12/2004	12	14/12/2005	
L478	Signal Generator	R&S	19/05/2004	12	19/05/2005	
L479	Analysyer	Anritsu	05/10/2004	12	05/10/2005	
L552	Signal Generator	Agilent	25/04/2005	12	25/04/2006	