


AF-4000 Function Description

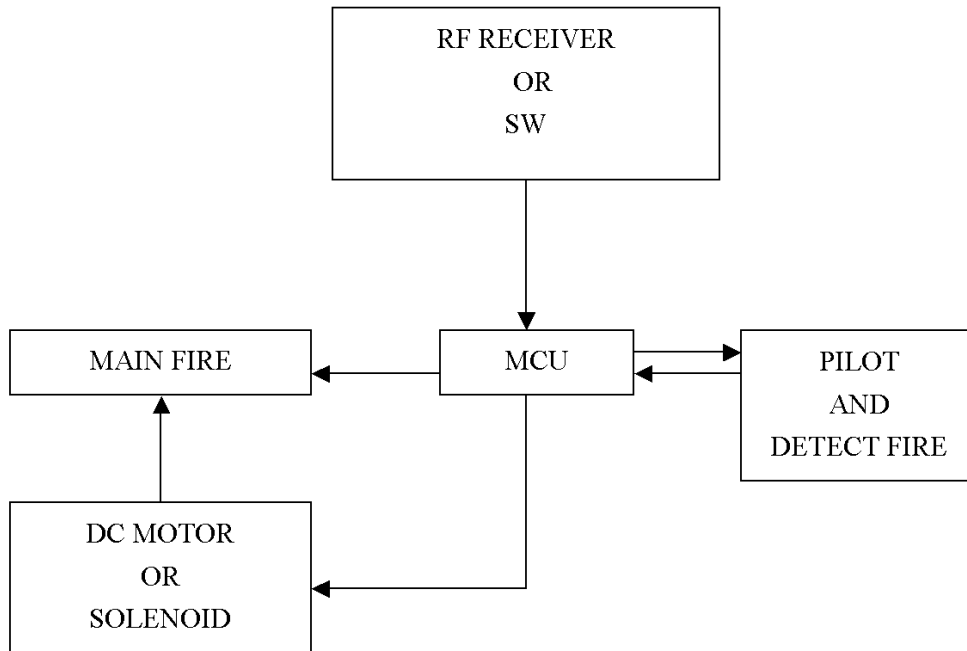

Description:

- When MCU get RF OR SW signal then start ignition.
- When ignition success PILOT&MAIN FIRE valve will on.
- When MCU get RF adjust flame command , MCU will control DC MOTOR rotate to control flame Hi or Lo.