

Maximum Permissible Exposure Report

FCC ID: S3Z-CIM35X2

Report No. : BTL-FCCP-2-2002T042
Equipment : CIMX1PRO V3 Module
Model Name : CIMX1PRO V3
Brand Name : CIMCON
Applicant : CIMCON Lighting, Inc.
Address : 200 Summit Drive, Suite 500, South Tower, Burlington, MA 01803
Manufacturer : CIMCON Lighting, Inc.
Address : 200 Summit Drive, Suite 500, South Tower, Burlington, MA 01803

Accordinging : FCC Guidelines for Human Exposure IEEE C95.1

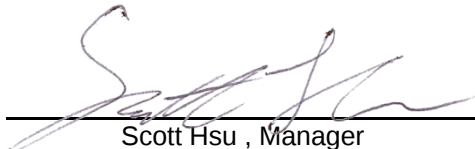
Date of Receipt : 2020/2/13
Date of Test : 2020/2/13 ~ 2020/4/27
Issued Date : 2020/7/23

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by


Peter Chen, Engineer

**Approved by**


Scott Hsu, Manager

BTL Inc.

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299

Fax: +886-2-2657-3331

Web: www.newbtl.com

MPE CALCULATION METHOD:

Calculation Method of RF Safety Distance:

$$S = \frac{PG}{4\pi r^2} = \frac{EIRP}{4\pi r^2}$$

where:

S = power density

P = power input to the antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

Table for Filed Antenna:

Group I:

Ant.	Brand	Model	Type	Connector	Gain (dBi)
1	N/A	iSLC3100-7P	Monopole	N/A	1.5

Group II:

Ant.	Brand	Model	Type	Connector	Gain (dBi)
1	N/A	A24-HASM-450	Dipole	SMA	2.14

TEST RESULTS

Antenna Group I:

Frequency (MHz)	Maximum Conducted Output Power (dBm)	Maximum Conducted Output Power (mW)	Antenna Gain (dBi)	Antenna Gain (numeric)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
2405~2475	23.49	223.3572	1.5	1.4125	0.0628	1

Antenna Group II:

Frequency (MHz)	Maximum Conducted Output Power (dBm)	Maximum Conducted Output Power (mW)	Antenna Gain (dBi)	Antenna Gain (numeric)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
2405~2475	23.31	214.2891	2.14	1.6368	0.0698	1

NOTE: The calculated distance is 20 cm.

End of Test Report