

Appendix B

Peak Output Power




Marker 1 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl 2.65 dBm VBW 1 MHz
20 dBm 2.40214729 GHz SWT 5 ms Unit dBm



Title: Peak Output Power conducted Ch.: 0
Comment A: FLA-01
Date: 14.APR.2005 09:24:59




Marker 1 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl 2.40 dBm VBW 1 MHz
20 dBm 2.44106313 GHz SWT 5 ms Unit dBm

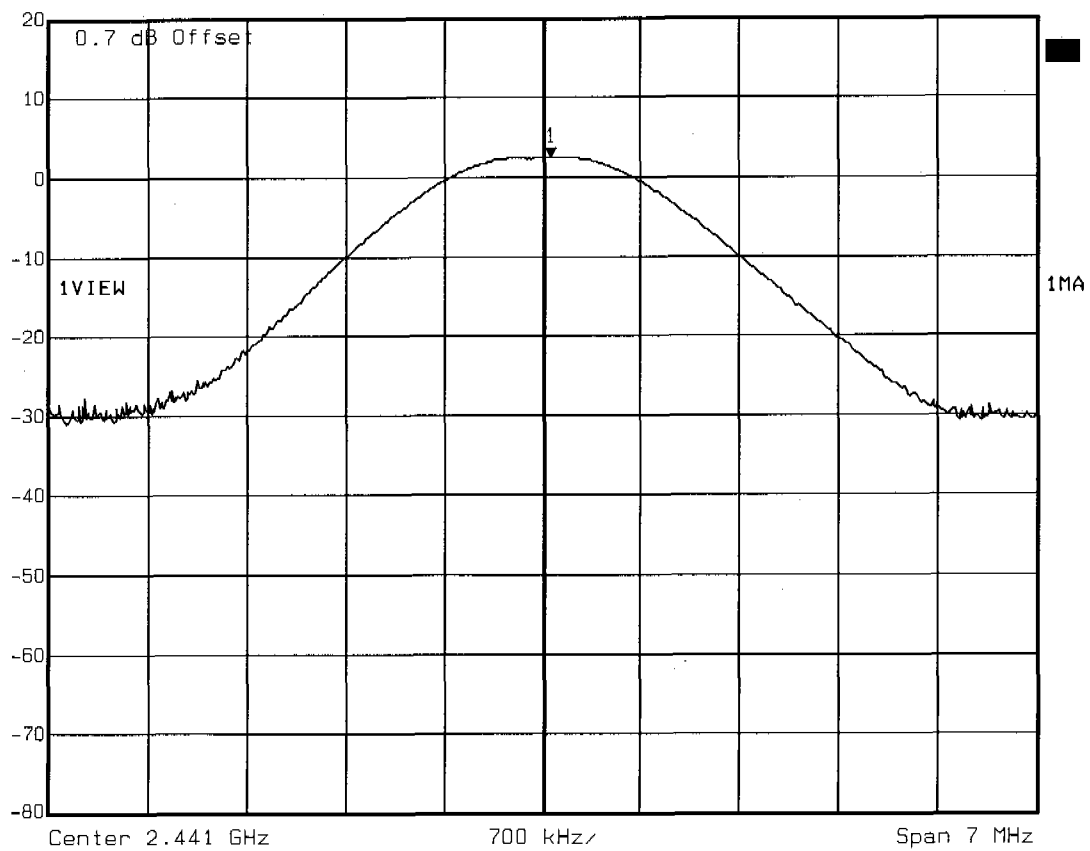

Title: Peak Output Power conducted Ch.: 39
Comment A: FLA-01
Date: 14.APR.2005 09:24:17



Marker 1: [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl 1.77 dBm VBW 1 MHz
20 dBm 2.48009118 GHz SWT 5 ms Unit dBm

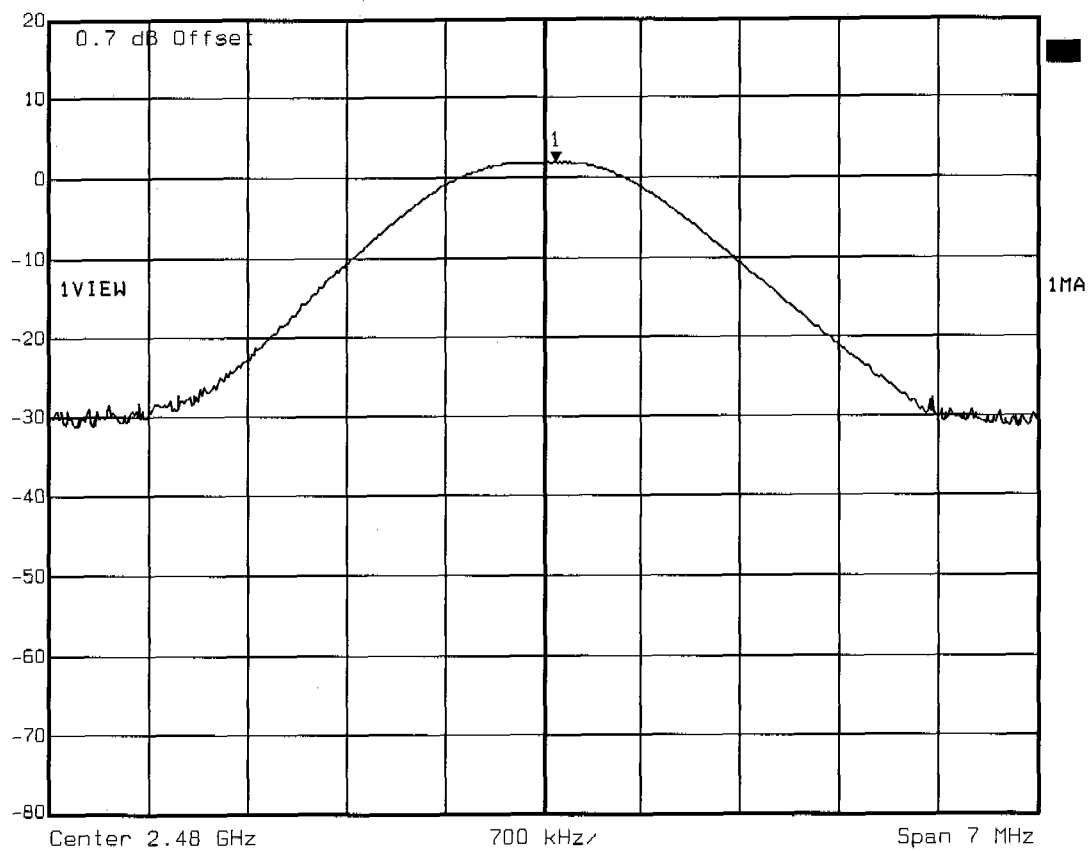


Title: Peak Output Power conducted Ch.: 78
Comment A: FLA-01
Date: 14.APR.2005 09:25:48

Carrier power (dBm)

FCC RULES PART 15, SUBPART C

Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: 2.22dBm, RBW: 5MHz

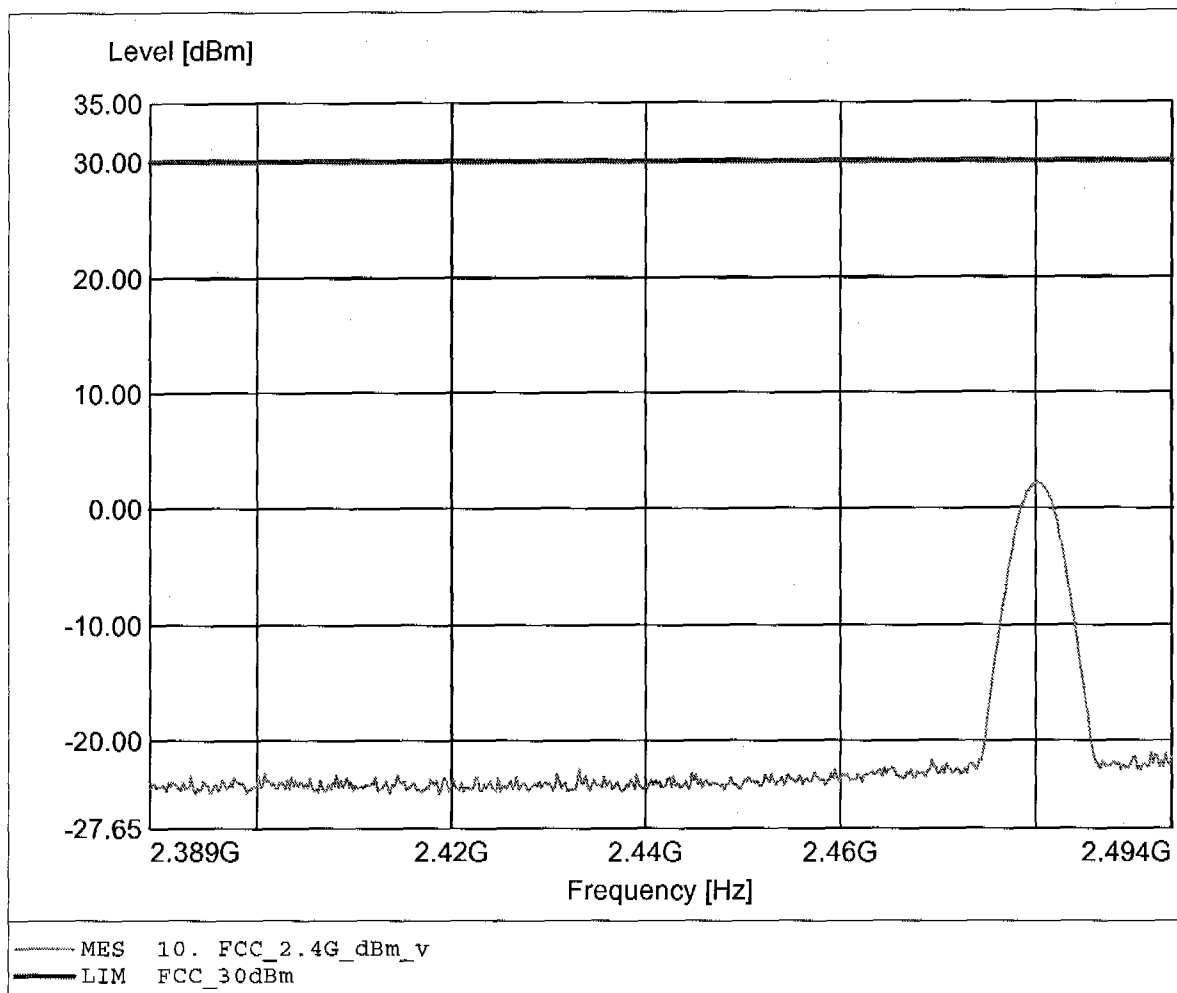


Appendix C

Spurious Emissions radiated - Transmitter operating

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Emax: 94.88dBµV/m, RBW: 100kHz

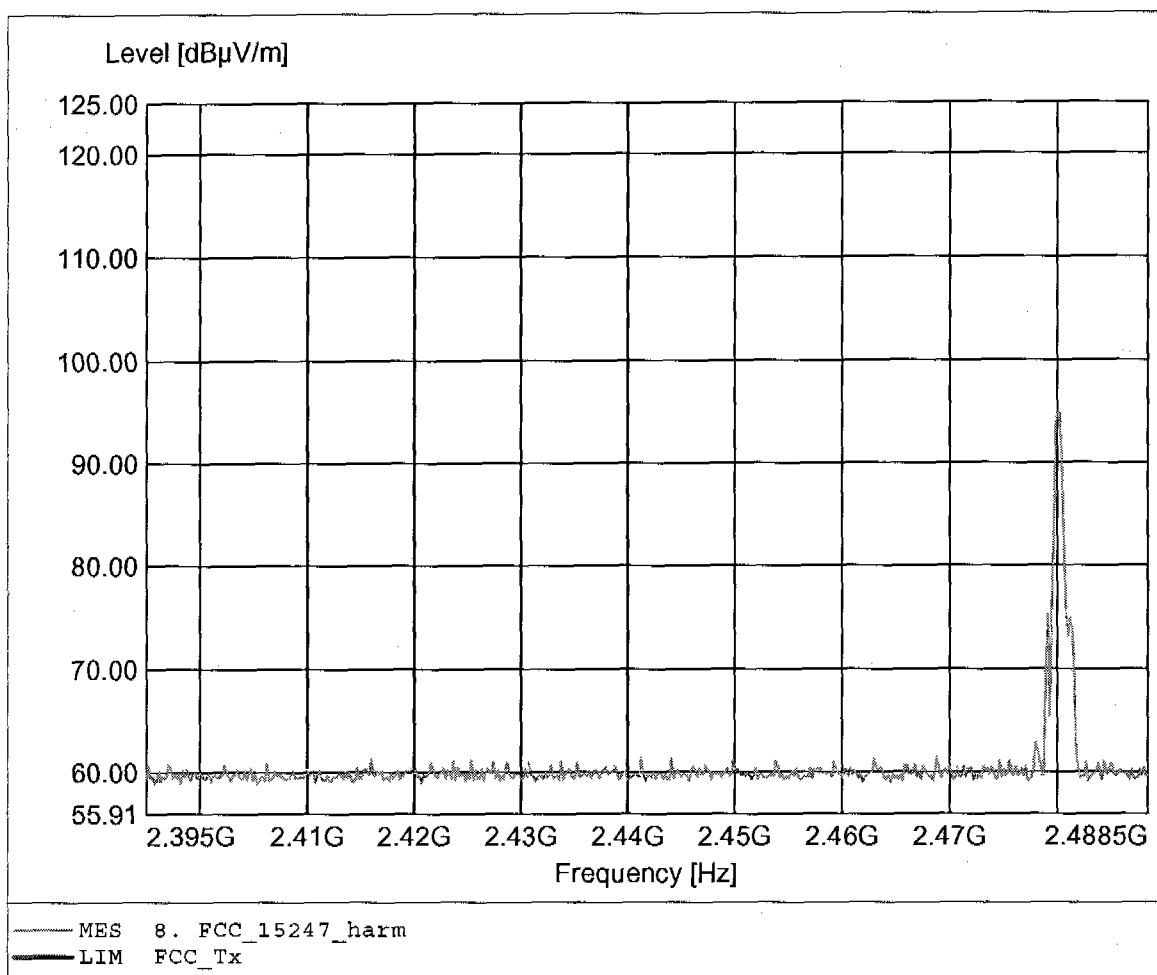

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 189.439MHz, Emax: 32.58dBuV/m, RBW: 100kHz

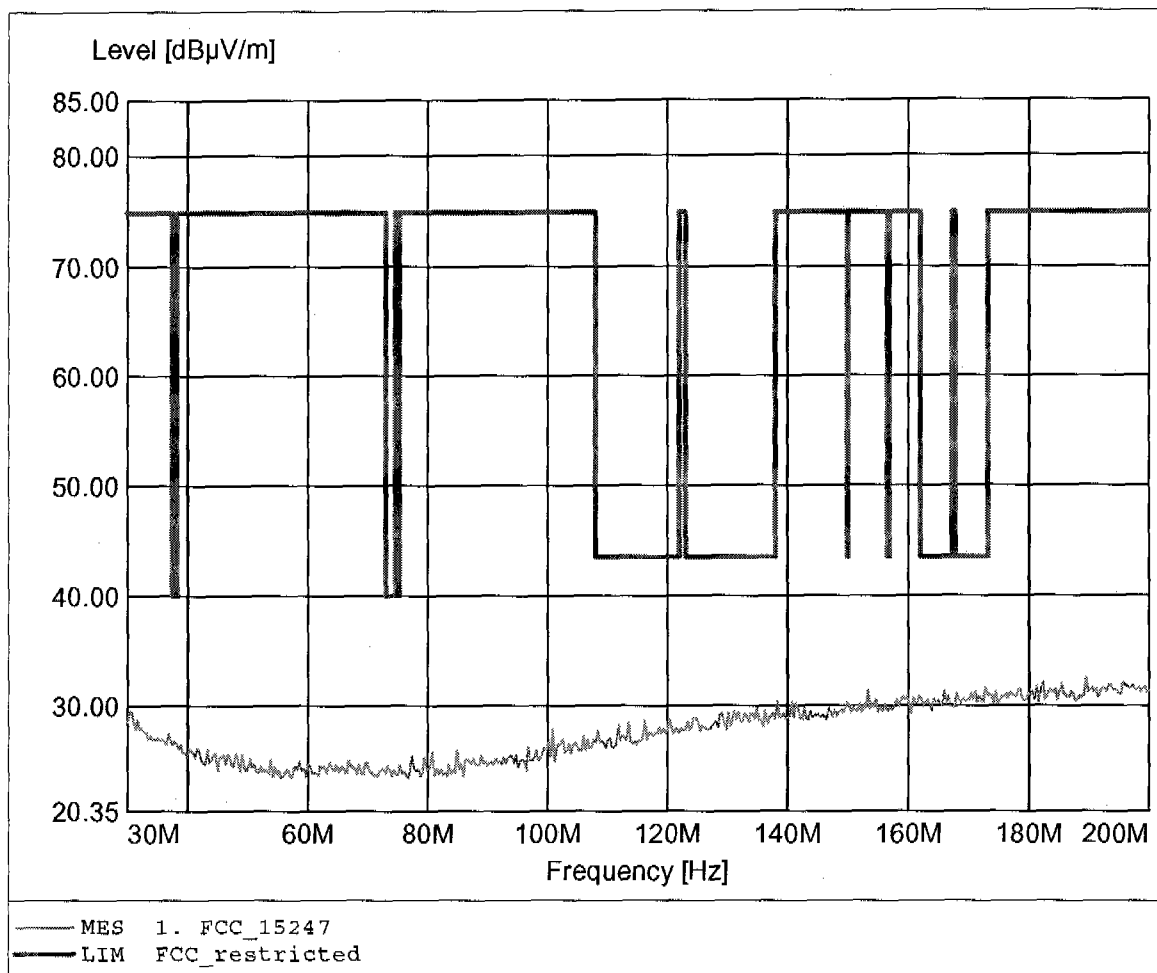

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 197.275MHz, Emax: 32.37dBµV/m, RBW: 100kHz

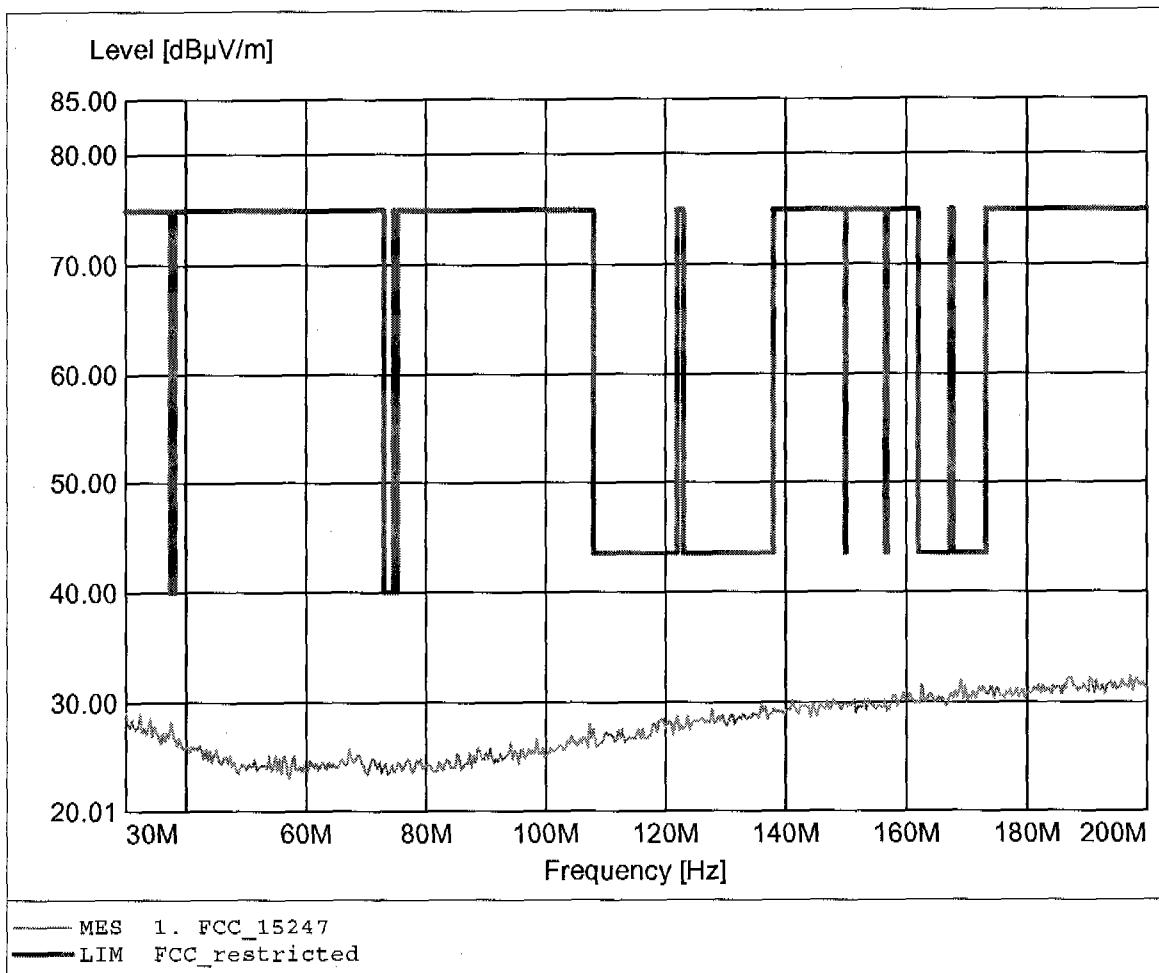

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 993.587MHz, Emax: 22.95dBµV/m, RBW: 100kHz

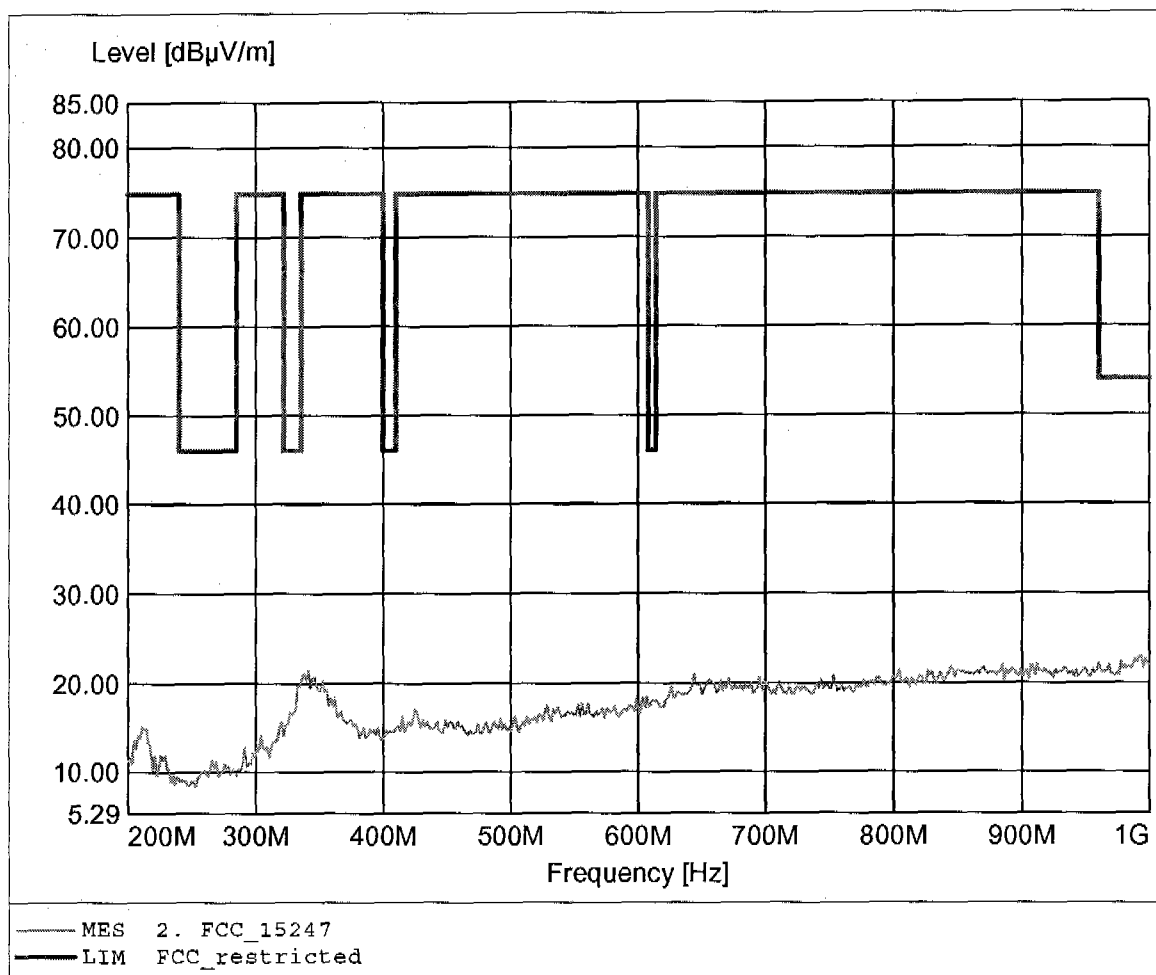

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 344.289MHz, Emax: 27.20dBµV/m, RBW: 100kHz

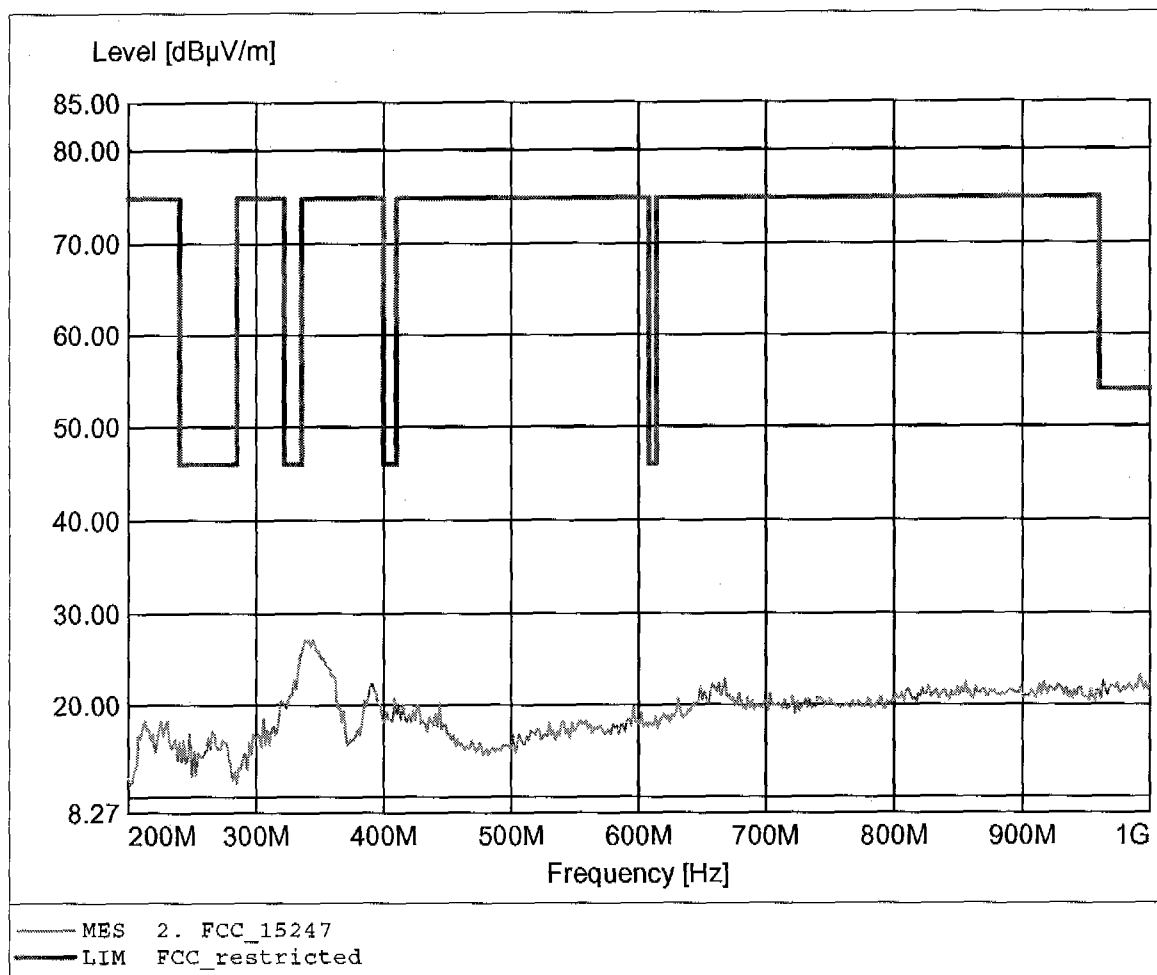

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.397GHz, Emax: 48.04dBuV/m, RBW: 1MHz

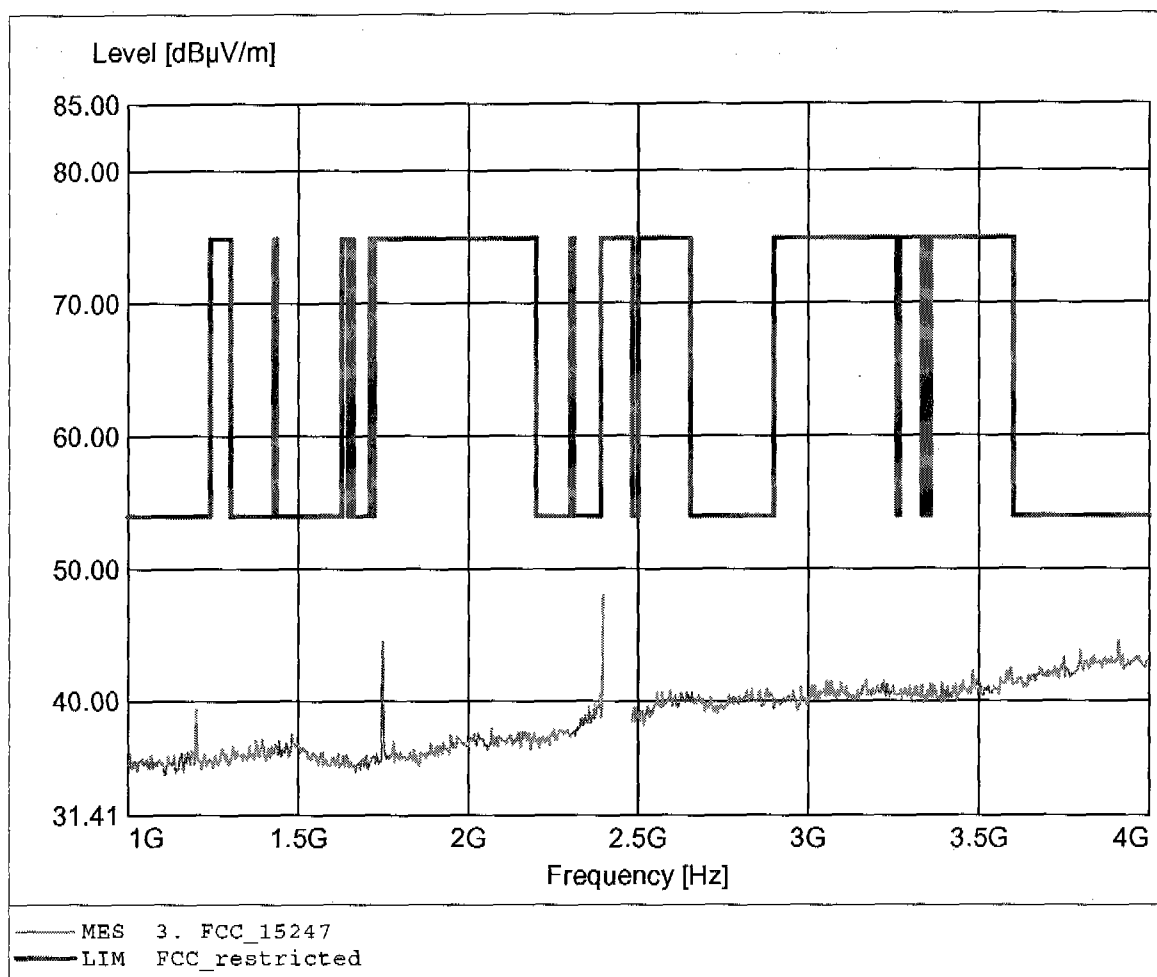

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.749GHz, Emax: 44.26dBuV/m, RBW: 1MHz

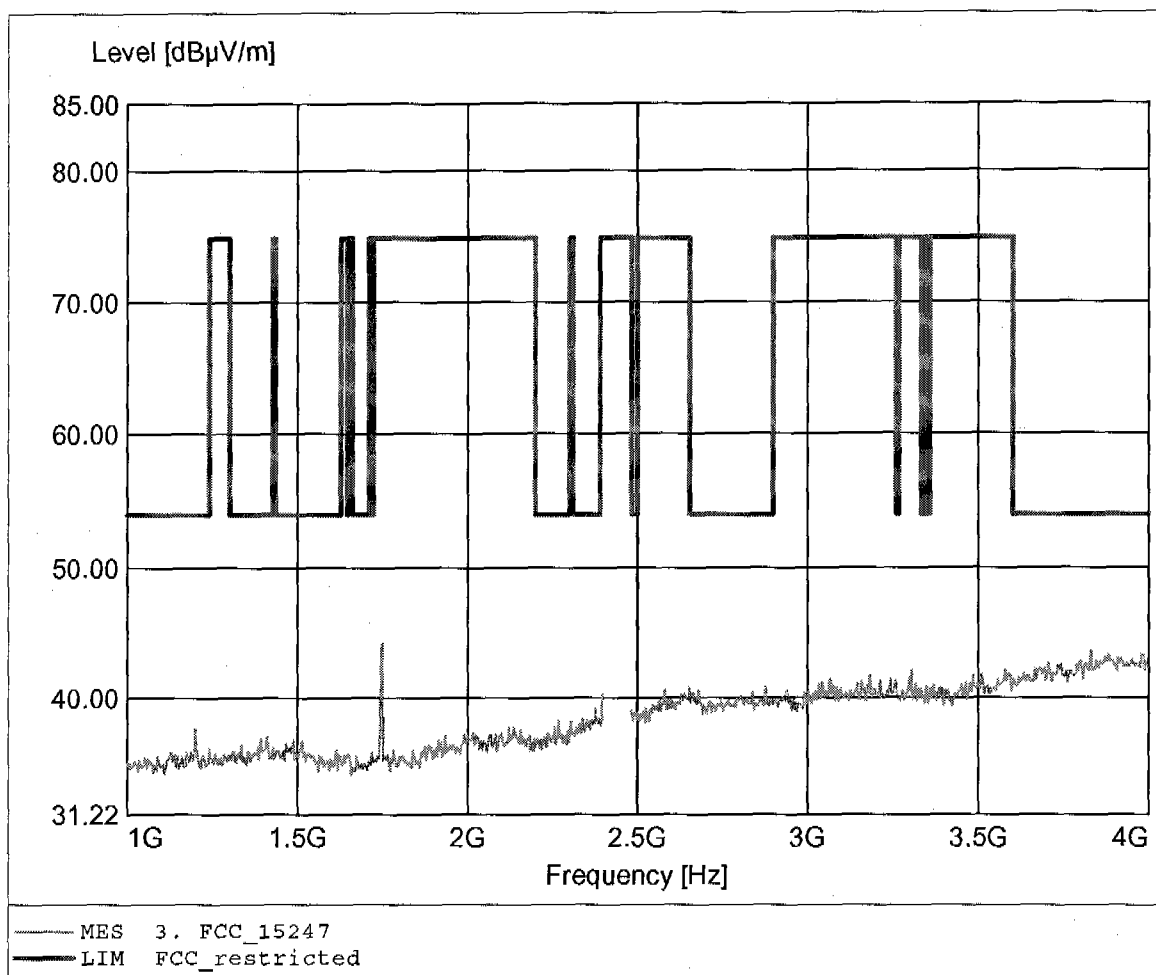

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 51.26dBuV/m, RBW: 1MHz

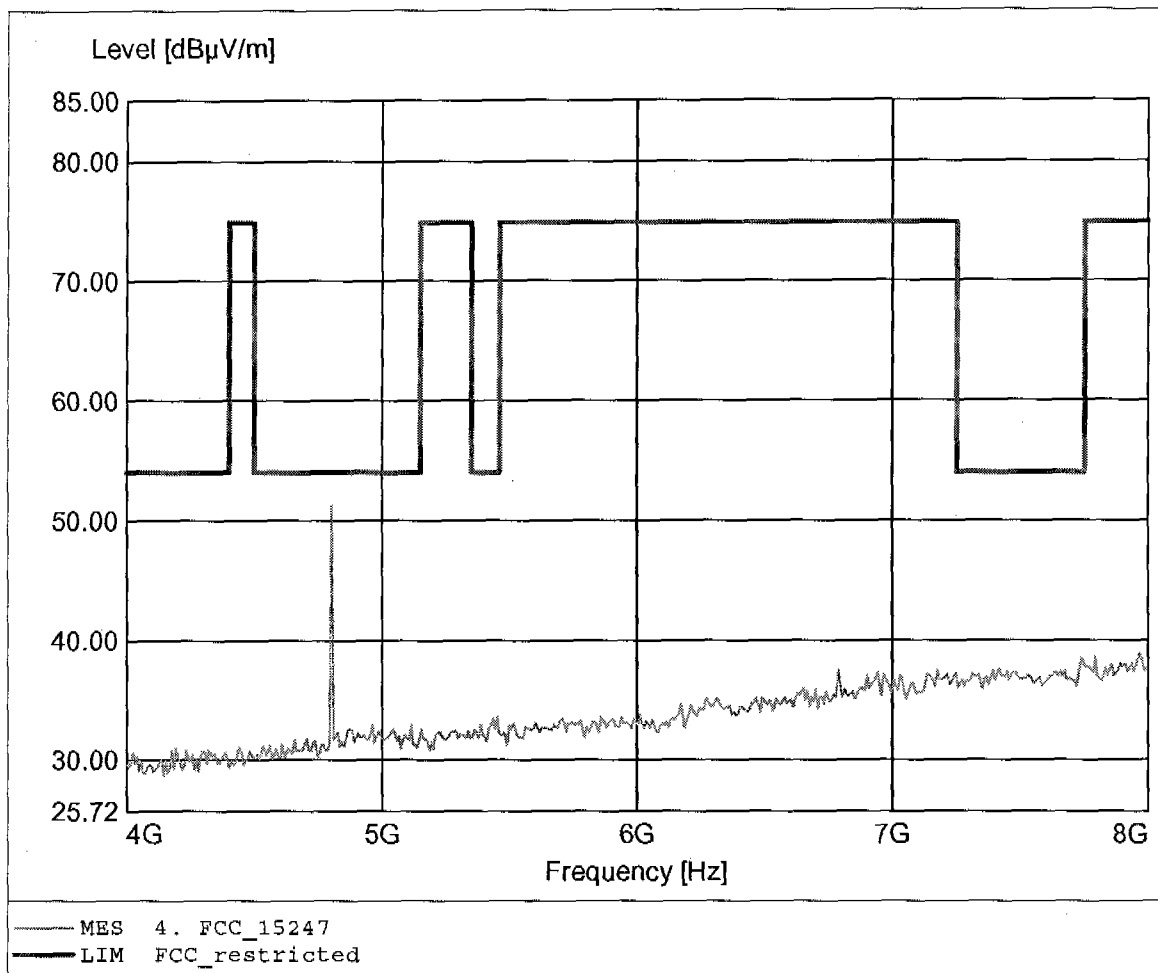

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 51.00dBuV/m, RBW: 1MHz

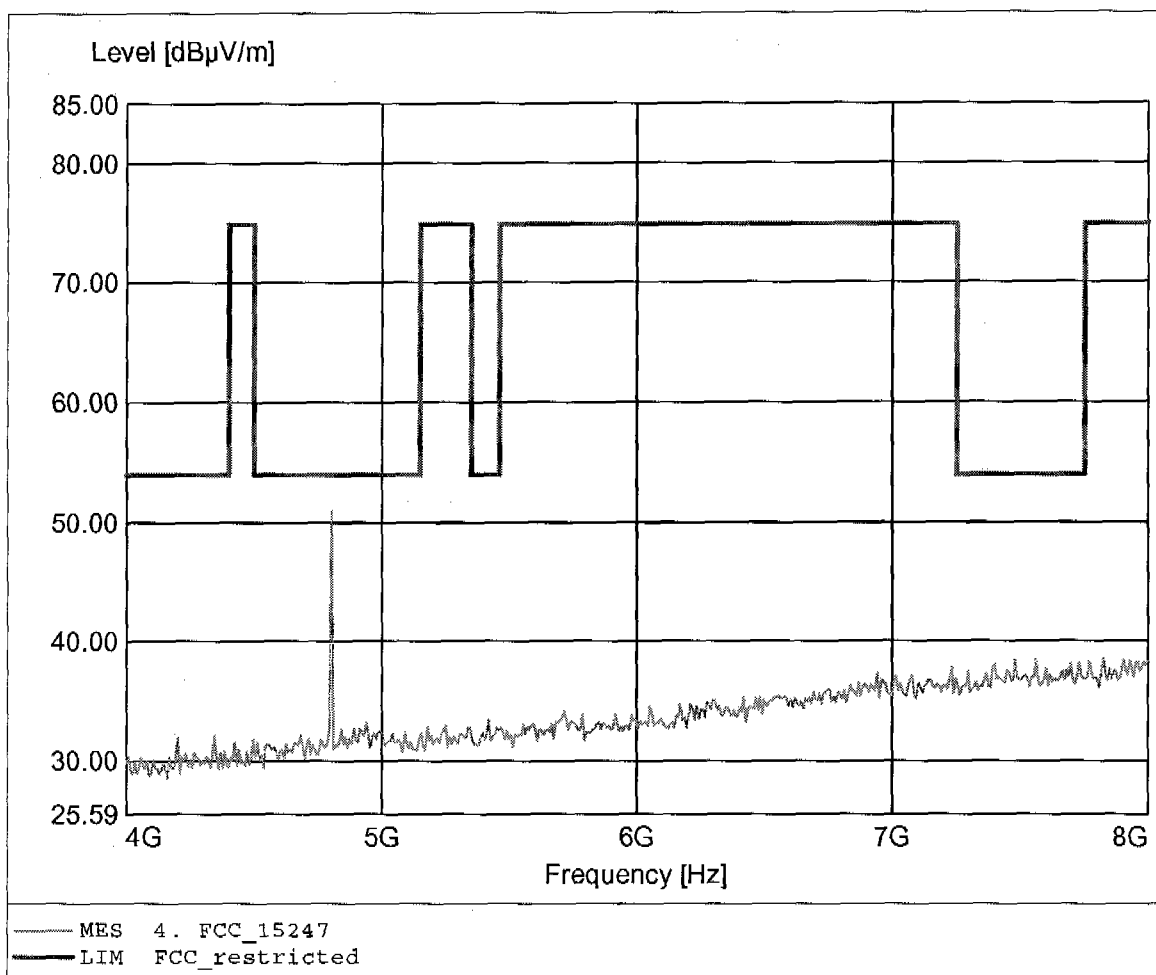

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.054GHz, Emax: 42.92dBuV/m, RBW: 1MHz

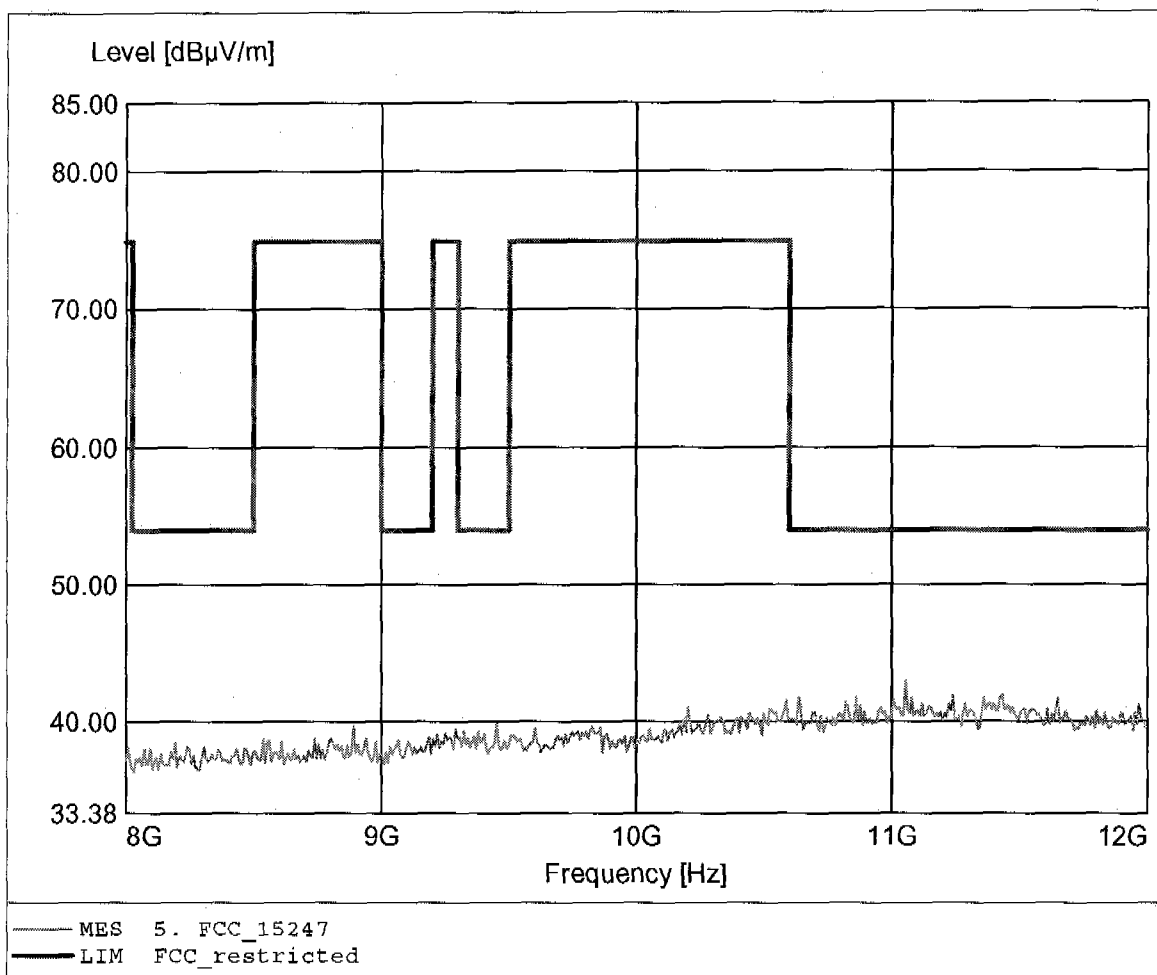

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.591GHz, Emax: 42.26dBuV/m, RBW: 1MHz

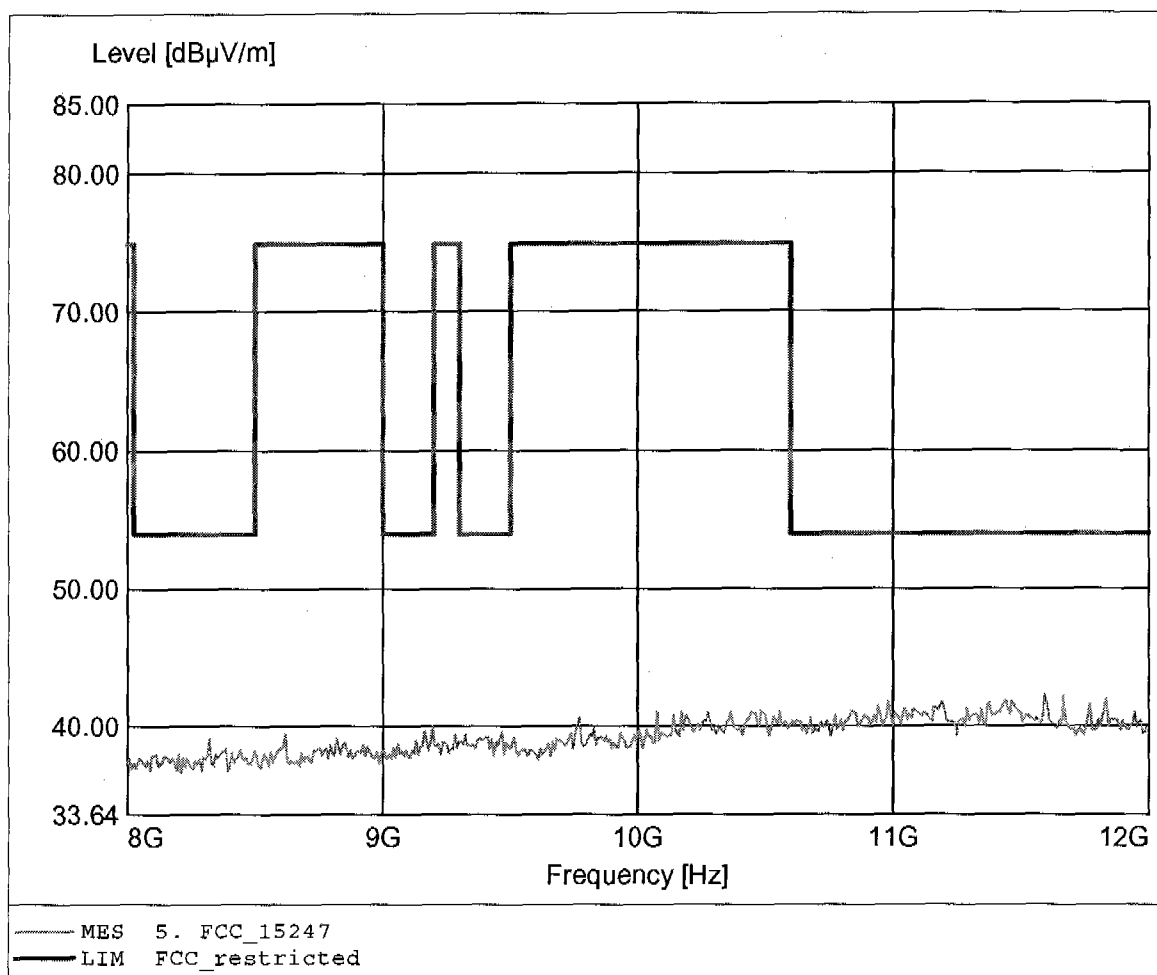

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.515GHz, Emax: 44.80dBμV/m, RBW: 1MHz

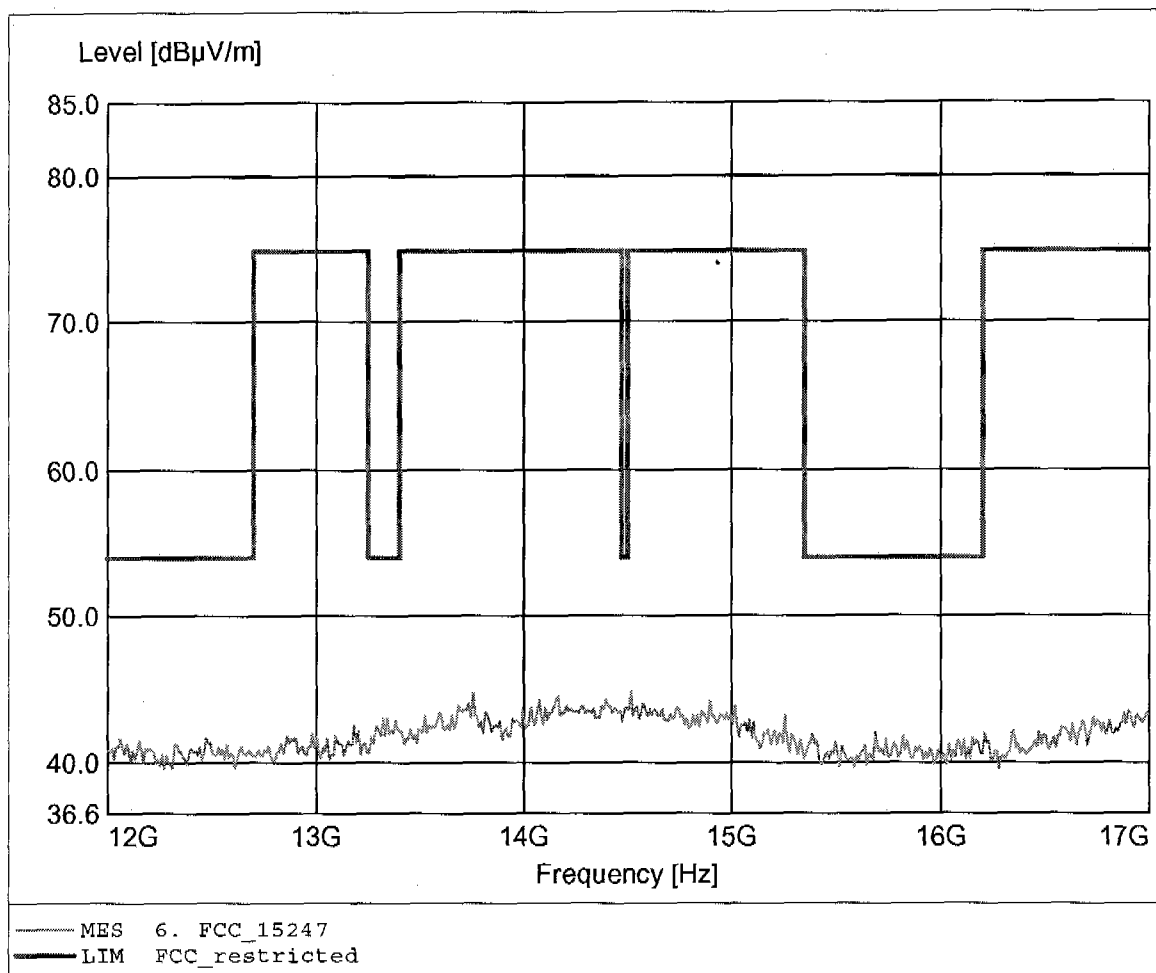

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 13.713GHz, Emax: 45.22dBµV/m, RBW: 1MHz

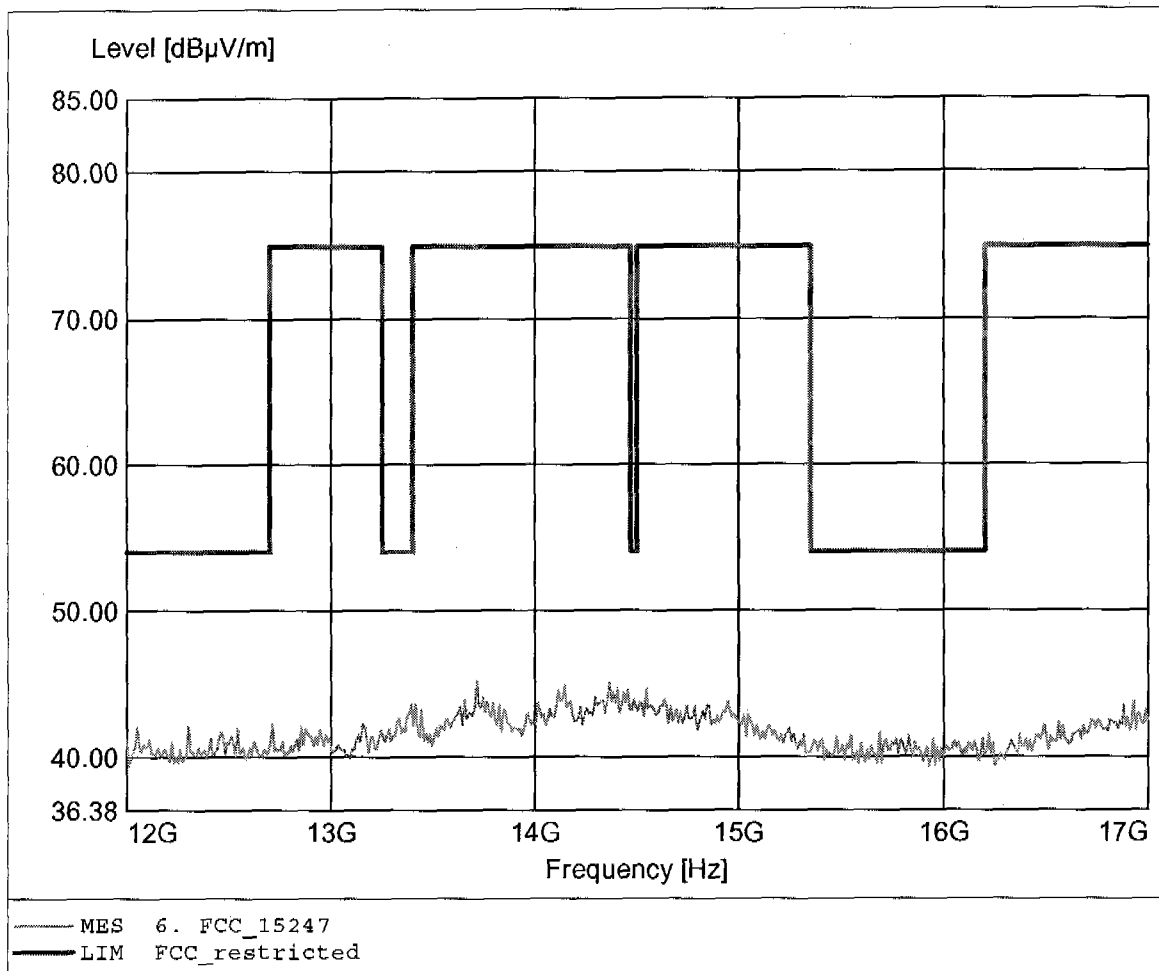

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 45.26dBuV/m, RBW: 1MHz

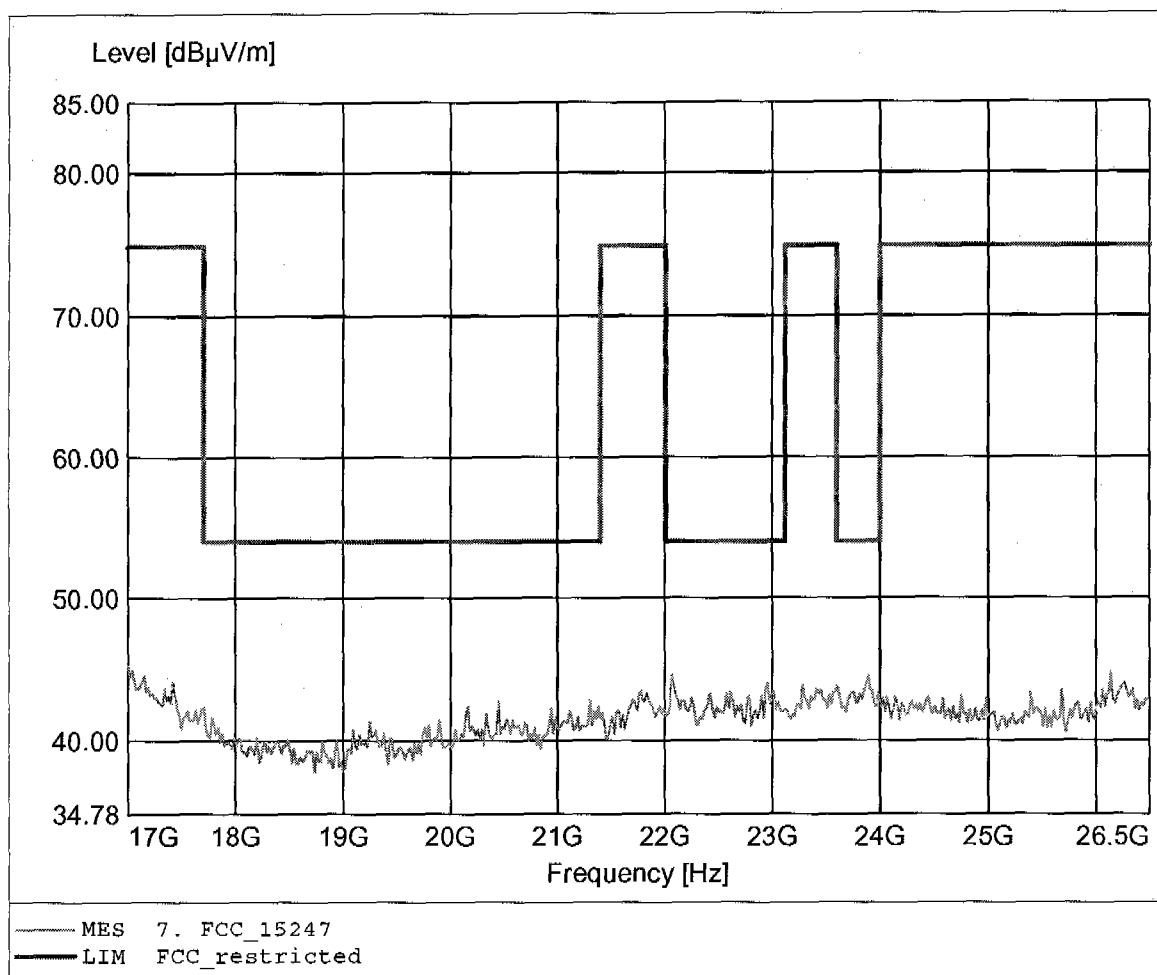

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2402 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.095GHz, Emax: 45.31dBuV/m, RBW: 1MHz

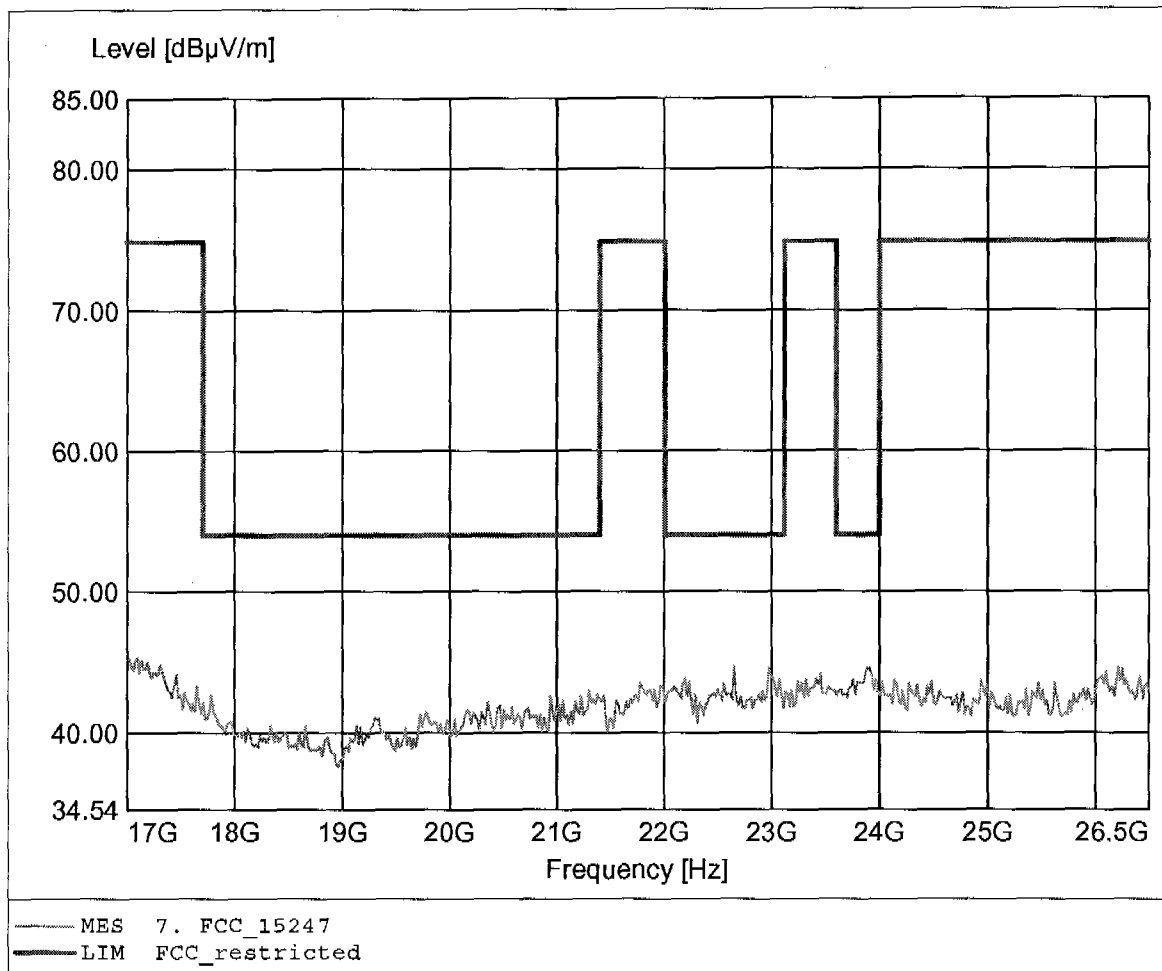

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 171.383MHz, Emax: 33.20dBµV/m, RBW: 100kHz

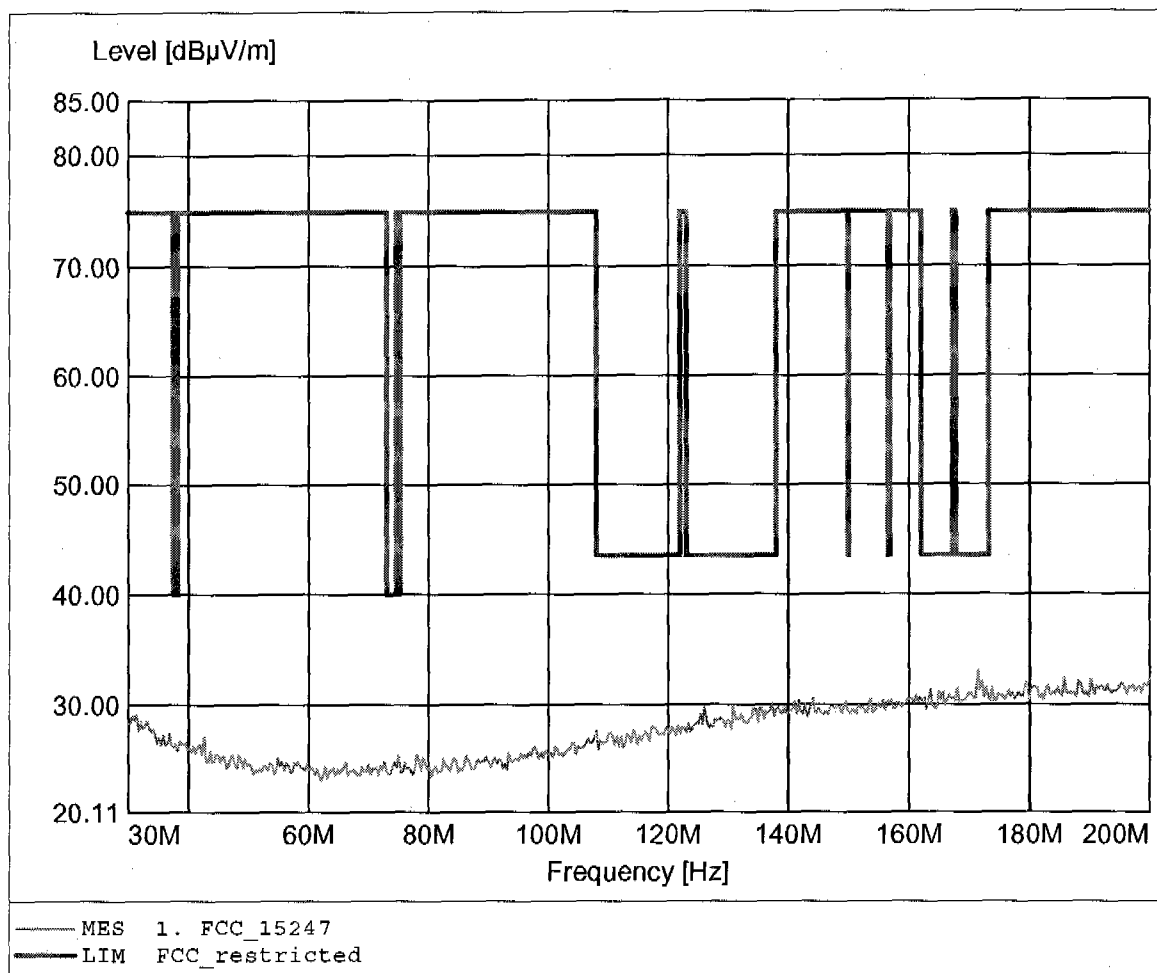

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 197.615MHz, Emax: 32.95dBµV/m, REW: 100kHz

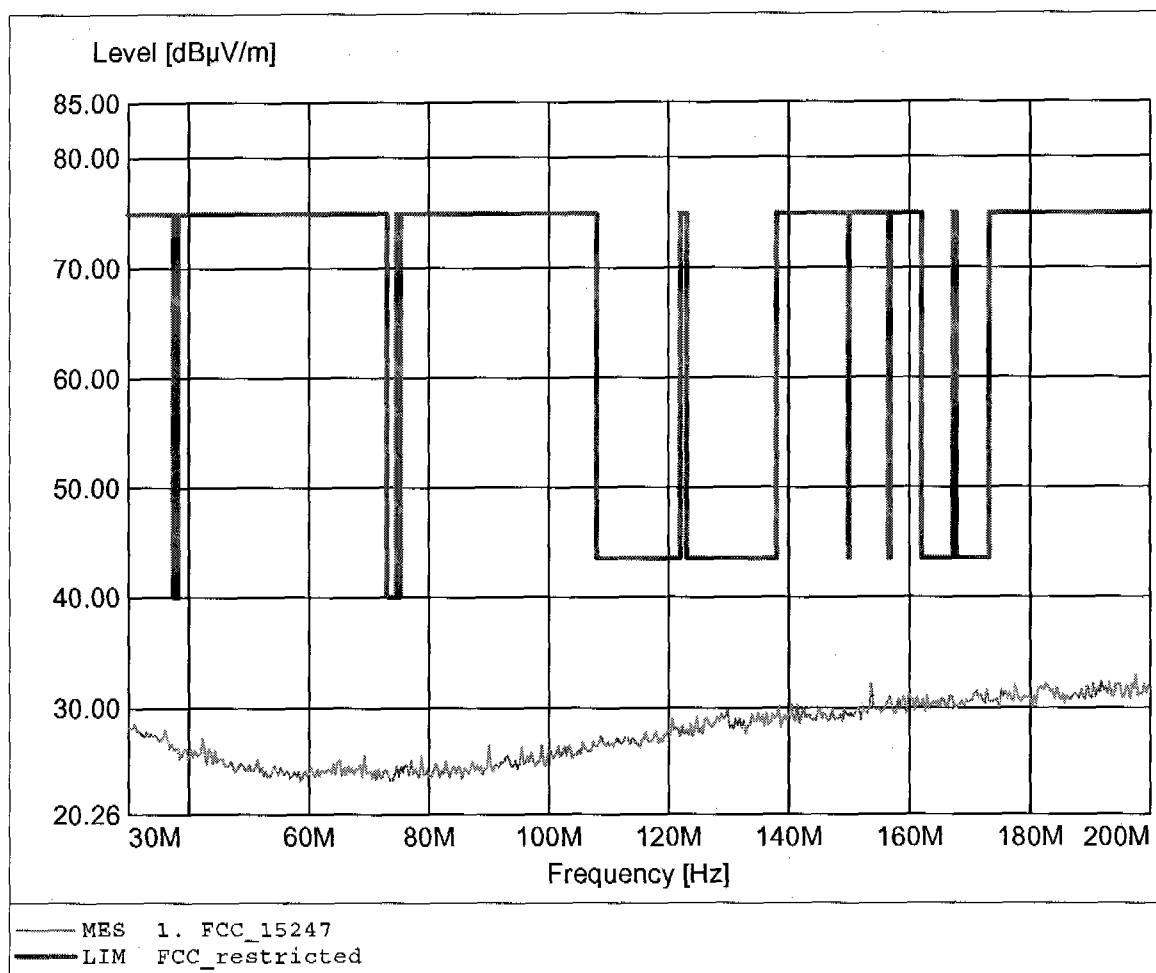

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 991.984MHz, Emax: 22.57dBµV/m, RBW: 100kHz

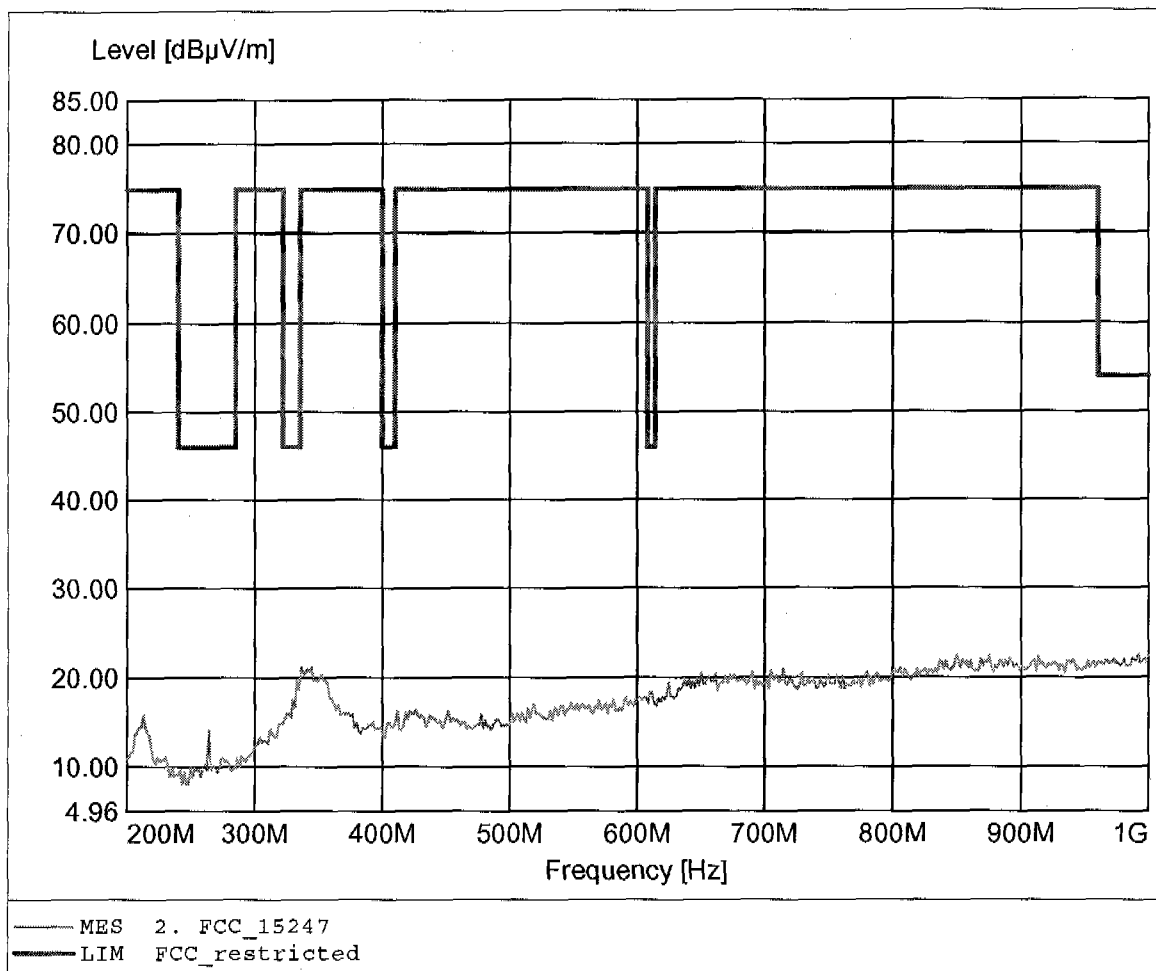

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 341.082MHz, Emax: 27.24dBuV/m, RBW: 100kHz

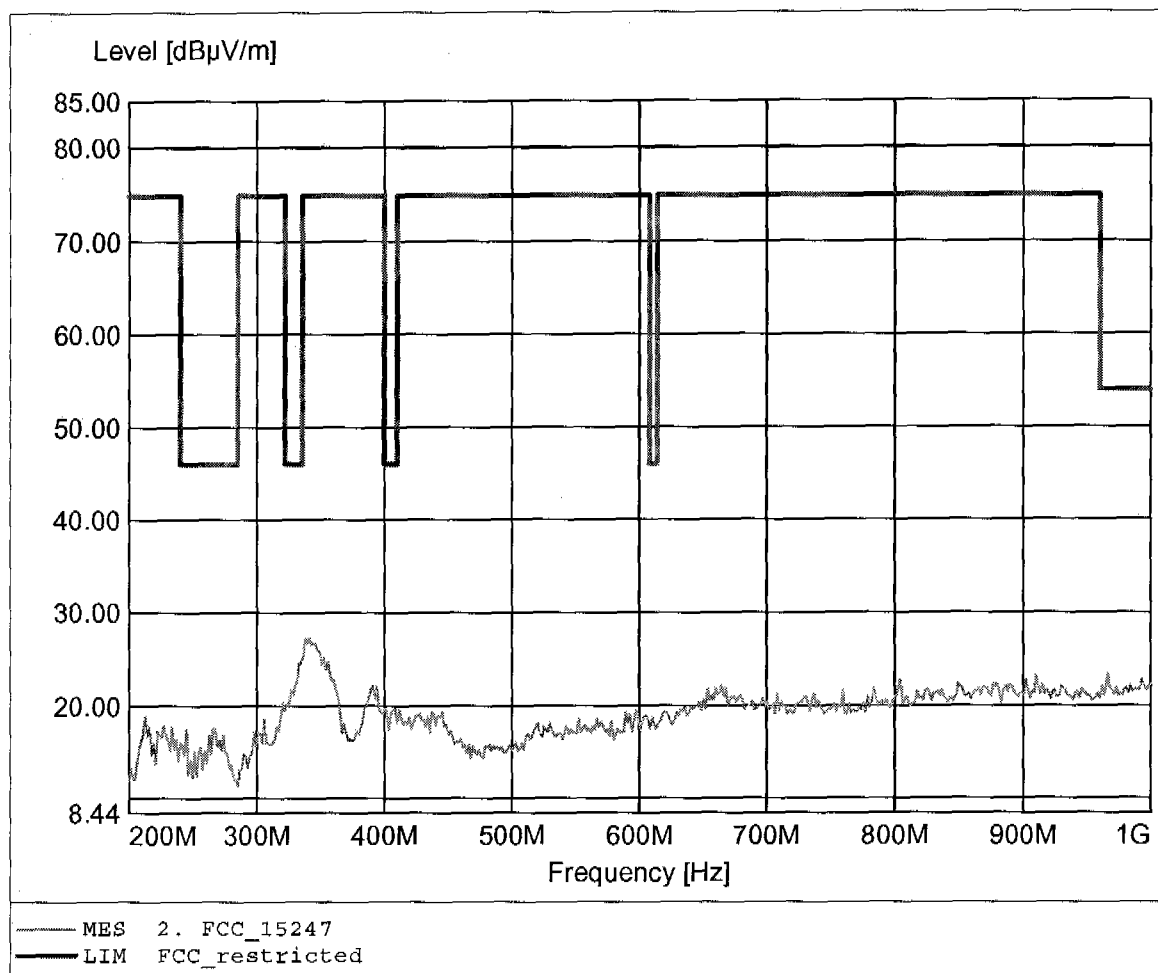

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.749GHz, Emax: 44.59dBuV/m, RBW: 1MHz

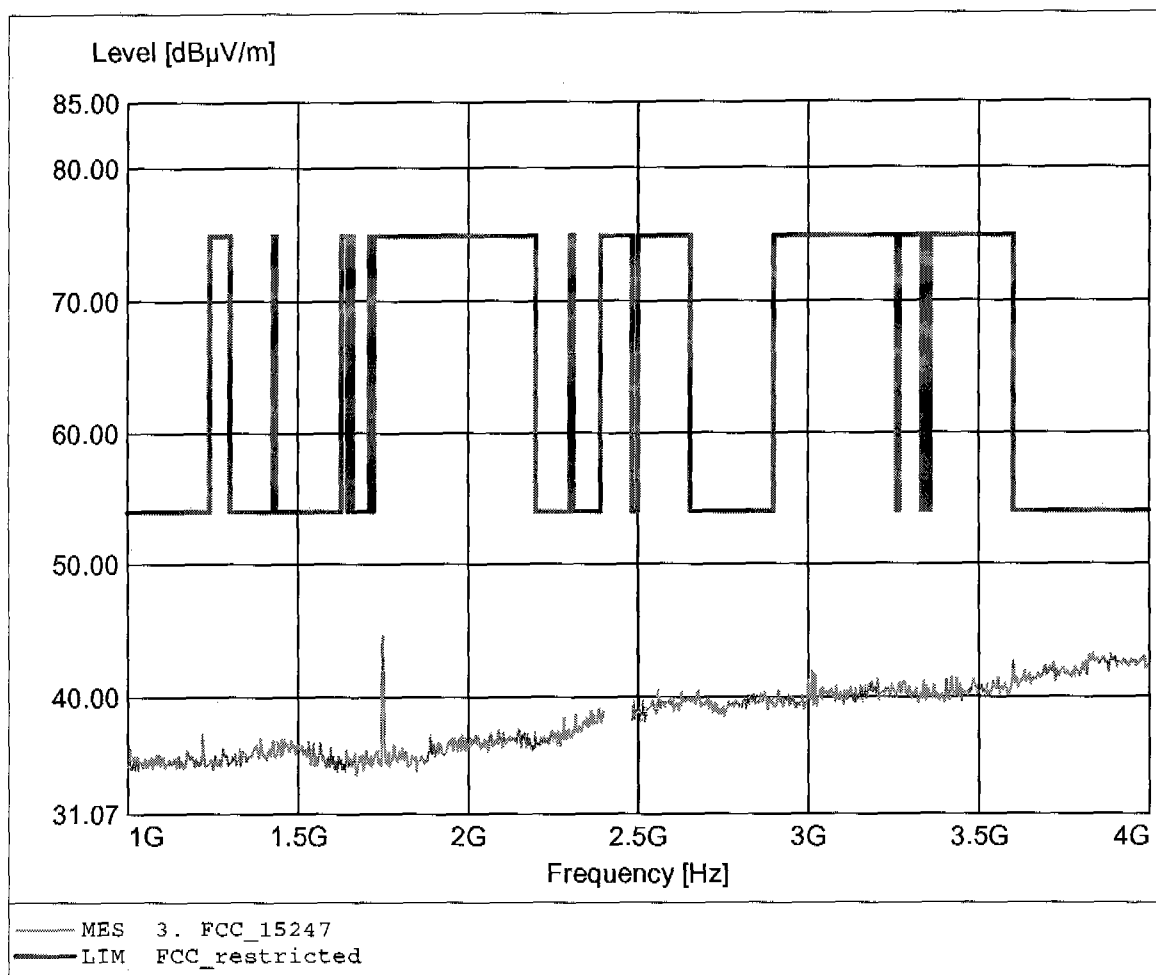

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.749GHz, Emax: 43.41dBuV/m, RBW: 1MHz

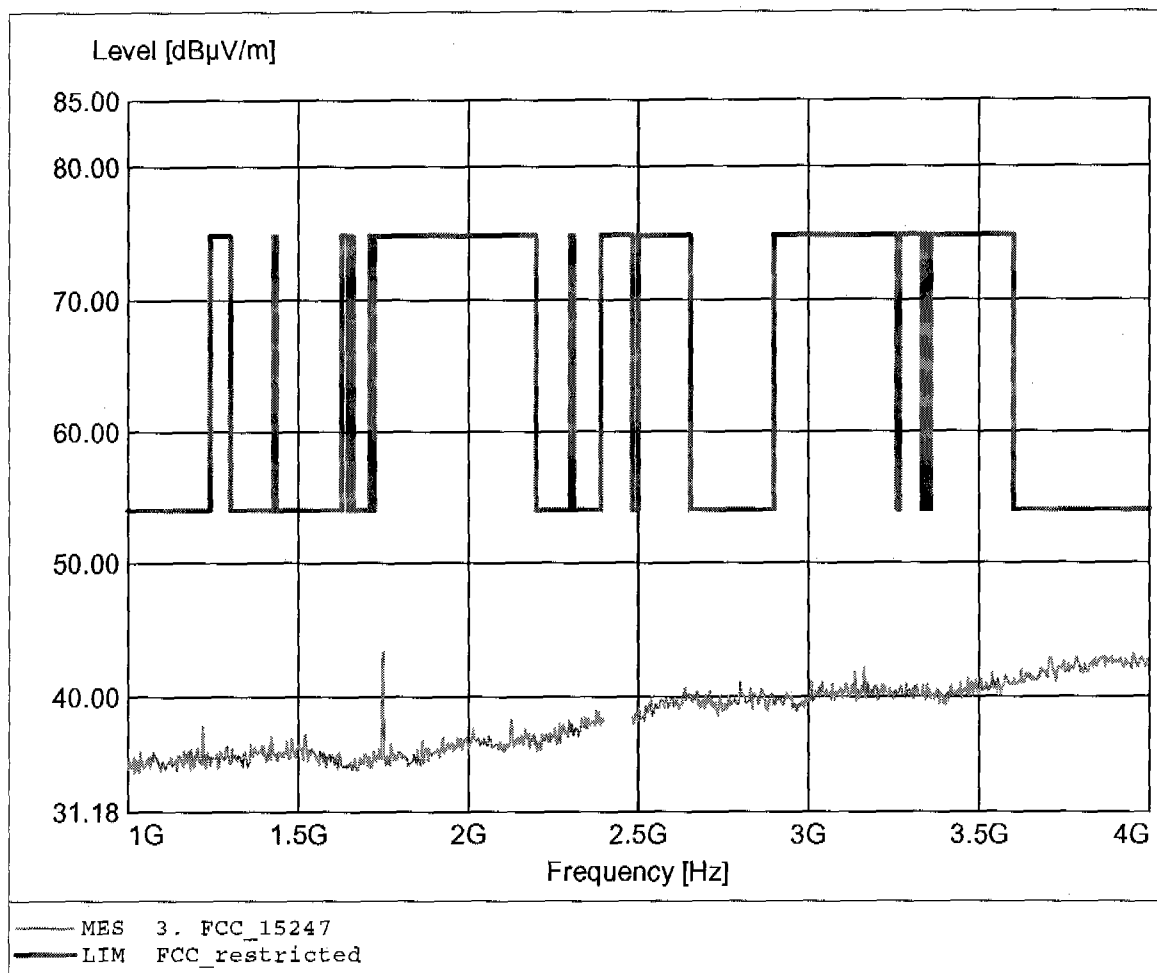

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 55.66dBuV/m, RBW: 1MHz

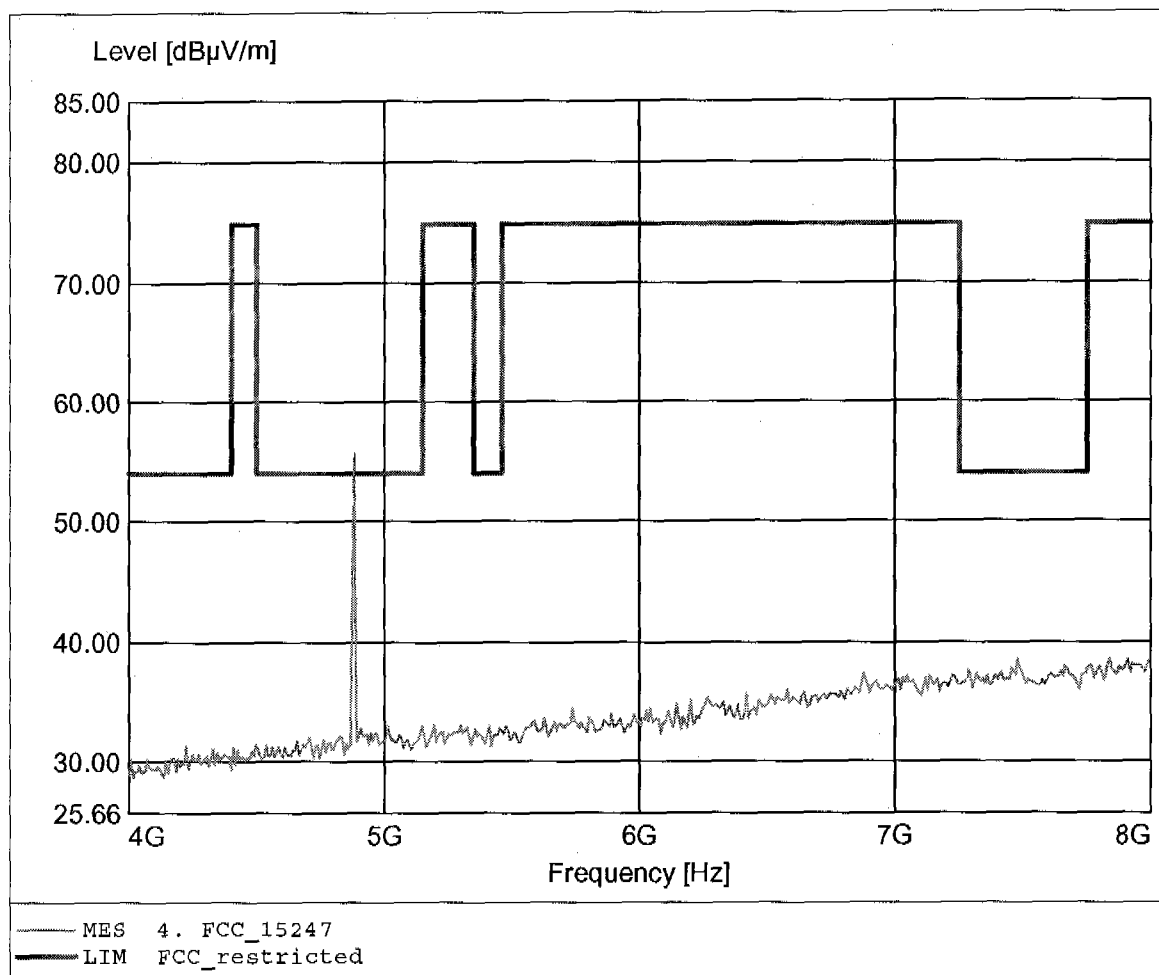

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 35.60dBuV/m, RBW: 1MHz

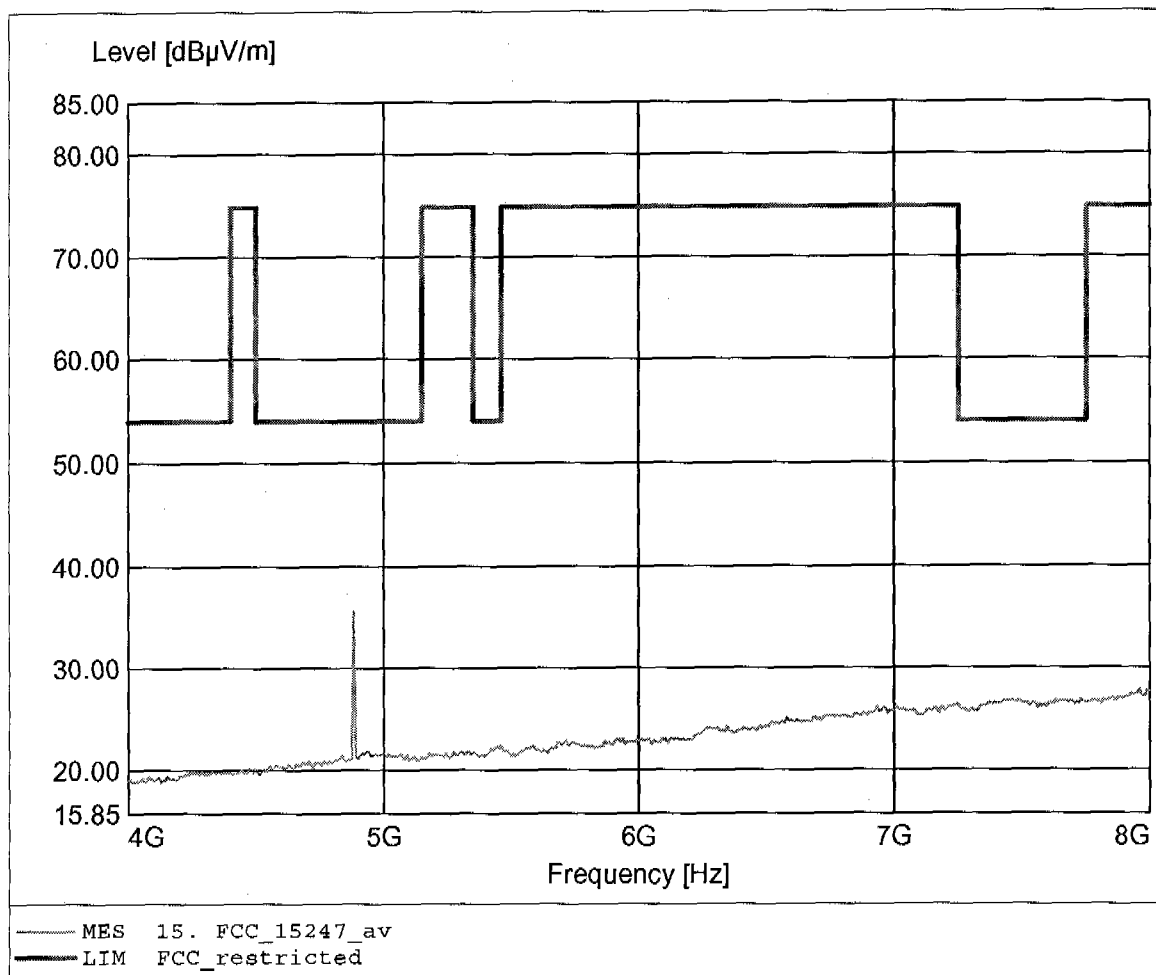

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 53.82dBμV/m, RBW: 1MHz

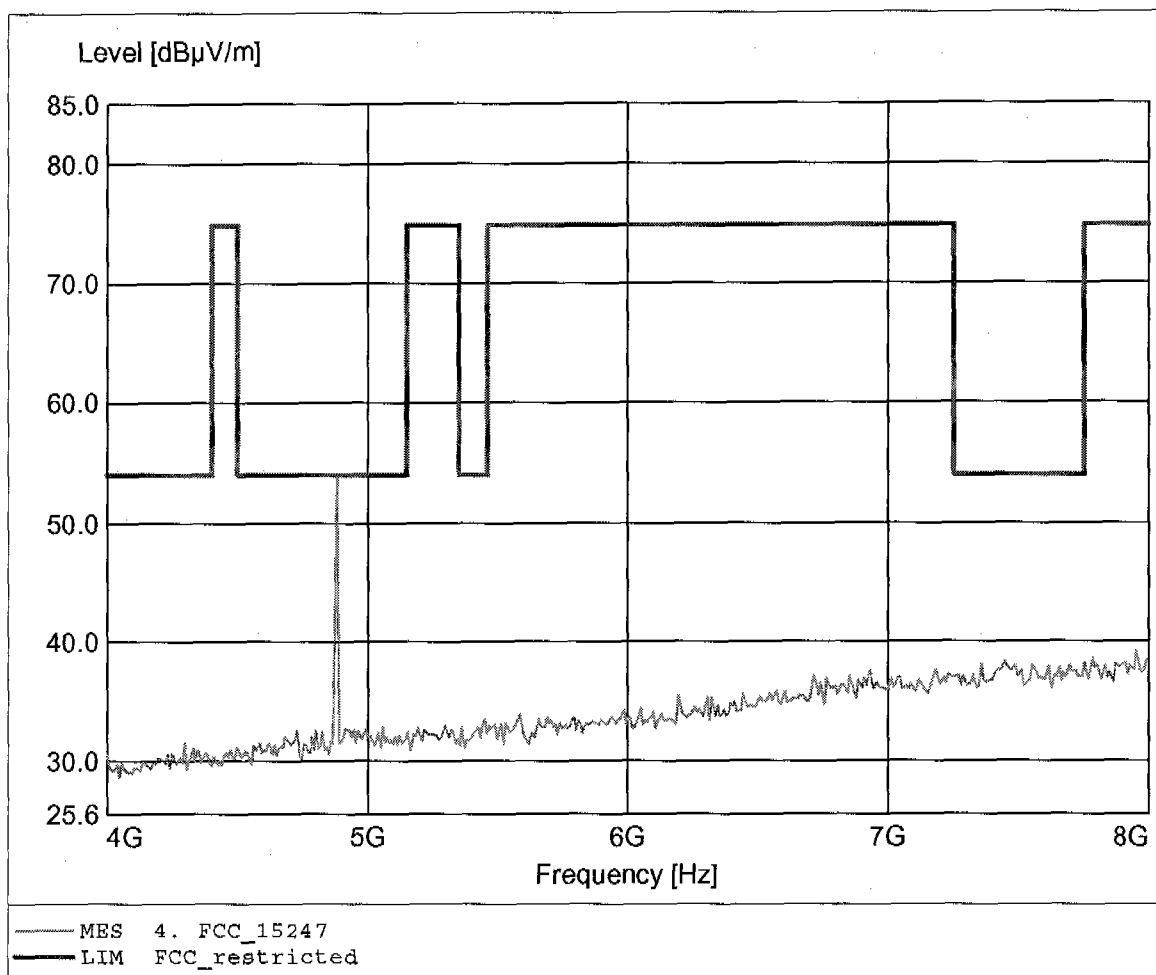

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 53.82dBµV/m, RBW: 1MHz

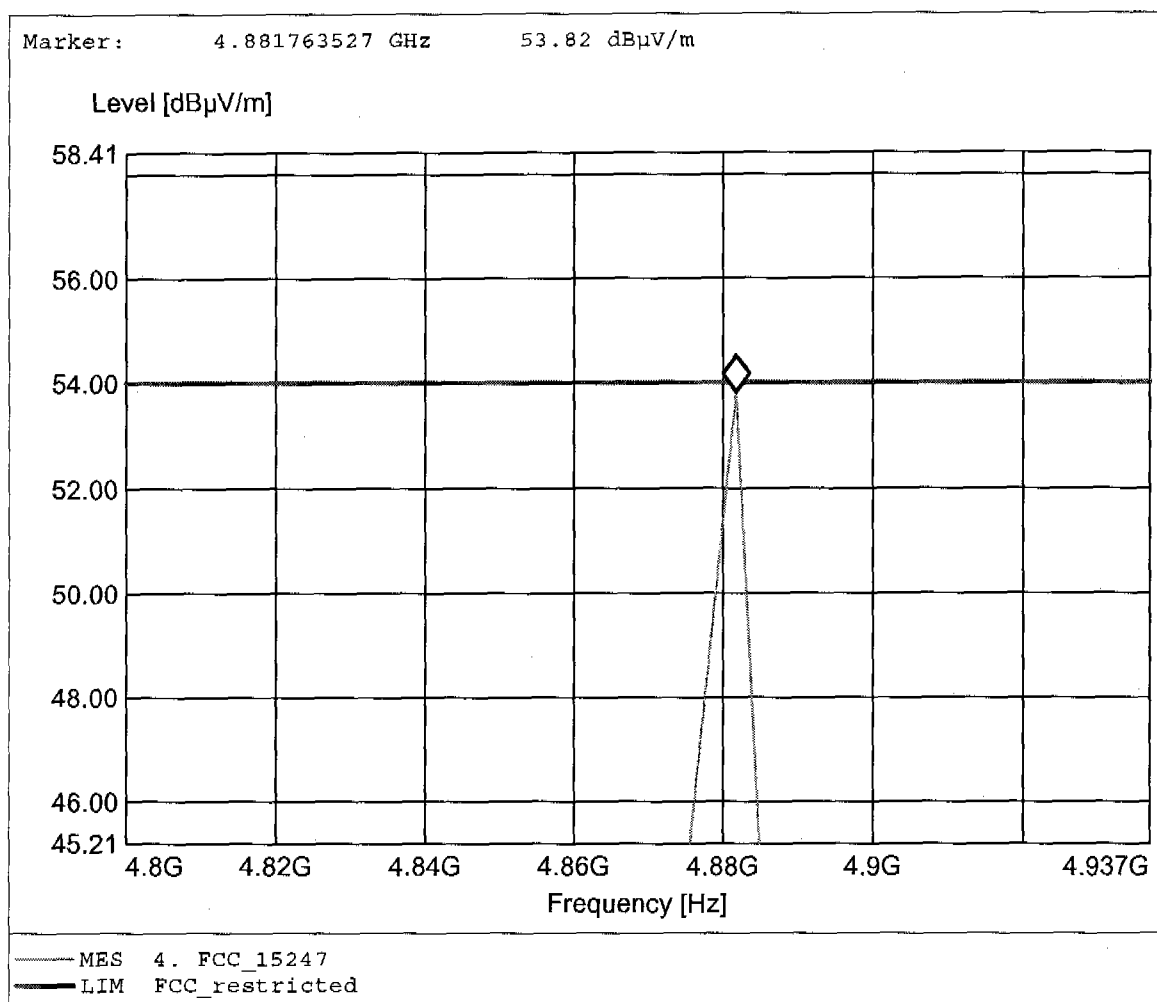

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 32.53dBµV/m, REW: 1MHz

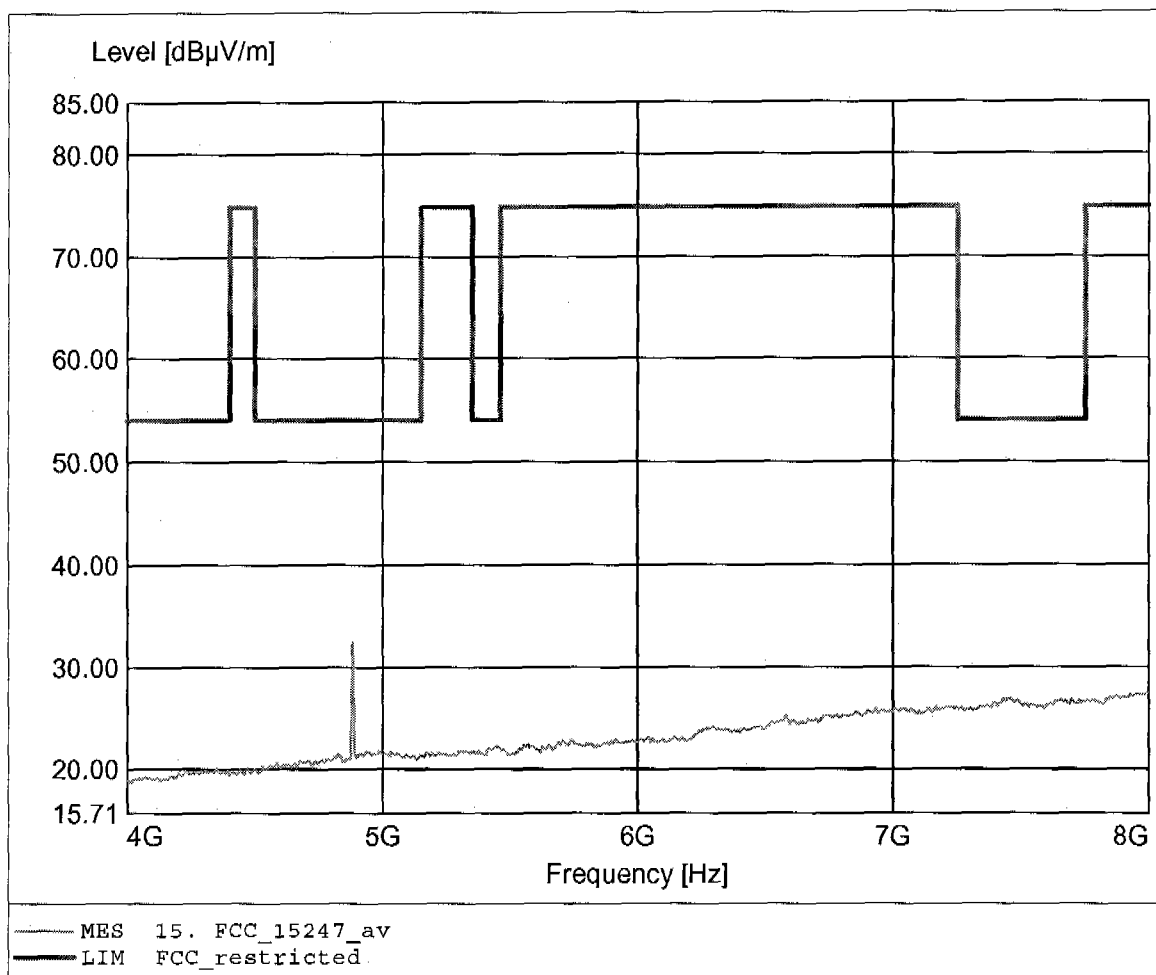

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.054GHz, Emax: 43.70dBµV/m, RBW: 1MHz

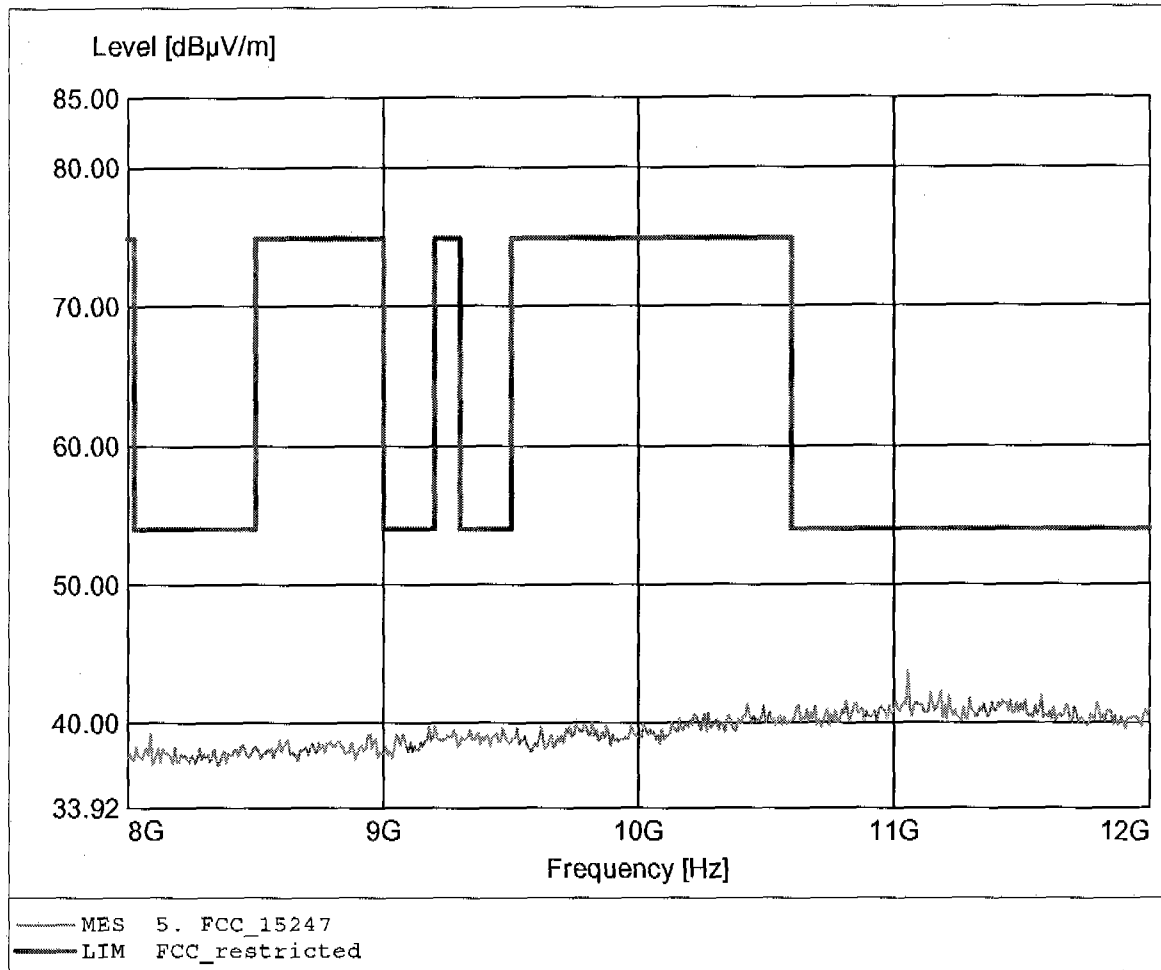

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.543GHz, Emax: 41.97dBuV/m, RBW: 1MHz

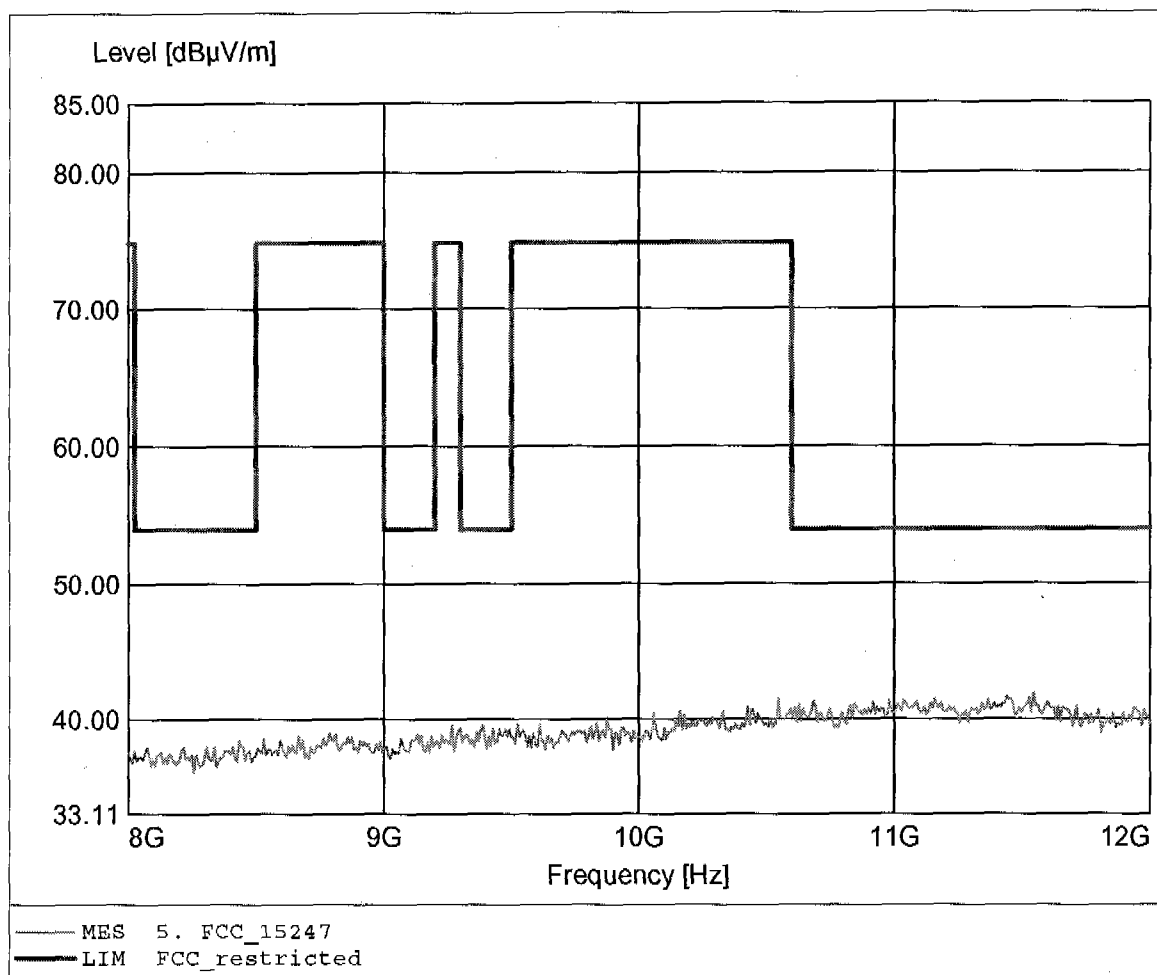

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.515GHz, Emax: 44.38dBuV/m, RBW: 1MHz

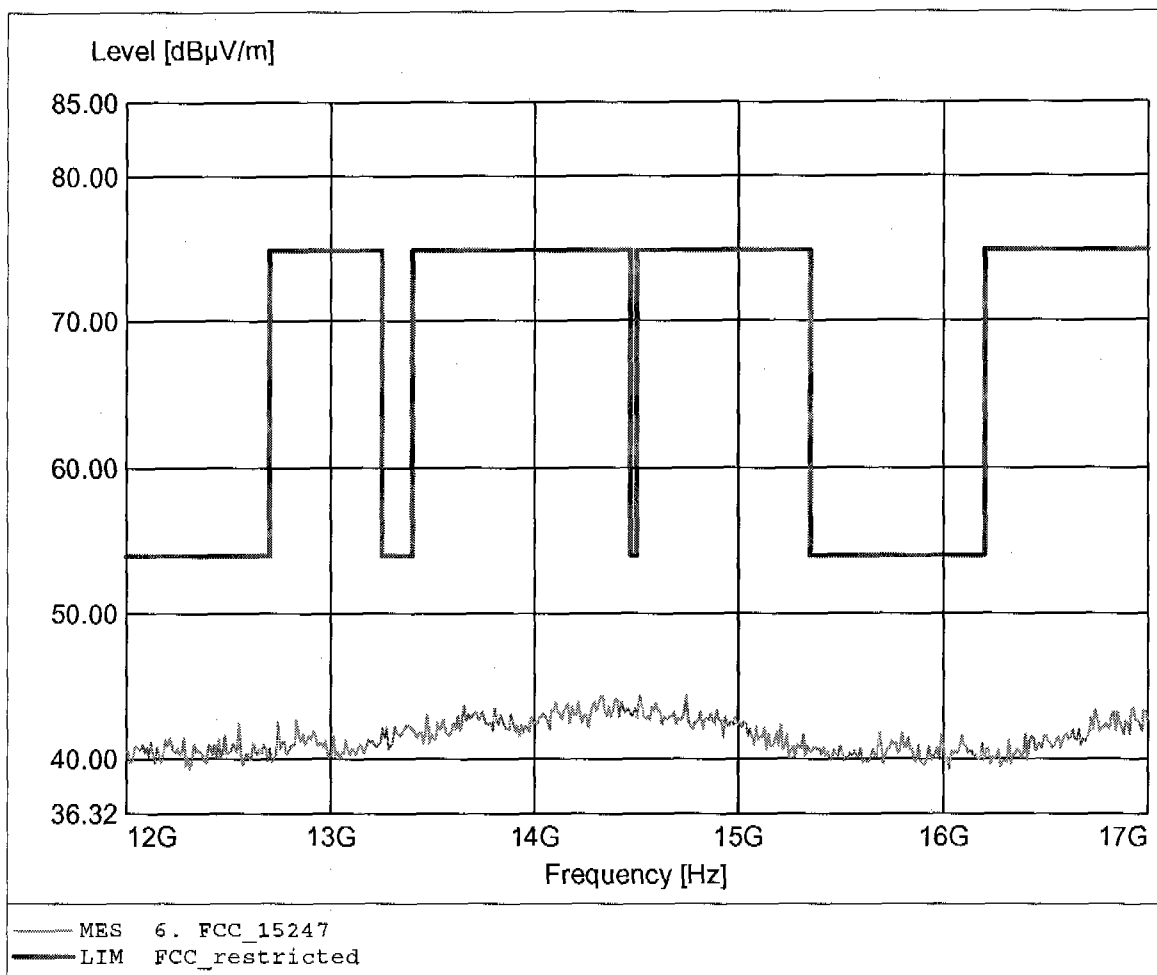

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.184GHz, Emax: 45.30dBuV/m, RBW: 1MHz

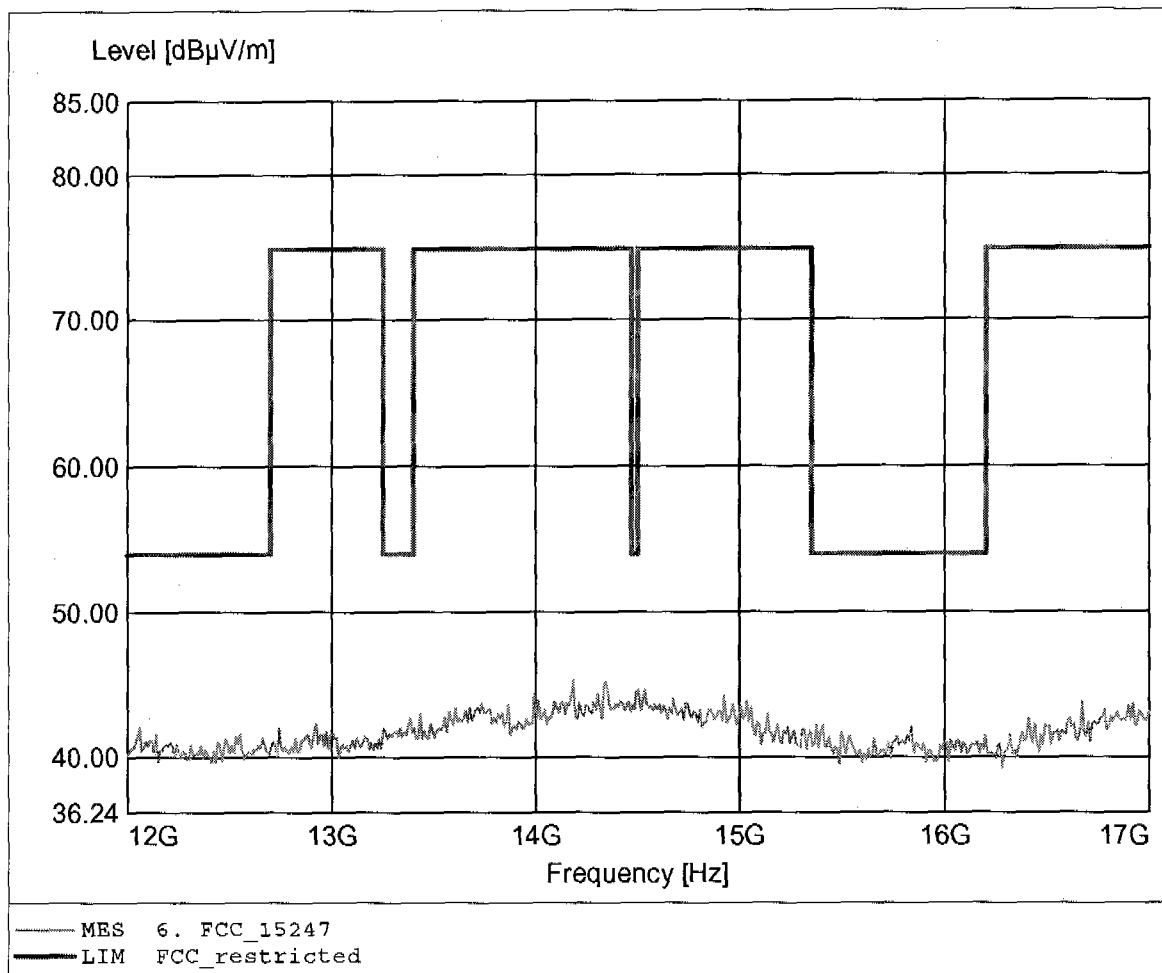

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.057GHz, Emax: 45.93dBuV/m, RBW: 1MHz

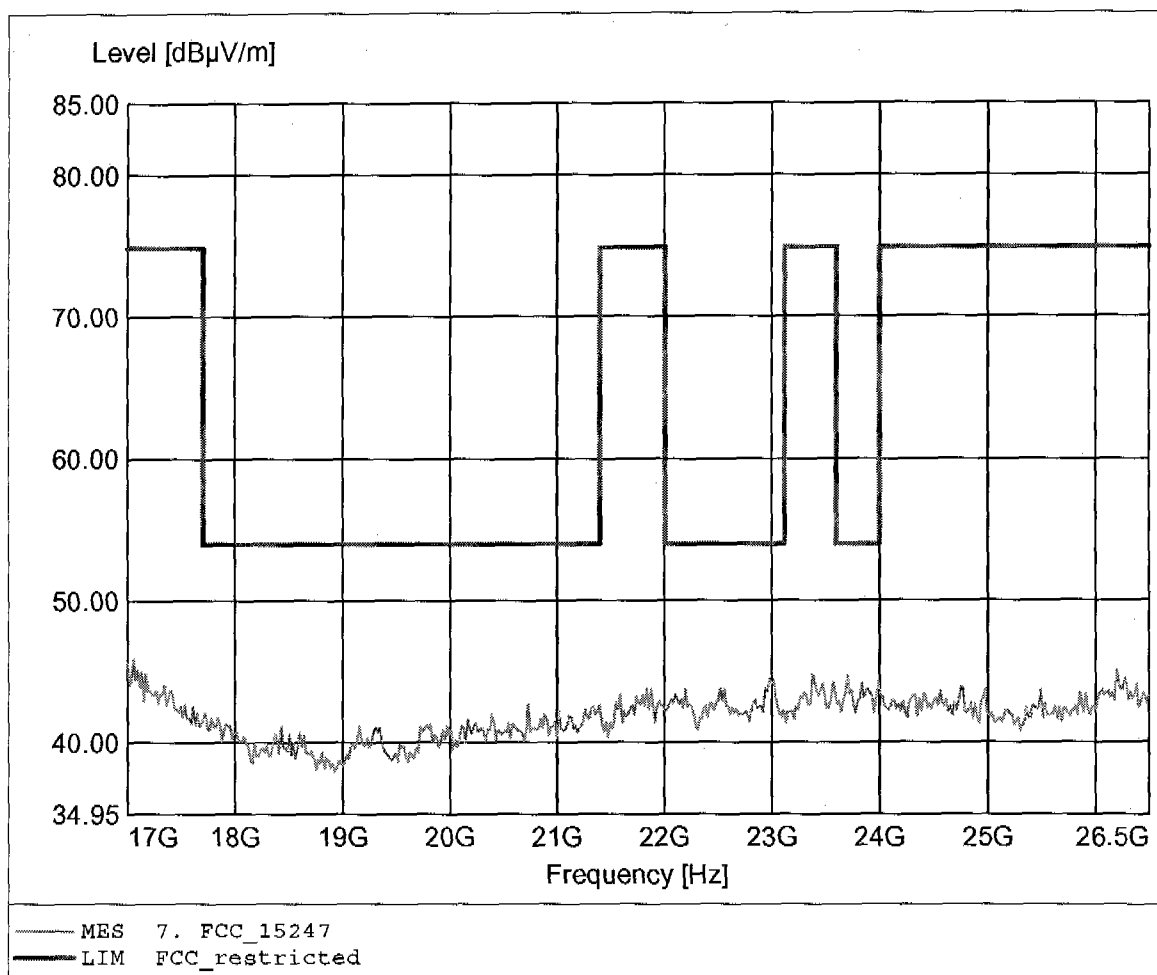

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2441 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.038GHz, Emax: 46.04dBuV/m, RBW: 1MHz

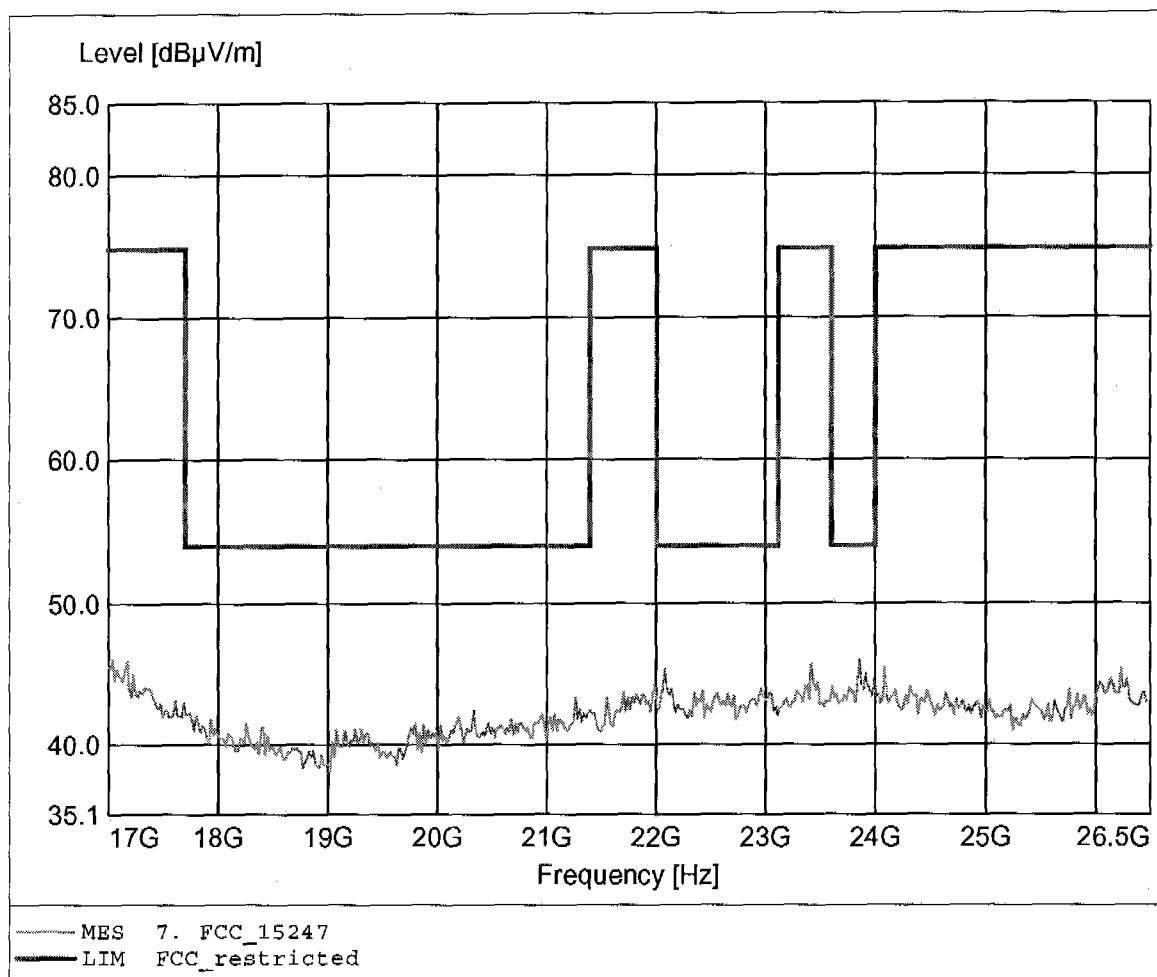

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 194.890MHz, Emax: 32.58dBµV/m, RBW: 100kHz

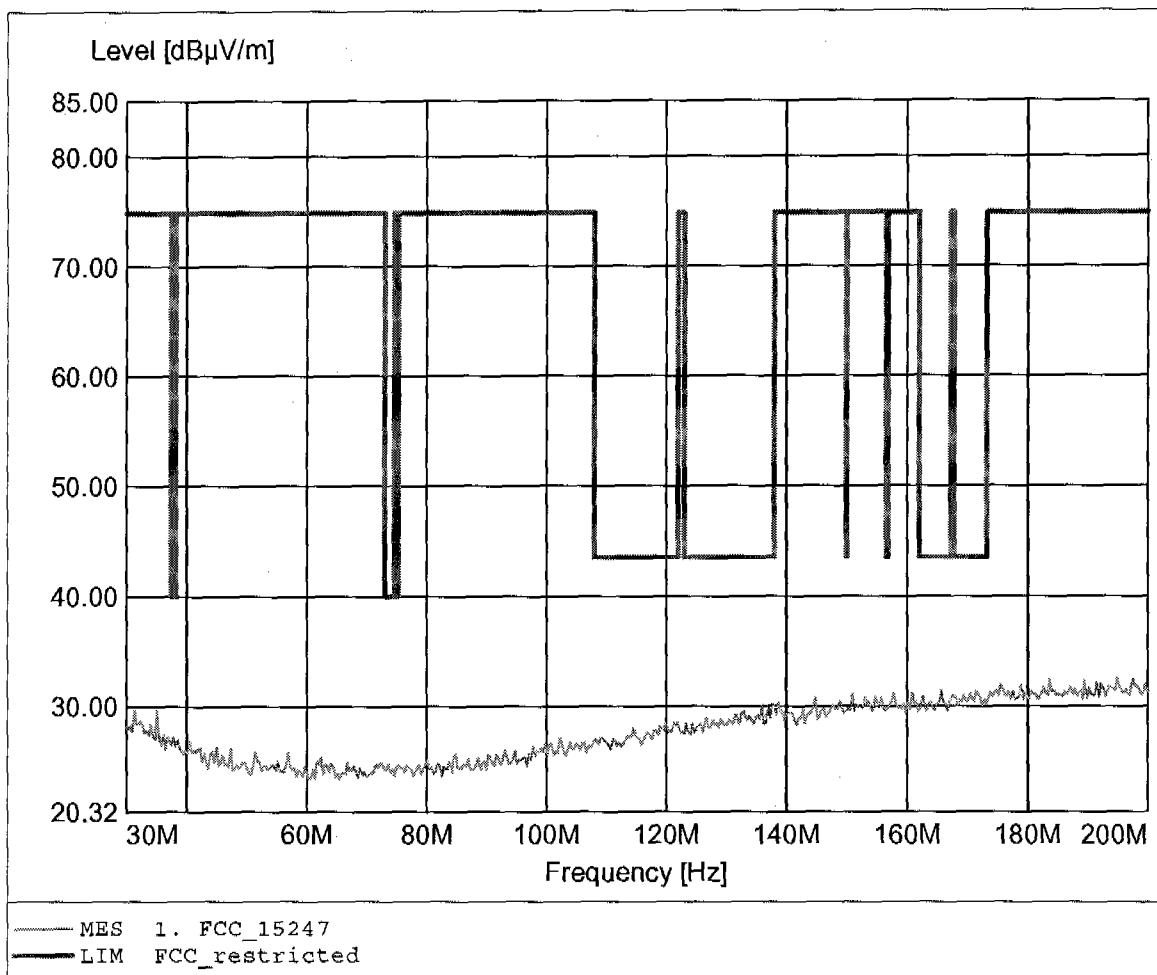

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 179.559MHz, Emax: 32.89dBµV/m, RBW: 100kHz

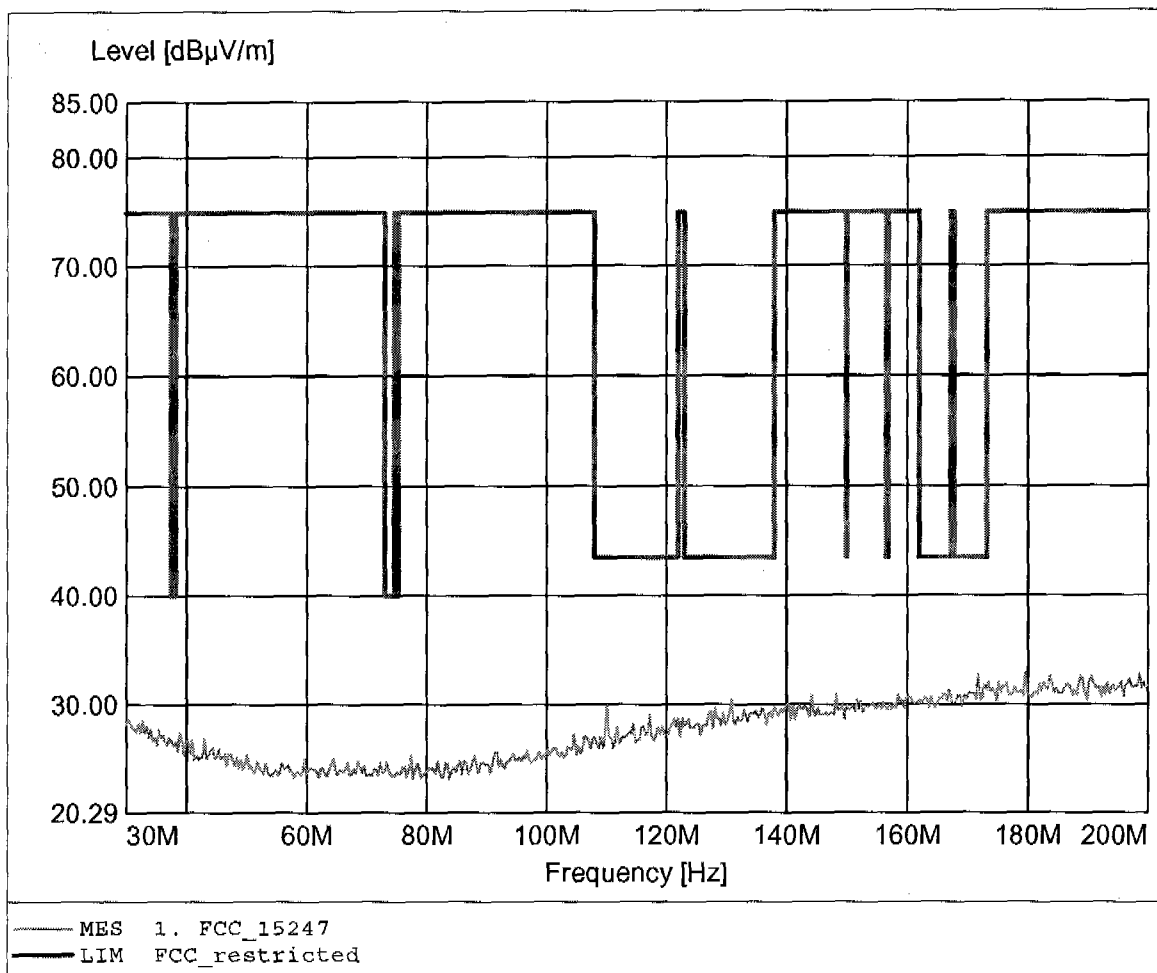

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 985.571MHz, Emax: 23.50dBµV/m, RBW: 100kHz

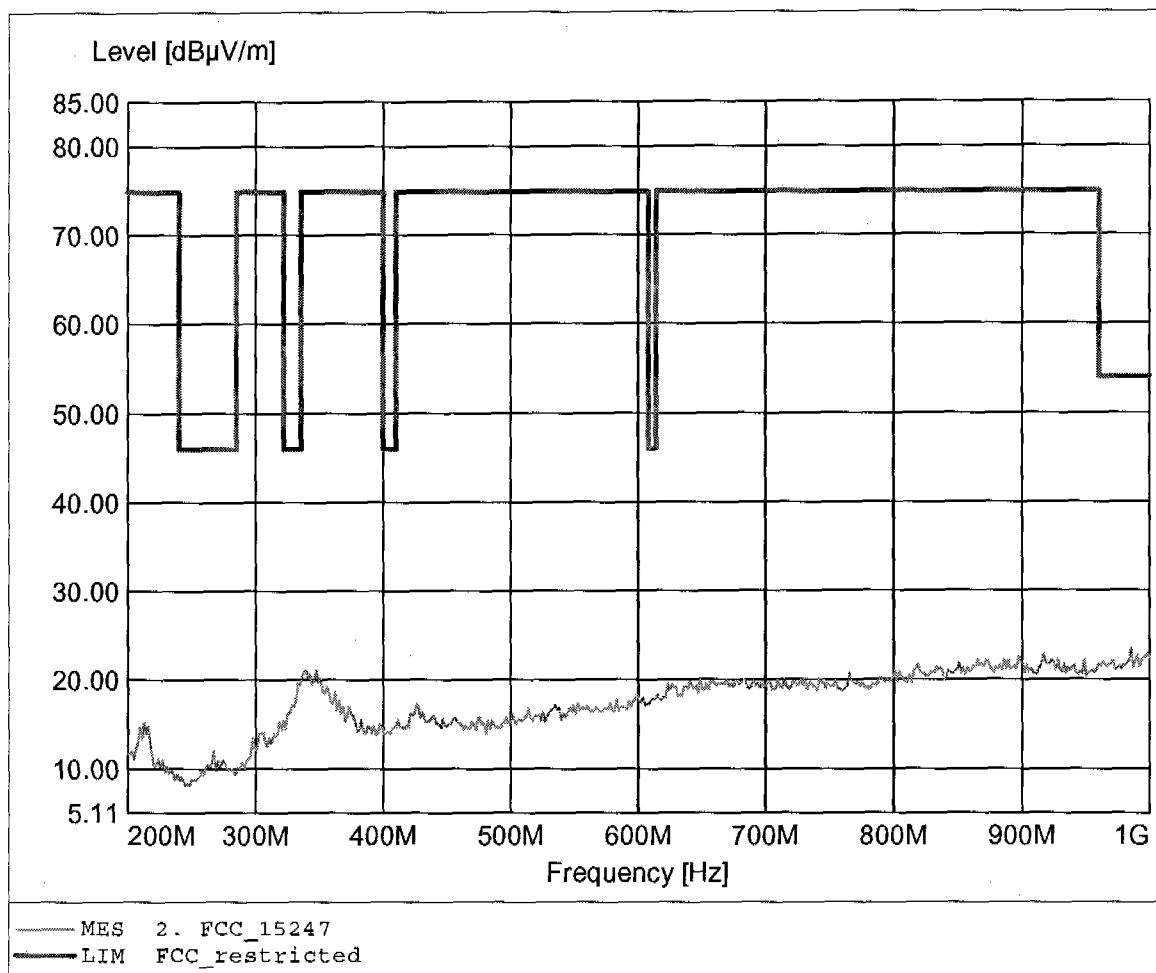

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 341.082MHz, Emax: 27.11dBµV/m, REW: 100kHz

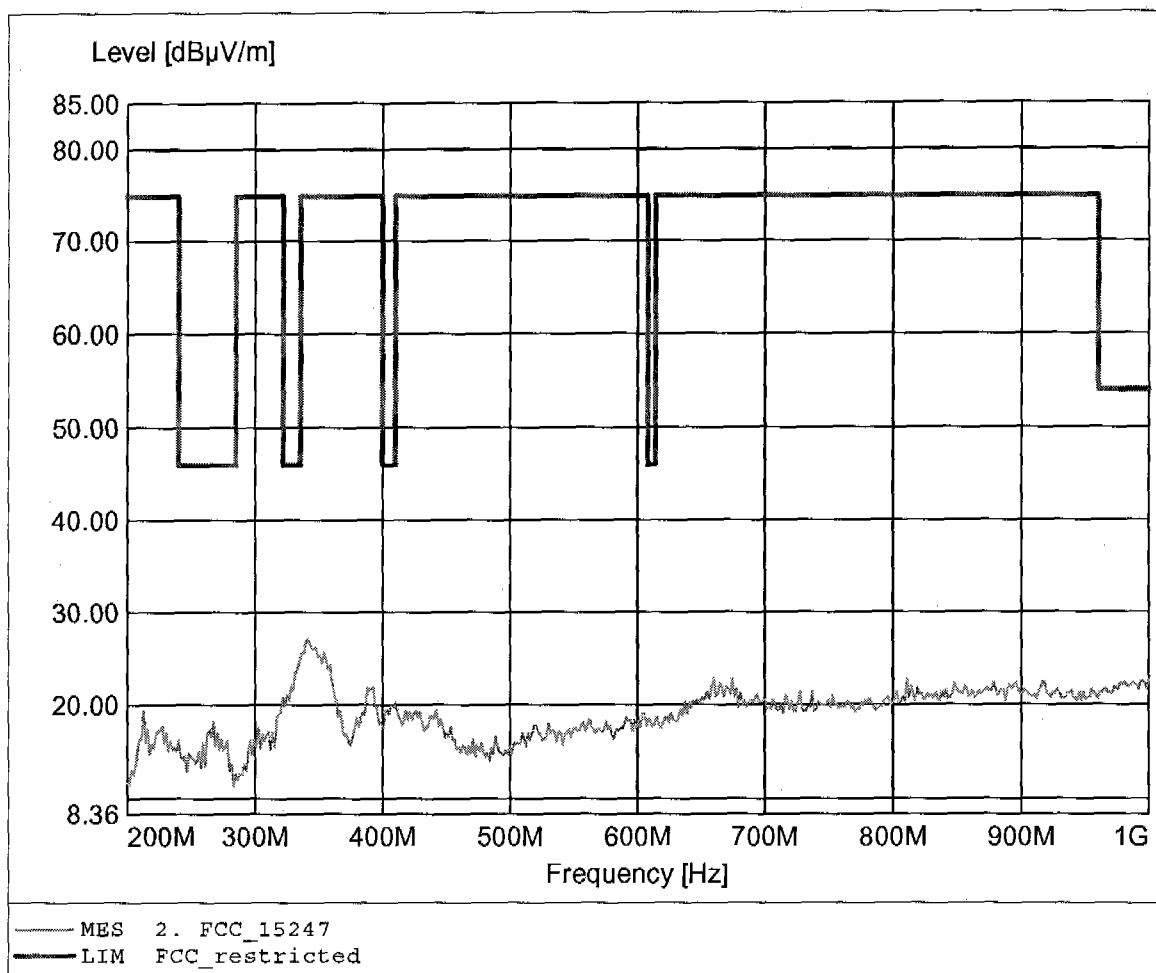

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 46.84dBuV/m, RBW: 1MHz

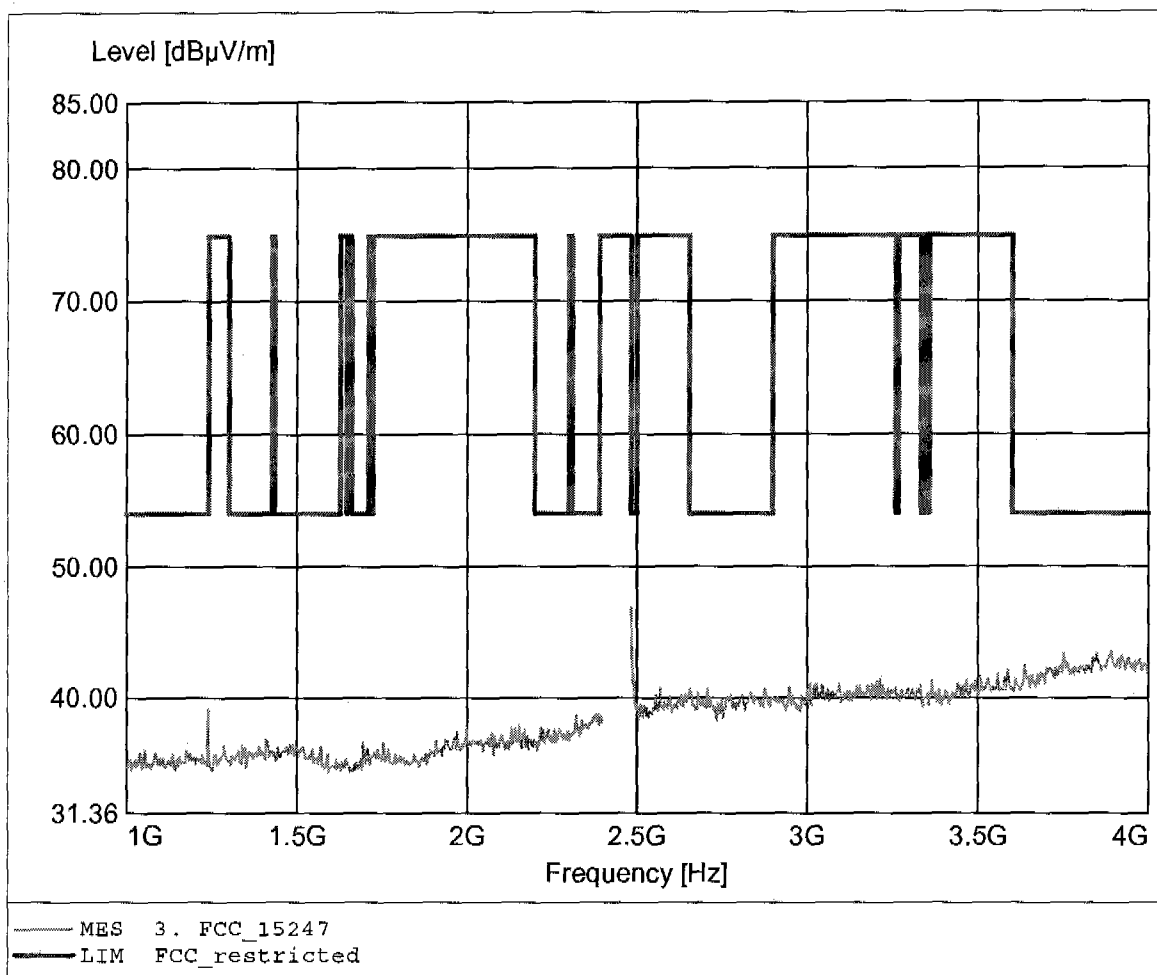

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.854GHz, Emax: 43.92dBuV/m, RBW: 1MHz

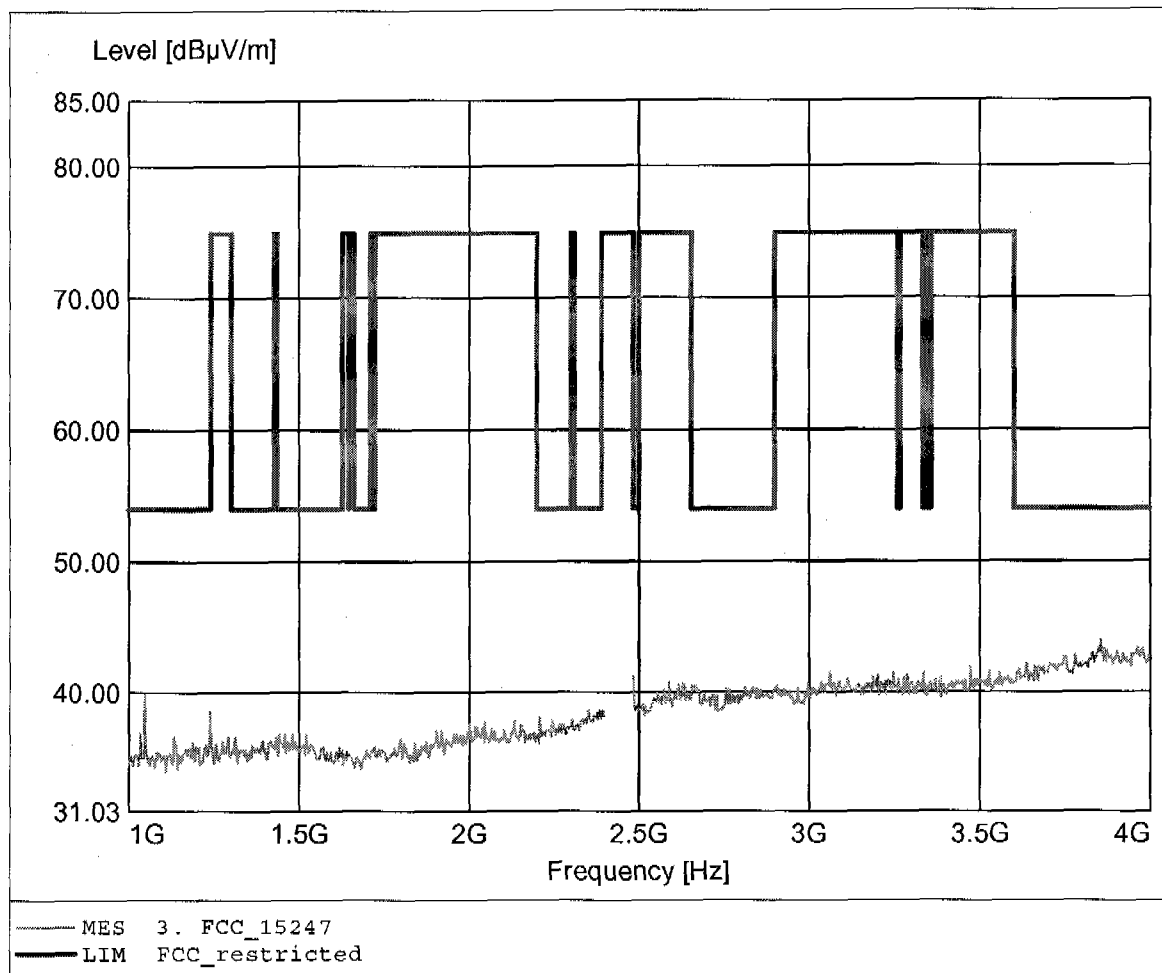

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 57.96dBuV/m, RBW: 1MHz

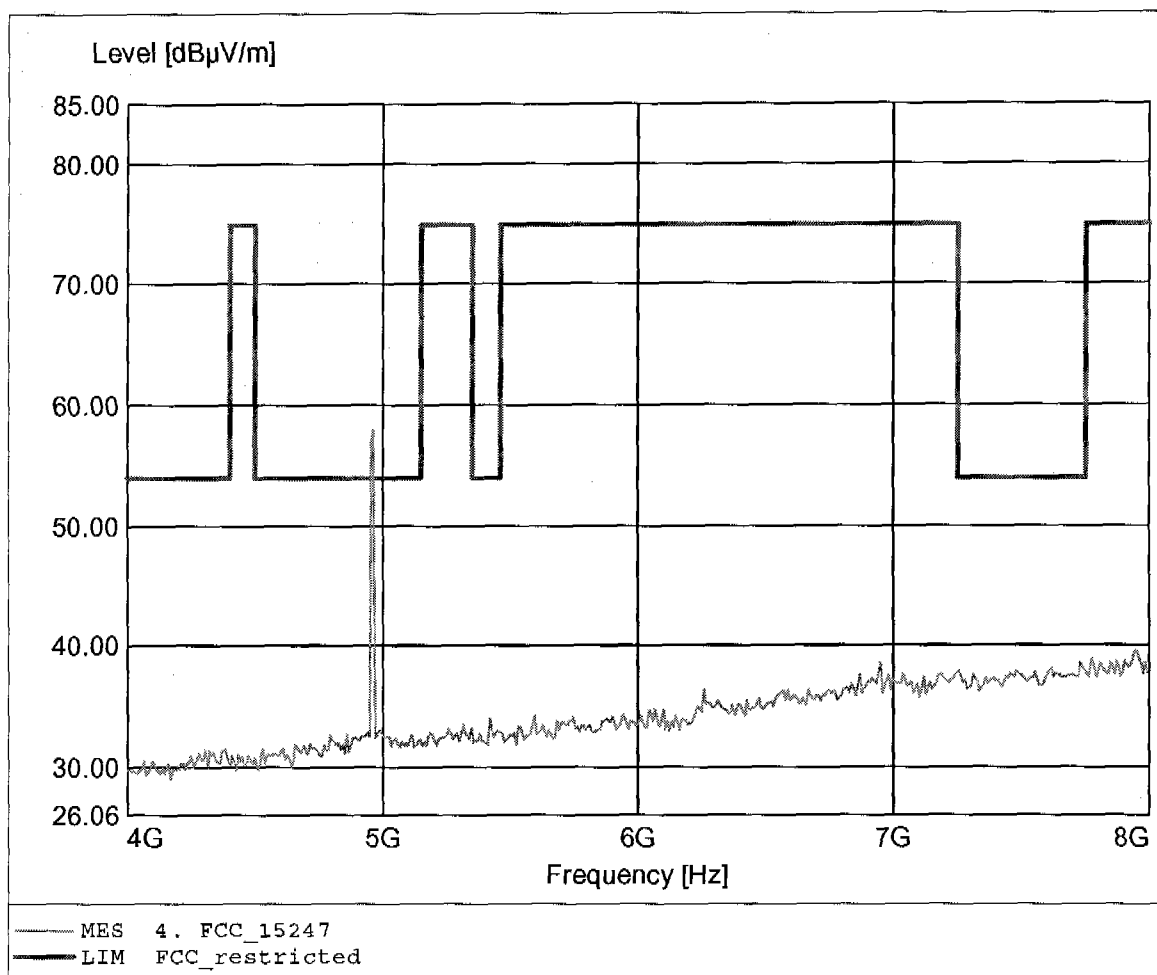

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 33.04dBuV/m, RBW: 1MHz

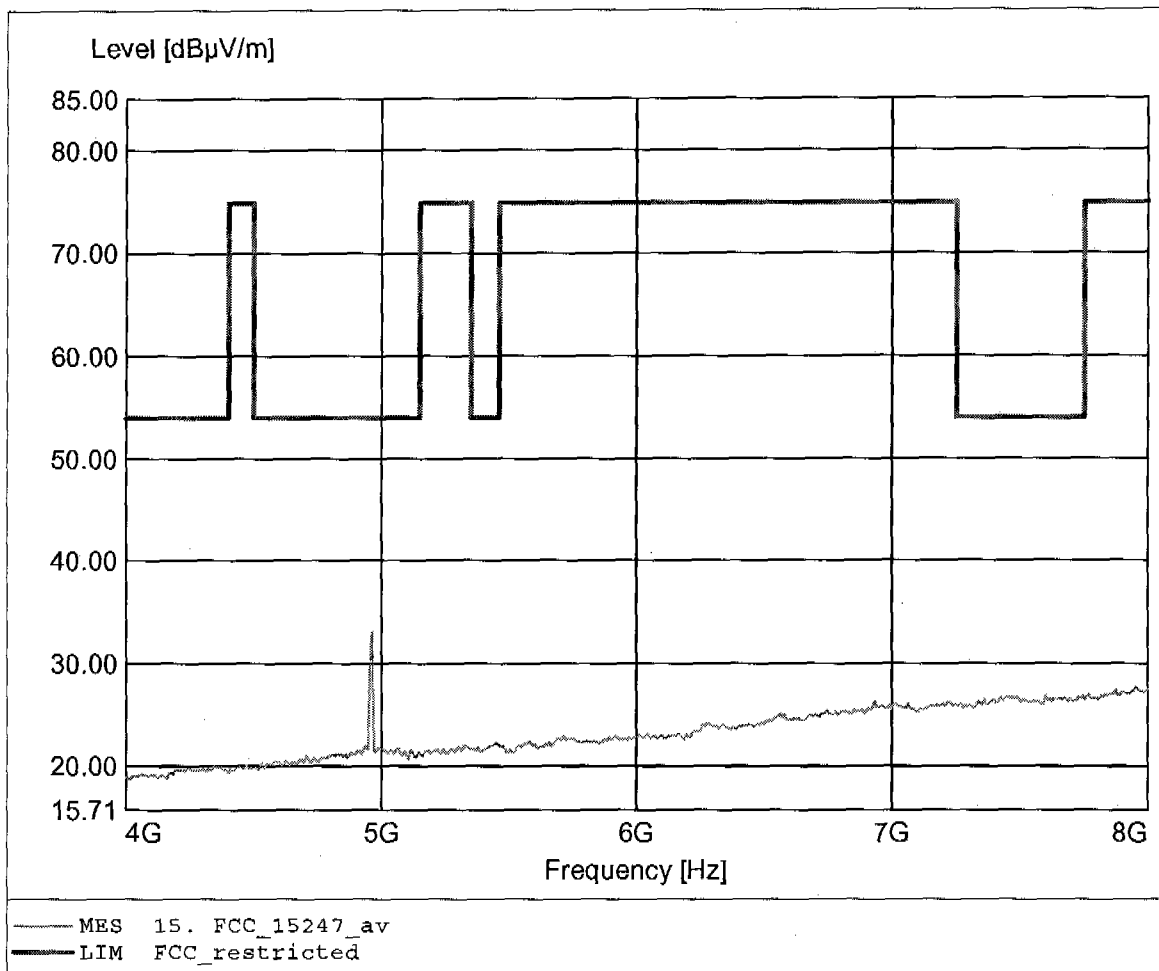

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 54.47dBuV/m, RBW: 1MHz

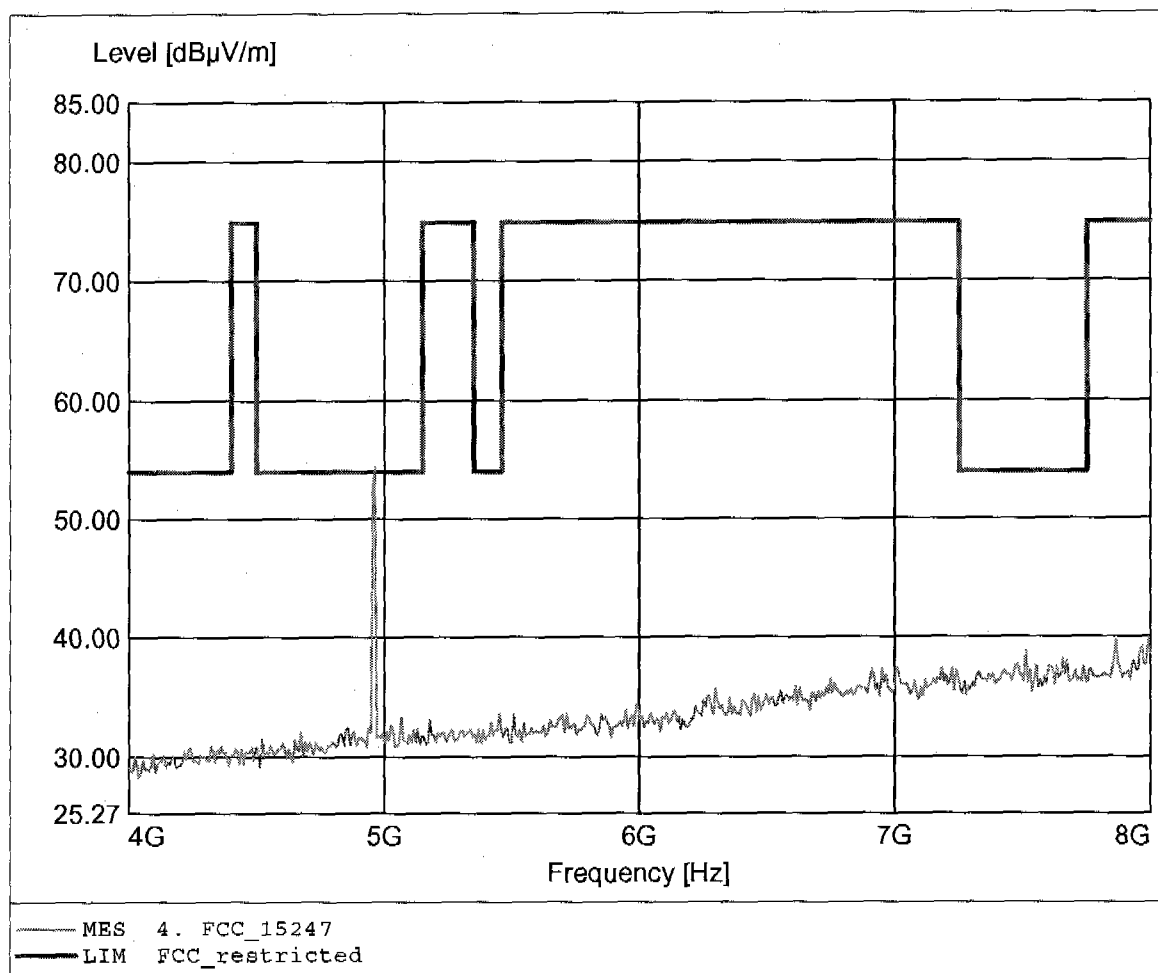

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 54.47dBuV/m, RBW: 1MHz

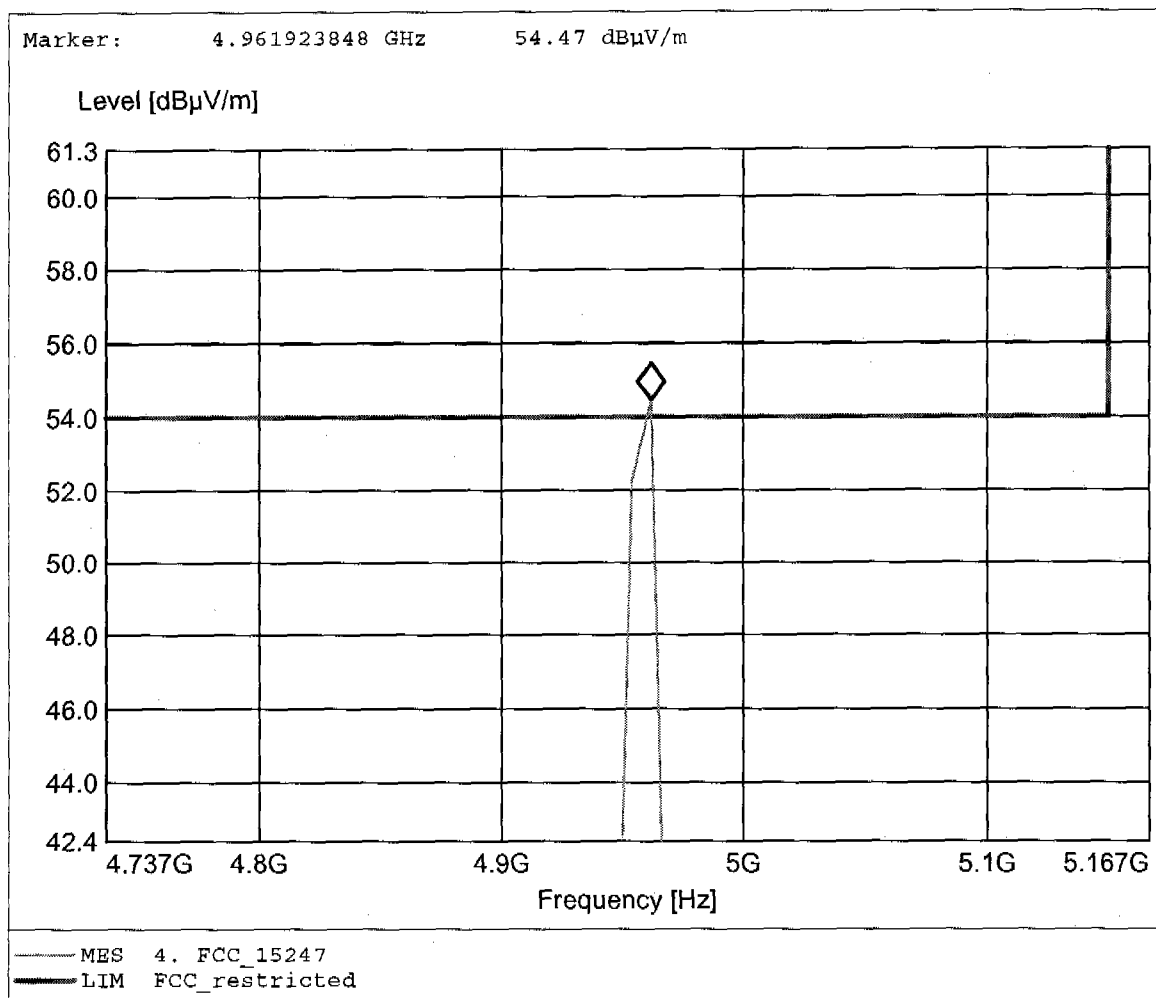

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 29.52dBuV/m, RBW: 1MHz

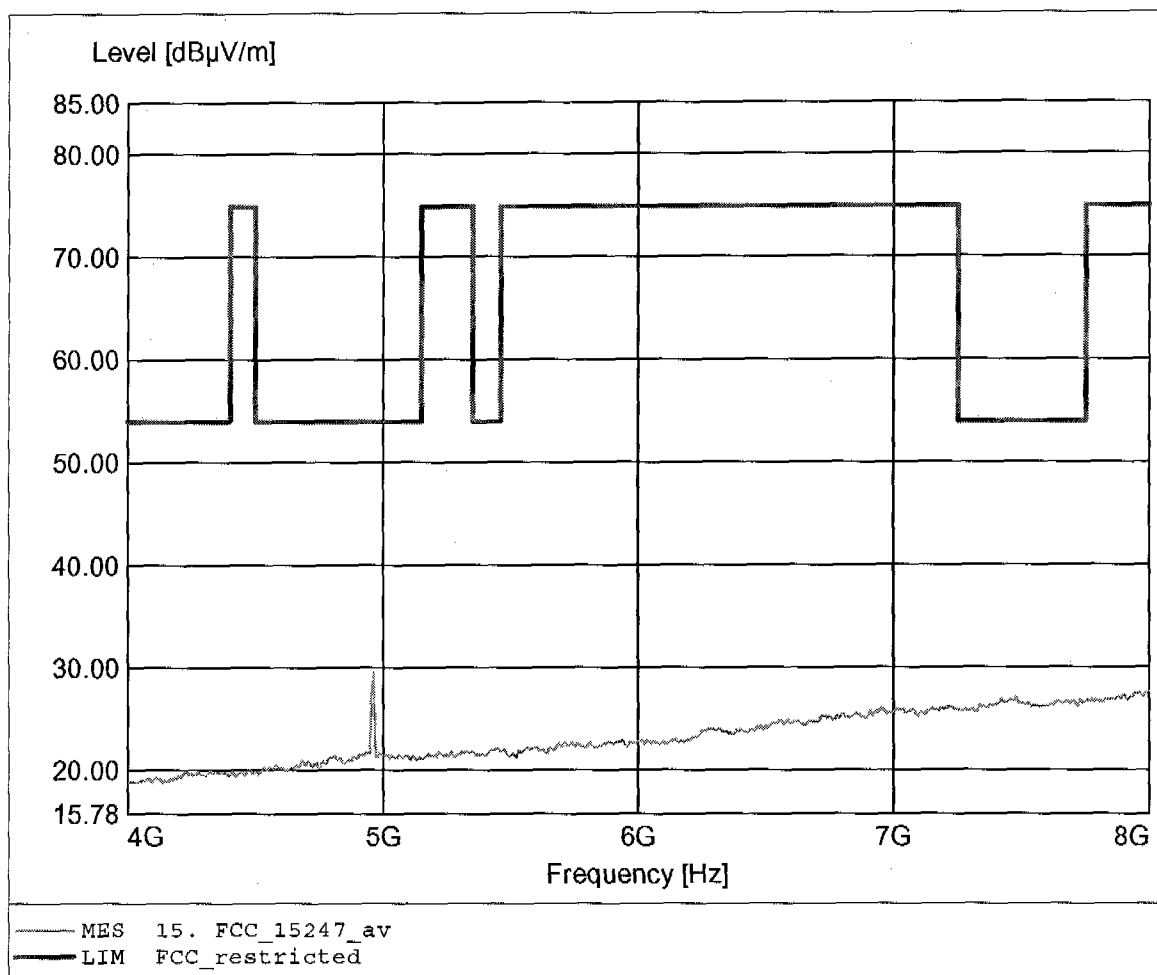

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.391GHz, Emax: 41.99dBµV/m, RBW: 1MHz

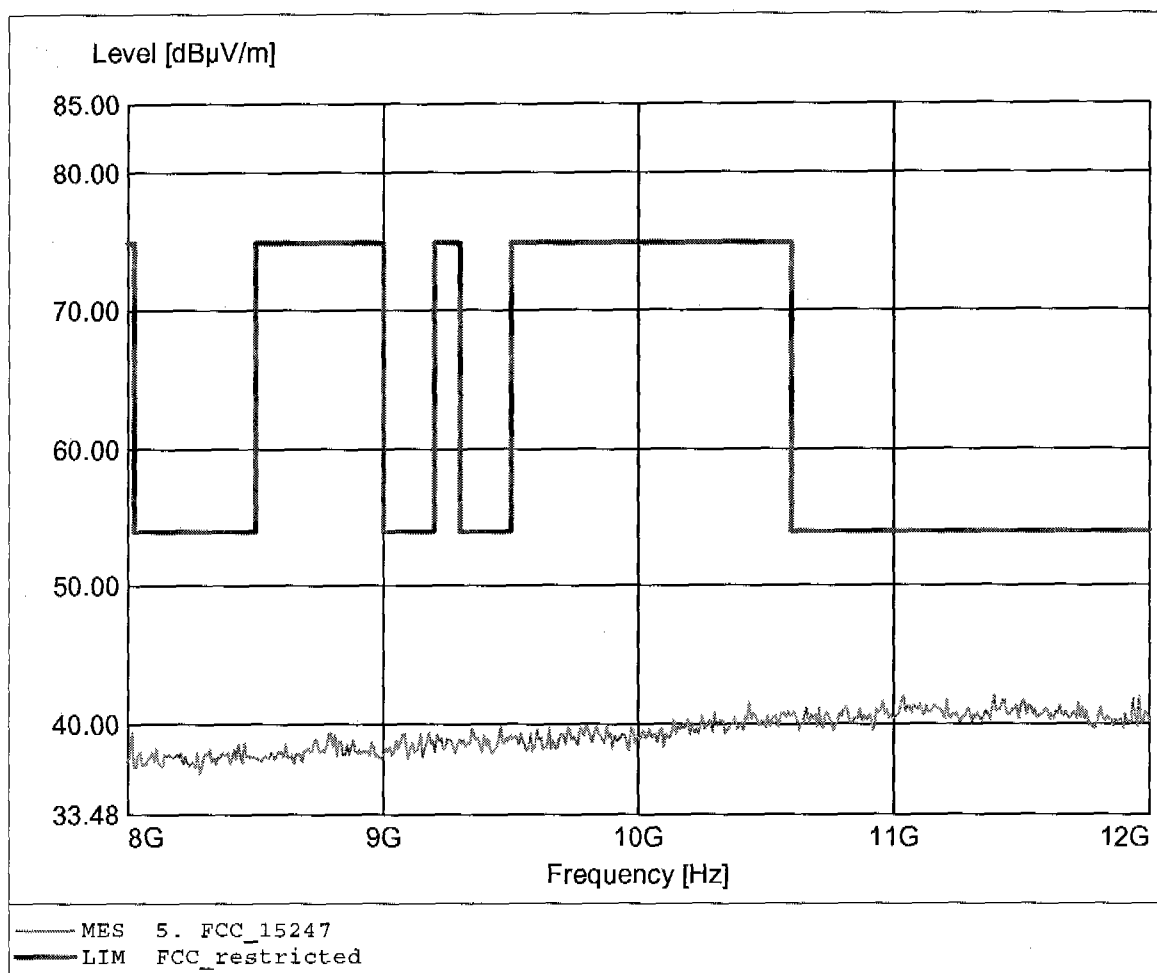

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.102GHz, Emax: 42.54dBμV/m, RBW: 1MHz

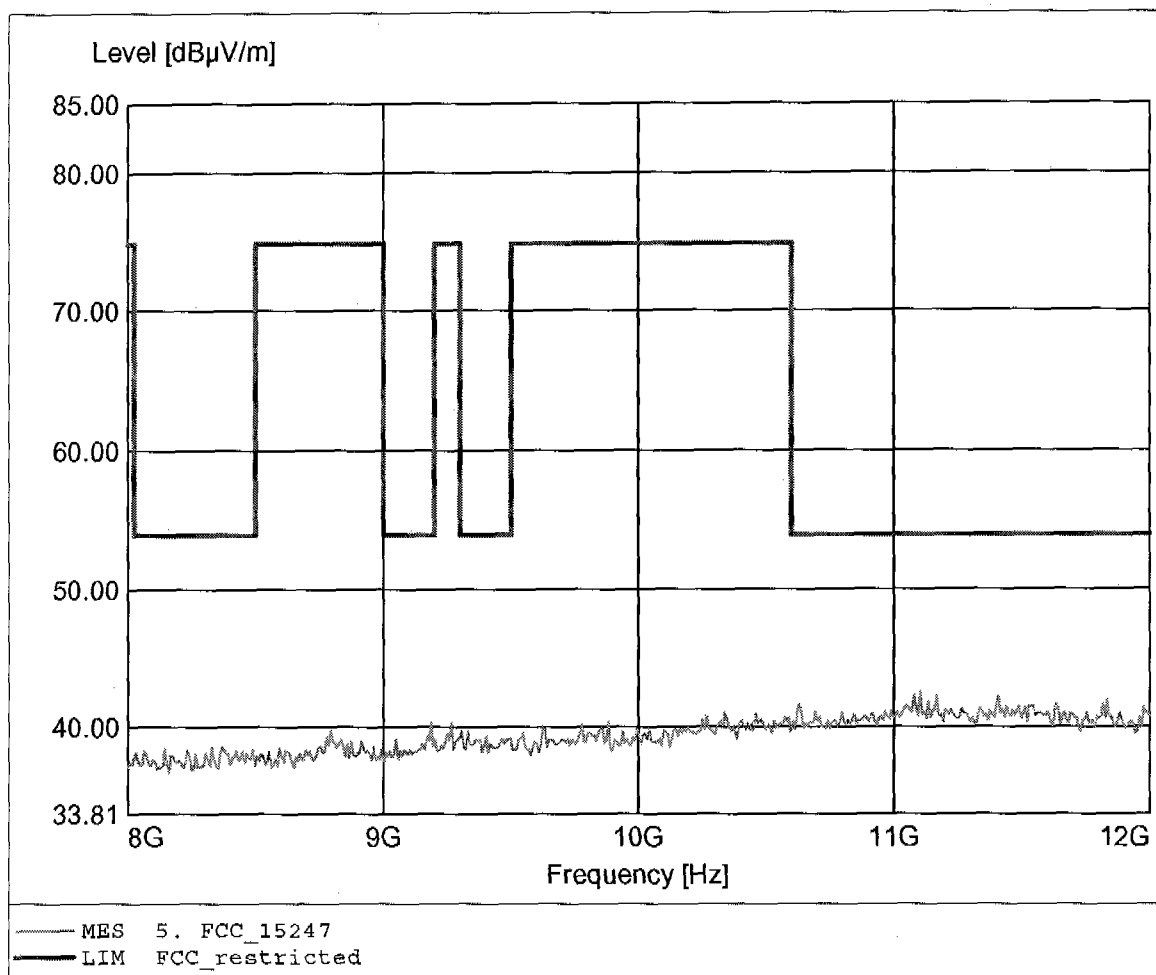

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.675GHz, Emax: 44.92dBuV/m, RBW: 1MHz

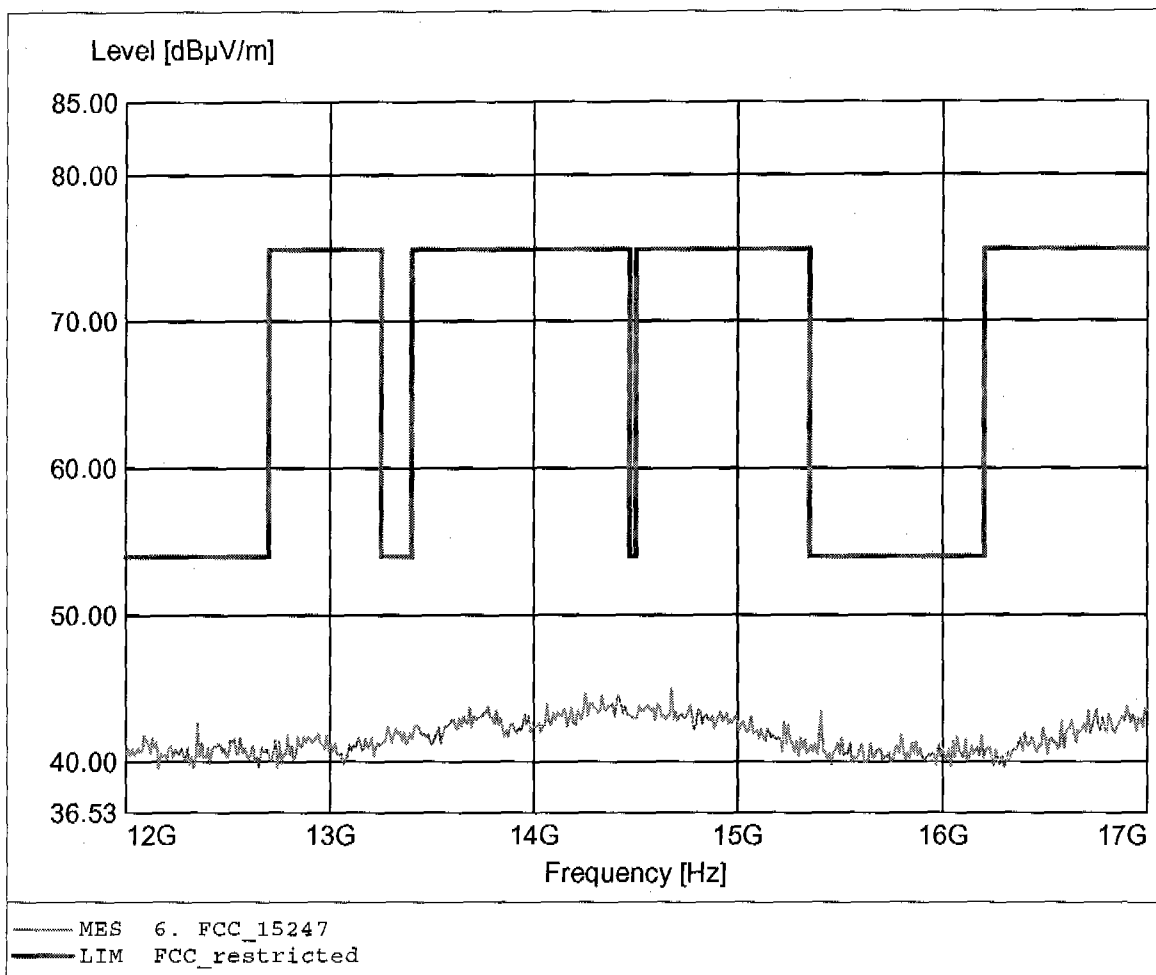

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.605GHz, Emax: 45.65dBuV/m, RBW: 1MHz

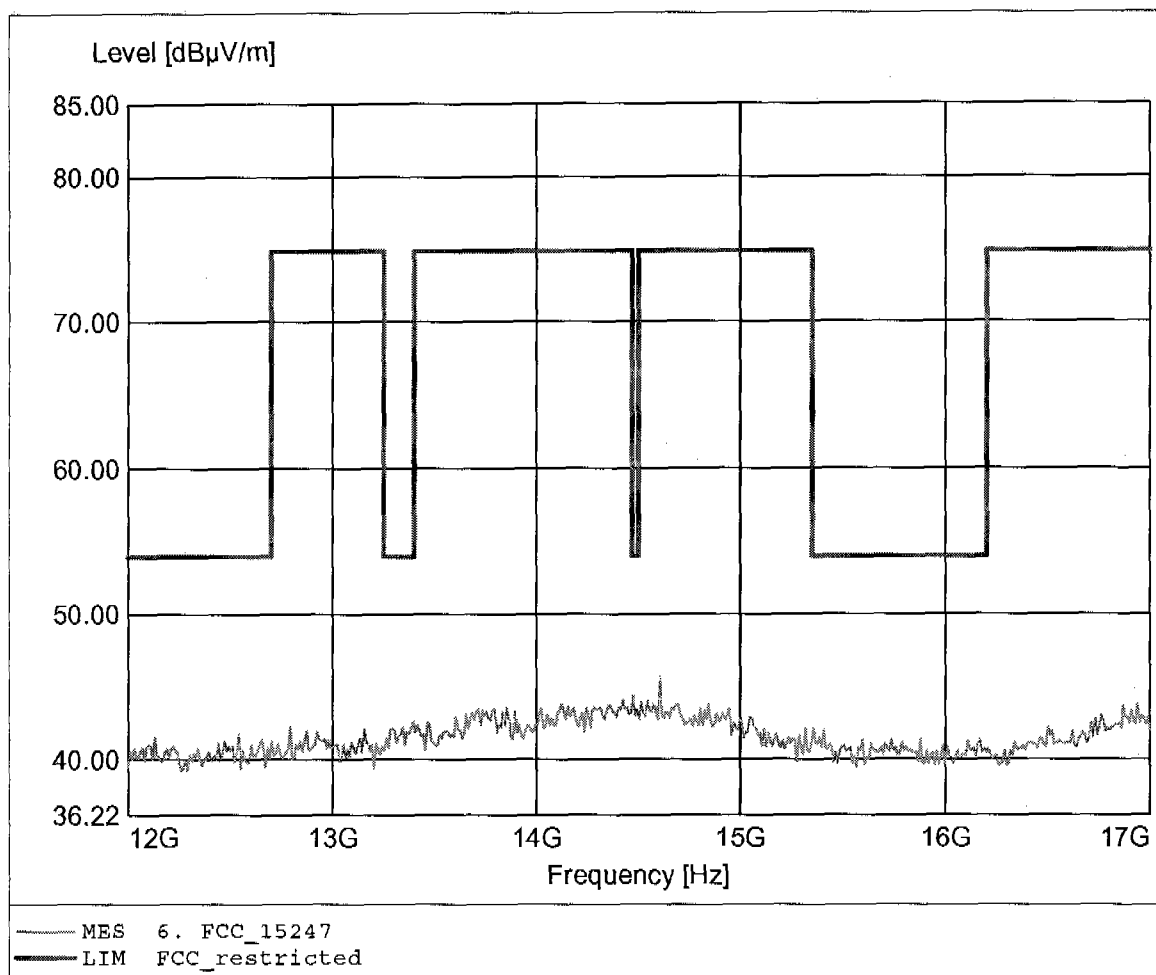

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.171GHz, Emax: 45.31dBuV/m, RBW: 1MHz

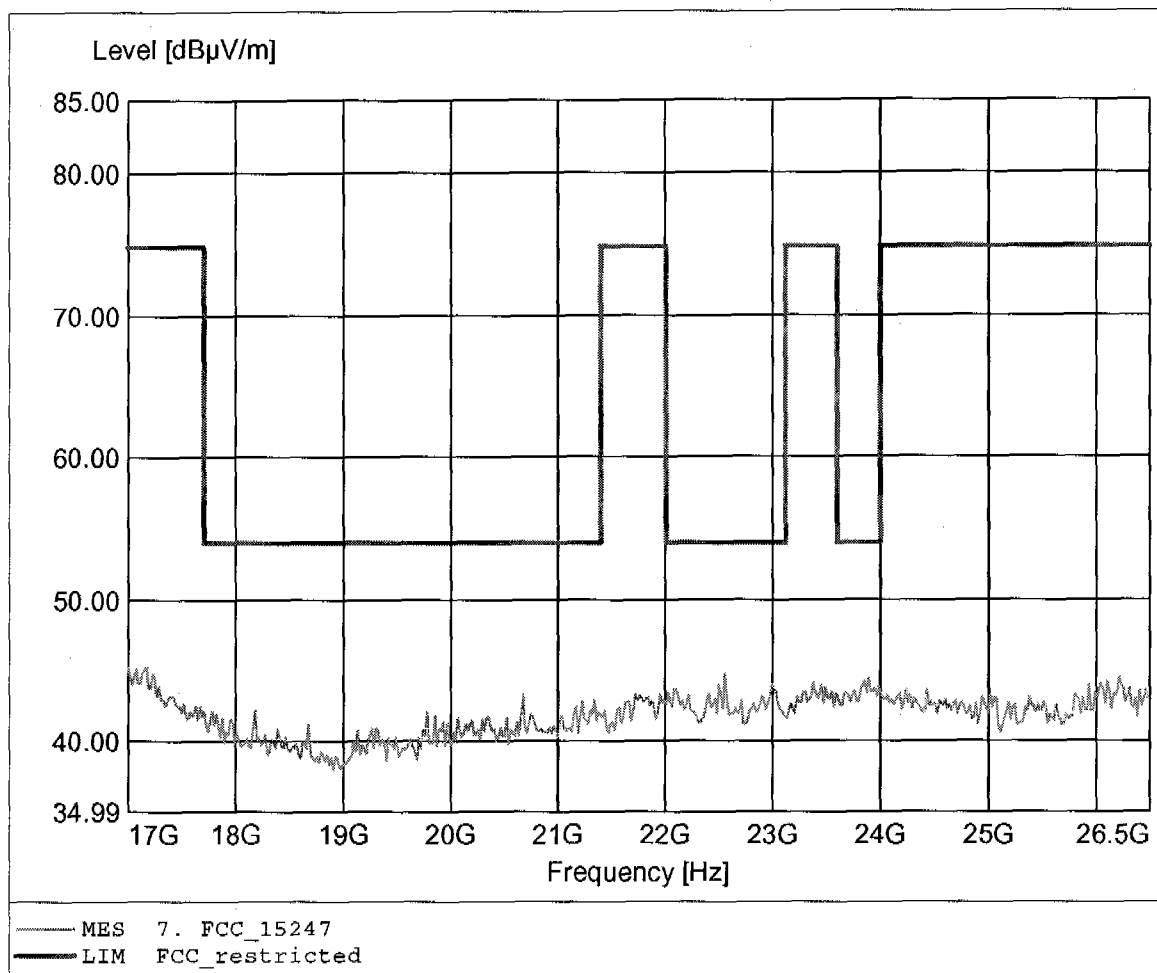

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

Approval Holder: Cellpoint Connect APS
EUT: Headset using Bluetooth Wireless Technology
Model: FLA-01 / Pmax / 2480 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.7 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 45.00dBμV/m, RBW: 1MHz

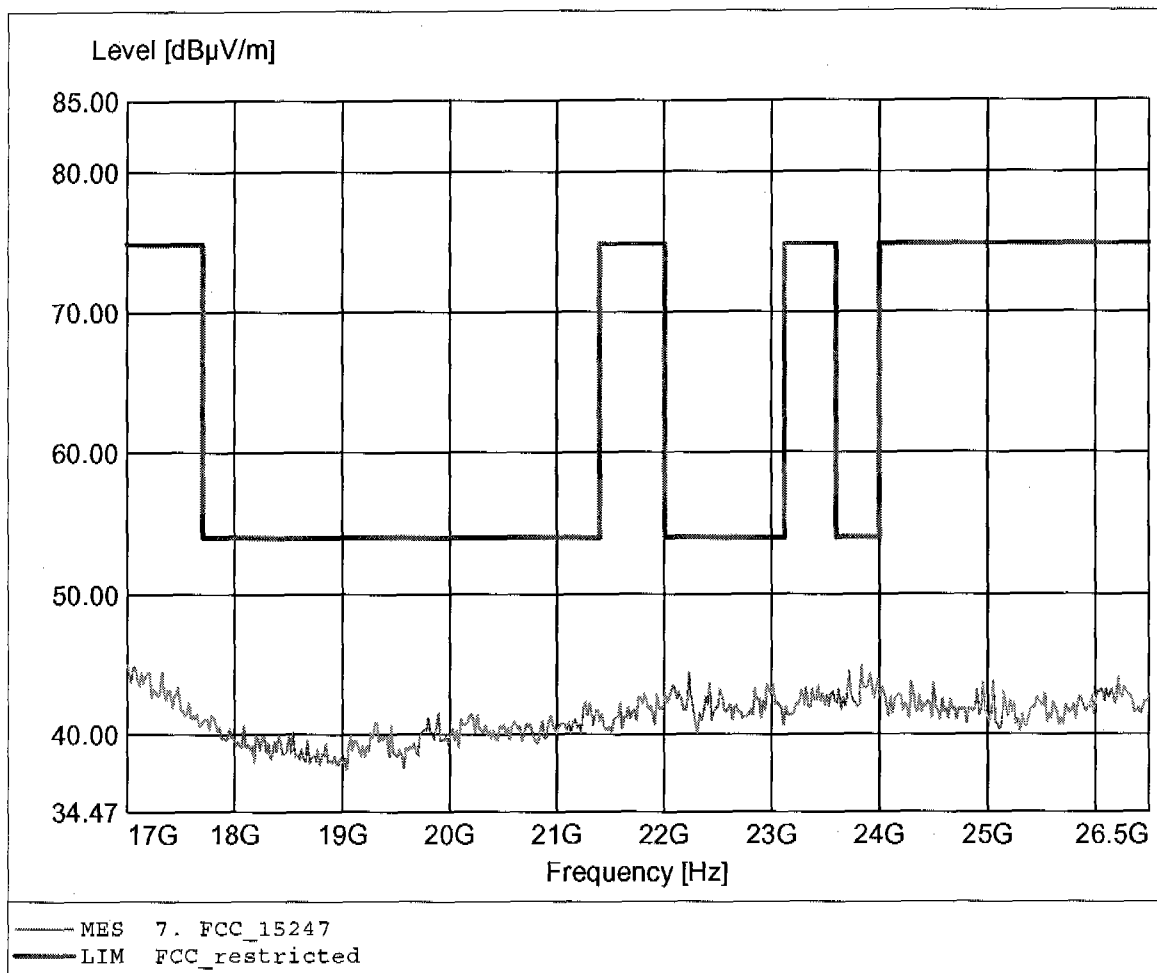

Appendix D


Spurious Emissions conducted - Transmitter operating

Appendix E

Carrier Frequency Separation



Delta 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl 0.02 dB VBW 100 kHz
10 dBm 1.00080160 MHz SWT 5 ms Unit dBm

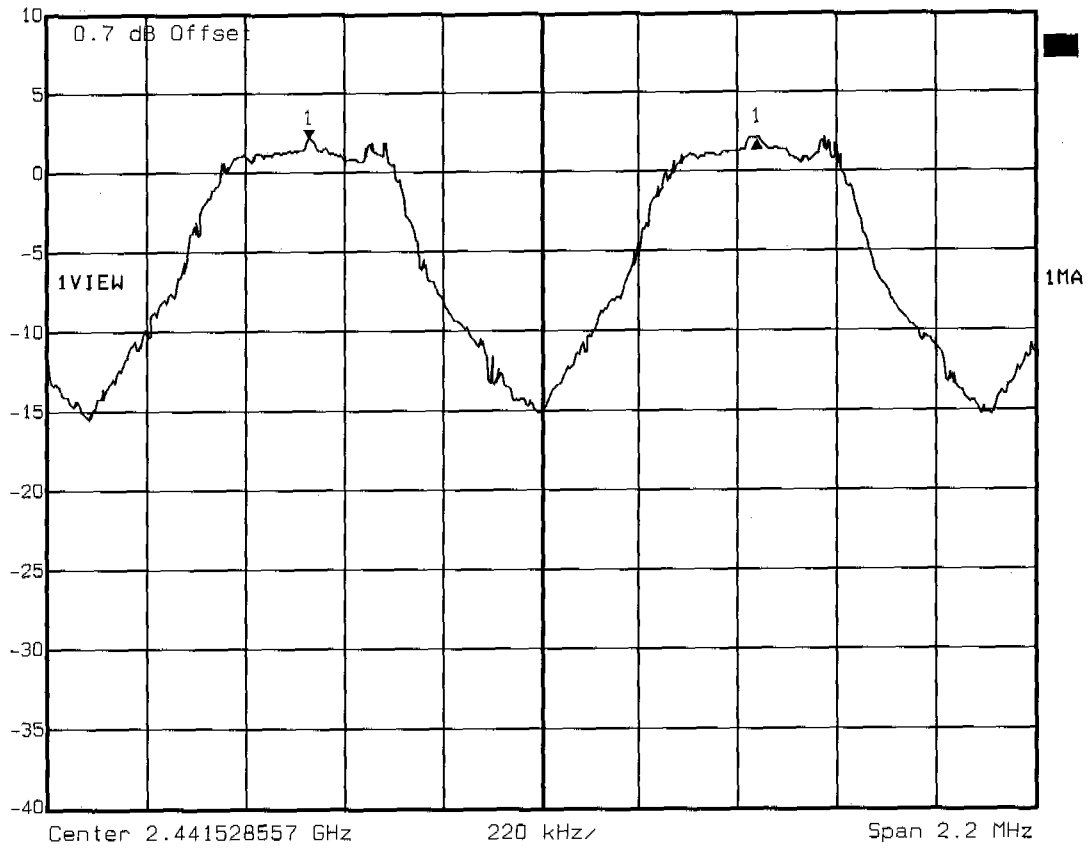

Title: Carrier Frequency Separation
Comment A: FLA-01
Date: 14.APR.2005 12:39:32


Appendix F

Number of Hopping Frequencies



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

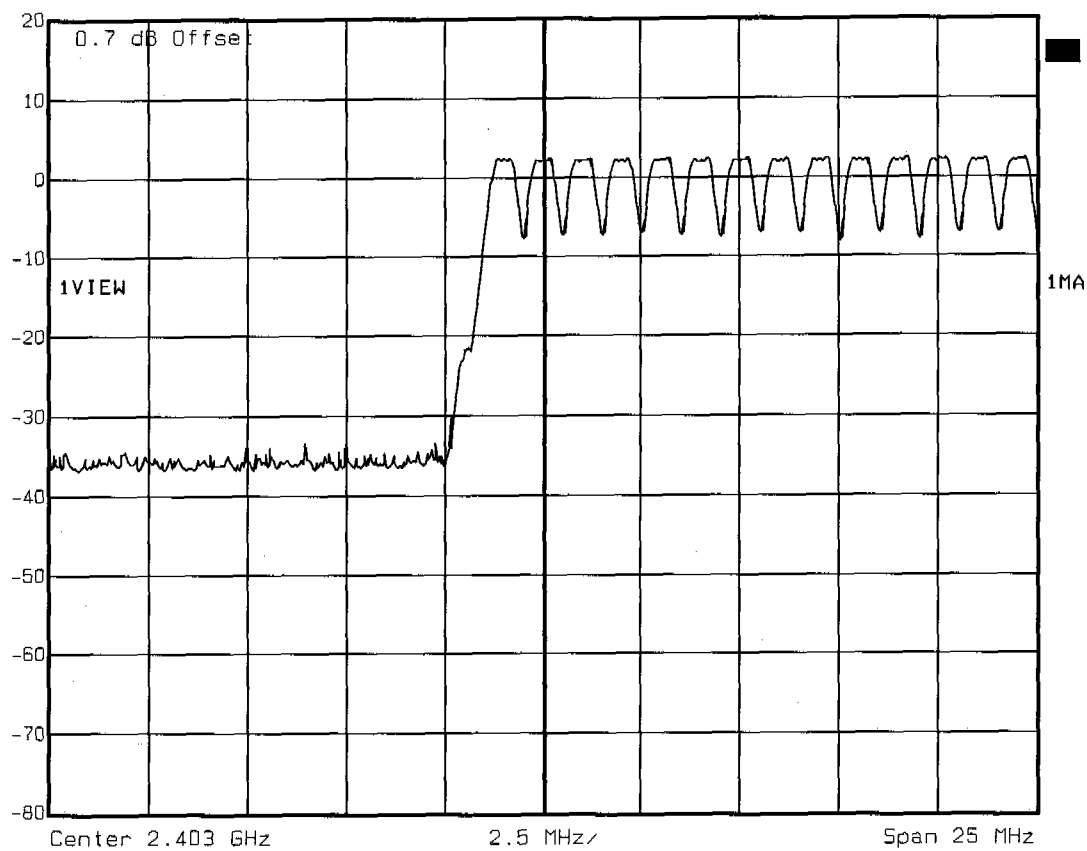


Title: Number of Hopping Frequencies Ch.: 0-13
Comment A: FLA-01
Date: 14.APR.2005 12:43:18



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

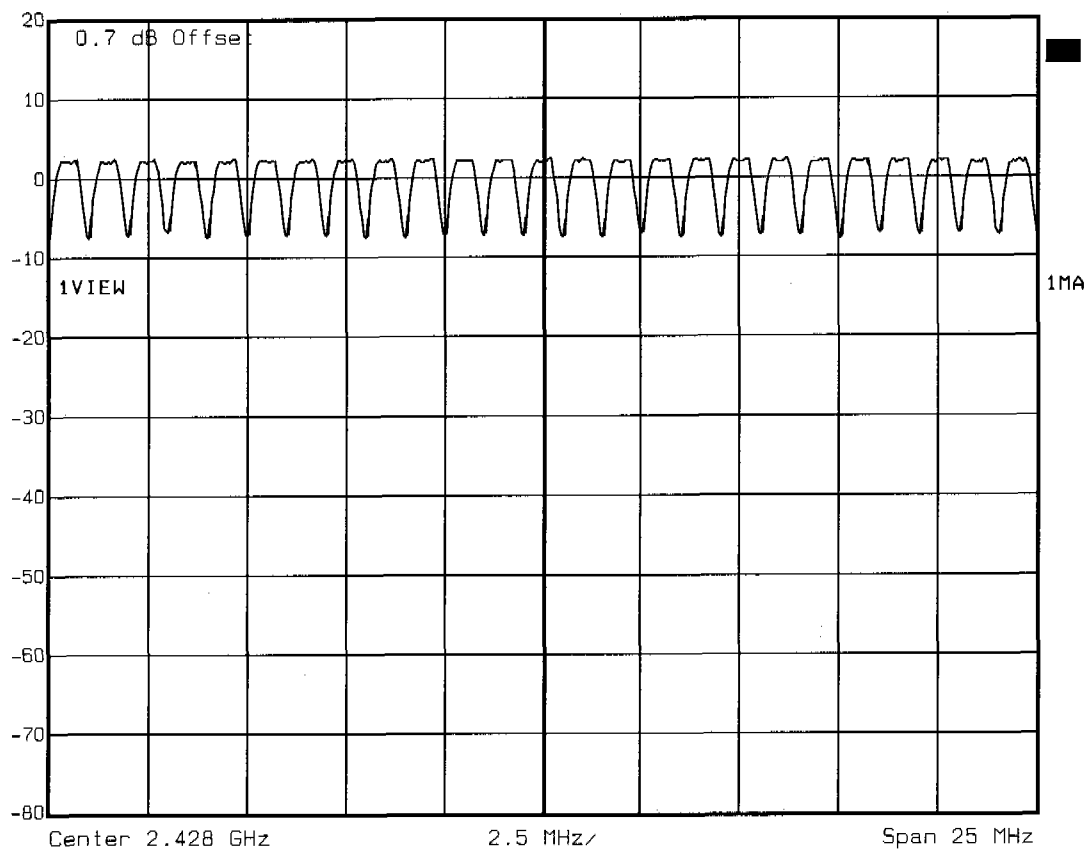


Title: Number of Hopping Frequencies Ch.: 14-38
Comment A: FLA-01
Date: 14.APR.2005 12:47:51



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

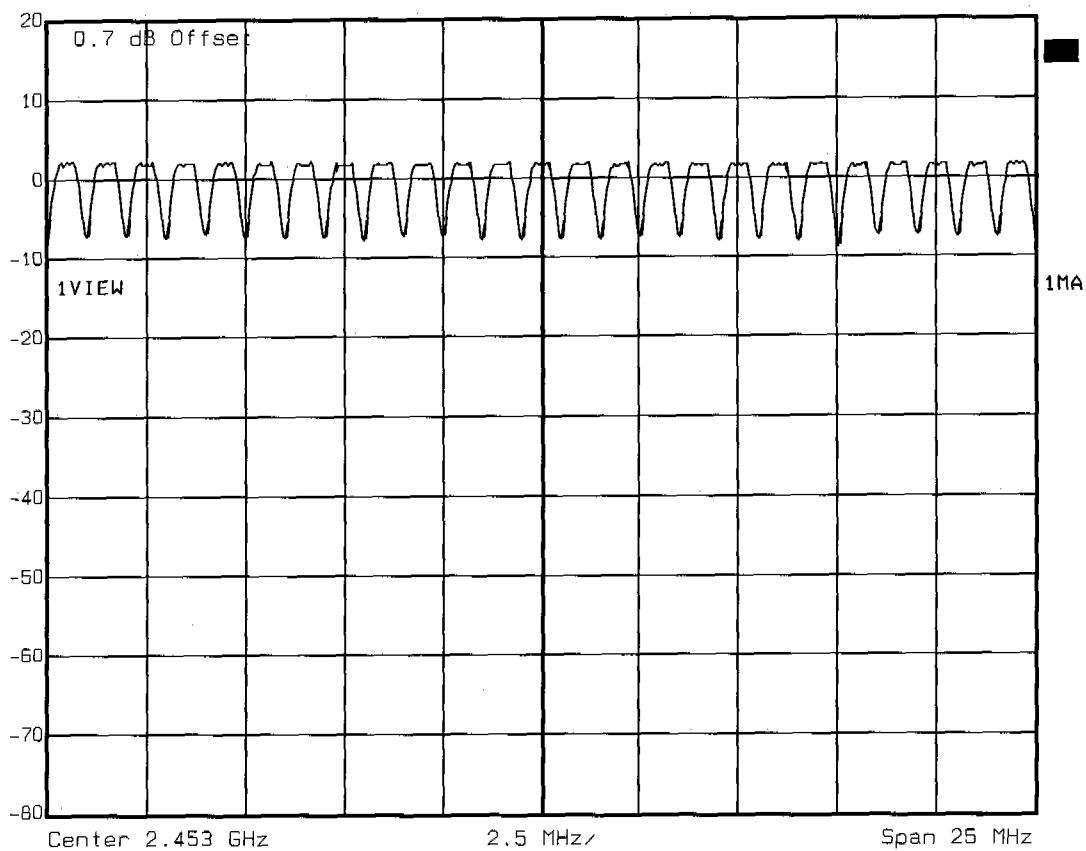


Title: Number of Hopping Frequencies Ch.: 39-63
Comment A: FLA-01
Date: 14.APR.2005 12:50:34



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

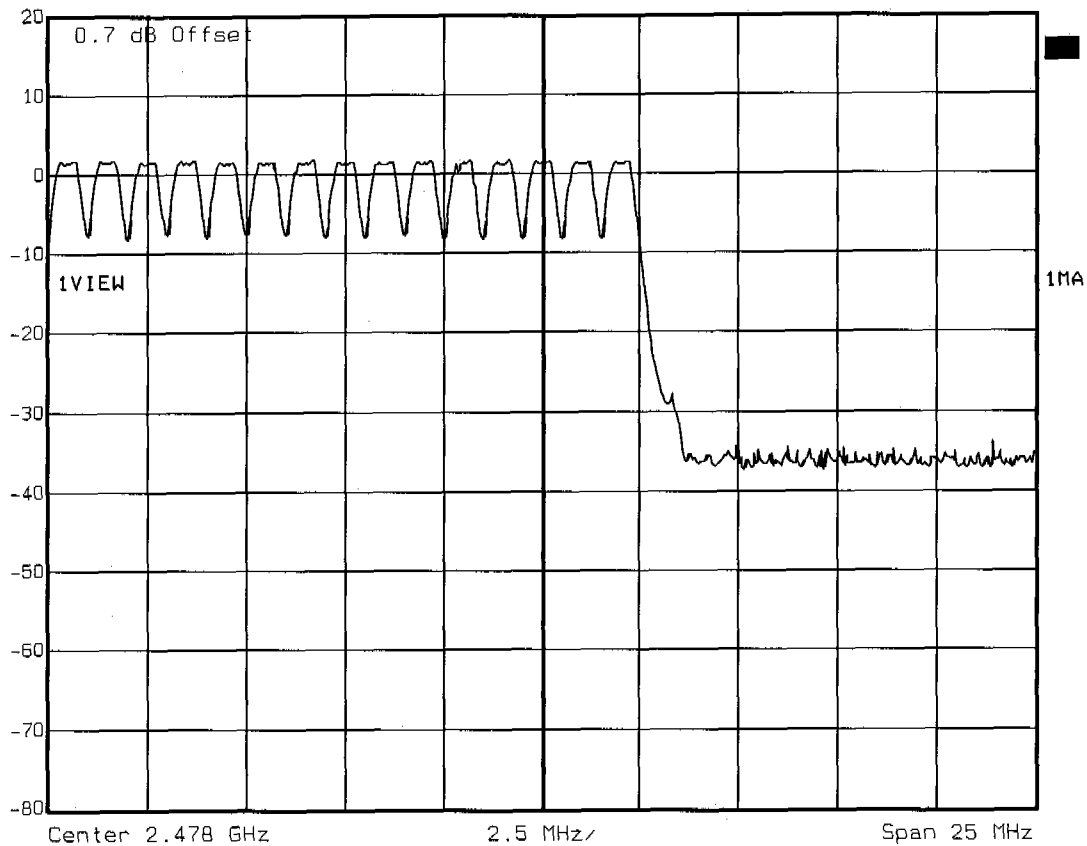


Title: Number of Hopping Frequencies Ch.: 64-78
Comment A: FLA-01
Date: 14.APR.2005 12:52:49

Appendix G

Time of Occupancy (Dwell Time)



Delta 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl -0.36 dB VBW 1 MHz
10 dBm 2.915832 ms SWT 5 ms Unit dBm

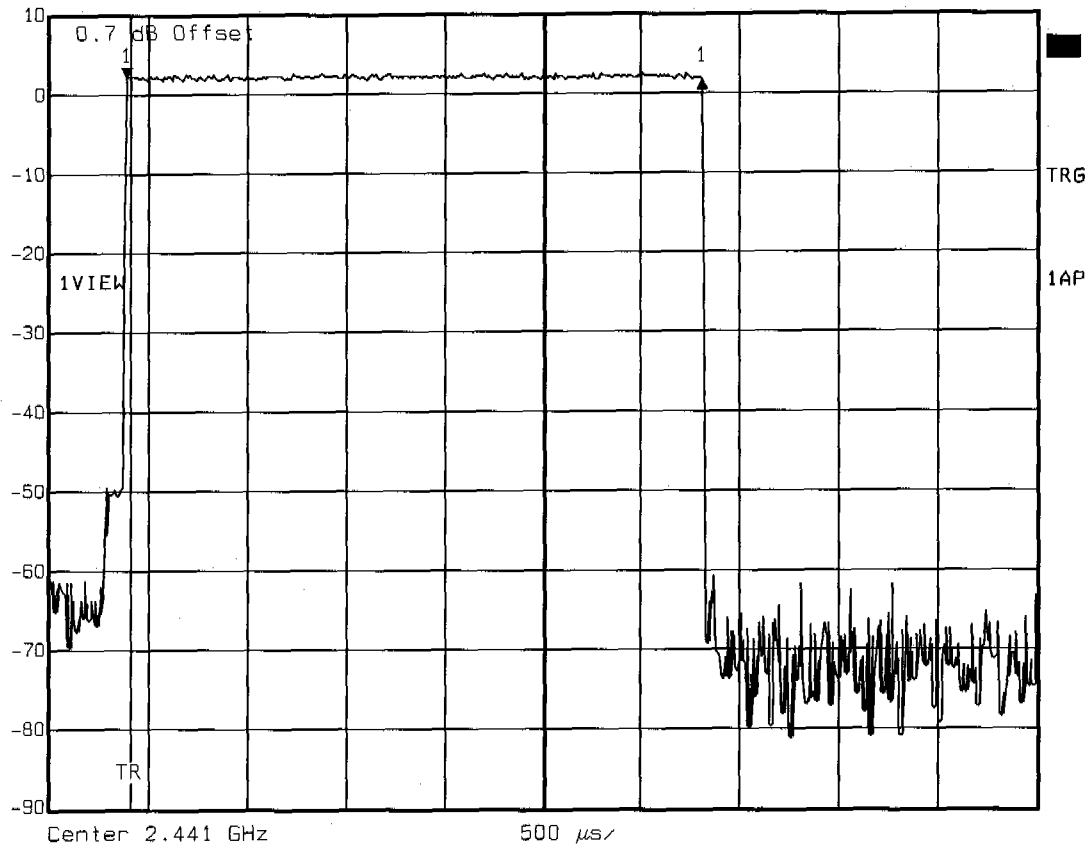


Title: Time of occupancy (Hopping DH5) 64 events * 2.916ms=186.62ms
Comment A: FLA-01
Date: 14.APR.2005 13:04:23

Appendix H

20dB Bandwidth




Delta 1 [T1] RBW 10 kHz RF Att 30 dB
Ref Lvl -0.63 dB VBW 10 kHz
10 dBm 820.04008016 kHz SWT 56 ms Unit dBm

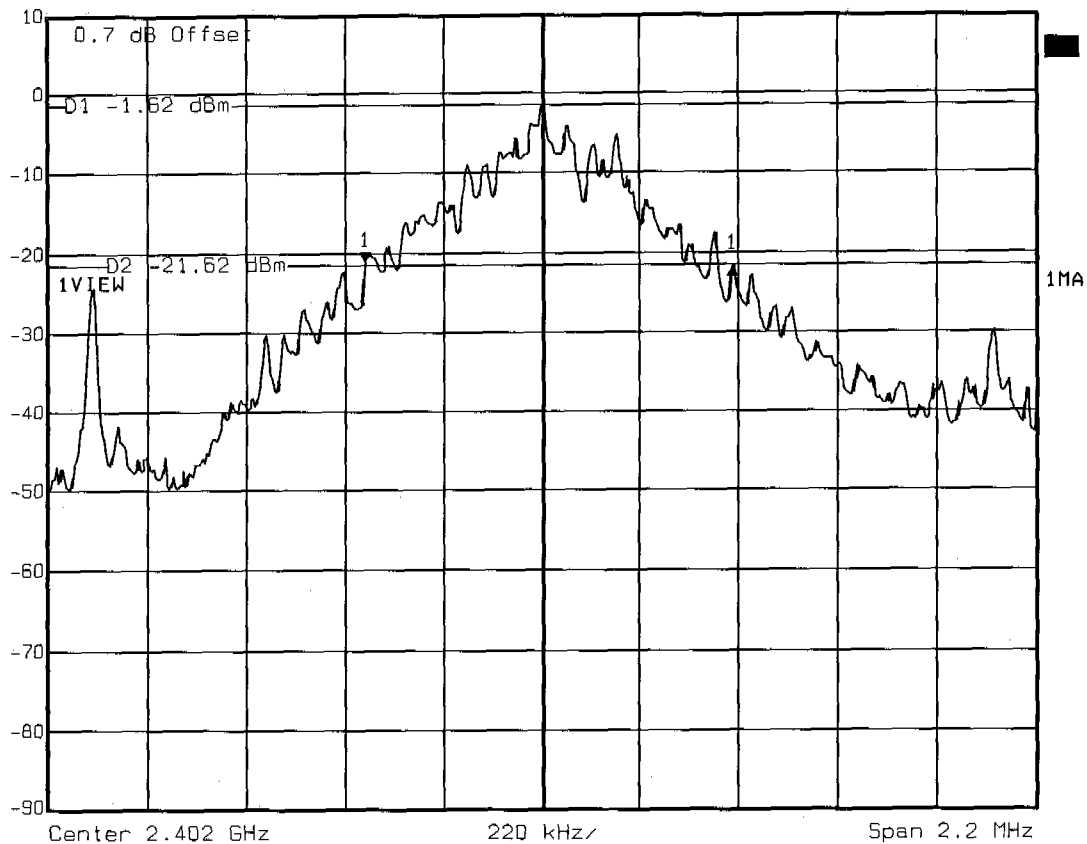

Title: -20 dB Bandwidth Ch.: 0
Comment A: FLA-01
Date: 14.APR.2005 09:33:33




Delta 1 [T1] RBW 10 kHz RF Att 30 dB
Ref Lvl -0.74 dB VBW 10 kHz
10 dBm 824.44889780 kHz SWT 56 ms Unit dBm

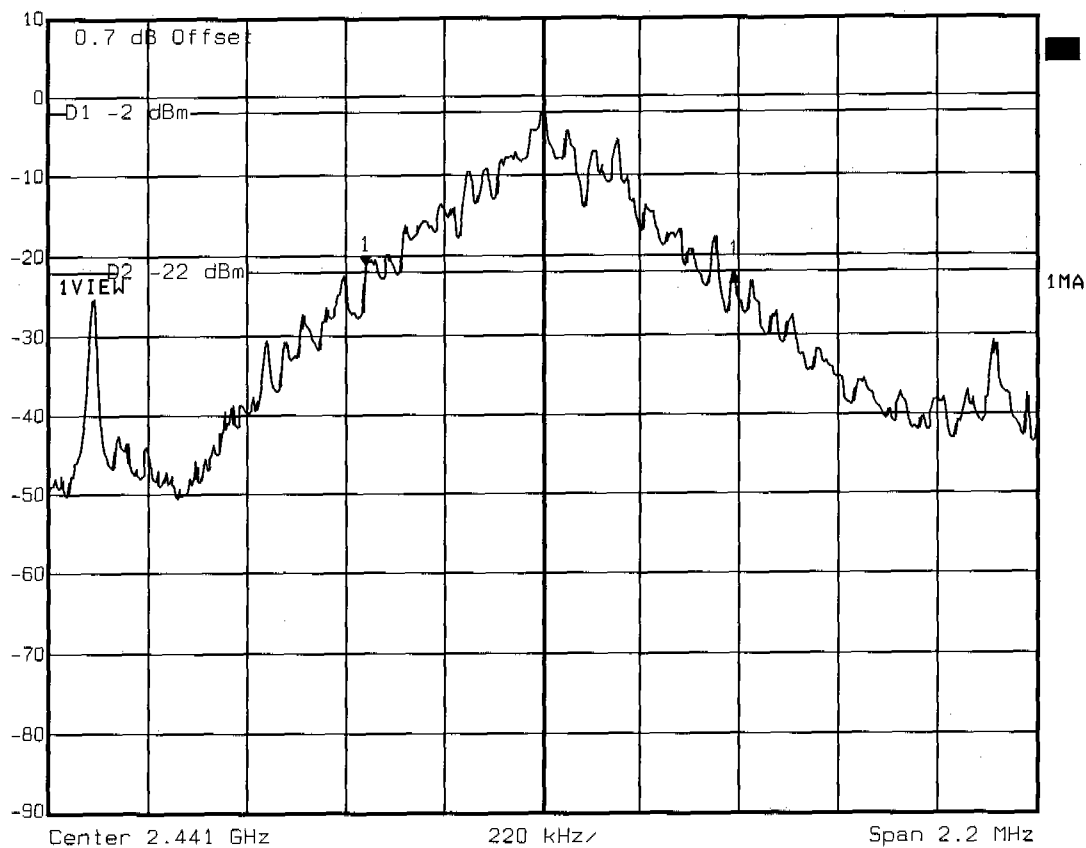

Title: -20 dB Bandwidth Ch.: 39
Comment A: FLA-01
Date: 14.APR.2005 09:32:00



Delta 1 [T1] RBW 10 kHz RF Att 30 dB
Ref Lvl -0.22 dB VBW 10 kHz
10 dBm 820.04008016 kHz SWT 56 ms Unit dBm

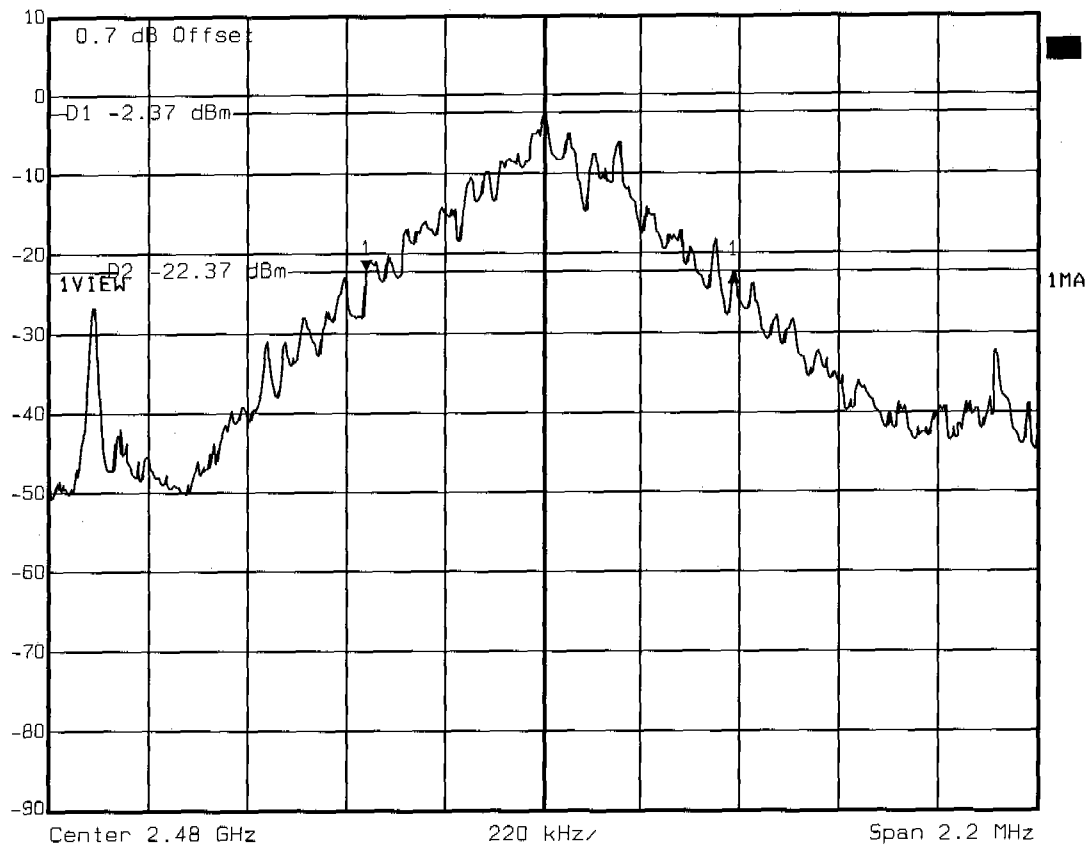


Title: -20 dB Bandwidth Ch.: 78
Comment A: FLA-D1
Date: 14.APR.2005 09:30:07

Appendix I

Band-edge Compliance of RF Emissions




Delta 1 [T1] RBW 50 kHz RF Att 40 dB
Ref Lvl 39.77 dB VBW 50 kHz
20 dBm 2.01733467 MHz SWT 5 ms Unit dBm

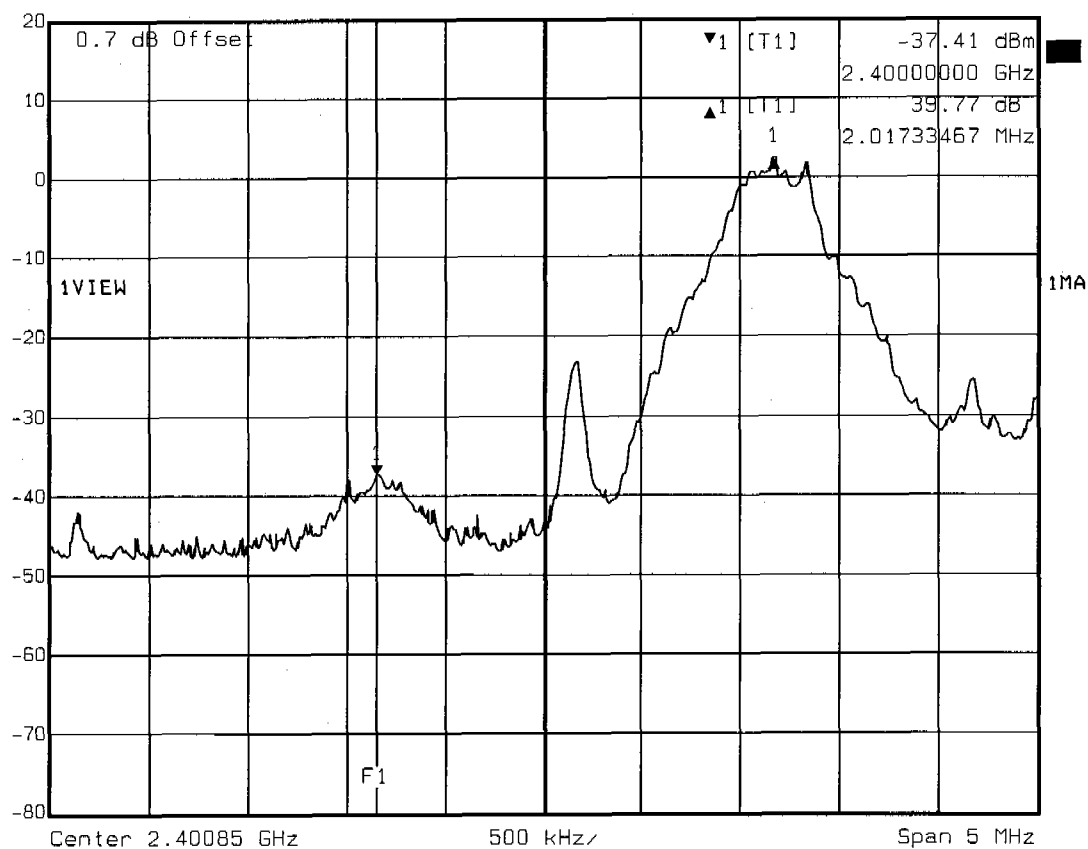

Title: Band-edge Compliance (conducted, single frequency)
Comment A: FLA-01
Date: 14.APR.2005 10:29:08




Delta 1 [T1] RBW 50 kHz RF Att 40 dB
Ref Lvl 39.19 dB VBW 50 kHz
20 dBm -3.47743487 MHz SWT 5 ms Unit dBm

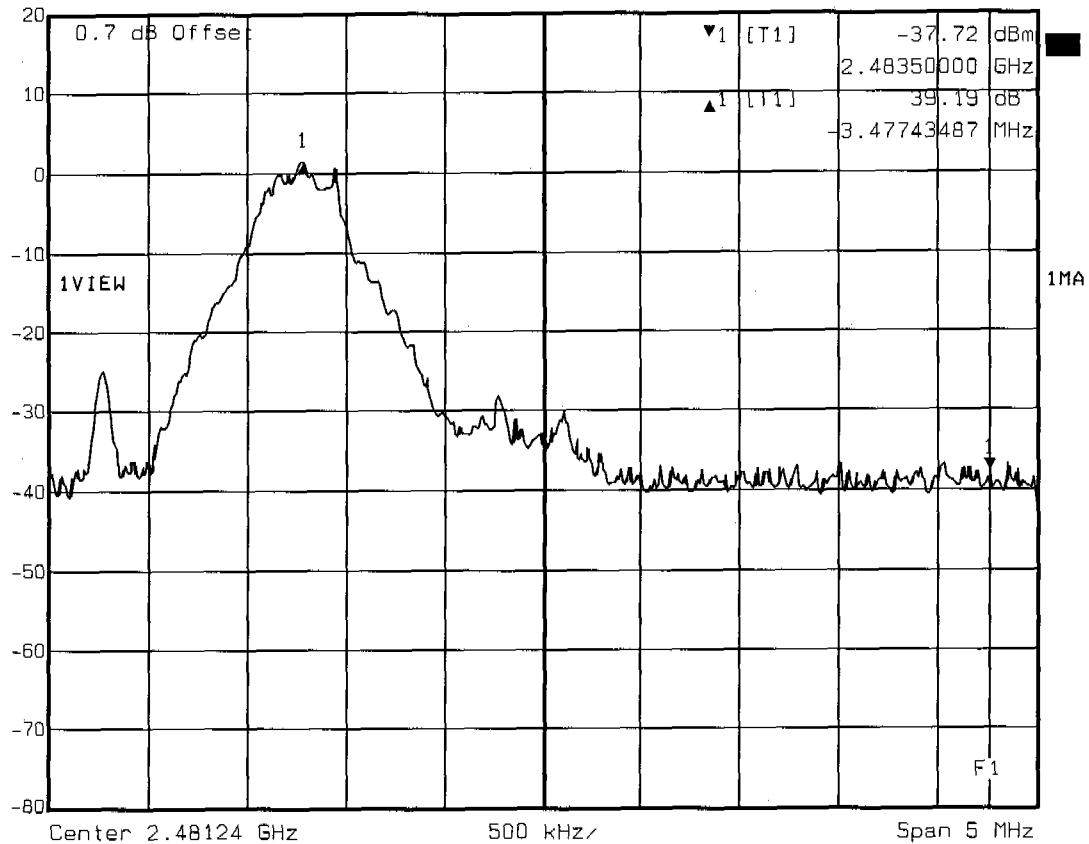

Title: Band-edge Compliance (conducted, single frequency)
Comment A: FLA-01
Date: 14.APR.2005 10:30:26




Delta 1 [T1] RBW 50 kHz RF Att 40 dB
Ref Lvl 40.64 dB VBW 50 kHz
20 dBm 2.11322645 MHz SWT 5 ms Unit dBm

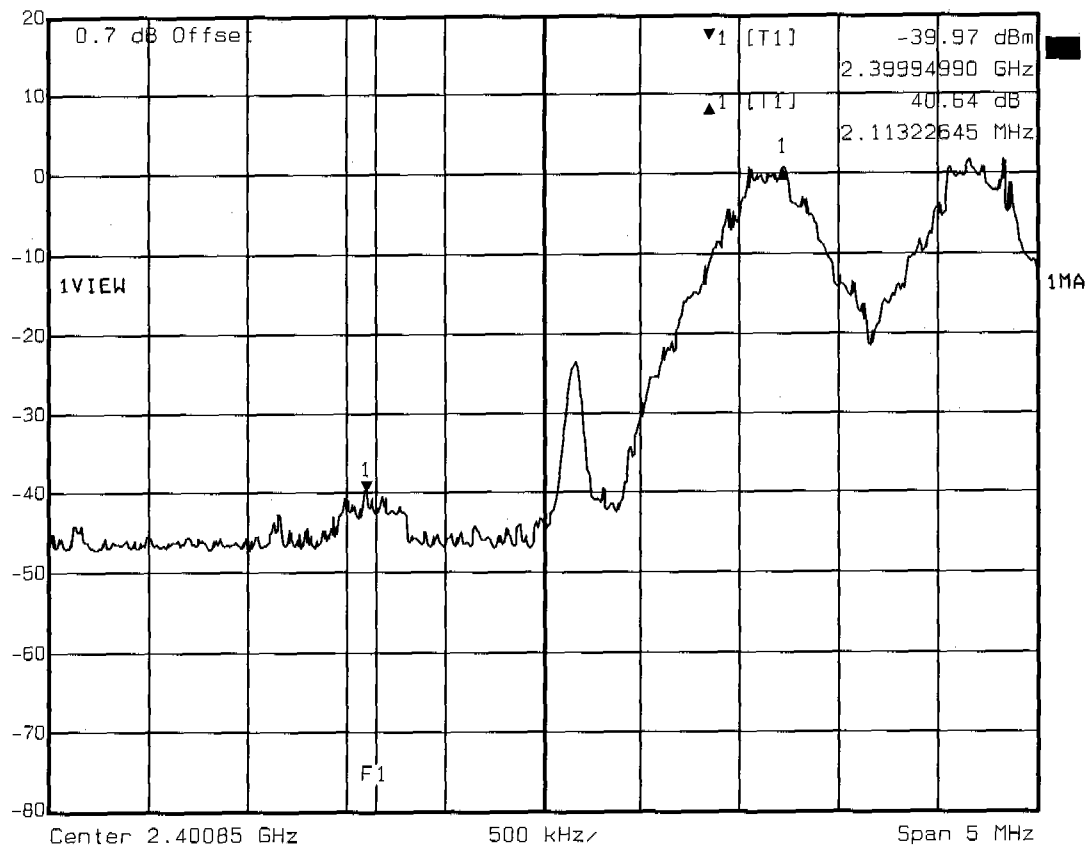

Title: Band-edge Compliance (conducted, hopping mode)
Comment A: FLA-01
Date: 14.APR.2005 12:02:03



Delta 1 [T1] RBW 50 kHz RF Att 40 dB
Ref Lvl 38.83 dB VBW 50 kHz
20 dBm -3.48124248 MHz SWT 5 ms Unit dBm

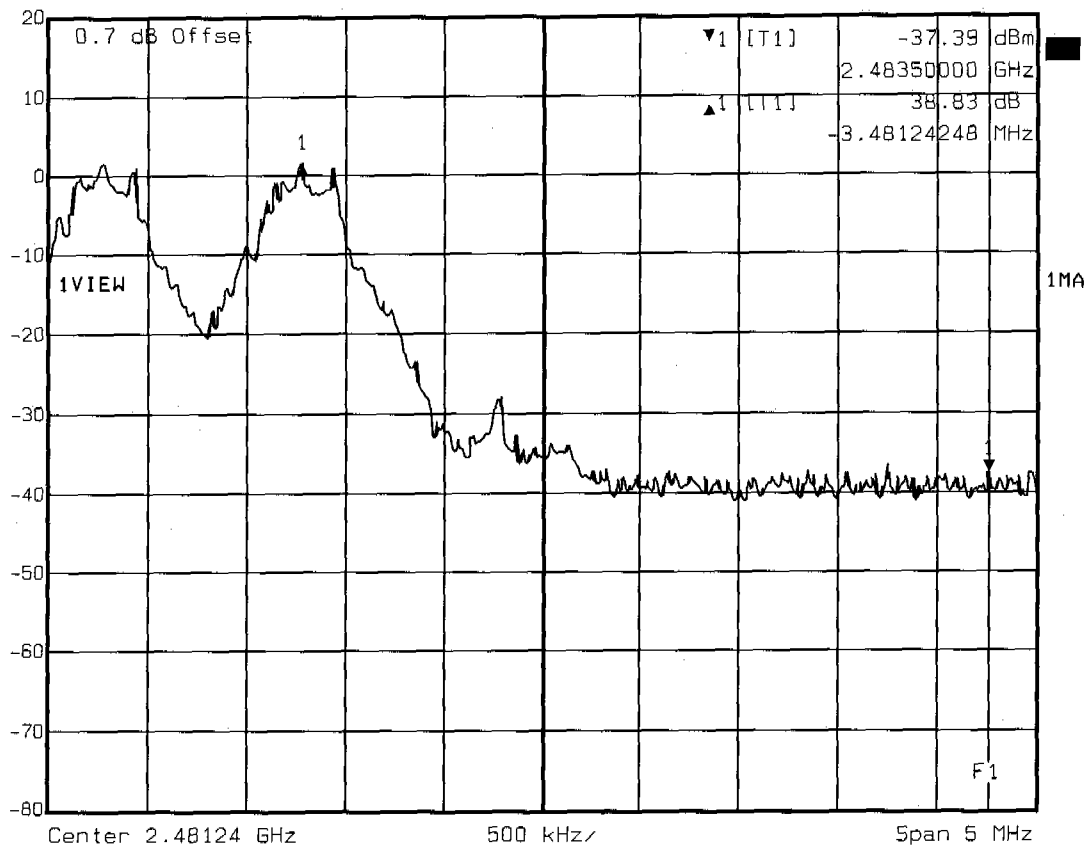


Title: Band-edge Compliance (conducted, hopping mode)
Comment A: FLA-01
Date: 14.APR.2005 12:11:54

Appendix J

Conducted Measurement at (AC) Power Line


EMI voltage test in the ac-mains according to FCC part 15

EUT: HEADSET USING BLUETOOTH WIRELESS TECHNOLOGY
Manufacturer: CELLPOINT CONNECT APS
Operating Condition: Unom: 120 V AC (AC/DC-ADAPTOR) , Thom: 23°C
Test Site: ETS
Operator: Mr. Fleischer
Test Specification: V-Network: ESH2-Z5 (L1)
Comment: model: FLA-01 mode: charging + link
ADAPTOR:SPS-01C5-0.25US

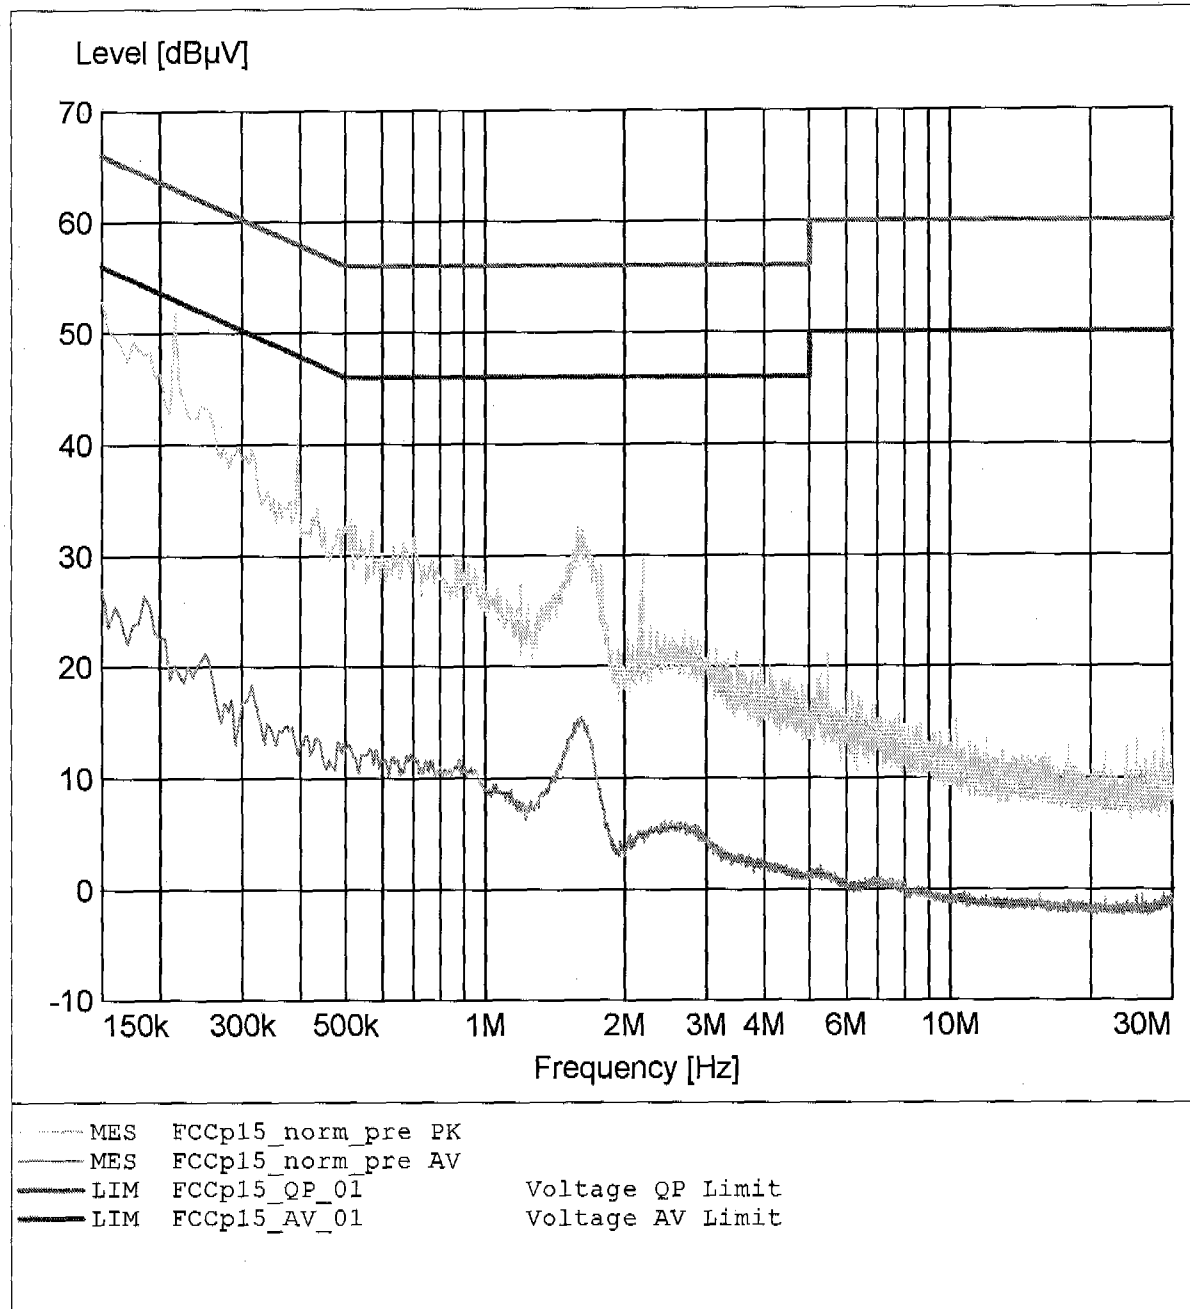


EMI voltage test in the ac-mains according to FCC part 15

EUT: HEADSET USING BLUETOOTH WIRELESS TECHNOLOGY
Manufacturer: CELLPOINT CONNECT APS
Operating Condition: Unom: 120 V AC (AC/DC-ADAPTOR) , Tnom: 23°C
Test Site: ETS
Operator: Mr. Fleischer
Test Specification: V-Network: ESH2-Z5 (N)
Comment: model: FLA-01 mode: charging + link
ADAPTOR:SPS-01C5-0.25US

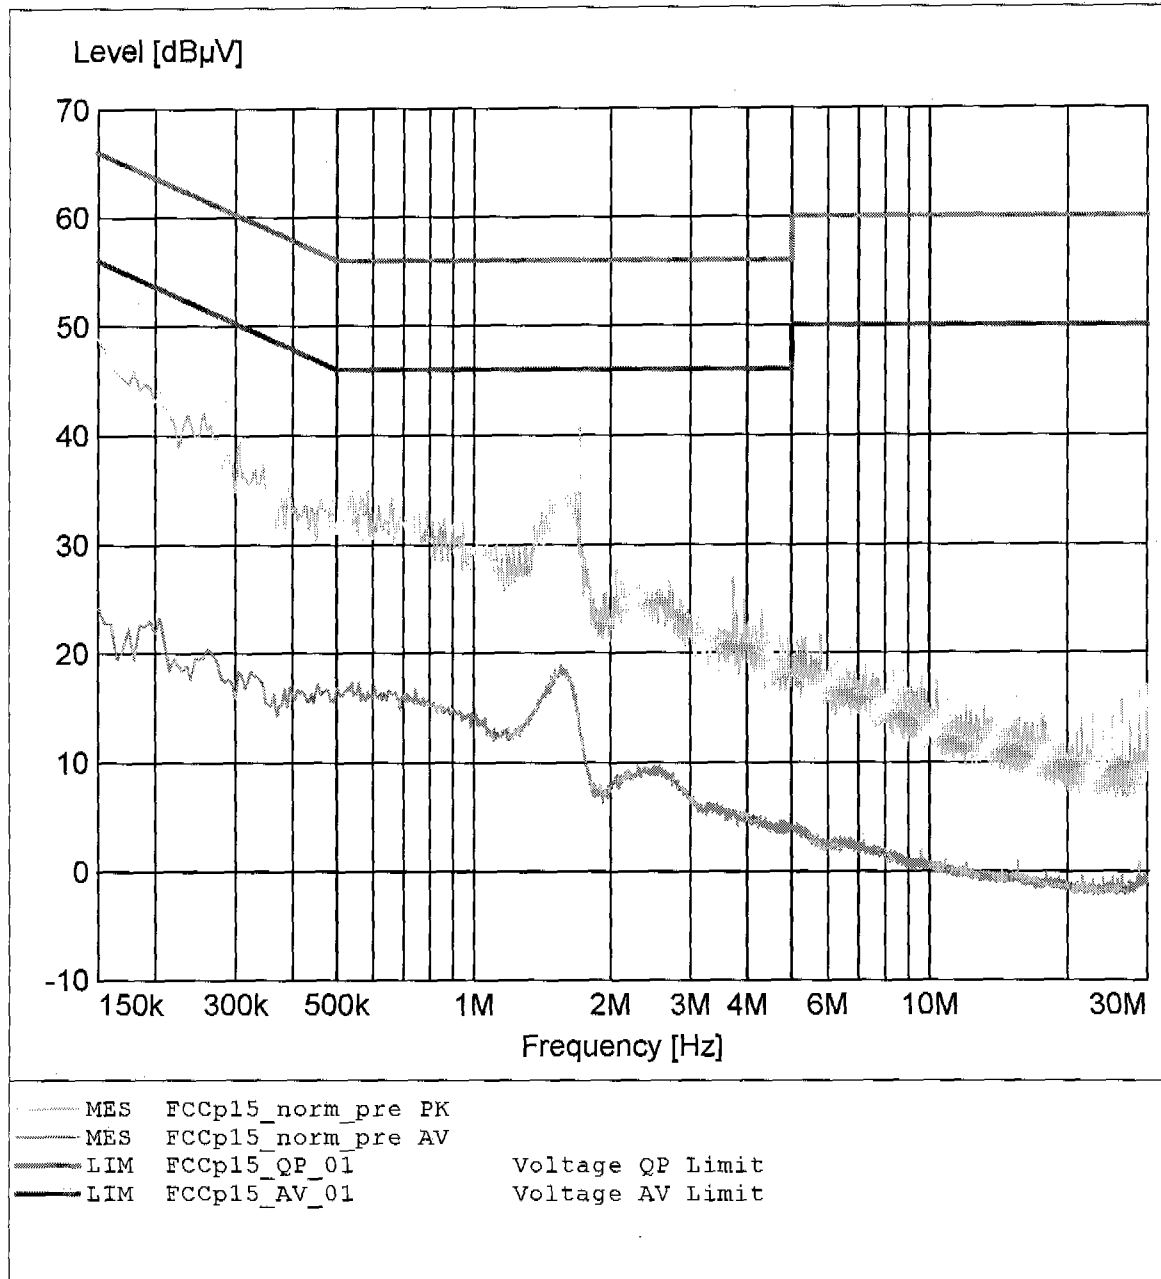

EMI voltage test in the ac-mains according to FCC part 15

EUT: HEADSET USING BLUETOOTH WIRELESS TECHNOLOGY
Manufacturer: CELLPOINT CONNECT APS
Operating Condition: Unom: 120 V AC (AC/DC-ADAPTOR) , Thom: 23°C
Test Site: ETS
Operator: Mr. Fleischer
Test Specification: V-Network: ESH2-Z5 (L1)
Comment: model: FLA-01 mode: charging
ADAPTOR:SPS-01C5-0.25US

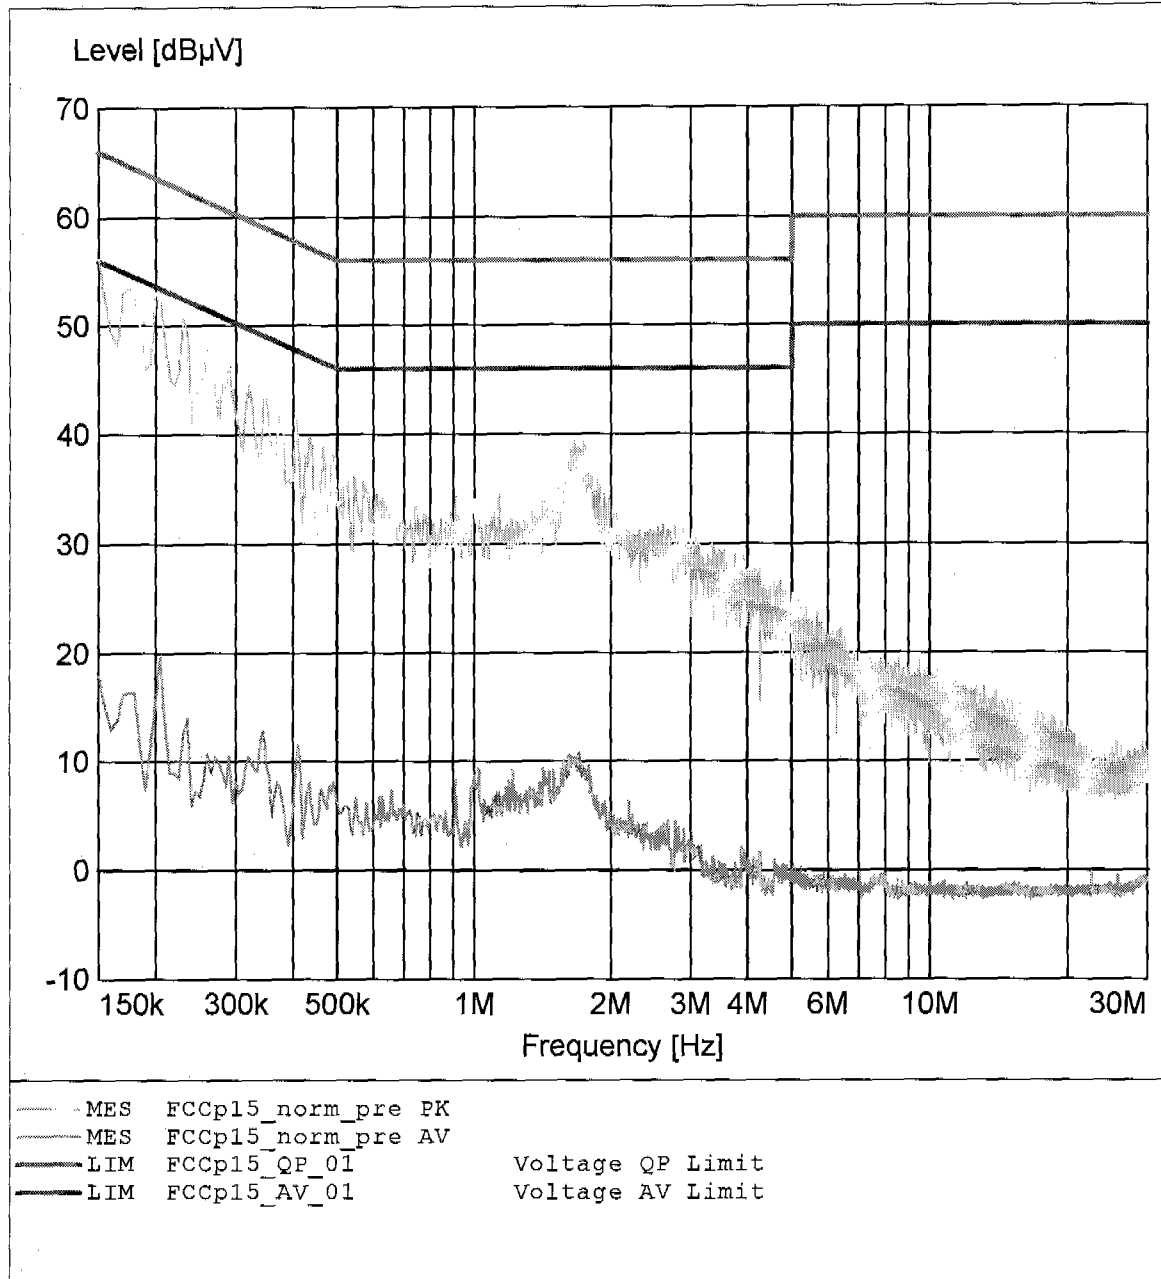

EMI voltage test in the ac-mains according to FCC part 15

EUT: HEADSET USING BLUETOOTH WIRELESS TECHNOLOGY
Manufacturer: CELLPOINT CONNECT APS
Operating Condition: Unom: 120 V AC (AC/DC-ADAPTOR) , Tnom: 23°C
Test Site: ETS
Operator: Mr. Fleischer
Test Specification: V-Network: ESH2-Z5 (N)
Comment: model: FLA-01 mode: charging
ADAPTOR:SPS-01C5-0.25US

