Internal photo

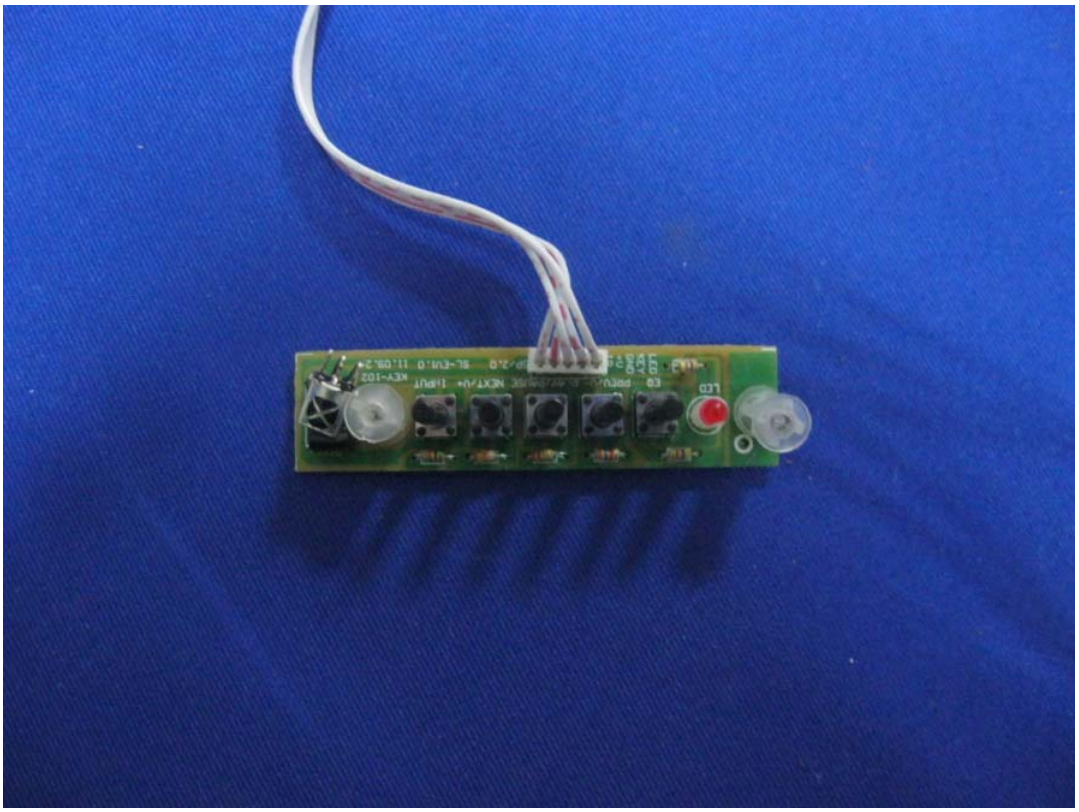

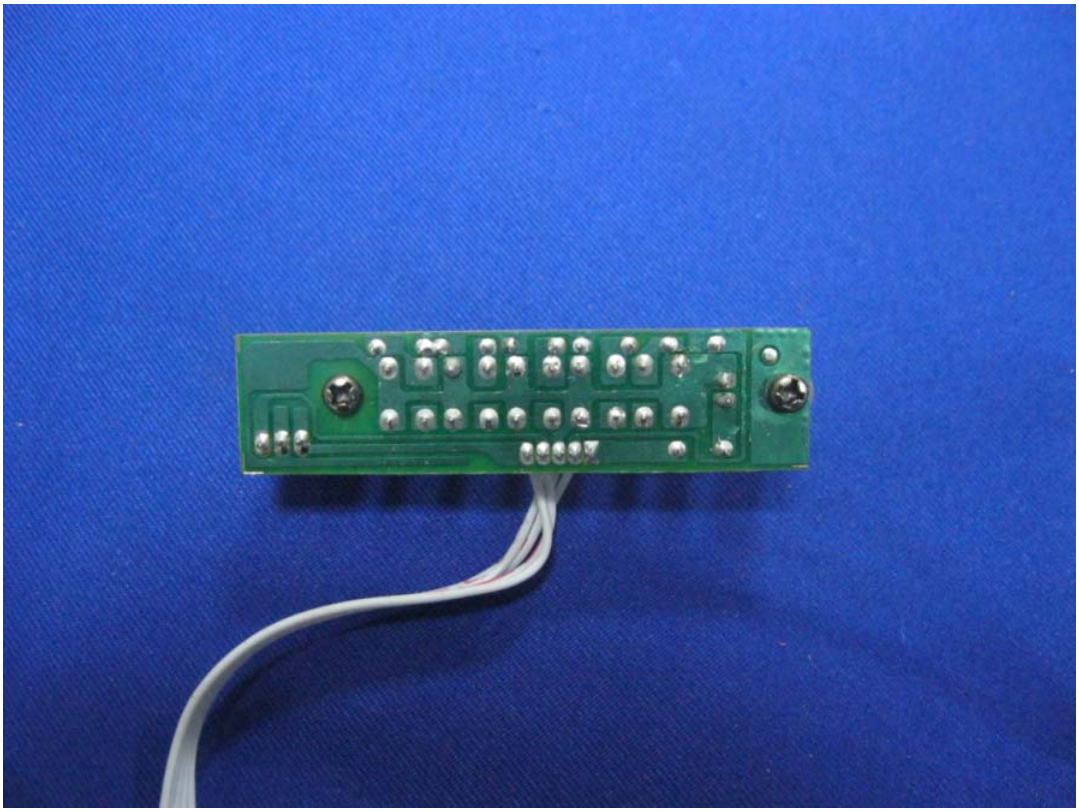

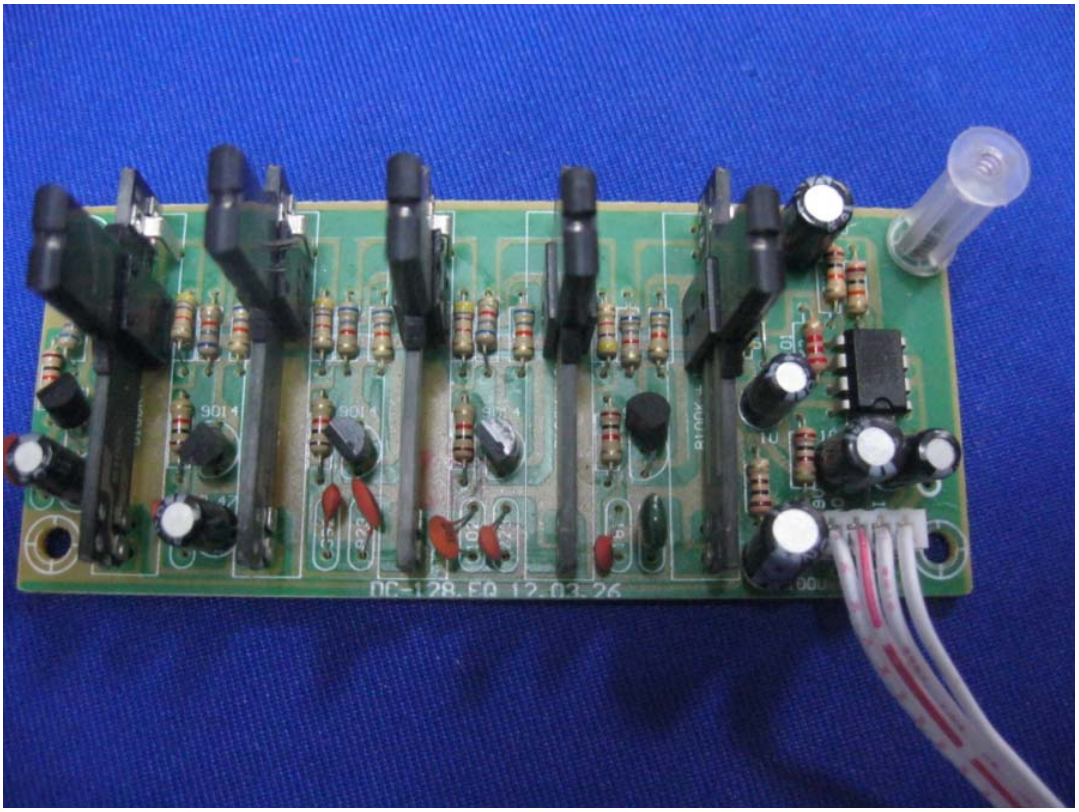
DC-128.EQ 12.03.26

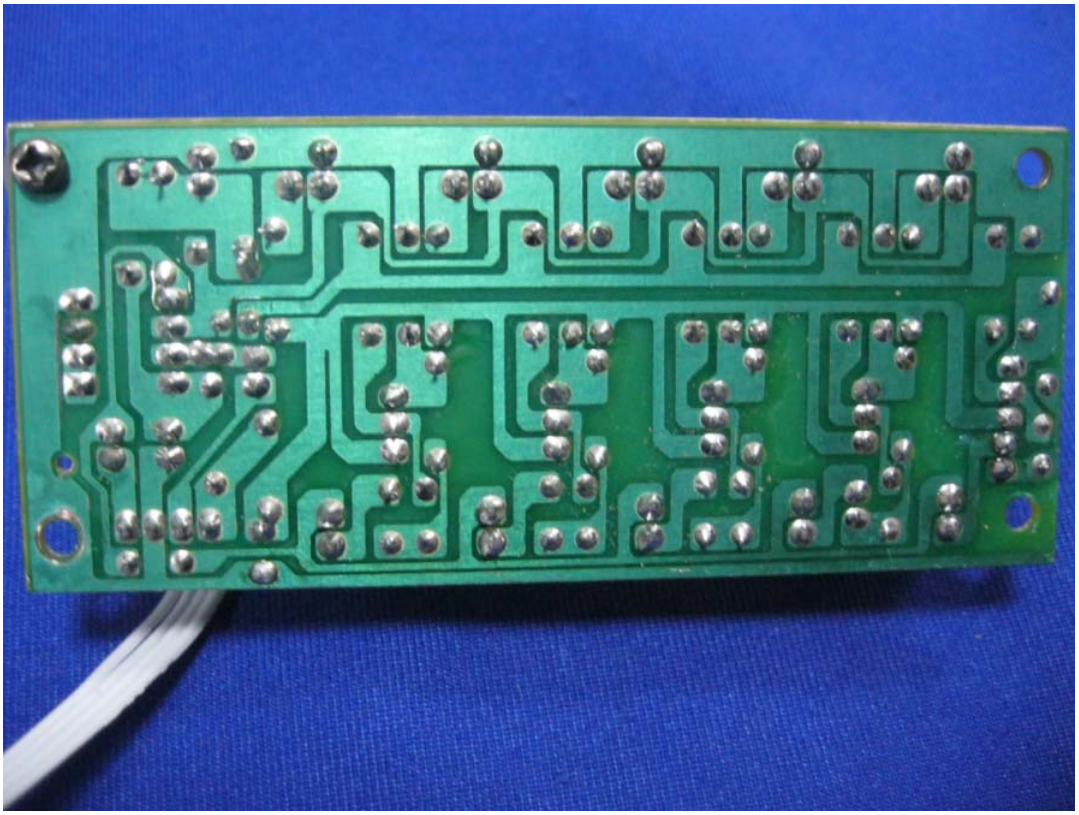

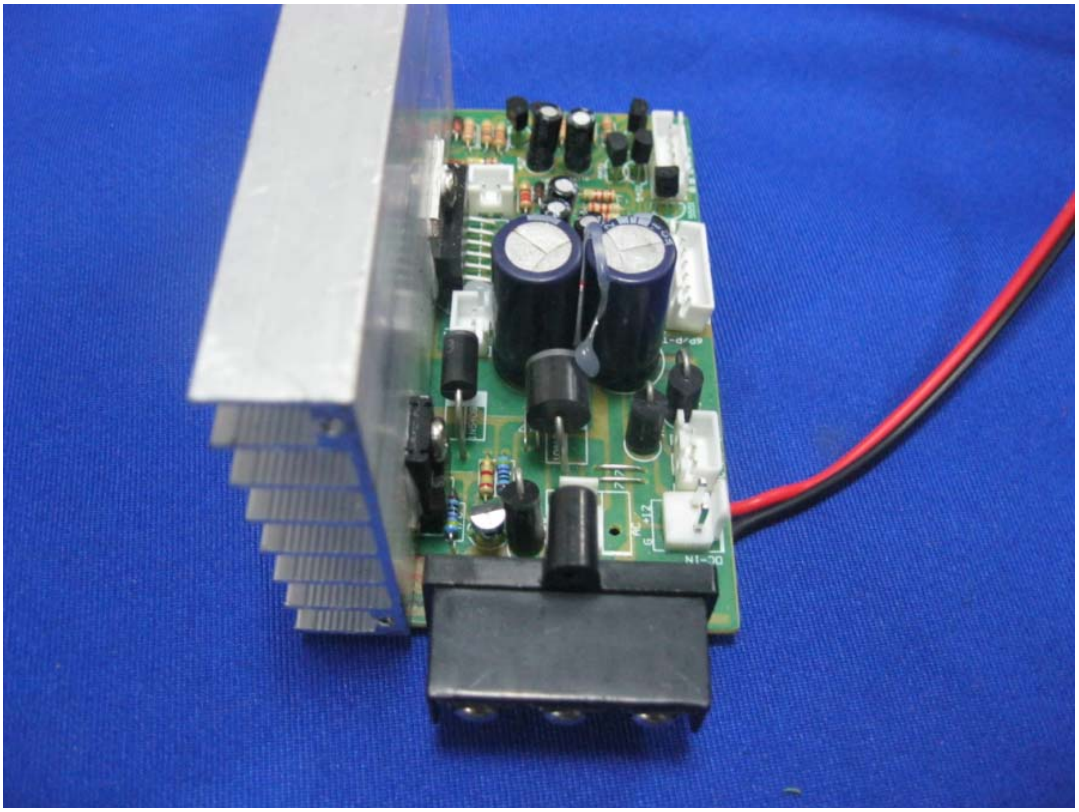

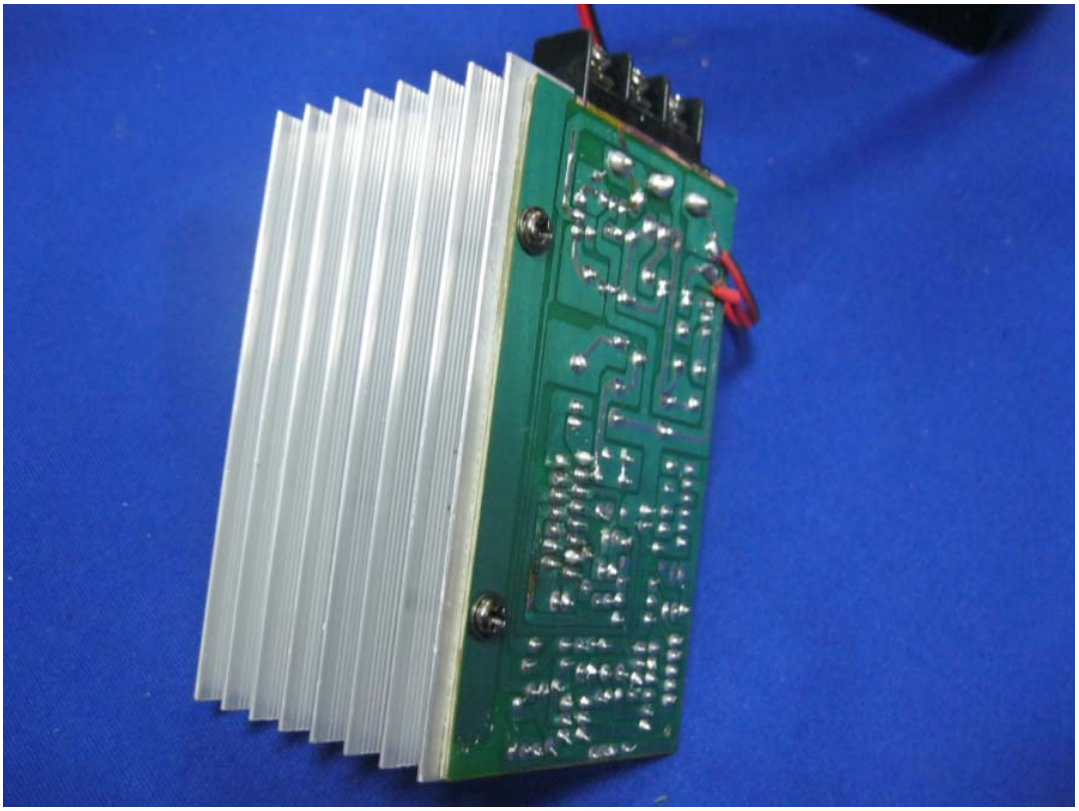

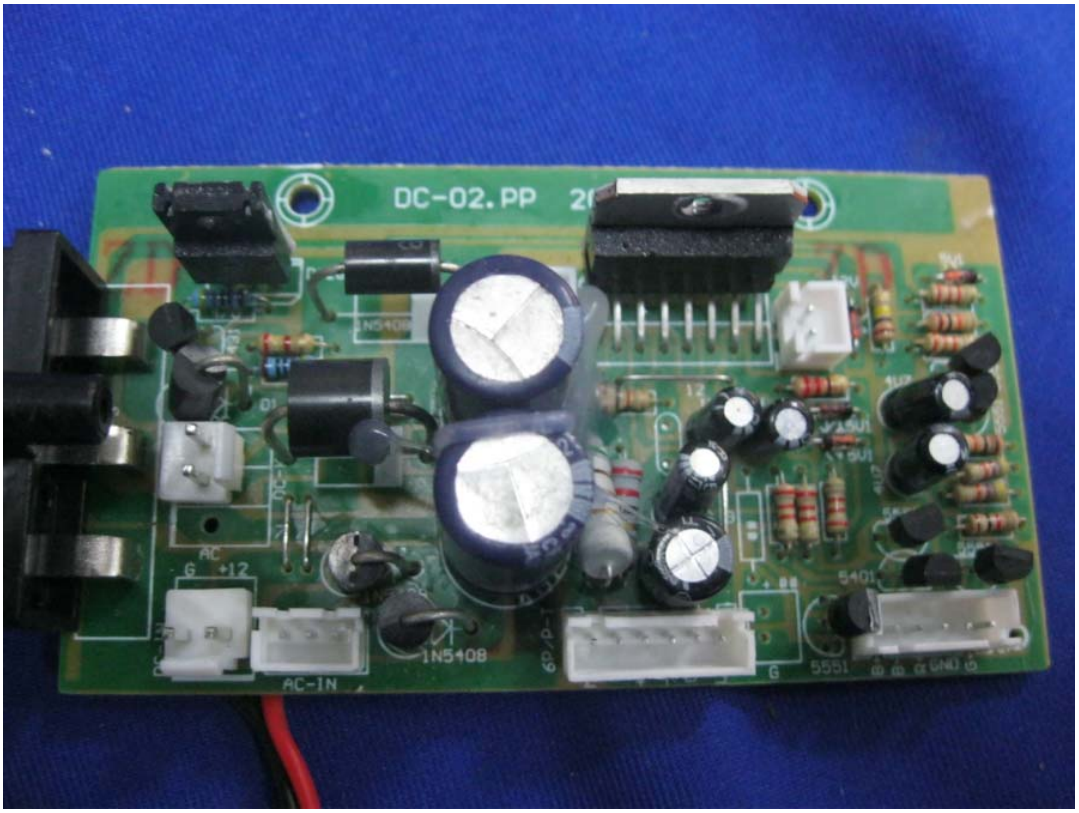
DC-02.PP
AC
G +12
AC-IN
1N5408
5401
5551

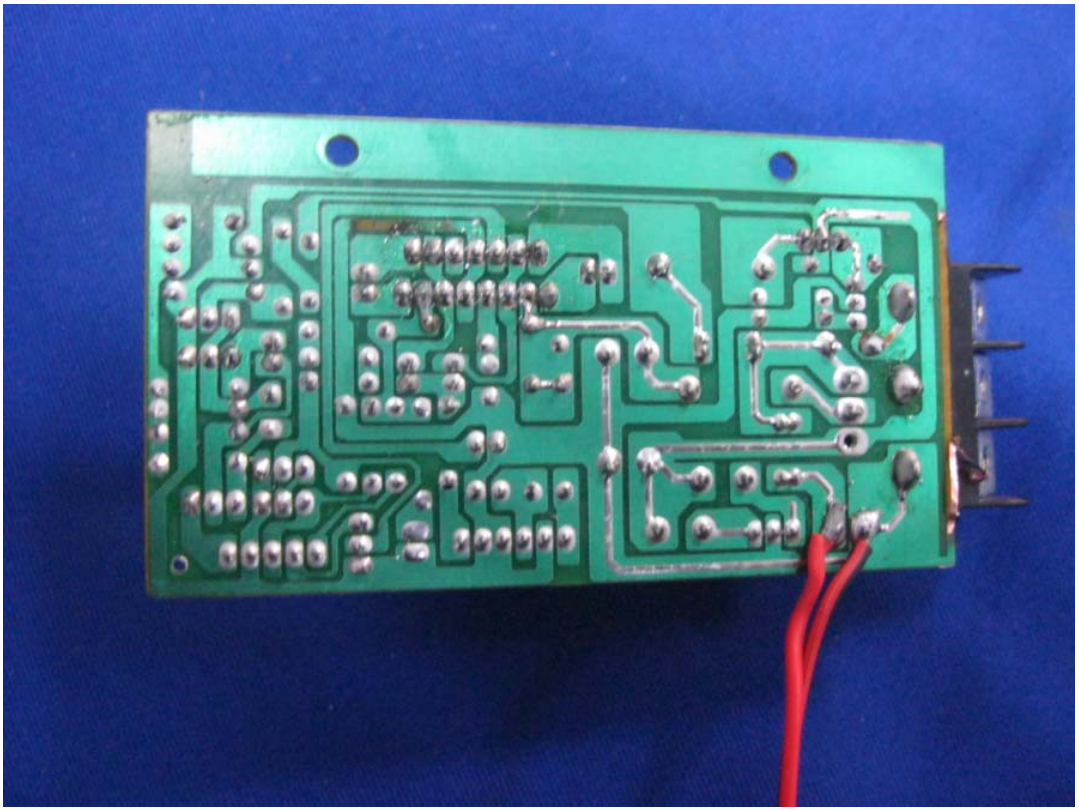

Bostion®
VALVE REGULATED LEAD-ACID BATTERY
NP7-12
12V 7AH
Pb
Pb
CE
ISO 9001 QUALITY ASSURANCE
CAUTION
• AVOID SHORT CIRCUIT
• DO NOT CHARGE IN A SEALED CONTAINER
• Keep away from sparks and flame

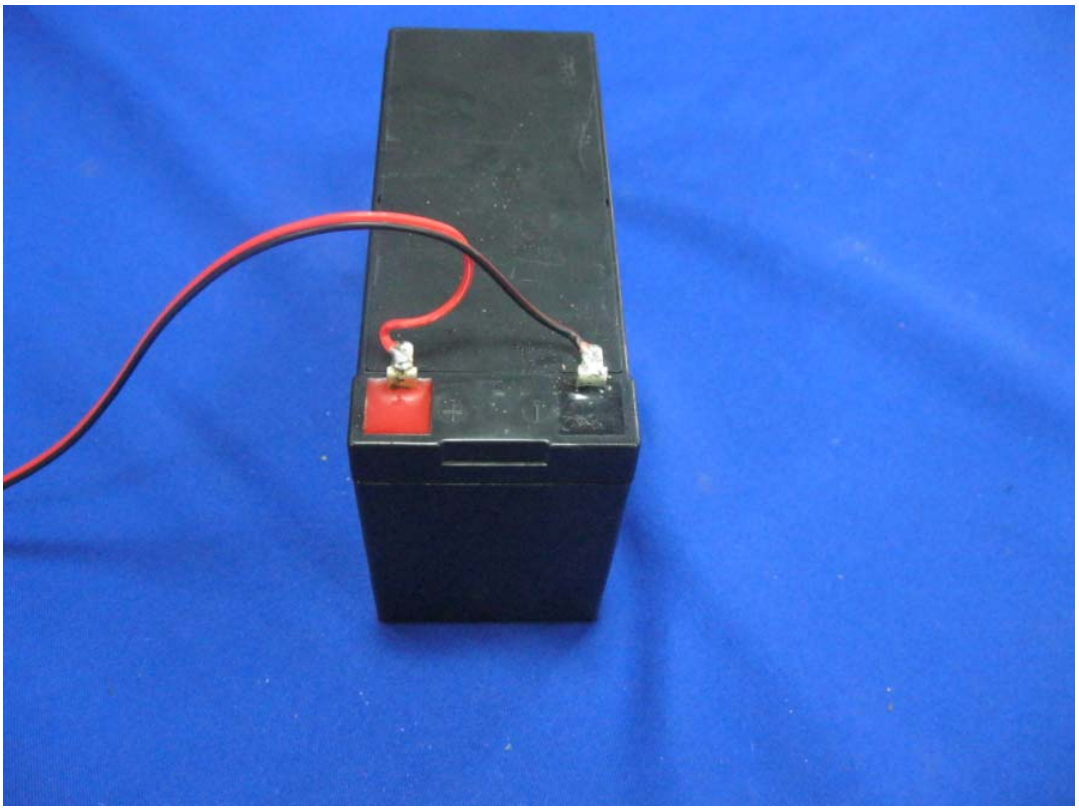

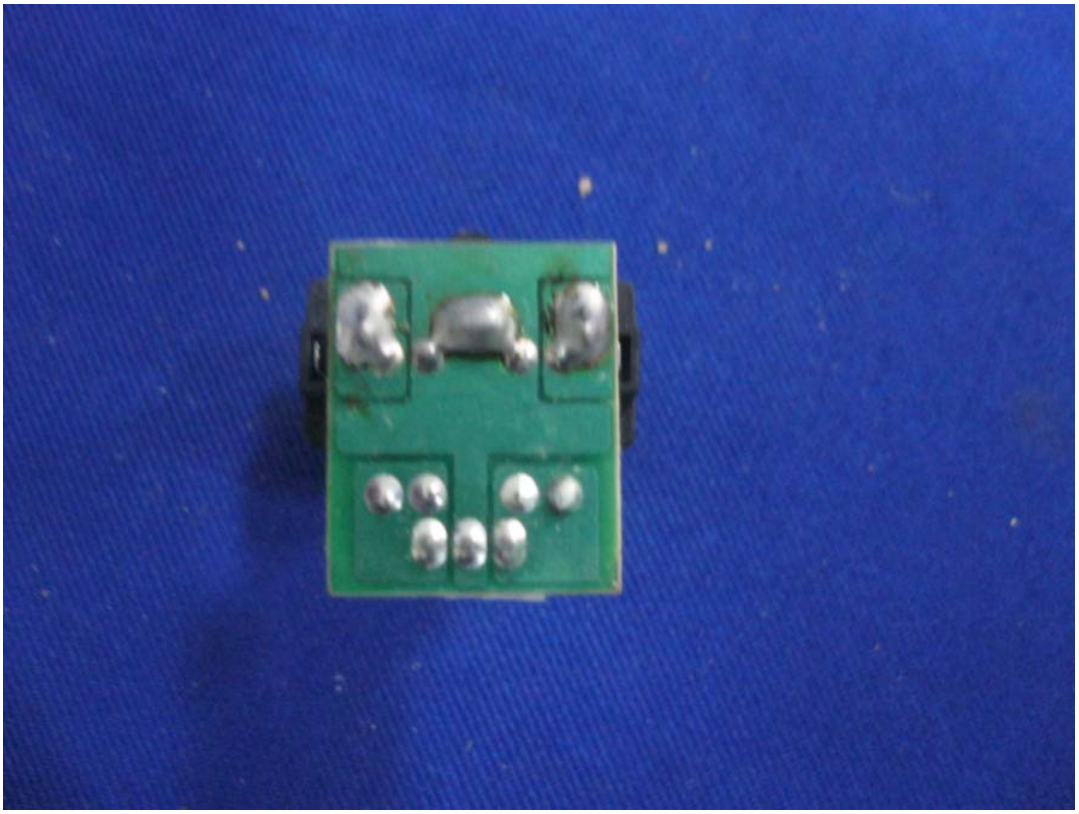

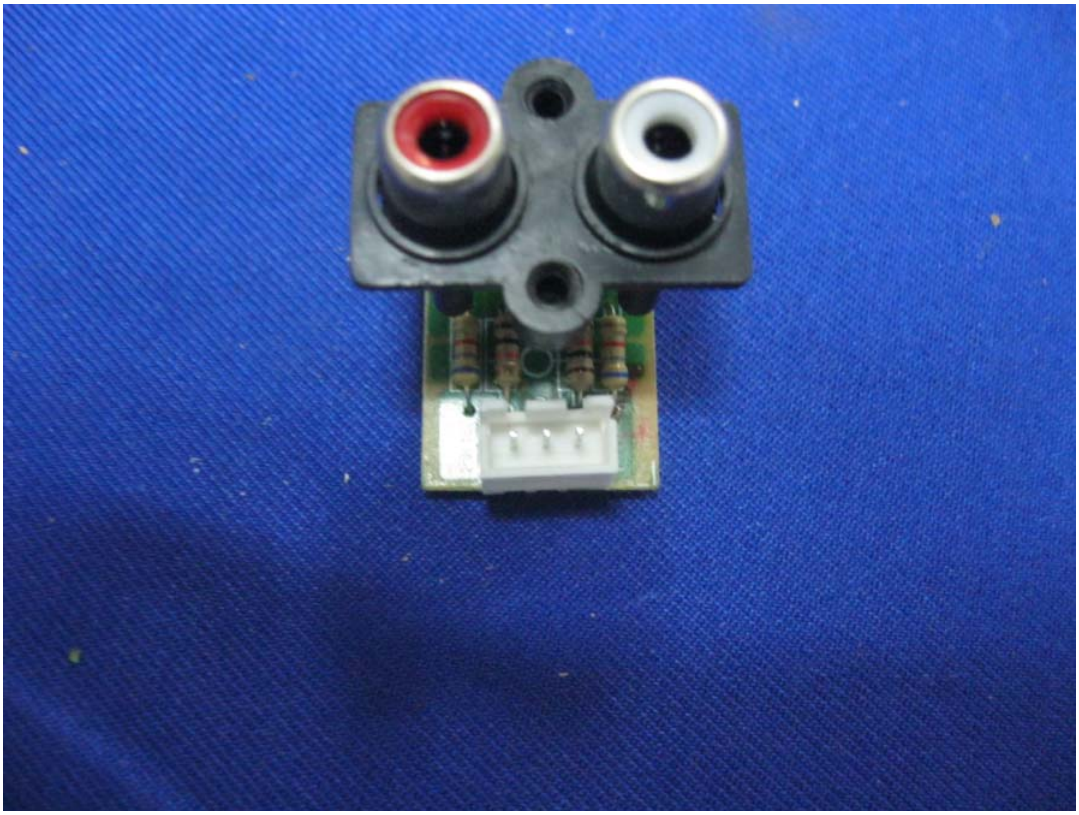

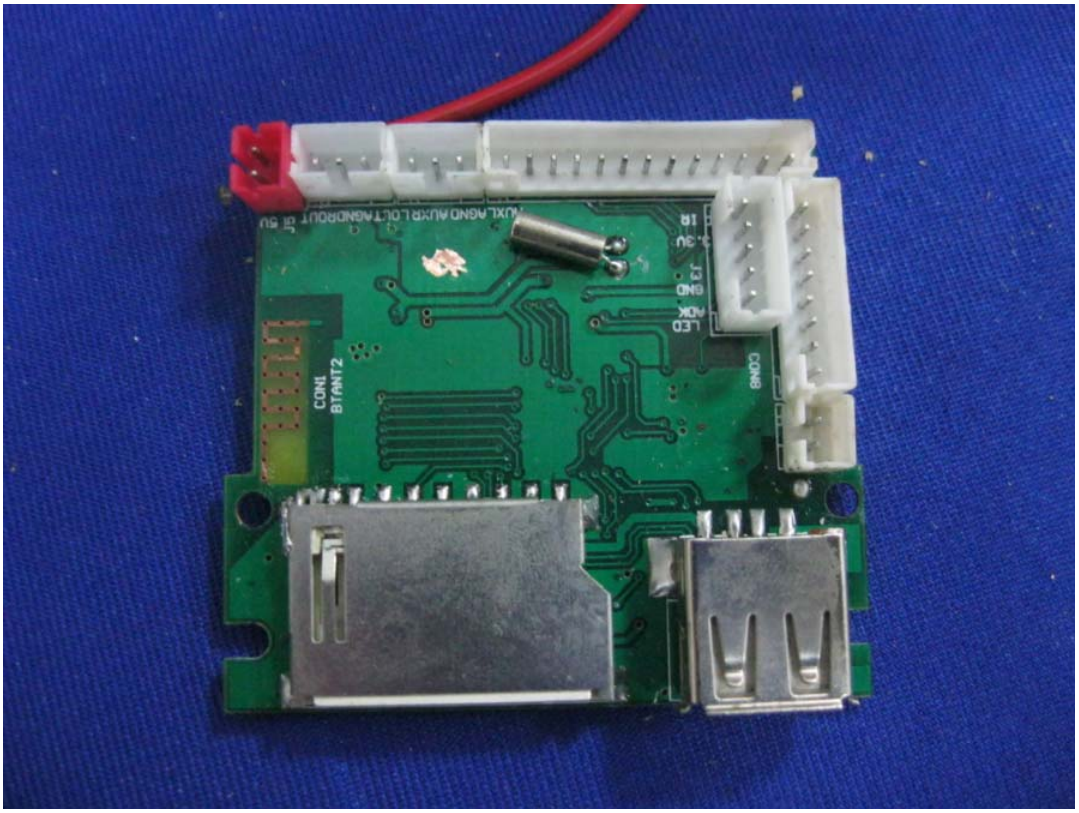
CON1
BTANT2
LED
ACK
GND
J3
3.3V
1R
GND3

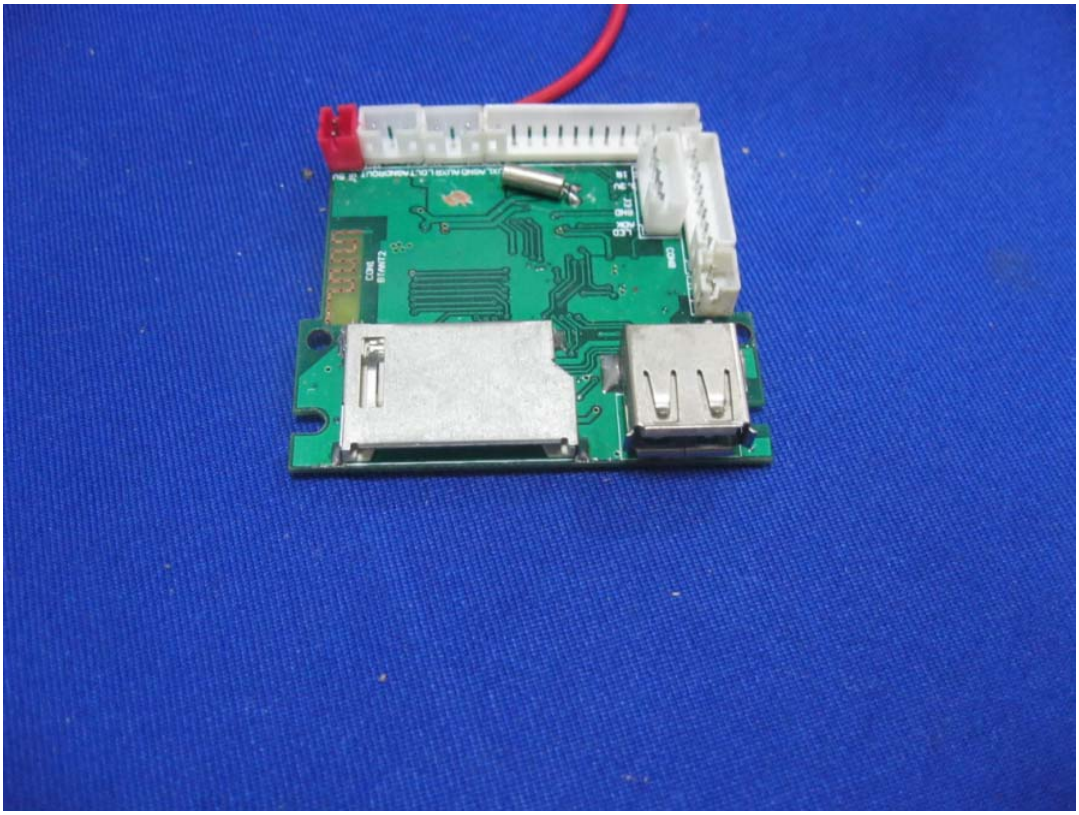

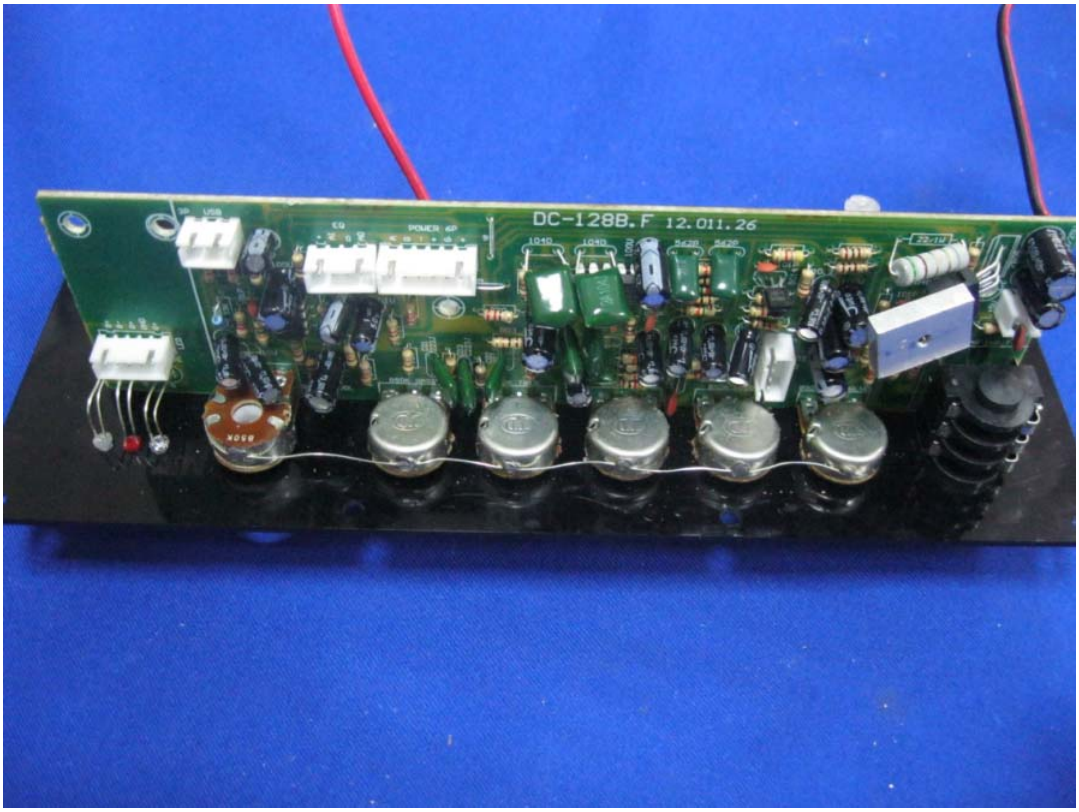
DC-128B.F 12.011.26

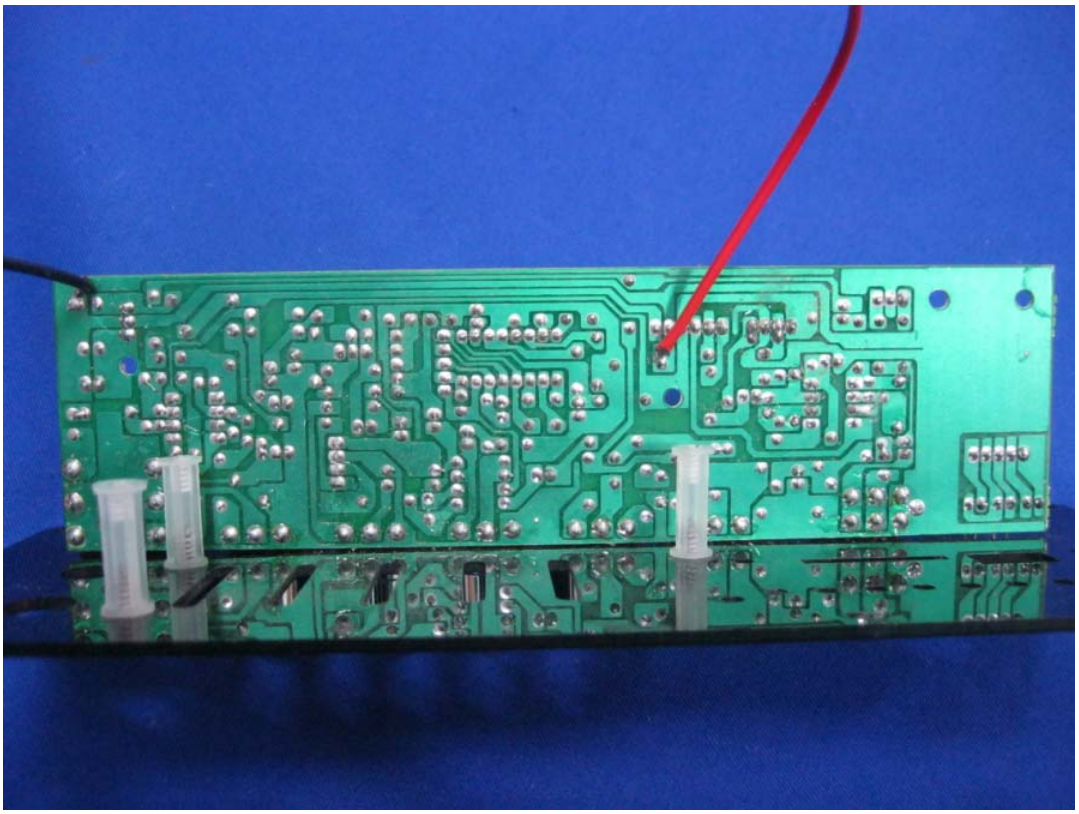

GUITAR
MIC2
MIC1
GUITAR.VOL
MIC.VOL
ECHO
TREBLE
BASS
VOLUME
Low
Normal
Battery
100Hz
300Hz
1KHz
6KHz
10KHz
+12dB
+6dB
0dB
-3dB
-6dB
-12dB
VOL-
VOL+
INPUT
WASP800UIBT
technical pro

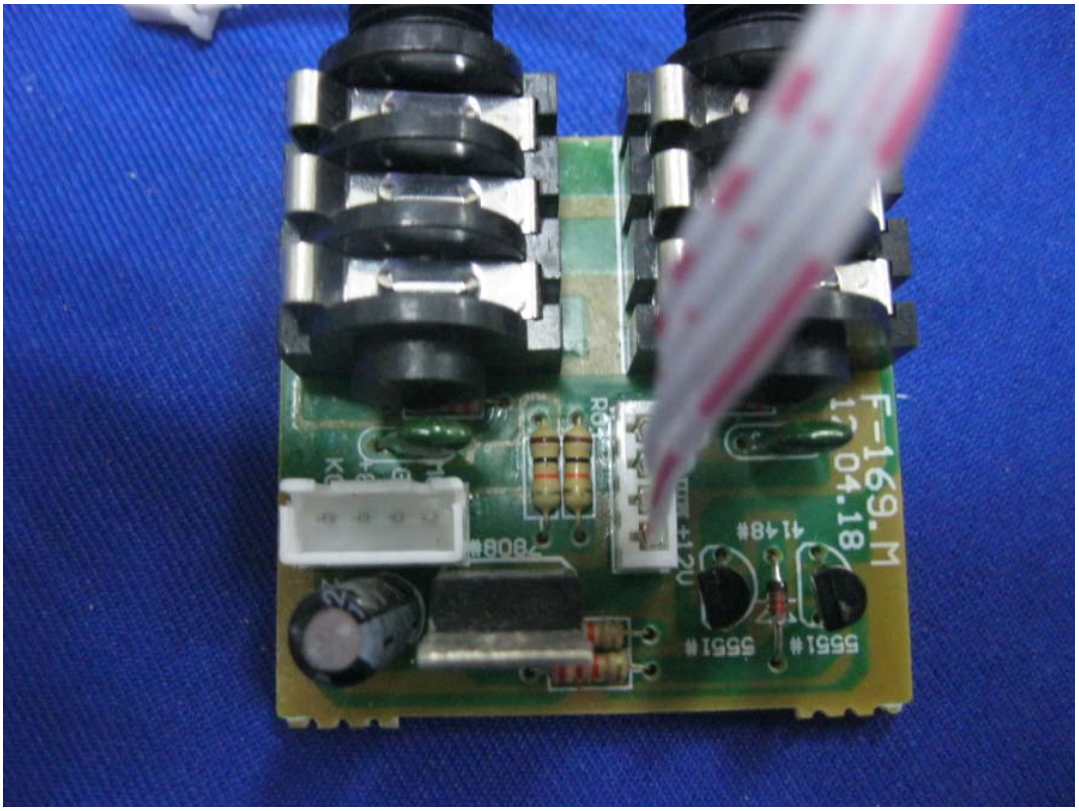
F-169.M
1.0 04.18
5551#
5551#
4148#
7808#
+12V

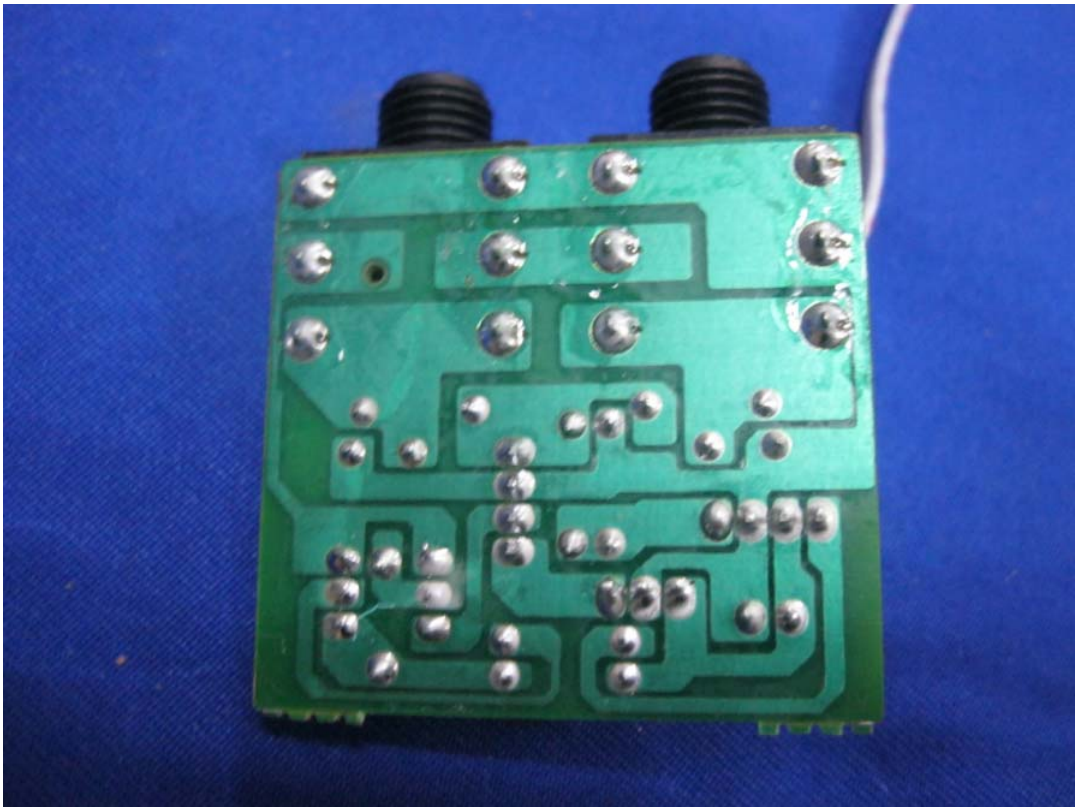

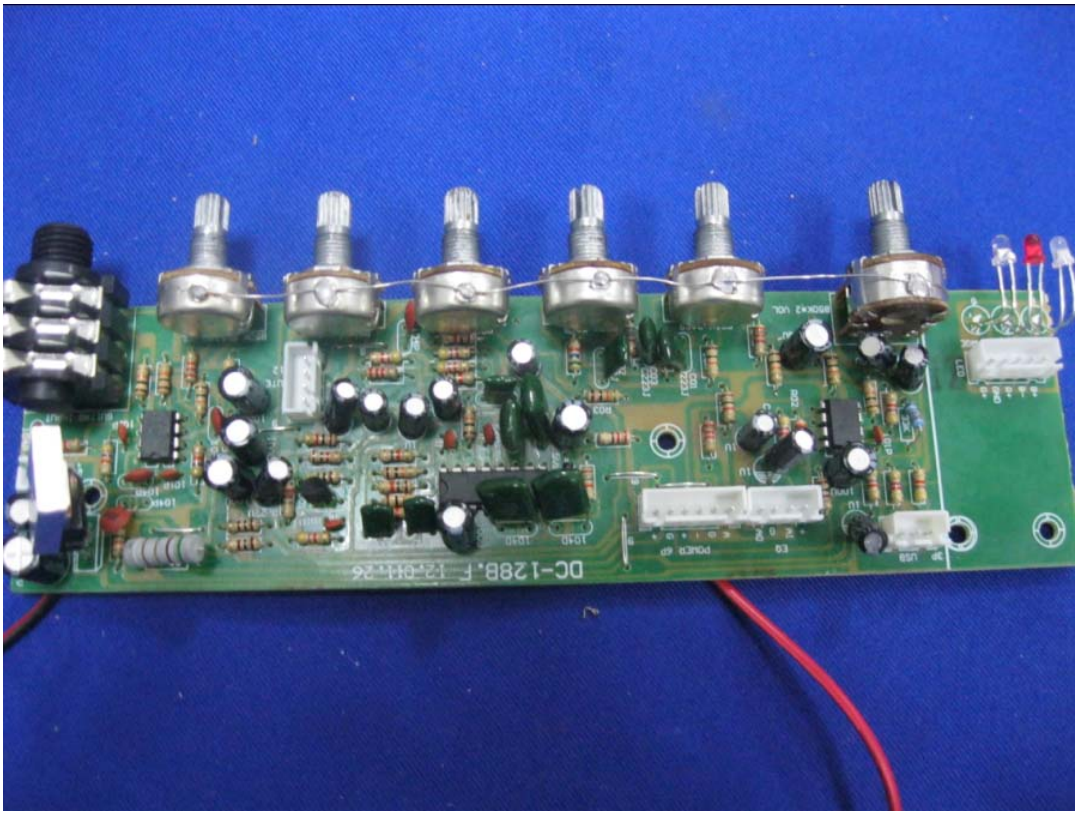
DC-1288.F 12-01-26

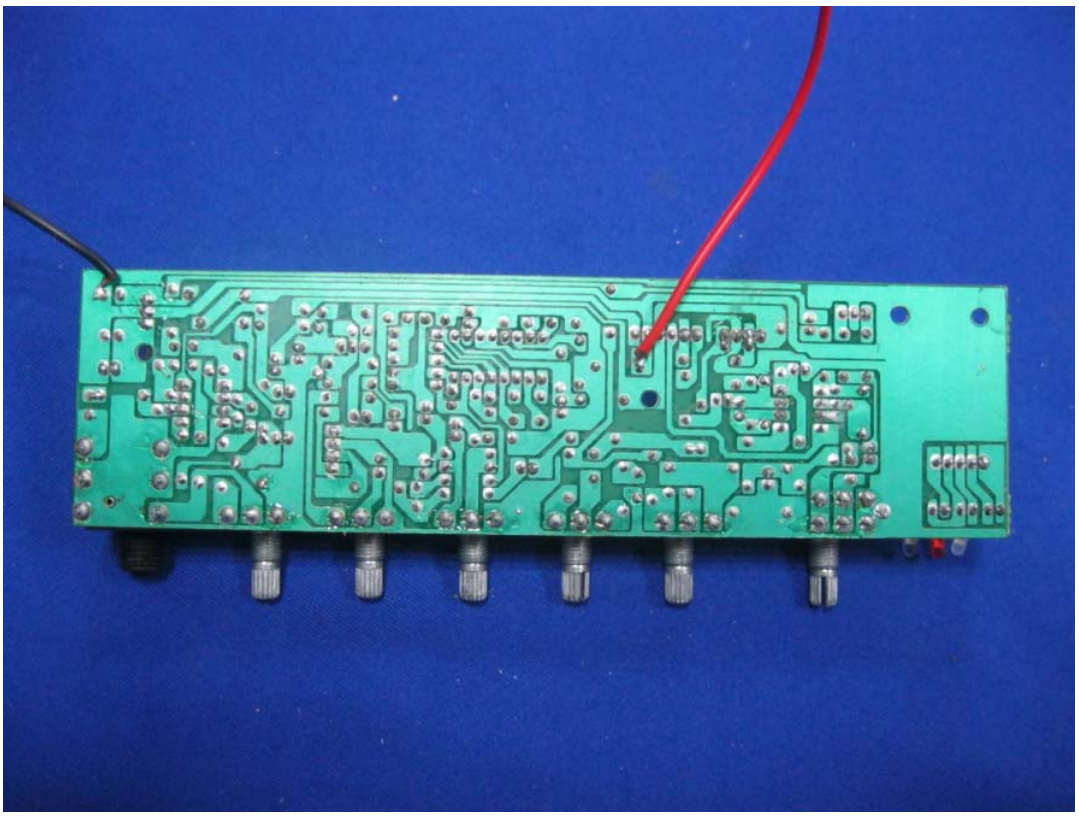

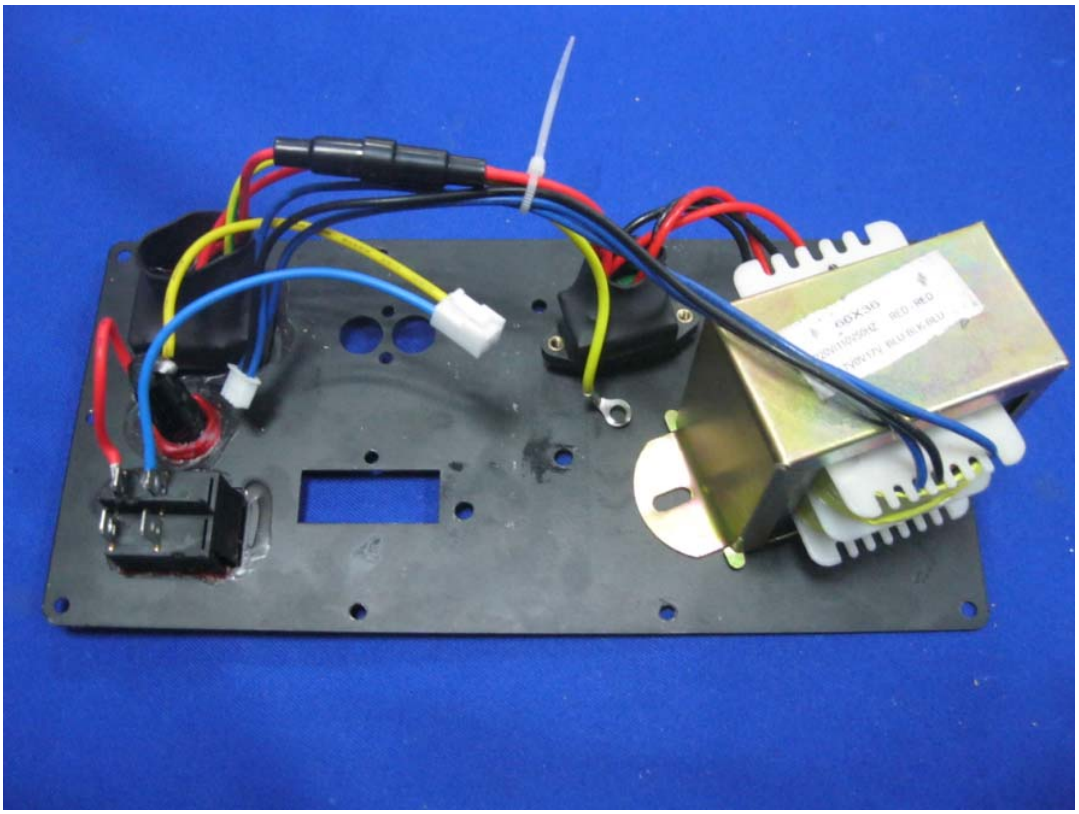

Model: WASP800UIBT
technical pro
THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS:
(1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE AND
(2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRED OPERATION.
CE
CAUTION
RISK OF ELECTRIC SHOCK DO NOT OPEN
VOLTAGE SELECT
AC220V
AC110V
+12V
NC
GND
DC12V INPUT
L
R
AUDIO INPUT
INPUT AC
ON
OFF
POWER
F10AL
DC12V BATTERY FUSE
AC110V/220V 50/60Hz

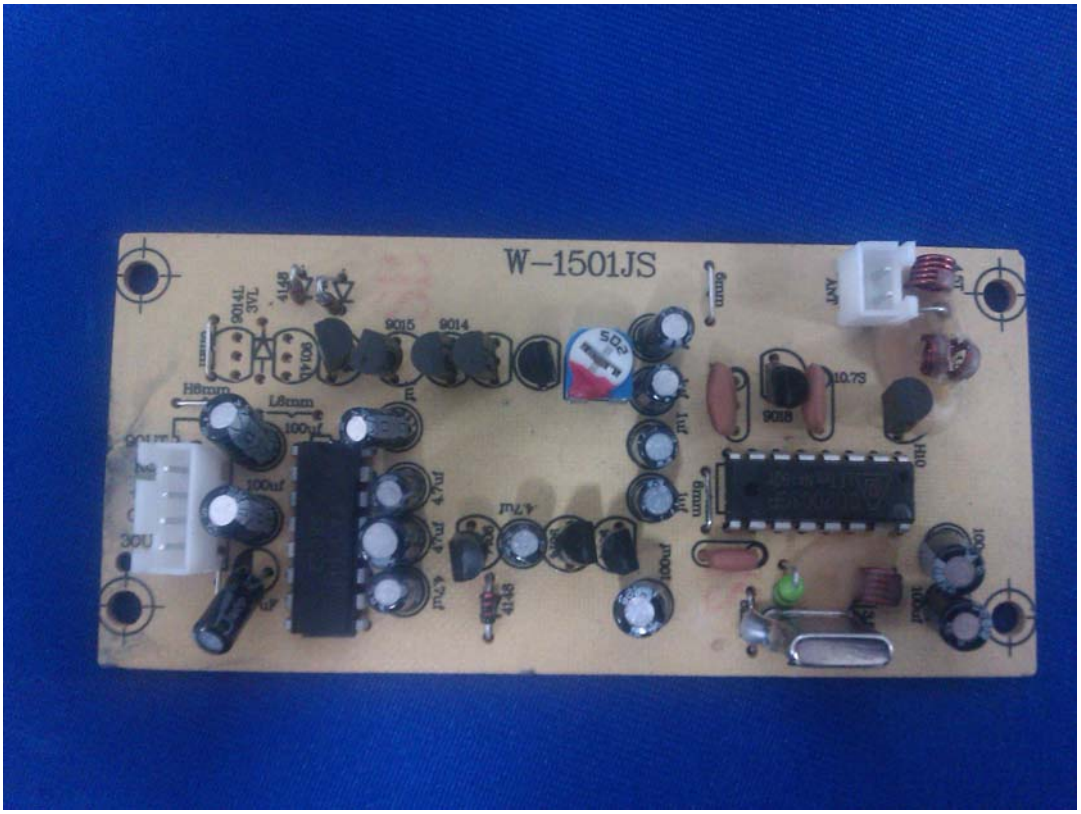
W-1501JS

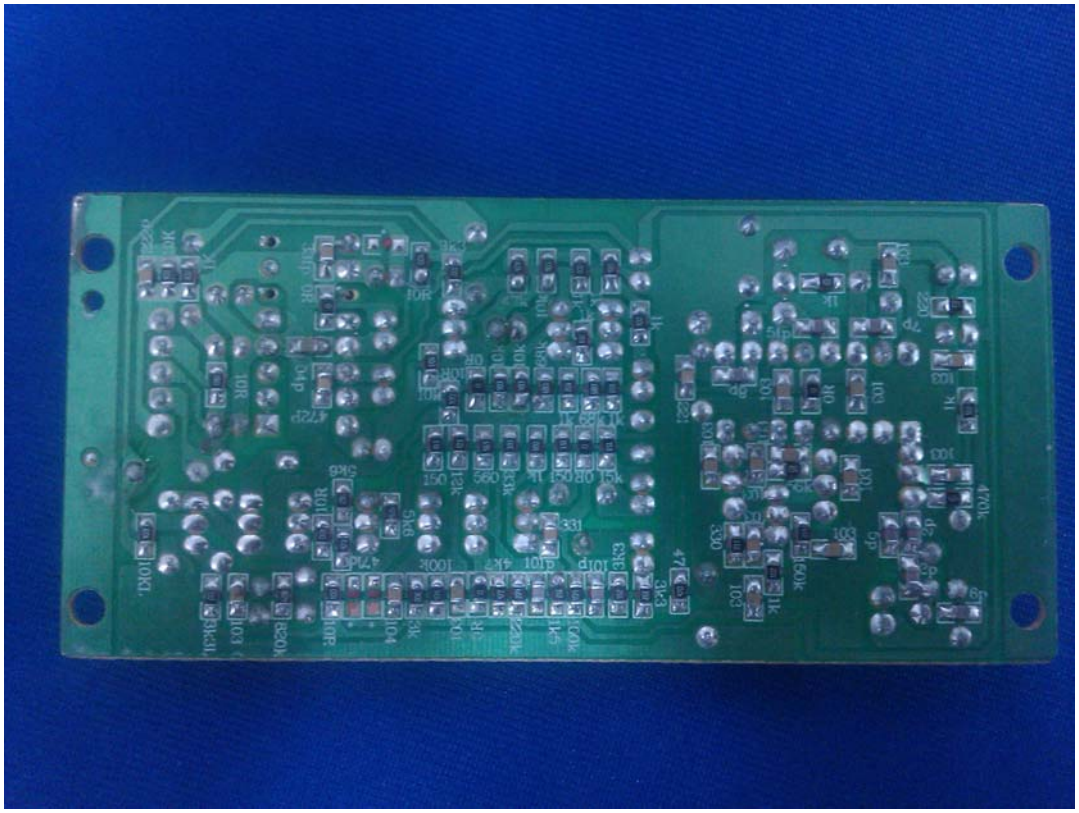

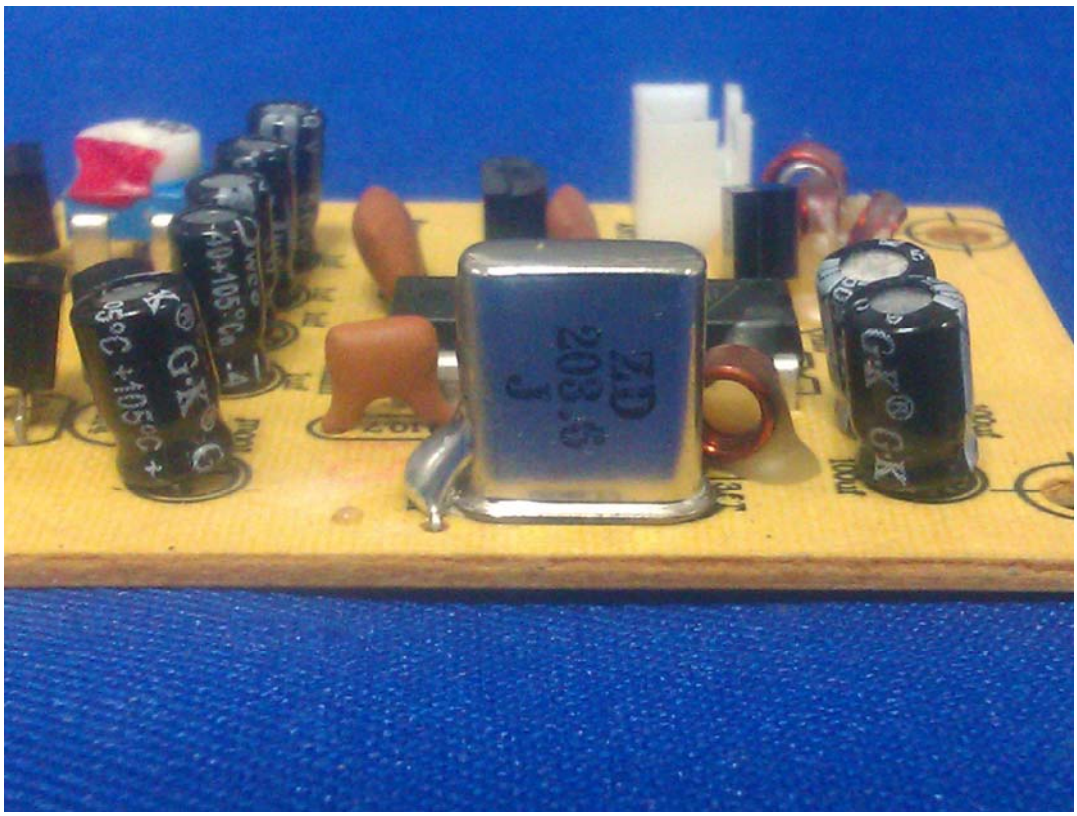

BT module

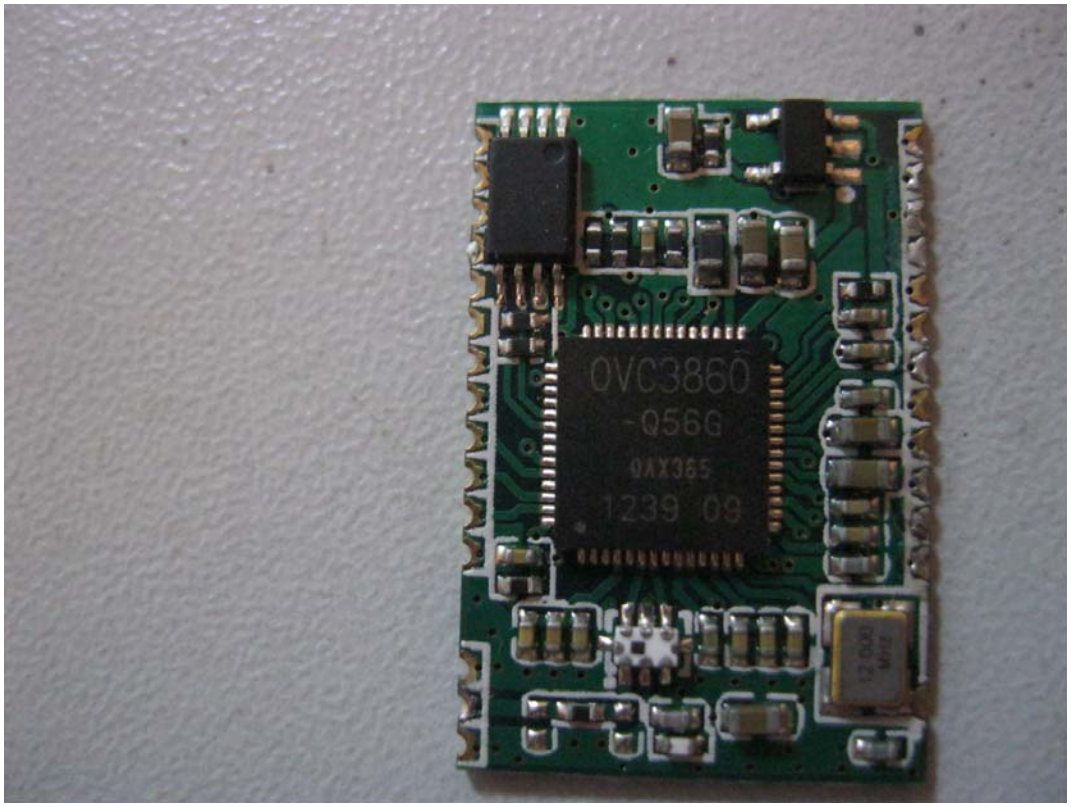

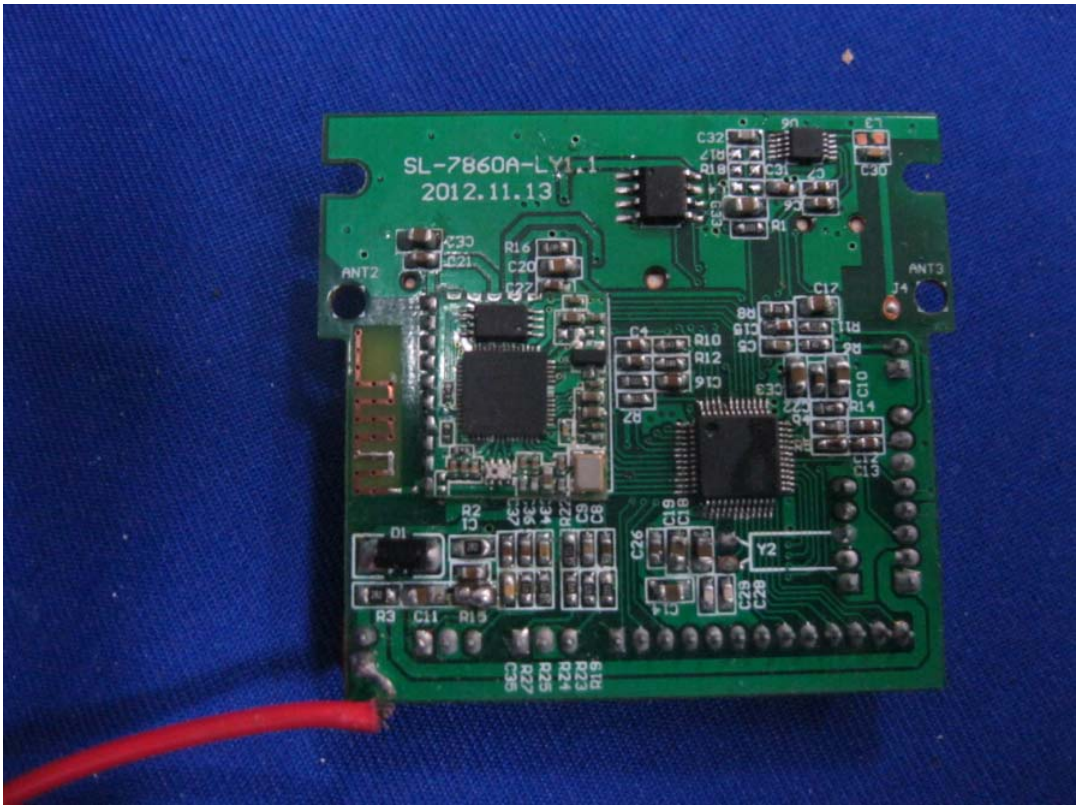
SL-7860A-LY1.1
2012.11.13
ANT2
ANT3
Y2

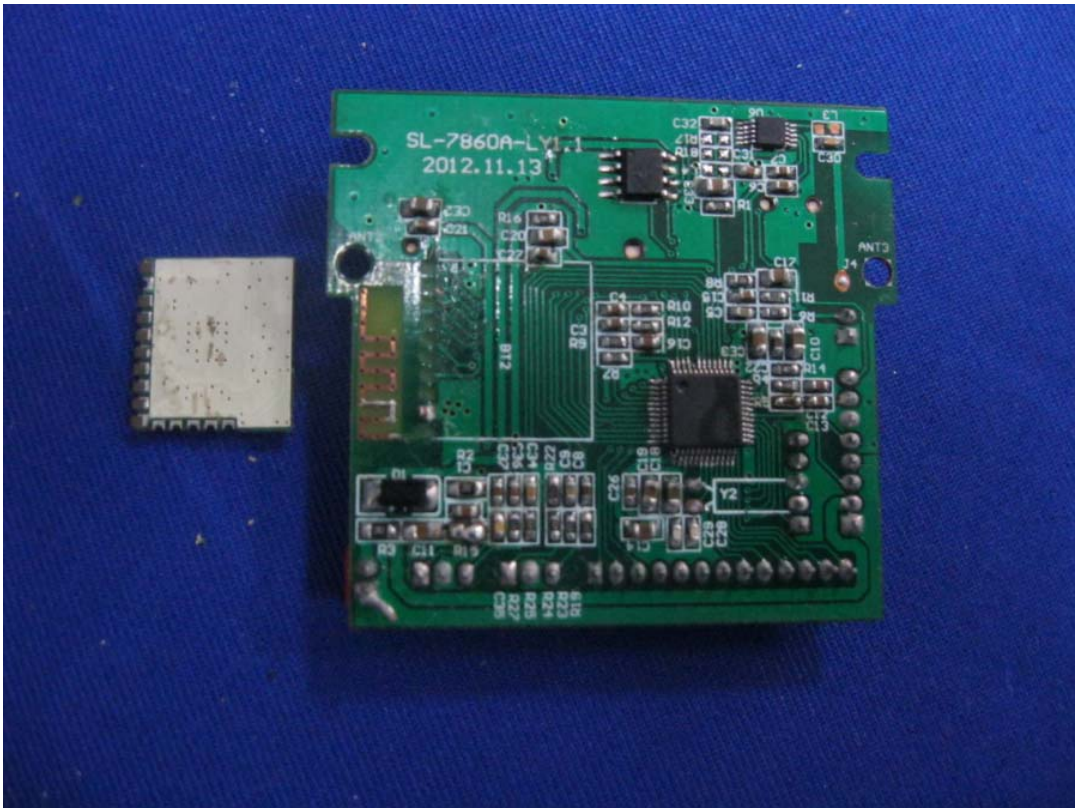
SL-7860A-LY1.1
2012.11.13
ANT3
Y2