

Portable Omni-Directional Antenna for 2.4 GHz

Version 2

HON04-052160


Electrical Specification

Frequency range	2400 MHz - 2500MHz
Peak gain	5.0 dBi
Average gain	2.5 dBi
VSWR	2.0 : 1 Max.
Polarization	Linear, vertical
HPBW / horizpntal	360°
HPBW / vertical	30°
Power handling	2 W (cw)
Impedance	50 Ohms
Connector	N plug




Environmental & Mechanical Characteristics

Survival wind speed	216 km/hr
Temperature	- 40°C to +70°C
Humidity	95% @ 55° C
Radome color	Black
Radome material	ABS
Weight	70 gw
Dimensions	22 x 183 mm

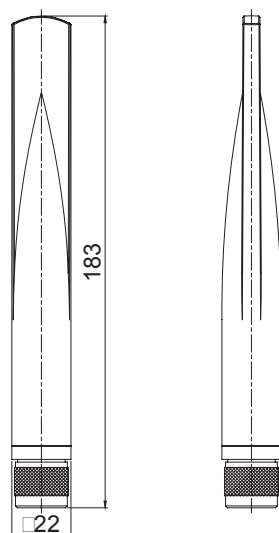

H-Plane Co-polarization Pattern

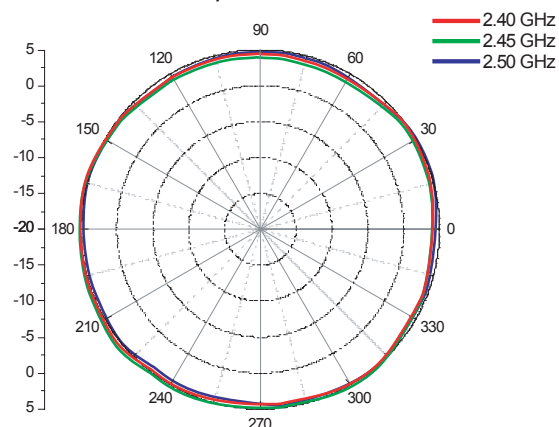

V-Plane Co-polarization Pattern

