

## FCC PART 15 CLASS C Test Report

**REPORT NO.:** 20131103EI

**MODEL:** TX202

**EQUIPMENT TYPE:** Remote Controller

**TEST DATE:** April 10, 2013

**APPLICANT:** Ningbo Jiangbei Potek Electronics & Technology Co.,Ltd.

**ADDRESS:** 2th Floor, No.137 Jinji Road, Economic And Technological Development Zone, Ningbo City, Zhejiang P.R.C.

**MANUFACTURER:** Ningbo Jiangbei Potek Electronics & Technology Co.,Ltd.

**ADDRESS:** 2th Floor, No.137 Jinji Road, Economic And Technological Development Zone, Ningbo City, Zhejiang P.R.C.

**ISSUED BY:** Telab Compliance Laboratory Co., Ltd.

**LAB LOCATION:** 1-6-49 Kairui Garden 63# Yingkang Road Chengdu ,Sichuan,China.

**Checked Signatory**



Sean Chen-Test Engineer

**Date** April 22, 2013

**Authorized Signatory**



Steven Shi-Project Manager

**Date** April 24, 2013

|                                                             |           |
|-------------------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION</b>                               | <b>4</b>  |
| 1.1 PURPOSE                                                 | 4         |
| 1.2 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)               | 4         |
| 1.3 GENERAL DESCRIPTION OF APPLIED STANDARDS                | 5         |
| 1.4 DESCRIPTION OF TEST FACILITY                            | 5         |
| 1.5 TEST LABORATORY CLIMATE                                 | 5         |
| <b>2. SUMMARY OF TEST RESULTS</b>                           | <b>6</b>  |
| <b>3. SYSTEM CONFIGURATION DURING EMC TESTING</b>           | <b>6</b>  |
| <b>4. CONDUCTED EMISSION (15.207)</b>                       | <b>7</b>  |
| 4.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT                | 7         |
| 4.2 EUT Configuration                                       | 7         |
| 4.3 Test Procedure                                          | 7         |
| 4.4 EMI Receiver/Spectrum Analyzer Configuration            | 8         |
| 4.5 Test Setup                                              | 8         |
| 4.6 Test Curve & Data                                       | 8         |
| <b>5. FUNDAMENTAL &amp; SPURIOUS EMISSION (15.231B)</b>     | <b>9</b>  |
| 5.1 LIMITS OF RADIATED EMISSION MEASUREMENT                 | 9         |
| 5.2 EUT Configuration                                       | 9         |
| 5.3 Test Procedure                                          | 9         |
| 5.4 EMI Receiver Configuration (for the frequencies tested) | 10        |
| 5.5 Test Setup                                              | 10        |
| 5.6 Duty Cycle /Correct Factor                              | 11        |
| 5.7 Test Curve & Data                                       | 13        |
| 5.7.1 Test Data                                             | 13        |
| 5.7.2 Test Curve                                            | 14        |
| <b>6. RESTRICT BAND RADIATED EMISSION (15.205)</b>          | <b>15</b> |
| 6.1 LIMITS OF RADIATED EMISSION MEASUREMENT                 | 15        |
| 6.2 EUT Configuration                                       | 15        |
| 6.3 Test Procedure                                          | 15        |
| 6.4 EMI Receiver Configuration (for the frequencies tested) | 16        |
| 6.5 Test Setup                                              | 16        |
| 6.6 Test Curve & Data                                       | 17        |
| <b>7. DEACTIVATING TIME</b>                                 | <b>18</b> |
| 7.1 Test limit                                              | 18        |
| 7.2 Test Procedure And Test Setup                           | 18        |
| 7.3 Test Result                                             | 19        |
| <b>8.EMISSION BANDWIDTH</b>                                 | <b>20</b> |
| 8.1 TEST LIMIT                                              | 20        |
| 8.2 Test Procedure And Test Setup                           | 20        |
| 8.3 Test Result                                             | 20        |
| 8.4 Test Photograph                                         | 21        |

**9. INFORMATION ON THE TESTING EQUIPMENT----- 22**

## 1. General Information

### 1.1 Purpose

The purpose of the test was to verify the compliant of the electromagnetic compatibility (E.M.C) requirements according to FCC Standards.

### 1.2 Description of Equipment under Test (EUT)

|                      |                                                                                                         |
|----------------------|---------------------------------------------------------------------------------------------------------|
| Applicant:           | Ningbo Jiangbei Potek Electronics & Technology Co.,Ltd.                                                 |
| Address:             | 2th Floor, No.137 Jinji Road, Economic And Technological Development Zone, Ningbo City, Zhejiang P.R.C. |
| Manufacture:         | Ningbo Jiangbei Potek Electronics & Technology Co.,Ltd.                                                 |
| Address:             | 2th Floor, No.137 Jinji Road, Economic And Technological Development Zone, Ningbo City, Zhejiang P.R.C. |
| Country of Origin:   | China                                                                                                   |
| Product type:        | Remote Controller                                                                                       |
| Model:               | TX202                                                                                                   |
| Nominal Voltage:     | 3V DC (Battery)                                                                                         |
| Operation Frequency: | 315MHz                                                                                                  |
| Modulation:          | ASK                                                                                                     |
| Antenna Designation: | Integral antenna, non-user removable                                                                    |
| Channel Description: | There is one channel only(315MHz)                                                                       |
| FCC ID               | S5T-001                                                                                                 |

### 1.3 General Description Of Applied Standards

The EUT is a kind of measurement control and laboratory use equipment and, according to the specifications of the manufacturers, must comply with the requirements of the following standards:

| Main Standards       | Description                                                                                                                                                         |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 47CFR Part 15 (2010) | Radio Frequency Devices                                                                                                                                             |
| ANSI C63.4 (2003)    | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |

### 1.4 Description of Test Facility

|                          |                                                                   |
|--------------------------|-------------------------------------------------------------------|
| Name                     | Telab Compliance Laboratory Co., Ltd.                             |
| Address:                 | 1-6-49 Kairui Garden 63# Yingkang Road<br>Chengdu ,Sichuan,China. |
| FCC Registration Number: | 370174                                                            |
| Contact                  | Steven shi<br>Tel:086-2888430263<br>Tax:086-2888430273            |

### 1.5 Test Laboratory Climate

Ambient Temperature: 25.2℃  
 Relative Humidity: 58%  
 Barometric Pressure: 103.3KPa (QNH)

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| Test Item                       | Reference Clause | Result | Remarks |
|---------------------------------|------------------|--------|---------|
| Power line conducted emission   | 15.207           | N/A    |         |
| Restrict Band Radiated Emission | 15.205           | Pass   |         |
| Fundamental & Spurious Emission | 15.231(b)        | Pass   |         |
| Deactivating Time               | 15.231(a)(1)     | Pass   |         |
| Emission Bandwidth              | 15.231(c)        | Pass   |         |

## 3. SYSTEM CONFIGURATION DURING EMC TESTING.

The equipment under test (EUT) was configured for all testing as described below, details of test specific setup is given on the relevant pages.

### Emission Testing

The EUT consisted to 3VDC battery. The EUT was set up simulating a typical user installation on the test site, and then tested in accordance with the specification.

The EUT is a handheld device, so three axes (X, Y, Z) were observed while the test receiver worked as “max hold” continuously and the highest reading among the whole test procedure was recorded.

## 4. CONDUCTED EMISSION (15.207 )

### 4.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

| FREQUENCY (MHz) | Class A(dBuV) |         | Class B (dBuV) |         |
|-----------------|---------------|---------|----------------|---------|
|                 | Quasi-peak    | Average | Quasi-peak     | Average |
| 0.15 - 0.5      | /             | /       | 66 - 56        | 56 - 46 |
| 0.50 - 5.0      | /             | /       | 56             | 46      |
| 5.0 - 30.0      | /             | /       | 60             | 50      |

**NOTE:** (1) The lower limit shall apply at the transition frequencies.  
 (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.  
 (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

### 4.2 EUT Configuration

The equipment under test was set up in the shielded room with the EUT 40cm away from the wall of the room. The EUT was placed on a non-conductive test table which is 80cm in height. Excess power cord was folded back and forth to form a 30cm by 40cm bundle. The distance between EUT and LISN is 80cm.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

### 4.3 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. The main power line conducted EMI tests were run on the hot and neutral conductors of the power cord and the results were recorded. The effect of varying the position of the interface cables has been investigated to find the configuration that produces maximum emission.

At the frequencies where the peak values of the emissions were higher than 6dB below the applicable limits, the emissions were also measured with the quasi-peak detectors. At the frequencies where the quasi-peak values of the emissions were higher than 6dB below the applicable average limits, the emissions were also measured with the average detectors.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

4.4 EMI Receiver/Spectrum Analyzer Configuration

|                             |                           |
|-----------------------------|---------------------------|
| Frequency                   | 150KHz--30MHz             |
| Range:Detector Function:    | Quasi-Peak / Average Mode |
| Resolution Bandwidth (RBW): | 9KHz                      |

4.5 Test Setup

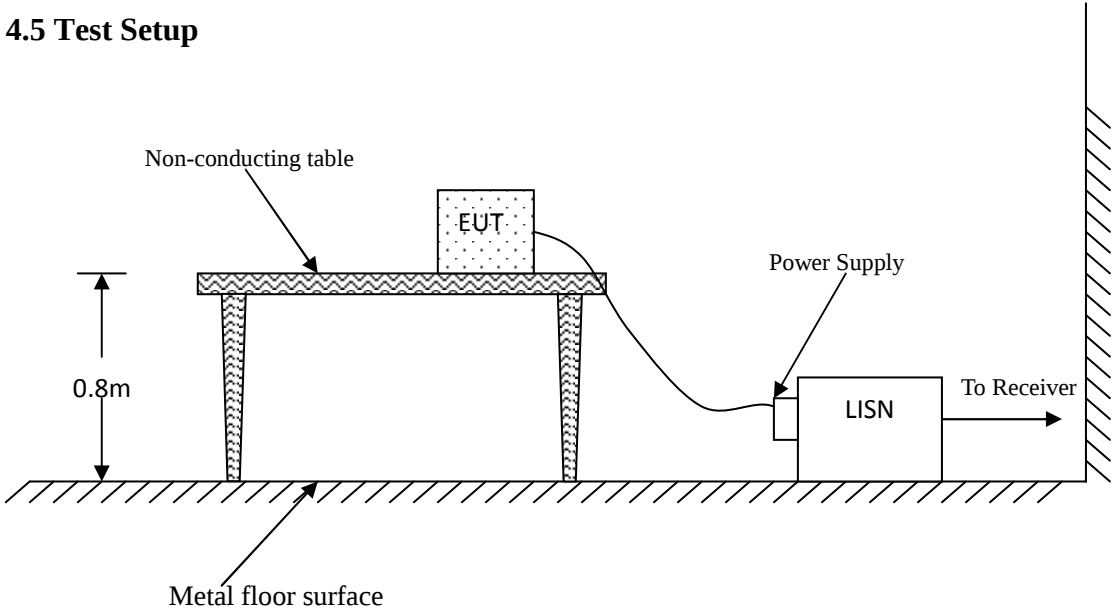


Figure 1: Side view of conducted test setup. The LISN output connects to the receiver.

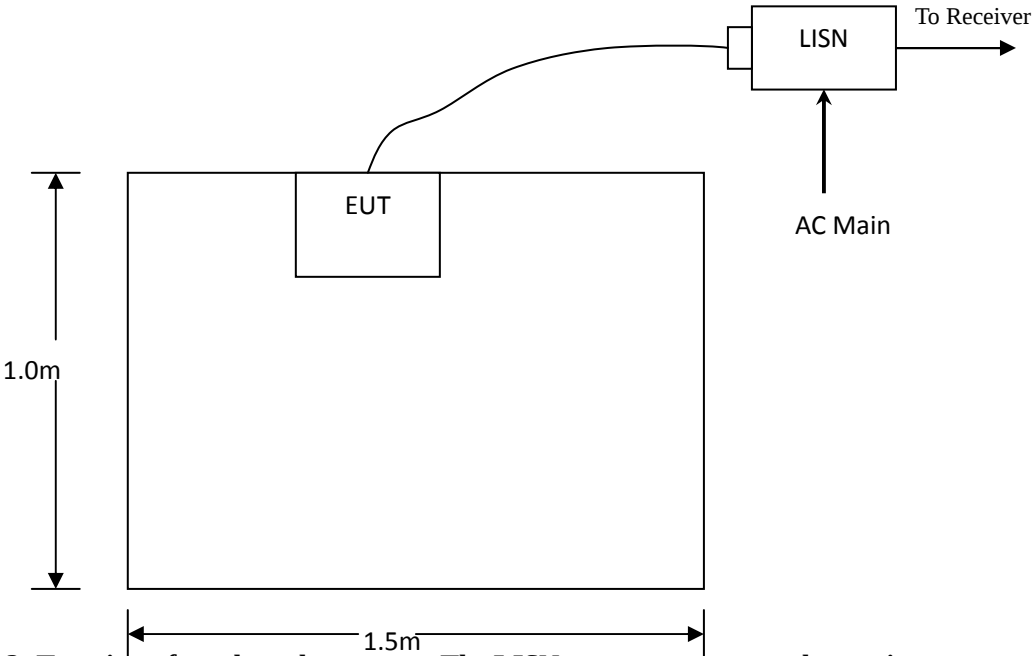


Figure 2: Top view of conducted test setup. The LISN output connects to the receiver.

4.6 Test Curve & Data

- Not Application

## 5. FUNDAMENTAL & SPURIOUS EMISSION (15.231b)

### 5.1 LIMITS OF RADIATED EMISSION MEASUREMENT

| Fundamental Frequency<br>(Mhz) | Fundamental Limit       | Spurious Limit          |
|--------------------------------|-------------------------|-------------------------|
|                                | $\mu\text{V/m}$ (at 3m) | $\mu\text{V/m}$ (at 3m) |
| 40.66 – 40.70                  | 2250                    | 225                     |
| 70 – 130                       | 1250                    | 125                     |
| 130 - 174                      | 1250 to 3750            | 125 to 375              |
| 174 - 260                      | 3750                    | 375                     |
| 260 – 470                      | 3750 to 12500           | 375 to 1250             |
| Above 470                      | 12500                   | 1250                    |

**NOTE:** (1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dBuV/m) = 20 log Emission level ( $\mu\text{V/m}$ ).

(3) All emissions from a device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

### 5.2 EUT Configuration

The radiated emissions test setups are in accordance with ANSI C63.4

The equipment under test was set up on the 3 meter Anechoic chamber test non-conductive table 80cm above ground, same as conducted Excess data cable was folded back and forth to form a 30cm by 40cm bundle.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

If the EUT is a Personal Computer or a peripheral of personal computer, and the personal computer has an auxiliary AC outlet which can be used for providing power to an external monitor, then all measurements will be made with the monitor power from first the computer-mounted AC outlet and then a floor-mounted AC outlet.

### 5.3 Test Procedure

The measurement was applied in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, the pre-amplifier and high pass filter is equipped just at the output terminal of the antenna.

metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.


Both horizontal and vertical polarities of the receiving antenna were assessed and the higher reading was listed in this report..

## 5.4 EMI Receiver Configuration (for the frequencies tested)

|                             |                |
|-----------------------------|----------------|
| Frequency Range:            | 30MHz--1000MHz |
| Detector Function:          | Peak Mode      |
| Resolution Bandwidth (RBW): | 100KHz         |
| Frequency Range:            | Above 1000MHz  |
| Detector Function:          | Peak Mode      |
| Resolution Bandwidth (RBW): | 1MHz           |

## 5.5 Test Setup

### CISPR radiated EMI test setup

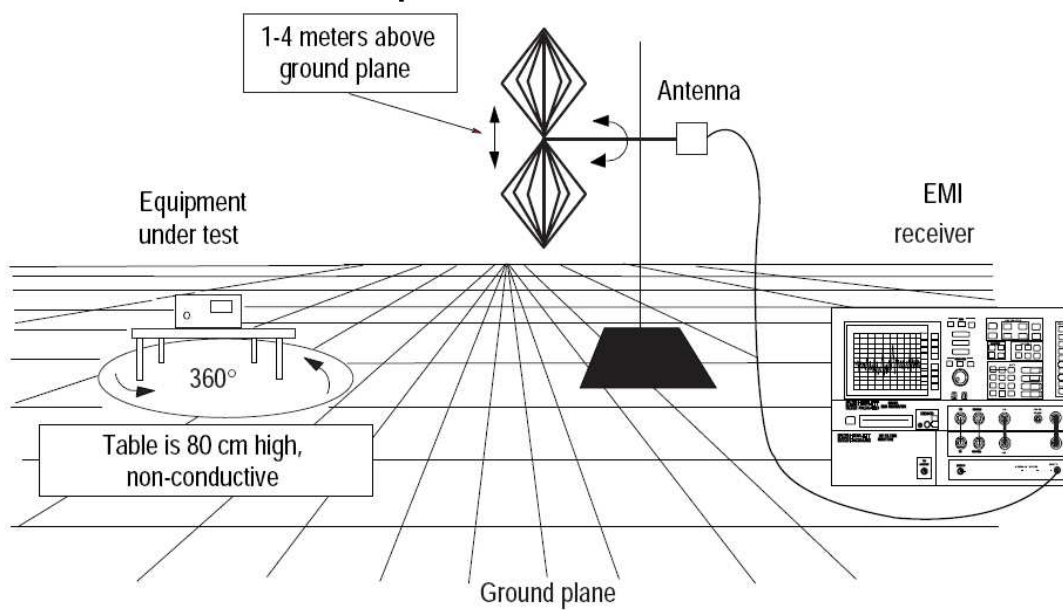


**Figure 4 Radiated Emission test setup**


5.6 Duty Cycle /Correct Factor


15.35 (c) when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

- 150ms Sweep Time

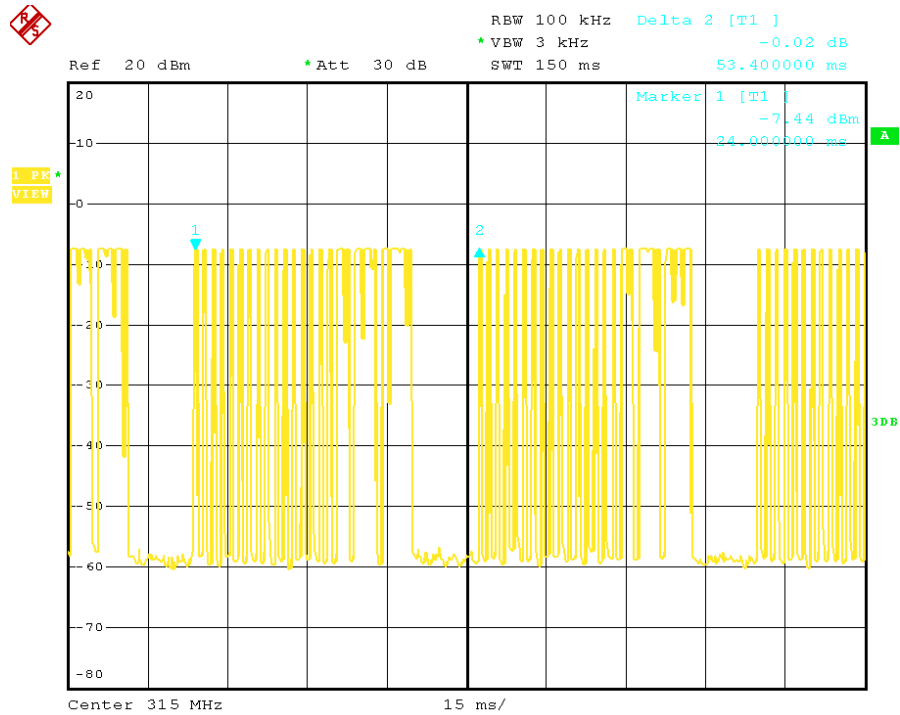

-3ms Sweep Time

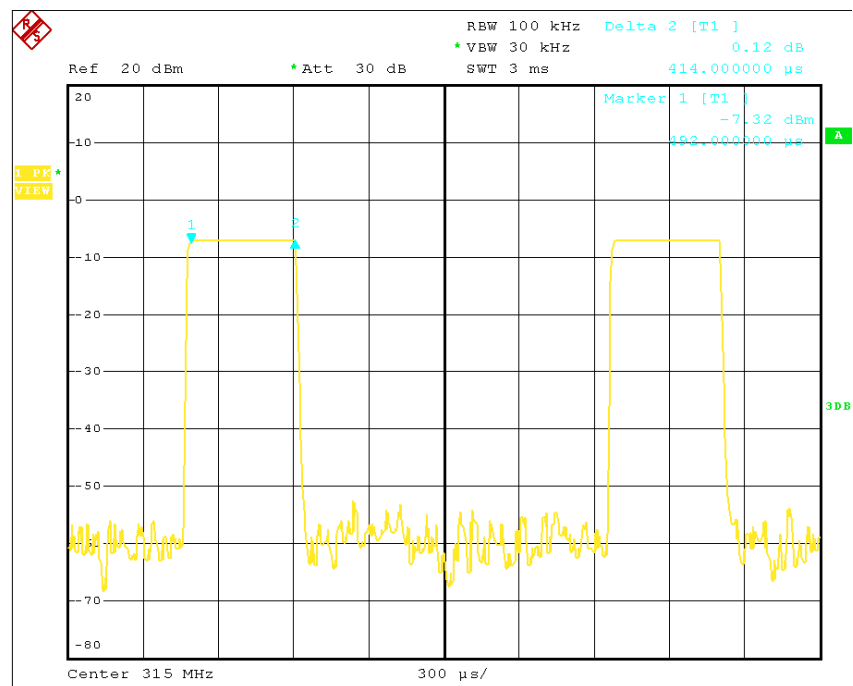

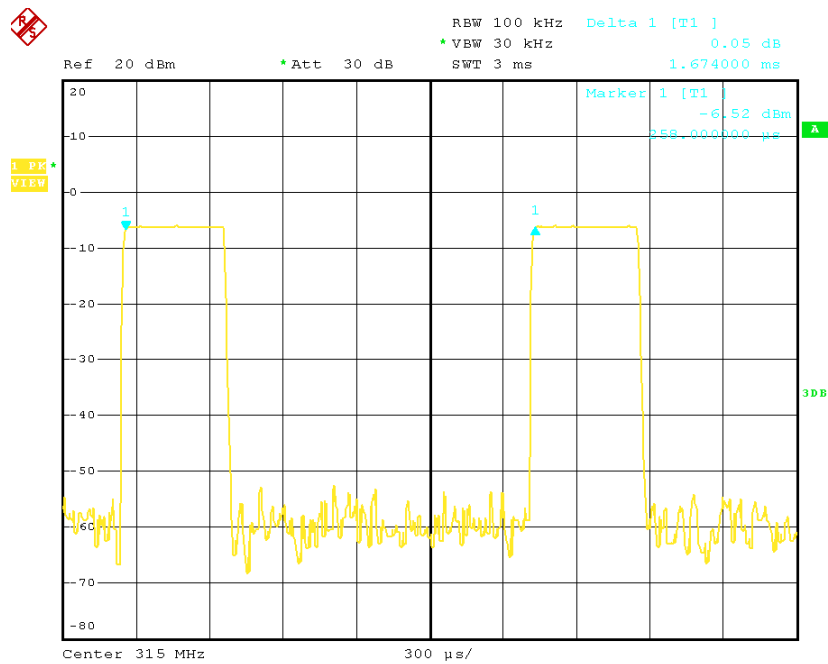

- The duration of one cycle = 53.4ms
- Effective period of the cycle =  $0.414 \times 32 = 13.25\text{ms}$
- $DC = 13.25\text{ms} / 53.4\text{ms} = 0.25$
- Averaging Factor =  $20 \times \log(DC) = -12.1\text{dB}$

## 5.7 Test Curve & Data

### 5.7.1 Test Data

| Frequency (MHz) | PK (dBμV /m) | Emission Type | Height (cm) | Polarization | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBμV/m) |
|-----------------|--------------|---------------|-------------|--------------|---------------|------------|-------------|----------------|
| 315.000         | 83.6         | Fundamental   | 100         | H            | 3.0           | -29.1      | -12.0       | 95.6           |
| 236.2620        | 46..3        | Spurious      | 116.0       | H            | 176.0         | -32.3      | -29.3       | 75.6           |
| 630.0020        | 65.7         | Spurious      | 126.0       | H            | 10.0          | -21.7      | -9.9        | 75.6           |
| 945.0095        | 54.2         | Spurious      | 100.0       | H            | 10.0          | -17.5      | -21.4       | 75.6           |
| 1259.01         | 53.40        | Spurious      | 100.0       | V            | 10.0          | -15.8      | -22.2       | 75.6           |
| 1890.41         | 65.00        | Spurious      | 112.0       | V            | 240.0         | -14.2      | -9.4        | 75.6           |
| 3153.70         | 47.30        | Spurious      | 100.0       | V            | 156.0         | -9.5       | -28.3       | 75.6           |

Remark: 1, Corr. Ampl. = Indicated Reading + Antenna Factor + Cable Factor - Amplifier Gain

2, Margin = Corr. Ampl. – 15.231(b) Limit

the AV value according to the duty cycle

| Frequency (MHz) | PK (dBμV /m) | Emission Type | AV (dBμV /m) | Corr. (dB) | Margin (dB) | Limit (dBμV/m) |
|-----------------|--------------|---------------|--------------|------------|-------------|----------------|
| 315.000         | 83.6         | Fundamental   | 71.5         | -12.1      | -4.1        | 75.6           |
| 236.2620        | 46.3         | Spurious      | 34.2         |            | -21.4       | 55.6           |
| 630.0020        | 64.7         | Spurious      | 52.6         |            | -3.0        | 55.6           |
| 945.0095        | 54.2         | Spurious      | 42.1         |            | -13.5       | 55.6           |
| 1259.01         | 53.40        | Spurious      | 41.3         |            | -14.3       | 55.6           |
| 1890.41         | 65.00        | Spurious      | 52.9         |            | -2.7        | 55.6           |
| 3153.70         | 47.30        | Spurious      | 35.2         |            | -20.4       | 55.6           |


Remark: 1. Correct Factor =  $20\lg(\text{duty cycle}) = 20\lg(0.25) = -12.1$

2. AV Reading = PK Reading + Correct Factor


3. Margin = AV Reading - limit

5.7.2 Test Curve

Test Frequency (30-1000MHz)

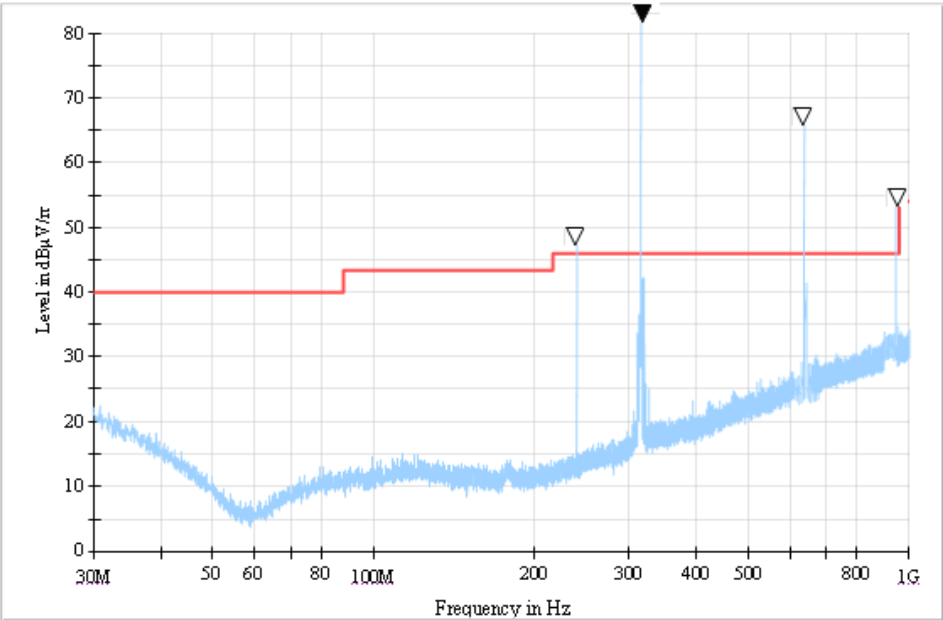

Test Frequency (1000-3200MHz)

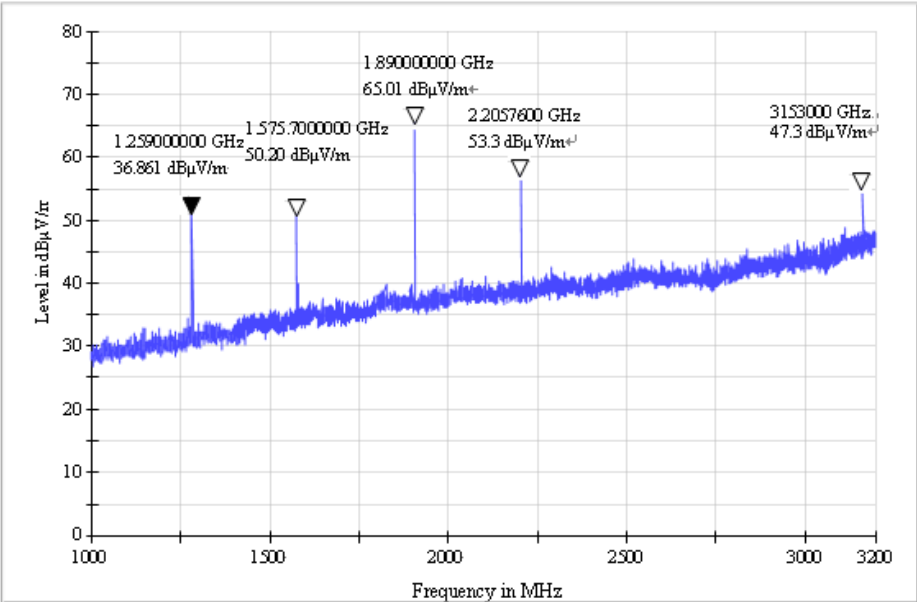

## 6. RESTRICT BAND RADIATED EMISSION (15.205)

### 6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

| Frequency (Mhz) | Limit Strength | Measurement Distance |
|-----------------|----------------|----------------------|
|                 | dB $\mu$ V/m   | (m)                  |
| 30-88           | 40             | 3                    |
| 88-216          | 43.5           | 3                    |
| 216-960         | 46.0           | 3                    |
| Above 960       | 54.0           | 3                    |

**NOTE:** (1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dB $\mu$ V/m) = 20 log Emission level (uV/m).

(3) All emissions from a device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

### 6.2 EUT Configuration

The radiated emissions test setups are in accordance with ANSI C63.4

The equipment under test was set up on the 3 meter Anechoic chamber test non-conductive table 80cm above ground, same as conducted Excess data cable was folded back and forth to form a 30cm by 40cm bundle.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

If the EUT is a Personal Computer or a peripheral of personal computer, and the personal computer has an auxiliary AC outlet which can be used for providing power to an external monitor, then all measurements will be made with the monitor power from first the computer-mounted AC outlet and then a floor-mounted AC outlet.

### 6.3 Test Procedure

The measurement was applied in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, the pre-amplifier and high pass filter is equipped just at the output terminal of the antenna.

metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.


Both horizontal and vertical polarities of the receiving antenna were assessed and the higher reading was listed in this report..

#### 6.4 EMI Receiver Configuration (for the frequencies tested)

|                             |                |
|-----------------------------|----------------|
| Frequency Range:            | 30MHz--1000MHz |
| Detector Function:          | Peak Mode      |
| Resolution Bandwidth (RBW): | 100KHz         |
| Frequency Range:            | Above 1000MHz  |
| Detector Function:          | Peak Mode      |
| Resolution Bandwidth (RBW): | 1MHz           |

#### 6.5 Test Setup

##### CISPR radiated EMI test setup

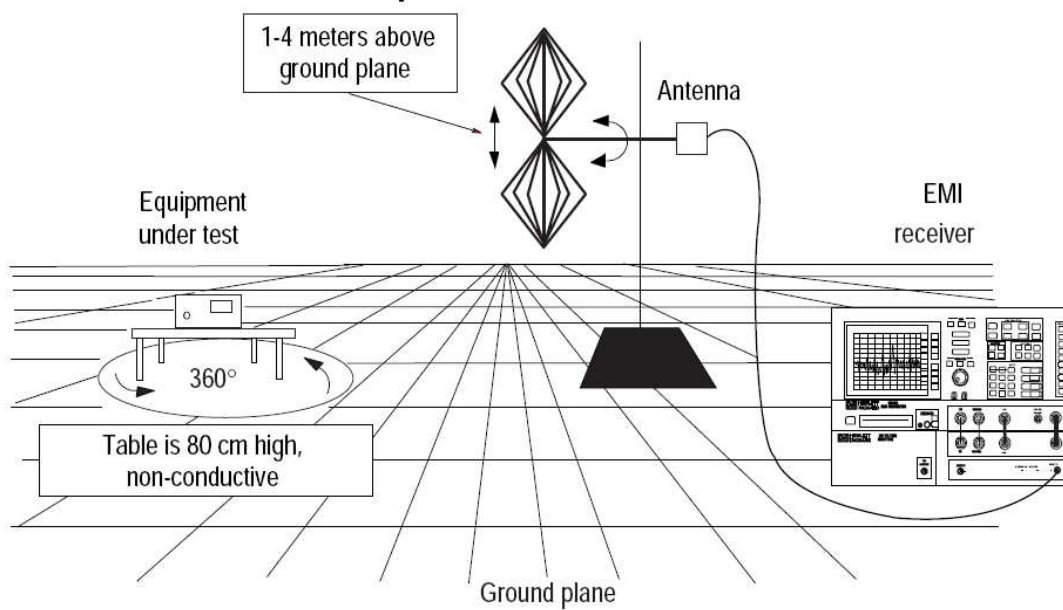

**Figure 4 Radiated Emission test setup**

## 6.6 Test Curve & Data

| Frequency<br>(MHz) | PK<br>(dBμV /m) | Emission<br>Type | Height<br>(cm) | Polarization | Azimuth<br>(deg) | Corr.<br>(dB) | Margin<br>(dB) | Limit<br>(dBμV/m) |
|--------------------|-----------------|------------------|----------------|--------------|------------------|---------------|----------------|-------------------|
| 1568.31            | 46.60           | Restrict         | 100            | H            | 60.0             | -15.1         | -27.4          | 74.0              |
| 1575.07            | 50.20           | Restrict         | 116.0          | H            | 153.0            | -14.3         | -23.8          | 74.0              |
| 2205.76            | 53.30           | Restrict         | 126.0          | H            | 3.0              | -11.7         | -20.7          | 74.0              |
| 2838.01            | 52.90           | Restrict         | 110.0          | V            | 10.0             | -10.3         | -21.1          | 74.0              |

Remark: 1, Corr. Ampl. = Indicated Reading + Antenna Factor + Cable Factor - Amplifier Gain

2, Margin = Corr. Ampl. – 15.209(a) Limit

the AV value according to the duty cycle

| Frequency<br>(MHz) | PK<br>(dBμV /m) | Emission<br>Type | AV<br>(dBμV /m) | Corr.<br>(dB) | Margin<br>(dB) | Limit<br>(dBμV/m) |
|--------------------|-----------------|------------------|-----------------|---------------|----------------|-------------------|
| 1568.31            | 46.60           | Restrict         | 34.5            | -12.1         | -19.5          | 54.0              |
| 2205.76            | 53.30           | Restrict         | 41.2            |               | -12.8          | 54.0              |

Remark: 1. Correct Factor =  $20\lg(\text{duty cycle}) = 20\lg(0.25) = -12.1$

2. AV Reading = PK Reading + Correct Factor

3. Margin = AV Reading - limit

## 7. DEACTIVATING TIME

### 7.1 Test limit

- ☒ (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- ☐ (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.
- ☐ (3) Periodic transmissions at regular predetermined intervals are not permitted.  
However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.
- ☐ (4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.
- ☐ (5) Transmission of set-up information for security systems may exceed the transmission duration limits in (1) and (2) above, provided such transmission are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

### 7.2 Test Procedure And Test Setup

The measurement was applied in a semi-anechoic chamber. The central frequency of test receiver was set as the operating frequency of EUT and the Span was set as 0.

The EUT was switched once. The test receiver recorded the whole time from the triggered moment to the time of stopping radiating. For manual switching, to avoid uncertainty, the operating above would be repeated five times and the worst data is recorded



## 8.EMISSION BANDWIDTH

### 8.1 Test Limit

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20dB down from the modulated carrier.

The limit for the EUT =  $0.25\% \times 315\text{MHz} = 787.50\text{kHz}$

### 8.2 Test Procedure And Test Setup

The EUT and simulators were placed on a 0.8m high wooden turntable above the horizontal metal ground plane.

The central frequency of test receiver was set near the operating frequency of EUT.

The test was conducted using the Spectrum Analyzer with the resolutions bandwidth set at 10kHz, the video bandwidth set at 3kHz.


### 8.3 Test Result

Temperature : 25.2 °C

Relative Humidity : 58 %

| Channel    | Emission Bandwidth<br>(kHz) | Limit<br>(kHz) |
|------------|-----------------------------|----------------|
| 1 (315MHz) | 520.0                       | 787.50         |
| /          | /                           | /              |

8.4 Test Photograph

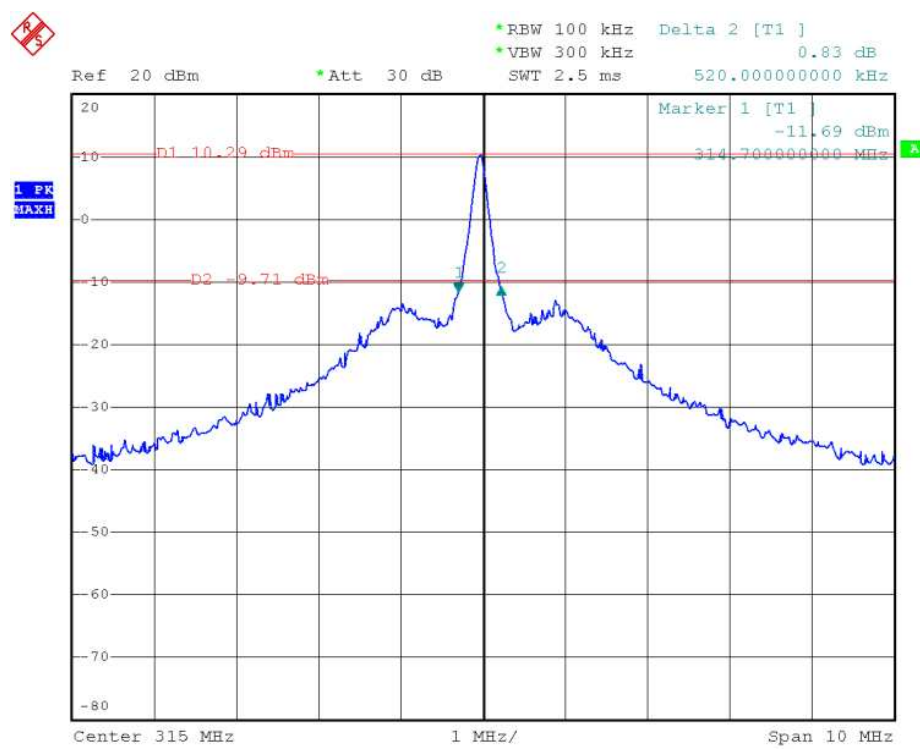

## 9. INFORMATION ON THE TESTING EQUIPMENT

| Manufacturer | Description         | Model                | Serial Number | Cal. Due Date |
|--------------|---------------------|----------------------|---------------|---------------|
| SCHAFFNER    | ESD Generator       | NSG435               | 08-31-01-0004 | 08/Oct/13     |
| SCHAFFNER    | FBT Generator       | NSG2025              | 15-62-01-0002 | 08/Oct/13     |
| SCHAFFNER    | Surge Generator     | NSG2025              | 15-62-01-0003 | 08/Oct/13     |
| USA/AR       | Sensor              | PF4000               | 08-03-01-0001 | 10/Oct/13     |
| USA/AR       | Transmit-antenna    | N/S                  | 18-03-01-0001 | 10/Oct/13     |
| BONN         | Power Amplifier     | BLWA0810-160/50<br>D | 10-32-02-0001 | 10/Oct/13     |
| R/S          | Power Meter         | NRVD                 | 10-31-01-0001 | 10/Oct/13     |
| EM TEST      | RF Generator        | CWS550               | 15-31-14-0001 | 08/Oct/13     |
| R/S          | Signal Generator    | SMY01                | 15-21-16-0002 | 08/May/13     |
| R/S          | Audio Generator     | 808G                 | 15-01-12-1    | 08/May/13     |
| R/S          | Milli-voltage Meter | URV5                 | 02-21-13-0001 | 10/May/13     |
| SCHAFFNER    | Audio Analyzer      | UPA                  | 15-91-04-0001 | 10/Oct/13     |
| R/S          | EMS test system     | TS9980               | /             | /             |
| R/S          | EMI Receiver        | ESU40                | 100082        | 09/May/13     |
| R/S          | AMN                 | ESH2-Z5              | 17-72-01-0001 | 08/May/13     |
| R/S          | AMN                 | ESH3-Z5              | 17-72-02-0001 | 08/May/13     |
| SCHAFFNER    | Antenna             | GBL6112B             | /             | 08/May/13     |
| R/S          | Hore Antenna        | HF906                | 100614        | 08/May/13     |
| R/S          | Absorbing Clamp     | NDS21                | 08-12-03-0001 | 08/May/13     |
| R/S          | Runner              | KMS560               | /             | /             |
| R/S          | Runner Controller   | HD050                | /             | /             |