

TEST REPORT

Product : 7"Tablet PC
Trade mark : DragonTouch, KINGPAD, KINGSLIM, AKASO
Model/Type reference : S7, S70, S7 PLUS, S7 PRO, S7X, S7 KIDS
Serial Number : N/A
Report Number : EED32I00225103
FCC ID : S5V-D07S70
Date of Issue : Oct. 27, 2016
Test Standards : 47 CFR Part 15Subpart C (2015)
Test result : PASS

Prepared for:

PROEXPRESS DISTRIBUTOR LLC
11011 Greenwood Ave N 11011 Greenwood Ave N, Seattle Washington
United States

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested By:

Tom-chen

Compiled by:

Tom Yang

Reviewed by:

Tom chen (Test Project)

Kevin yang (Project Engineer)

Date:

Report Seal

Oct. 27, 2016

Approved by:

Sheek . Luo

Sheek Luo (Lab supervisor)

Check No.: 2496558845



2 Version

Version No.	Date	Description
00	Oct. 27, 2016	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013/ KDB 558074 D01v03r05	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013/ KDB 558074 D01v03r05	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01v03r05	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013/ KDB 558074 D01v03r05	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013/ KDB 558074 D01v03r05	PASS
Radiated Spurious Emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested sample(s) and the sample information are provided by the client.

Model No.: S7, S70, S7 PLUS, S7 PRO, S7X, S7 KIDS

Only the model S7 was tested, the PCB, Schematic, Hardware etc were identical for the above models, Only different model name due to difference agent and marketing purposes.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
6 GENERAL INFORMATION	7
6.1 CLIENT INFORMATION.....	7
6.2 GENERAL DESCRIPTION OF EUT.....	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	7
6.4 DESCRIPTION OF SUPPORT UNITS.....	8
6.5 TEST LOCATION.....	8
6.6 TEST FACILITY.....	8
6.7 DEVIATION FROM STANDARDS.....	9
6.8 ABNORMALITIES FROM STANDARD CONDITIONS.....	9
6.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	9
6.10 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	9
7 EQUIPMENT LIST	10
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	12
Appendix A): Conducted Peak Output Power.....	13
Appendix B): 6dB Occupied Bandwidth.....	14
Appendix C): Band-edge for RF Conducted Emissions.....	18
Appendix D): RF Conducted Spurious Emissions.....	21
Appendix E): Power Spectral Density.....	28
Appendix F): Antenna Requirement.....	32
Appendix G): AC Power Line Conducted Emission.....	33
Appendix H): Restricted bands around fundamental frequency (Radiated).....	36
Appendix I): Radiated Spurious Emissions.....	43
PHOTOGRAPHS OF TEST SETUP	51
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	53

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

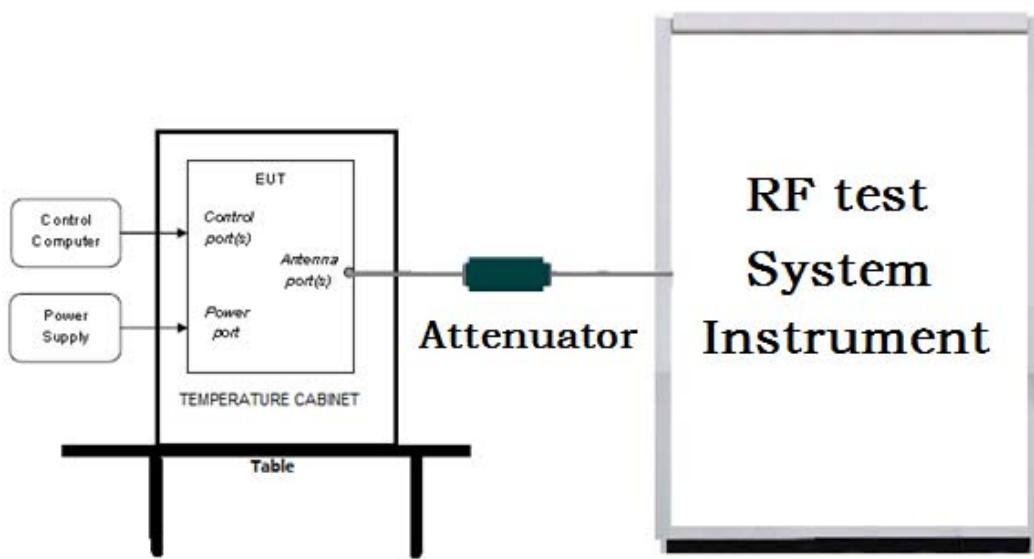

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

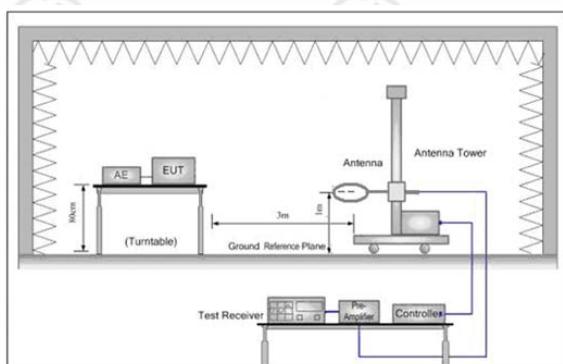


Figure 1. Below 30MHz

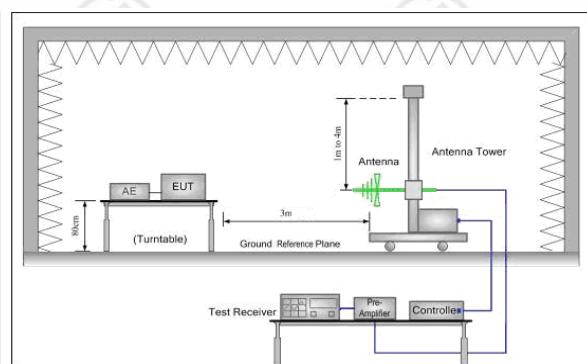


Figure 2. 30MHz to 1GHz


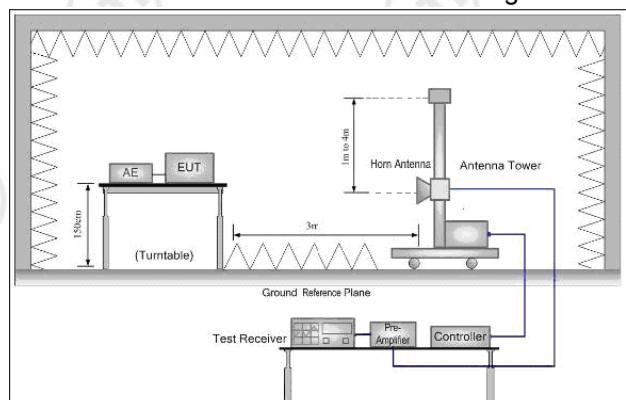


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

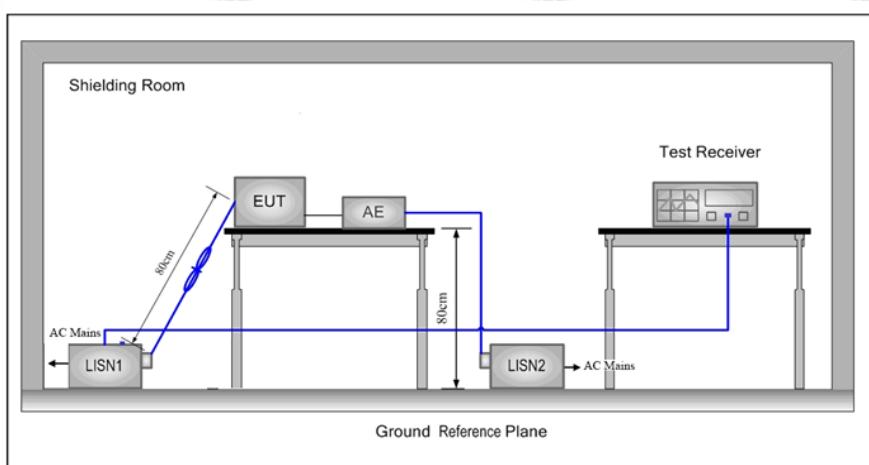

5.2 Test Environment

Operating Environment:

Temperature:	21°C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar

5.3 Test Condition

Test channel:

Test Mode	Tx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11b/g/n(HT20)	2412MHz ~2462 MHz	Channel 1	Channel 6	Channel11
		2412MHz	2437MHz	2462MHz
Transmitting mode:	Keep the EUT at Transmit mode.			

Test mode:

Pre-scan under all rate at lowest channel 1

Mode	802.11b				802.11g			
Data Rate	1Mbps	2Mbps	5.5Mbps	11Mbps	6Mbps	9Mbps	12Mbps	18Mbps
Power(dBm)	8.75	8.81	8.82	8.88	8.13	8.10	8.07	8.01
Mode	802.11n (HT20)							
Data Rate	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps
Power(dBm)	7.49	7.45	7.41	7.40	7.33	7.30	7.22	7.21

Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20).

6 General Information

6.1 Client Information

Applicant:	PROEXPRESS DISTRIBUTOR LLC
Address of Applicant:	11011 Greenwood Ave N 11011 Greenwood Ave N, Seattle Washington United States
Manufacturer:	PROEXPRESS DISTRIBUTOR LLC
Address of Manufacturer:	11011 Greenwood Ave N 11011 Greenwood Ave N, Seattle Washington United States
Factory:	PROEXPRESS DISTRIBUTOR LLC
Address of Factory:	11011 Greenwood Ave N 11011 Greenwood Ave N, Seattle Washington United States

6.2 General Description of EUT

Product Name:	7"Tablet PC
Model No.(EUT):	S7, S70, S7 PLUS, S7 PRO, S7X, S7 KIDS
Test Model No.:	S7
Trade Mark:	DragonTouch, KINGPAD, KINGSLIM, AKASO
EUT Supports Radios application:	Bluetooth V3.0+EDR, Bluetooth V4.0 BLE, WiFi b/g/n(HT20), GSM/GPRS/EDGE 850/1900, WCDMA/HSDPA HSUPA 850/1900
Power Supply:	Model: UBP-623-052000 Input: 100-240V~ 50/60Hz Output: 5.0V =2000mA
Battery	Li-ion 3.7V 2700mAH
Sample Received Date:	Aug. 11, 2016
Sample tested Date:	Aug. 11, 2016 to Oct. 27, 2016

6.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g :OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20) : OFDM (64QAM, 16QAM, QPSK,BPSK)
Sample Type:	Portable production
Test Power Grade:	8
Test Software of EUT:	WLAN Test Version:1.0.4
Antenna Type:	Integral antenna
Antenna Gain:	0.39dBi
Test Voltage:	AC 120V/60Hz & AC 230V/50Hz

Operation Frequency each of channel(802.11b/g/n HT20)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

6.4 Description of Support Units

The EUT has been tested independently.

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China 518101

Telephone: +86 (0) 755 3368 3668 Fax:+86 (0) 755 3368 3385

No tests were sub-contracted.

6.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1910

Centre Testing International Group Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories..

A2LA-Lab Cert. No. 3061.01

Centre Testing International Group Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 886427

Centre Testing International Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 886427.

IC-Registration No.: 7408A-2

The 3m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408A-2 .

IC-Registration No.: 7408B-1

The 10m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408B-1.

NEMKO-Aut. No.: ELA503

Centre Testing International Group Co., Ltd. has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10.

VCCI

The Radiation 3 & 10 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-4096.

Main Ports Conducted Interference Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-4563.

Telecommunication Ports Conducted Disturbance Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-2146.

The Radiation 3 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-758

6.7 Deviation from Standards

None.

6.8 Abnormalities from Standard Conditions

None.

6.9 Other Information Requested by the Customer

None.

6.10 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-12.75GHz)
4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%

7 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	04-01-2016	03-31-2017
Communication test set test set	Agilent	N4010A	MY51400230	04-01-2016	03-31-2017
Spectrum Analyzer	Keysight	N9010A	MY54510339	04-01-2016	03-31-2017
Signal Generator	Keysight	N5182B	MY53051549	04-01-2016	03-31-2017
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-12-2016	01-11-2017
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-12-2016	01-11-2017
DC Power	Keysight	E3642A	MY54436035	04-01-2016	03-31-2017
PC-1	Lenovo	R4960d	---	04-01-2016	03-31-2017
power meter & power sensor	R&S	OSP120	101374	04-01-2016	03-31-2017
RF control unit	JS Tonscend	JS0806-2	158060006	04-01-2016	03-31-2017
BT&WI-FI Automatic test software	JS Tonscend	JS1120-2	---	04-01-2016	03-31-2017

Conducted disturbance Test					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100009	06-16-2016	06-15-2017
Temperature/ Humidity Indicator	TAYLOR	1451	1905	04-27-2016	04-26-2017
Communication test set	Agilent	E5515C	GB47050534	04-01-2016	03-31-2017
Communication test set	R&S	CMW500	152394	04-01-2016	03-31-2017
LISN	R&S	ENV216	100098	06-16-2016	06-15-2017
LISN	schwarzbeck	NNLK8121	8121-529	06-16-2016	06-15-2017
Voltage Probe	R&S	ESH2-Z3	--	07-09-2014	07-07-2017
Current Probe	R&S	EZ17	100106	06-16-2016	06-15-2017
ISN	TESEQ GmbH	ISN T800	30297	01-29-2015	01-27-2017

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	06-05-2016	06-05-2019
TRILOG Broadband Antenna	SCHWARZBECK	VULB9163	9163-484	05-23-2016	05-22-2017
Microwave Preamplifier	Agilent	8449B	3008A02425	02-04-2016	02-03-2017
Horn Antenna	ETS-LINDGREN	3117	00057410	06-30-2015	06-28-2018
Horn Antenna	A.H.SYSTEMS	SAS-574	374	06-30-2015	06-28-2018
Loop Antenna	ETS	6502	00071730	07-30-2015	07-28-2017
Spectrum Analyzer	R&S	FSP40	100416	06-16-2016	06-15-2017
Receiver	R&S	ESCI	100435	06-16-2016	06-15-2017
Multi device Controller	maturo	NCD/070/1071 1112	---	01-12-2016	01-11-2017
LISN	schwarzbeck	NNBM8125	81251547	06-16-2016	06-15-2017
LISN	schwarzbeck	NNBM8125	81251548	06-16-2016	06-15-2017
Signal Generator	Agilent	E4438C	MY45095744	04-01-2016	03-31-2017
Signal Generator	Keysight	E8257D	MY53401106	04-01-2016	03-31-2017
Temperature/ Humidity Indicator	TAYLOR	1451	1905	04-27-2016	04-26-2017
Communication test set	Agilent	E5515C	GB47050534	04-01-2016	03-31-2017
Cable line	Fulai(7M)	SF106	5219/6A	01-12-2016	01-11-2017
Cable line	Fulai(6M)	SF106	5220/6A	01-12-2016	01-11-2017
Cable line	Fulai(3M)	SF106	5216/6A	01-12-2016	01-11-2017
Cable line	Fulai(3M)	SF106	5217/6A	01-12-2016	01-11-2017
Communication test set	R&S	CMW500	152394	04-01-2016	03-31-2017
High-pass filter	Sinoscite	FL3CX03WG1 8NM12-0398-002	---	01-12-2016	01-11-2017
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX01CA09 CL12-0395-001	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX01CA08 CL12-0393-001	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX02CA04 CL12-0396-002	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX02CA03 CL12-0394-001	---	01-12-2016	01-11-2017

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C (2015)	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test Requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (b)(3)	ANSI C63.10/ KDB 558074	Conducted Peak Output Power	PASS	Appendix A)
Part15C Section 15.247 (a)(2)	ANSI C63.10/ KDB 558074	6dB Occupied Bandwidth	PASS	Appendix B)
Part15C Section 15.247(d)	ANSI C63.10/ KDB 558074	Band-edge for RF Conducted Emissions	PASS	Appendix C)
Part15C Section 15.247(d)	ANSI C63.10/ KDB 558074	RF Conducted Spurious Emissions	PASS	Appendix D)
Part15C Section 15.247 (e)	ANSI C63.10/ KDB 558074	Power Spectral Density	PASS	Appendix E)
Part15C Section 15.203/15.247 (c)	ANSI C63.10	Antenna Requirement	PASS	Appendix F)
Part15C Section 15.207	ANSI C63.10	AC Power Line Conducted Emission	PASS	Appendix G)
Part15C Section 15.205/15.209	ANSI C63.10	Restricted bands around fundamental frequency (Radiated Emission)	PASS	Appendix H)
Part15C Section 15.205/15.209	ANSI C63.10	Radiated Spurious Emissions	PASS	Appendix I)

Appendix A): Conducted Peak Output Power

Test Procedure

1. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Measure the conducted output power and record the results in the test report.

Result Table


Mode	Channel	Conducted Peak Output Power [dBm]	Verdict
11B	LCH	8.88	PASS
11B	MCH	8.65	PASS
11B	HCH	8.39	PASS
11G	LCH	8.13	PASS
11G	MCH	8.07	PASS
11G	HCH	8.55	PASS
11N20SISO	LCH	7.49	PASS
11N20SISO	MCH	7.31	PASS
11N20SISO	HCH	6.9	PASS



Appendix B): 6dB Occupied Bandwidth



Result Table

Mode	Channel	6dB Bandwidth [MHz]	99% OBW [MHz]	Verdict	Remark
11B	LCH	10.03	12.481	PASS	Peak detector
11B	MCH	9.541	12.499	PASS	
11B	HCH	10.03	12.535	PASS	
11G	LCH	16.34	16.632	PASS	
11G	MCH	16.35	16.698	PASS	
11G	HCH	16.37	16.697	PASS	
11N20SISO	LCH	17.59	17.836	PASS	
11N20SISO	MCH	17.55	17.848	PASS	
11N20SISO	HCH	17.58	17.869	PASS	

Test Graph

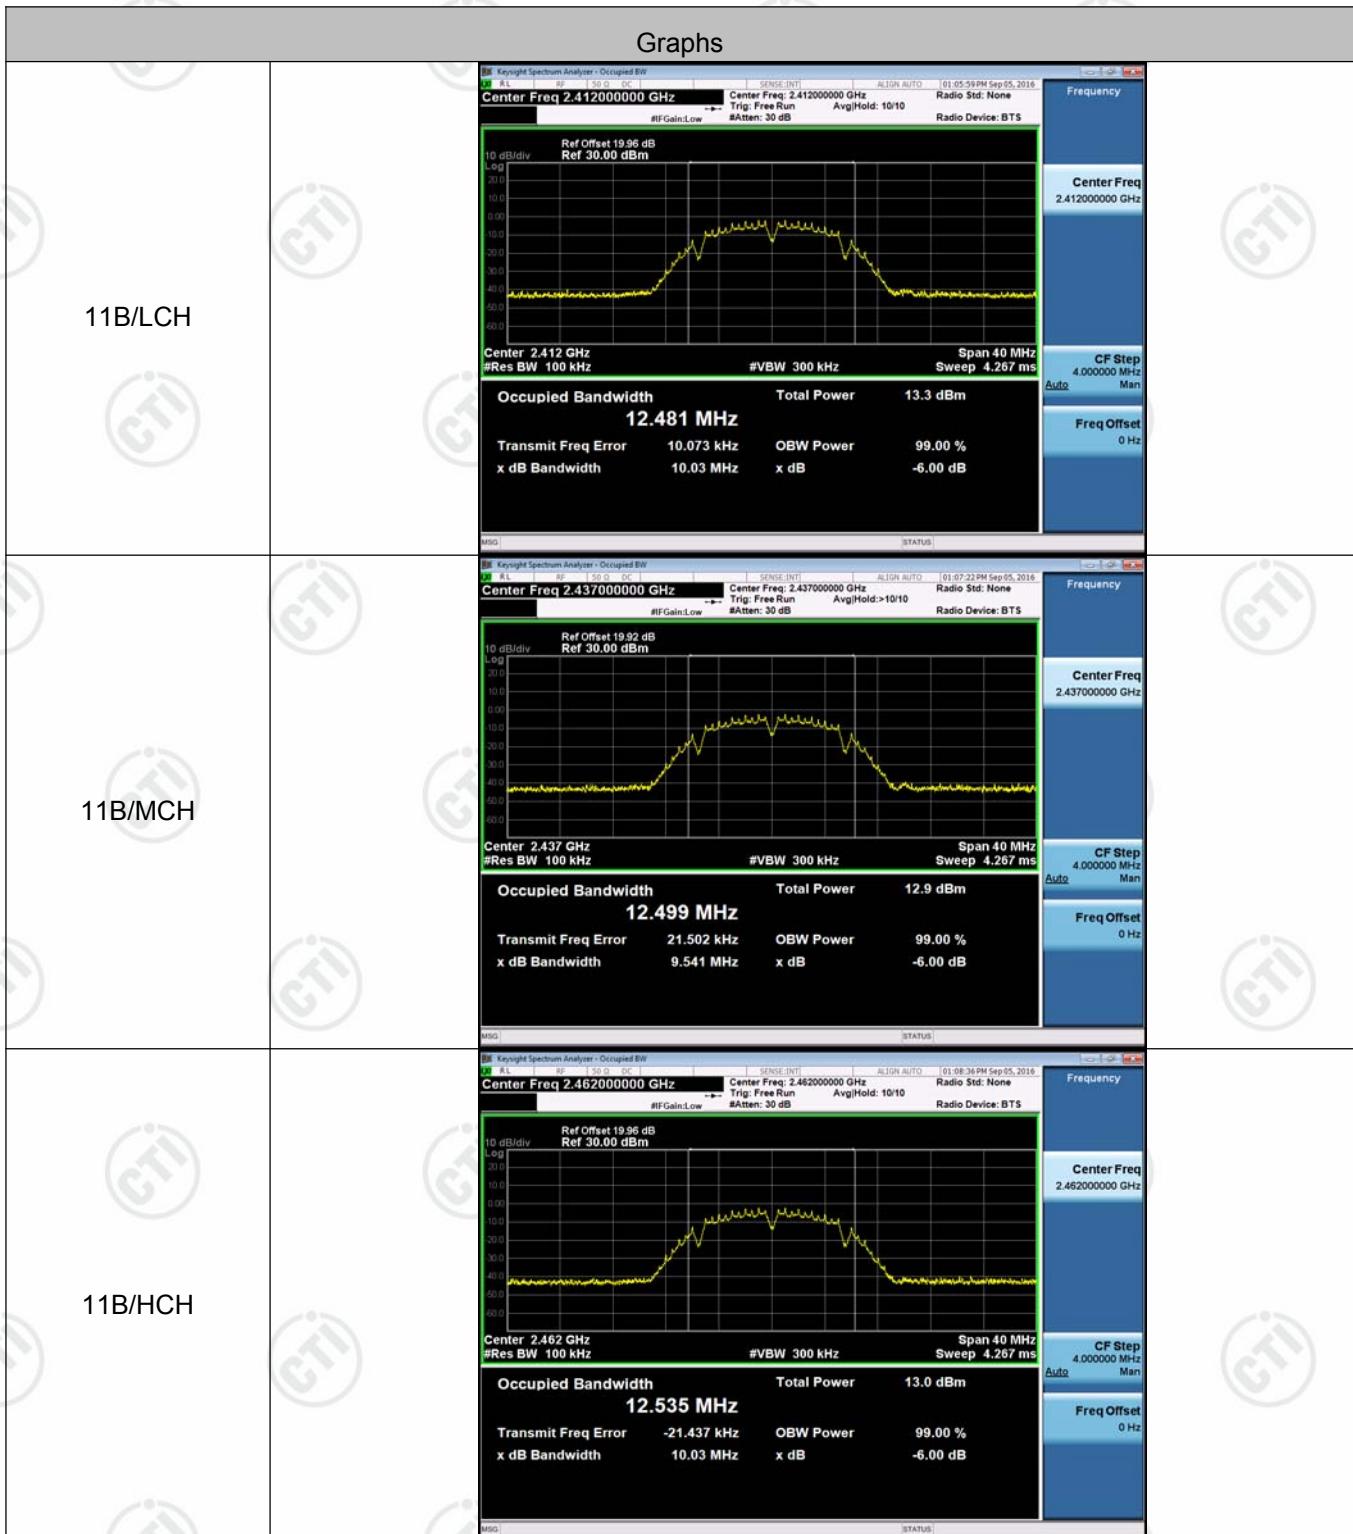

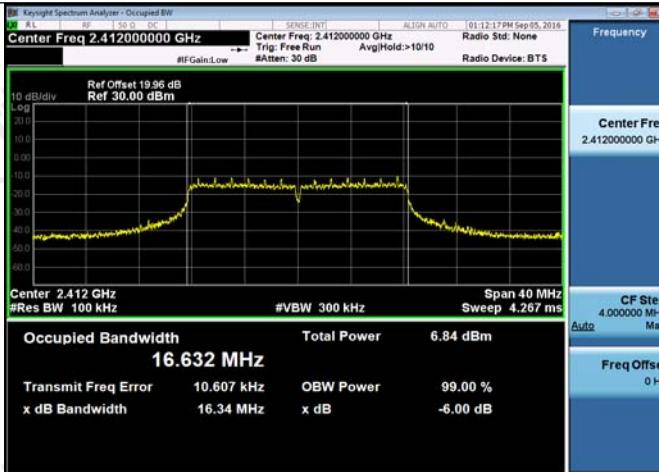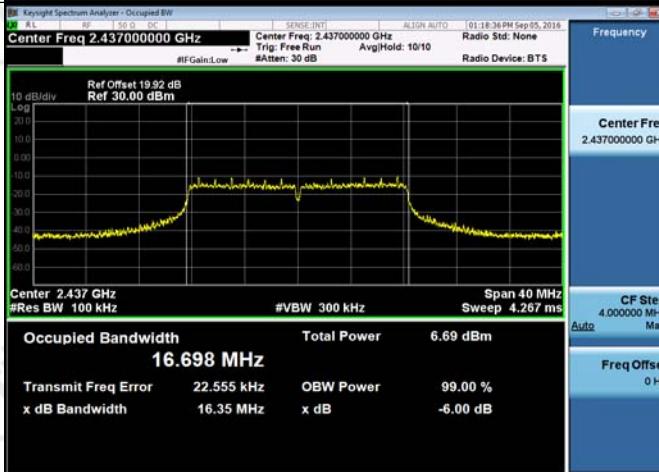11G/LCH	 <p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset 19.96 dB Ref 30.00 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 4.267 ms</p> <p>Occupied Bandwidth 16.632 MHz</p> <p>Total Power 6.84 dBm</p> <p>Transmit Freq Error 10.607 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 16.34 MHz x dB -6.00 dB</p>
11G/MCH	 <p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 19.92 dB Ref 30.00 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 4.267 ms</p> <p>Occupied Bandwidth 16.698 MHz</p> <p>Total Power 6.69 dBm</p> <p>Transmit Freq Error 22.555 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 16.35 MHz x dB -6.00 dB</p>
11G/HCH	 <p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset 19.96 dB Ref 30.00 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 4.267 ms</p> <p>Occupied Bandwidth 16.697 MHz</p> <p>Total Power 6.31 dBm</p> <p>Transmit Freq Error -15.921 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 16.37 MHz x dB -6.00 dB</p>

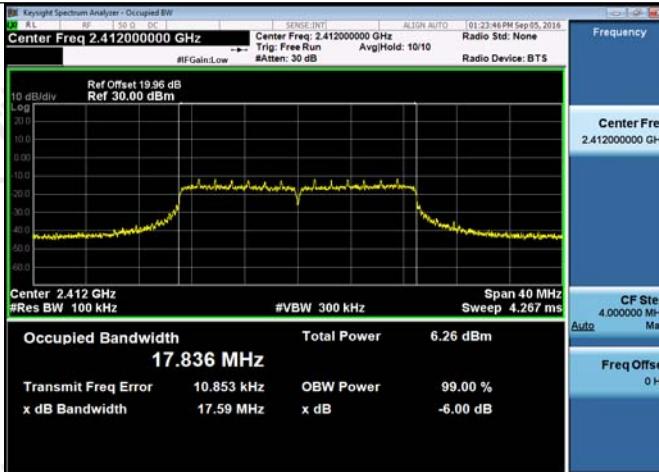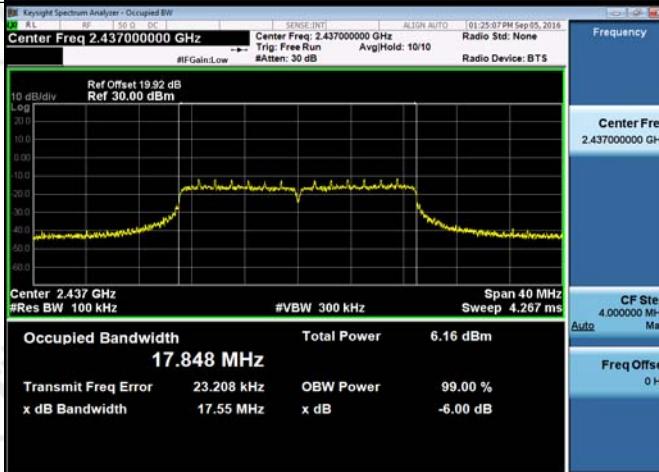
11N20SISO/LCH	 <p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset 19.96 dB Ref 30.00 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 4.267 ms</p> <p>Occupied Bandwidth 17.836 MHz</p> <p>Total Power 6.26 dBm</p> <p>Transmit Freq Error 10.853 kHz x dB Bandwidth 17.59 MHz</p> <p>OBW Power 99.00 % x dB -6.00 dB</p>
11N20SISO/MCH	 <p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 19.92 dB Ref 30.00 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 4.267 ms</p> <p>Occupied Bandwidth 17.848 MHz</p> <p>Total Power 6.16 dBm</p> <p>Transmit Freq Error 23.208 kHz x dB Bandwidth 17.55 MHz</p> <p>OBW Power 99.00 % x dB -6.00 dB</p>
11N20SISO/HCH	 <p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset 19.96 dB Ref 30.00 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 4.267 ms</p> <p>Occupied Bandwidth 17.869 MHz</p> <p>Total Power 5.73 dBm</p> <p>Transmit Freq Error -5.098 kHz x dB Bandwidth 17.58 MHz</p> <p>OBW Power 99.00 % x dB -6.00 dB</p>


Appendix C): Band-edge for RF Conducted Emissions

Result Table

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
11B	LCH	-2.383	-49.648	-22.38	PASS
11B	HCH	-2.534	-49.520	-22.53	PASS
11G	LCH	-10.575	-49.761	-30.58	PASS
11G	HCH	-9.838	-49.651	-29.84	PASS
11N20SISO	LCH	-11.792	-49.945	-31.79	PASS
11N20SISO	HCH	-11.810	-50.192	-31.81	PASS

Test Graph

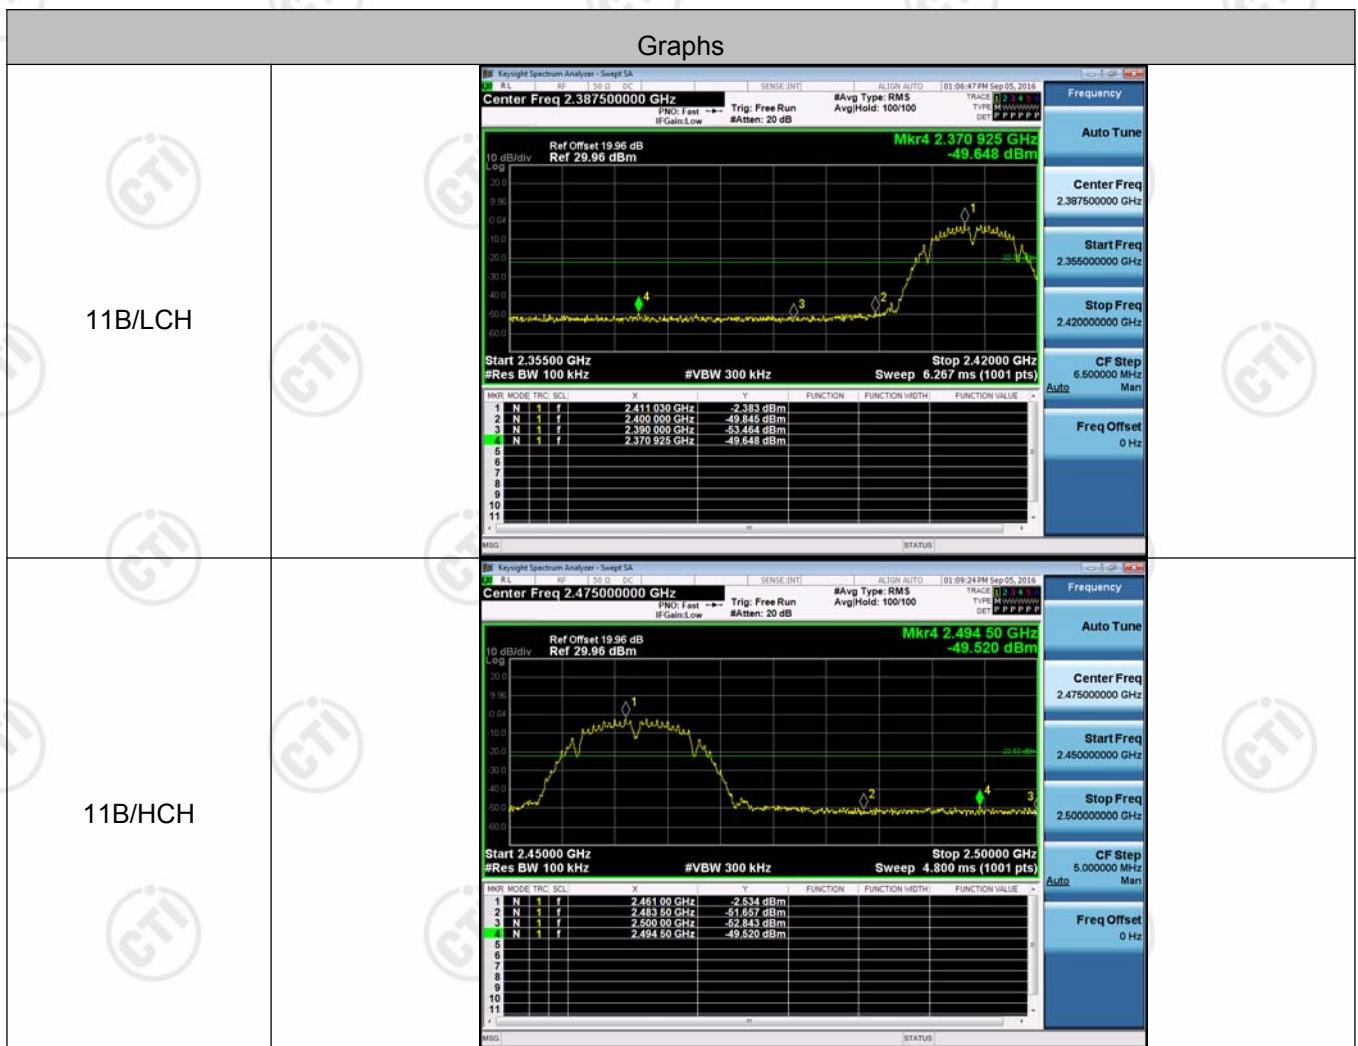

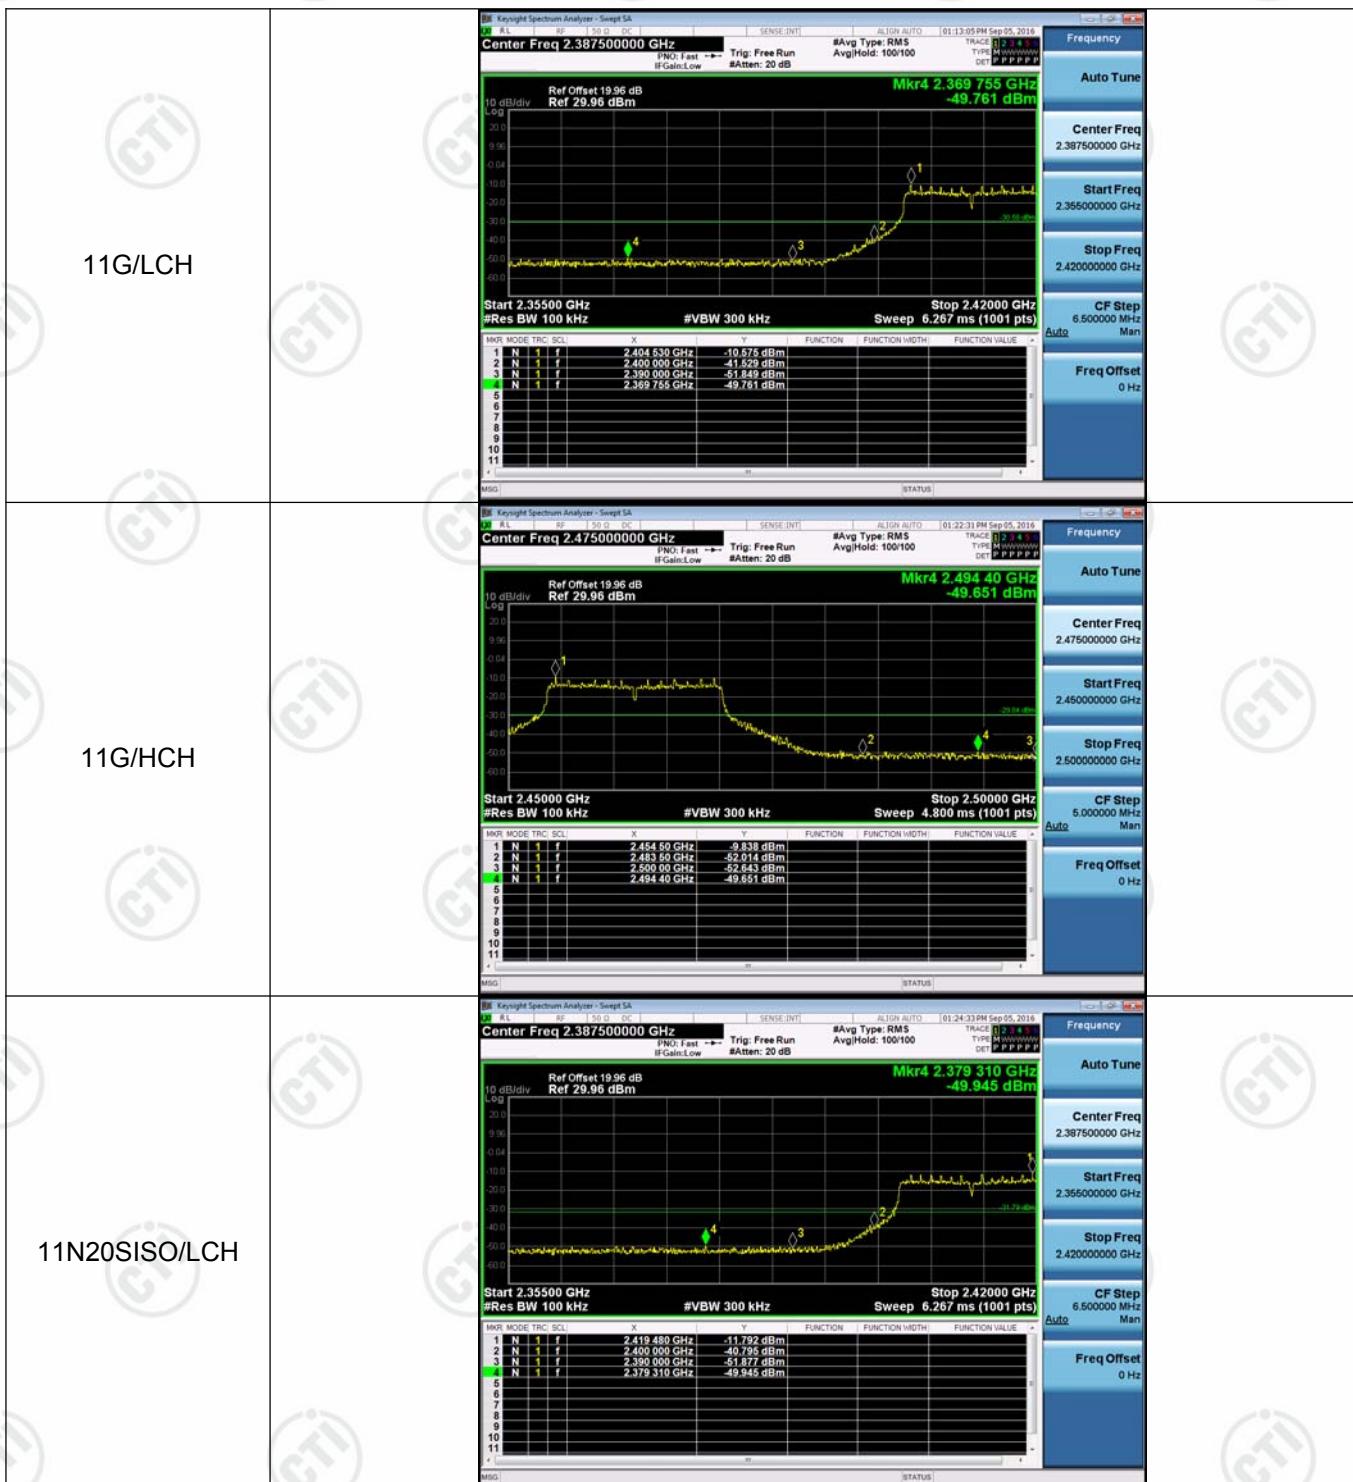







Appendix D): RF Conducted Spurious Emissions



Result Table



Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
11B	LCH	-2.215	<Limit	PASS
11B	MCH	-2.5	<Limit	PASS
11B	HCH	-2.38	<Limit	PASS
11G	LCH	-10.427	<Limit	PASS
11G	MCH	-10.543	<Limit	PASS
11G	HCH	-9.658	<Limit	PASS
11N20SISO	LCH	-11.344	<Limit	PASS
11N20SISO	MCH	-11.237	<Limit	PASS
11N20SISO	HCH	-11.605	<Limit	PASS


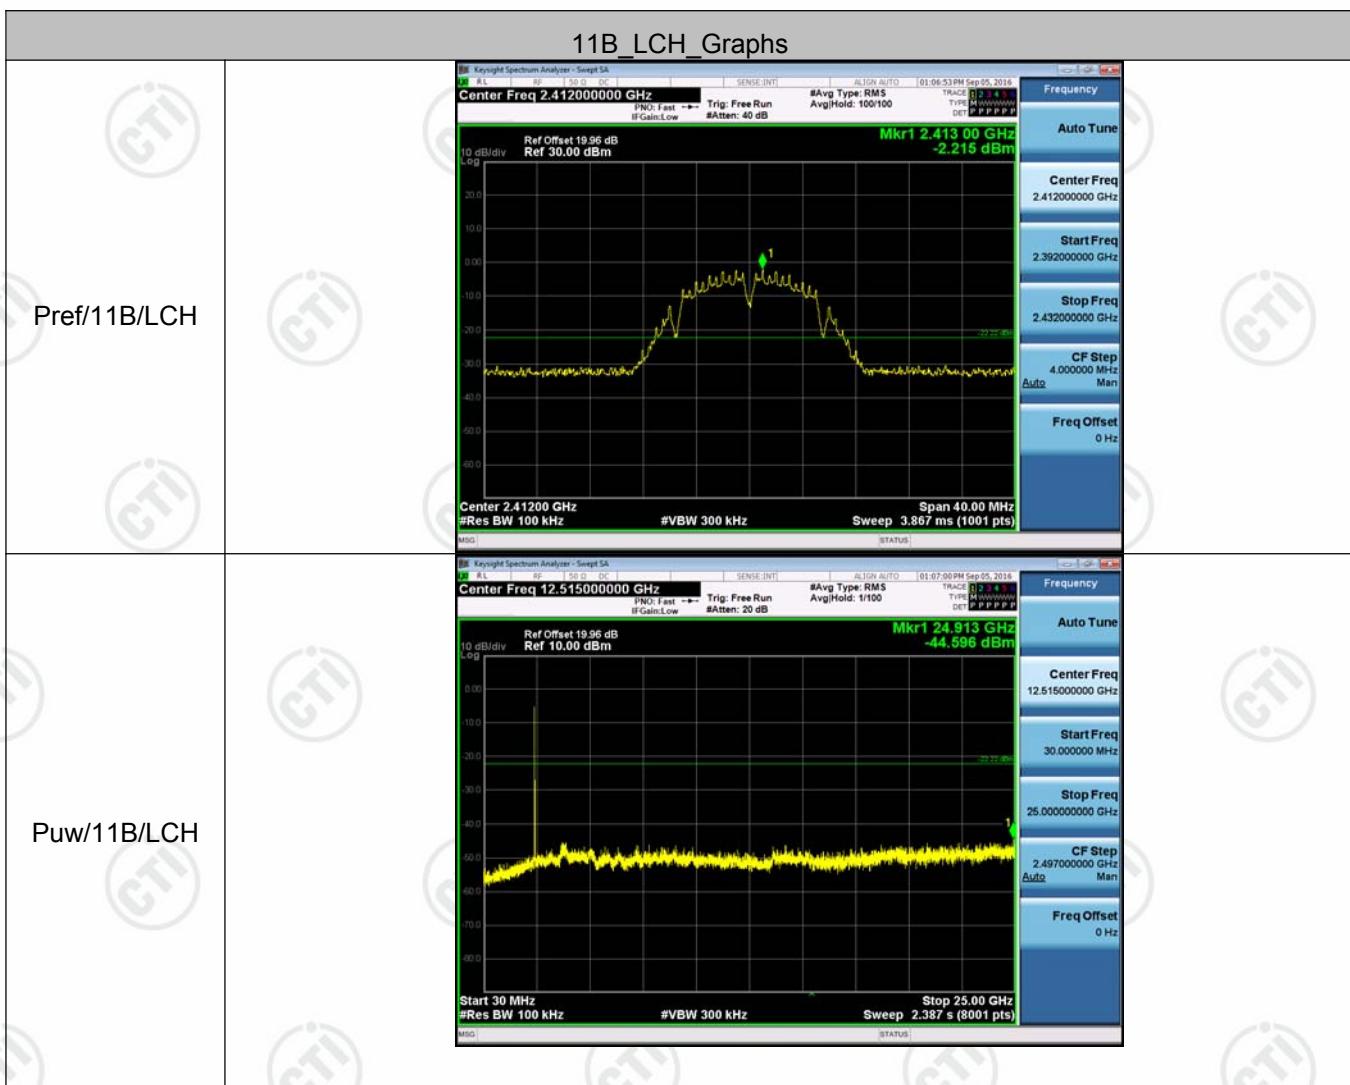
Test Graph

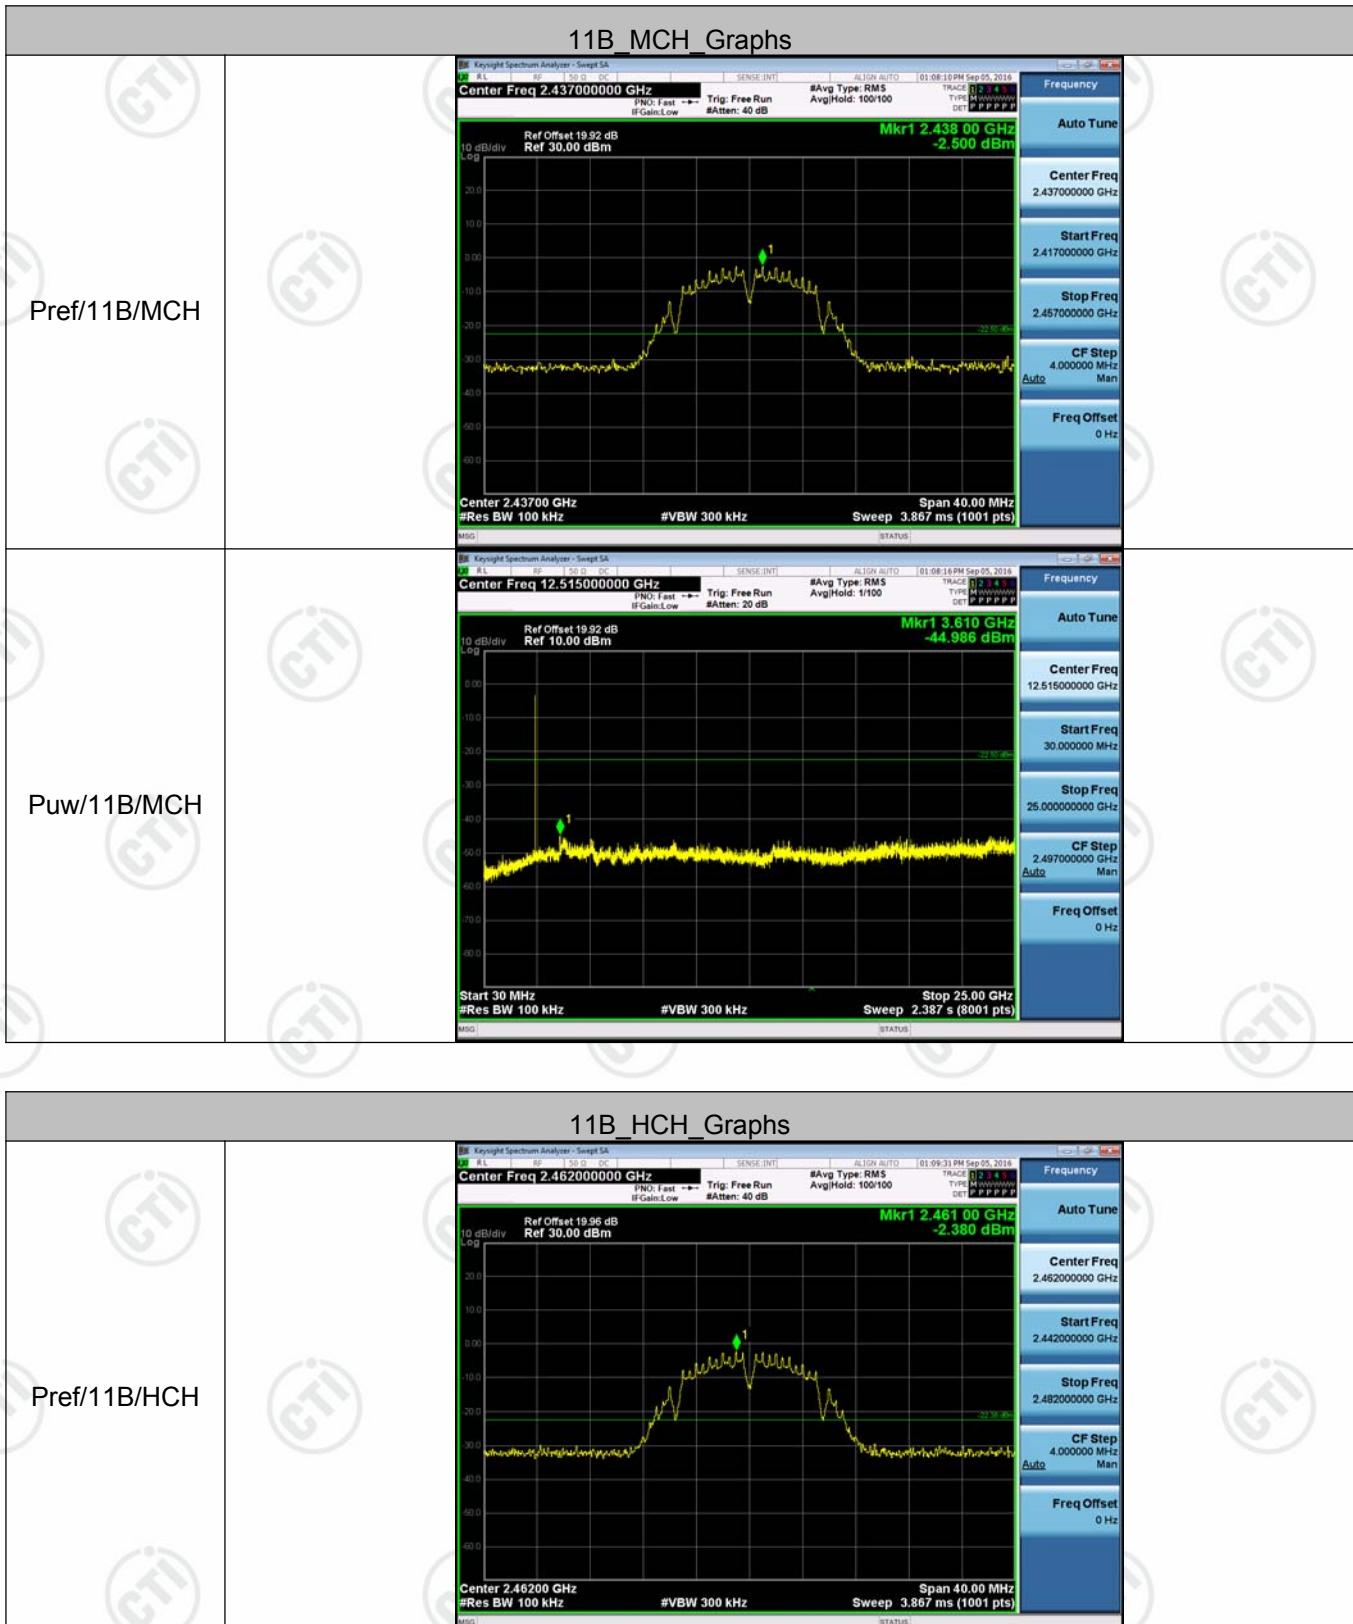
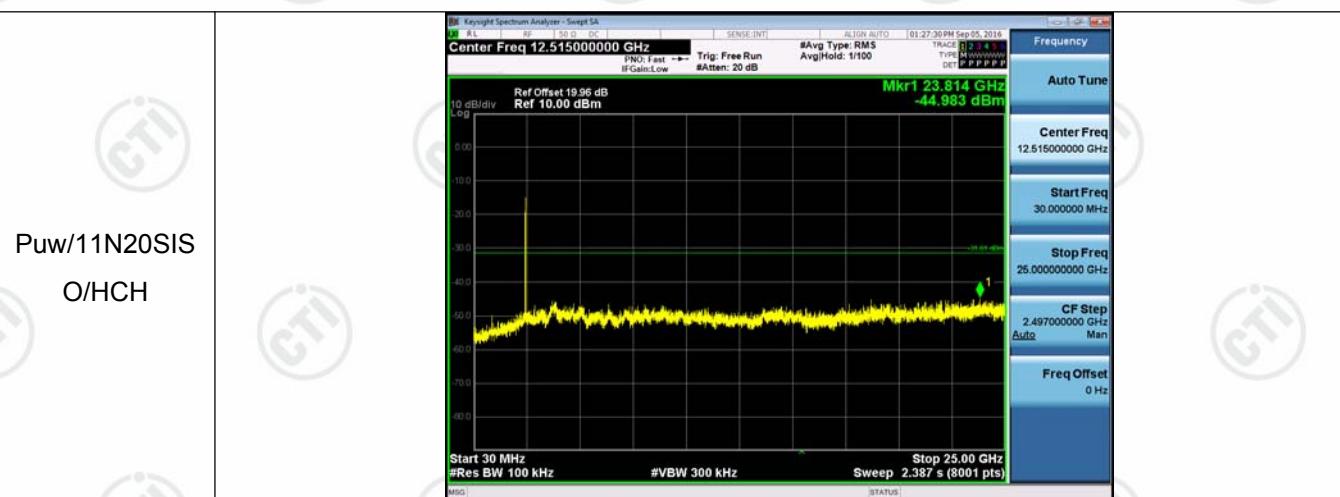


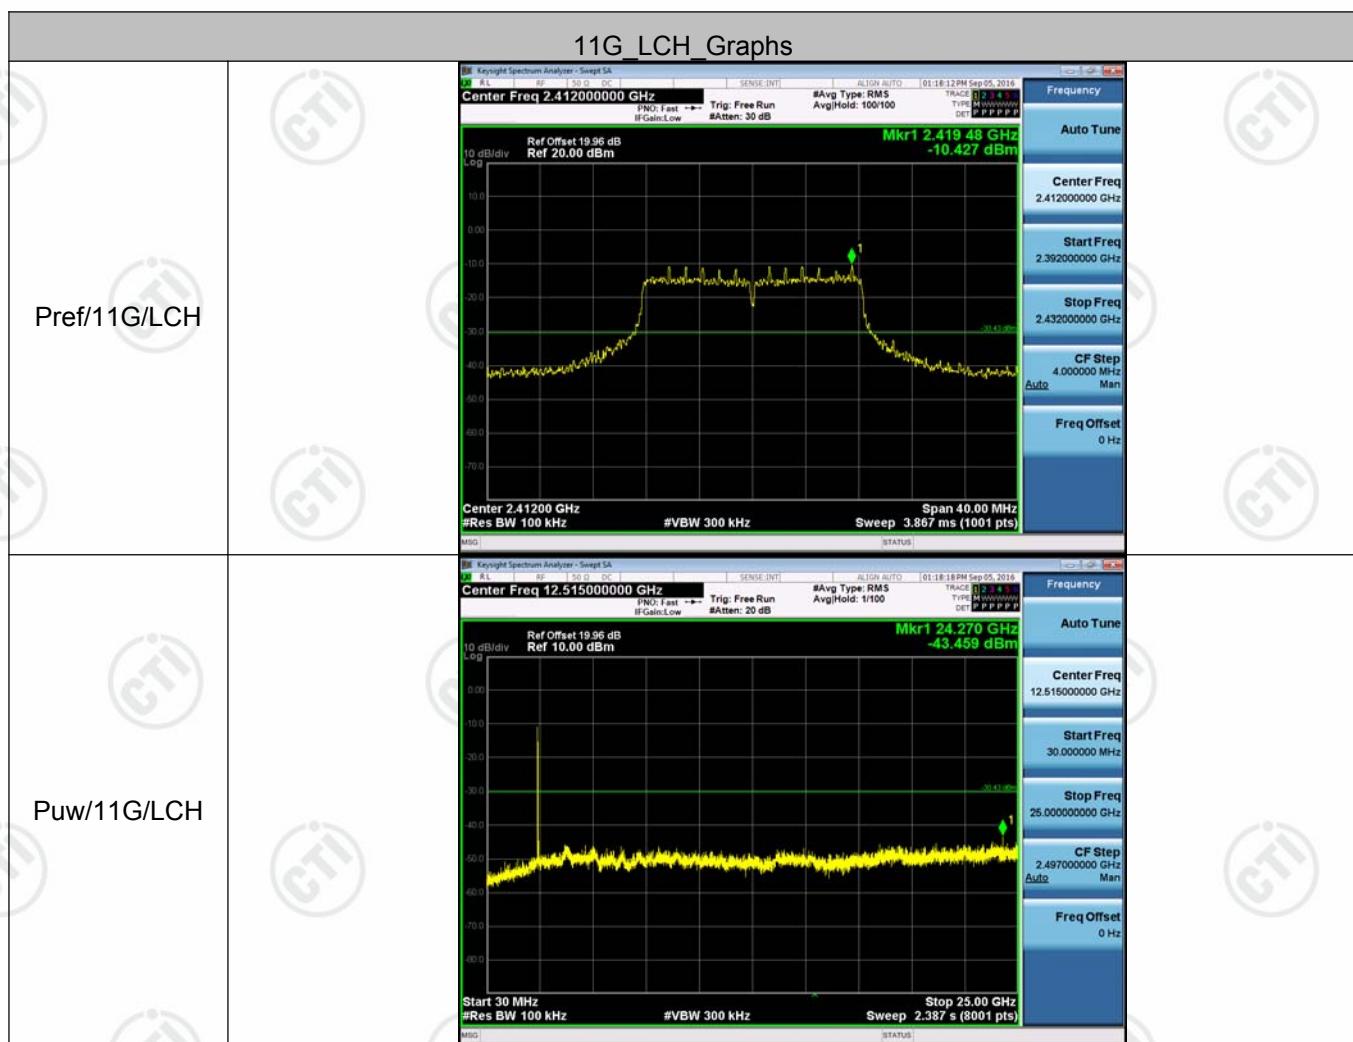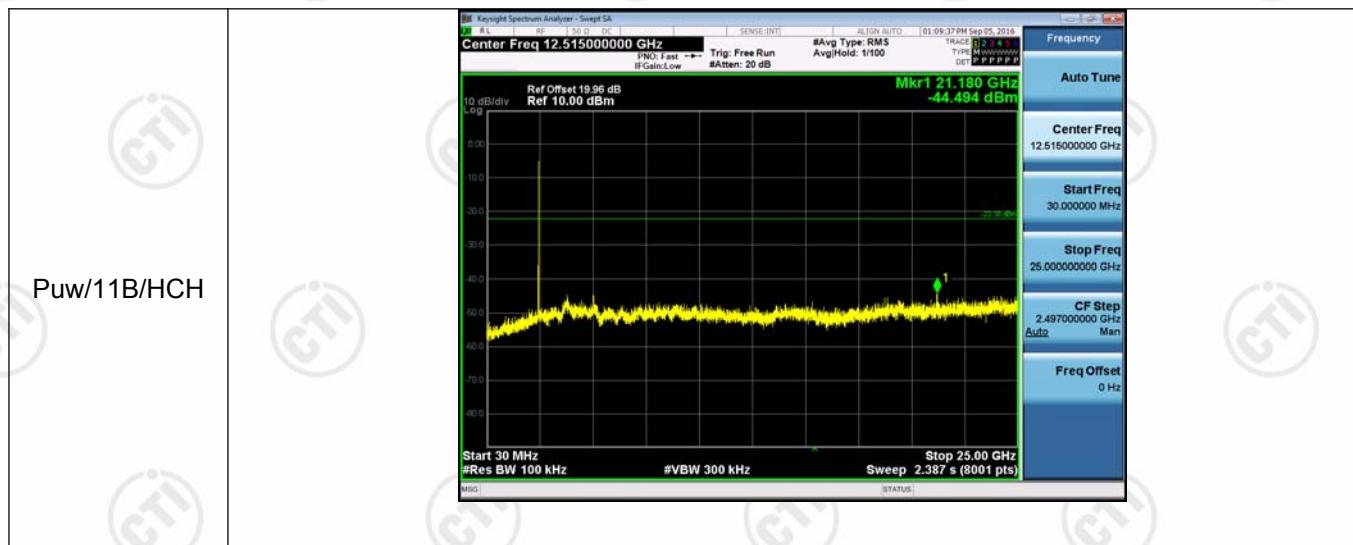

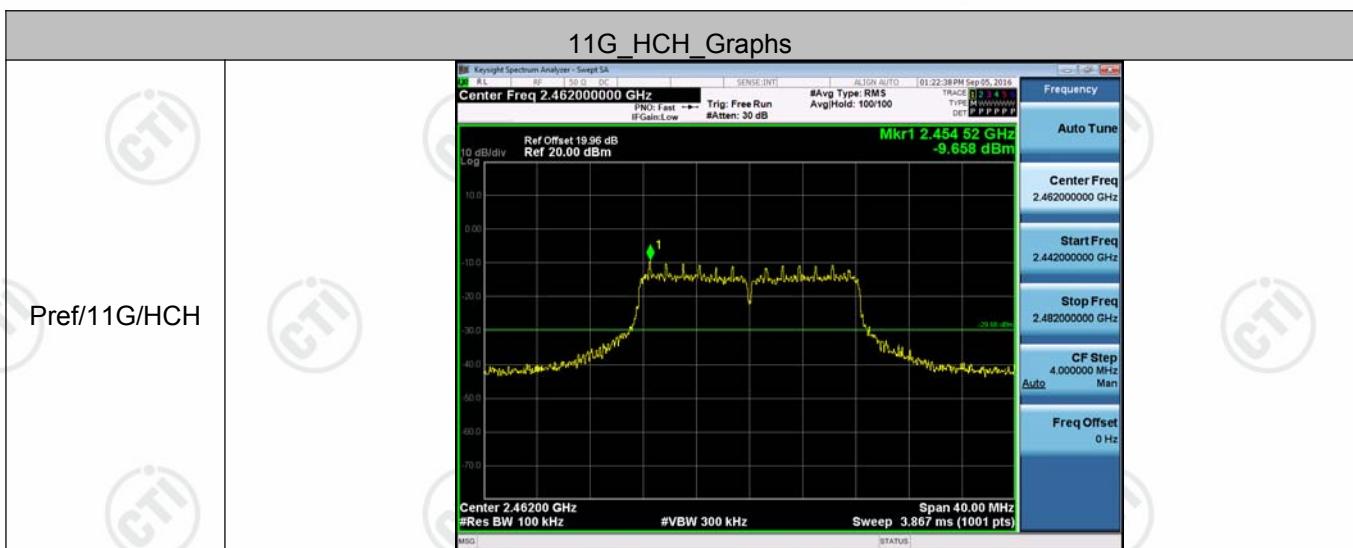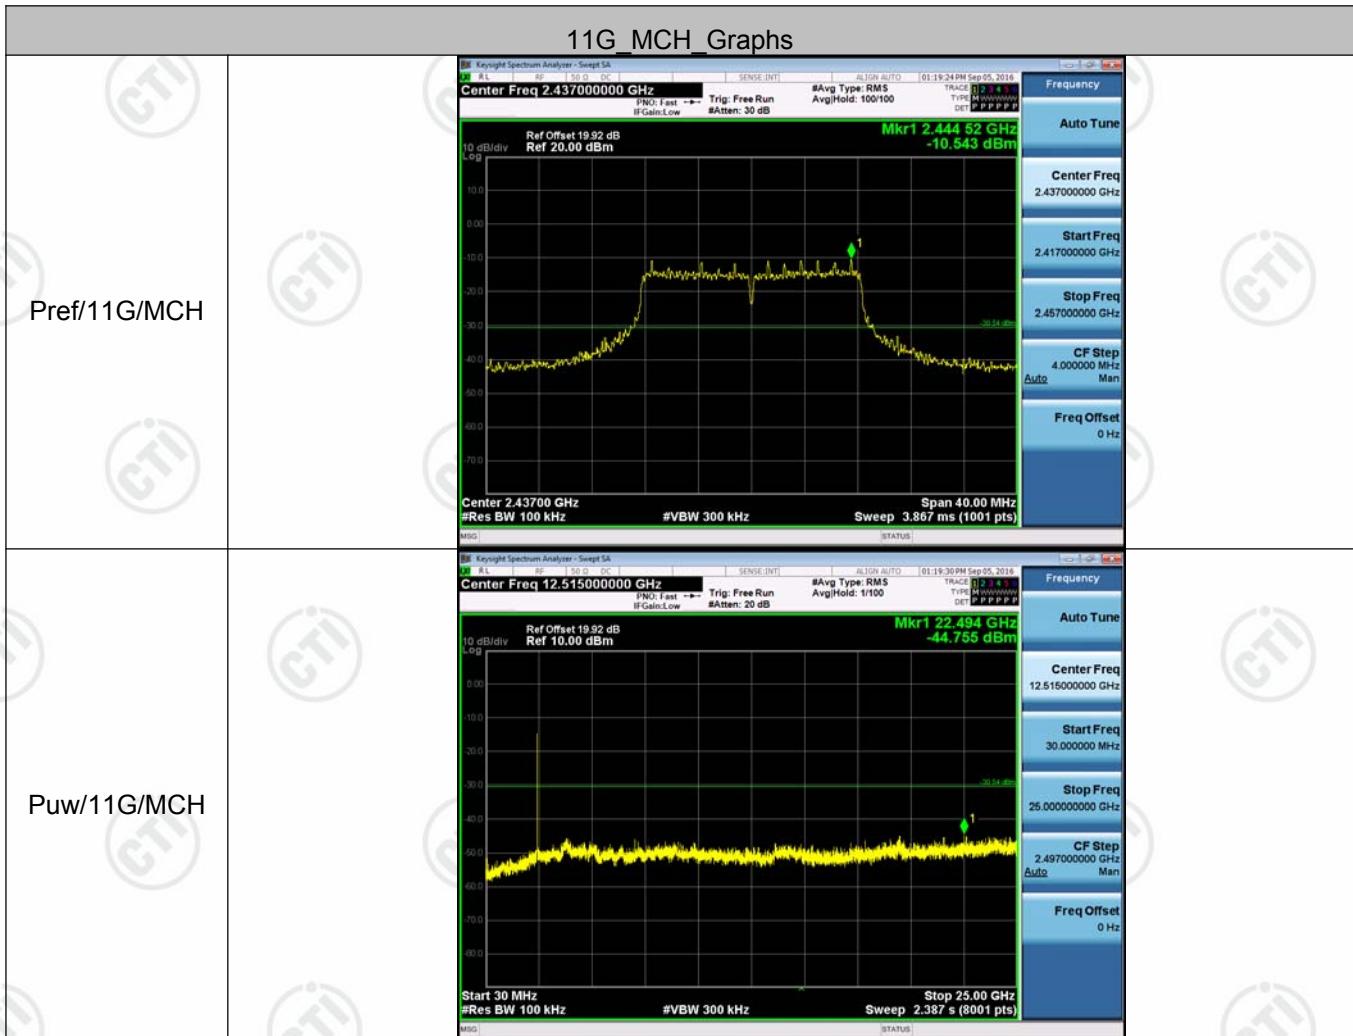

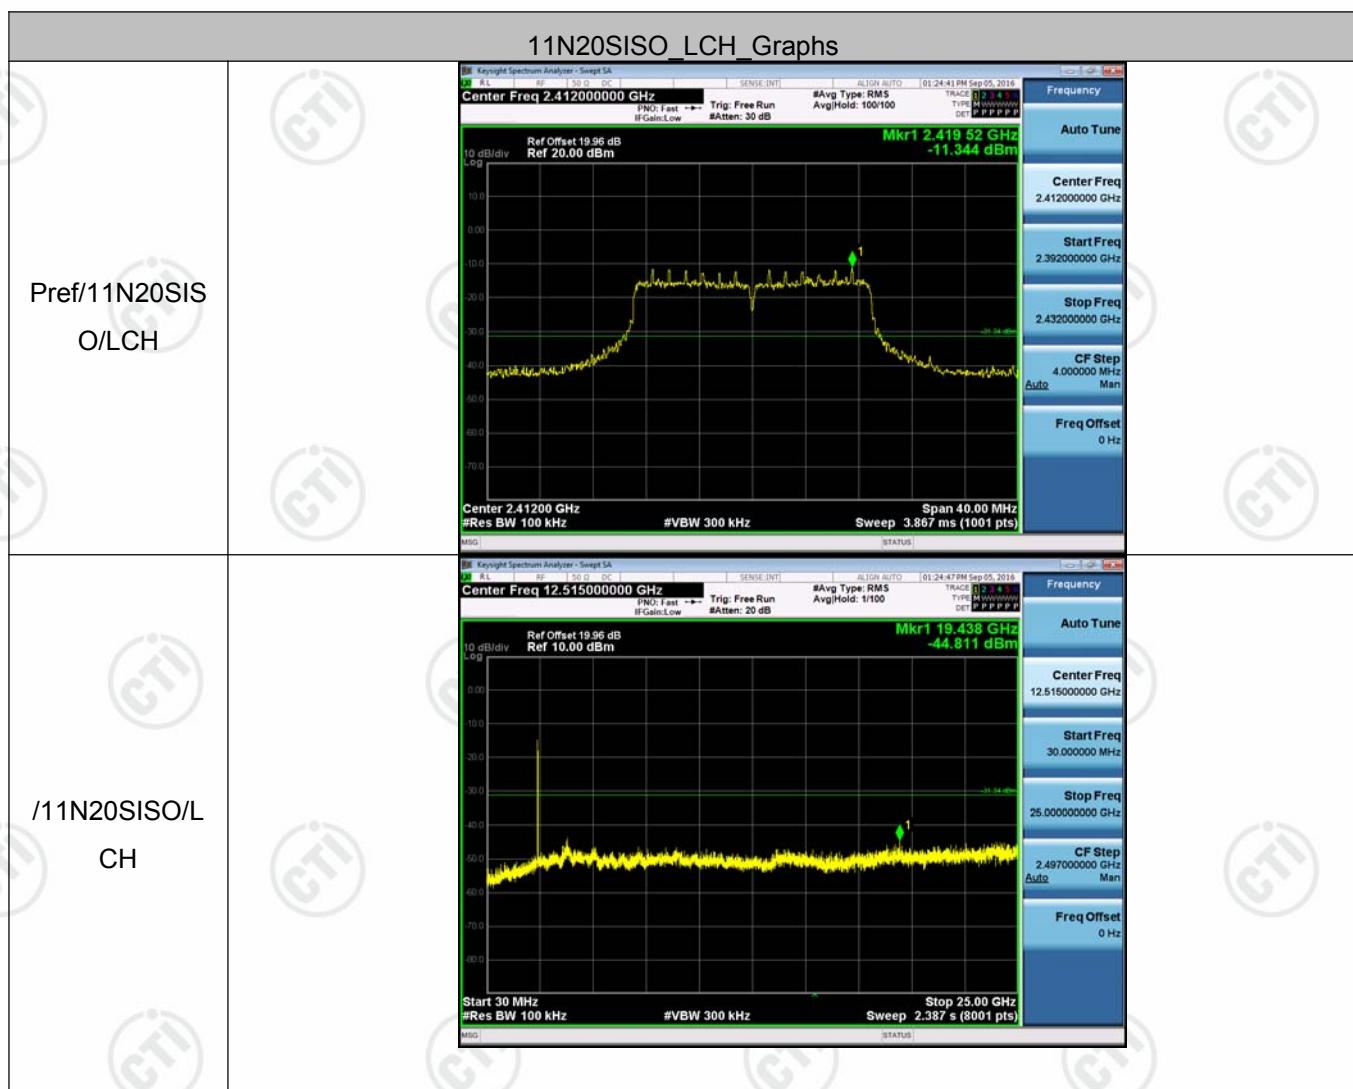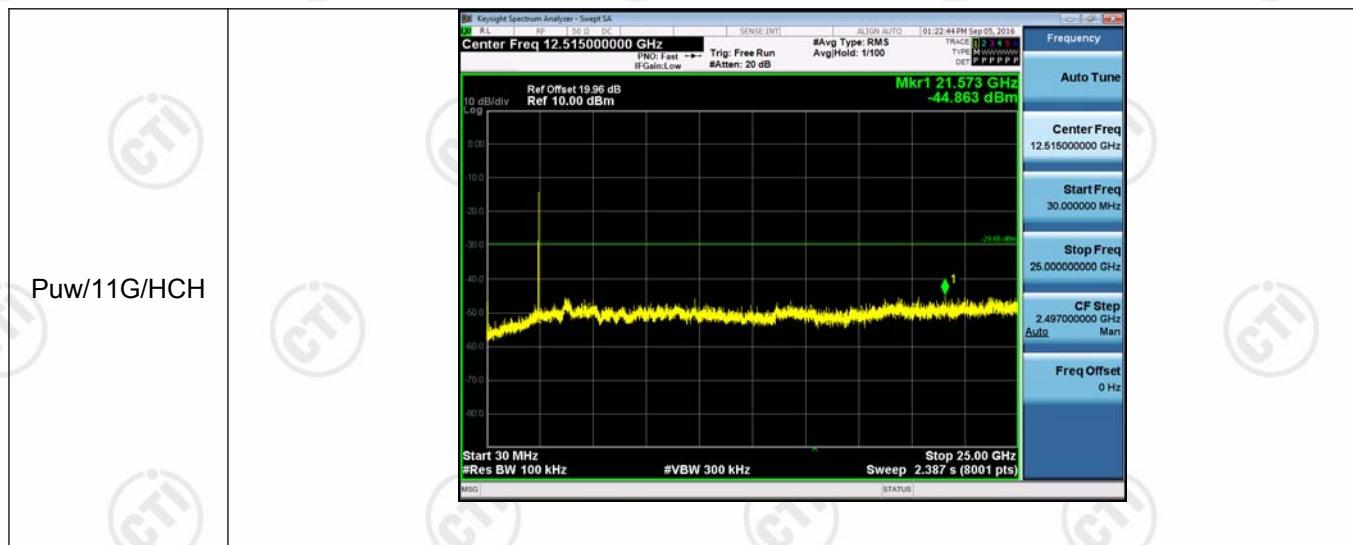

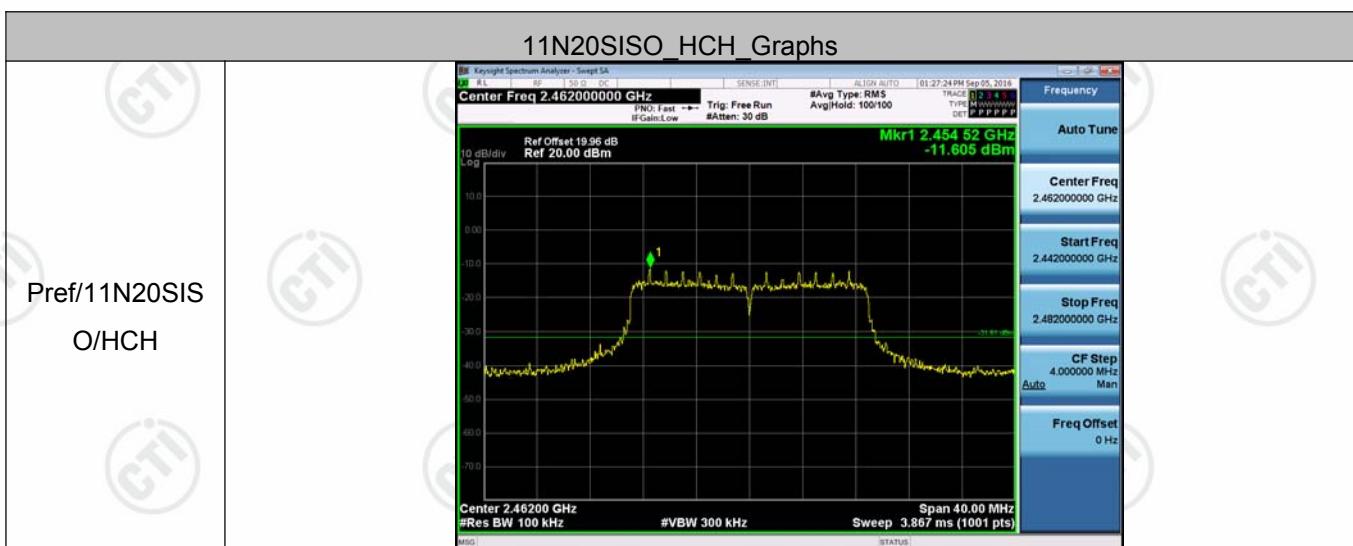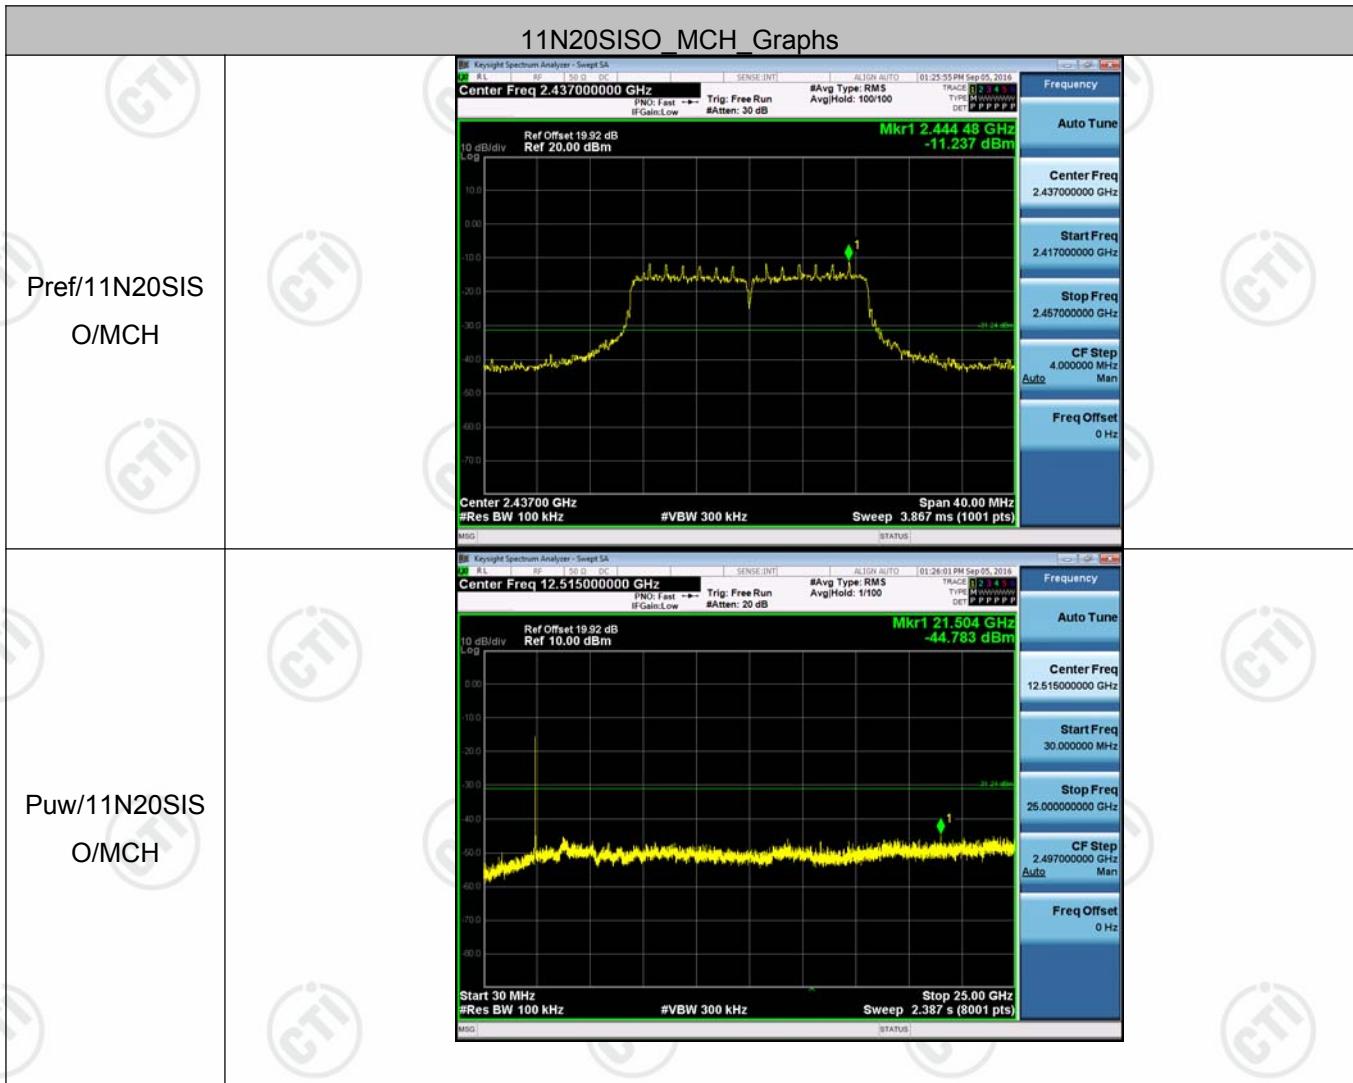





Appendix E): Power Spectral Density**Result Table**

Mode	Channel	Power Spectral Density [dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	LCH	-15.790	8	PASS
11B	MCH	-16.166	8	PASS
11B	HCH	-15.744	8	PASS
11G	LCH	-25.621	8	PASS
11G	MCH	-24.966	8	PASS
11G	HCH	-24.567	8	PASS
11N20SISO	LCH	-26.642	8	PASS
11N20SISO	MCH	-26.109	8	PASS
11N20SISO	HCH	-26.963	8	PASS

Test Graph

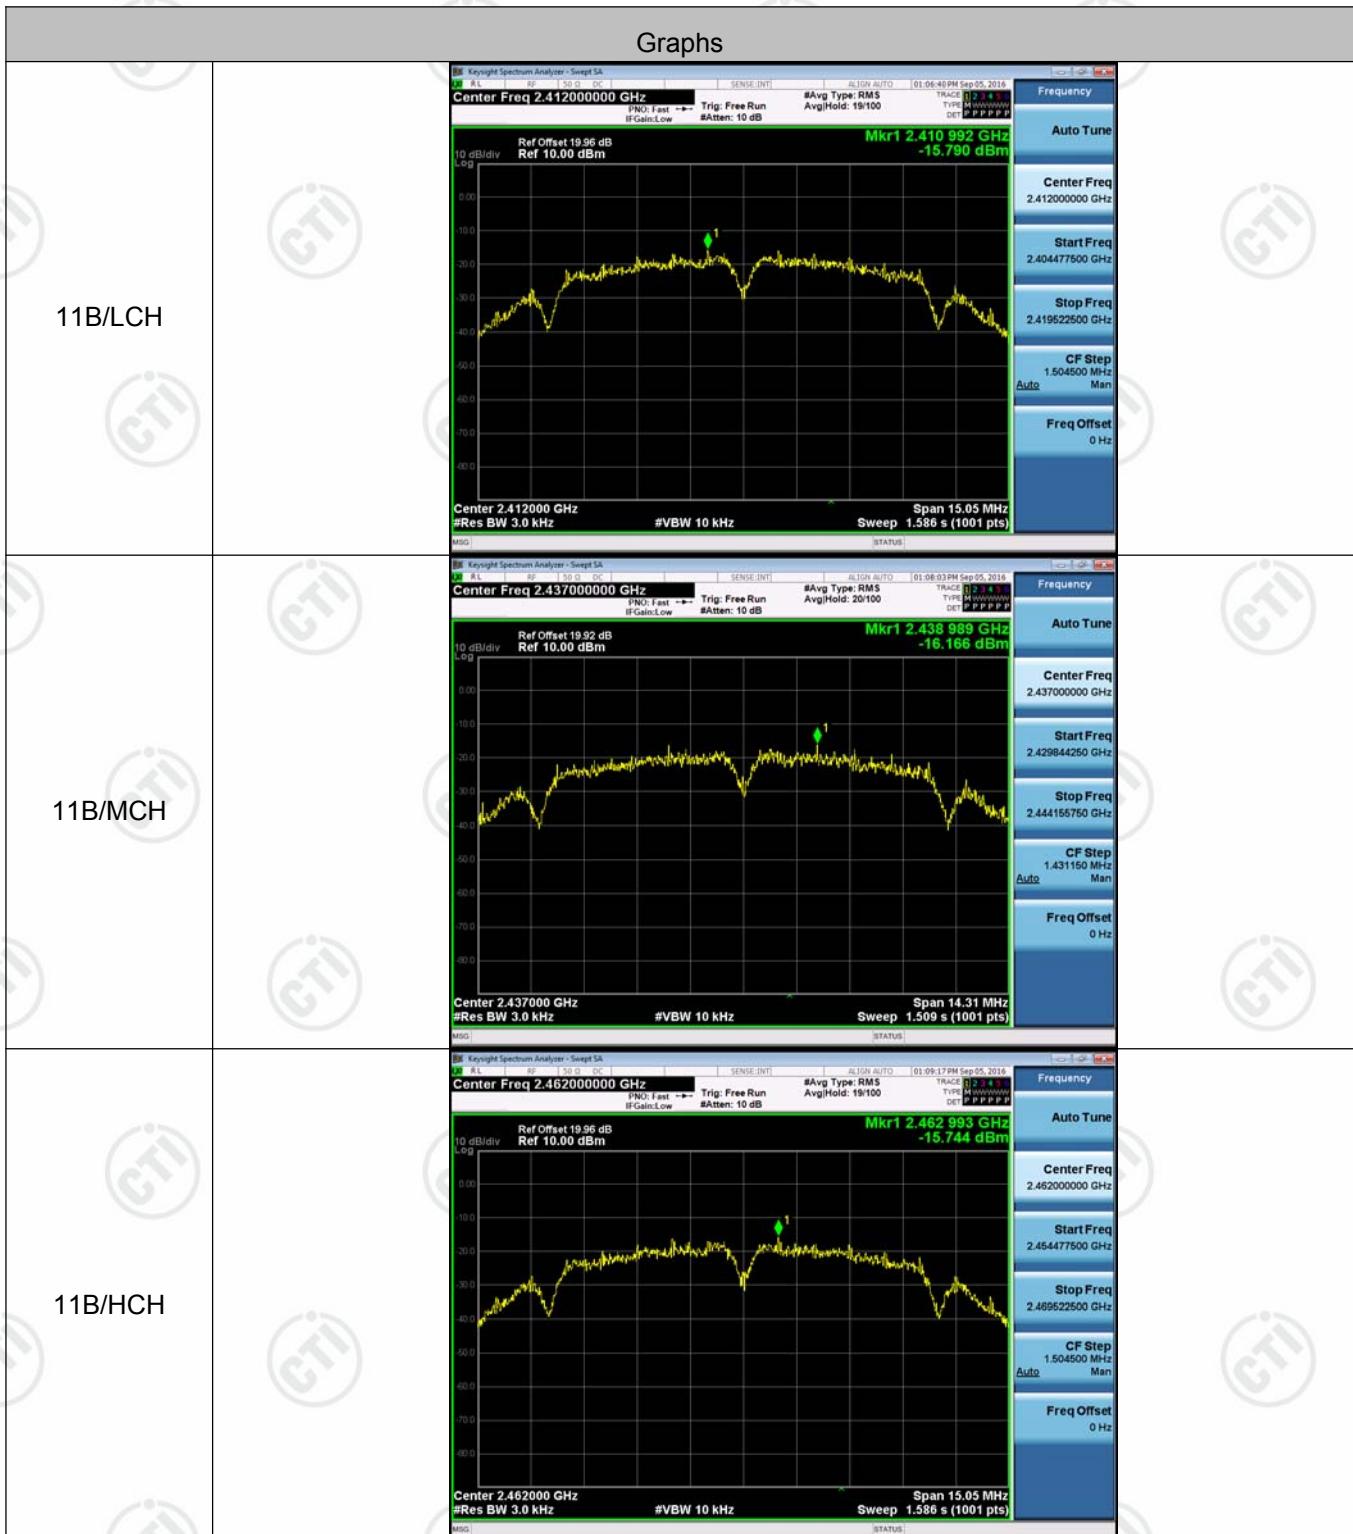

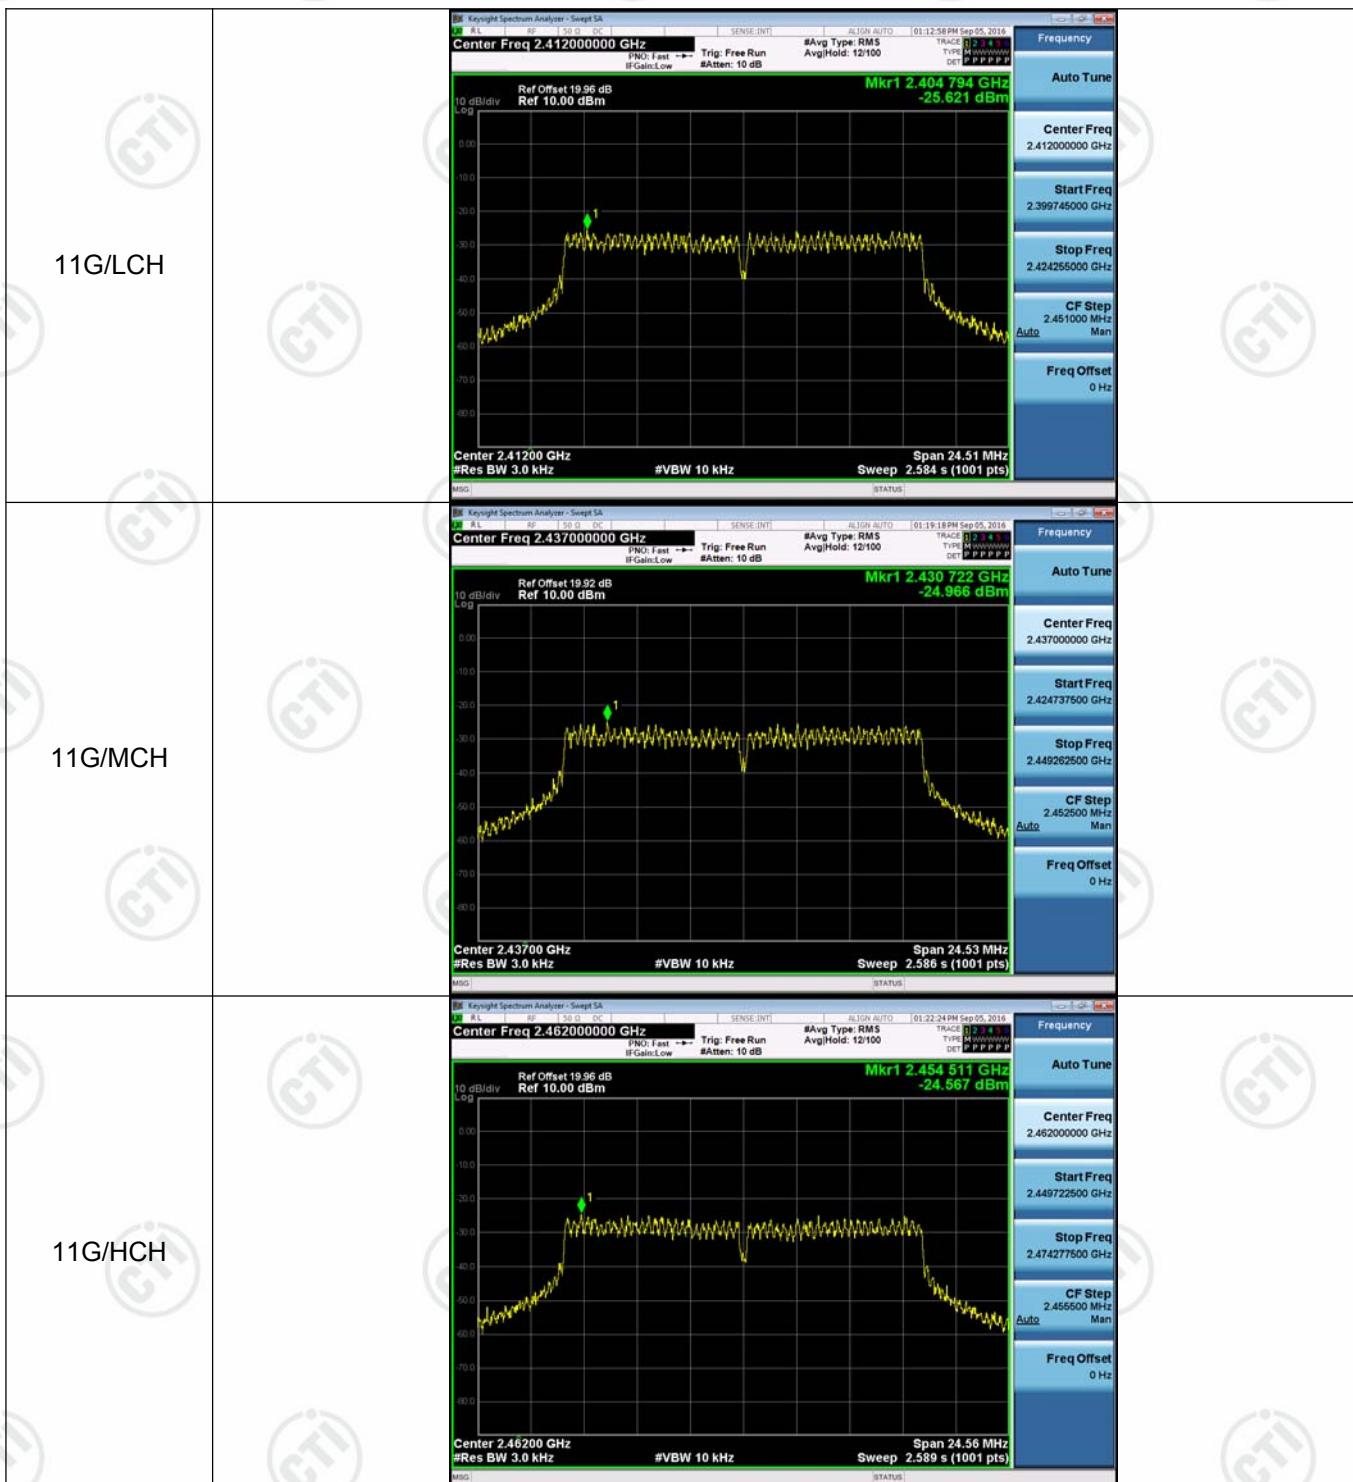



Appendix F): Antenna Requirement

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0.39dBi.

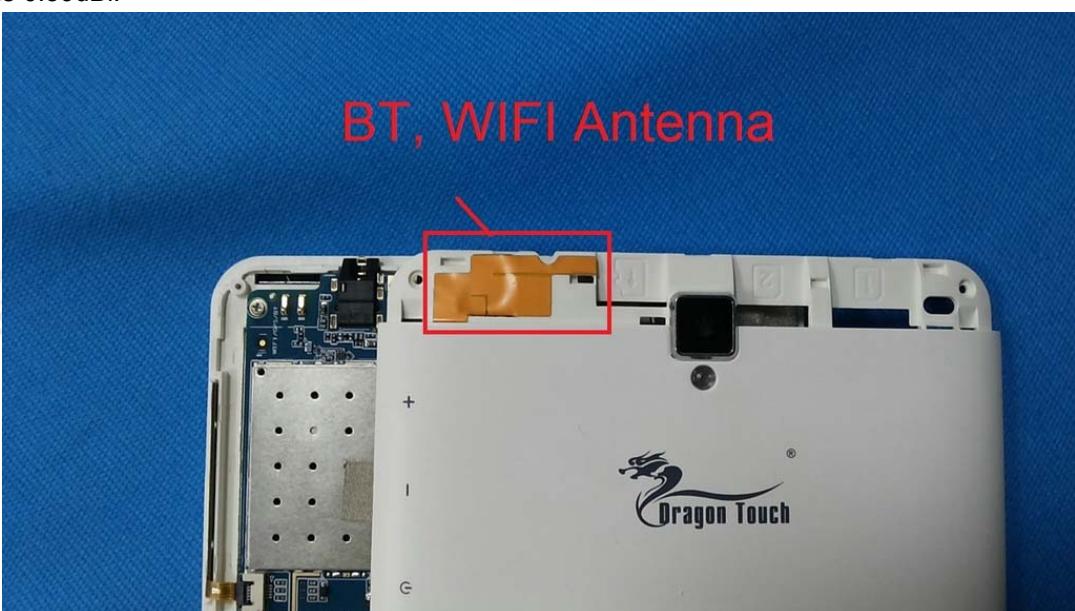

Appendix G): AC Power Line Conducted Emission


Test Procedure:	<p>Test frequency range :150KHz-30MHz</p> <p>1)The mains terminal disturbance voltage test was conducted in a shielded room.</p> <p>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</p> <p>3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</p> <p>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</p> <p>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.</p>														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE : The lower limit is applicable at the transition frequency</p>	Frequency range (MHz)	Limit (dB μ V)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dB μ V)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

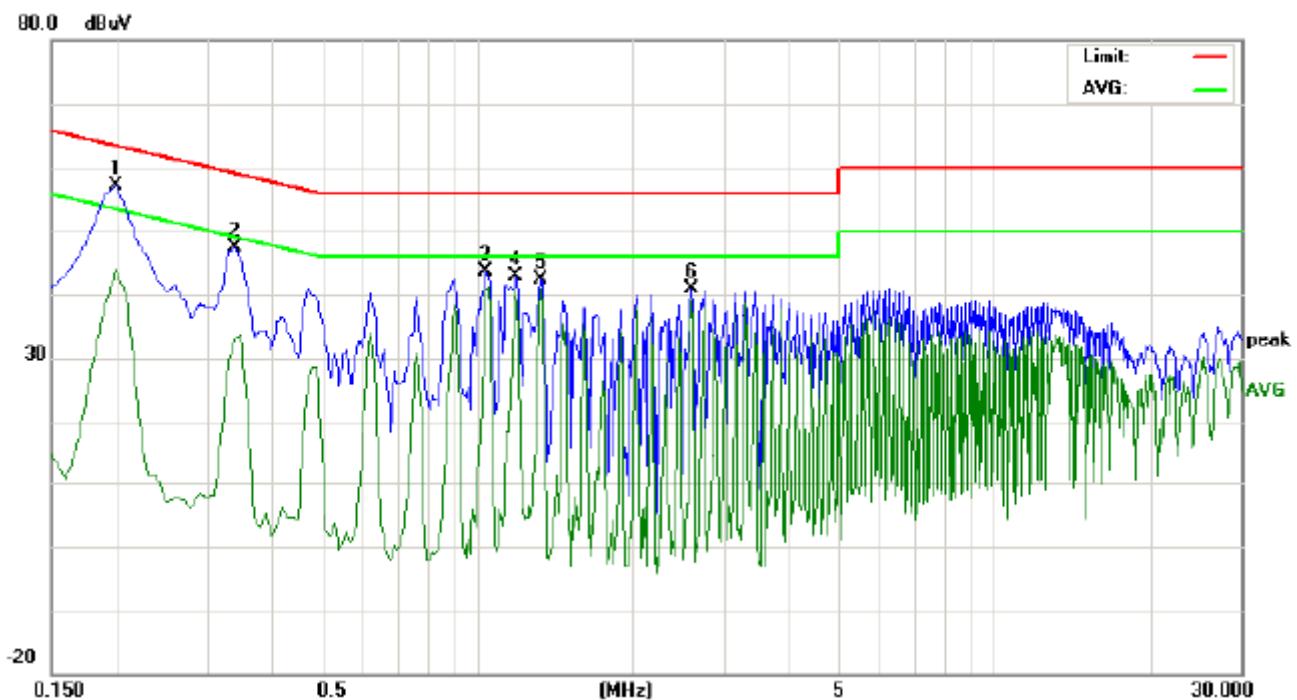

No.	Freq.	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)			Margin (dB)		
		MHz	Peak	QP	Avg	peak	QP	Avg	QP	Avg	QP	Avg	P/F	Comment
1	0.2000	47.33		34.00	9.80	57.13		43.80	63.61	53.61	-6.48	-9.81	P	
2	0.3400	37.43		23.04	9.84	47.27		32.88	59.20	49.20	-11.93	-16.32	P	
3	1.0400	33.56	32.10	30.54	10.00	43.56	42.10	40.54	56.00	46.00	-13.90	-5.46	P	
4	1.1900	32.90	31.54	30.82	10.00	42.90	41.54	40.82	56.00	46.00	-14.46	-5.18	P	
5	1.3300	32.26	31.60	30.85	10.00	42.26	41.60	40.85	56.00	46.00	-14.40	-5.15	P	
6	2.6000	30.77		29.10	10.00	40.77		39.10	56.00	46.00	-15.23	-6.90	P	

Neutral line:

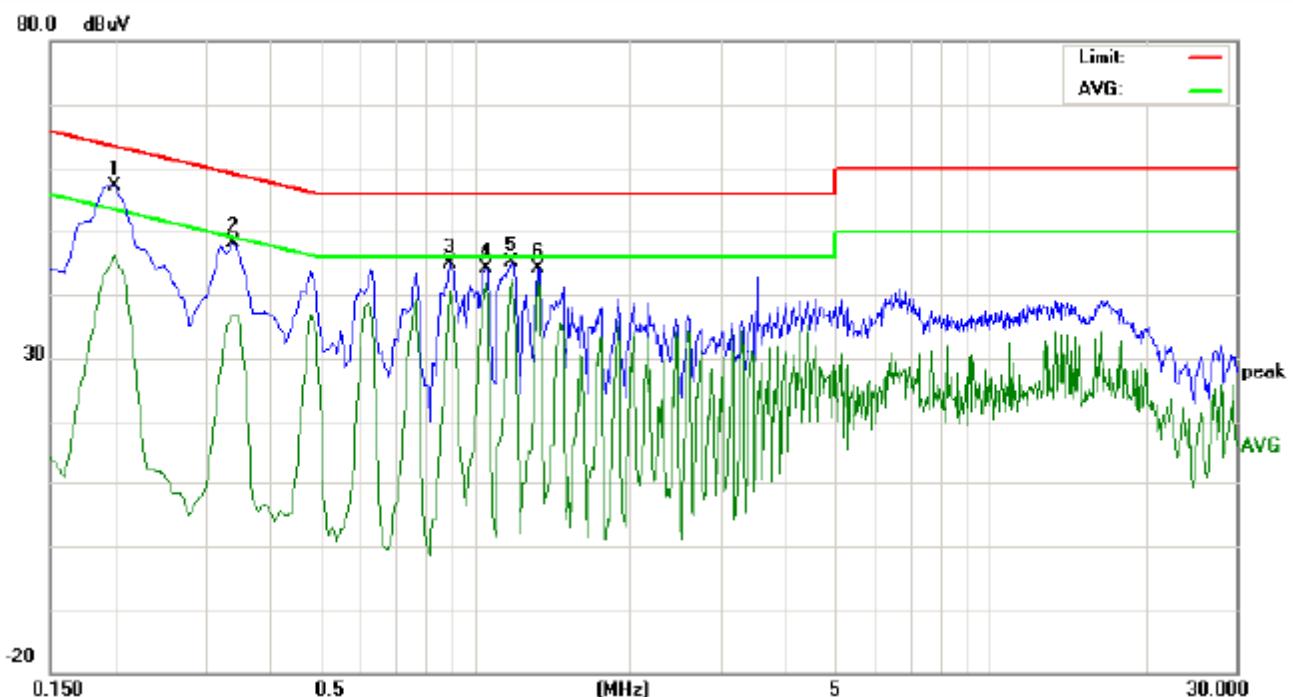

No.	Freq.	Reading_Level (dBuV)			Correct Factor			Measurement (dBuV)			Limit (dBuV)			Margin (dB)	
		MHz	Peak	QP	Avg	dB	peak	QP	Avg	QP	Avg	QP	Avg	P/F	Comment
1	0.2000	47.41		36.22	9.80	57.21		46.02	63.61	53.61	-6.40	-7.59	-7.59	P	
2	0.3400	38.26		27.12	9.84	48.10		36.96	59.20	49.20	-11.10	-12.24	-12.24	P	
3	0.8900	34.93	31.80	30.53	9.99	44.92	41.79	40.52	56.00	46.00	-14.21	-5.48	-5.48	P	
4	1.0500	34.20	32.00	31.87	10.00	44.20	42.00	41.87	56.00	46.00	-14.00	-4.13	-4.13	P	
5	1.1799	35.09	33.50	32.44	10.00	45.09	43.50	42.44	56.00	46.00	-12.50	-3.56	-3.56	P	
6	1.3300	34.15	33.00	32.17	10.00	44.15	43.00	42.17	56.00	46.00	-13.00	-3.83	-3.83	P	

Notes:


1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. AC120V and 240V are tested and found the worst case is 120V, So only the 120V data were shown in the above.

Appendix H): Restricted bands around fundamental frequency (Radiated)


Receiver Setup:	Frequency	Detector	RBW	VBW	Remark																				
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak																				
	Above 1GHz	Peak	1MHz	3MHz	Peak																				
		Peak	1MHz	10Hz	Average																				
Test Procedure:	Below 1GHz test procedure as below: <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel Above 1GHz test procedure as below: <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). Test the EUT in the lowest channel , the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. 																								
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th><th>Limit (dBμV/m @3m)</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr> <tr> <td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr> <tr> <td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr> <tr> <td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr> <tr> <td rowspan="2">Above 1GHz</td><td>54.0</td><td>Average Value</td></tr> <tr> <td>74.0</td><td>Peak Value</td></tr> </tbody> </table>					Frequency	Limit (dB μ V/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	74.0	Peak Value
Frequency	Limit (dB μ V/m @3m)	Remark																							
30MHz-88MHz	40.0	Quasi-peak Value																							
88MHz-216MHz	43.5	Quasi-peak Value																							
216MHz-960MHz	46.0	Quasi-peak Value																							
960MHz-1GHz	54.0	Quasi-peak Value																							
Above 1GHz	54.0	Average Value																							
	74.0	Peak Value																							

Test plot as follows:


Worse case mode:	802.11b (11Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

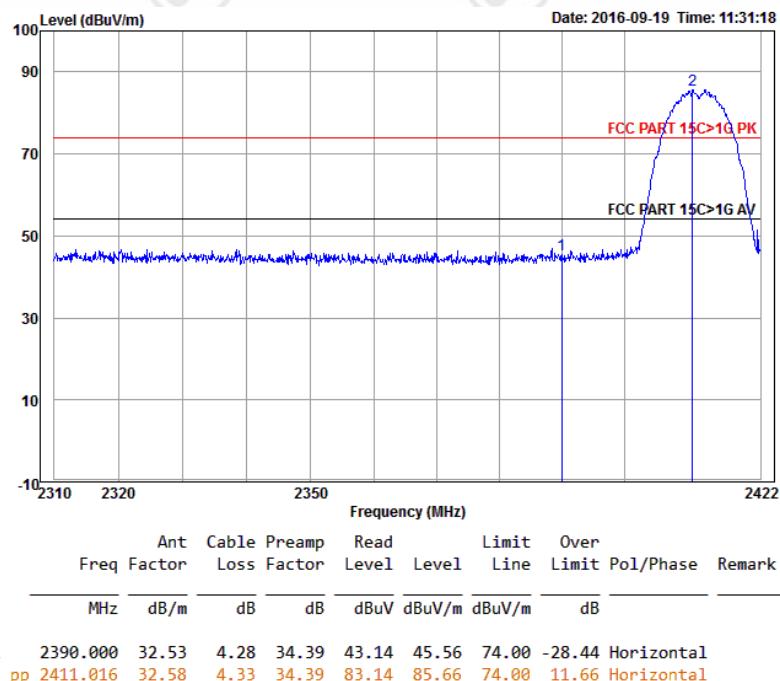


Worse case mode:	802.11b (11Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

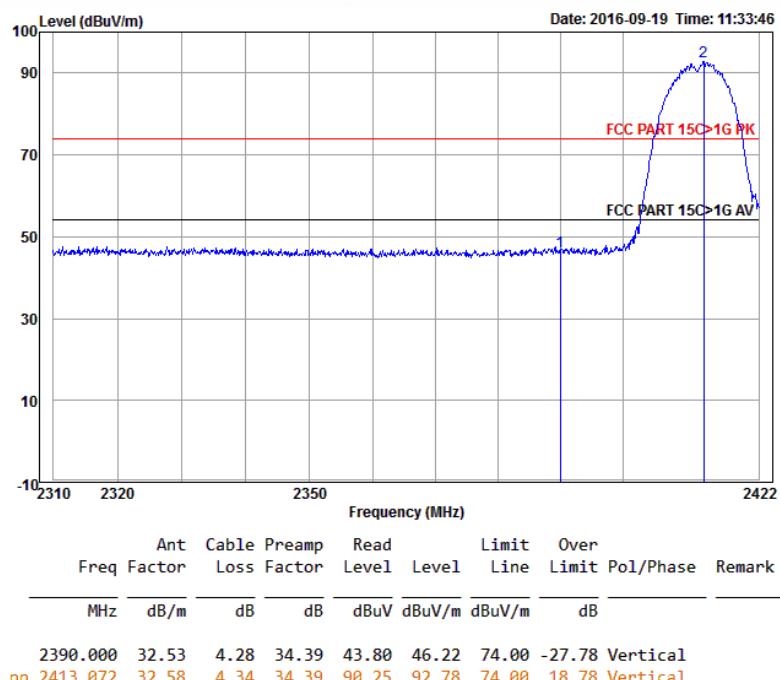


Worse case mode:	802.11b (11Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

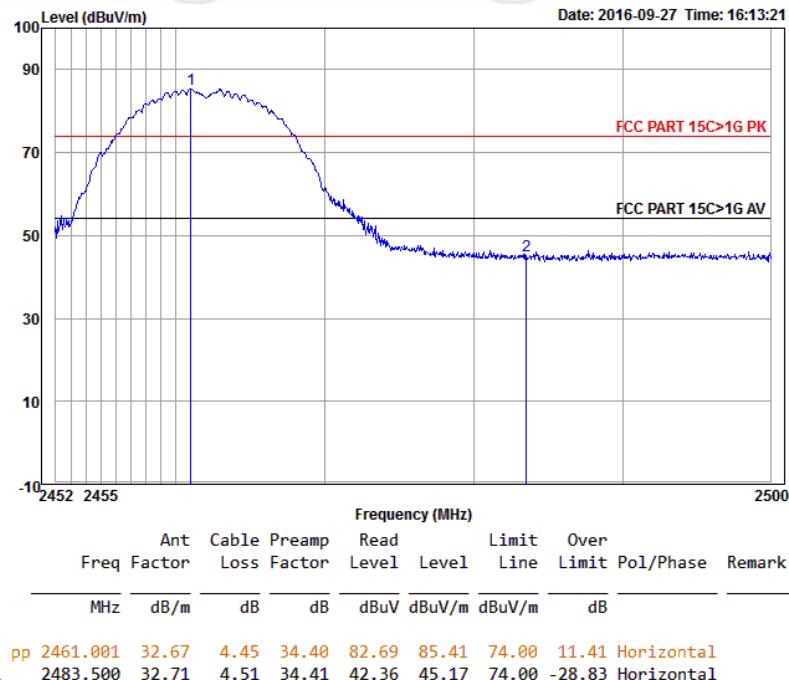


Worse case mode:	802.11b (11Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

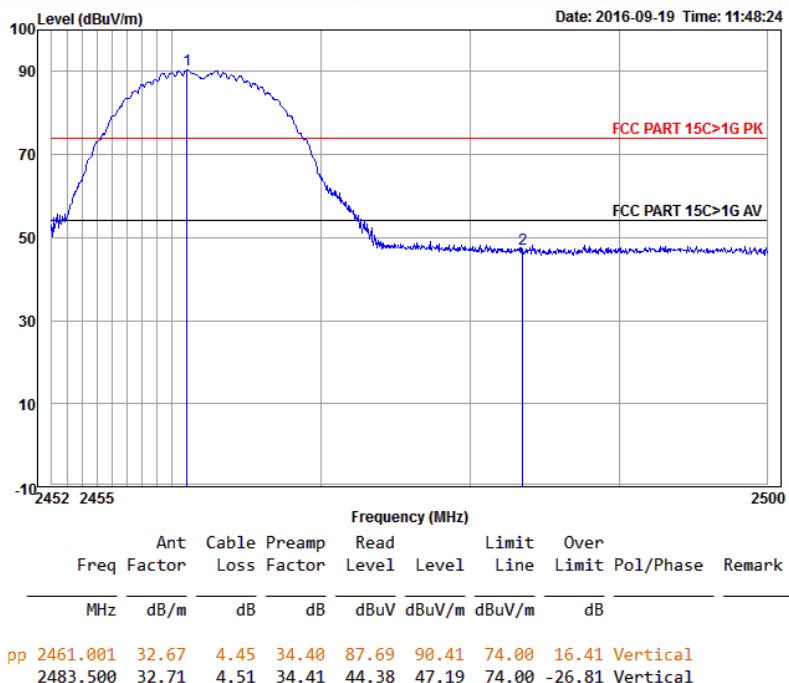


Worse case mode:	802.11g (6Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

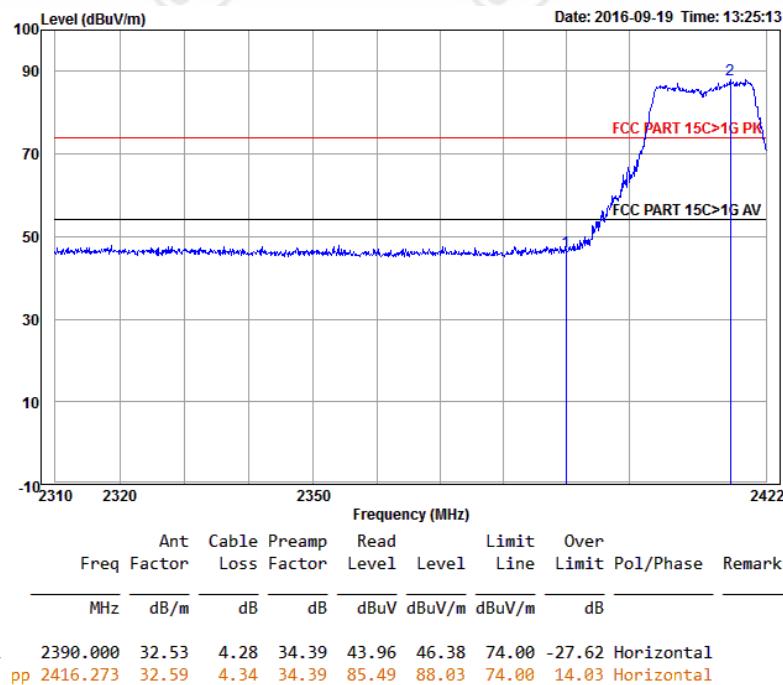


Worse case mode:	802.11g (6Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

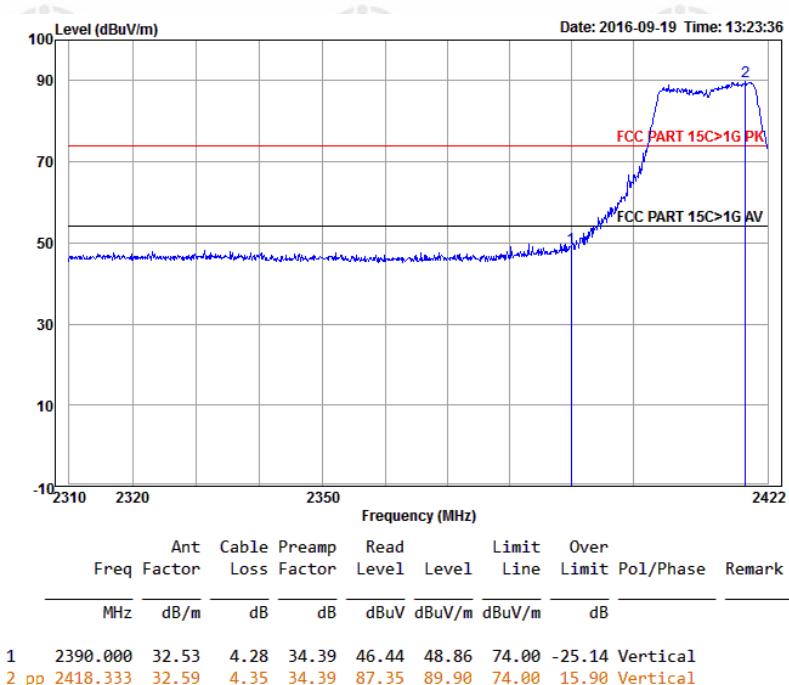


Worse case mode:	802.11g (6Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

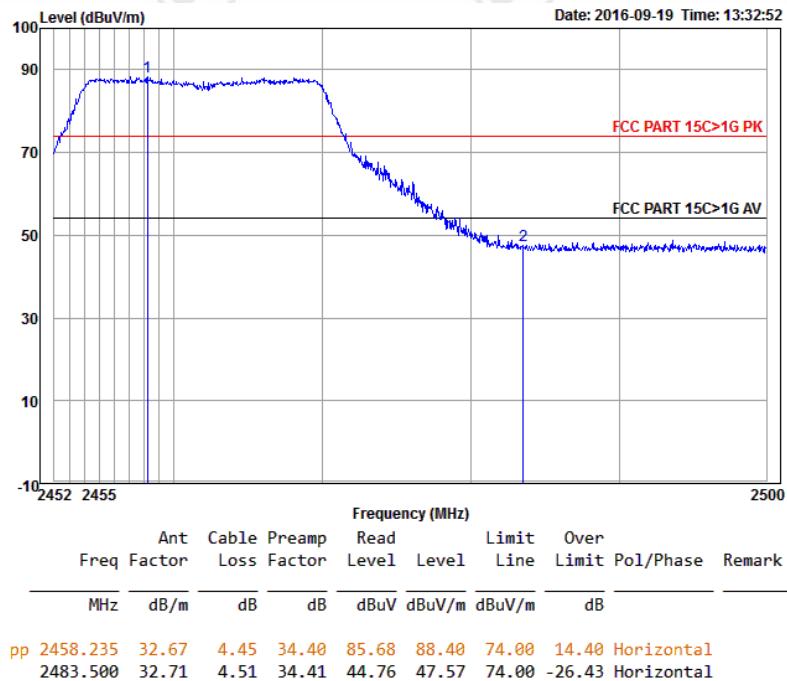

Worse case mode:	802.11g (6Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

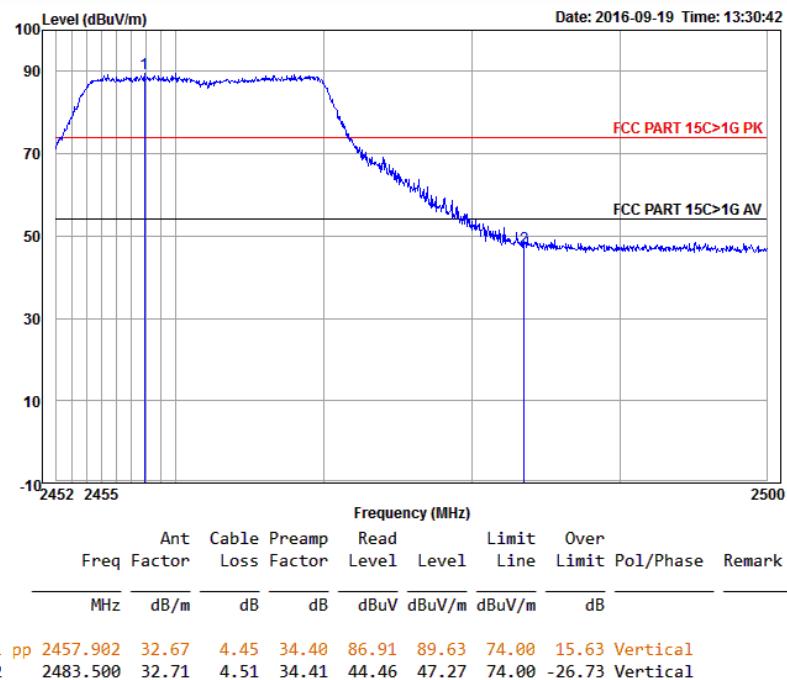


Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

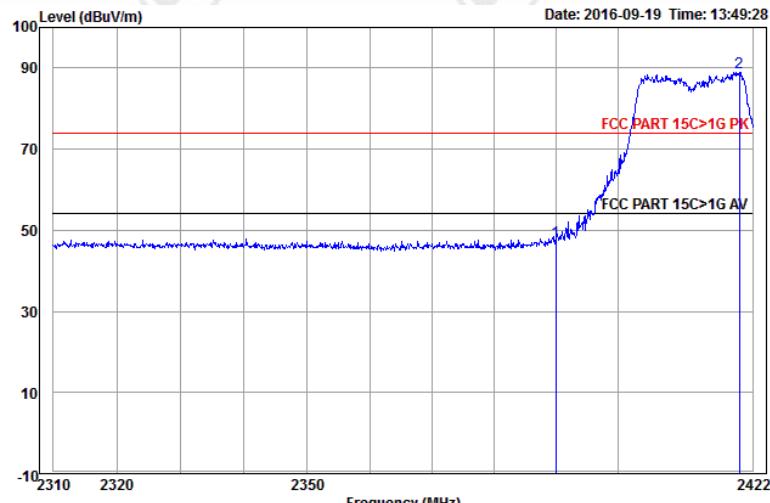


Freq	Ant Factor	Cable Loss	Preamp Factor	Read Level		Limit Line	Over Limit	Over Line	Over Pol/Phase	Remark
				MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m
1	2390.000	32.53	4.28	34.39	44.94	47.36	74.00	-26.64	Horizontal	
2 pp	2419.822	32.59	4.35	34.39	86.50	89.05	74.00	15.05	Horizontal	


Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

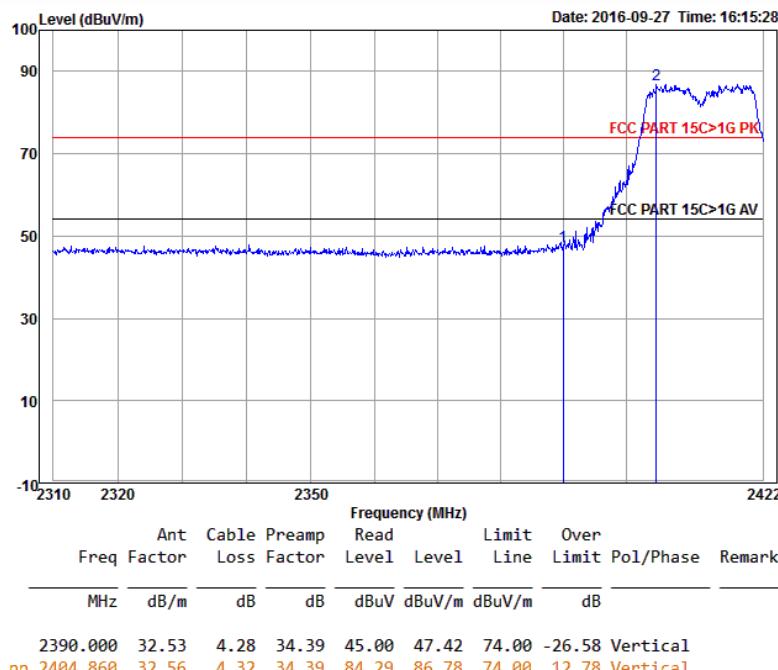

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

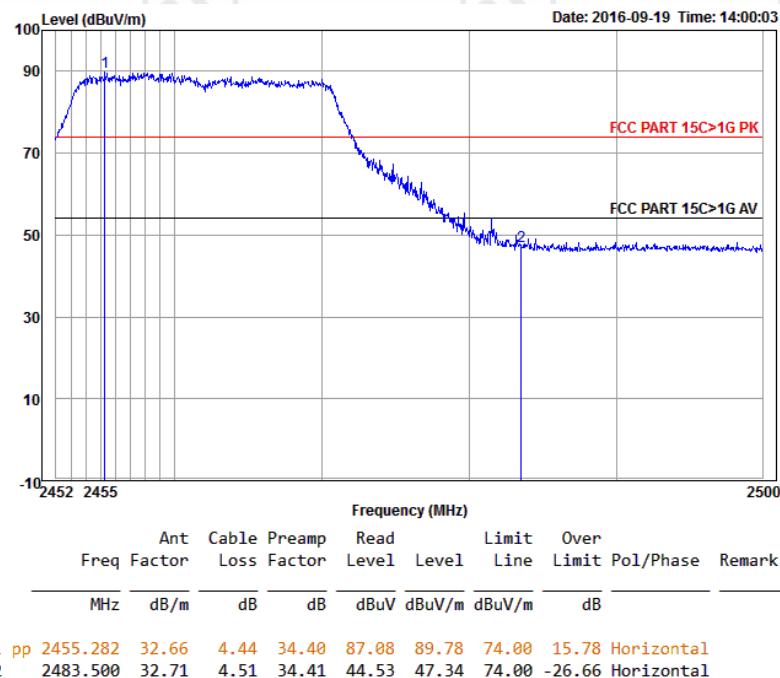

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

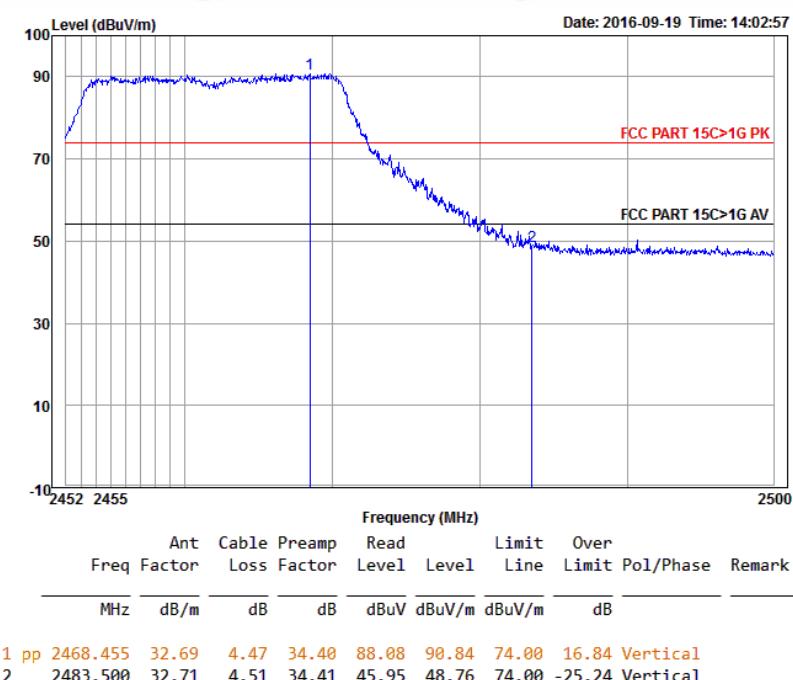

Remark:


- 1) Through Pre-scan transmitter mode with all kind of modulation and data rate, find the 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20), and then Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading - Correct Factor
Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

Appendix I): Radiated Spurious Emissions


Receiver Setup:		Frequency	Detector	RBW	VBW	Remark					
0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak							
0.009MHz-0.090MHz	Average	10kHz	30kHz	Average							
0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak							
0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak							
0.110MHz-0.490MHz	Average	10kHz	30kHz	Average							
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak							
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak							
Above 1GHz	Peak	1MHz	3MHz	Peak							
	Peak	1MHz	10Hz	Average							
Test Procedure:											
Below 1GHz test procedure as below:											
a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.											
Above 1GHz test procedure as below:											
g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).. h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.											
Limit:		Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)					
Limit:	0.009MHz-0.490MHz	2400/F(kHz)	-	-		300					
	0.490MHz-1.705MHz	24000/F(kHz)	-	-		30					
	1.705MHz-30MHz	30	-	-		30					
	30MHz-88MHz	100	40.0	Quasi-peak		3					
	88MHz-216MHz	150	43.5	Quasi-peak		3					
	216MHz-960MHz	200	46.0	Quasi-peak		3					
	960MHz-1GHz	500	54.0	Quasi-peak		3					
	Above 1GHz	500	54.0	Average		3					
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.										

**Radiated Spurious Emissions test Data:
Radiated Emission below 1GHz**

30MHz~1GHz (QP)

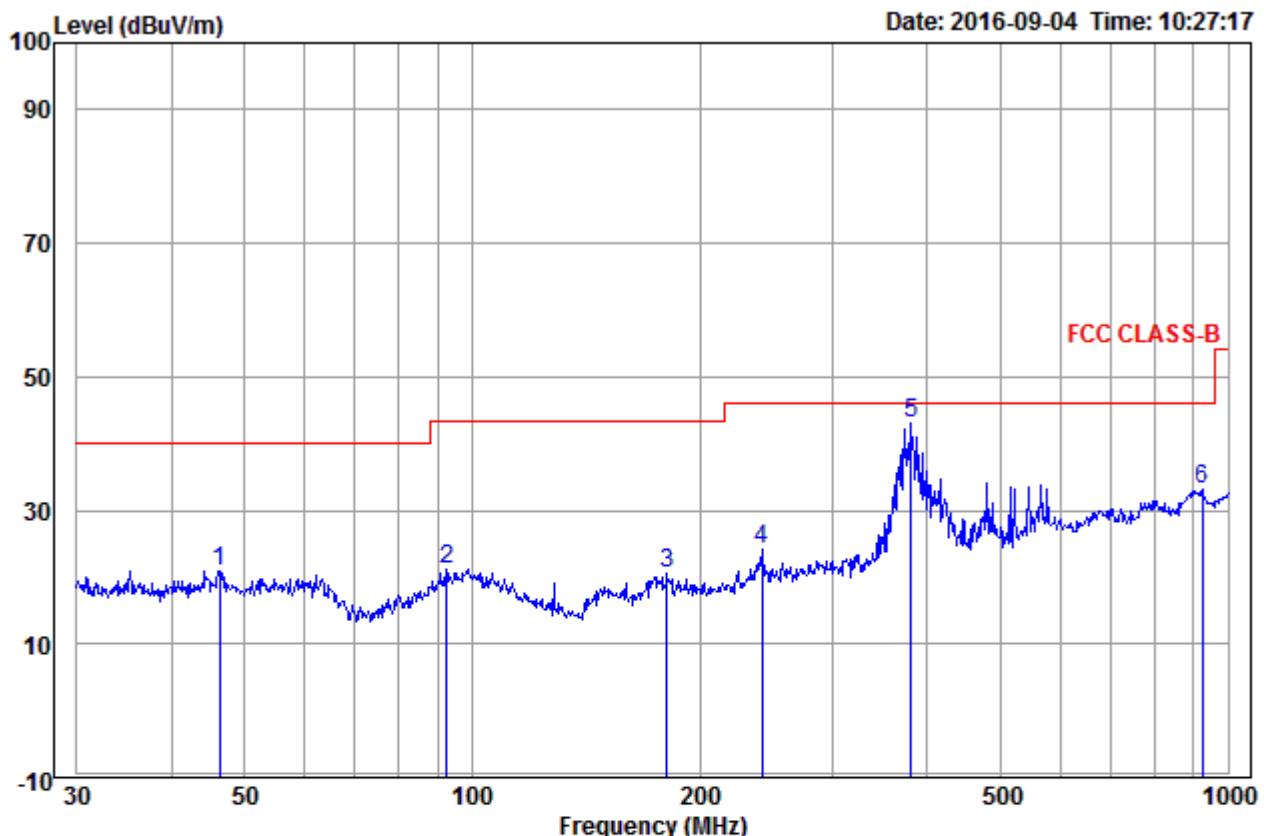

Freq	Ant Factor	Cable Loss	Read Level	Limit Level	Limit Line	Over Limit	Over Limit Pol/Phase		Remark
							dB	Pol/Phase	
1	46.340	14.56	1.10	5.28	20.94	40.00	-19.06	Horizontal	
2	92.462	13.32	1.58	6.37	21.27	43.50	-22.23	Horizontal	
3	181.283	11.00	1.99	7.44	20.43	43.50	-23.07	Horizontal	
4	241.676	13.34	2.33	8.57	24.24	46.00	-21.76	Horizontal	
5 pp	381.249	15.95	2.77	24.22	42.94	46.00	-3.06	Horizontal	
6	925.756	22.67	4.33	6.04	33.04	46.00	-12.96	Horizontal	

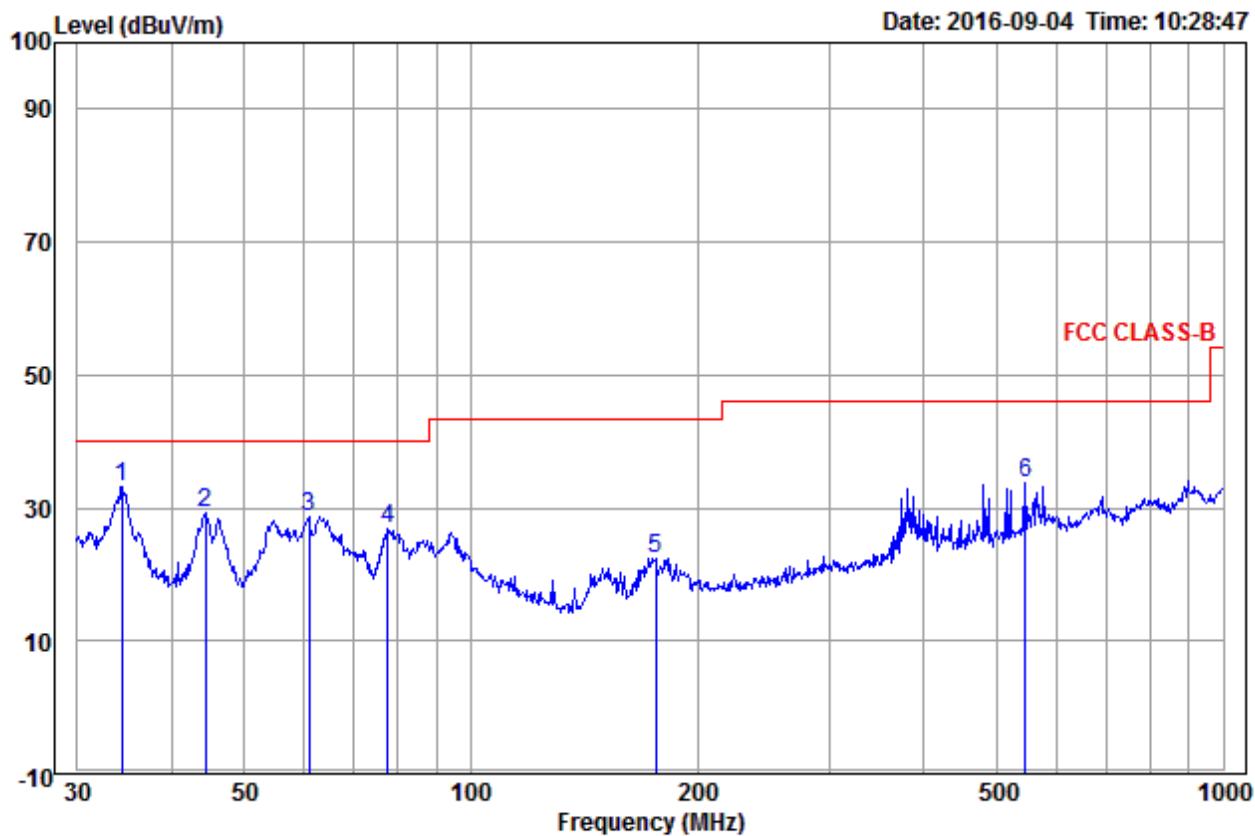

	Freq	Ant Factor	Cable Loss	Read Level	Limit		Over Limit	Pol/Phase	Remark
					MHz	dB/m	dB	dBuV	dBuV/m
1	pp	34.396	13.40	0.88	18.81	33.09	40.00	-6.91	Vertical
2		44.431	14.64	0.94	13.73	29.31	40.00	-10.69	Vertical
3		60.918	13.41	1.43	13.93	28.77	40.00	-11.23	Vertical
4		77.593	9.29	1.54	16.02	26.85	40.00	-13.15	Vertical
5		176.269	10.61	1.93	9.95	22.49	43.50	-21.01	Vertical
6		545.183	18.83	3.20	11.59	33.62	46.00	-12.38	Vertical

Note:

- 1) for 30MHz~1GHz test, low middle highest channel are tested, only show worst data in the report.
- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Transmitter Emission above 1GHz

Test mode: 802.11b(11Mbps)			Test Frequency: 2412MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1280.072	30.41	2.61	34.88	47.55	45.69	74.00	-28.31	Pass	Horizontal
1663.803	31.17	2.97	34.54	46.88	46.48	74.00	-27.52	Pass	Horizontal
4824.000	34.73	5.10	34.35	40.50	45.98	74.00	-28.02	Pass	Horizontal
6156.505	35.98	7.27	34.40	41.24	50.09	74.00	-23.91	Pass	Horizontal
7236.000	36.42	6.69	34.90	38.66	46.87	74.00	-27.13	Pass	Horizontal
9648.000	37.93	7.70	35.07	37.12	47.68	74.00	-26.32	Pass	Horizontal
1395.796	30.66	2.73	34.77	46.03	44.65	74.00	-29.35	Pass	Vertical
1668.044	31.18	2.98	34.54	46.01	45.63	74.00	-28.37	Pass	Vertical
4824.000	34.73	5.10	34.35	39.81	45.29	74.00	-28.71	Pass	Vertical
6347.466	36.08	7.08	34.52	40.25	48.89	74.00	-25.11	Pass	Vertical
7236.000	36.42	6.69	34.90	37.16	45.37	74.00	-28.63	Pass	Vertical
9648.000	37.93	7.70	35.07	35.85	46.41	74.00	-27.59	Pass	Vertical

Test mode: 802.11b(11Mbps)			Test Frequency: 2437MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1165.013	30.14	2.47	35.00	47.26	44.87	74.00	-29.13	Pass	Horizontal
1663.803	31.17	2.97	34.54	48.28	47.88	74.00	-26.12	Pass	Horizontal
4874.000	34.84	5.09	34.33	41.06	46.66	74.00	-27.34	Pass	Horizontal
6283.164	36.05	7.14	34.48	40.92	49.63	74.00	-24.37	Pass	Horizontal
7311.000	36.43	6.76	34.90	39.03	47.32	74.00	-26.68	Pass	Horizontal
9748.000	38.03	7.61	35.05	35.96	46.55	74.00	-27.45	Pass	Horizontal
1129.964	30.05	2.43	35.04	47.34	44.78	74.00	-29.22	Pass	Vertical
1502.732	30.88	2.83	34.67	46.23	45.27	74.00	-28.73	Pass	Vertical
4874.000	34.84	5.09	34.33	40.60	46.20	74.00	-27.80	Pass	Vertical
5971.290	35.88	7.37	34.30	41.32	50.27	74.00	-23.73	Pass	Vertical
7311.000	36.43	6.76	34.90	39.13	47.42	74.00	-26.58	Pass	Vertical
9748.000	38.03	7.61	35.05	37.68	48.27	74.00	-25.73	Pass	Vertical

Test mode: 802.11b(11Mbps)			Test Frequency: 2462MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1165.013	30.14	2.47	35.00	47.96	45.57	74.00	-28.43	Pass	Horizontal
1663.803	31.17	2.97	34.54	48.00	47.60	74.00	-26.40	Pass	Horizontal
4924.000	34.94	5.07	34.32	40.84	46.53	74.00	-27.47	Pass	Horizontal
5791.646	35.74	6.97	34.30	41.59	50.00	74.00	-24.00	Pass	Horizontal
7386.000	36.44	6.83	34.90	39.33	47.70	74.00	-26.30	Pass	Horizontal
9848.000	38.14	7.53	35.03	38.02	48.66	74.00	-25.34	Pass	Horizontal
1165.013	30.14	2.47	35.00	47.59	45.20	74.00	-28.80	Pass	Vertical
1663.803	31.17	2.97	34.54	46.87	46.47	74.00	-27.53	Pass	Vertical
4924.000	34.94	5.07	34.32	40.68	46.37	74.00	-27.63	Pass	Vertical
5821.207	35.77	7.03	34.30	41.24	49.74	74.00	-24.26	Pass	Vertical
7386.000	36.44	6.83	34.90	38.49	46.86	74.00	-27.14	Pass	Vertical
9848.000	38.14	7.53	35.03	37.32	47.96	74.00	-26.04	Pass	Vertical

Test mode: 802.11g(6Mbps)			Test Frequency: 2412MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1118.517	30.02	2.42	35.05	47.18	44.57	74.00	-29.43	Pass	Horizontal
1668.044	31.18	2.98	34.54	48.39	48.01	74.00	-25.99	Pass	Horizontal
4824.000	34.73	5.10	34.35	41.84	47.32	74.00	-26.68	Pass	Horizontal
5880.782	35.81	7.17	34.30	42.20	50.88	74.00	-23.12	Pass	Horizontal
7236.000	36.42	6.69	34.90	38.28	46.49	74.00	-27.51	Pass	Horizontal
9648.000	37.93	7.70	35.07	36.83	47.39	74.00	-26.61	Pass	Horizontal
1129.964	30.05	2.43	35.04	46.60	44.04	74.00	-29.96	Pass	Vertical
1506.563	30.88	2.83	34.67	45.33	44.37	74.00	-29.63	Pass	Vertical
4824.000	34.73	5.10	34.35	42.16	47.64	74.00	-26.36	Pass	Vertical
5776.922	35.73	6.93	34.30	41.38	49.74	74.00	-24.26	Pass	Vertical
7236.000	36.42	6.69	34.90	38.62	46.83	74.00	-27.17	Pass	Vertical
9648.000	37.93	7.70	35.07	36.69	47.25	74.00	-26.75	Pass	Vertical

Test mode: 802.11g(6Mbps)			Test Frequency: 2437MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1167.982	30.15	2.48	35.00	47.13	44.76	74.00	-29.24	Pass	Horizontal
1668.044	31.18	2.98	34.54	47.47	47.09	74.00	-26.91	Pass	Horizontal
4874.000	34.84	5.09	34.33	40.98	46.58	74.00	-27.42	Pass	Horizontal
5806.408	35.76	7.00	34.30	41.03	49.49	74.00	-24.51	Pass	Horizontal
7311.000	36.43	6.76	34.90	39.25	47.54	74.00	-26.46	Pass	Horizontal
9748.000	38.03	7.61	35.05	37.78	48.37	74.00	-25.63	Pass	Horizontal
1165.013	30.14	2.47	35.00	47.59	45.20	74.00	-28.80	Pass	Vertical
3766.785	32.97	5.48	34.58	44.49	48.36	74.00	-25.64	Pass	Vertical
4874.000	34.84	5.09	34.33	41.19	46.79	74.00	-27.21	Pass	Vertical
6267.190	36.04	7.16	34.47	40.62	49.35	74.00	-24.65	Pass	Vertical
7311.000	36.43	6.76	34.90	38.36	46.65	74.00	-27.35	Pass	Vertical
9748.000	38.03	7.61	35.05	36.46	47.05	74.00	-26.95	Pass	Vertical

Test mode: 802.11g(6Mbps)			Test Frequency: 2462MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1118.517	30.02	2.42	35.05	47.70	45.09	74.00	-28.91	Pass	Horizontal
1668.044	31.18	2.98	34.54	47.37	46.99	74.00	-27.01	Pass	Horizontal
4924.000	34.94	5.07	34.32	40.83	46.52	74.00	-27.48	Pass	Horizontal
5689.360	35.67	6.73	34.30	41.99	50.09	74.00	-23.91	Pass	Horizontal
7386.000	36.44	6.83	34.90	39.75	48.12	74.00	-25.88	Pass	Horizontal
9848.000	38.14	7.53	35.03	38.97	49.61	74.00	-24.39	Pass	Horizontal
1044.224	29.82	2.32	35.14	48.45	45.45	74.00	-28.55	Pass	Vertical
1521.981	30.91	2.85	34.65	46.36	45.47	74.00	-28.53	Pass	Vertical
4924.000	34.94	5.07	34.32	40.38	46.07	74.00	-27.93	Pass	Vertical
5925.863	35.85	7.27	34.30	40.84	49.66	74.00	-24.34	Pass	Vertical
7386.000	36.44	6.83	34.90	38.71	47.08	74.00	-26.92	Pass	Vertical
9848.000	38.14	7.53	35.03	37.52	48.16	74.00	-25.84	Pass	Vertical

Test mode: 802.11n(HT20)(6.5Mbps)			Test Frequency: 2412MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1144.437	30.09	2.45	35.02	46.53	44.05	74.00	-29.95	Pass	Horizontal
1668.044	31.18	2.98	34.54	47.54	47.16	74.00	-26.84	Pass	Horizontal
4824.000	34.73	5.10	34.35	40.85	46.33	74.00	-27.67	Pass	Horizontal
6172.197	35.99	7.25	34.41	40.16	48.99	74.00	-25.01	Pass	Horizontal
7236.000	36.42	6.69	34.90	38.05	46.26	74.00	-27.74	Pass	Horizontal
9648.000	37.93	7.70	35.07	36.04	46.60	74.00	-27.40	Pass	Horizontal
1357.254	30.58	2.69	34.80	46.30	44.77	74.00	-29.23	Pass	Vertical
1663.803	31.17	2.97	34.54	45.69	45.29	74.00	-28.71	Pass	Vertical
4824.000	34.73	5.10	34.35	40.60	46.08	74.00	-27.92	Pass	Vertical
5747.586	35.71	6.87	34.30	42.66	50.94	74.00	-23.06	Pass	Vertical
7236.000	36.42	6.69	34.90	37.73	45.94	74.00	-28.06	Pass	Vertical
9648.000	37.93	7.70	35.07	37.84	48.40	74.00	-25.60	Pass	Vertical

Test mode: 802.11n(HT20)(6.5Mbps)			Test Frequency: 2437MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1222.743	30.28	2.54	34.94	47.20	45.08	74.00	-28.92	Pass	Horizontal
1668.044	31.18	2.98	34.54	47.63	47.25	74.00	-26.75	Pass	Horizontal
4874.000	34.84	5.09	34.33	41.18	46.78	74.00	-27.22	Pass	Horizontal
6063.190	35.93	7.36	34.34	40.72	49.67	74.00	-24.33	Pass	Horizontal
7311.000	36.43	6.76	34.90	39.01	47.30	74.00	-26.70	Pass	Horizontal
9748.000	38.03	7.61	35.05	36.75	47.34	74.00	-26.66	Pass	Horizontal
1201.149	30.23	2.52	34.96	47.26	45.05	74.00	-28.95	Pass	Vertical
1668.044	31.18	2.98	34.54	45.93	45.55	74.00	-28.45	Pass	Vertical
4874.000	34.84	5.09	34.33	40.70	46.30	74.00	-27.70	Pass	Vertical
6315.233	36.07	7.11	34.50	41.16	49.84	74.00	-24.16	Pass	Vertical
7311.000	36.43	6.76	34.90	38.59	46.88	74.00	-27.12	Pass	Vertical
9748.000	38.03	7.61	35.05	37.52	48.11	74.00	-25.89	Pass	Vertical

Test mode: 802.11n(HT20)(6.5Mbps)			Test Frequency: 2462MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1135.731	30.07	2.44	35.03	47.28	44.76	74.00	-29.24	Pass	Horizontal
1668.044	31.18	2.98	34.54	48.25	47.87	74.00	-26.13	Pass	Horizontal
4924.000	34.94	5.07	34.32	40.37	46.06	74.00	-27.94	Pass	Horizontal
5776.922	35.73	6.93	34.30	40.88	49.24	74.00	-24.76	Pass	Horizontal
7386.000	36.44	6.83	34.90	38.02	46.39	74.00	-27.61	Pass	Horizontal
9848.000	38.14	7.53	35.03	38.37	49.01	74.00	-24.99	Pass	Horizontal
1257.465	30.36	2.58	34.90	47.81	45.85	74.00	-28.15	Pass	Vertical
1663.803	31.17	2.97	34.54	47.39	46.99	74.00	-27.01	Pass	Vertical
4924.000	34.94	5.07	34.32	41.59	47.28	74.00	-26.72	Pass	Vertical
5895.771	35.82	7.20	34.30	41.19	49.91	74.00	-24.09	Pass	Vertical
7386.000	36.44	6.83	34.90	38.12	46.49	74.00	-27.51	Pass	Vertical
9848.000	38.14	7.53	35.03	36.10	46.74	74.00	-27.26	Pass	Vertical

Remark:

1) Through Pre-scan transmitting mode with all kind of modulation and data rate, find the 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20), and then Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

3) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.


4) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.

PHOTOGRAPHS OF TEST SETUP

Test Model No.: S7



Radiated spurious emission Test Setup-1(Below 30MHz)

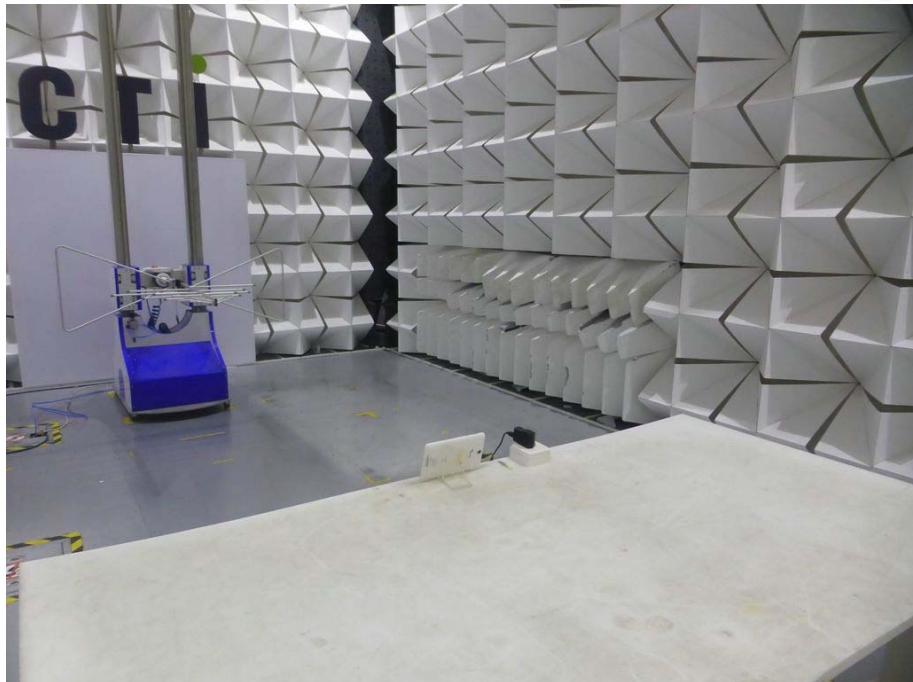

Radiated spurious emission Test Setup-2(30MHz-1GHz)



Radiated spurious emission Test Setup-3(Above 1GHz)



Conducted Emissions Test Setup

PHOTOGRAPHS OF EUT Constructional Details

Refer to Report No. EED32I00225101 for EUT external and internal photos.

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.

