

FCC TEST REPORT

FCC ID : S64WW7700

Applicant : **Moretech Electronics Co., Ltd.**
6/F, Budg.9, Shuang Long Shan Industrial District, Meixi, Zhuhai, China

Equipment Under Test (EUT) :

Product description : Wireless Monitor And Camera


Model No. : WW7700

Serial No. : WW2200, WW3300, CH8000

Standards : FCC 15 Paragraph 15.205, Paragraph 15.209, Paragraph 15.31,
Paragraph 15.33, Paragraph 15.35, Paragraph 15.249

Date of Test : April 08, 2005

Test Engineer : Jimmy Lee

Reviewed By : 

PERPARED BY:
Shenzhen Huatongwei International Inspection Co., Ltd
Keji S,12th,Road, Hi-tech Industrial Park, Shenzhen, Guangdong, China

FCC Registration Number: 662850

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS.....	2
3 TEST SUMMARY.....	5
4 GENERAL INFORMATION.....	6
4.1 CLIENT INFORMATION	6
4.2 GENERAL DESCRIPTION OF E.U.T.....	6
4.3 DETAILS OF E.U.T.	6
4.4 DESCRIPTION OF SUPPORT UNITS	6
4.5 STANDARDS APPLICABLE FOR TESTING.....	6
4.6 TEST FACILITY.....	7
4.7 TEST LOCATION.....	7
5 EQUIPMENT USED DURING TEST	8
6 CONDUCTED EMISSION TEST	9
6.1 TEST EQUIPMENT.....	9
6.2 TEST PROCEDURE	9
6.3 CONDUCTED TEST SETUP	10
6.4 EUT OPERATING CONDITION	10
6.5 CONDUCTED EMISSION LIMITS	11
6.6 CONDUCTED EMISSION TEST RESULT	12
6.7 CONDUCTED EMISSIONS TEST DATA	13
7 RADIATION EMISSION TEST.....	14
7.1 TEST EQUIPMENT.....	14
7.2 MEASUREMENT UNCERTAINTY.....	14
7.3 TEST PROCEDURE	14
7.4 RADIATED TEST SETUP.....	15
7.5 SPECTRUM ANALYZER SETUP.....	15
7.6 CORRECTED AMPLITUDE & MARGIN CALCULATION	16
7.7 SUMMARY OF TEST RESULTS.....	16
7.8 EUT OPERATING CONDITION	17
7.9 RADIATED EMISSIONS LIMIT.....	17
7.10 RADIATED EMISSIONS TEST RESULT.....	18
8 BAND EDGE	22
8.1 TEST EQUIPMENT.....	22
8.2 TEST PROCEDURE	22
8.3 RADIATED TEST SETUP.....	23
8.4 EUT OPERATION	23
8.5 BAND EDGE	23
8.6 BAND EDGE TEST RESULT	24
9 PHOTOGRAPHS OF TESTING.....	25
9.1 CONDUCTION EMISSION TEST SETUP.....	25

9.2 RADIATION EMISSION TEST VIEW26

10 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS27

10.1 EUT - FRONT VIEW27

10.2 EUT - SIDE VIEW27

10.3 EUT –BACK VIEW28

10.4 PCB - COMPONENT VIEW(1)29

10.5 PCB - COMPONENT VIEW(1.1)29

10.6 PCB - SOLDER VIEW(1).....30

10.7 PCB - COMPONENT VIEW(2)31

10.8 PCB - SOLDER VIEW(2).....31

10.9 PCB - COMPONENT VIEW(3)32

10.10 PCB - SOLDER VIEW(3).....32

10.11 PCB - COMPONENT VIEW(4)33

10.12 PCB - SOLDER VIEW(4).....33

11 FCC ID LABEL34

3 **Test Summary**

Test	Test Requirement	Test Method	Class / Severity	Result
Radiated Emission (30MHz to 25GHz)	FCC PART 15: 2003	ANSI C63.4: 1992	Class B	PASS
Conducted Emission (150KHz to 30MHz)	FCC PART 15: 2003	ANSI C63.4: 1992	Class B	PASS

4 General Information

4.1 Client Information

Applicant: **Moretech Electronics Co., Ltd.**
Address of Applicant: 6/F, Budg.9, Shuang Long Shan Industrial District, Meixi,
Zhuhai, China

4.2 General Description of E.U.T.

Product description: Wireless Monitor And Camera
Model No.: WW7700
Serial No. : WW2200,WW3300,CH8000

4.3 Details of E.U.T.

Power Supply: Transmitter Adaprot M/N:UCD12-250
Input:120V/60Hz; output:12VDC 250mA

4.4 Description of Support Units

The EUT has been tested as an independent unit.

4.5 Standards Applicable for Testing

The customer requested FCC tests for a Wireless Monitor And Camera. The standards used were FCC 15 Paragraph 15.205, Paragraph 15.209, Paragraph 15.31,Paragraph 15.33, Paragraph 15.35, Paragraph 15.249.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC – Registration No.: 662850**

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 662850, November 17, 2003.

4.7 Test Location

All Emissions tests were performed at:-Shenzhen Huatongwei International Inspection Co., Ltd. at Keji S, 12th, Road, Hi-tech Industrial Park, Shenzhen, Guangdong, China.

5 Equipment Used during Test

Conducted Emission Test						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due date
1	Shielding Room	ETS	8 x 4 x 4 m ³	N0.2	N/A	N/A
2	LISN	Schaffner Chase	MNZ050D11	1421	06-11-2004	05-11-2005
3	EMI Test Receiver	Rohde & Schwarz	ESCS30	100038	06-11-2004	05-11-2005
Radiated Emission Test						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due date
1	3m Semi- Anechoic Chamber	ETS	N/A	N/A	05-11-2004	04-11-2005
2	EMI Test Receiver	ROHDE & SCHWARZ	ESI 26	100009	05-11-2004	04-11-2005
3	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	100038	05-11-2004	04-11-2005
4	EMI Test Software	ROHDE & SCHWARZ	ES-K1	N/A	N/A	N/A
5	Bilog Type Antenna	ETS	2075	2346	06-11-2004	05-11-2005
6	Horn Antenna	ROHDE & SCHWARZ	HF906	1000029	05-11-2004	04-11-2005
7	Ultra-Broadband Antenna	ROHDE & SCHWARZ	HL562	100015	06-11-2004	05-11-2005
Common Used Equipment						
Item	Test Equipment	Manufacturer	Model No.	Series No.	Cal. Date	Due date
1	Temperature, Humidity & Barometer	OREGON SCIENTIFIC	BA-888	EMC0001 to EMC0004	25-07-2004	25-07-2005
2	DMM	FLUKE	73	70681569 or 70671122	23-07-2004	23-07-2005
3	Monitor	MORETECH	7700	N/A	N/A	N/A

6 Conducted Emission Test

Product:	Wireless Monitor And Camera
Test Requirement:	FCC Part15 Paragraph 15.207
Test Method:	Based on FCC Part15 Paragraph 15.207
Test Date:	April 08, 2005
Frequency Range:	150kHz to 30MHz
Class:	Class B
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

6.1 Test Equipment


Please refer to Section 5 this report.

6.2 Test Procedure

1. The EUT was tested according to ANSI C63.4. The frequency spectrum from 150kHz to 30MHz was investigated.
2. The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.3 Conducted Test Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.4, The specification used in this report was the FCC Part15 Paragraph 15.207 limits.

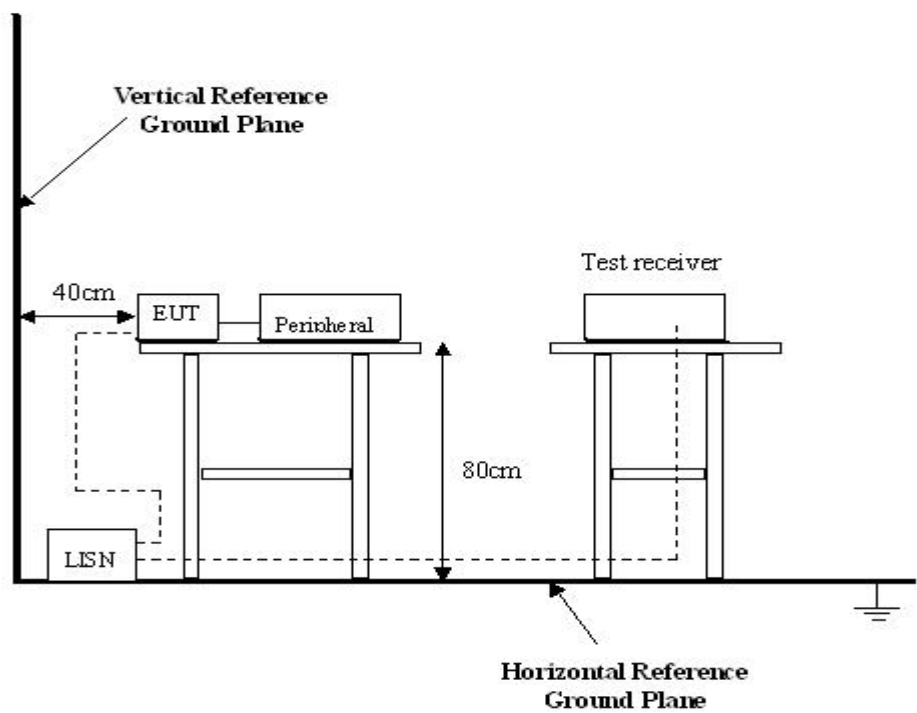

6.4 EUT Operating Condition

Operating condition is according to ANSI C63.4.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.



6.5 Conducted Emission Limits

66-56 dB μ V/m between 0.15MHz & 0.5MHz


56 dB μ V/m between 0.5MHz & 5MHz

60 dB μ V/m between 5MHz & 30MHz


Note: In the above limits, the tighter limit applies at the band edges.

6.6 Conducted Emission Test Result

Live Line:

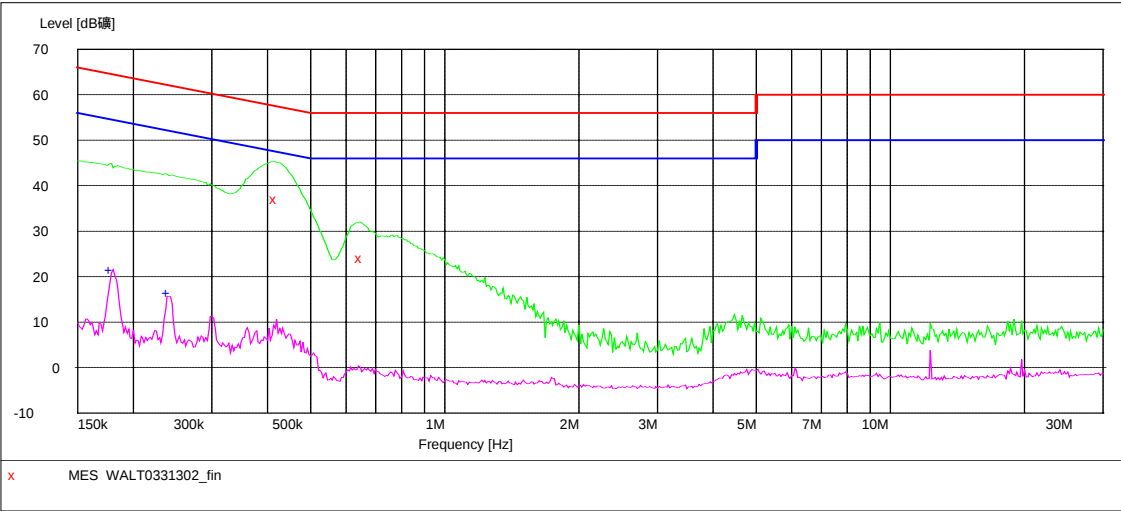

Neutral Line:

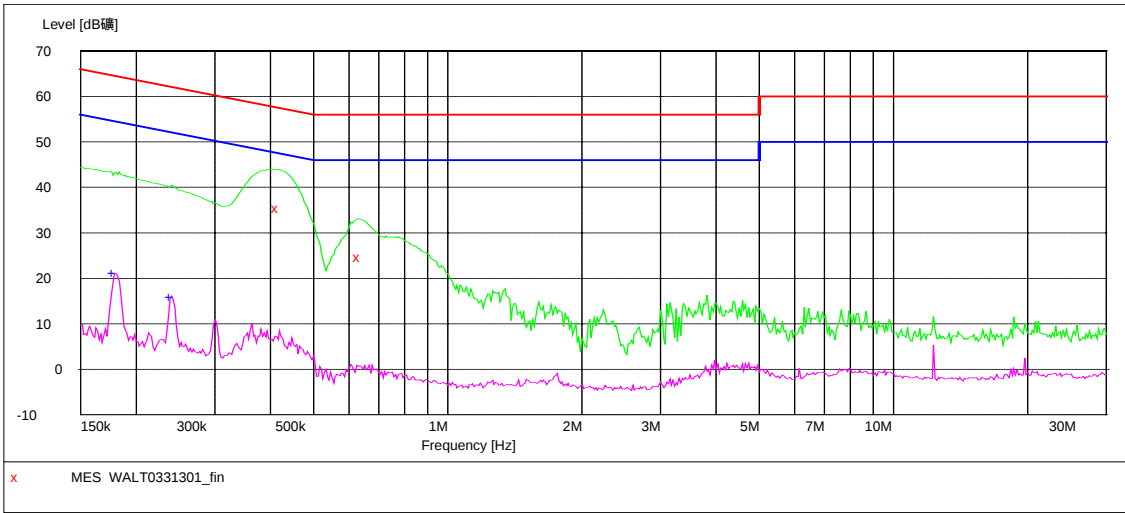

6.7 Conducted Emissions Test Data

Freq. MHz	Line	QP Reading dBuV	FCC 15 Limit dBuV	Margin dB	AV Reading dBuV	FCC 15 Limit dBuV	Margin dB
0.419269	Live	37.1	58.0	20.9	9.3	48.0	38.7
0.649870	Live	24.8	56.0	31.2	2.1	46.0	43.9
0.415940	Neutral	35.0	58.0	23.0	7.4	48.0	40.6
0.634516	Neutral	24.0	56.0	32.0	3.7	46.0	42.3

7 Radiation Emission Test

Product:	Wireless Monitor And Camera
Test Requirement:	FCC Part15 Paragraph 15.209 and Paragraph 15.249
Test Method:	Based on FCC Part15 Paragraph 15.31 and Paragraph 15.33
Test Date:	April 08, 2005
Frequency Range:	30MHz to 25GHz
Measurement Distance:	3m
Detector:	Peak for pre-scan (120kHz resolution bandwidth) Quasi-Peak if maximised peak within 6dB of limit

7.1 Test Equipment

Please refer to Section 5 this report.

7.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on ANSI C63.4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at SZHTW is +4.0 dB.

7.3 Test Procedure

1. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.
2. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB μ V of specification limits), and are distinguished with a "Qp" in the data table.
3. The EUT was under normal mode during the final qualification test and the configuration was used to represent the worst case results.

7.4 Radiated Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4, The specification used in this report was the FCC Part15 Paragraph 15.209 and Paragraph 15.249 limits.

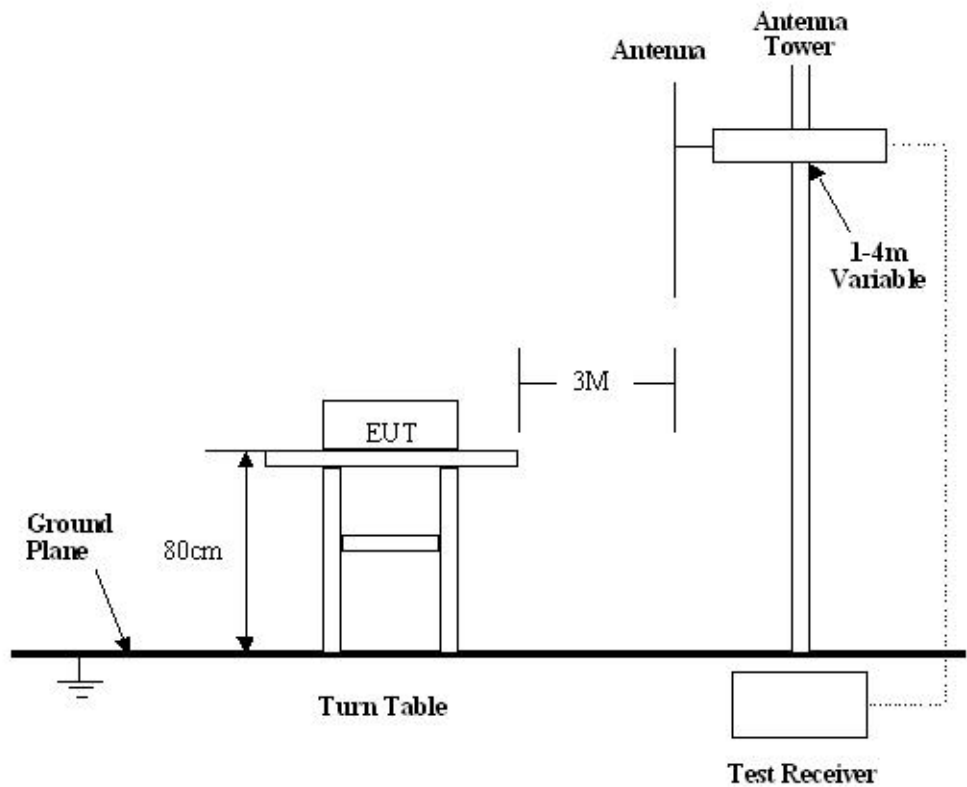

7.5 Spectrum Analyzer Setup

According to FCC Part15 Paragraph 15.209 and Paragraph 15.249 Rules, the system was tested to 25000 MHz.

Start Frequency30 MHz
Stop Frequency25000 MHz
Sweep Speed Auto
IF Bandwidth100 kHz
Video Bandwidth1 MHz
Quasi-Peak Adapter Bandwidth120 kHz
Quasi-Peak Adapter Mode.....Normal
Resolution Bandwidth1MHz

7.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB μ V means the emission is 7dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

7.7 Summary of Test Results

According to the data in section 7.10, the EUT complied with the FCC Part15 Paragraph 15.209 and Paragraph 15.249 standards.

7.8 EUT Operating Condition

Same as section 6.4 of this report.

7.9 Radiated Emissions Limit

A. FCC Part 15 subpart C Paragraph 15.249 Limit

Fundamental Frequency	Field Strength of Fundamental		Field Strength of Harmonics	
	mV/m	dBuV/m	uV/m	dBuV/m
902-928MHz	50	94	500	54
2400-2483.5 MHz	50	94	500	54
5725-5875 MHz	50	94	500	54
24.0-24.25GHz	250	108	2500	68

- Note:**
- (1) RF Voltage(dBuV)=20 log RF Voltage(uV)
 - (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
 - (3)The emission limit in this paragraph is based on measurement instrumentaion employing an average detector.Measurement using instrumentation with a peak detector function,corresponding to 20dB above the maximum permitted average limit.
 - (4) Above 1GHz,do a Peak and average measurements for all emissions,Limit for peak is 74dBuV/m,According to Part15.35(b) and average is 54BuvV/m.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency(MHZ)	Distance(m)	Field strength(dBuV/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

- Note:**
- (1) RF Voltage(dBuV)=20 log RF Voltage(uV)
 - (2) In the Above Table,the tighter limit applies at the band edges.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna.

7.10 Radiated Emissions Test Result

Formula of conversion factors:the field strength at 3m was established by adding
The meter reading of the spectrum analyzer (which is set to read in units of dBuV)
To the antenna correction factor supplied by the antenna manufacturer. The antenna
Correction factors are stated in terms of dB.The gain of the pressletor was accounted
For in the spectrum analyser meter reading.

Example:

Freq(MHz) Meter Reading +ACF=FS

33 20dBuV+10.36dB=30.36dBuV/m @3m

A. Fundamental Radiated Emission Data

Test Item:	Fundamental Radiated Emission Data
Test Voltage:	120VAC/60Hz
Test Mode:	On
Temperature:	24 °C
Humidity:	52%RH
Test Result:	PASS

1GHZ-25GHZ Radiated Emission Data

Frequency (MHz)	Antenna Polarization	Emission Level (dBuV/m)	FCC 15 Subpart C Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°)
Low frequency						
2414.664592	Vertical	86.50	94.0	7.50	1.5	120
4828.595377	Vertical	48.04	54.0	5.96	1.5	45
7242.920953	Vertical	38.45	54.0	15.55	1.5	90
12278.356713	Vertical	42.45	54.0	11.55	1.5	45
24122.907615	Vertical	47.16	54.0	6.84	1.5	180
2414.664592	Horizontal	88.83	94.0	5.17	1.5	90
4828.778363	Horizontal	43.42	54.0	10.58	1.5	180
7242.7870951	Horizontal	40.85	54.0	13.15	1.5	45
12279.356713	Horizontal	41.55	54.0	12.45	1.5	90
24124.127616	Horizontal	47.61	54.0	6.39	1.5	45
Middle frequency						
2432.345774	Vertical	86.45	94.0	7.55	1.5	60
4864.695391	Vertical	47.94	54.0	6.06	1.5	45
7297.428858	Vertical	39.43	54.0	14.57	1.5	90
12178.356713	Vertical	42.45	54.0	11.55	1.5	270
24303.907615	Vertical	46.83	54.0	7.17	1.5	90
2432.345774	Horizontal	89.30	94.0	4.70	1.5	90
4864.887776	Horizontal	44.21	54.0	9.79	1.5	180
7297.793587	Horizontal	40.10	54.0	13.90	1.5	45
12154.509018	Horizontal	42.53	54.0	11.47	1.5	60
24303.807615	Horizontal	47.23	54.0	6.77	1.5	90


High frequency						
2468.3345786	Vertical	85.53	94.0	8.47	1.5	45
4936.7802137	Vertical	45.46	54.0	8.54	1.5	60
7411.1655398	Vertical	41.69	54.0	12.31	1.5	180
12391.459956	Vertical	43.34	54.0	10.66	1.5	90
24703.891486	Vertical	46.31	54.0	7.69	1.5	180
2468.101887	Horizontal	86.32	94.0	7.68	1.5	90
4936.548321	Horizontal	44.84	54.0	9.16	1.5	90
7413.737182	Horizontal	41.60	54.0	12.40	1.5	45
12385.095834	Horizontal	43.78	54.0	10.22	1.5	60
24617.573176	Horizontal	45.78	54.0	8.22	1.5	180

Note: (1) Above 1GHz,do a Peak and average measurements for all emissions,Limit for peak is 74dBuV/m,According to Part15.35(b) and average is 54BuV/m.
 (2) Emission Level = Reading Level + Probe Factor + Cable Loss.


B. General Radiated Emission Data

Test Item: General Radiated Emission Data
Test Voltage: 120VAC/60Hz
Test Mode: On
Temperature: 24 °C
Humidity: 52%RH
Test Result: PASS
Remarks:No significant emissions above the equipment noise floor were detected.

Horizontal:

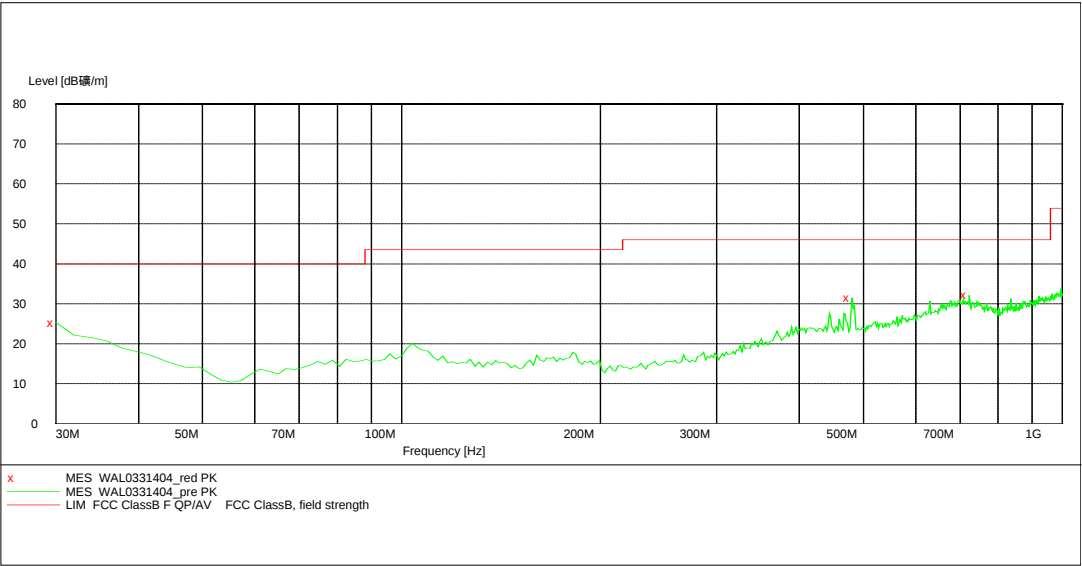

Vertical:

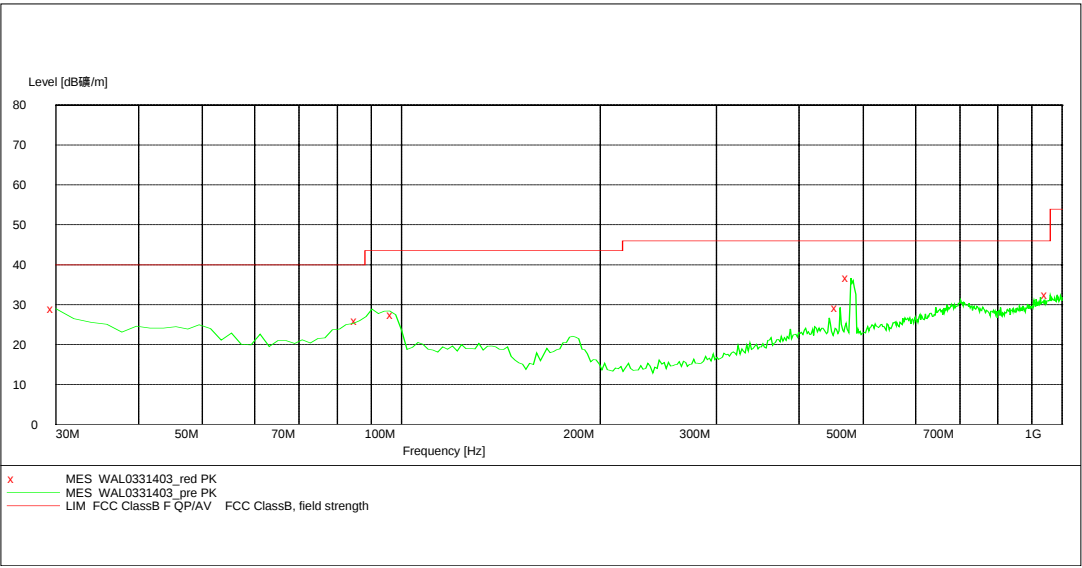

8 Band Edge


8.1 Test Equipment

Please refer to Section 5 this report.

8.2 Test Procedure

1. The EUT was tested according to ANSI C63.4. The radiated test was performed at Shenzhen Huatongwei International Inspection Co., Ltd. This lab has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 662850, November 17, 2003.
2. The EUT, peripherals were put on the turntable which table size is 1mX1.5m, table high 0.8m. All set up is according to ANSI C63.4.
3. With the EUT's antenna attached, The EUT's radiated emission power was received by the test antenna which was connected to the spectrum analyser with the START and STOP frequencies set to the EUT's operation band. Measurements were made at 3 meters.
4. The antenna high were varied from 1m to 4m high to find the maximum emission for each frequency.
5. Maximizing procedure was performed on the highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak reading was performed only when an emission was found to be marginal (within -4 dB μ V of specification limits), and are distinguished with a "QP" in the data table.
6. The antenna polarization: Vertical polarization and horizontal polarization.

8.3 Radiated Test Setup

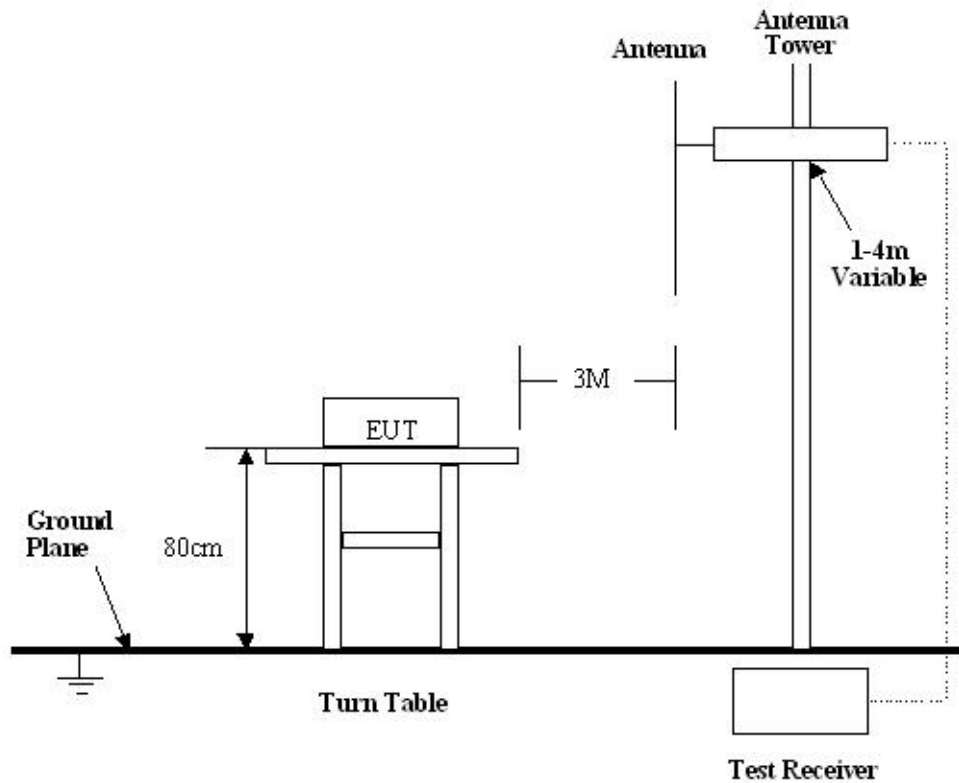

8.4 EUT Operation


Same as section 6.4 of this report.

8.5 Band Edge

Requirements: FCC 15.249(c), The emission power at the START and STOP frequencies shall be at least 50dB below the level of the fundamental or to the general radiated emission limits in FCC 15.209.

8.6 Band Edge Test Result

Product: Wireless Monitor And Camera
Test Item: Band Edge Test
Test Voltage: 120VAC/60Hz
Test Mode: On
Temperature: 24 °C
Humidity: 52%RH

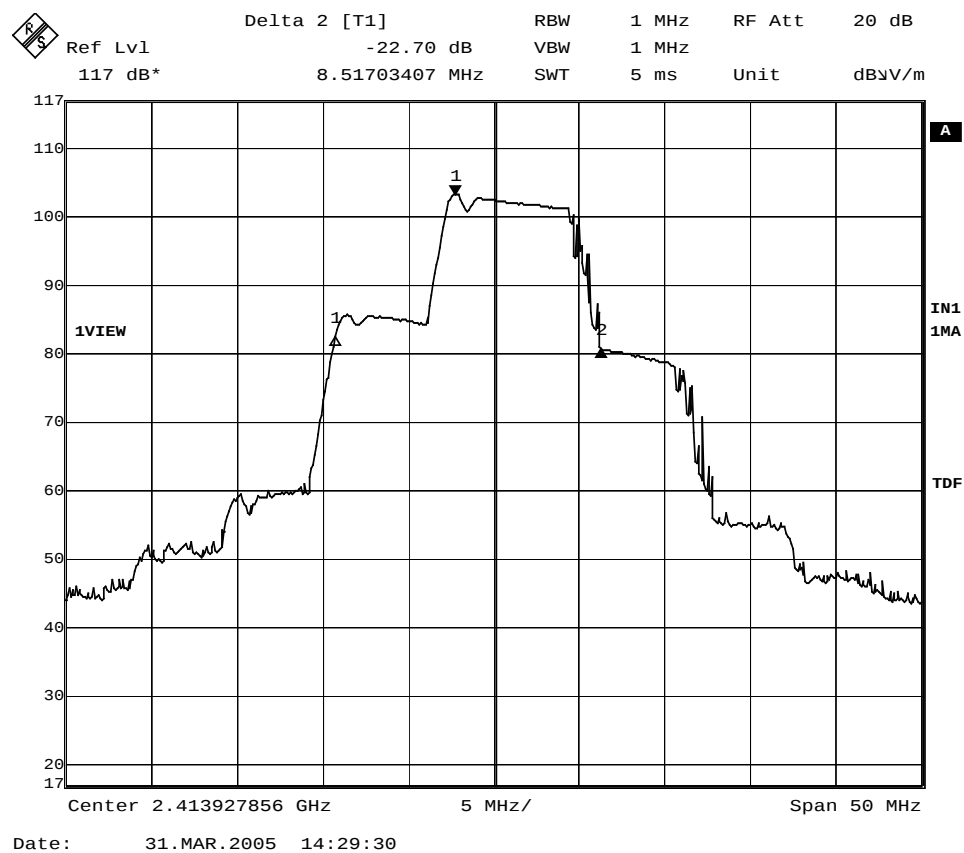


Note: (1) The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.249.

9 Photographs of Testing

9.1 Conduction Emission Test Setup



9.2 Radiation Emission Test View

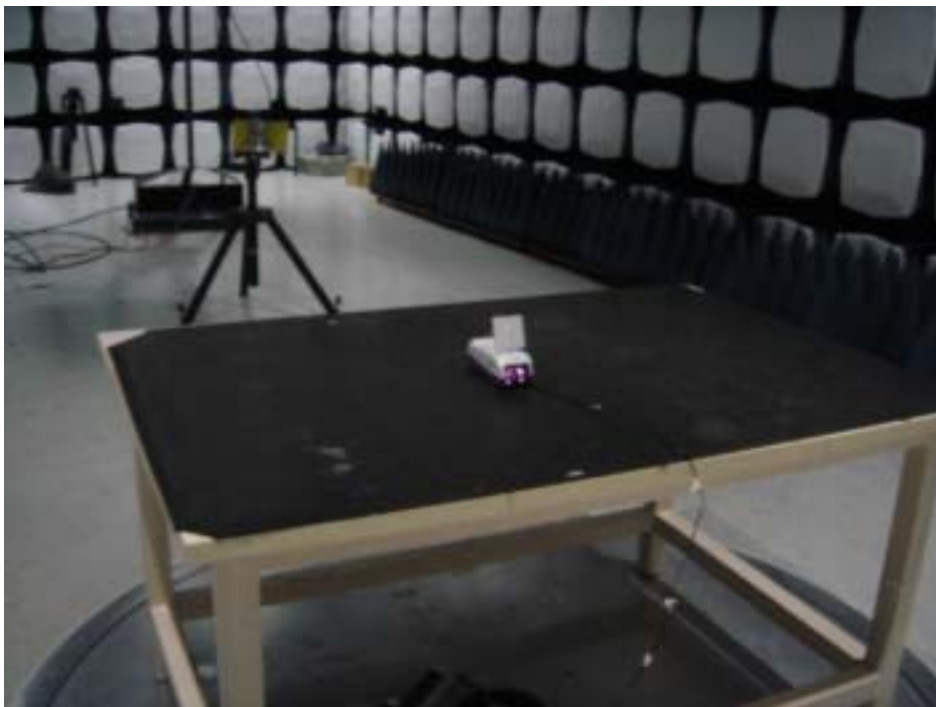

10 Photographs - Constructional Details

10.1 EUT - Front View



10.2 EUT - Side View




10.3 EUT –Back View




10.4 PCB - Component View(1)




10.5 PCB - Component View(1.1)

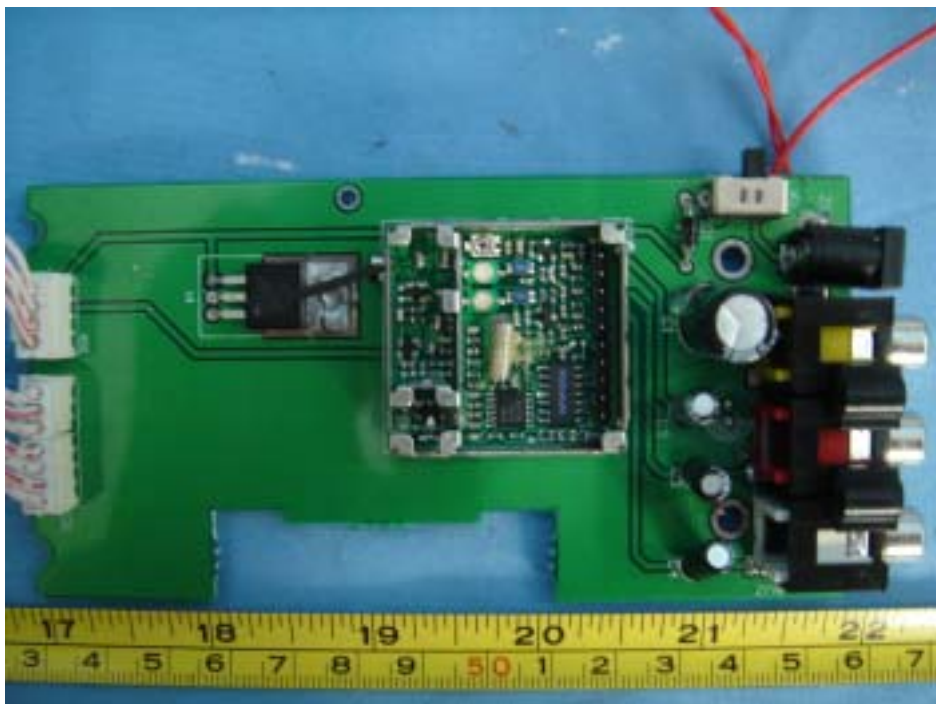

10.6 PCB - Solder View(1)

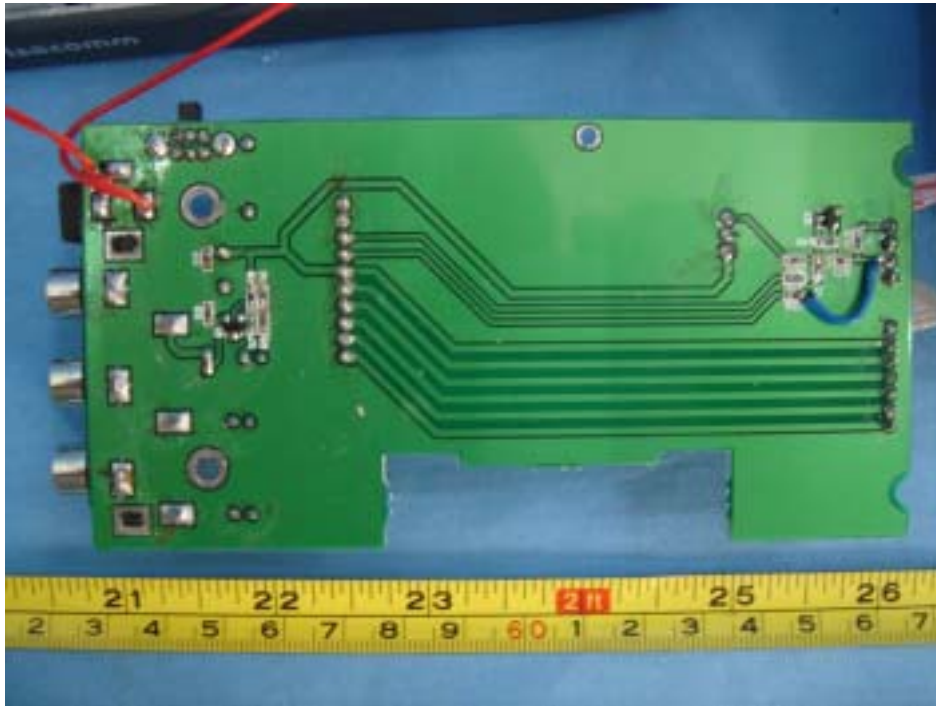


10.7 PCB - Component View(2)

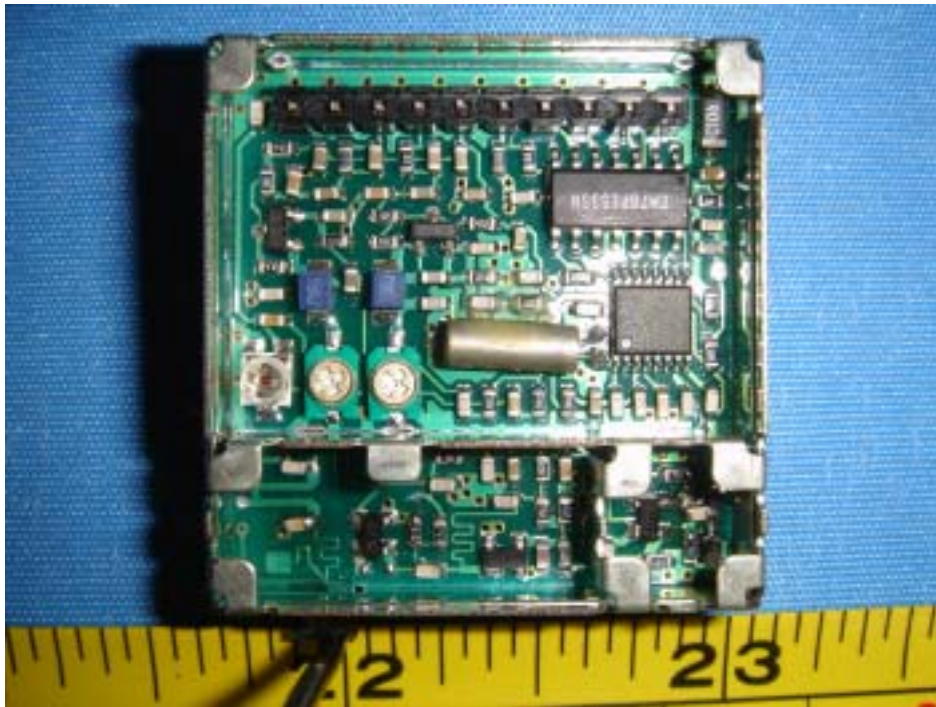


10.8 PCB - Solder View(2)



10.9 PCB - Component View(3)

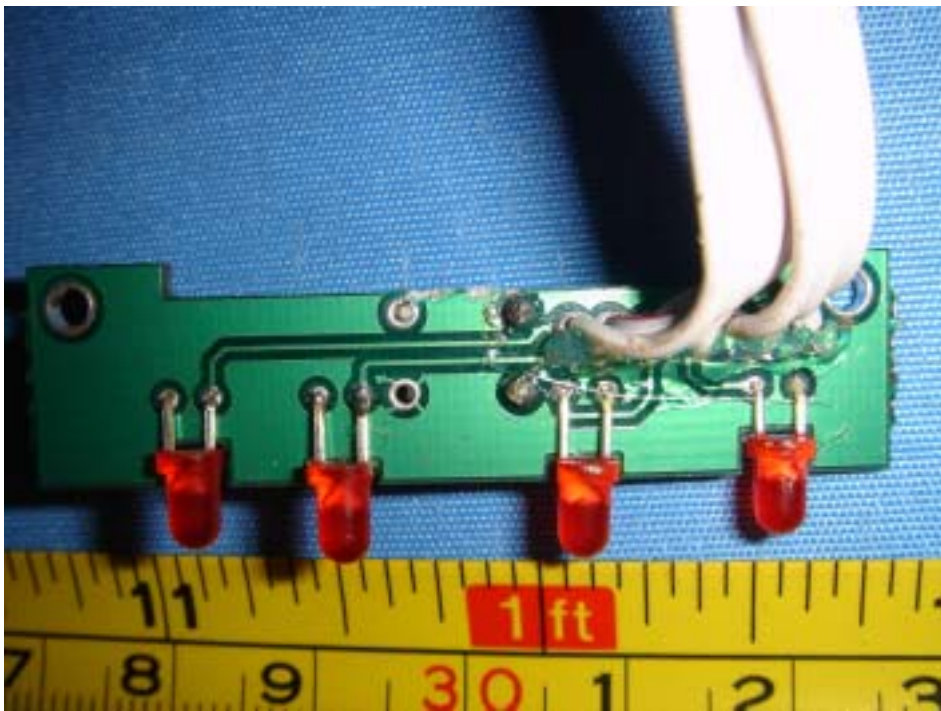


10.10 PCB - Solder View(3)

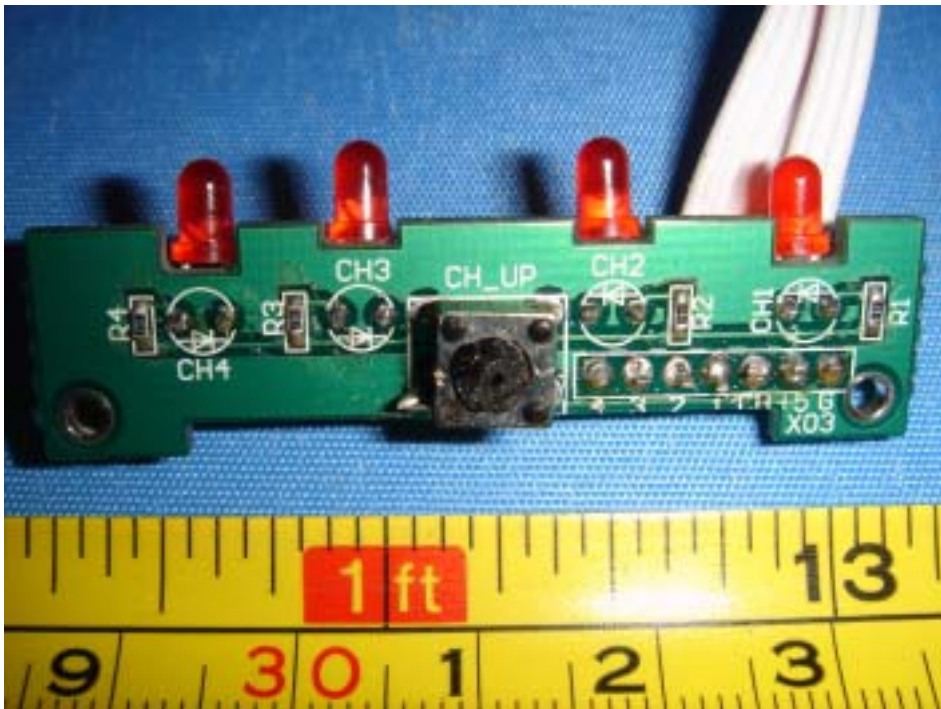

10.11 PCB - Component View(4)



10.12 PCB - Solder View(4)

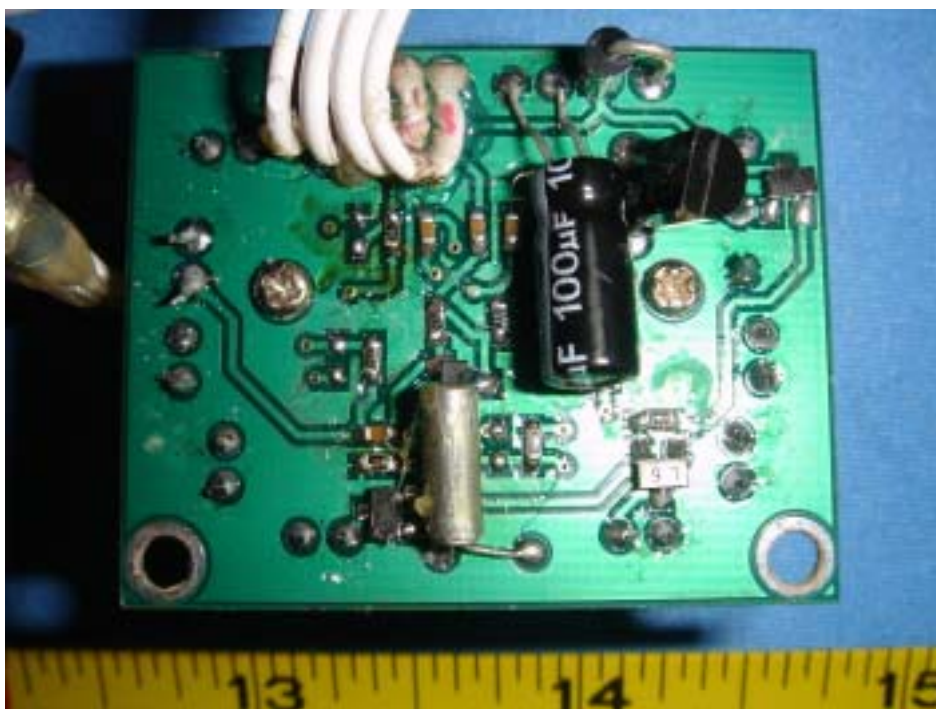

11 FCC ID Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference,and (2) this device must accpt any interference received, including interference that may cause undesired operation

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT
EUT Bottom View/proposed FCC Mark Location

