

hp

REF -20.0 dBm

AT 10 dB

PEAK

LOG

10

dB/

Duty cycle = 50%

Average Factor = $10 \log_{10} 0.5$
or -6.0 dB

WA SB

SC VS

CORR


CENTER 433.990 MHz

#RES BW 3.0 MHz

#VBW 3 MHz

SPAN 0 Hz

#SWP 100 msec

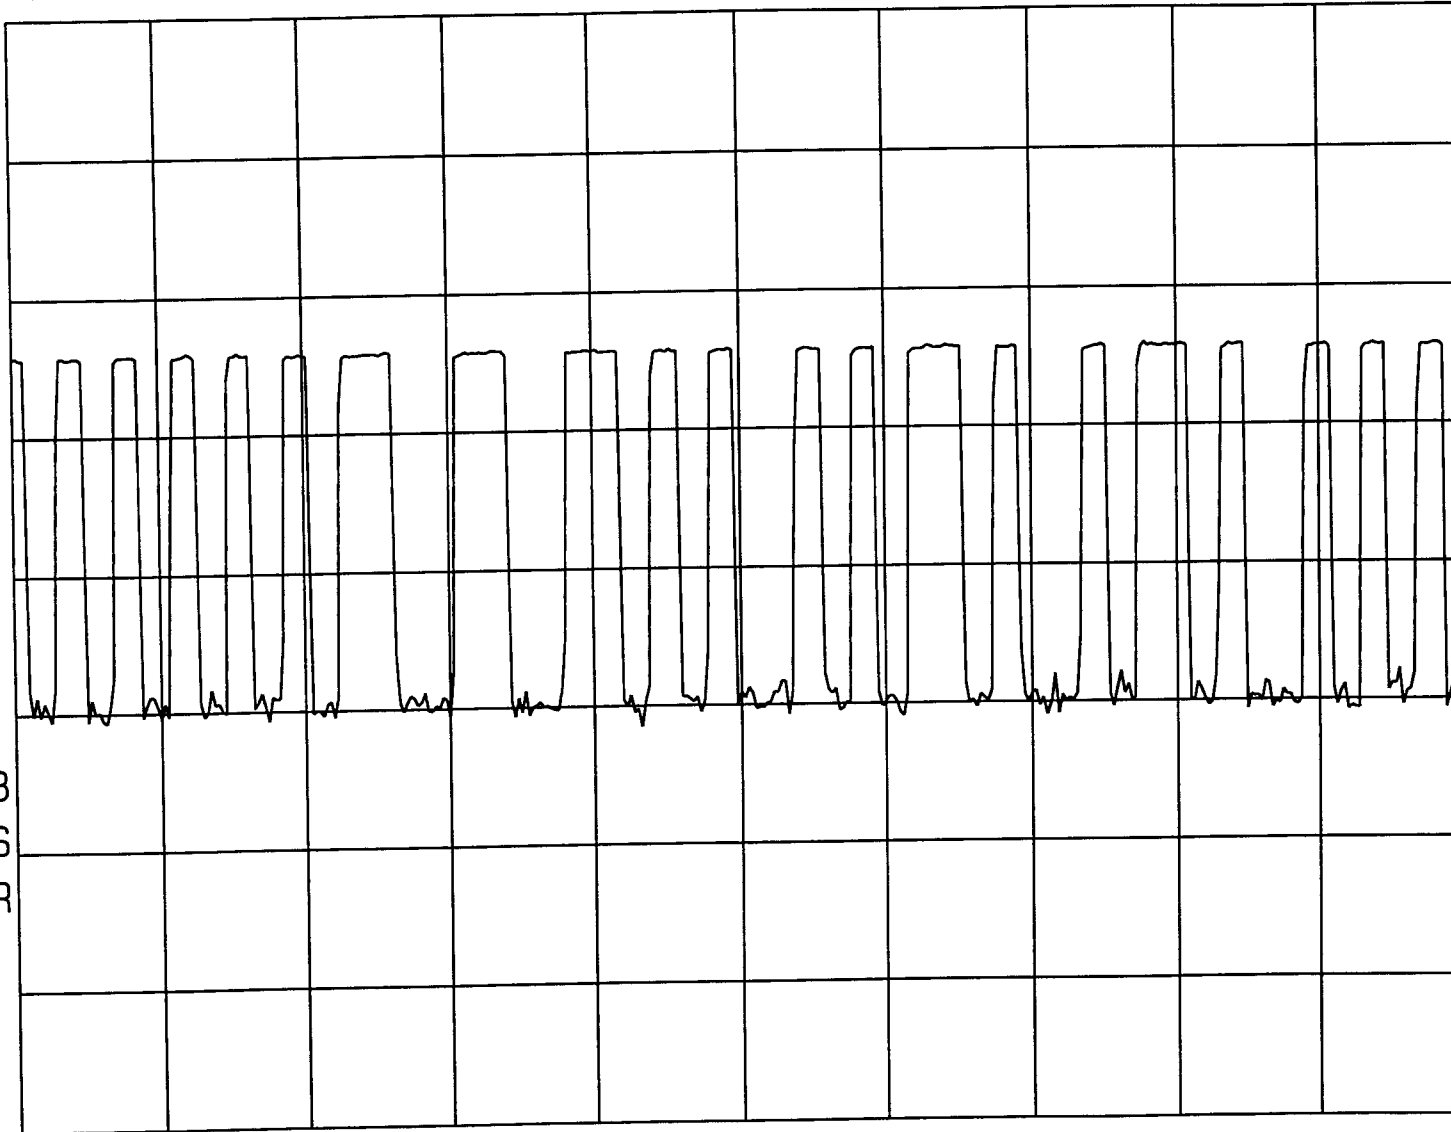

hp

REF -20.0 dBm


AT 10 dB

PEAK

LOG

10

dB/

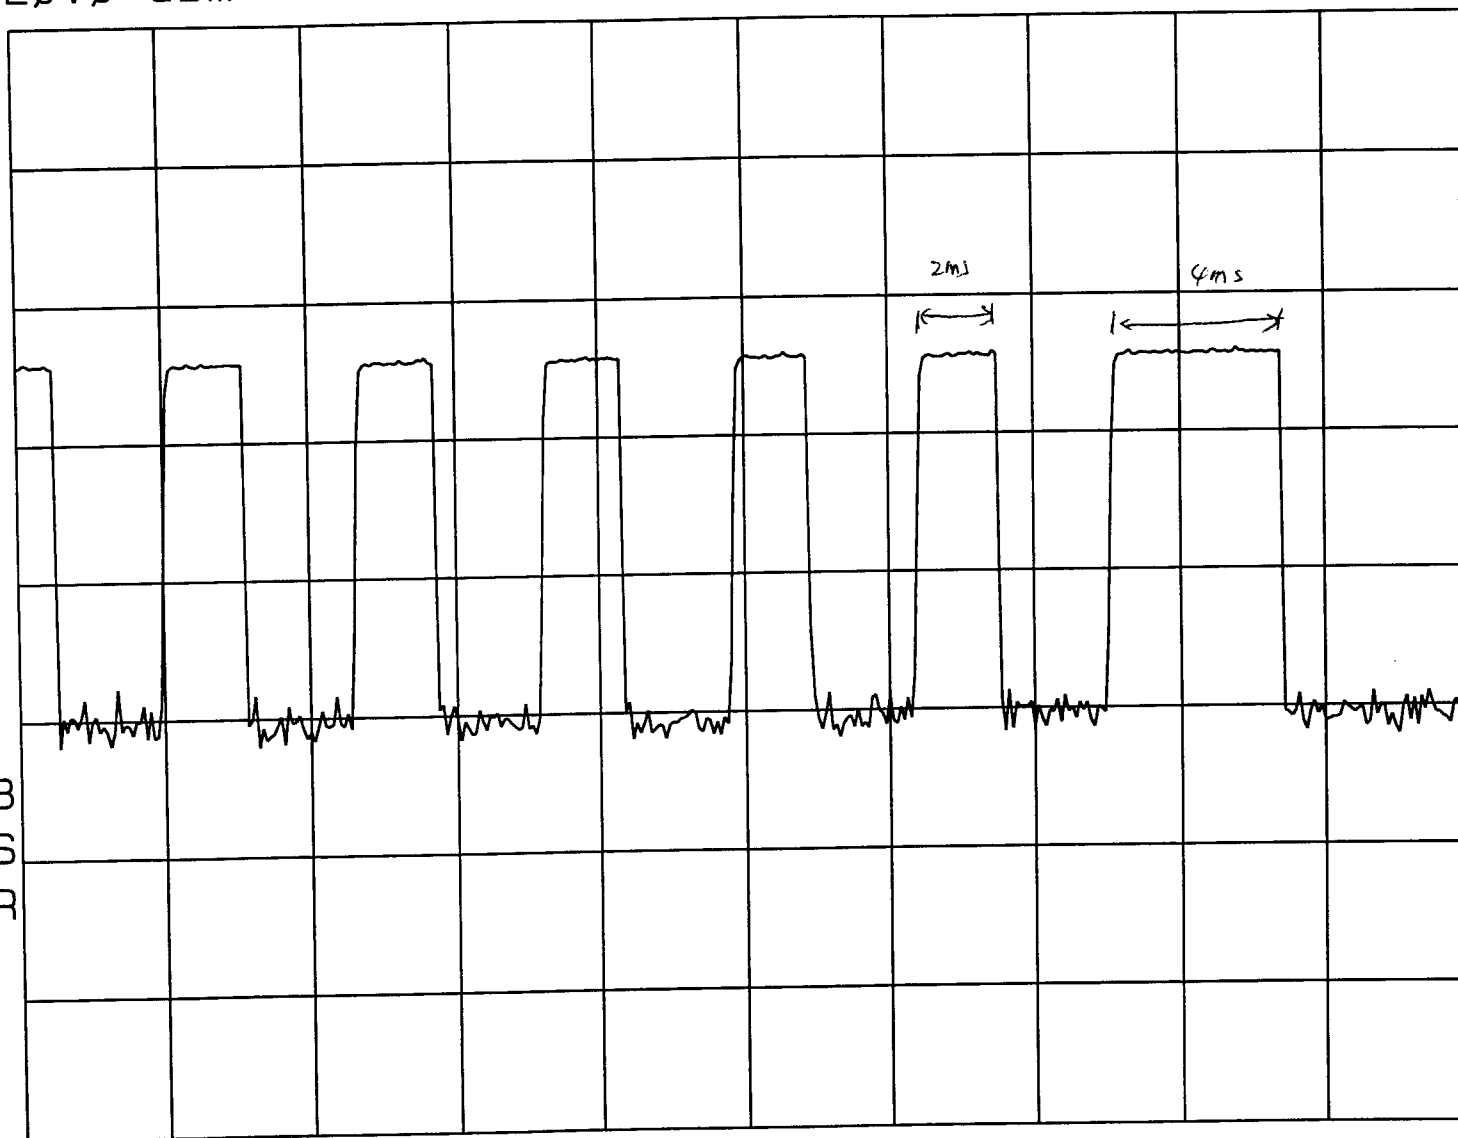

WA SB
SC VS
CORR

CENTER 433.990 MHz

#RES BW 3.0 MHz

#VBW 3 MHz

SPAN 0 Hz

#SWP 30.0 msec

hp

REF -20.0 dBm

AT 10 dB

MKR 835.00 msec


-43.74 dBm

PEAK

LOG

10

dB/

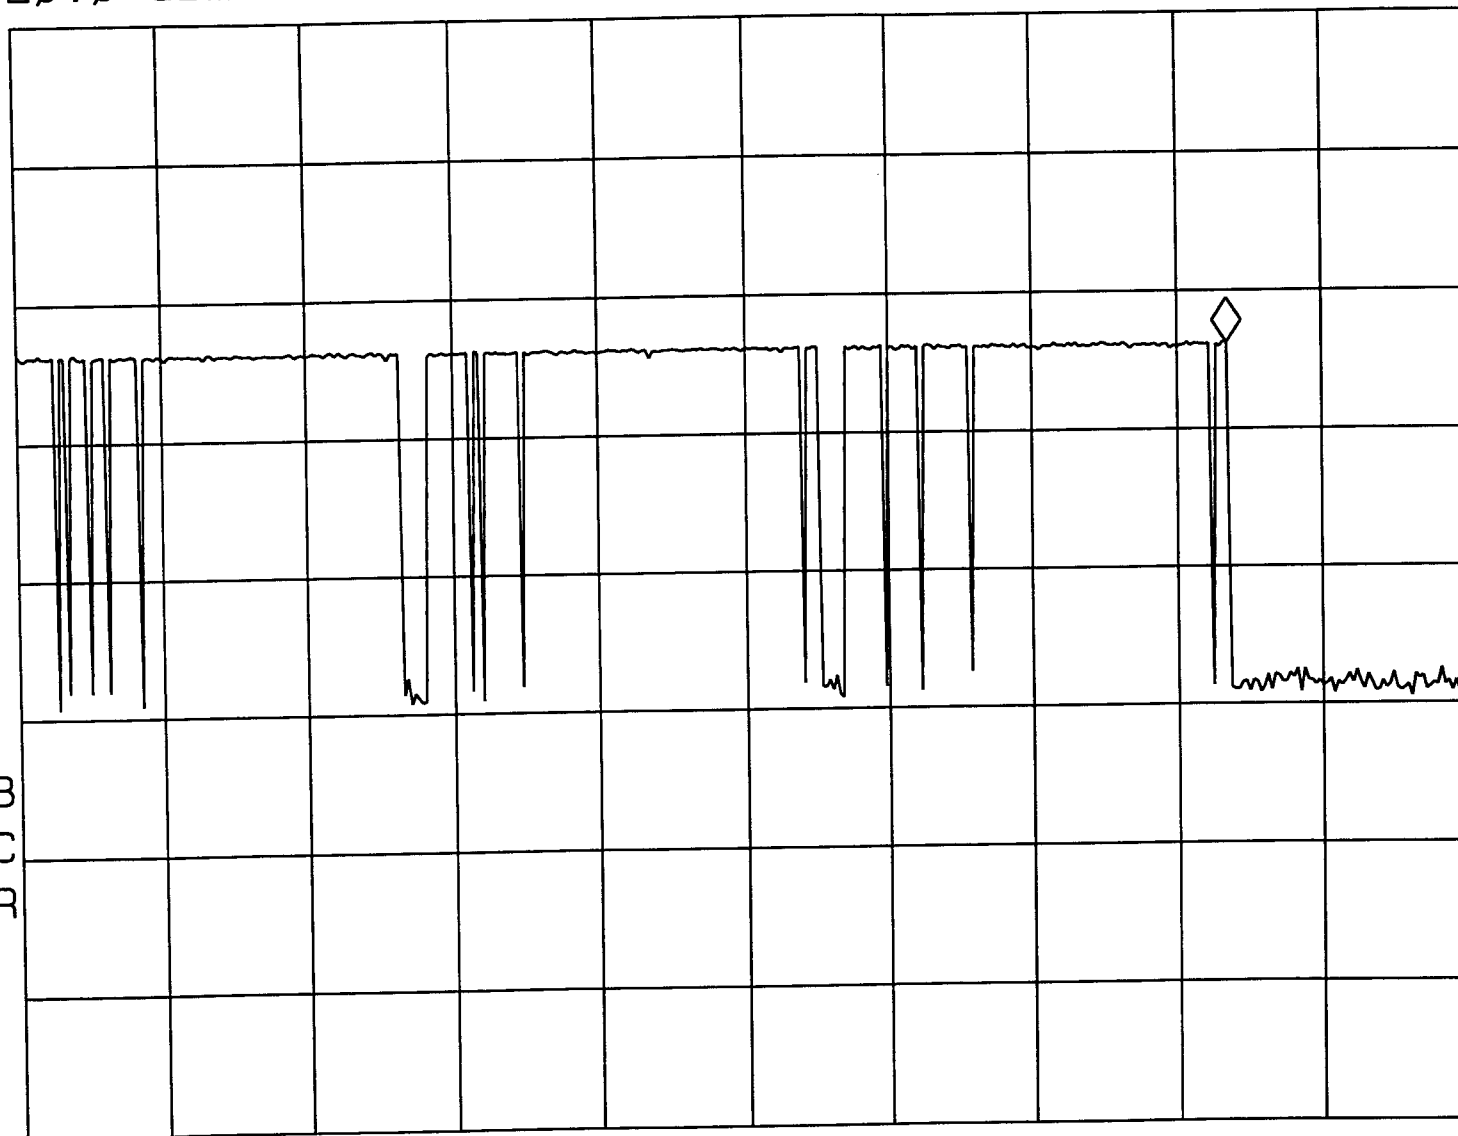

WA SB

SC VC

CORR

CENTER 433.990 MHz

#RES BW 3.0 MHz

#VBW 3 MHz

SPAN 0 Hz

#SWP 1.00 sec

hp

REF -20.0 dBm

AT 10 dB

PEAK

LOG

10

dB/

silent period > 100s
about 180s

WA SB

SC VC

CORR

CENTER 433.990 MHz

#RES BW 3.0 MHz

#VBW 3 MHz

SPAN 0 Hz

#SWP 100 sec