



FCC/IC RADIO TEST REPORT

Issued to

IVT Corporation

For

Bluetooth Module


Model Name : i410e
 Trade Name : BlueSoleil
 Brand Name : BlueSoleil
 FCC ID : S78-IVTI410E
 IC Number : 11004A-IVTI410E
 Standard : 47 CFR Part 15 Subpart C
 RSS-GEN
 RSS-210
 Test date : 2013-3-4 to 2013-7-2
 Issue date : 2013-7-2

by

Shenzhen MORLAB Communication Technology Co., Ltd.

Tested by Nie Quan
 Nie Quan
 (Test Engineer)

Date 2013.7.2

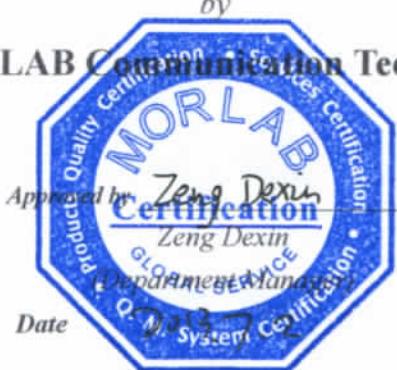

Review by Peng Huarui
 Peng Huarui
 (Project Manager)

Date 2013.7.2

CTIA Authorized Test Lab
 LAB CODE 20081223-00

IEEE 1725 OTA

OFTA
 電訊管理局



GCF
 Official Observer of
 Global Certification Forum

Bluetooth
 BQTF

FCC
 Reg. No.
 695796

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced either in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof, prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer, Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

DIRECTORY

| | |
|---|----------|
| 1. GENERAL INFORMATION | 3 |
| 1.1. EUT Description | 3 |
| 1.2. Test Standards and Results..... | 4 |
| 1.3. Facilities and Accreditations | 5 |
| 2. 47 CFR PART 15C AND RSS-210 REQUIREMENTS..... | 6 |
| 2.1. Antenna requirement..... | 6 |
| 2.2. Peak Output Power..... | 6 |
| 2.3. Average power | 9 |
| 2.4. 6dB Bandwidth | 10 |
| 2.5. 99% Bandwidth..... | 13 |
| 2.6. Conducted Spurious Emissions and Band Edge | 16 |
| 2.7. Power spectral density (PSD) | 20 |
| 2.8. Restricted Frequency Bands..... | 23 |
| 2.9. Conducted Emission | 27 |
| 2.10. Radiated Emission..... | 29 |
| 2.11. RF exposure evaluation..... | 38 |

| Change History | | |
|----------------|---------------|-------------------|
| Issue | Date | Reason for change |
| 1.0 | April 3, 2013 | First edition |
| 2.0 | July 2, 2013 | Second edition |
| | | |

1. General Information

1.1. EUT Description

EUT Type: Bluetooth Module
Serial No.....: (n.a, marked #1 by test site)
Hardware Version: 1.0
Software Version: 4.0
Applicant: IVT Corporation
5/F, Zhongguancun Fazhan Building, No. 12, Shangdi Xinxi Road,
Haidian District, Beijing, 100085 China
Manufacturer: IVT Corporation
5/F, Zhongguancun Fazhan Building, No. 12, Shangdi Xinxi Road,
Haidian District, Beijing, 100085 China
Frequency Range: The frequency range used is 2402MHz - 2480MHz (40 channels, at
intervals of 2MHz);
Modulation Type: GFSK
Antenna Type.....: Ceramic Antenna
Antenna Gain.....: 2.0dBi

Note 1: The EUT is Bluetooth Module, it contain Bluetooth 4.0 LE Module operating at 2.4GHz ISM band; the frequencies allocated for the Bluetooth 4.0 LE is $F(\text{MHz})=2402+2*n$ ($0 \leq n \leq 39$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 19 (2440MHz) and 39 (2480MHz).

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.2. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C and RSS-210 (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC/IC ID Certification:

| No. | Identity | Document Title |
|-----|--------------------------------------|--|
| 1 | 47 CFR Part 15 (10-1-09 Edition) | Radio Frequency Devices |
| 2 | RSS-GEN:Issue 3, December 2010 | General Requirements and Information for the Certification of Radio Apparatus |
| 3 | RSS-210: Issue 8, December 2010 | Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment |

Test detailed items/section required by FCC rules and results are as below:

| No . | Section in CFR 47 | Section in RSS-GEN, RSS-210 | Description | Result |
|------|-------------------------------|-----------------------------------|--|--------|
| 1 | 15.203 | 7.1.4 | Antenna Requirement | PASS |
| 2 | 15.247(b) | A8.4 (2) | Peak Output Power | PASS |
| 3 | 15.247(b) | A8.4 (2) | Average power | PASS |
| 4 | 15.247(a) | A8.2 (a) | 6dB Bandwidth | PASS |
| 5 | 15.247(a) | A8.2 (a) | 99% Bandwidth | PASS |
| 8 | 15.247(d) | A8.5 | Conducted Spurious Emission and Band Edge | PASS |
| 9 | 15.247(d) | A8.5 | Restricted Frequency Bands | PASS |
| 10 | 15.207 | 7.2.4 | Conducted Emission | N/A |
| 11 | 15.209 15.247(d) | A8.5 | Radiated Emission | PASS |
| 12 | 15.247(e) | A8.2(b) | Power spectral density (PSD) | PASS |
| 10 | 15.247(i). § 1.1307&2.1093 | RSS-102 | RF exposure evaluation | PASS |

The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.4 2009.

These RF tests were performed according to the method of measurements prescribed in KDB558074 D01 V02 10/04/2012.

1.3. Facilities and Accreditations

1.3.1. Facilities

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10 2009, ANSI C63.4 2009 and CISPR Publication 22; the FCC registration number is 695796.

The IC registration number is 7183A-2.

1.3.2. Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

| | |
|-----------------------------|---------|
| Temperature (°C): | 15 - 35 |
| Relative Humidity (%): | 30 -60 |
| Atmospheric Pressure (kPa): | 86-106 |

2. 47 CFR Part 15C and RSS-210 Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2. Peak Output Power


2.2.1. Requirement

According to FCC section 15.247(b)(3) and RSS-210 A8.4 (2), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.2.2. Test Description

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

A. Test Setup:

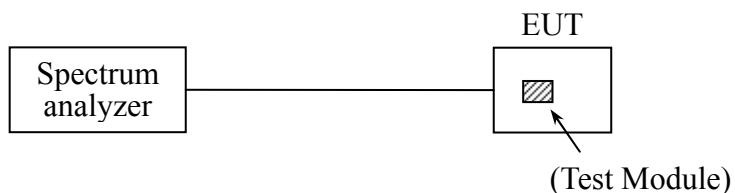

The EUT (Equipment under the test) which is powered by the Battery is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

B. Equipments List:

| Description | Manufacturer | Model | Serial No. | Cal. Date | Cal. Due |
|-------------------|--------------|--------|------------|-----------|----------|
| Spectrum analyzer | Agilent | E4407B | MY45101810 | 2012.05 | 2013.05 |


2.2.3. Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.


A. Test Verdict:

| Channel | Frequency (MHz) | Measured Output Peak Power | | Refer to Plot | Limit | | Verdict |
|---------|-----------------|----------------------------|----------|---------------|-------|---|---------|
| | | dBm | W | | dBm | W | |
| 0 | 2402 | -5.525 | 0.000280 | Plot A | 30 | 1 | PASS |
| 19 | 2440 | -3.705 | 0.000426 | | | | PASS |
| 39 | 2480 | -2.153 | 0.000609 | | | | PASS |


B. Test Plots:

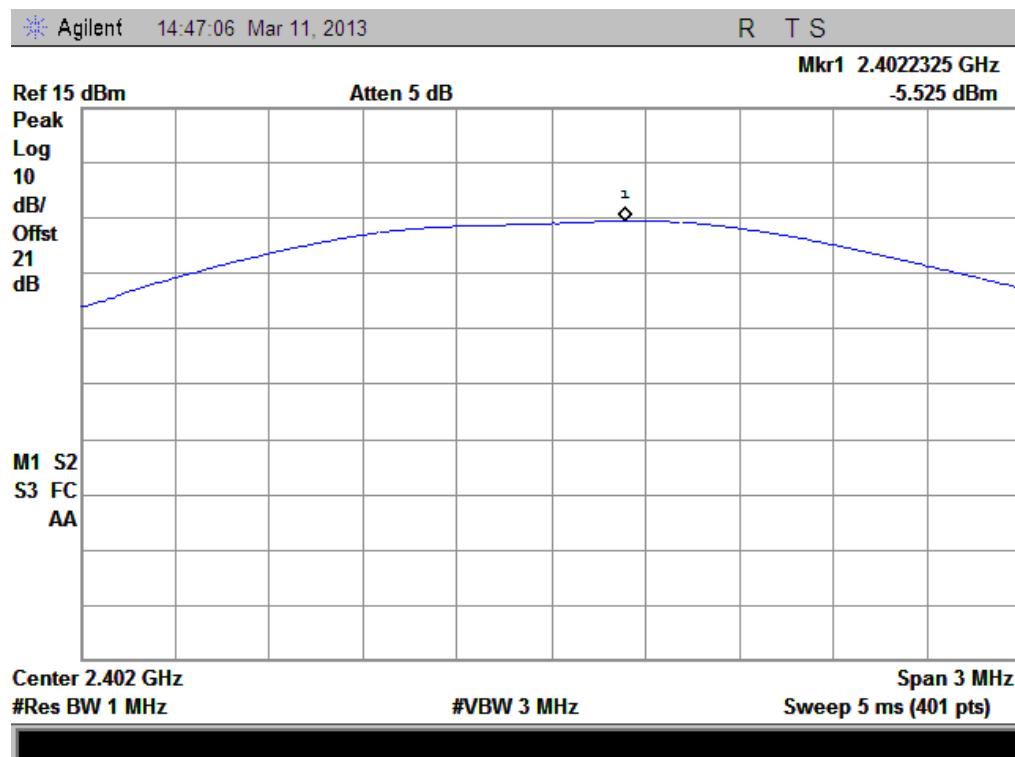

(Plot A: Channel 0: 2402MHz)

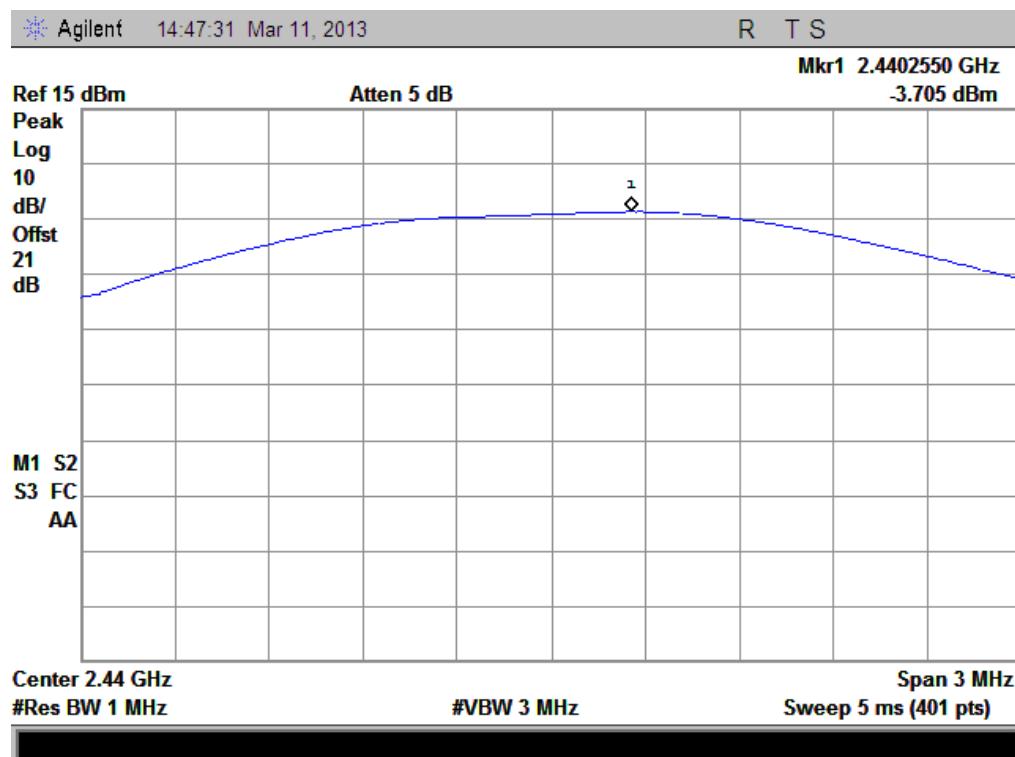

(Plot B: Channel 19: 2440MHz)

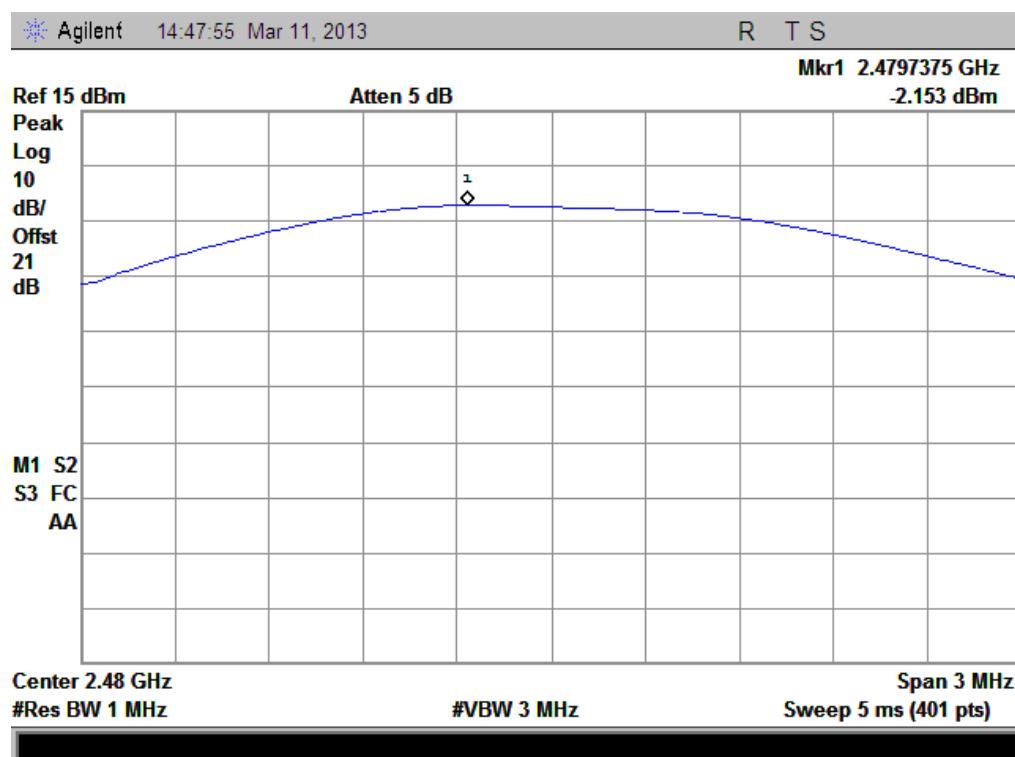

(Plot C: Channel 39: 2480MHz)

2.3. Average power

2.3.1. Requirement

None; for reporting purposes only.

2.3.2. Test Description

The transmitter output is connected to a power meter.

A. Test Setup:



B. Equipments List:

| Description | Manufacturer | Model | Serial No. | Cal. Date | Cal. Due |
|------------------------|--------------|--------|------------|-----------|----------|
| EPM Series Power Meter | Agilent | E4418B | GB43318055 | 2012.05 | 2013.05 |

2.3.3. Results

The cable assembly insertion loss of 1.5dB was entered as an offset in the power meter to allow for direct reading of power.

| Channel | Frequency (MHz) | Average Power | |
|---------|-----------------|---------------|----------|
| | | dBm | W |
| 0 | 2402 | -7.85 | 0.000164 |
| 19 | 2440 | -6.29 | 0.000235 |
| 39 | 2480 | -4.70 | 0.000339 |


2.4. 6dB Bandwidth

2.4.1. Requirement

According to FCC section 15.247(a) (2) and RSS-210 A8.1(a), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.4.2. Test Description

A. Test Set:

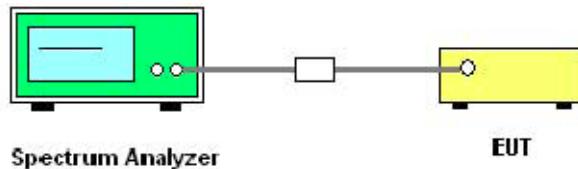

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

| Description | Manufacturer | Model | Serial No. | Cal. Date | Cal. Due |
|-------------------|--------------|--------|------------|-----------|----------|
| Spectrum analyzer | Agilent | E4407B | MY45101810 | 2012.05 | 2013.05 |


2.4.3. Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the Module.


A. Test Verdict:

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Refer to Plot | Limits(kHz) | Result |
|---------|-----------------|----------------------|---------------|-------------|--------|
| 0 | 2402 | 0.7350 | Plot A | ≥ 500 | PASS |
| 19 | 2440 | 0.7425 | Plot B | ≥ 500 | PASS |
| 39 | 2480 | 0.7350 | Plot C | ≥ 500 | PASS |


B. Test Plots:

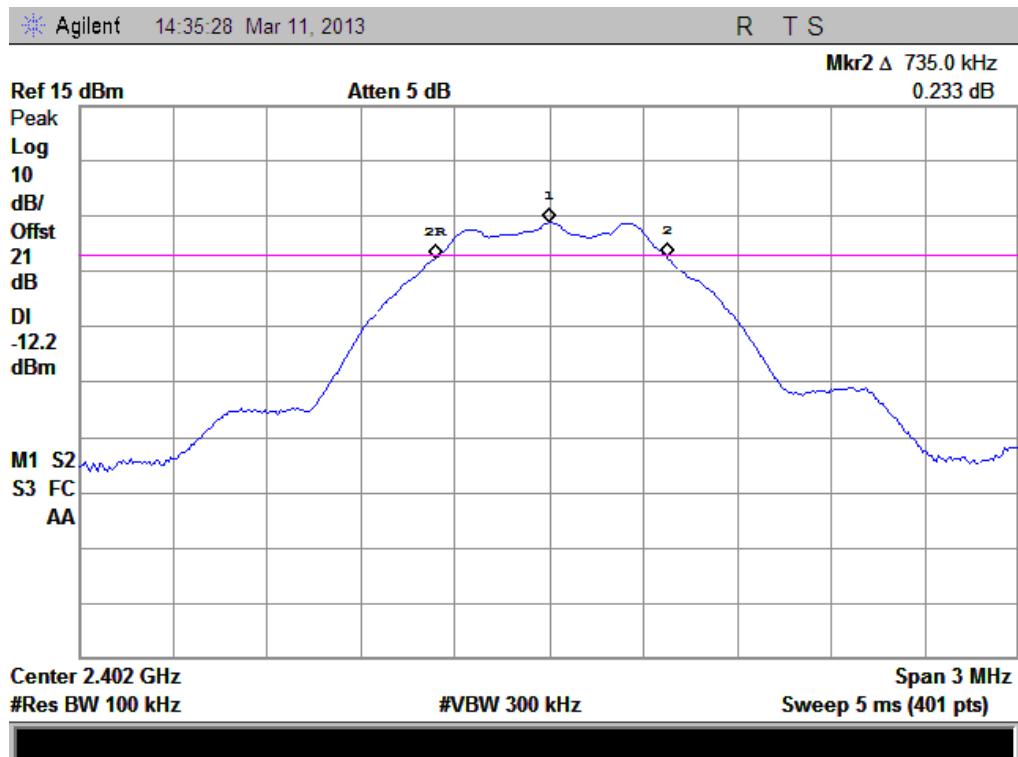

(Plot A: Channel 0: 2402MHz)

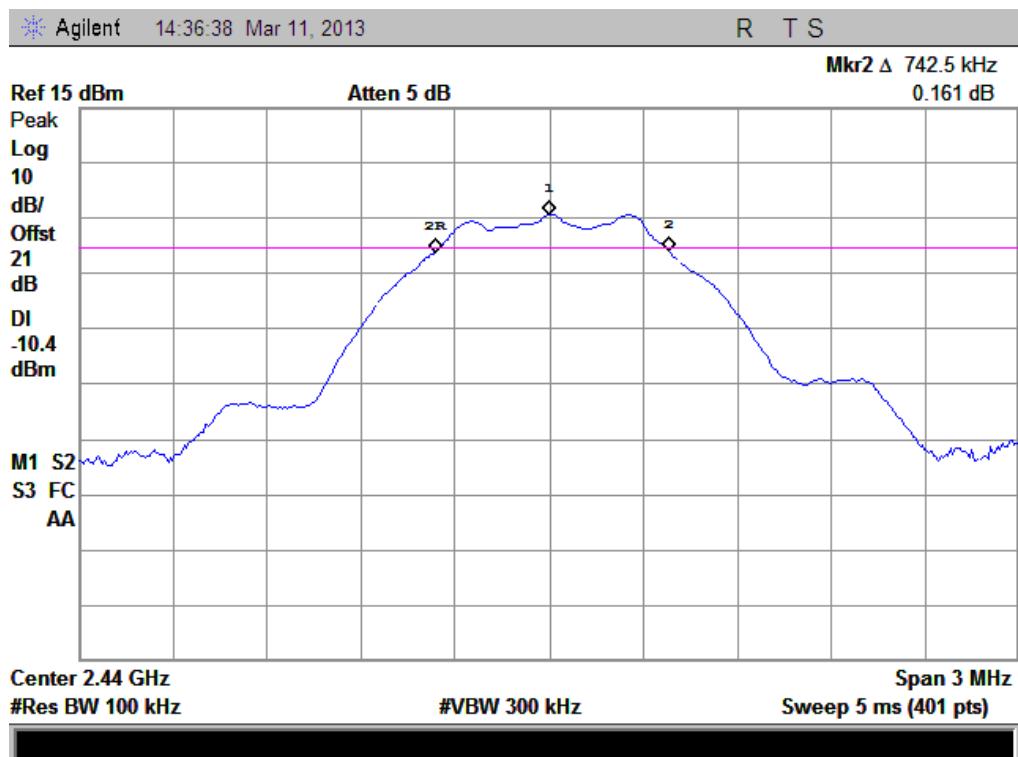

(Plot B: Channel 19: 2440 MHz)

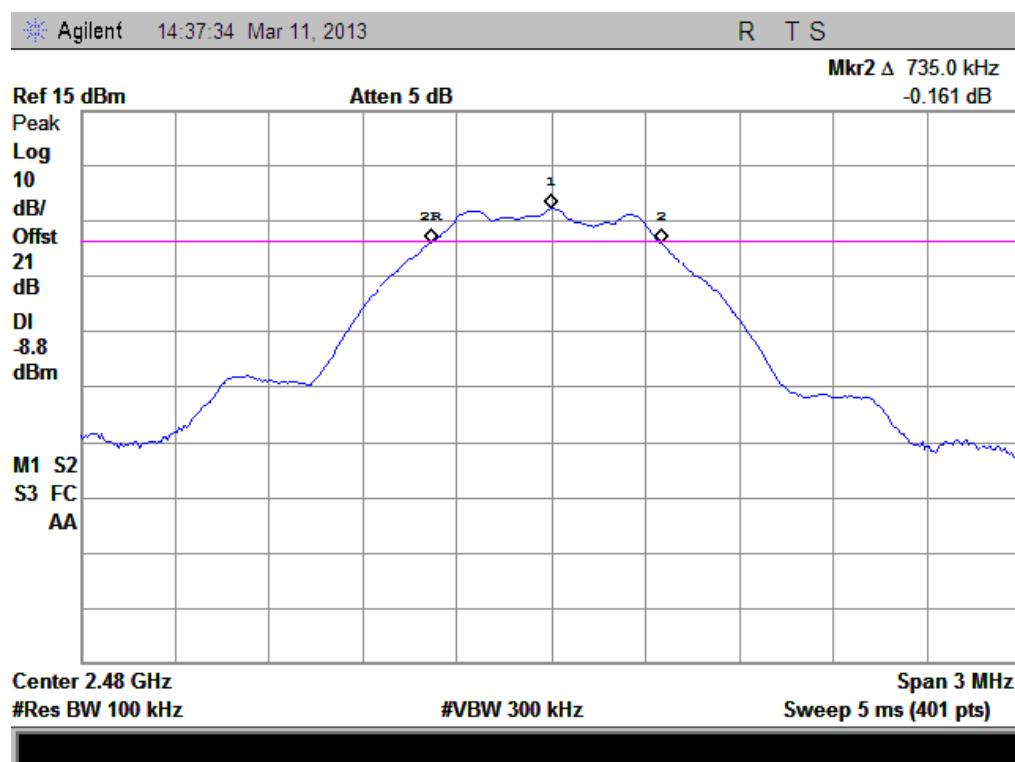

(Plot C: Channel 39: 2480MHz)

2.5. 99% Bandwidth

2.5.1. Requirement

None; for reporting purposes only.

2.5.2. Test Description

The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

A. Equipments List:



| Description | Manufacturer | Model | Serial No. | Cal. Date | Cal. Due |
|-------------------|--------------|--------|------------|-----------|----------|
| Spectrum analyzer | Agilent | E4407B | MY45101810 | 2012.05 | 2013.05 |


2.5.3. Test Result

A. Test Verdict:

| Channel | Frequency (MHz) | 99% Bandwidth (MHz) | Refer to Plot |
|---------|-----------------|---------------------|---------------|
| 0 | 2402 | 1.0529 | Plot A |
| 19 | 2440 | 1.0481 | Plot B |
| 39 | 2480 | 1.0479 | Plot C |

B. Test Plots:

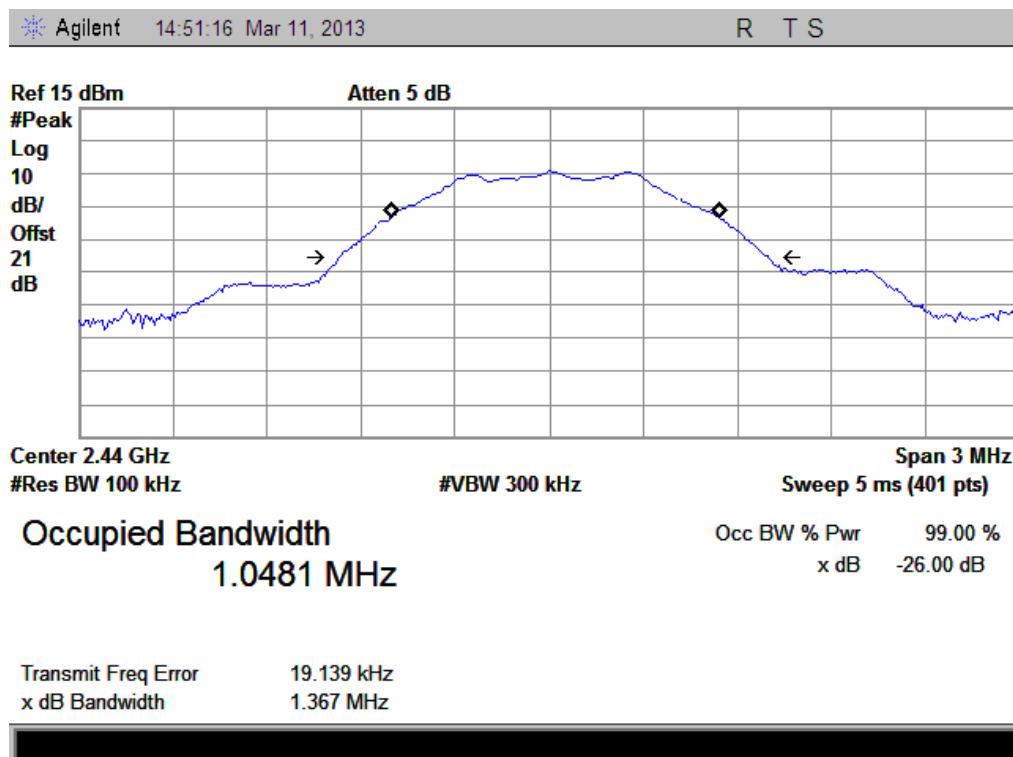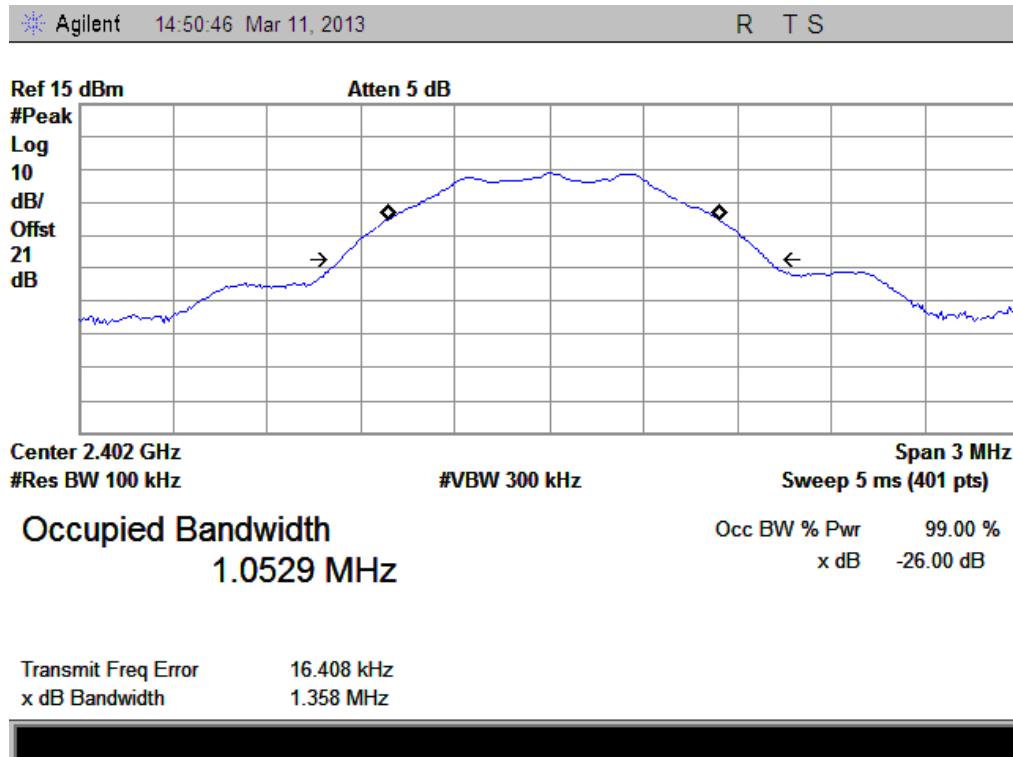

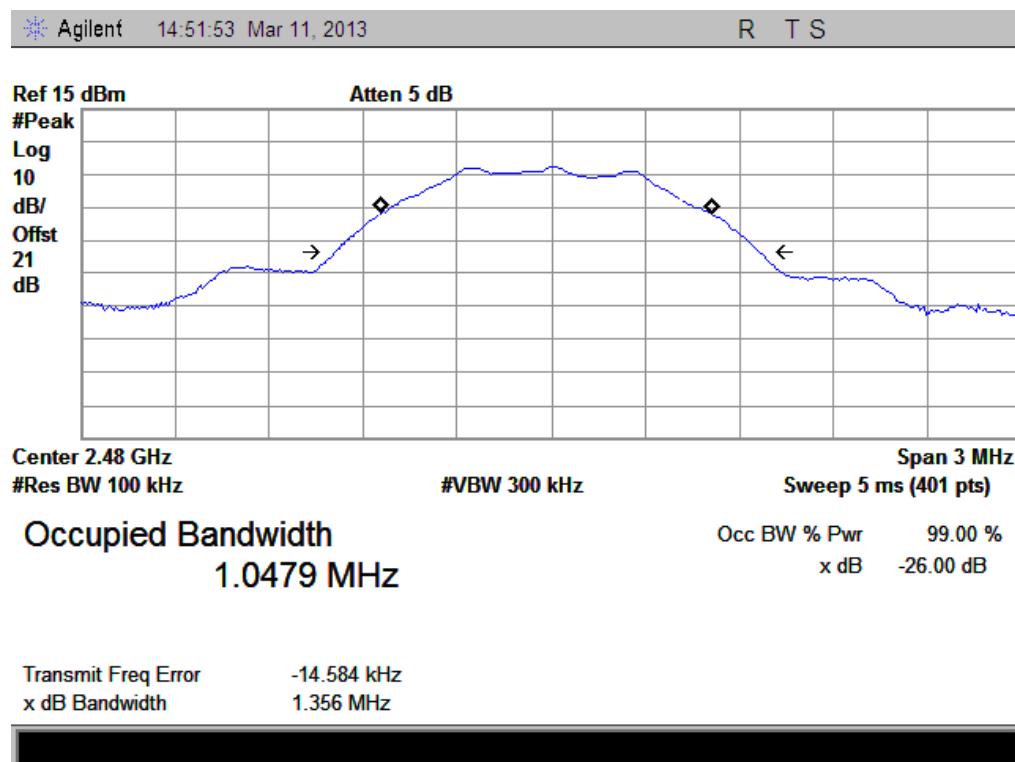


2.6. Conducted Spurious Emissions and Band Edge

2.6.1. Requirement

According to FCC section 15.247(d) and RSS-210 A8.5, in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.6.2. Test Description

A. Test Set:

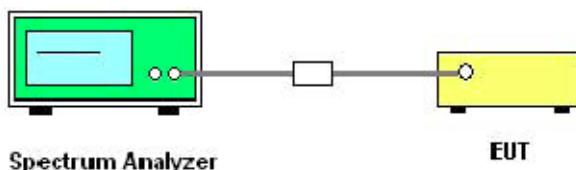

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

| Description | Manufacturer | Model | Serial No. | Cal. Date | Cal. Due |
|-------------------|--------------|--------|------------|-----------|----------|
| Spectrum analyzer | Agilent | E4407B | MY45101810 | 2013.05 | 2014.05 |

2.6.3. Test Result


The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

A. Test Verdict:


| Channel | Frequency (MHz) | Measured Max. Out of Band Emission (dBm) | Refer to Plot | Limit (dBm) | | Verdict |
|---------|-----------------|--|---------------|---------------|-------------------------|---------|
| | | | | Carrier Level | Calculated -20dBc Limit | |
| 0 | 2402 | -46.60 | Plot A.1/A.2 | -6.254 | -26.3 | PASS |
| 19 | 2440 | -45.90 | Plot B.1/B.2 | -5.497 | -25.5 | PASS |
| 39 | 2480 | -46.27 | Plot C.1/C.2 | -2.746 | -22.7 | PASS |

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

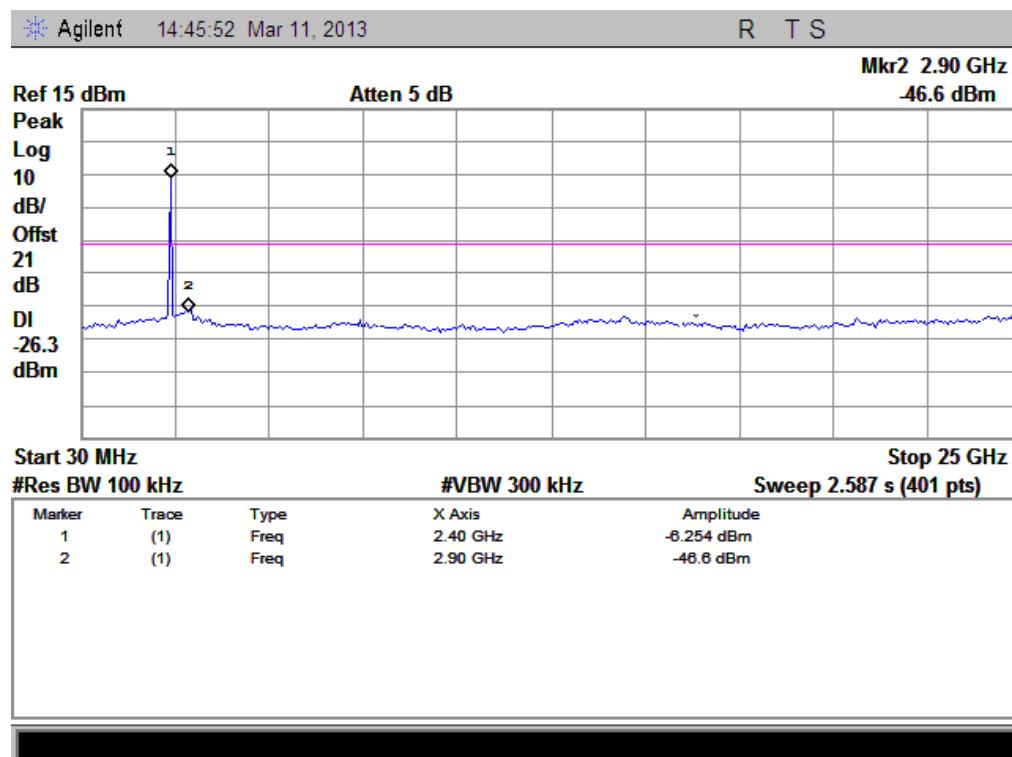


(Plot A.1: Channel = 0, 30MHz to 25GHz)

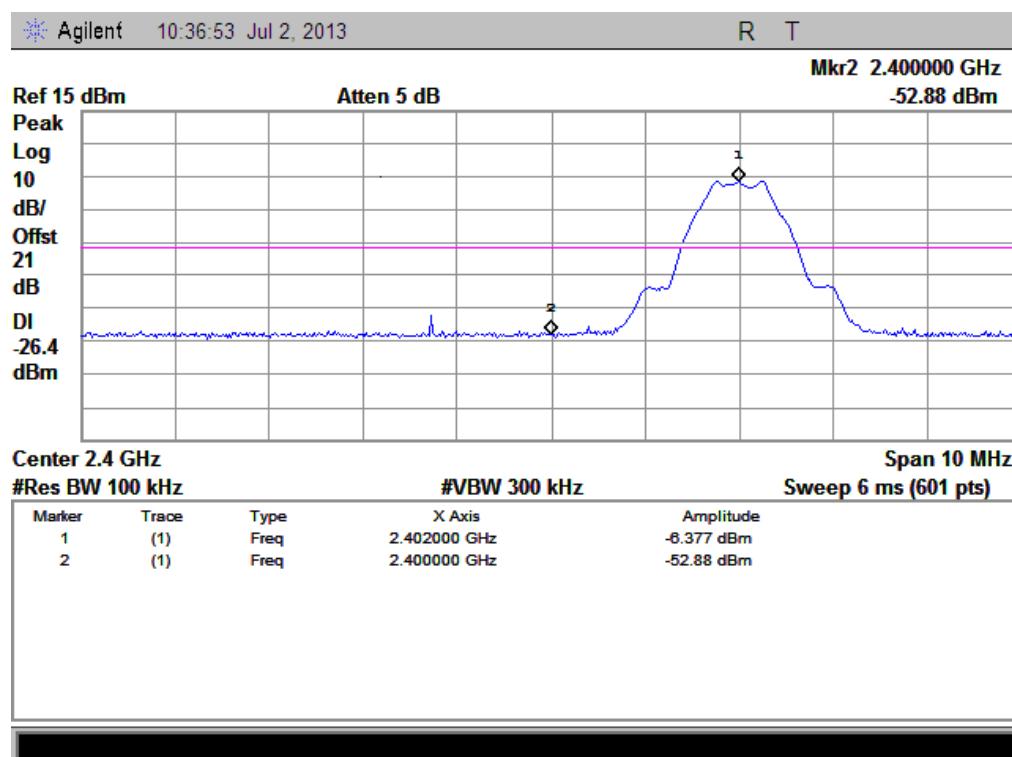


(Band edge @Channel = 0)

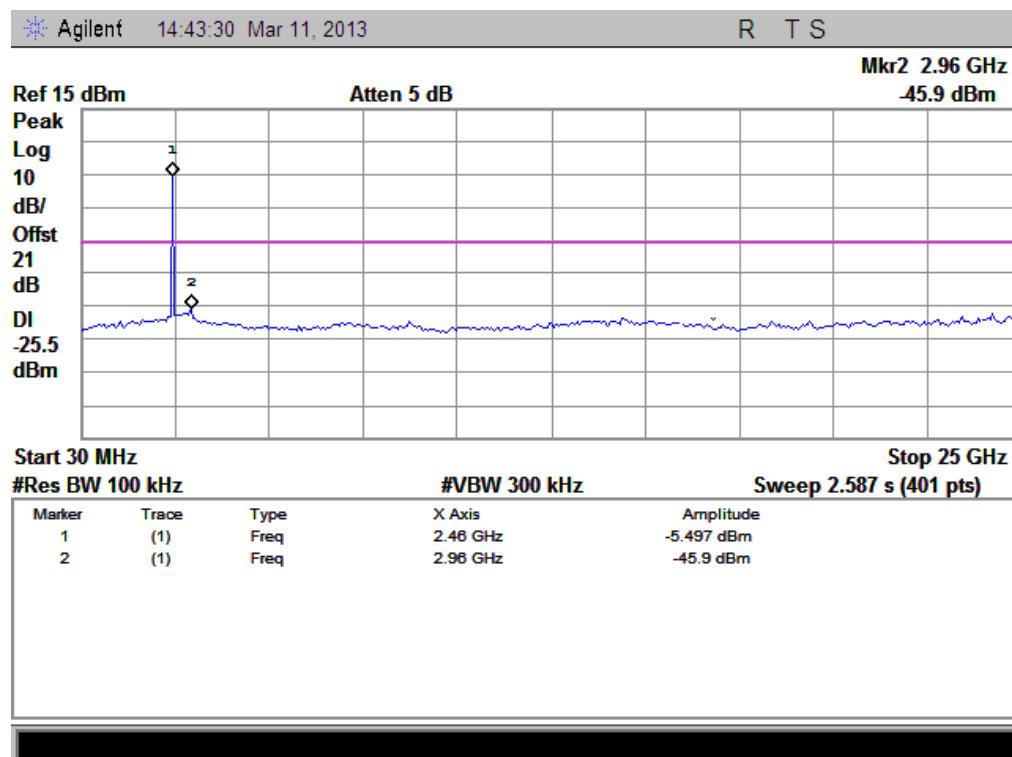

(Plot B.1: Channel = 19, 30MHz to 25GHz)

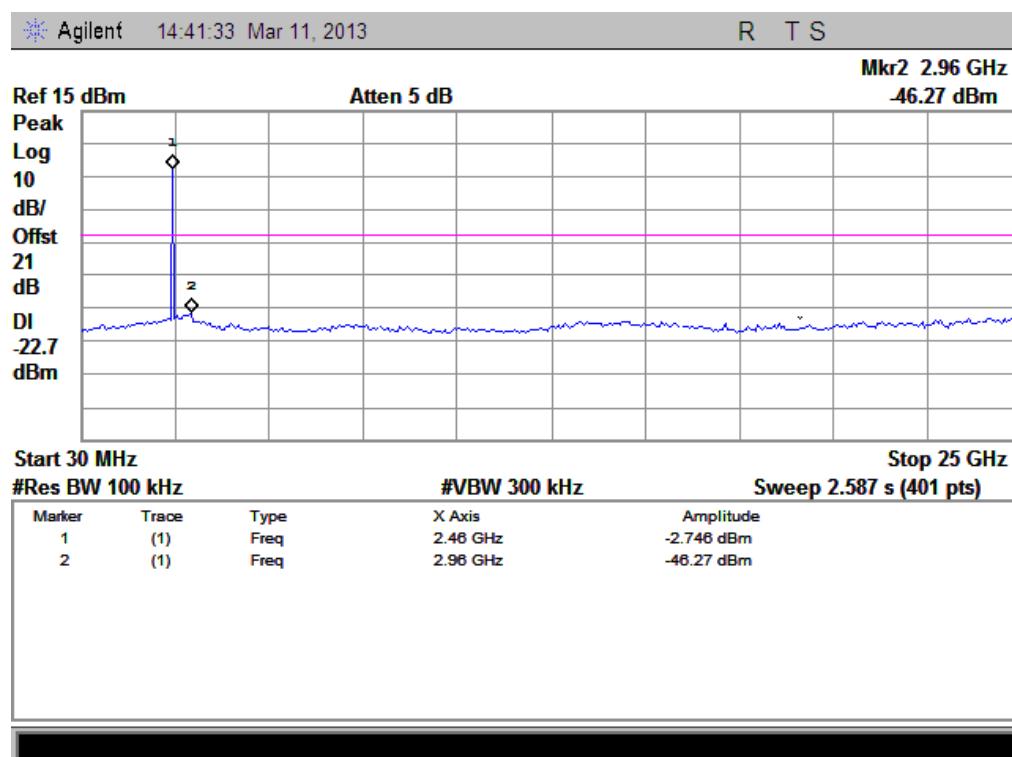

(Plot C.1: Channel = 39, 30MHz to 25GHz)

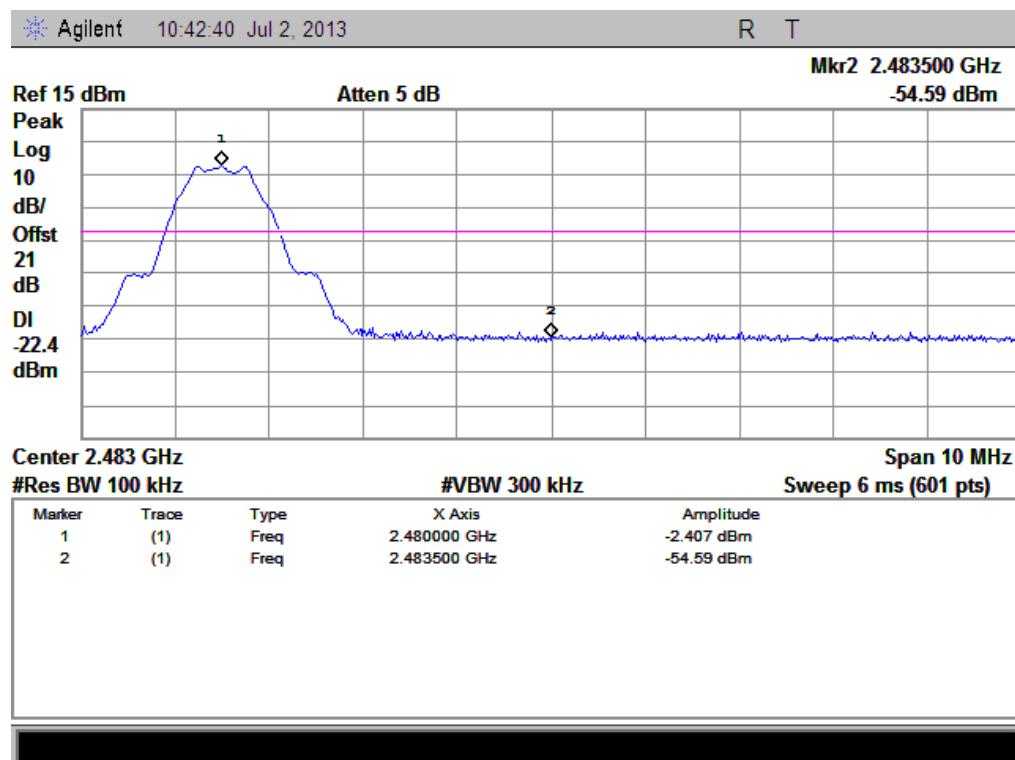

(Band edge @ Channel = 39)


2.7. Power spectral density (PSD)

2.7.1. Requirement

According to FCC section 15.247(e) and RSS-210 A8.5, the same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

2.7.2. Test Description

A. Test Set:

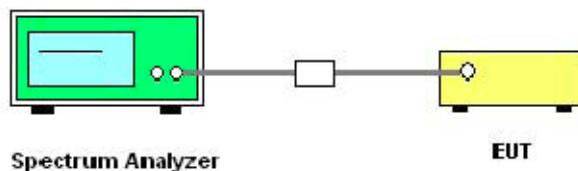

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

B. Equipments List:

| Description | Manufacturer | Model | Serial No. | Cal. Date | Cal. Due |
|-------------------|--------------|--------|------------|-----------|----------|
| Spectrum analyzer | Agilent | E4407B | MY45101810 | 2012.05 | 2013.05 |


2.7.3. Test Result

The lowest, middle and highest channels are tested.


A. Test Verdict:

| Spectral power density (dBm/3kHz) | | | | | |
|---|-----------------|-------------------------|---------------|------------------|---------|
| Channel | Frequency (MHz) | Measured PSD (dBm/3kHz) | Refer to Plot | Limit (dBm/3kHz) | Verdict |
| 0 | 2402 | -21.07 | Plot A | 8 | PASS |
| 19 | 2440 | -19.26 | Plot B | 8 | PASS |
| 39 | 2480 | -17.59 | Plot C | 8 | PASS |
| Measurement uncertainty: $\pm 1.3\text{dB}$ | | | | | |


B. Test Plots:

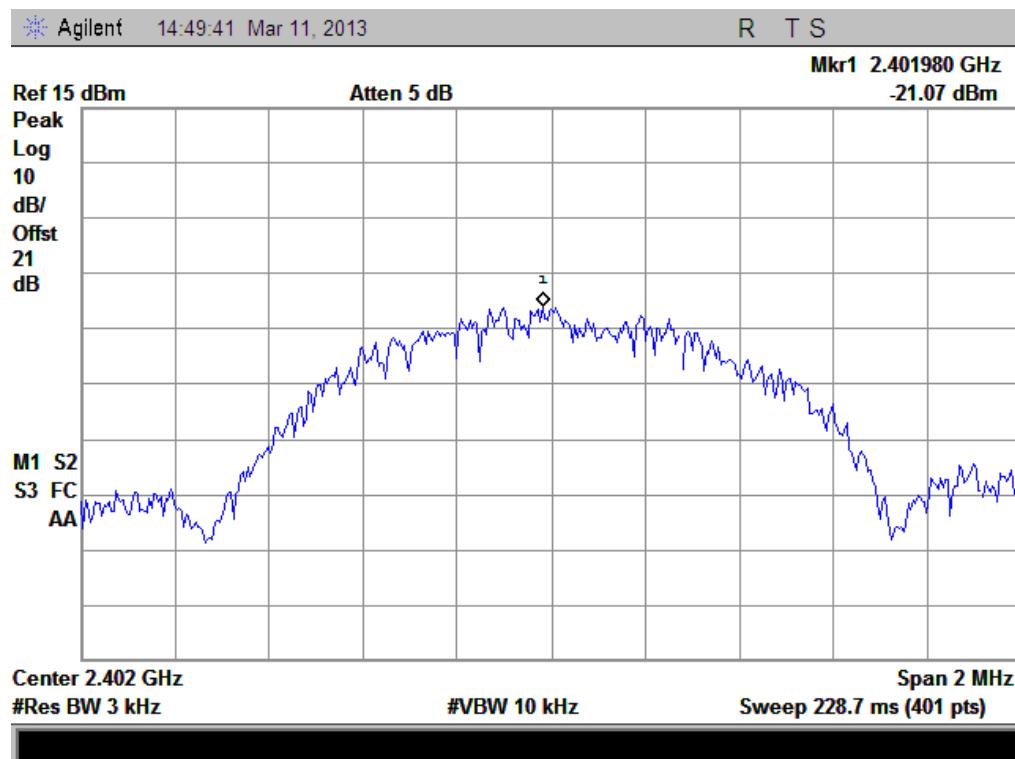

(Plot A: Channel = 0)

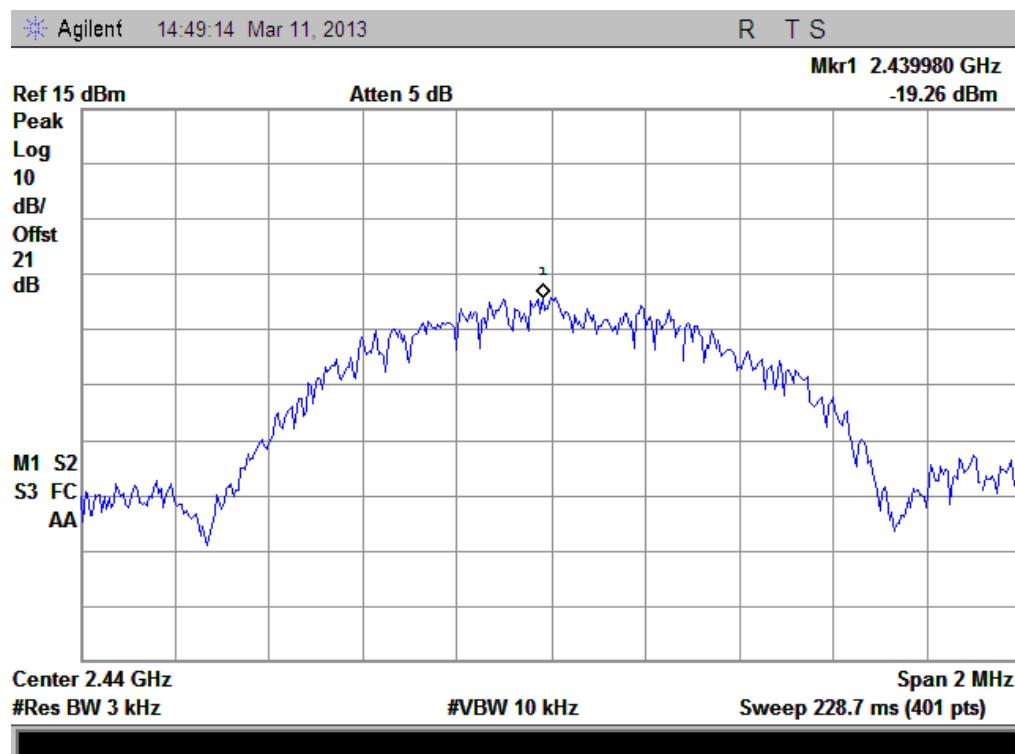

(Plot B: Channel = 19)

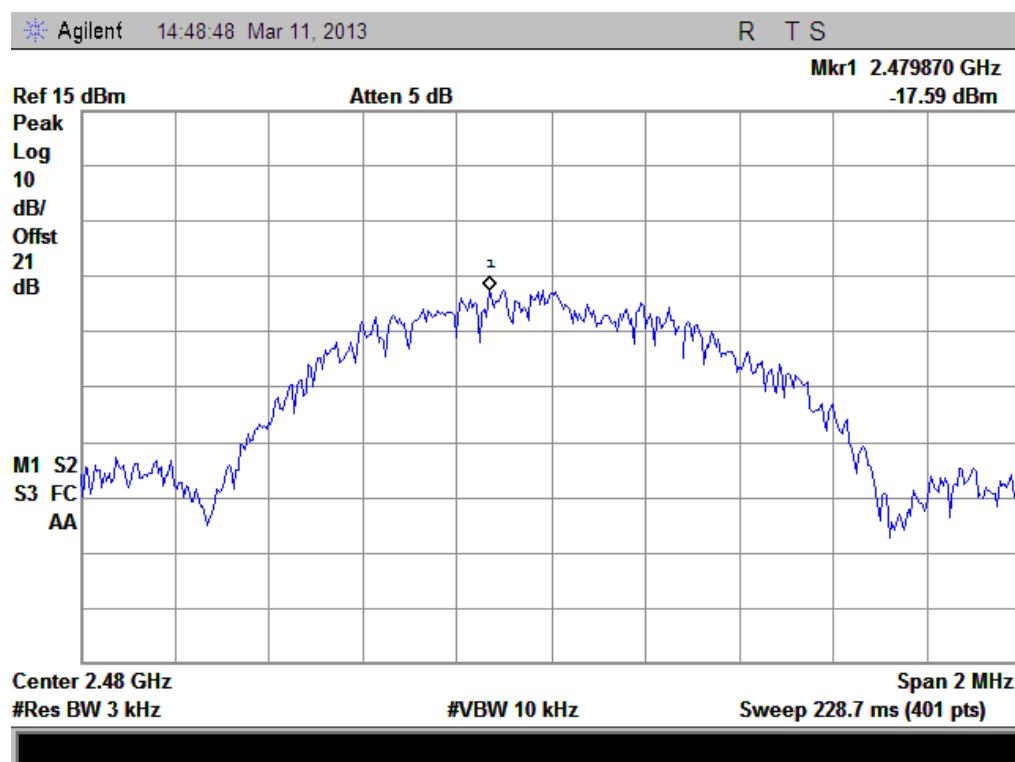

(Plot C: Channel = 39)


2.8. Restricted Frequency Bands

2.8.1. Requirement

According to FCC section 15.247(d) and RSS-210 A8.5, in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.8.2. Test Description

A. Test Setup

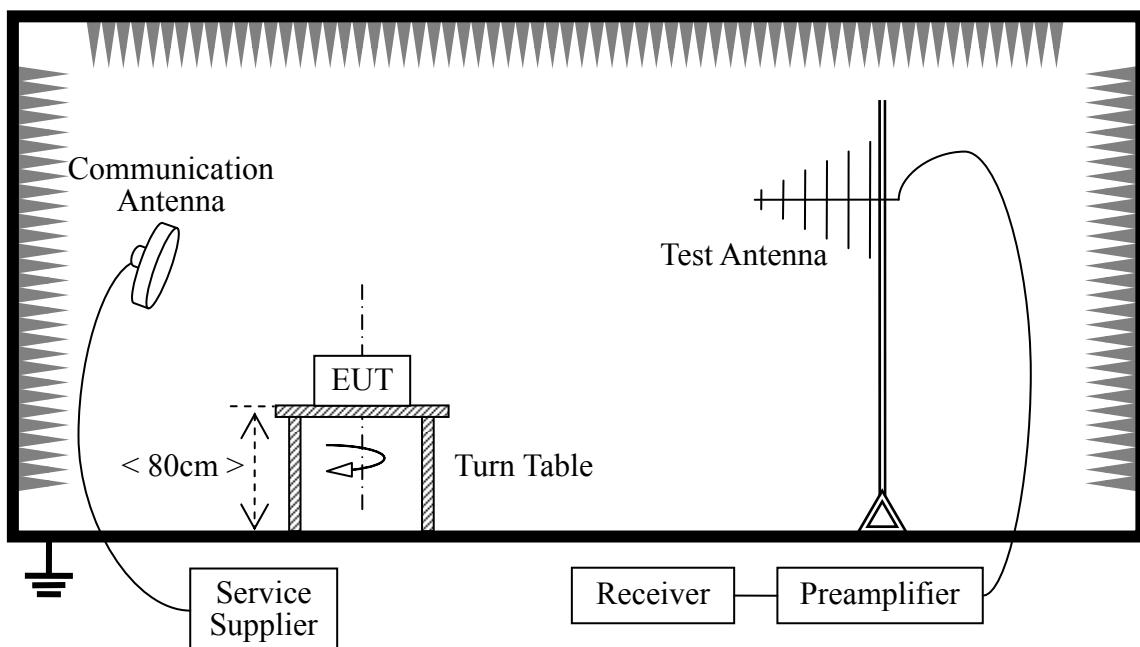

The Module of the EUT is powered by the Battery charged with the AC Adapter. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

B. Equipments List:

| Description | Manufacturer | Model | Serial No. | Cal. Date | Cal. Due |
|-----------------------|--------------|------------|------------|-----------|----------|
| Receiver | Agilent | E7405A | US44210471 | 2013.05 | 2014.05 |
| Full-Anechoic Chamber | Albatross | 9m*6m*6m | (n.a.) | 2013.05 | 2014.05 |
| Test Antenna | Schwarzbeck | BBHA 9120C | 9120C-384 | 2013.05 | 2014.05 |

2.8.3. Test Result

The lowest and highest channels are tested to verify the band edge emissions.

The measurement results are obtained as below:

$$E [\text{dB } \mu \text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain


A_{Factor} : Antenna Factor at 3m

The lowest and highest channels are tested to verify the band edge emissions.


A. Test Verdict:

| Channel | Frequency (MHz) | Detector | Receiver | AT (dB) | AFactor (dB@3m) | Max. Emission E (dB μ V/m) | Limit (dB μ V/m) | Verdict |
|---------|-----------------|----------|-----------------|---------|-----------------|--------------------------------|----------------------|---------|
| | | | UR (dB μ V) | | | | | |
| 0 | 2358.24 | PK | 40.30 | -30.93 | 32.56 | 41.93 | 74 | Pass |
| 0 | 2375.40 | AV | 36.59 | -30.93 | 32.56 | 38.22 | 54 | Pass |
| 39 | 2496.10 | PK | 39.25 | -29.05 | 32.50 | 42.70 | 74 | Pass |
| 39 | 2494.06 | AV | 37.85 | -29.05 | 32.50 | 41.30 | 54 | Pass |


B. Test Plots:

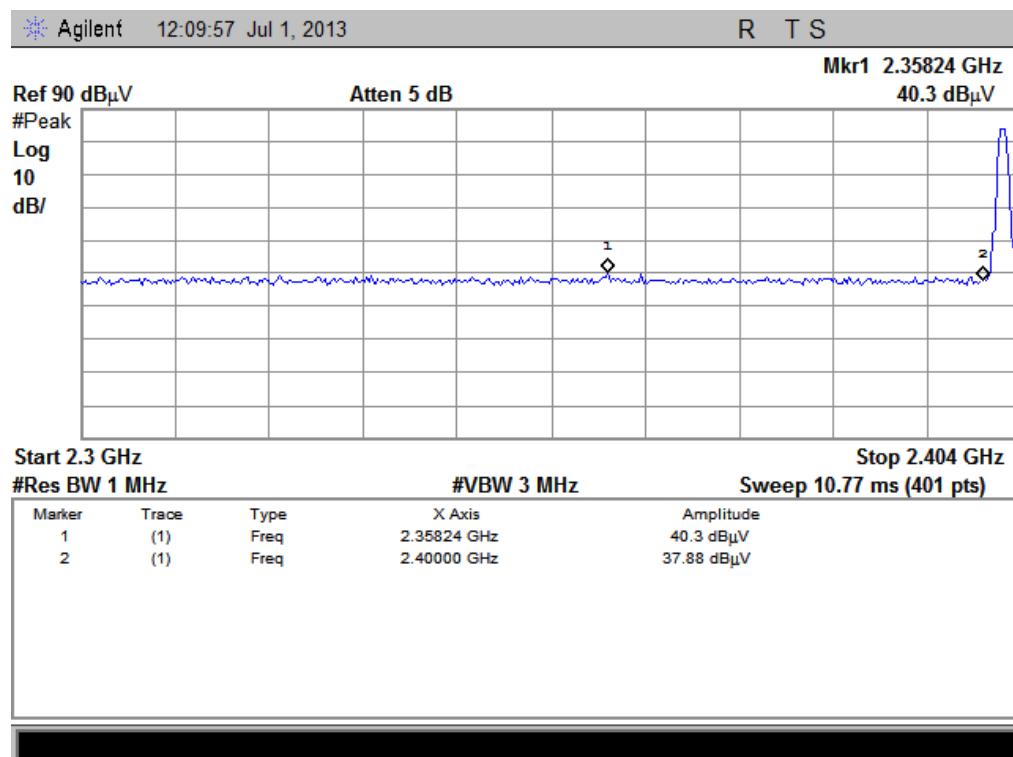


(Plot A1: Channel = 0 PEAK)

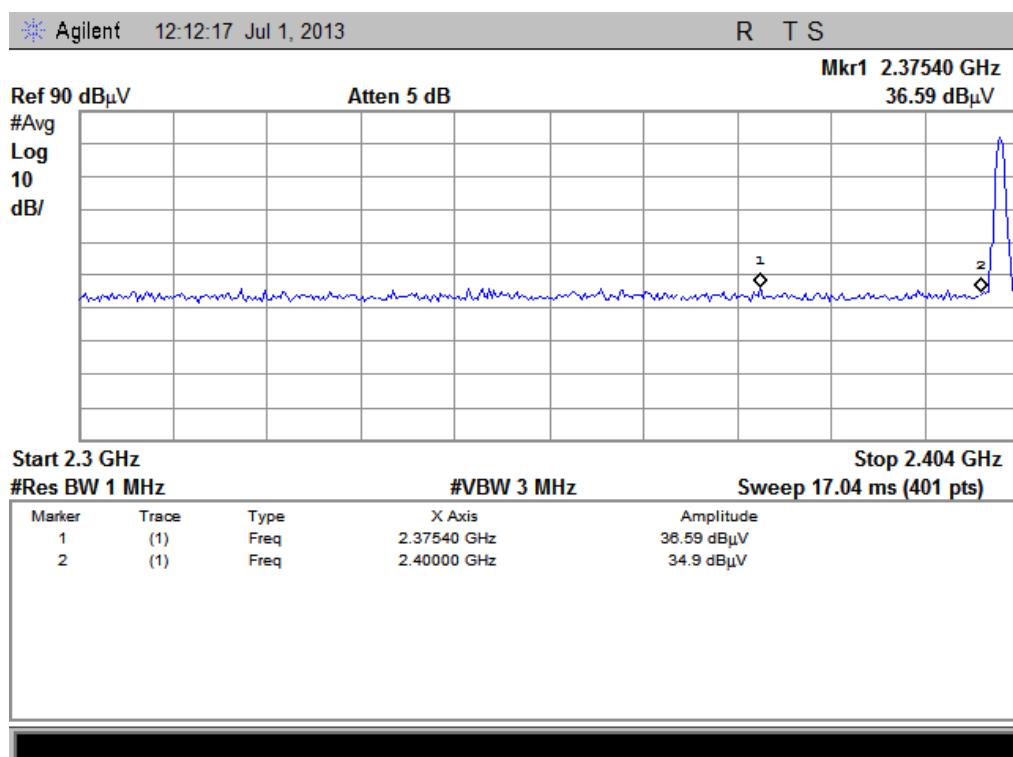

(Plot A2: Channel = 0 AVG)

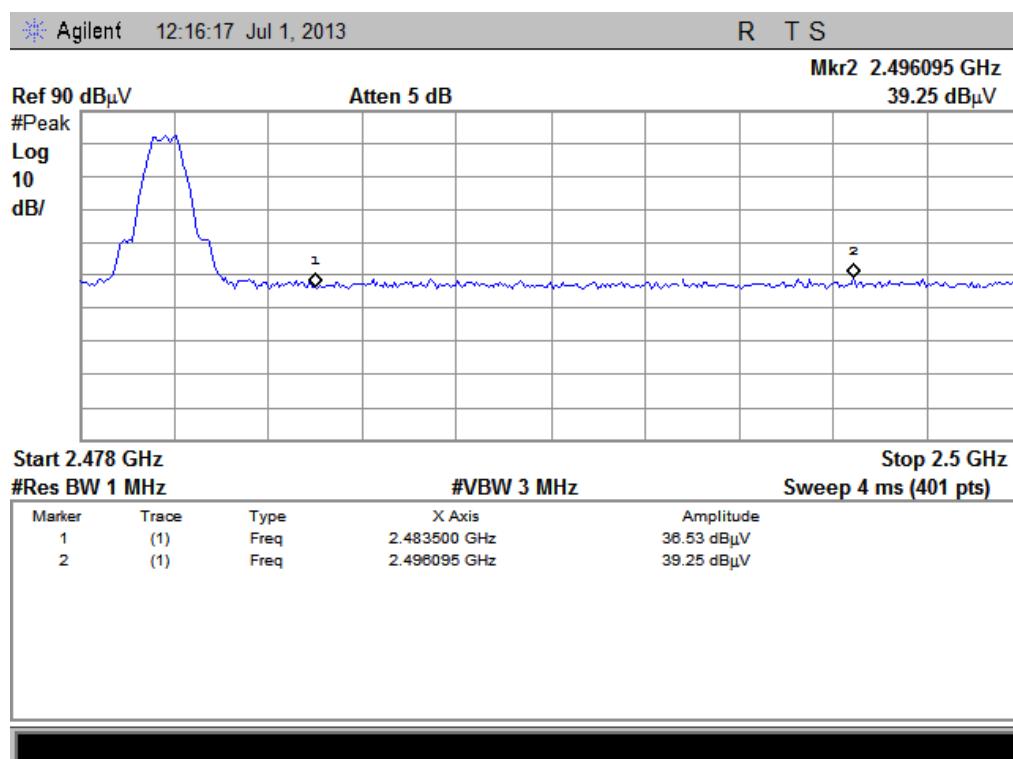

(Plot B1: Channel = 39 PEAK)

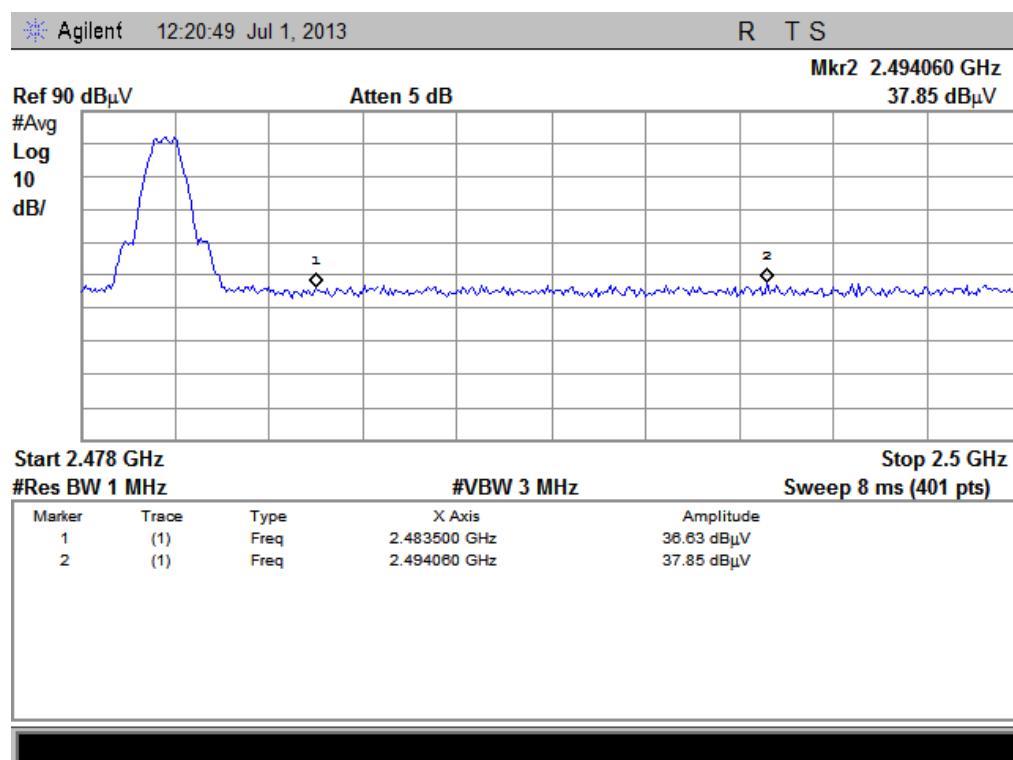

(Plot B2: Channel = 39 AVG)

2.9. Conducted Emission

2.9.1. Requirement

According to FCC section 15.207 and RSS-GEN 7.2.4, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


| Frequency range (MHz) | Conducted Limit (dB μ V) | |
|-----------------------|------------------------------|----------|
| | Quasi-peak | Average |
| 0.15 - 0.50 | 66 to 56 | 56 to 46 |
| 0.50 - 5 | 56 | 46 |
| 5 - 30 | 60 | 50 |

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.9.2. Test Description

A. Test Setup:

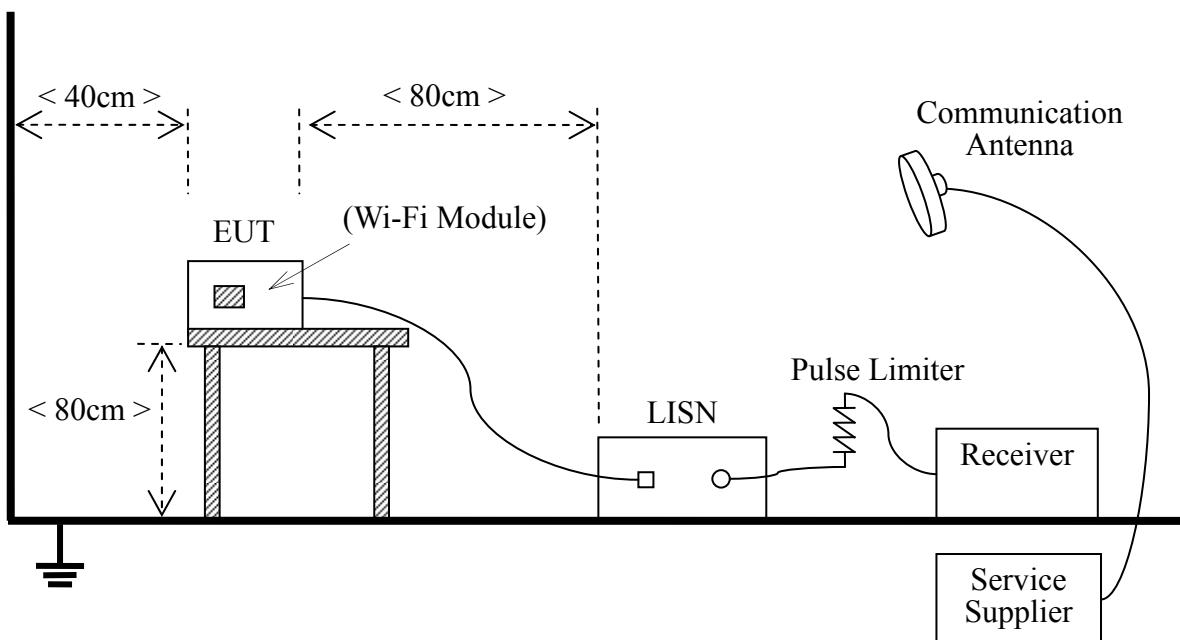

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2009

B. Equipments List:

| Description | Manufacturer | Model | Serial No. | Cal. Date | Cal. Due |
|-------------|--------------|-------|------------|-----------|----------|
| | | | | | |

| Description | Manufacturer | Model | Serial No. | Cal. Date | Cal. Due |
|----------------------|--------------|-------------|------------|-----------|----------|
| Receiver | Agilent | E7405A | US44210471 | 2012.05 | 2013.05 |
| LISN | Schwarzbeck | NSLK 8127 | 812744 | 2012.05 | 2013.05 |
| Service Supplier | R&S | CMU200 | 100448 | 2012.05 | 2013.05 |
| Pulse Limiter (20dB) | Schwarzbeck | VTSD 9561-D | 9391 | (n.a.) | (n.a.) |

2.9.3. Test Result

This Bluetooth module designed can not to be connected to the public utility (AC) power line, so conducted emission is unnecessary.

2.10. Radiated Emission

2.10.1. Requirement

According to FCC section 15.247(d) and RSS-210 A8.5, radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (μ V/m) | Measurement Distance (m) |
|-----------------|-----------------------------|--------------------------|
| 0.009 - 0.490 | 2400/F(kHz) | 300 |
| 0.490 - 1.705 | 24000/F(kHz) | 30 |
| 1.705 - 30.0 | 30 | 30 |
| 30 - 88 | 100 | 3 |
| 88 - 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.10.2. Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

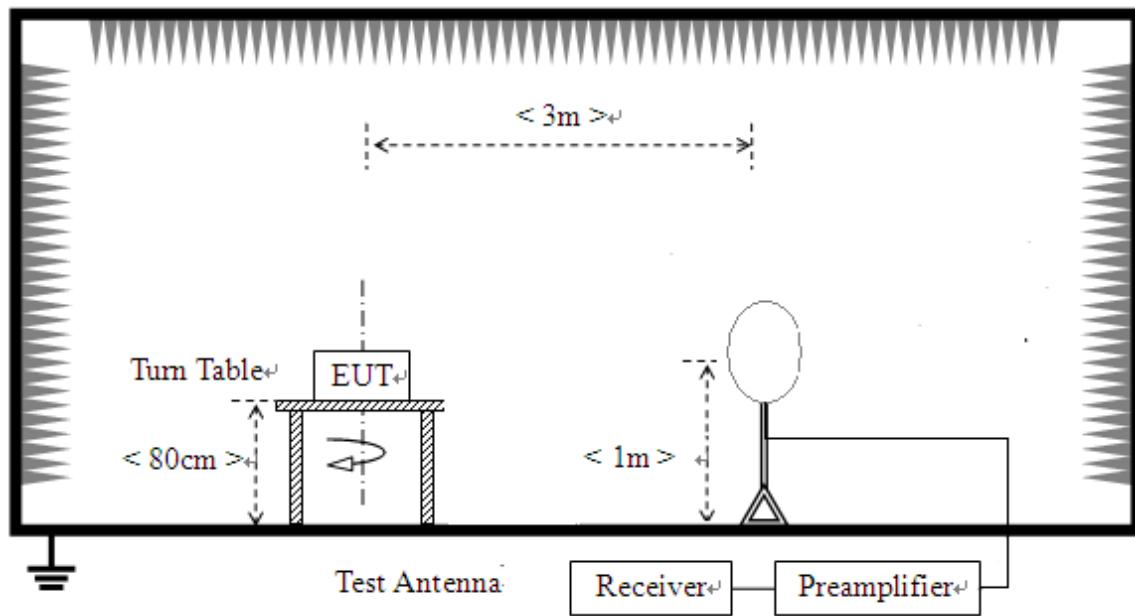

2) For radiated emissions from 30MHz to 1GHz

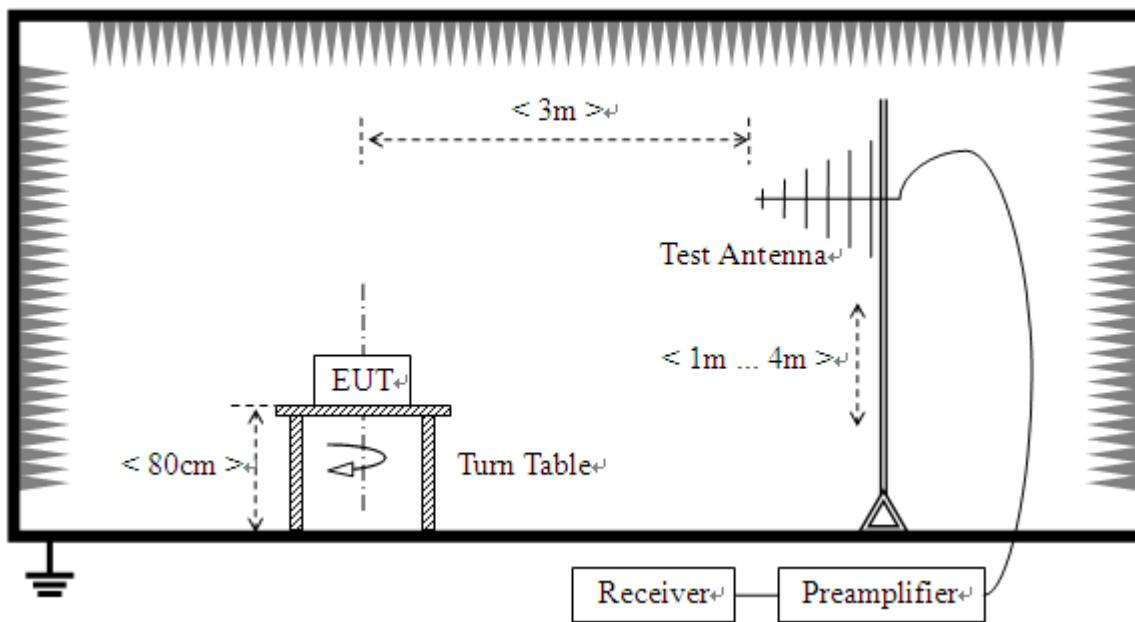

3) For radiated emissions above 1GHz

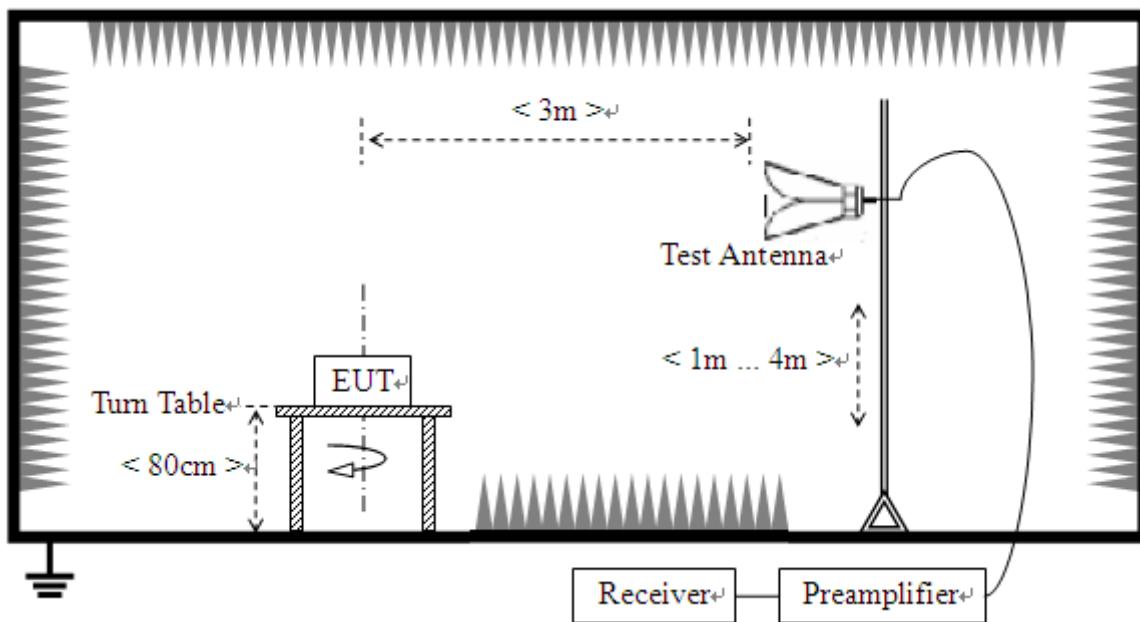

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2009). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4.

The EUT of the EUT is powered by the Battery charged with the AC Adapter which is powered by 120V, 60Hz AC mains supply. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the EUT is activated and controlled by the Wireless Router via a Common Antenna, and is set to operate under hopping-on test mode.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 2GHz) and Horn Test Antenna (above 2GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

| Description | Manufacturer | Model | Serial No. | Cal. Date | Cal. Due |
|-----------------------|--------------|-----------|------------|-----------|----------|
| System Simulator | R&S | CMU200 | 100448 | 2012.05 | 2013.05 |
| Receiver | Agilent | E7405A | US44210471 | 2012.05 | 2013.05 |
| Full-Anechoic Chamber | Albatross | 9m*6m*6m | (n.a.) | 2012.05 | 2014.05 |
| Test Antenna - Bi-Log | Schwarzbeck | VULB 9163 | 9163-274 | 2012.05 | 2013.05 |

| Description | Manufacturer | Model | Serial No. | Cal. Date | Cal. Due |
|---------------------|--------------|------------|------------|-----------|----------|
| Test Antenna - Horn | Schwarzbeck | BBHA 9120D | 9120C-963 | 2012.05 | 2013.05 |
| Test Antenna - Horn | R&S | HL050S7 | 71688 | 2012.05 | 2013.05 |
| Test Antenna -Loop | Schwarzbeck | FMZB 1519 | 1519-022 | 2012.05 | 2013.05 |

2.10.3. Test Result

According to ANSI C63.4 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E [\text{dB } \mu \text{ V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor AT and A_{Factor} were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

A. Test Verdict for Harmonics:


The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.


| Channel | Frequency (MHz) | Fundamental Emission (dB μ V/m) | | Antenna Polarization | Refer to Plot |
|---------|-----------------|-------------------------------------|-----|----------------------|---------------|
| | | PK | AV | | |
| 0 | 2402 | 82.56 | N/A | Horizontal | Plot A.2 |
| | | 82.46 | N/A | Vertical | Plot A.3 |
| 19 | 2440 | 82.26 | N/A | Horizontal | Plot B.2 |
| | | 82.29 | N/A | Vertical | Plot B.3 |
| 39 | 2480 | 82.33 | N/A | Horizontal | Plot C.2 |
| | | 82.47 | N/A | Vertical | Plot C.3 |

Also refer to following plots for the emissions falling in the restricted bands.

B. Test Plots for the Whole Measurement Frequency Range:

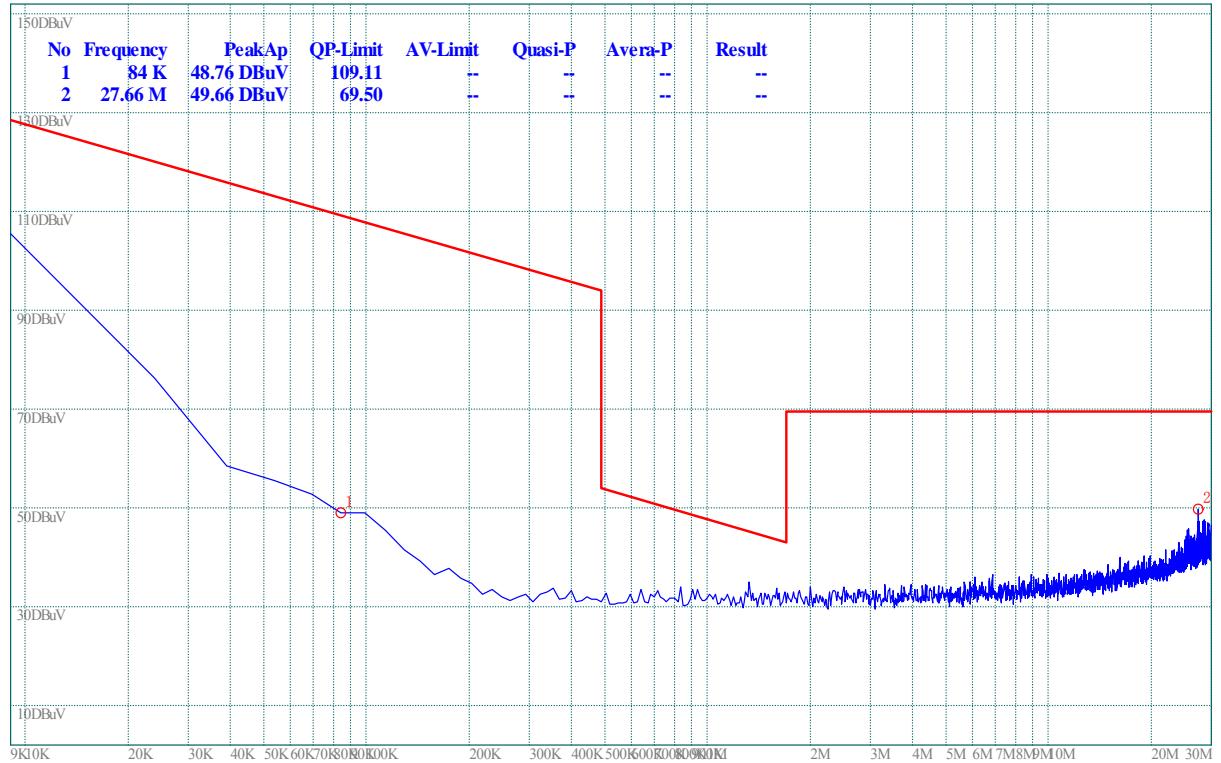
Plots for Channel = 0


(Plot A.1: 9kHz to 30MHz)

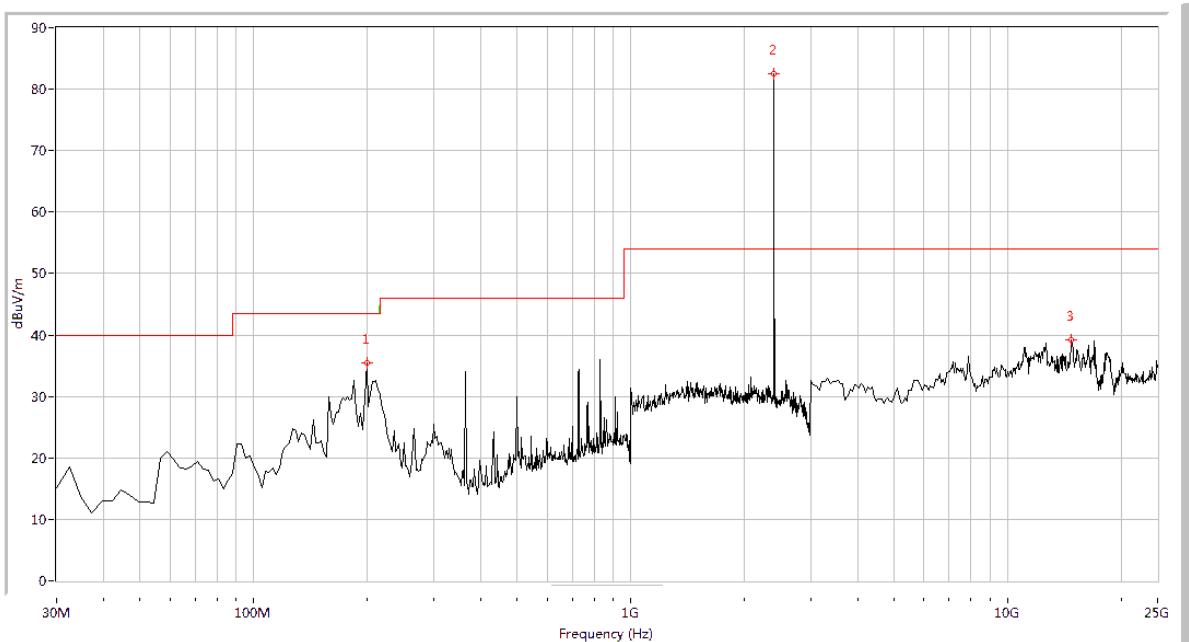

| Fre. (MHz) | Pk | QP | AV | Limit-PK | Limit-QP | Limit-AV | Antenna | Verdict |
|------------|-------|-----|-----|----------|----------|----------|------------|---------|
| 199.327 | 35.53 | N.A | N.A | N.A | 43.5 | N.A | Horizontal | PASS |
| 2402.000 | 82.56 | N.A | N.A | N.A | N.A | N.A | Horizontal | N.A |
| 14795.511 | 39.21 | N.A | N.A | 74.0 | N.A | 54.0 | Horizontal | PASS |


(Plot A.2: Antenna Horizontal, 30MHz to 25GHz)

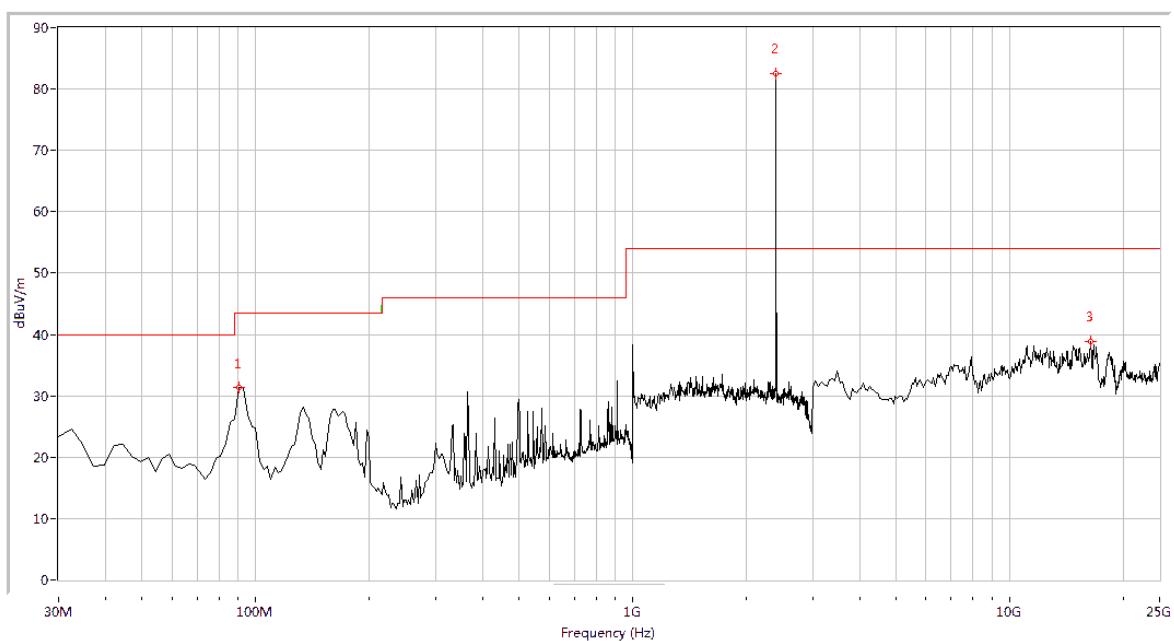


| Fre. (MHz) | Pk | QP | AV | Limit-PK | Limit-QP | Limit-AV | Antenna | Verdict |
|------------|-------|-----|-----|----------|----------|----------|----------|---------|
| 90.474 | 31.43 | N.A | N.A | N.A | 43.5 | N.A | Vertical | PASS |
| 2402.000 | 82.46 | N.A | N.A | N.A | N.A | N.A | Vertical | N.A |
| 16386.534 | 38.79 | N.A | N.A | 74.0 | N.A | 54.0 | Vertical | PASS |

(Plot A.3: Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 19

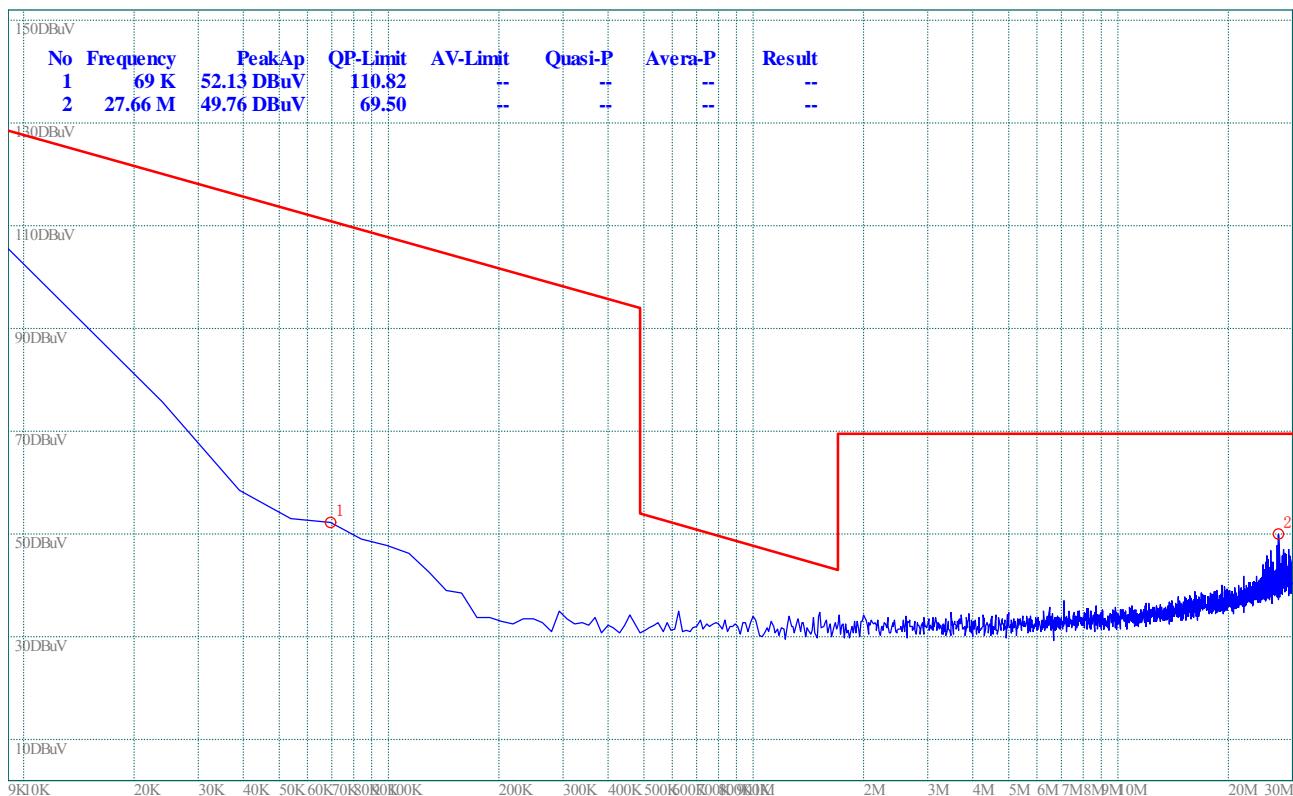


(Plot B.1: 9kHz to 30MHz)

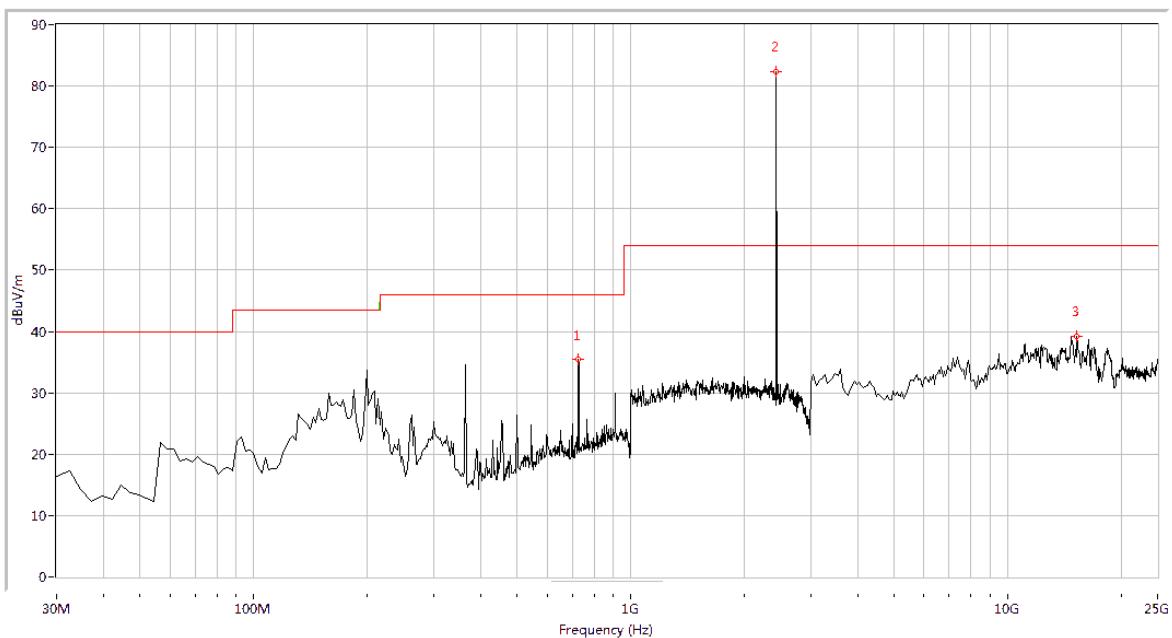

| Fre. (MHz) | Pk | QP | AV | Limit-PK | Limit-QP | Limit-AV | Antenna | Verdict |
|------------|-------|-----|-----|----------|----------|----------|------------|---------|
| 726.658 | 35.38 | N.A | N.A | N.A | 46.0 | N.A | Horizontal | PASS |
| 2440.000 | 82.26 | N.A | N.A | N.A | N.A | N.A | Horizontal | N.A |
| 15289.277 | 39.19 | N.A | N.A | 74.0 | N.A | 54.0 | Horizontal | PASS |


(Plot B.2: Antenna Horizontal, 30MHz to 25GHz)

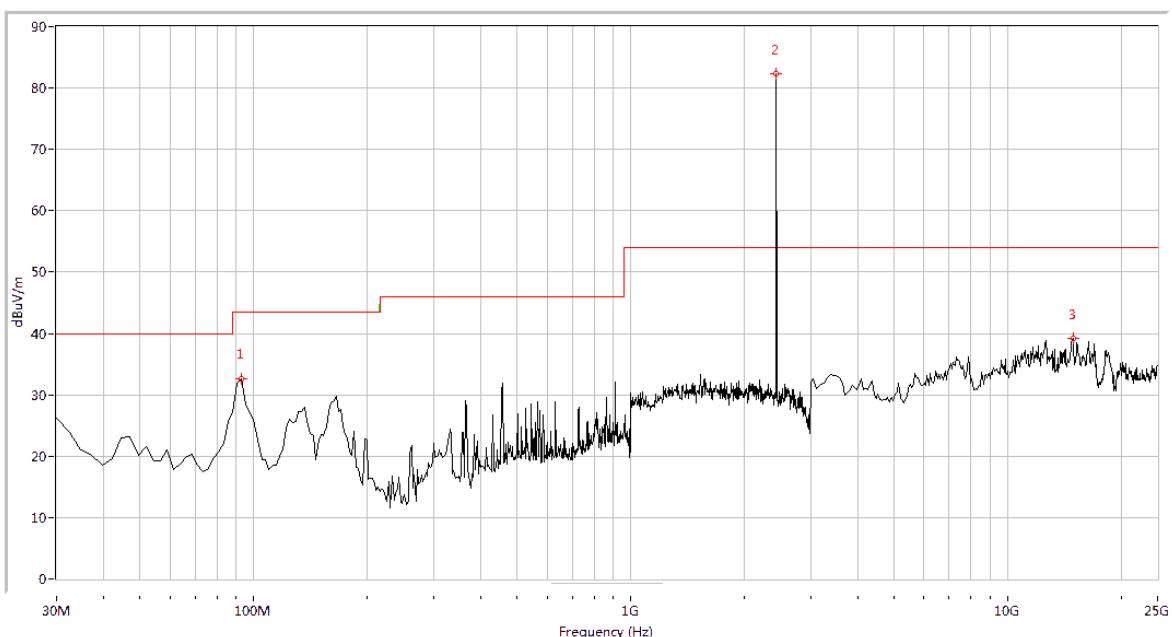


| Fre. (MHz) | Pk | QP | AV | Limit-PK | Limit-QP | Limit-AV | Antenna | Verdict |
|------------|-------|-----|-----|----------|----------|----------|----------|---------|
| 92.893 | 32.60 | N.A | N.A | N.A | 43.5 | N.A | Vertical | PASS |
| 2440.000 | 82.29 | N.A | N.A | N.A | N.A | N.A | Vertical | N.A |
| 14905.237 | 39.23 | N.A | N.A | 74.0 | N.A | 54.0 | Vertical | PASS |

(Plot B.3: Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 39

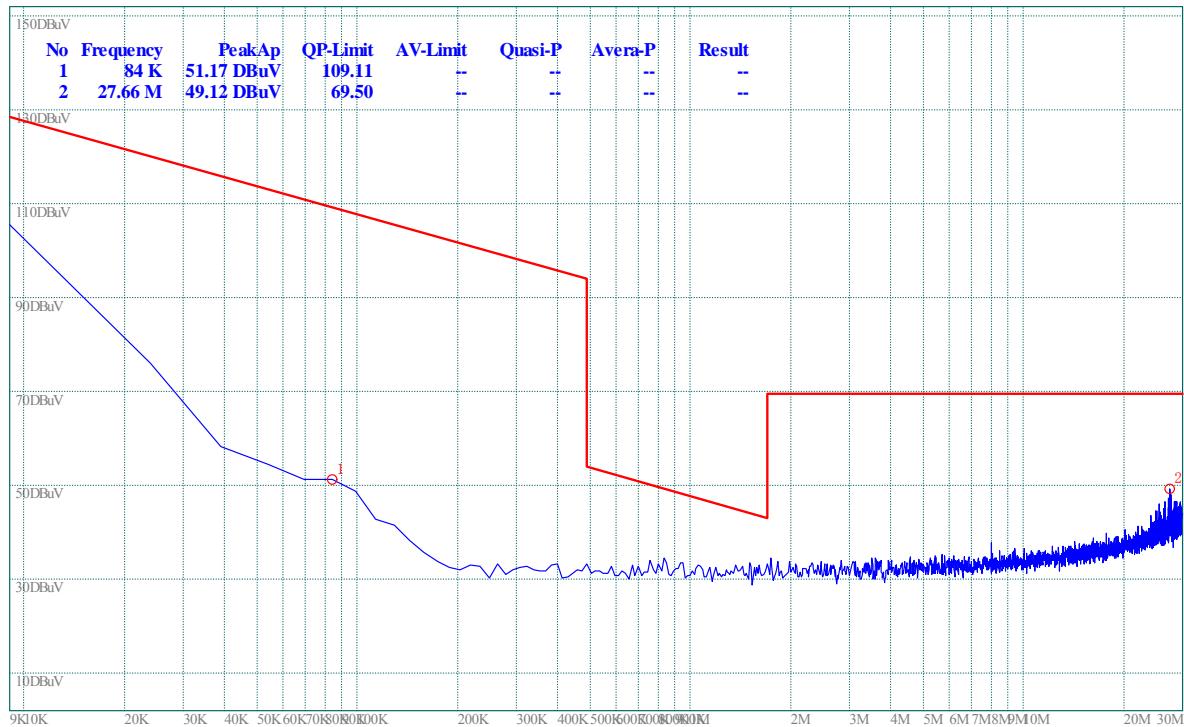


(Plot C.1: 9kHz to 30MHz)

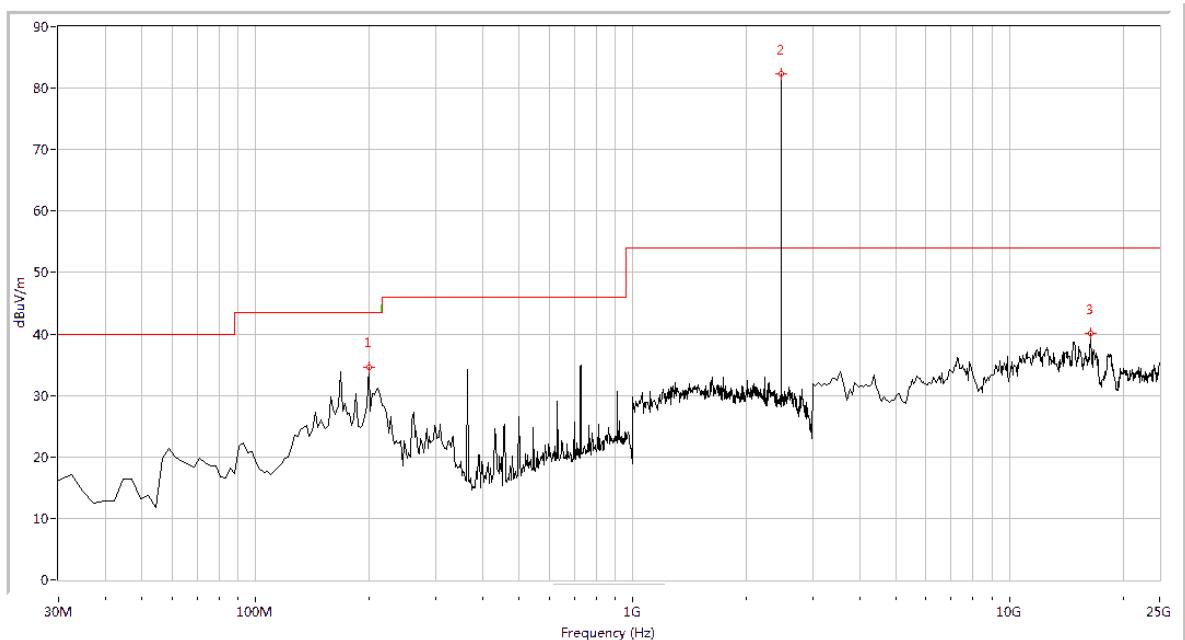

| Fre. (MHz) | Pk | QP | AV | Limit-PK | Limit-QP | Limit-AV | Antenna | Verdict |
|------------|-------|-----|-----|----------|----------|----------|------------|---------|
| 199.327 | 34.60 | N.A | N.A | N.A | 43.5 | N.A | Horizontal | PASS |
| 2480.000 | 82.33 | N.A | N.A | N.A | N.A | N.A | Horizontal | N.A |
| 16386.534 | 40.03 | N.A | N.A | 74.0 | N.A | 54.0 | Horizontal | PASS |

(Plot C.2: Antenna Horizontal, 30MHz to 25GHz)

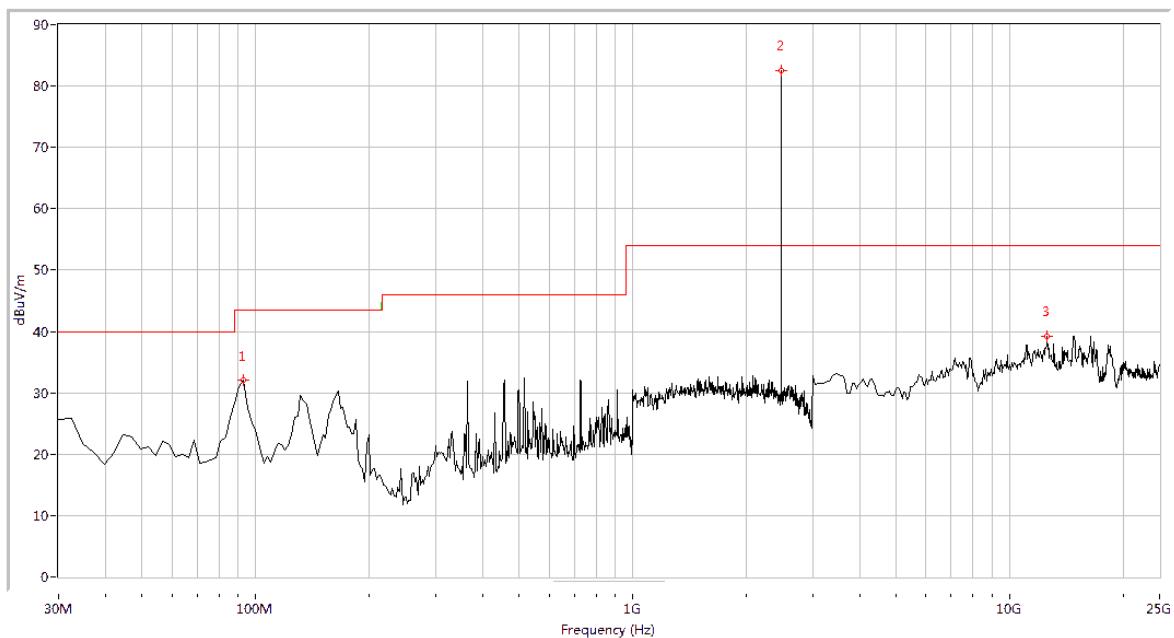

| Fre. (MHz) | Pk | QP | AV | Limit-PK | Limit-QP | Limit-AV | Antenna | Verdict |
|------------|-------|-----|-----|----------|----------|----------|----------|---------|
| 92.893 | 32.11 | N.A | N.A | N.A | 43.5 | N.A | Vertical | PASS |
| 2480.000 | 82.47 | N.A | N.A | N.A | N.A | N.A | Vertical | N.A |
| 12600.998 | 39.22 | N.A | N.A | 74.0 | N.A | 54.0 | Vertical | PASS |

(Plot C.3: Antenna Vertical, 30MHz to 25GHz)

2.11. RF exposure evaluation

According to § 1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy lever in excess of Commission's guideline.

According to 447498 D01 General RF Exposure Guidance v05, exclusion threshold values at selected frequencies and distances table as following.

| MHz | 5 | 10 | 15 | 20 | 25 | mm |
|------|-----|-----|-----|-----|-----|---|
| 150 | 39 | 77 | 116 | 155 | 194 | SAR Test Exclusion Threshold (mW) |
| 300 | 27 | 55 | 82 | 110 | 137 | |
| 450 | 22 | 45 | 67 | 89 | 112 | |
| 835 | 16 | 33 | 49 | 66 | 82 | |
| 900 | 16 | 32 | 47 | 63 | 79 | |
| 1500 | 12 | 24 | 37 | 49 | 61 | |
| 1900 | 11 | 22 | 33 | 44 | 54 | |
| 2450 | 10 | 19 | 29 | 38 | 48 | |
| 3600 | 8 | 16 | 24 | 32 | 40 | |
| 5200 | 7 | 13 | 20 | 26 | 33 | |
| 5400 | 6 | 13 | 19 | 26 | 32 | |
| 5800 | 6 | 12 | 19 | 25 | 31 | |
| MHz | 30 | 35 | 40 | 45 | 50 | mm |
| 150 | 232 | 271 | 310 | 349 | 387 | SAR Test Exclusion Threshold (mW) |
| 300 | 164 | 192 | 219 | 246 | 274 | |
| 450 | 134 | 157 | 179 | 201 | 224 | |
| 835 | 98 | 115 | 131 | 148 | 164 | |
| 900 | 95 | 111 | 126 | 142 | 158 | |
| 1500 | 73 | 86 | 98 | 110 | 122 | |
| 1900 | 65 | 76 | 87 | 98 | 109 | |
| 2450 | 57 | 67 | 77 | 86 | 96 | |
| 3600 | 47 | 55 | 63 | 71 | 79 | |
| 5200 | 39 | 46 | 53 | 59 | 66 | |
| 5400 | 39 | 45 | 52 | 58 | 65 | |
| 5800 | 37 | 44 | 50 | 56 | 62 | |

Routine SAR evaluation refers to the specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evolution is not required, the portable transmitters with output power greater than the applicable low threshold SAR evolution to qualify for TCB approval.

Result:

This is portable device and the Max conducted peak output power is -2.153dBm, the maximum gain of antenna is 1.0dBi, the maximum output power is -0.153dBm (0.965mW). which is lower than the exclusion threshold 10mW, at frequency 2450MHz, and distance is 5mm.

The SAR measurement is not required.

** END OF REPORT **