



Reference for limit

Middle Channel & Modulation : GFSK

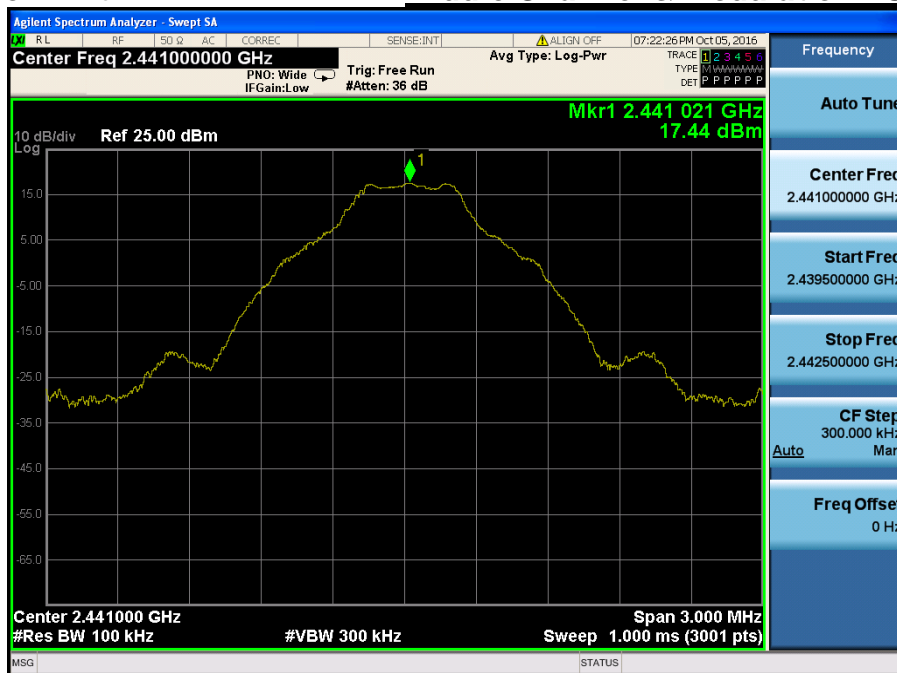


Conducted Spurious Emissions

Middle Channel & Modulation : GFSK

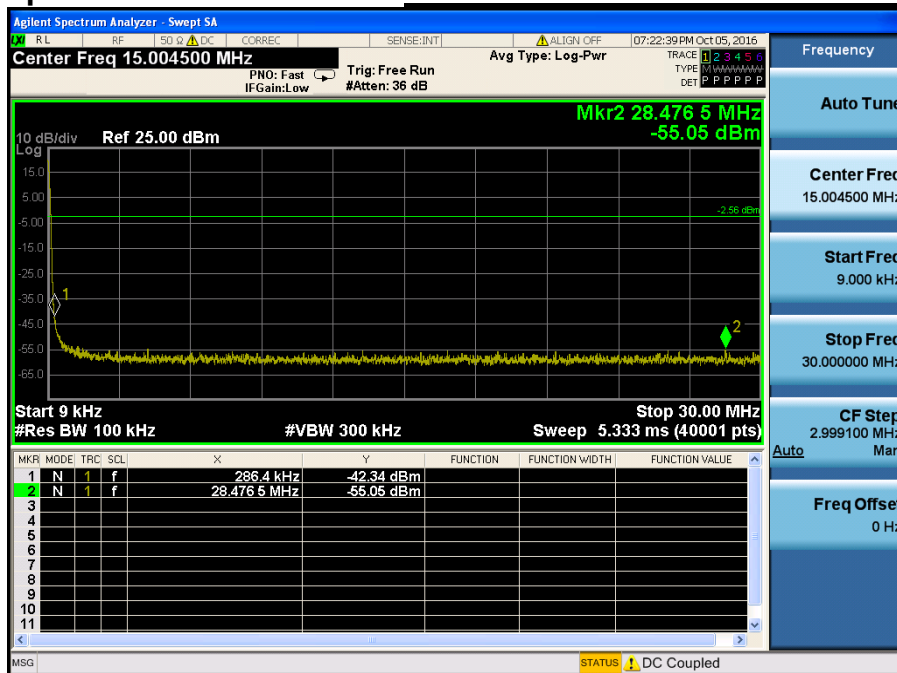


High Band-edge

Highest Channel & Modulation : GFSK


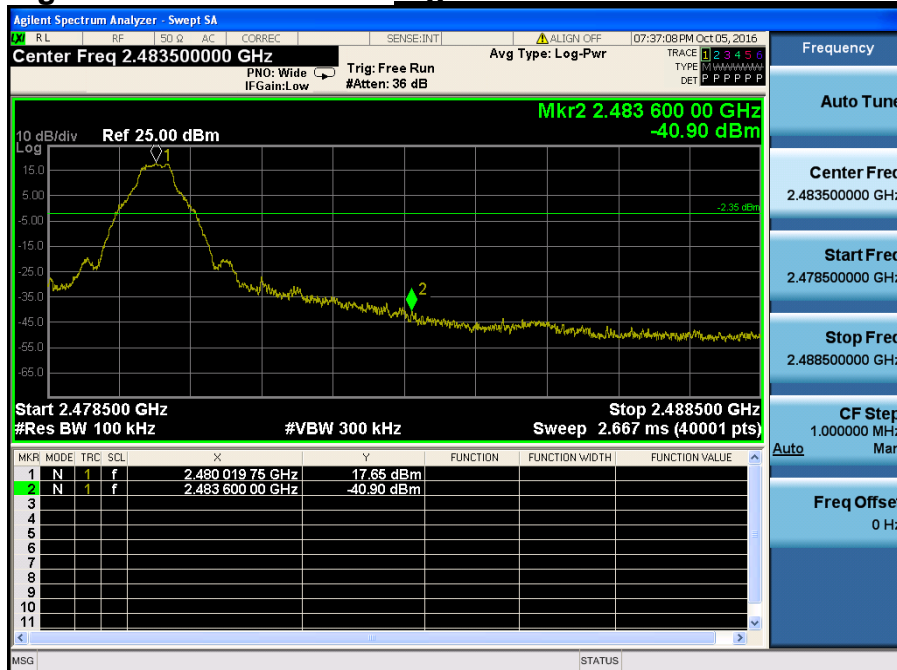


High Band-edge


Hopping mode & Modulation : GFSK

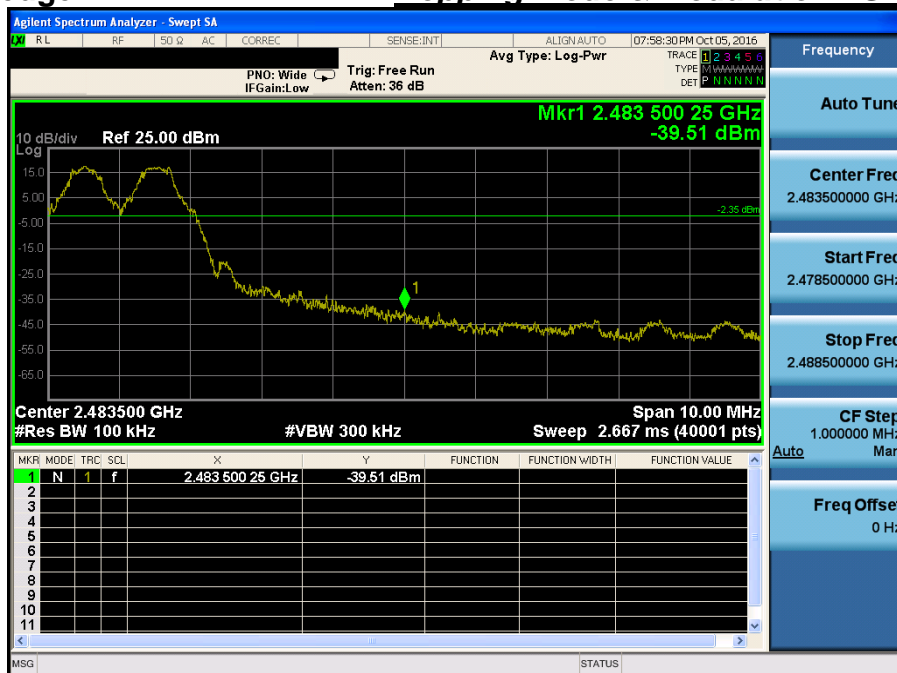

Conducted Spurious Emissions *Highest Channel & Modulation : GFSK*

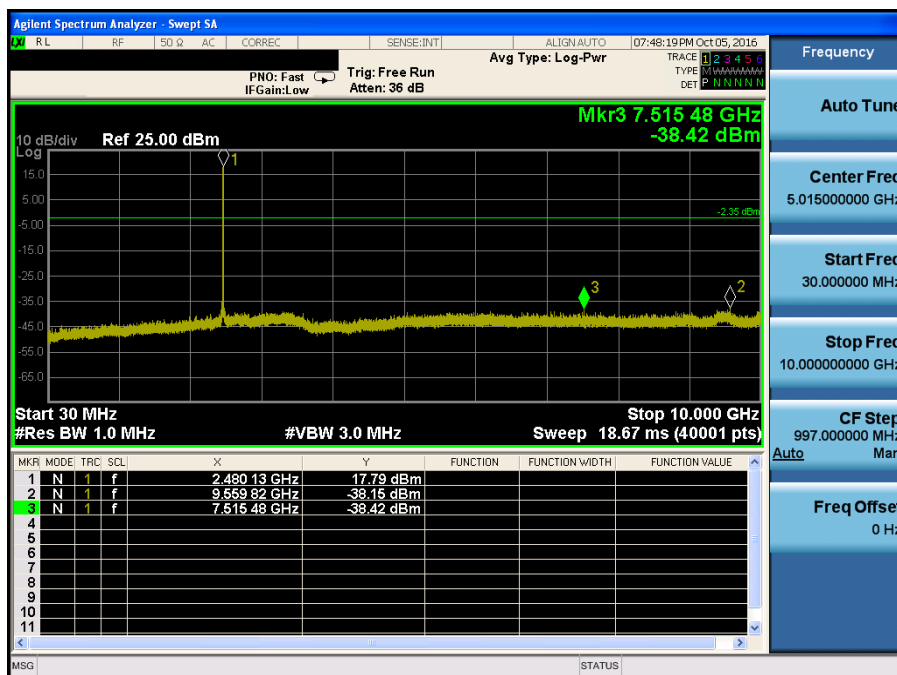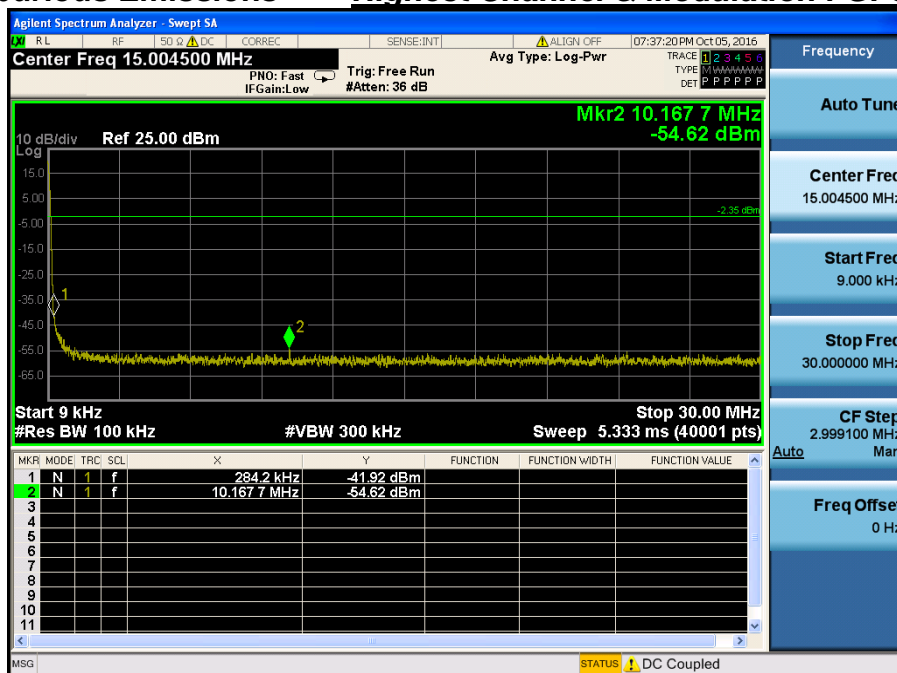


Conducted Spurious Emissions *Highest Channel & Modulation : GFSK*

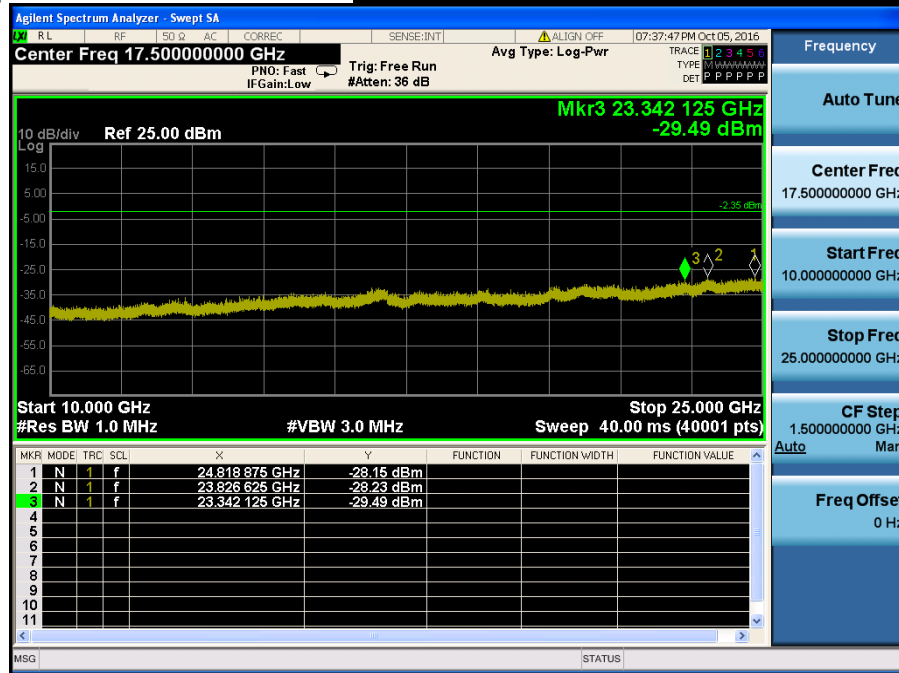

Low Band-edge

Lowest Channel & Modulation : $\pi/4$ DQPSK


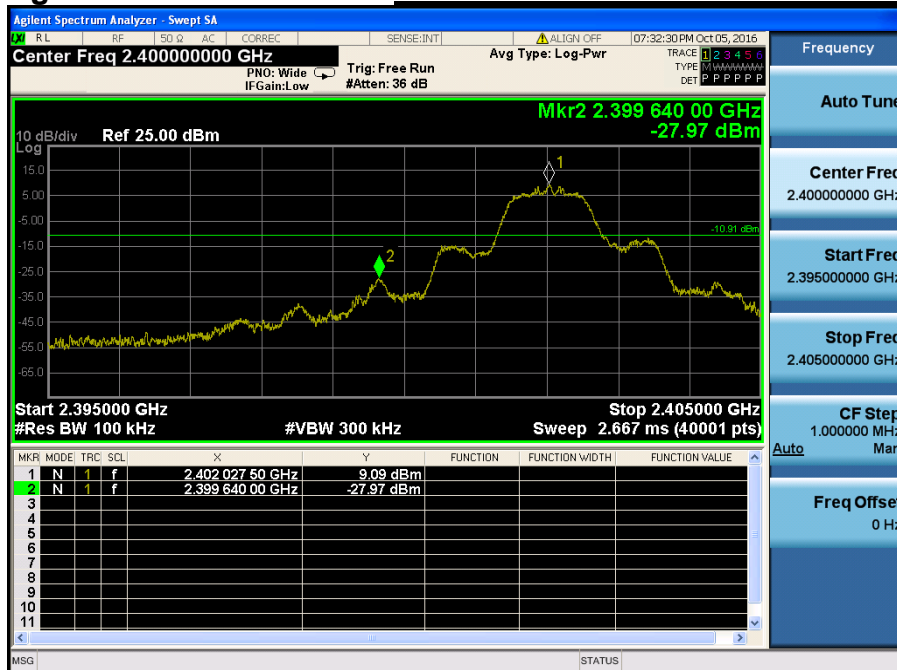



Low Band-edge

Hopping mode & Modulation : $\pi/4$ DQPSK




Conducted Spurious Emissions Lowest Channel & Modulation : $\pi/4$ DQPSK

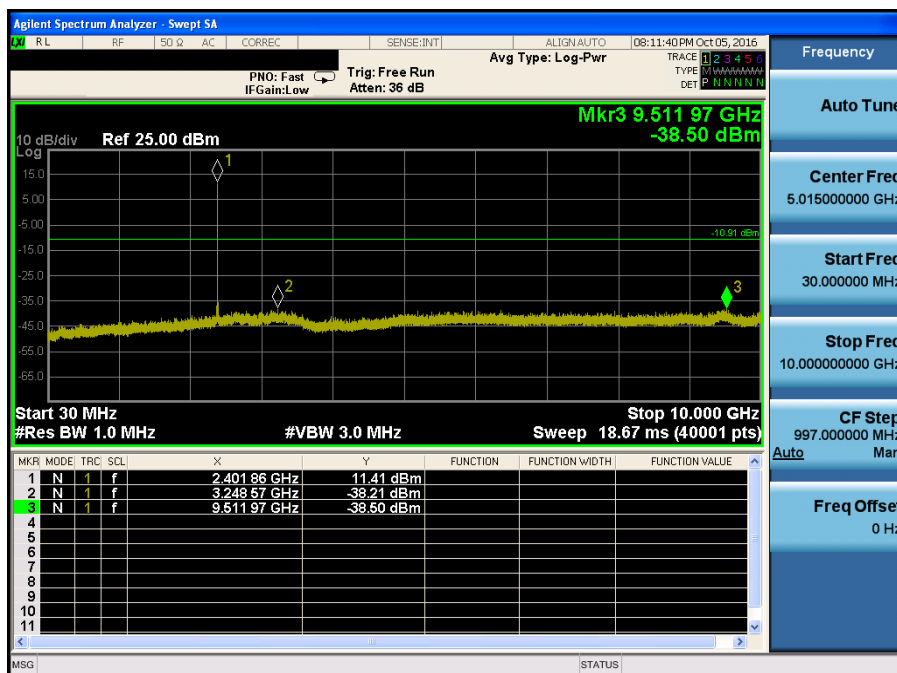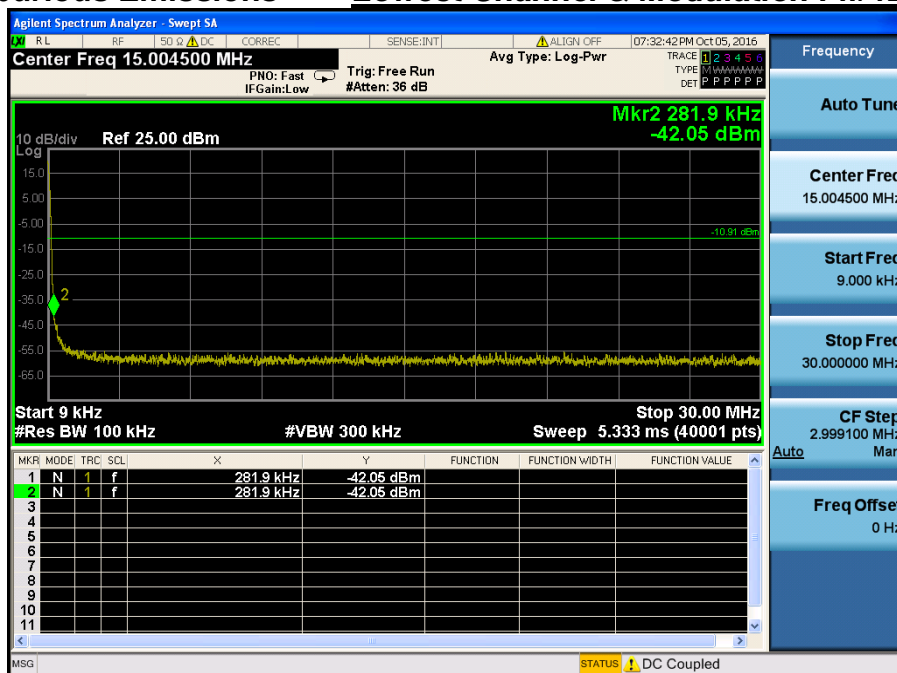

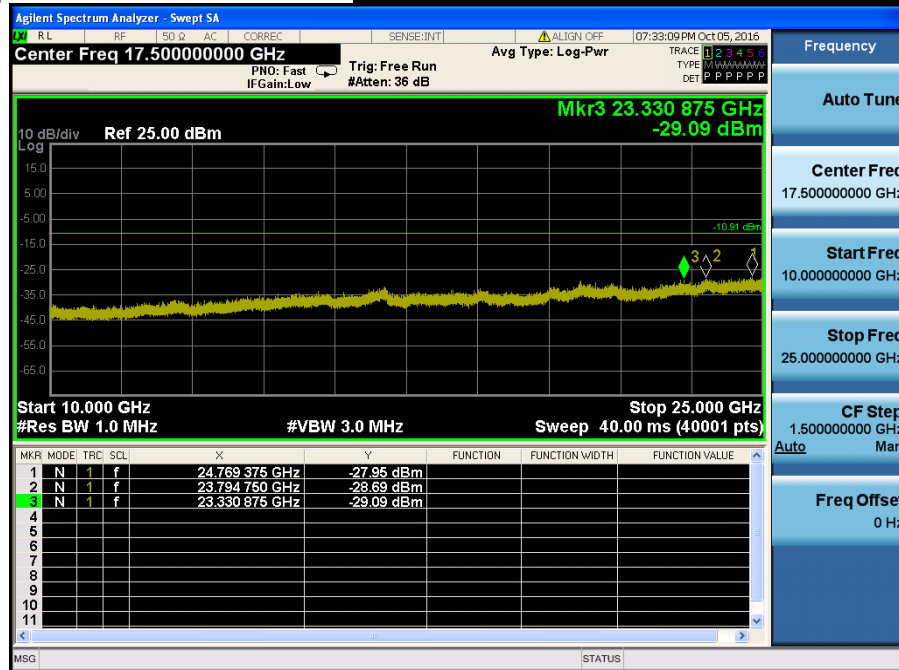Conducted Spurious Emissions ***Lowest Channel & Modulation : $\pi/4$ DQPSK***


Reference for limit

Middle Channel & Modulation : $\pi/4$ DQPSK

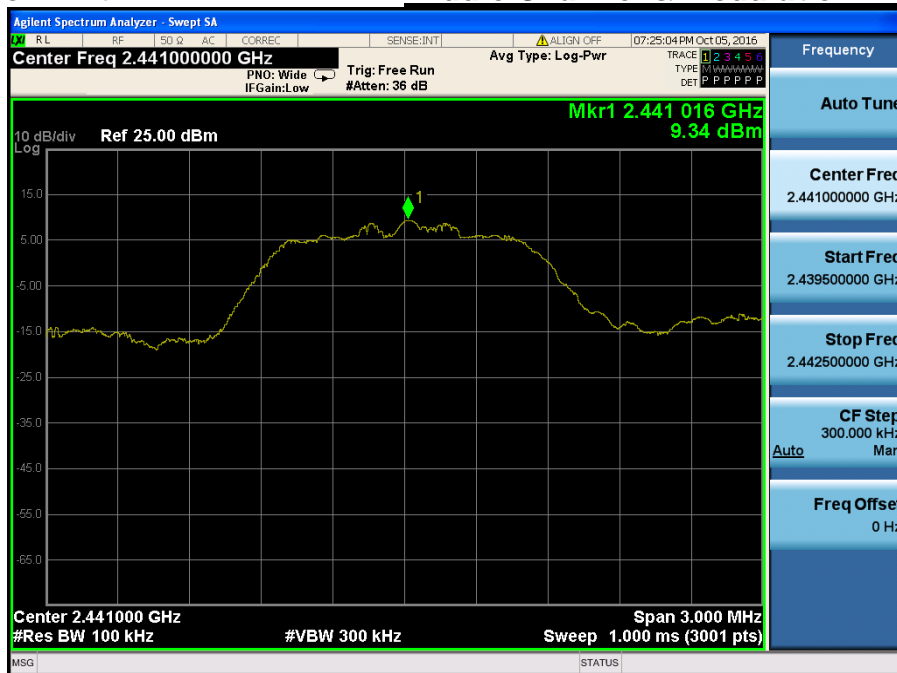



Conducted Spurious Emissions

Middle Channel & Modulation : $\pi/4$ DQPSK

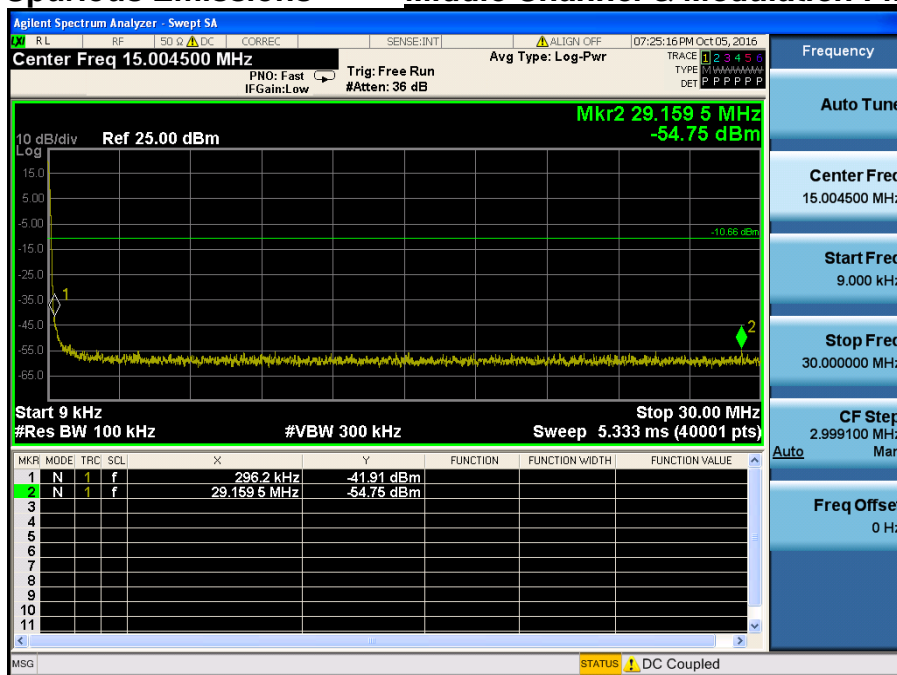

Conducted Spurious Emissions

Middle Channel & Modulation : $\pi/4$ DQPSK

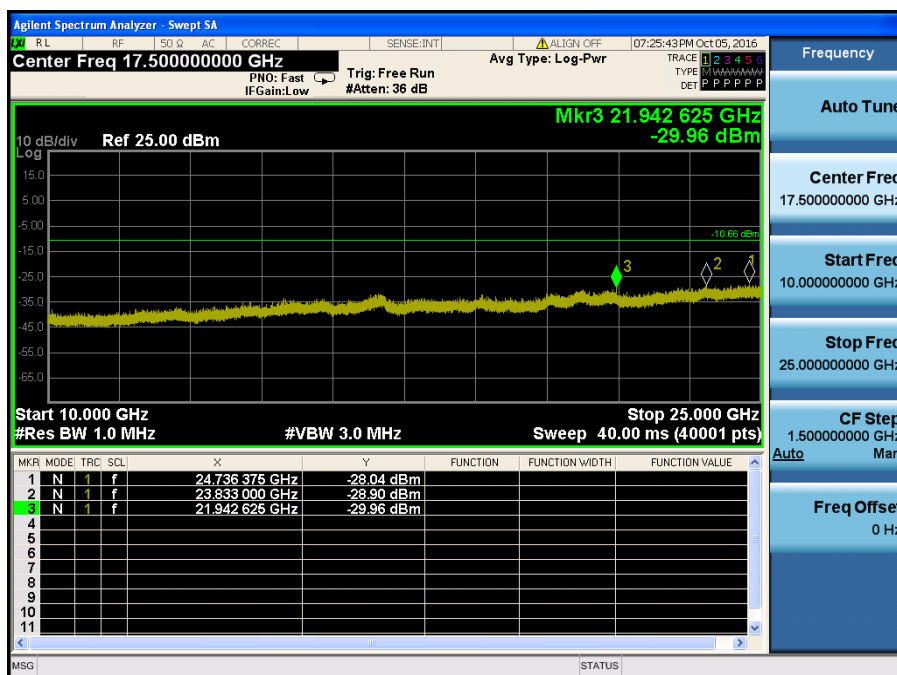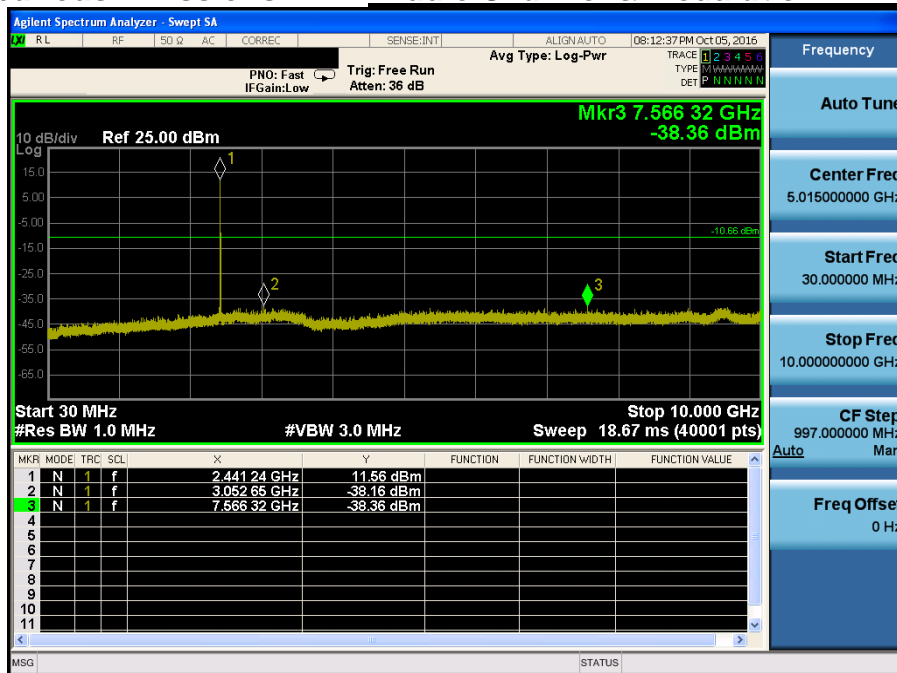

High Band-edge



Highest Channel & Modulation : $\pi/4$ DQPSK

High Band-edge

Hopping mode & Modulation : $\pi/4$ DQPSK

Conducted Spurious Emissions

Highest Channel & Modulation : $\pi/4$ DQPSK

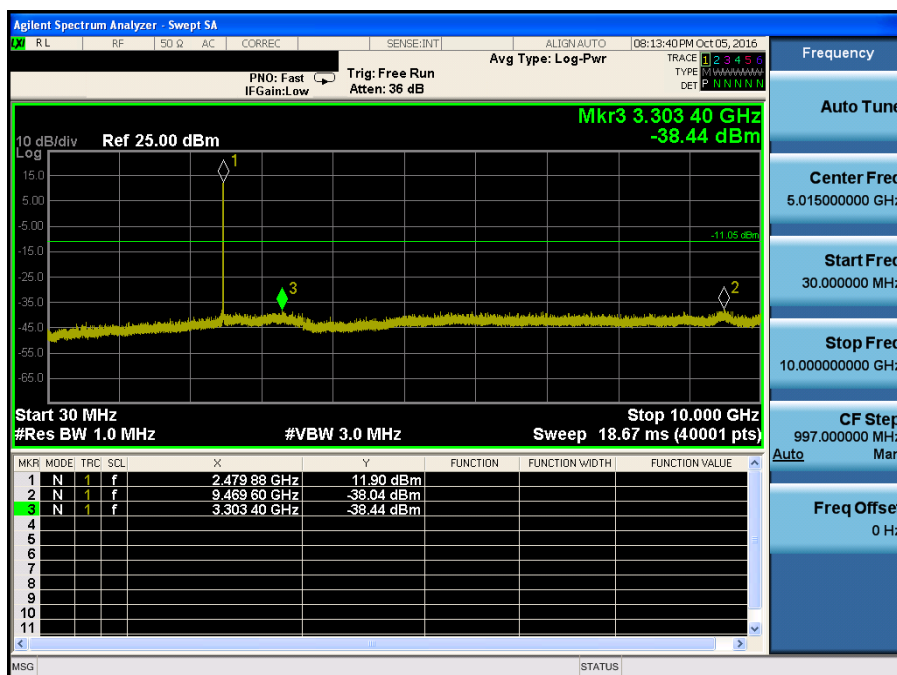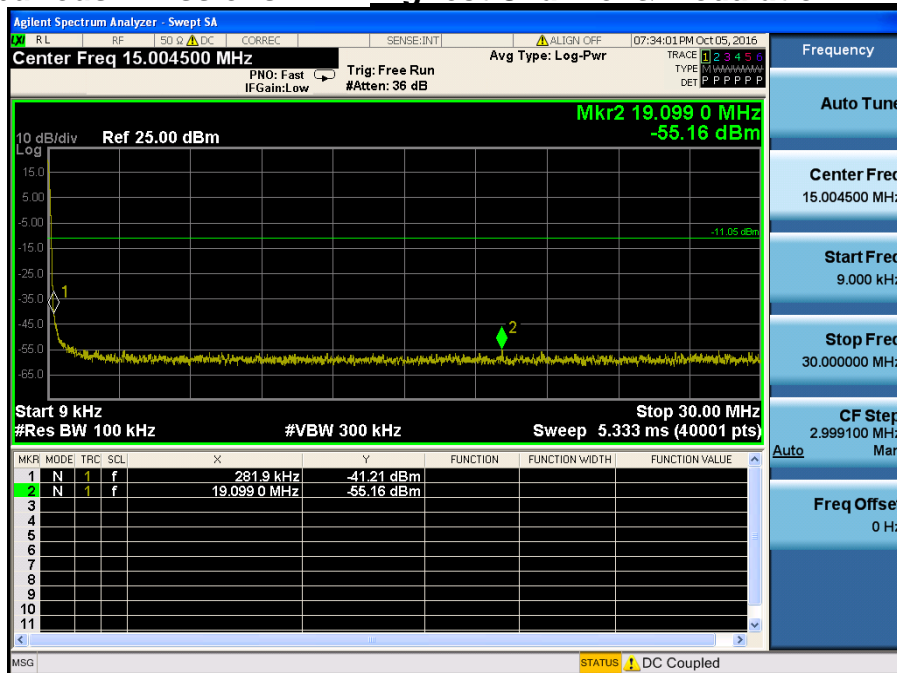

Conducted Spurious Emissions

Highest Channel & Modulation : $\pi/4$ DQPSK



Low Band-edge



Lowest Channel & Modulation : 8DPSK

Low Band-edge

Hopping mode & Modulation : 8DPSK


Conducted Spurious Emissions

Lowest Channel & Modulation : 8DPSK

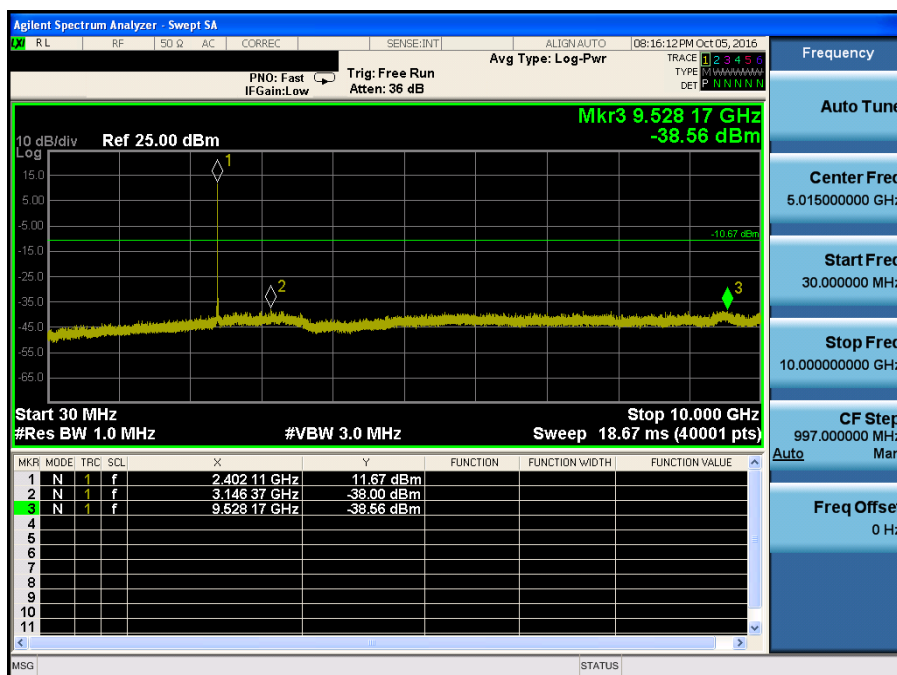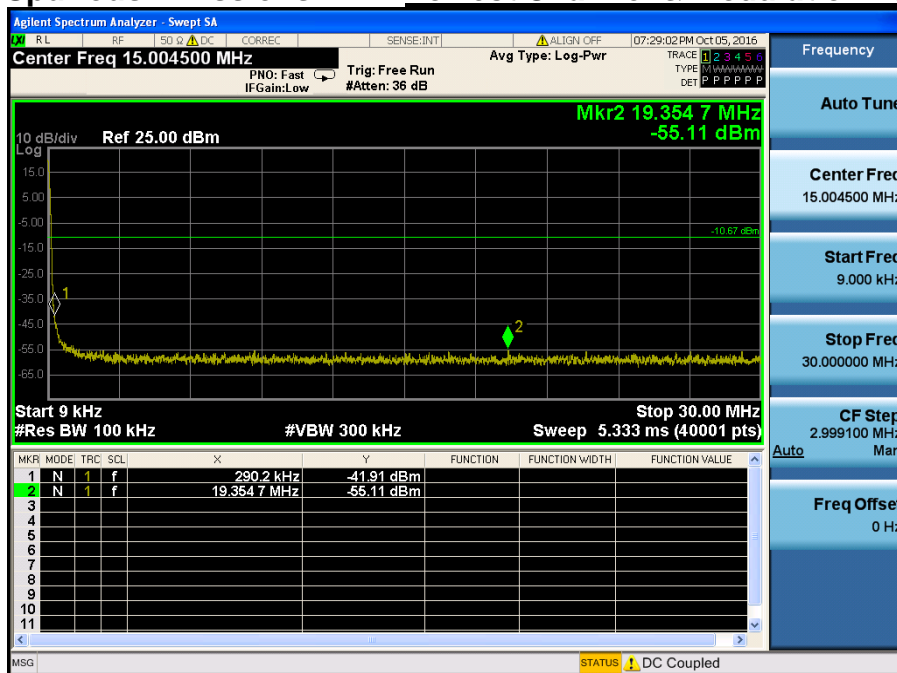


Conducted Spurious Emissions

Lowest Channel & Modulation : 8DPSK

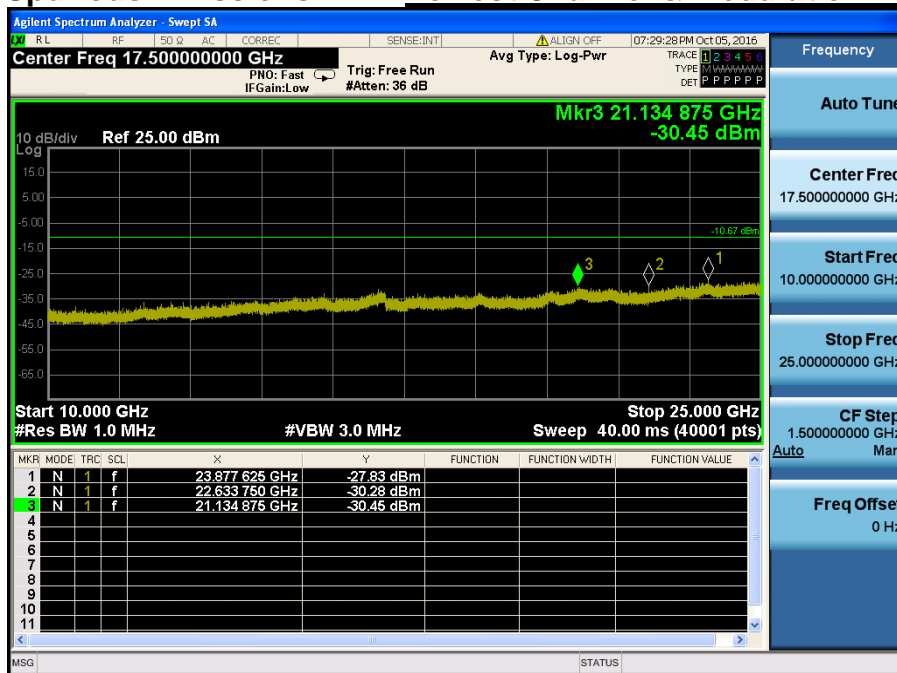


Reference for limit

Middle Channel & Modulation : 8DPSK

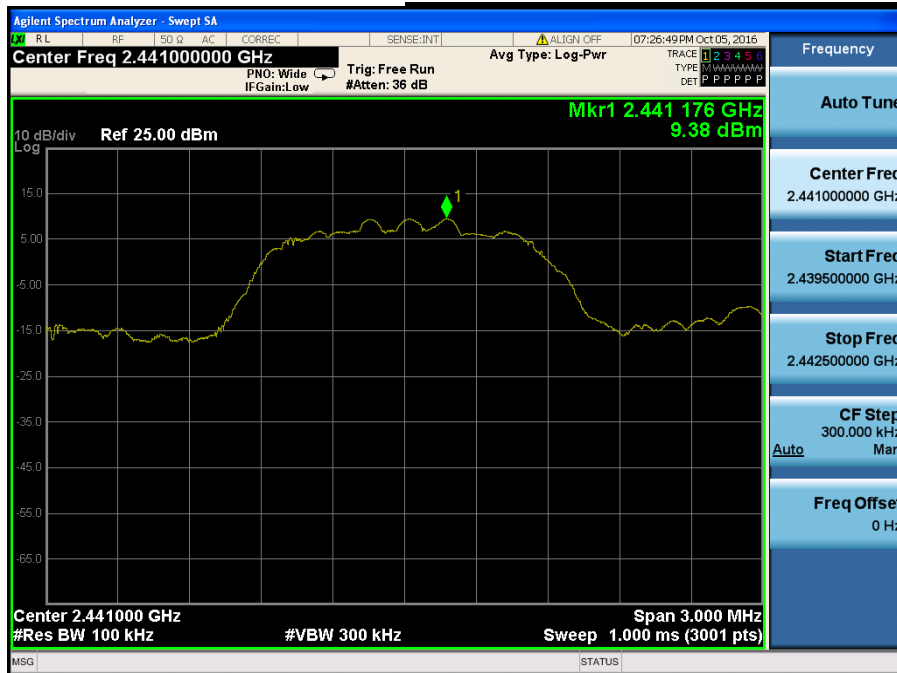



Conducted Spurious Emissions

Middle Channel & Modulation : 8DPSK

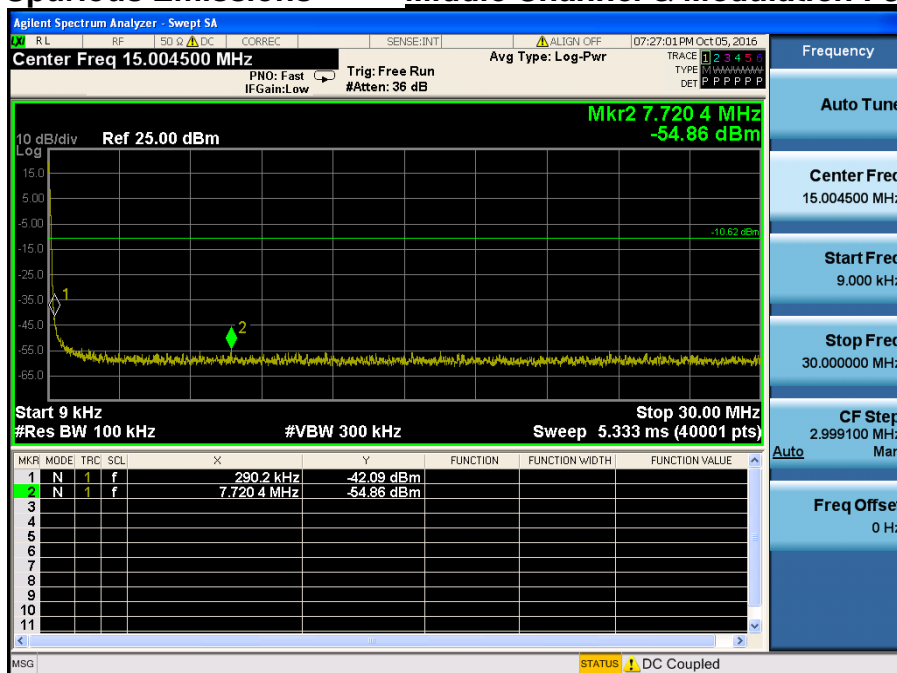

Conducted Spurious Emissions

Middle Channel & Modulation : 8DPSK

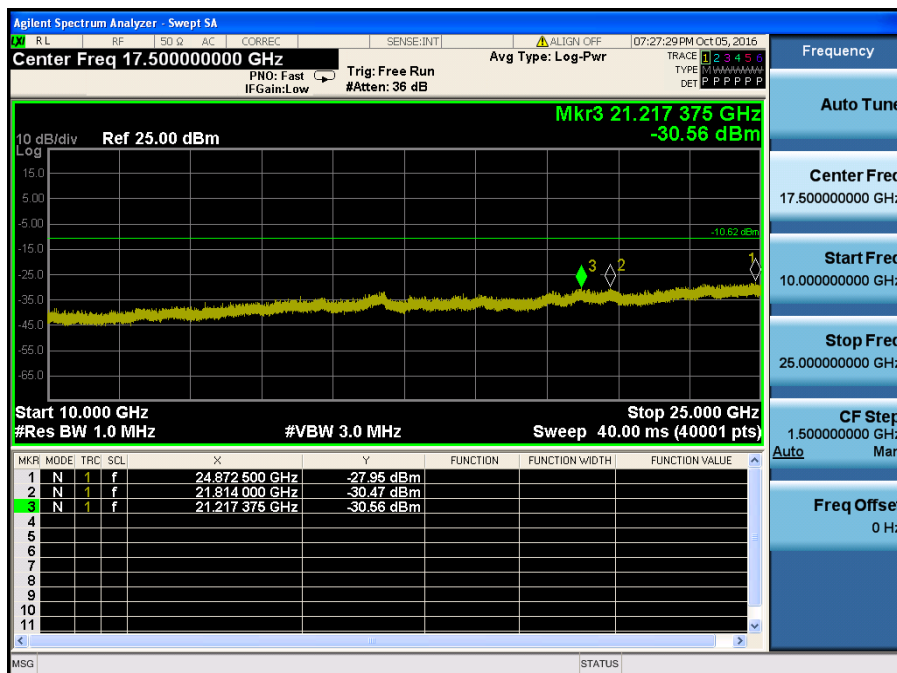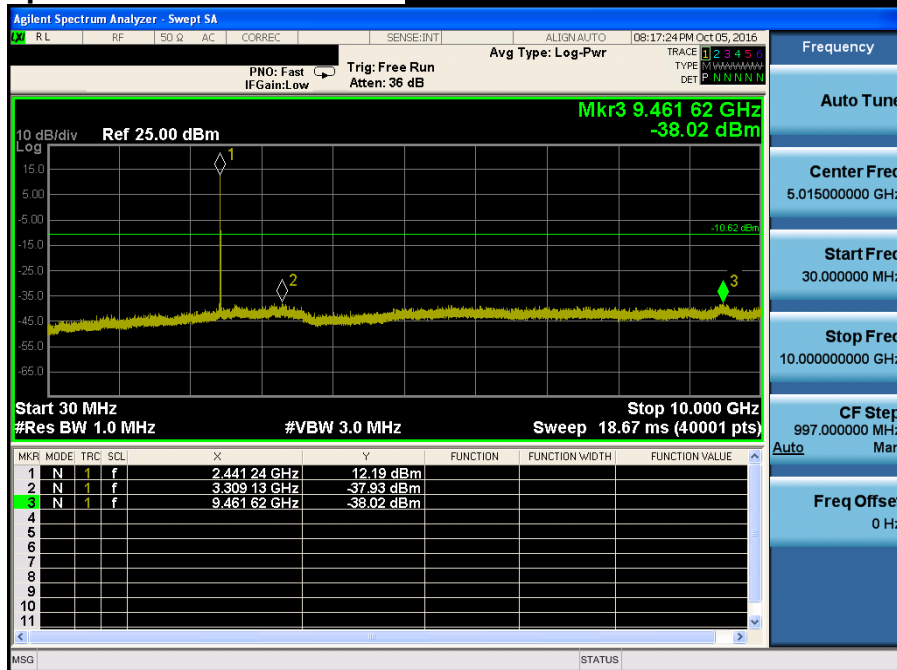

High Band-edge

Highest Channel & Modulation : 8DPSK





High Band-edge

Hopping mode & Modulation : 8DPSK




Conducted Spurious Emissions

Highest Channel & Modulation : 8DPSK

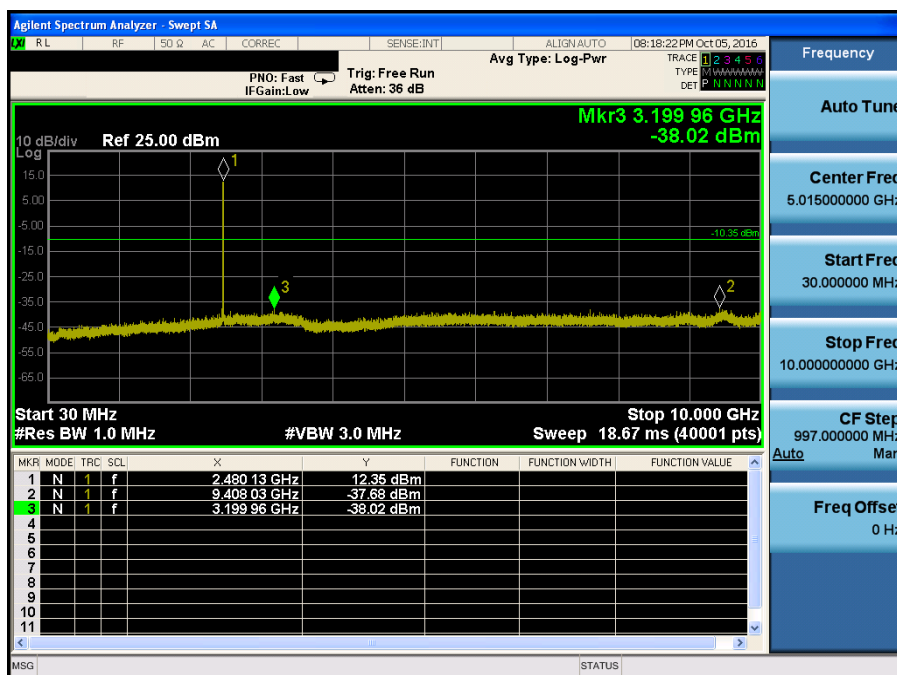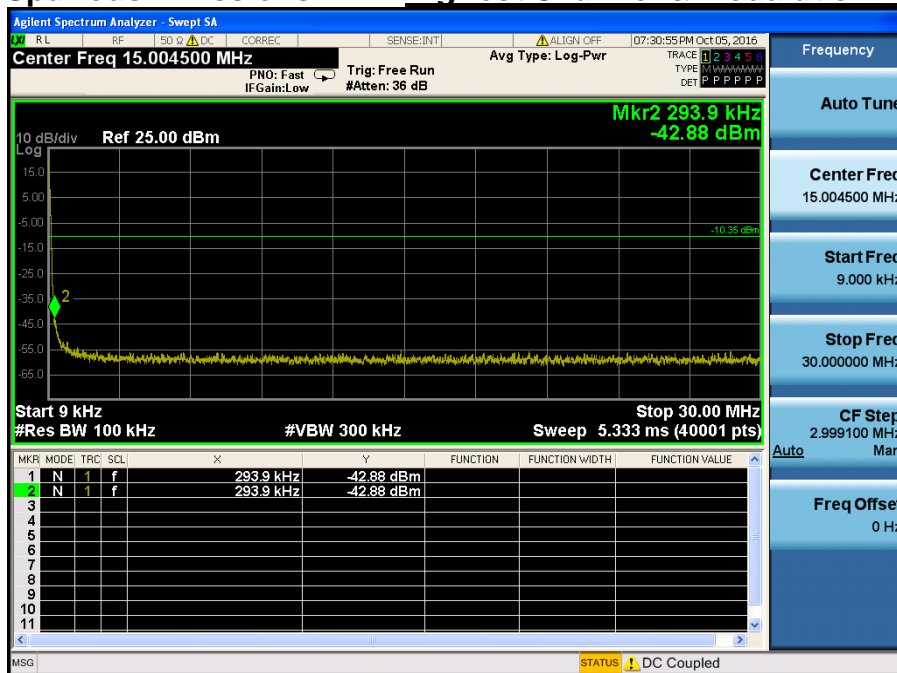

Conducted Spurious Emissions

Highest Channel & Modulation : 8DPSK

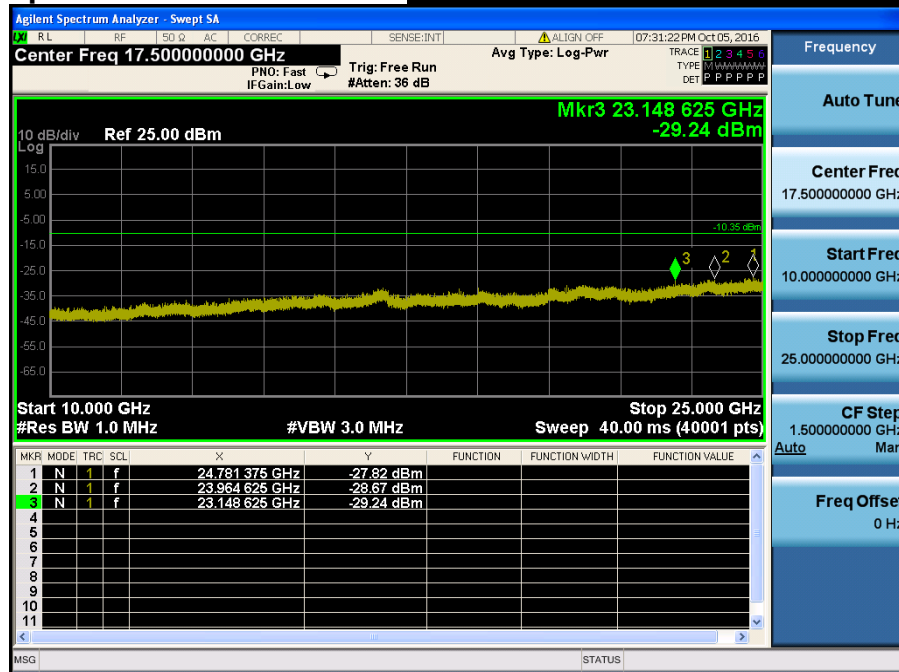

8. Transmitter AC Power Line Conducted Emission

8.1 Test Setup

Refer to test setup photo.

8.2 Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network (LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

8.3 Test Procedures

Conducted emissions from the EUT were measured according to the ANSI C63.10.

1. The test procedure is performed in a 6.5 m × 3.5 m × 3.5 m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) × 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

8.4. Test Results

AC Line Conducted Emissions (Graph) = Modulation : GFSK

Results of Conducted Emission

DT&C


Date : 2016-10-06

Model No. : SPH10
Power Supply : 120V 60Hz
Temp/Humi. : 24°C 42% R.H.
Atm :

Operator : I.H.BAE

Memo : BT 1Mbps

LIMIT : FCC P15.207 QP
FCC P15.207 AV

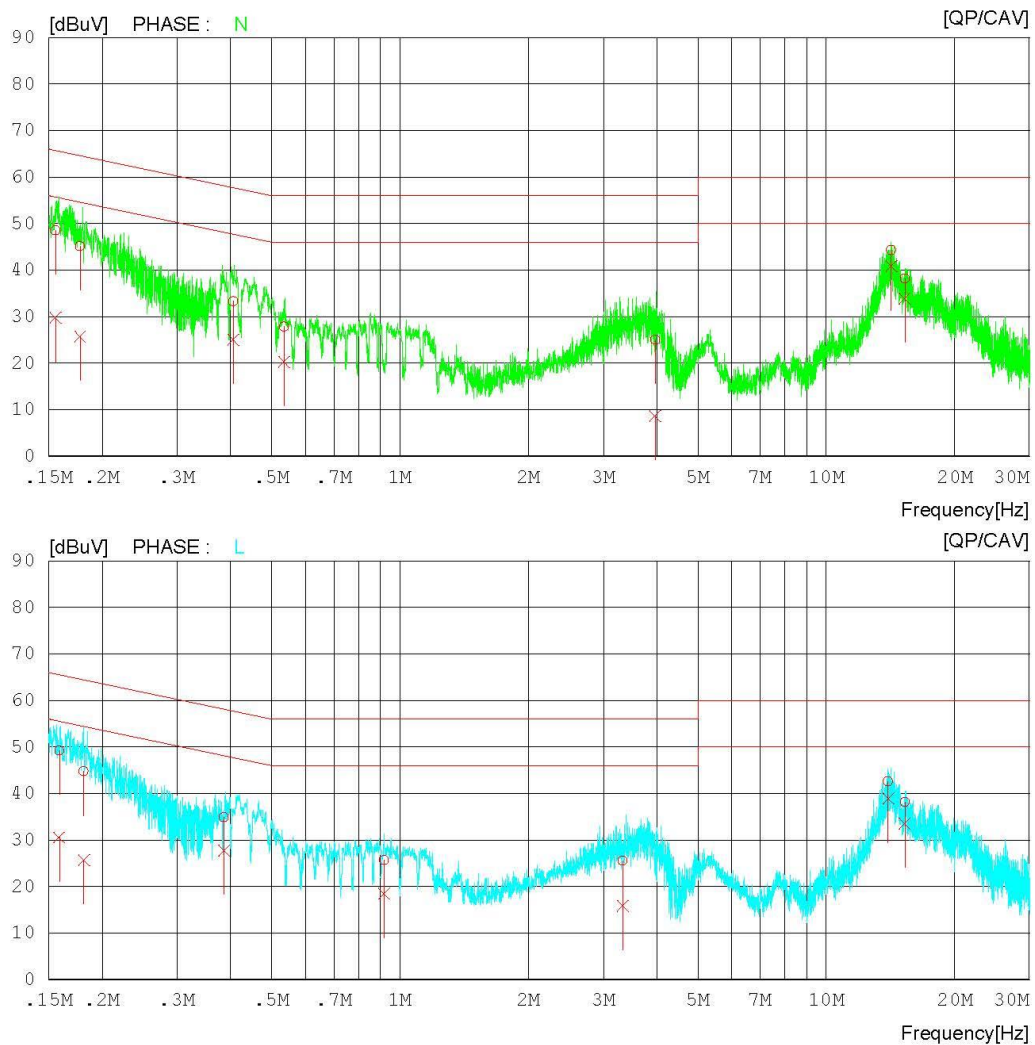

AC Line Conducted Emissions (List) = Modulation : GFSK

Results of Conducted Emission

DT&C

Date : 2016-10-06

Model No. : SPH10 Operator : I.H.BAE
Power Supply : 120V 60Hz
Temp/Humi. : 24°C 42% R.H.
Atm :

Memo : BT 1Mbps

LIMIT : FCC P15.207 QP
FCC P15.207 AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP	CAV		QP	CAV	QP	CAV	QP	CAV	
		[dBuV]	[dBuV]		[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	
1	0.15550	45.40	26.54	3.17	48.57	29.71	65.70	55.70	17.13	25.99	N
2	0.17750	42.64	23.18	2.51	45.15	25.69	64.60	54.60	19.45	28.91	N
3	0.40635	32.45	24.25	0.86	33.31	25.11	57.72	47.72	24.41	22.61	N
4	0.53461	27.26	19.66	0.65	27.91	20.31	56.00	46.00	28.09	25.69	N
5	3.96908	24.69	8.33	0.33	25.02	8.66	56.00	46.00	30.98	37.34	N
6	14.20090	43.90	40.38	0.47	44.37	40.85	60.00	50.00	15.63	9.15	N
7	15.28003	37.72	33.44	0.49	38.21	33.93	60.00	50.00	21.79	16.07	N
8	0.15861	46.10	27.42	3.10	49.20	30.52	65.54	55.54	16.34	25.02	L
9	0.18123	42.22	23.20	2.47	44.69	25.67	64.43	54.43	19.74	28.76	L
10	0.38650	33.90	26.77	0.94	34.84	27.71	58.14	48.14	23.30	20.43	L
11	0.91750	25.21	17.97	0.44	25.65	18.41	56.00	46.00	30.35	27.60	L
12	3.32919	25.20	15.45	0.36	25.56	15.81	56.00	46.00	30.44	30.19	L
13	13.95974	42.13	38.44	0.46	42.59	38.90	60.00	50.00	17.41	11.10	L
14	15.27996	37.64	33.11	0.47	38.11	33.58	60.00	50.00	21.89	16.42	L

9. Antenna Requirement

Describe how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT.

Conclusion: **Comply**

The antenna is permanently attached on PCB. (Refer to Internal photo file.)

- Minimum Standard :

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions.
--

10. Occupied Bandwidth (99 %)

10.1 Test Setup

Refer to the APPENDIX I.

10.2 Limit

Limit : Not Applicable

10.3 Test Procedure

The 99 % power bandwidth was measured with a calibrated spectrum analyzer.

The resolution bandwidth (RBW) shall be in the range of 1 % to 5 % of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately $3 \times \text{RBW}$.


Spectrum analyzer plots are included on the following pages.

10.4 Test Results

Test Mode	Tested Channel	Test Results (MHz)
<u>GFSK</u>	Lowest	0.87
	Middle	0.87
	Highest	0.88
<u>$\pi/4$DQPSK</u>	Lowest	1.39
	Middle	1.46
	Highest	1.47
<u>8DPSK</u>	Lowest	1.36
	Middle	1.44
	Highest	1.44


Occupied Bandwidth (99 %)

Lowest Frequency & GFSK

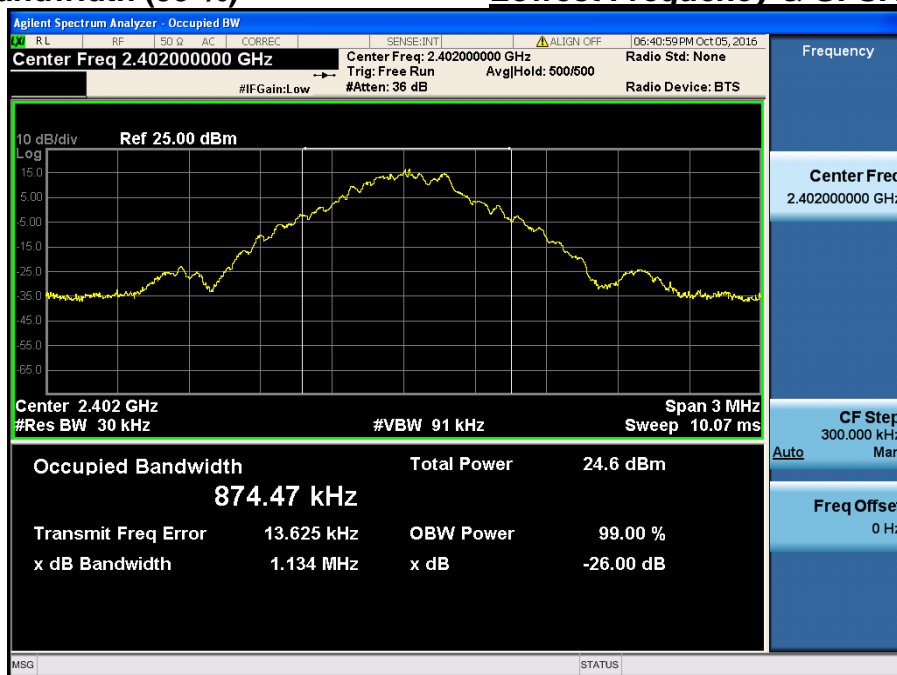


Occupied Bandwidth (99 %)

Middle Frequency & GFSK

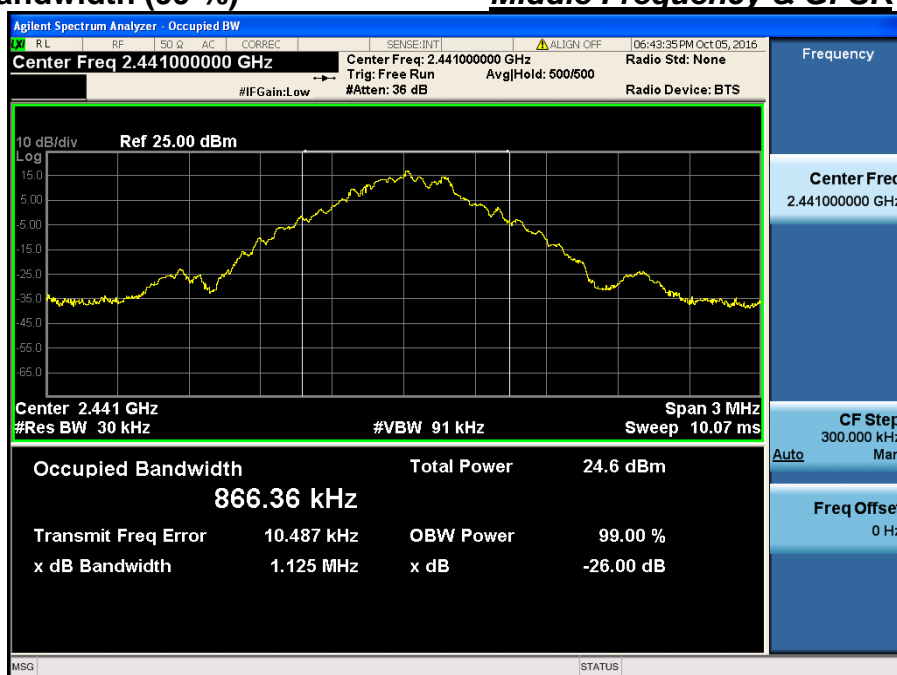


Occupied Bandwidth (99 %)

Highest Frequency & GFSK

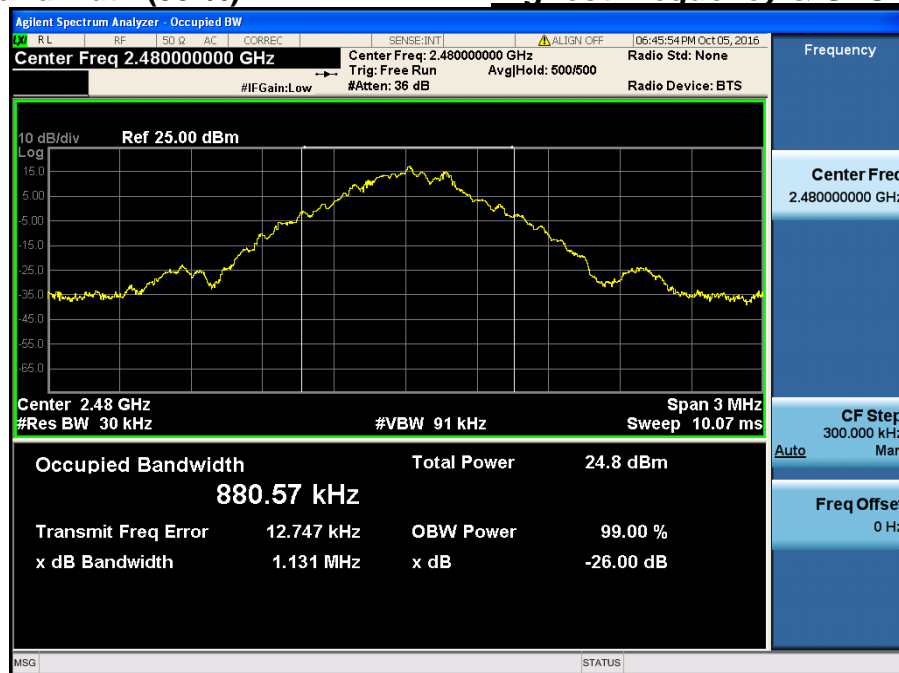


Occupied Bandwidth (99 %)

Lowest Frequency & $\pi/4$ DQPSK

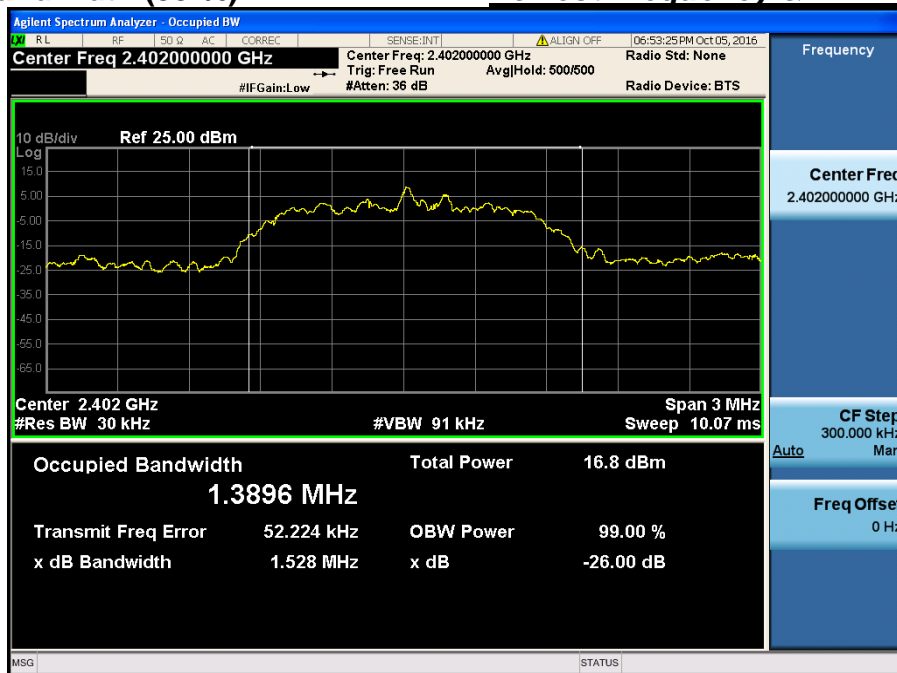


Occupied Bandwidth (99 %)

Middle Frequency & $\pi/4$ DQPSK

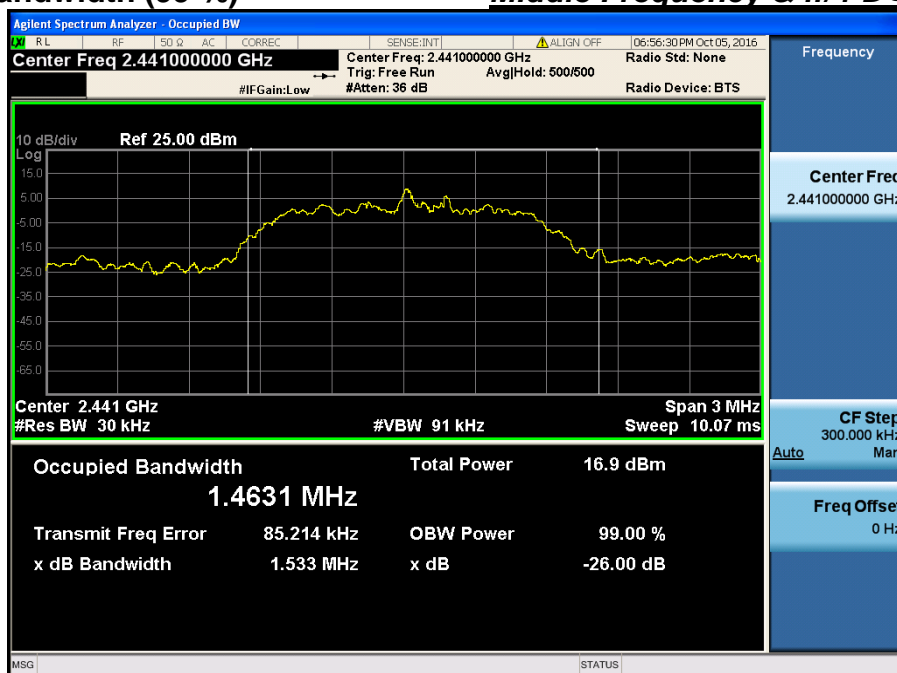


Occupied Bandwidth (99 %)

Highest Frequency & $\pi/4$ DQPSK

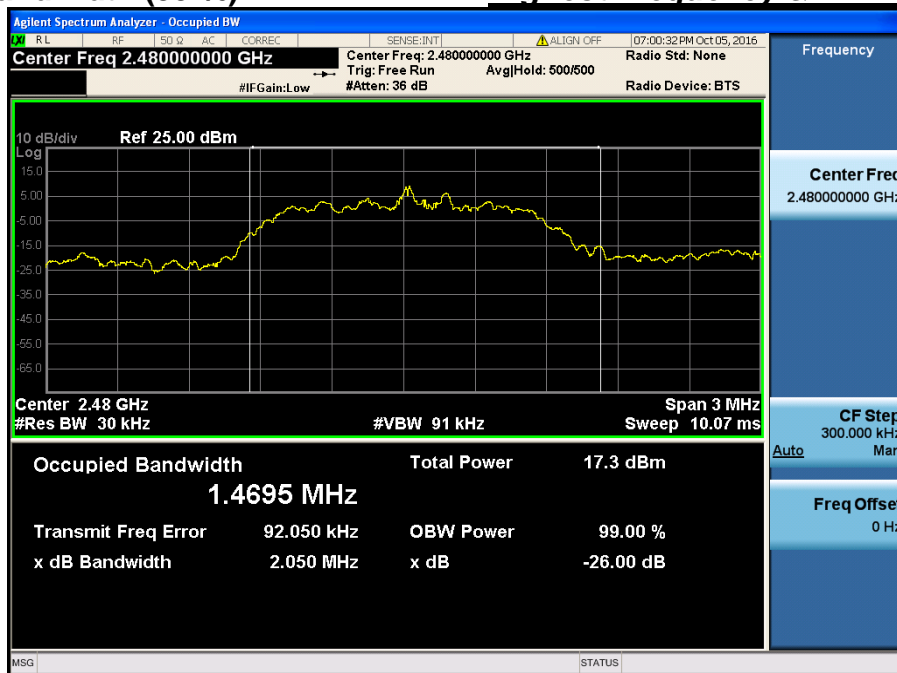


Occupied Bandwidth (99 %)

Lowest Frequency & 8DPSK

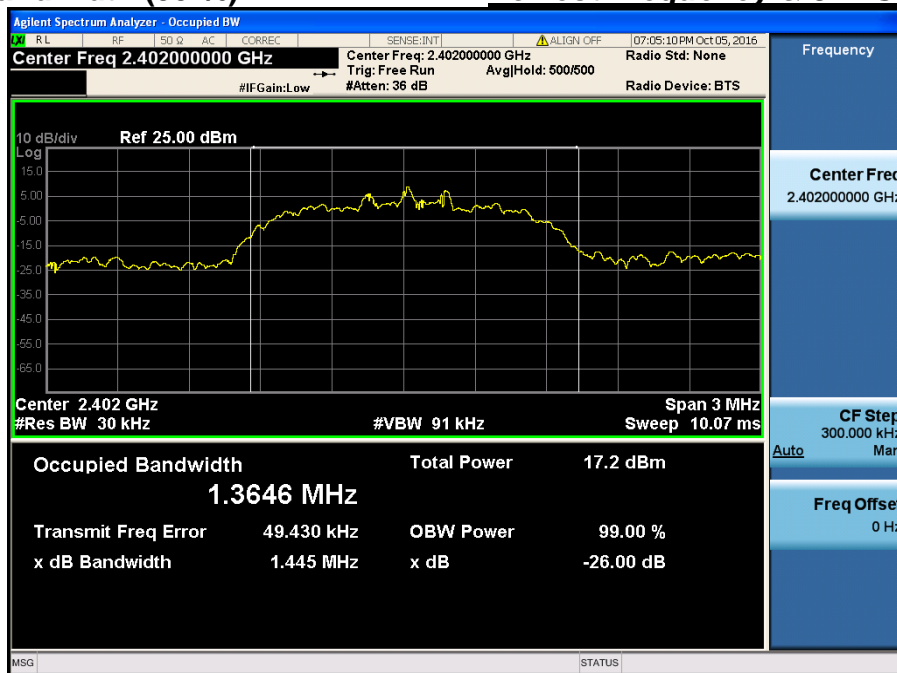


Occupied Bandwidth (99 %)

Middle Frequency & 8DPSK

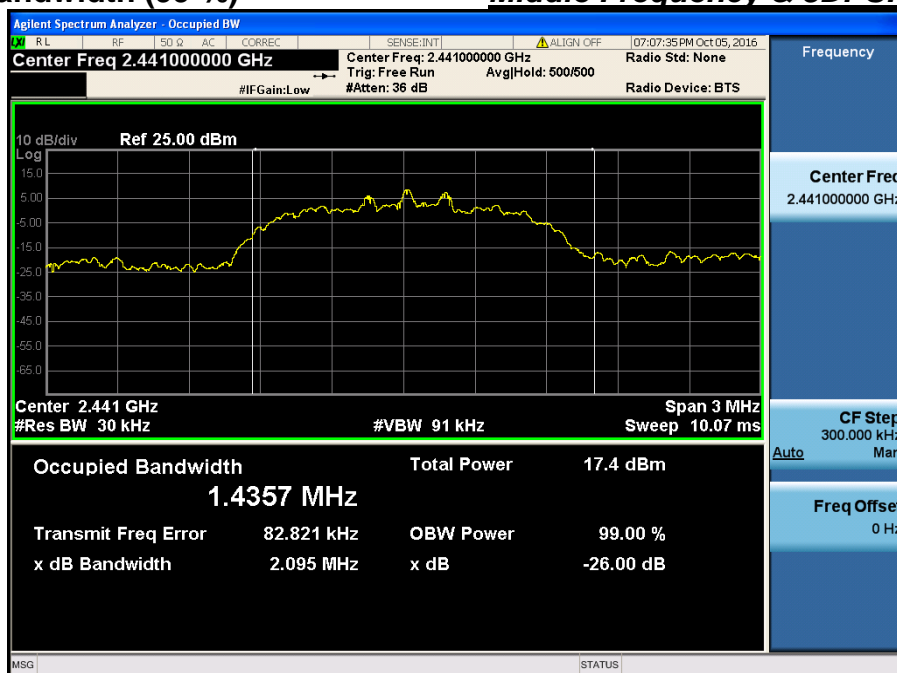

Occupied Bandwidth (99 %)


Highest Frequency & 8DPSK

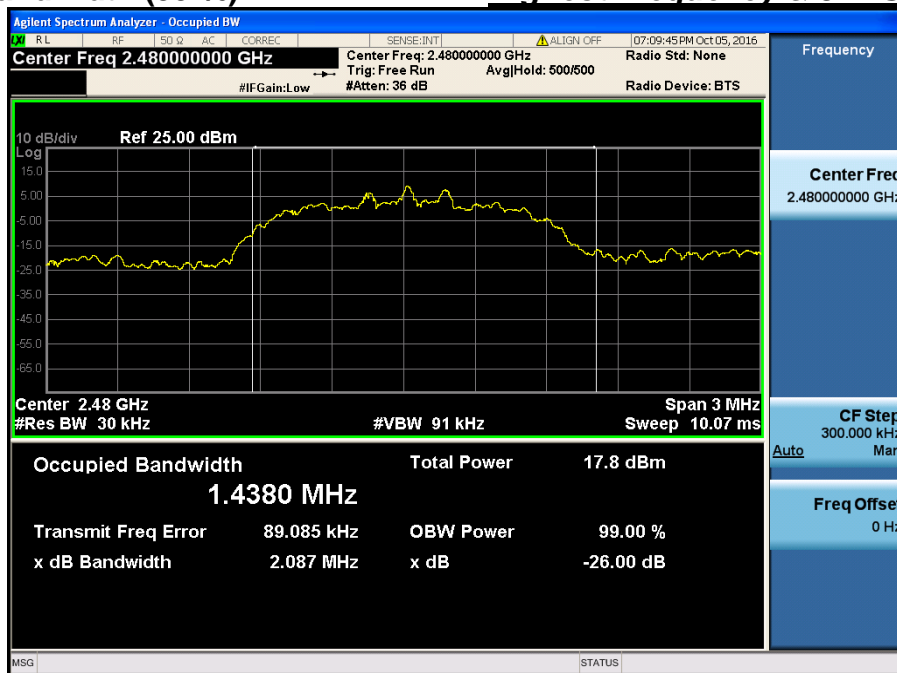


APPENDIX I

Test set up diagrams

▪ Radiated Measurement

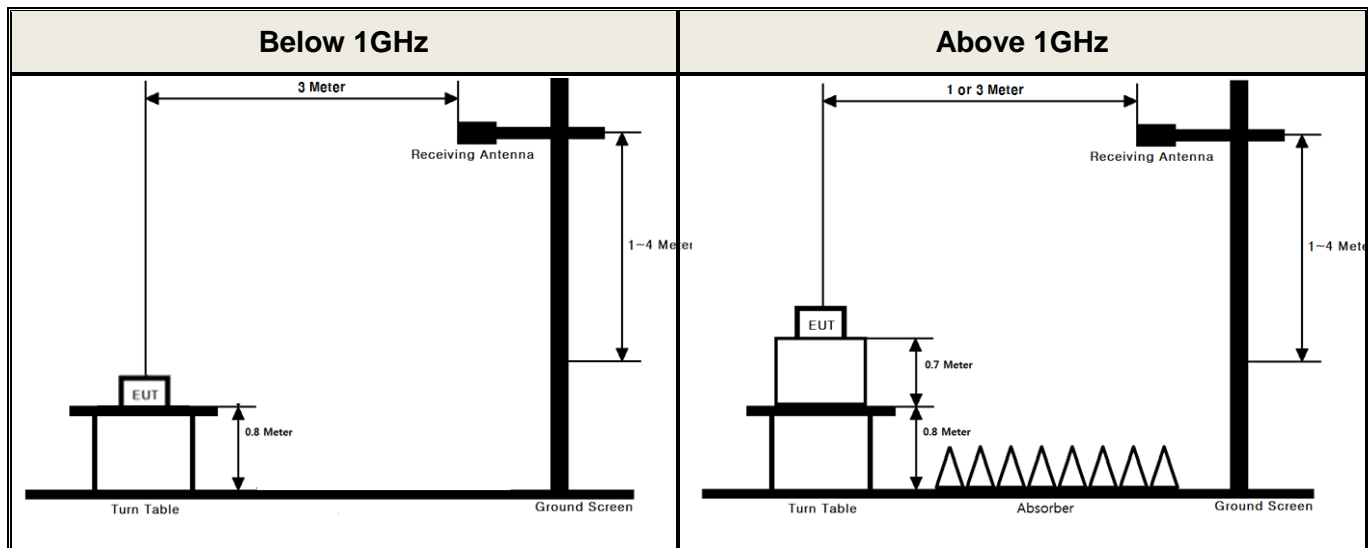

▪ Conducted Measurement

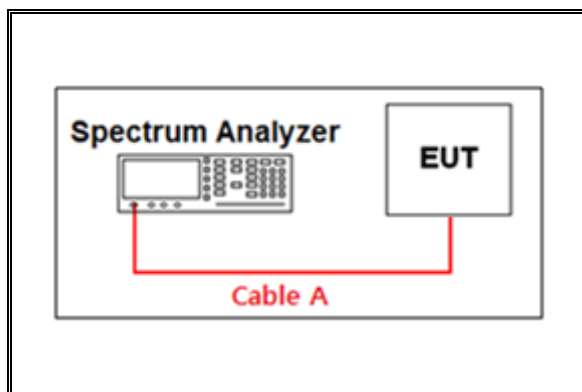

Path loss information

Frequency (GHz)	Path Loss (dB)	Frequency (GHz)	Path Loss (dB)
0.03	0.22	15	4.85
1	1.15	20	5.18
2402 & 2440 & 2480	1.93	25	6.54
5	2.59	-	-
10	3.93	-	-

Note 1 : The path loss from EUT to Spectrum analyzer were measured and used for test.


Path loss (S/A's Correction factor) = Cable A

APPENDIX II

Unwanted Emissions (Radiated) Test Plot


GFSK & Lowest & X & Hor

Detector Mode : PK

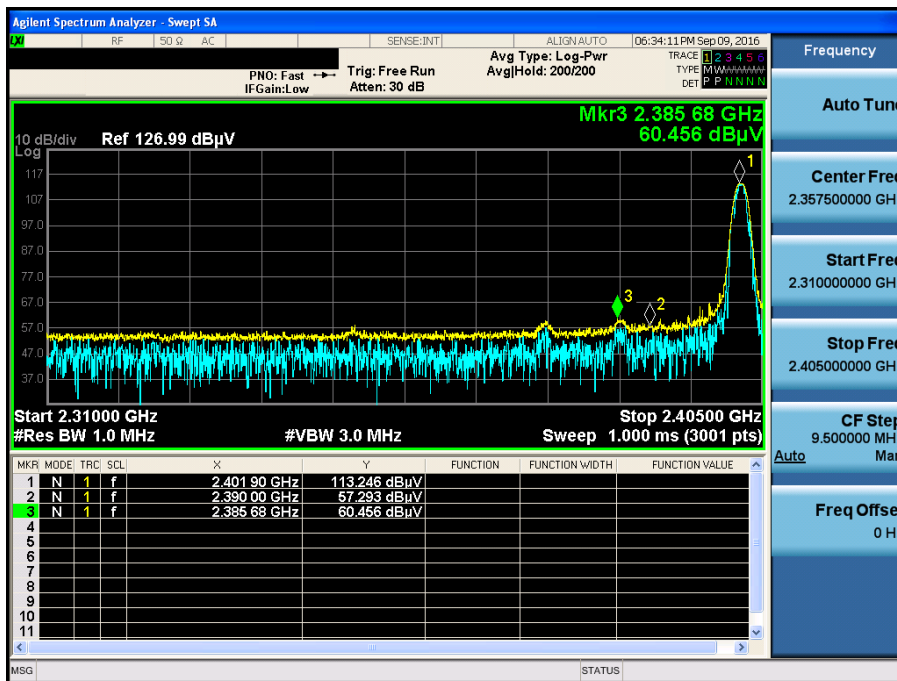


GFSK & Lowest & X & Hor

Detector Mode : AV

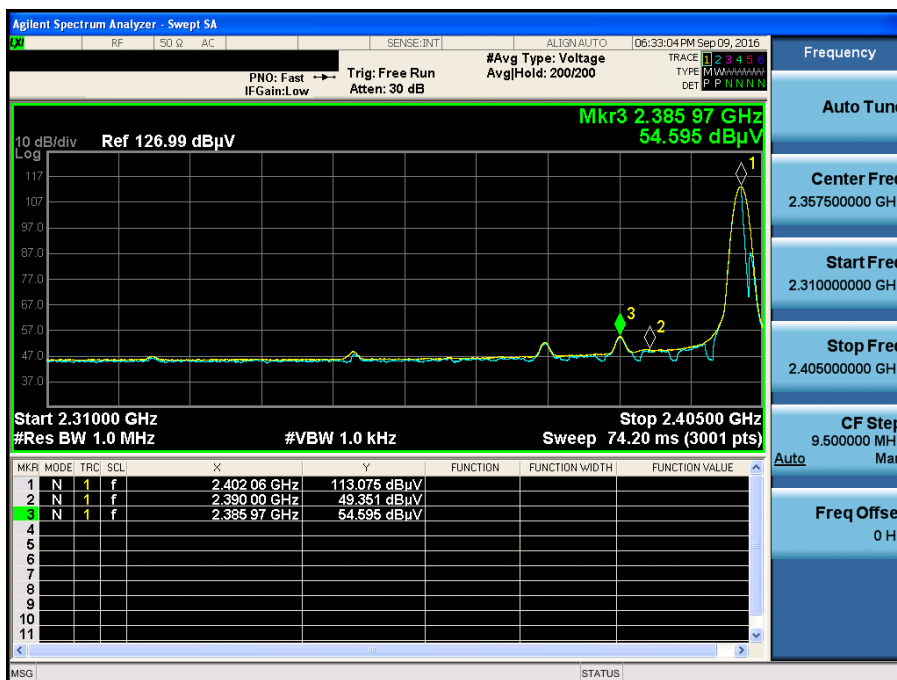

GFSK & Highest & X & Hor

Detector Mode : PK

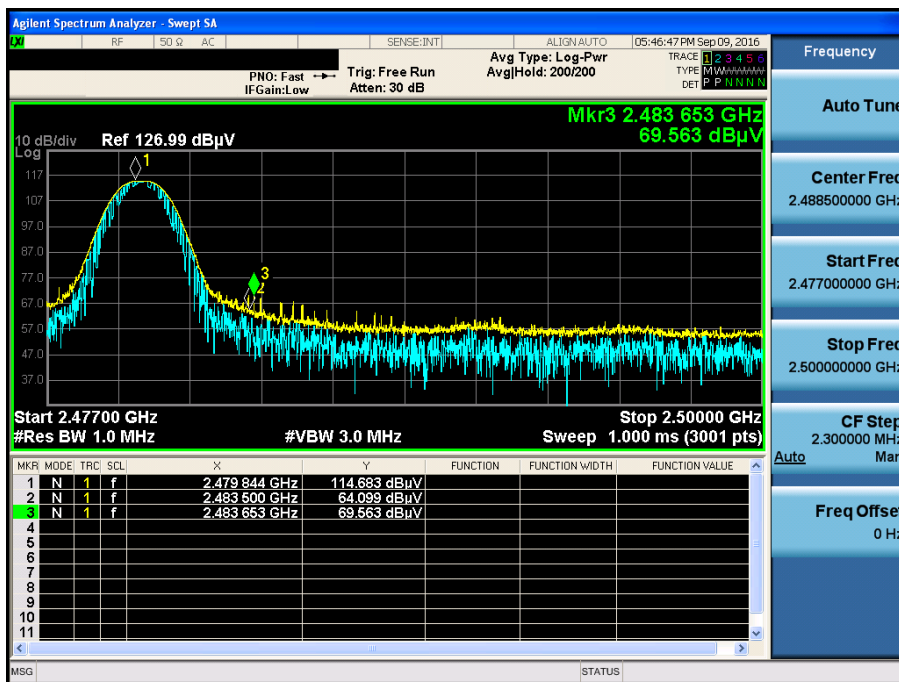


GFSK & Highest & X & Hor

Detector Mode : AV



$\pi/4$ DQPSK & Lowest & X & Hor

Detector Mode : PK

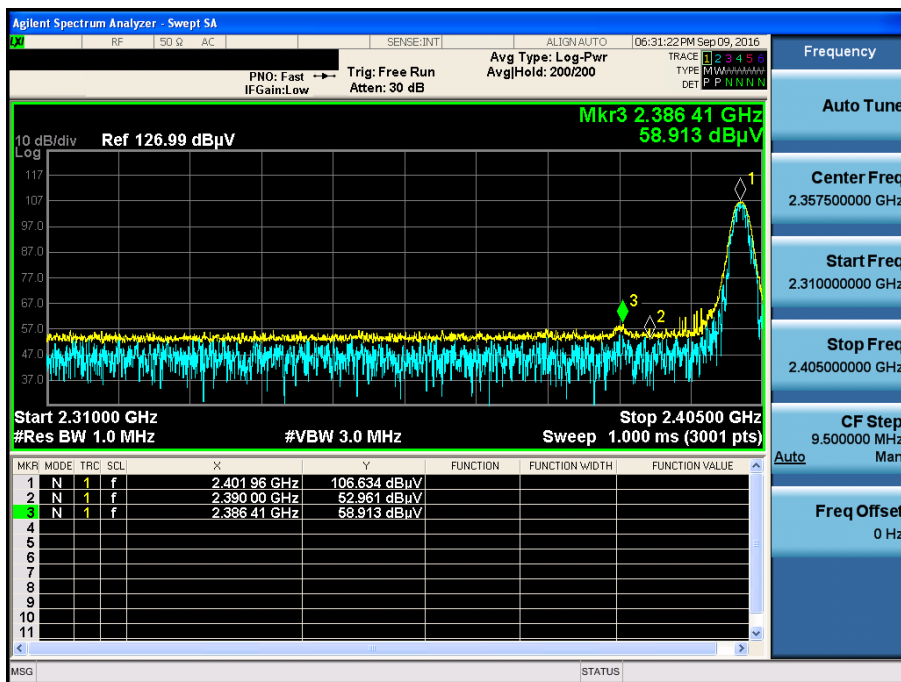


$\pi/4$ DQPSK & Lowest & X & Hor

Detector Mode : AV



π /4DQPSK & Highest & X & Hor

Detector Mode : PK

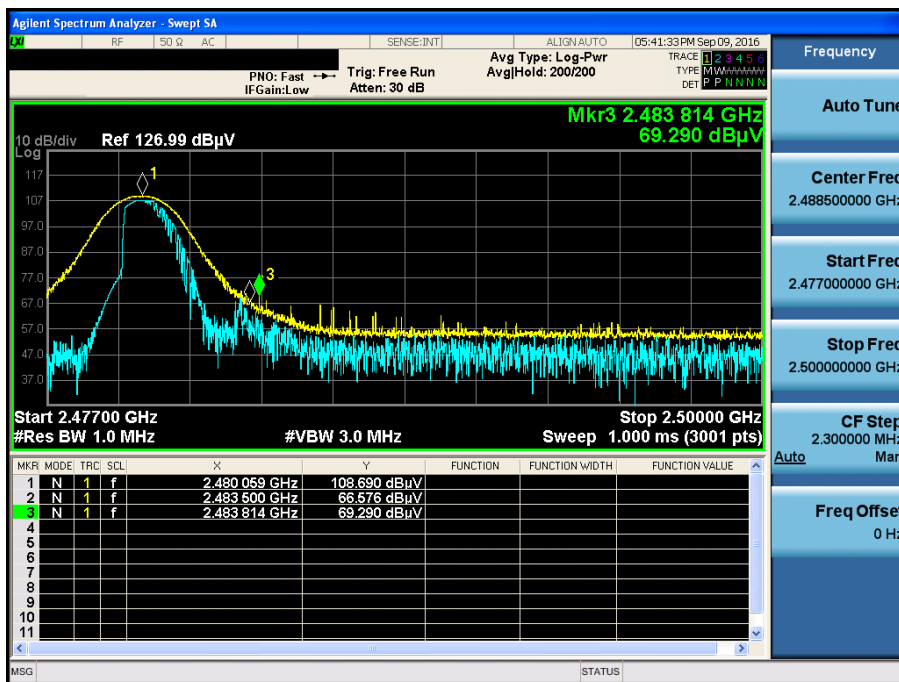


π /4DQPSK & Highest & X & Hor

Detector Mode : AV




8DPSK & Lowest & X & Hor

Detector Mode : PK

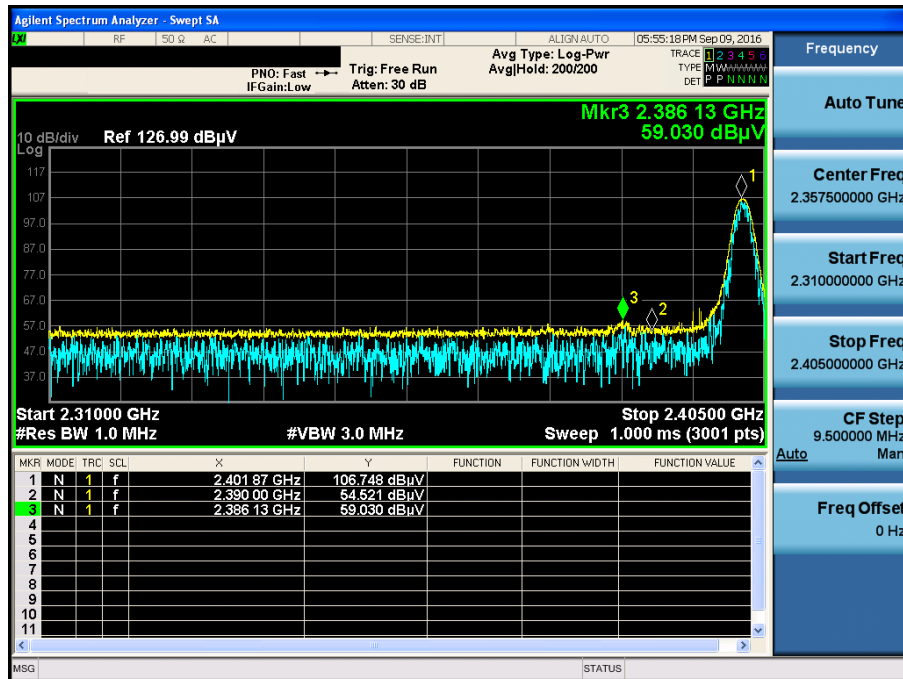


8DPSK & Lowest & X & Hor

Detector Mode : AV

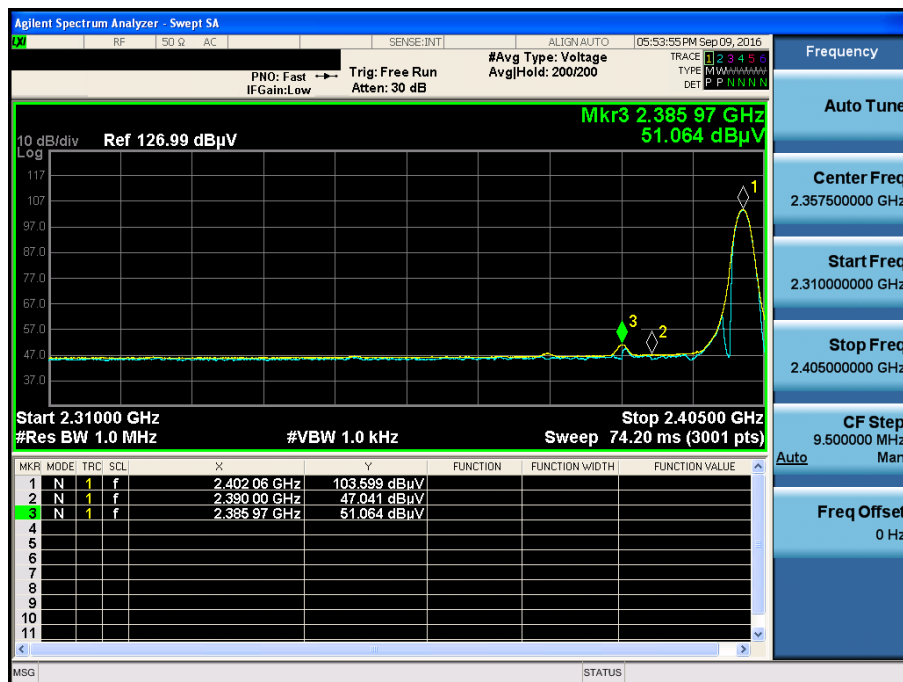

8DPSK & Highest & X & Hor

Detector Mode : PK

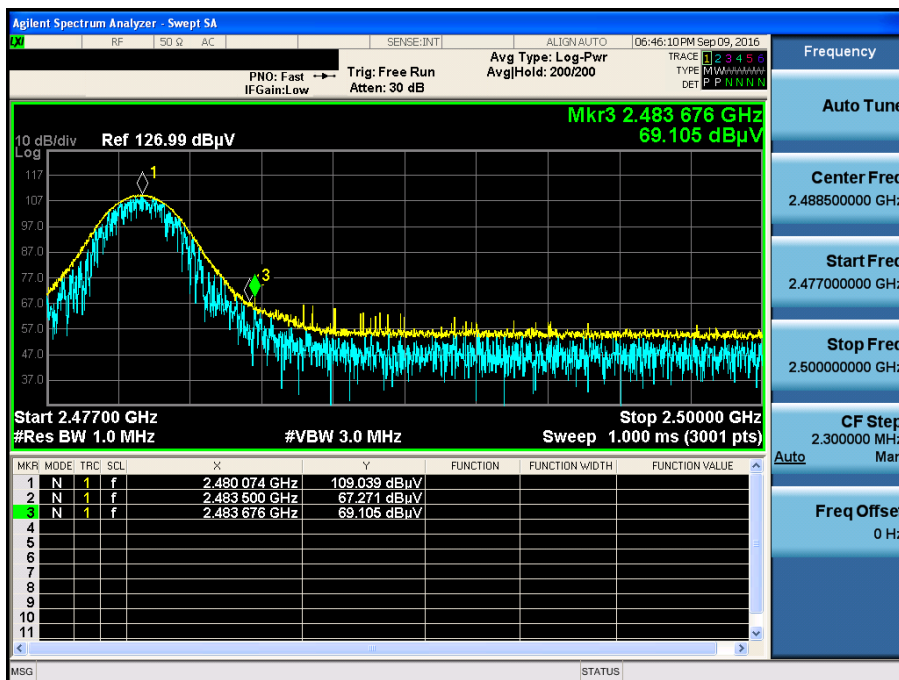


8DPSK & Highest & X & Hor

Detector Mode : AV




8DPSK & Highest & Y & Hor

Detector Mode : PK

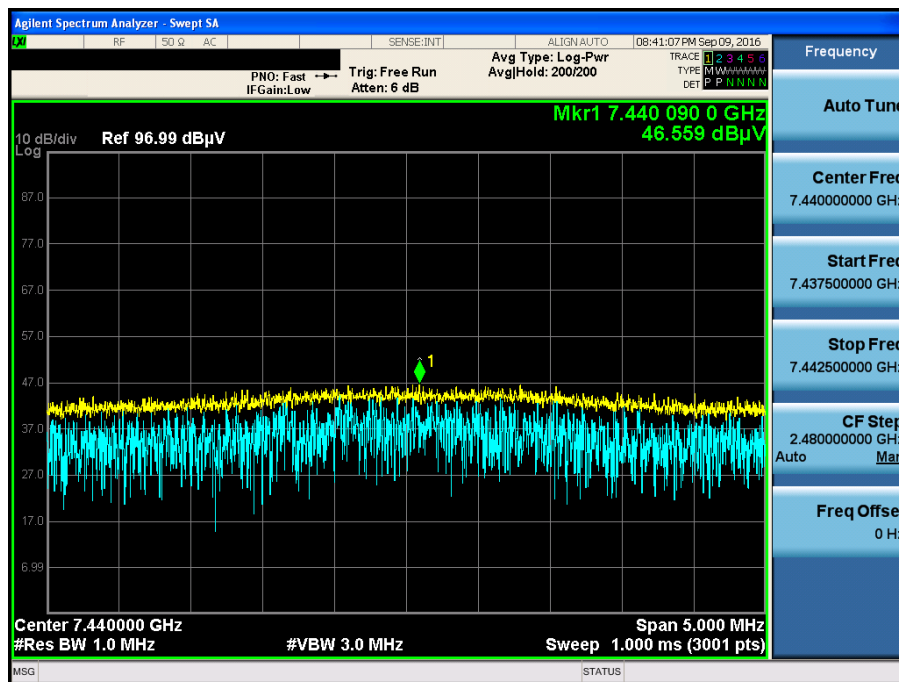


GFSK & Hopping mode & X & Hor

Detector Mode : PK

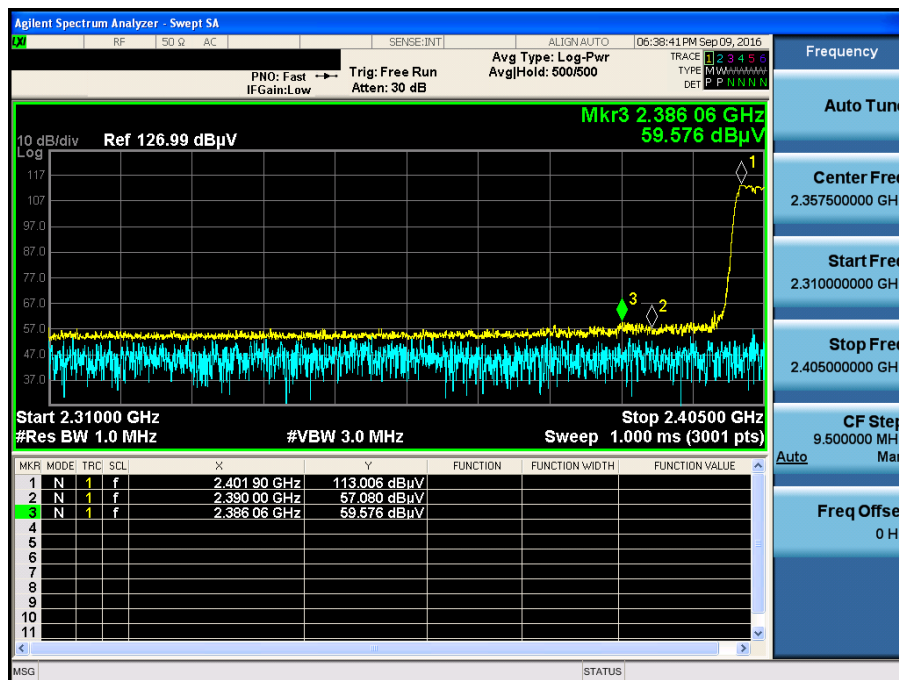


GFSK & Hopping mode & X & Hor

Detector Mode : AV

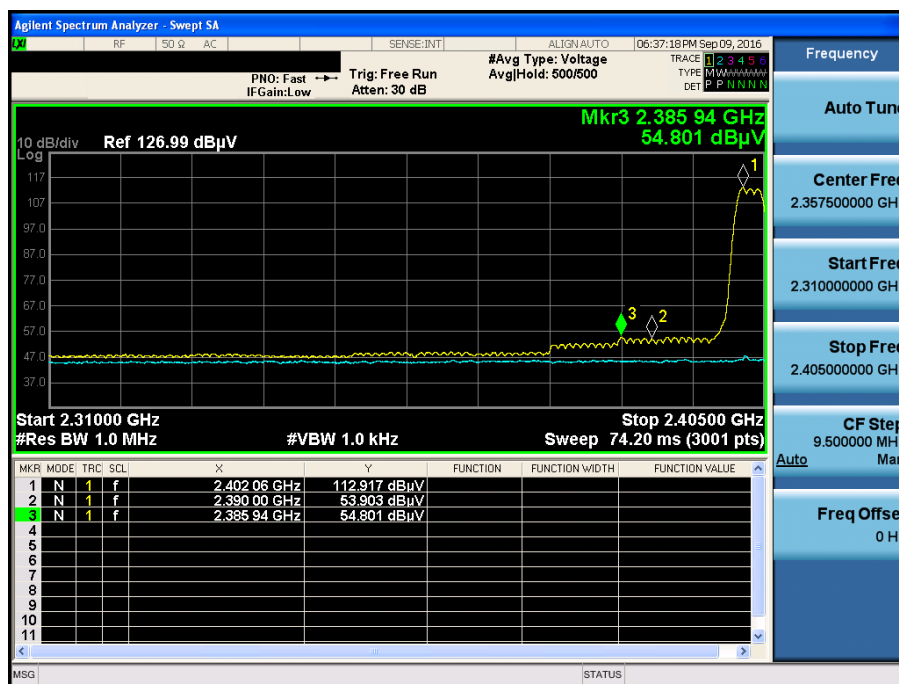

GFSK & Hopping mode & X & Hor

Detector Mode : PK

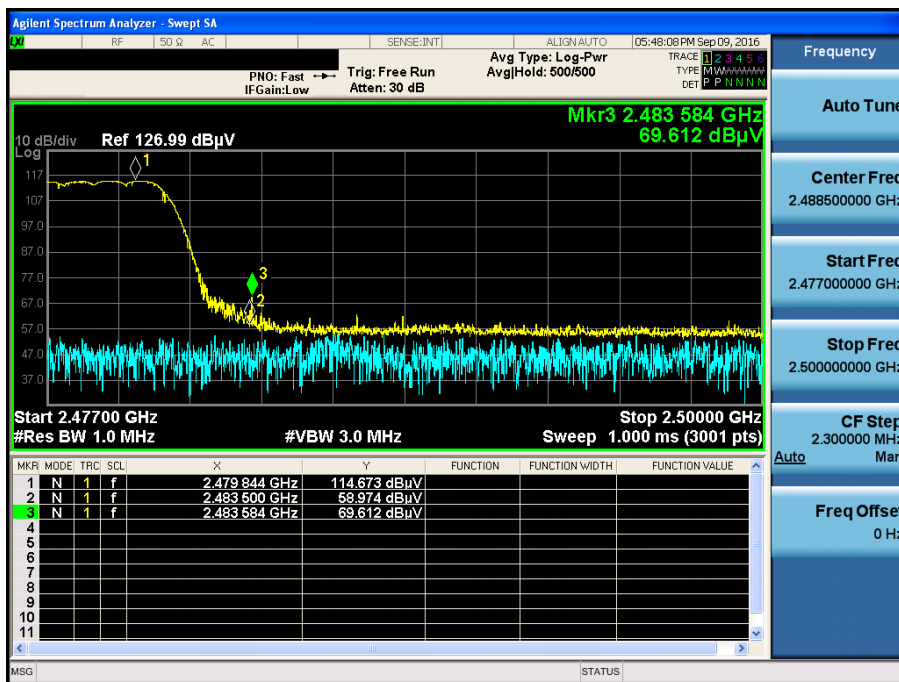


GFSK & Hopping mode & X & Hor

Detector Mode : AV




π /4DQPSK & Hopping mode & X & Hor

Detector Mode : PK

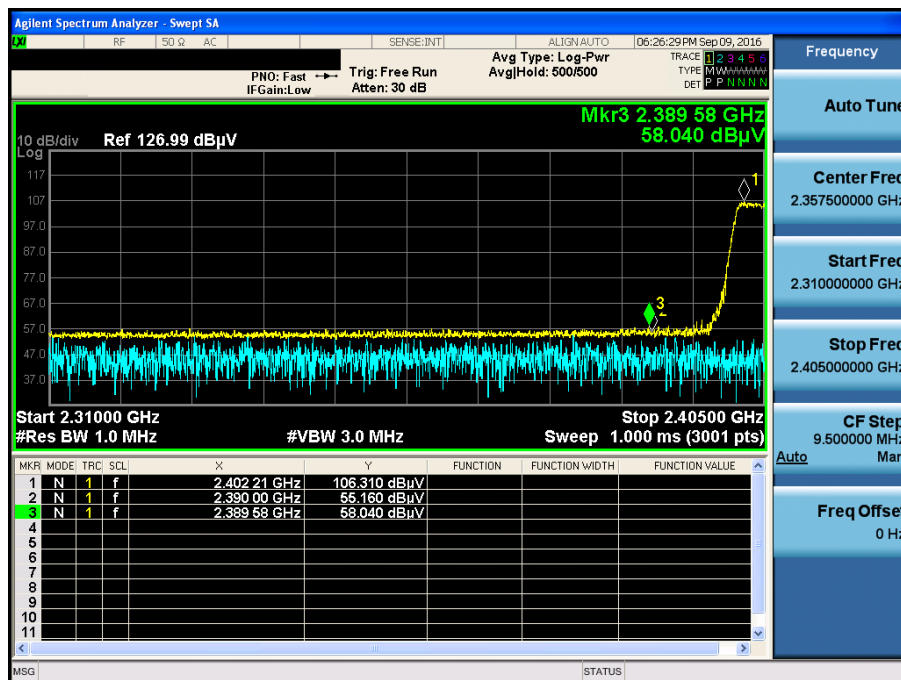


π /4DQPSK & Hopping mode & X & Hor

Detector Mode : AV

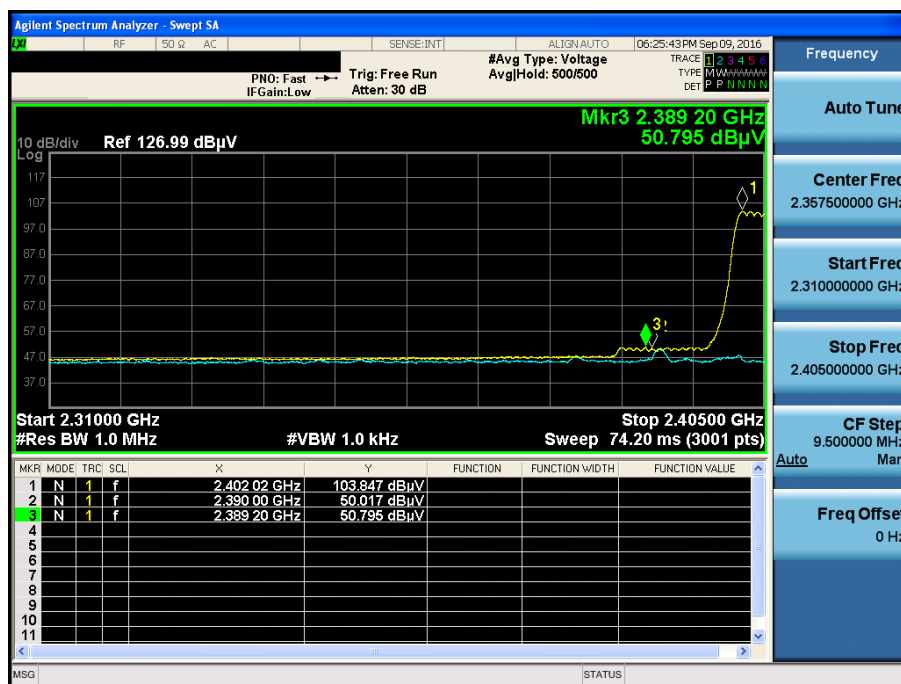

π /4DQPSK & Hopping mode & X & Hor

Detector Mode : PK

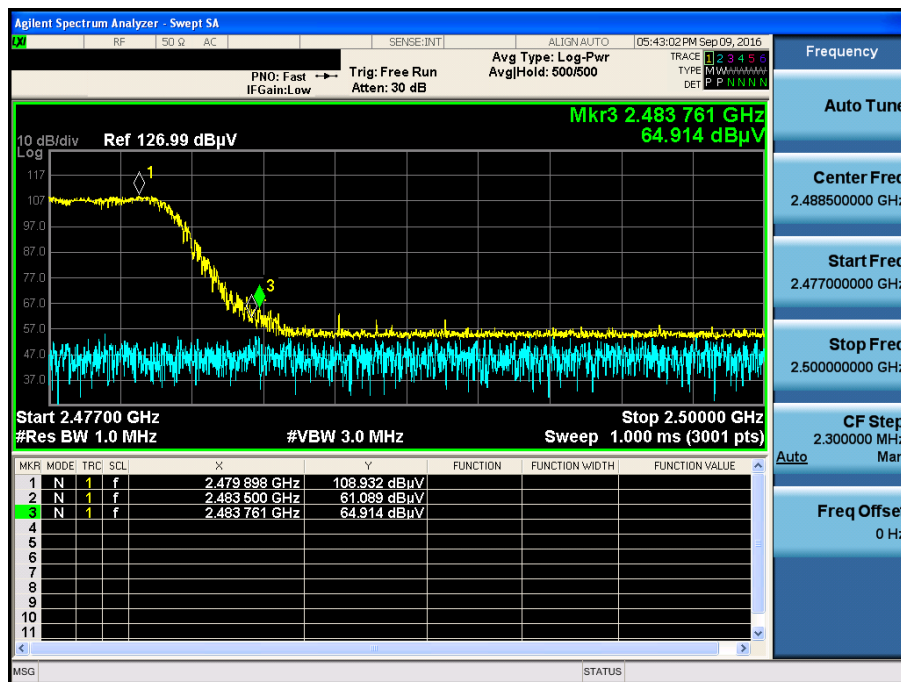


π /4DQPSK & Hopping mode & X & Hor

Detector Mode : AV



8DPSK & Hopping mode & X & Hor

Detector Mode : PK

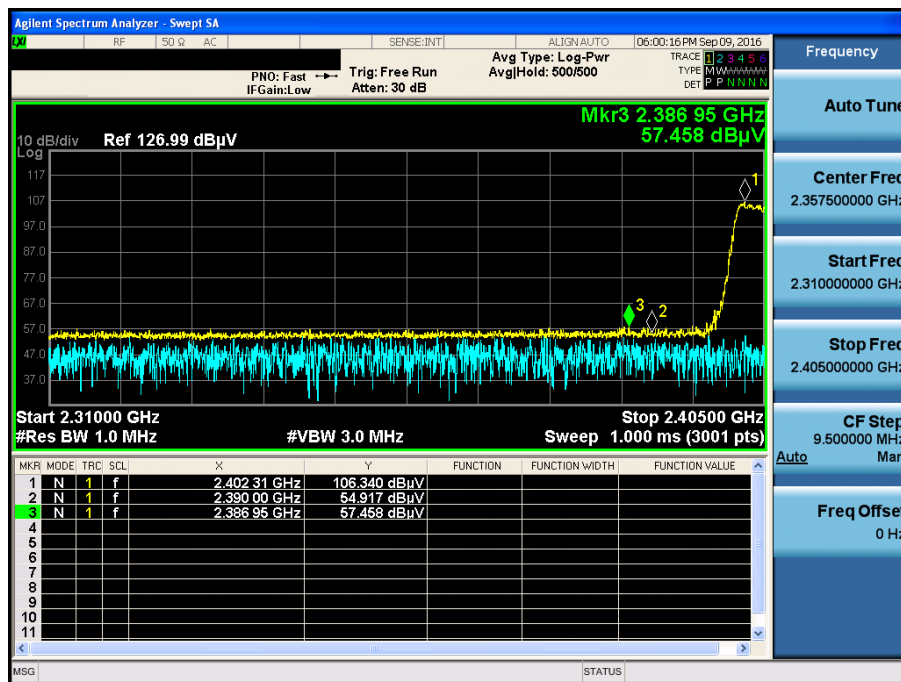


8DPSK & Hopping mode & X & Hor

Detector Mode : AV



8DPSK & Hopping mode & X & Hor

Detector Mode : PK

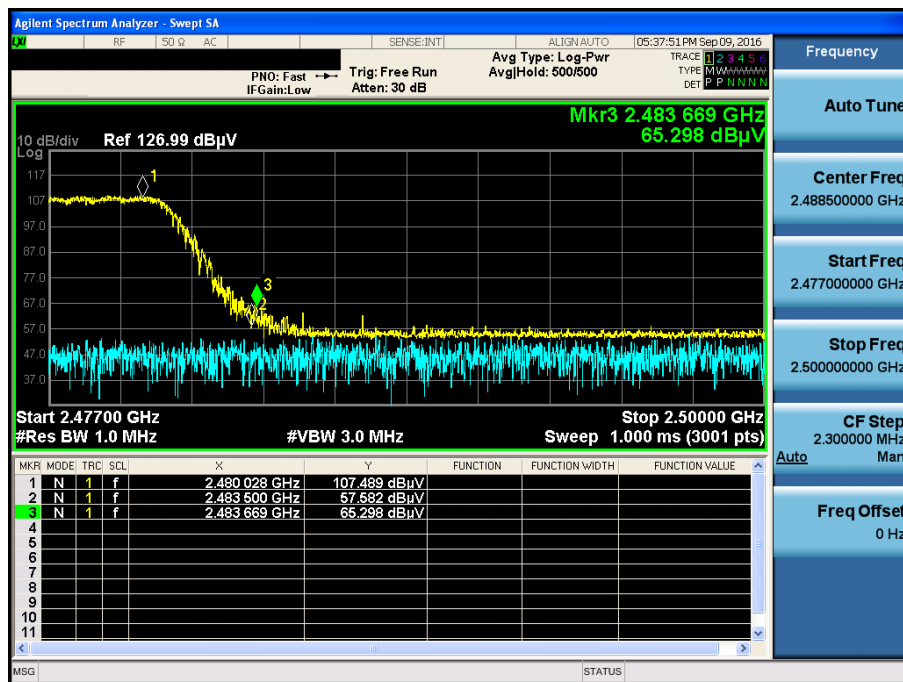

8DPSK & Hopping mode & X & Hor

Detector Mode : AV

