



시험 성적서

TEST REPORT

페이지(page) : (1) / (총(Total) 70)

성적서 번호 Report No.		ICRT-TR-E191908-0A	
신청자 Client	기관명 Name	SENA TECHNOLOGIES.Inc	
	주 소 Address	19, Heolleung-ro 569-gil, Gangnam-gu, Seoul, Korea	
시험대상품목 Sample description		50S	
모델명 Type designation		SP75	
정 격 Ratings		DC 3.7 V	
시험기간 Date of test		08. Oct. 2019 ~ 21. Oct. 2019	
시험방법/항목 Test Method/Item		FCC Part 15 Subpart C §15.247 / IC RSS-247	
시험결과 Test Results		Refer to 3. Test Summary	
확 인 Affirmation	작성자 Tested by	기술책임자 Technical Manager	
	성 명 Name Yeong-Hwan, Hong (Signature)	성 명 Name Jun-Hui, Lee (Signature)	

☐ 위 성적서는 고객이 제공한 시료에 대한 시험결과 이며, 용도 이외의 사용은 금합니다.
This is certified that the above mentioned products have been tested for the sample provided by customer and forbid the use except for original purpose.

☐ 위 성적서는 한국인정기구(KOLAS)인정과 관련이 없습니다.
The above test report is not related to accreditation by Korea Laboratory Accreditation scheme.

☐ 위 성적서는 주식회사 아이씨알의 승인 없이는 복제 및 재발급이 금지됩니다.
No part of this document may be duplicated or reproduced by any means without the express written permission of the ICR.

2019. 10. 22

주식회사 아이씨알 대표이사

The head of INTERNATIONAL CERTIFICATION REGISTRAR



본 성적서의 진위 확인은 G4B 혹은 ICR 홈페이지에서 가능합니다.

경기도 김포시 양촌읍 황금3로7번길 112

112, Hwanggeum3-ro 7beon-gil, Yangchon-eup, Gimpo-si, Gyeonggi-do, Korea



Contents

1. Applicant & Manufacturer & Test Laboratory Information	4
1.1 Applicant information	4
1.2 Manufacturer Information	4
1.3 Test Laboratory Information	4
2. Equipment under Test(EUT) Information	5
2.1 General Information	5
2.2 Additional Information	5
2.3 Test Frequency	5
2.4 Worst-Case	6
2.5 Mode of operation during the test	6
2.6 Modifications of EUT	6
3. Test Summary	7
3.1 Test standards and results	7
3.2 Purpose of the test	7
3.3 Test Methodology	7
3.4 Configuration of Test System	7
3.5 Antenna requirement	8
4. Used equipment on test	9
5. 20 dB Bandwidth & 99 % Bandwidth	10
5.1 Operating environment	10
5.2 Measurement method	10
5.3 Test setup	10
5.4 Test data	11
6. Carrier Frequency Separation	20
6.1 Operating environment	20
6.2 Measurement method	20
6.3 Test setup	20
6.4 Test data	21
7. Number of Hopping Frequency	25
7.1 Operating environment	25
7.2 Measurement method	25
7.3 Test setup	25
7.4 Test data	26
8. Average Time of Occupancy	29
8.1 Operating environment	29
8.2 Measurement method	29
8.3 Test setup	29
8.4 Test data	30
9. Maximum Conducted Output Power & e.i.r.p.	32
9.1 Operating environment	32
9.2 Measurement method	32
9.3 Test setup	32
9.4 Test data	33
10. Conducted Spurious Emission	40
10.1 Operating environment	40



10.2 Measurement method	40
10.3 Test setup	40
10.4 Test data	41
11. Radiated Spurious Emission	53
11.1 Operating environment	53
11.2 Measurement method	53
11.3 Test setup	53
11.4 Test data	55
12. Power Line Conducted Emission.....	66
12.1 Operating environment	66
12.2 Measurement method	66
12.3 Test setup	66
12.4 Test data	67

Revision History

Issued Report No.	Issued Date	Revisions	Effect Section
ICRT-TR-E191908-0A	22-Oct-2019	Initial Issue	All



1. Applicant & Manufacturer & Test Laboratory Information

1.1 Applicant information

Applicant	SENA TECHNOLOGIES.Inc
Address	19, Heolleung-ro 569-gil, Gangnam-gu, Seoul, Korea
Contact Person	Seunghyun Kim
Telephone No.	+82-2-573-7772
Fax No.	+82-2-573-7710
E-mail	shkim77@sena.com

1.2 Manufacturer Information

Manufacturer	SENA TECHNOLOGIES.Inc
Address	19, Heolleung-ro 569-gil, Gangnam-gu, Seoul, Korea

1.3 Test Laboratory Information

Conducted tests were performed at	
Laboratory	ICR Co., Ltd.
Address	112, Hwanggeum 3-ro 7beon-gil, Hagun-ri, Yangchon-eup, Gimpo-si, Gyeonggi-do, Korea
Telephone No.	+82-2-6351-9002
Fax No.	+82-2-6351-9007
RRA No.	KR0165
KOLAS No.	KT652



2. Equipment under Test(EUT) Information

2.1 General Information

Product Name	50S	
Brand Name	-	
Model Name	SP75	
Additional Model Name	-	
FCC ID / ISED number	S7A-SP75 / 8154A-SP75	
Hardware Version	1.0	
Software Version	2.6.0 (CSR Bluetest3)	
Power Supply	DC 3.7 V	
EUT Firmware Version	1.0	
Target Power	Bluetooth BDR	16.0
	Bluetooth EDR	4.0
EUT Serial Number	Test 1	

2.2 Additional Information

Equipment Class	DSS-Part 15 Spread Spectrum Transmitter / Frequency hopping systems (FHS)
Device Type	Stand-alone
Operating Frequency	2 402 MHz ~ 2 480 MHz
RF Output Power	16.16 dBm
Number of Channel	79
Modulation Type	GFSK / $\pi/4$ -DQPSK / 8DPSK
Antenna Type	Chip Antenna
Antenna Gain	0.93 dBi
Antenna Operating Mode	Single Antenna Equipment with only one antenna

2.3 Test Frequency

Test mode	Test frequency (MHz)		
	Lowest frequency	Middle frequency	High frequency
GFSK	2 402	2 441	2 480
$\pi/4$ -DQPSK	2 402	2 441	2 480
8DPSK	2 402	2 441	2 480



2.4 Worst-Case

BDR	DH5(GFSK)
EDR	3-DH5(8DPSK)

Note: The power measurement has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.

2.5 Mode of operation during the test

- The EUT is continuous transmission mode during the test with set at Low Channel, Middle Channel, and High Channel. To get a maximum radiated emission levels from the EUT, the EUT was moved throughout the XY, YZ, XZ planes.

2.6 Modifications of EUT

- None



3. Test Summary

3.1 Test standards and results

FCC Part 15 Subpart C / IC RSS-Gen & RSS-247				
Clause		Test items	Applied	Results
§15.247 (a) (1)	RSS-247 5.1 (a) RSS-Gen 6.7	20 dB Bandwidth & 99 % Bandwidth	☒	PASS
§15.247 (a) (1)	RSS-247 5.1 (b)	Carrier Frequency Separation	☒	PASS
§15.247 (a) (1) (iii)	RSS-247 5.1 (d)	Number of Hopping Frequencies	☒	PASS
§15.247 (a) (1) (iii)	RSS-247 5.1 (d)	Average Time of Occupancy	☒	PASS
§15.247 (b) (1)	RSS-247 5.4 (b)	Maximum Conducted Output Power & e.i.r.p.	☒	PASS
§15.247 (d)	RSS-247 5.5	Conducted Spurious Emission	☒	PASS
§15.247 (d) §15.209 §15.205	RSS-247 5.5 RSS-GEN 8.9 RSS-GEN 8.10	Radiated Spurious Emission	☒	PASS
§15.207	RSS-GEN 8.8	Power Line Conducted Emission	☒	PASS
§15.203	-	Antenna Requirement	☒	PASS

3.2 Purpose of the test

- To determine whether the equipment under test fulfills the requirements of the standards stated in FCC Part 15 Subpart C Section 15.247 and IC RSS-247

3.3 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013.

Radiated testing was performed at a distance of 3 m from EUT to the antenna.

3.4 Configuration of Test System

3.4.1 Radiated emission test

Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 m Semi Anechoic Chamber. The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

3.4.2 AC powerline conducted emission test

The EUT was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.



3.5 Antenna requirement

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section.

The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.

Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.5.1 Result: Pass

The transmitter has a **Chip Antenna**. The directional gain of the antenna is **0.93 dBi**.



4. Used equipment on test

	Description	Model Name	Serial Number	Manufacturer	Next Cal. (cycle)
☒	Spectrum analyzer	FSW85	100864	Rohde & Schwarz	2020. 03. 04 (1Y)
☐	Spectrum analyzer	FSV40	101455	Rohde & Schwarz	2020 .06. 27 (1Y)
☒	Signal Generator	SMB100A	180607	Rohde & Schwarz	2020. 03. 04 (1Y)
☒	Wideband Power Sensor	NRP-Z81	103673	Rohde & Schwarz	2020. 03. 05 (1Y)
☐	Open Switch and Control Platform	OSP150	101000	Rohde & Schwarz	2020. 03. 05 (1Y)
☐	Environmental Test Chamber	MHK-408NKDA	1060908	TERCHY	2020. 03. 04 (1Y)
☒	DC Power Supply	XDL 35-5P	J00385373	Sorensen	2020. 03. 05 (1Y)
☐	DC Power Supply	6603D	672483	Topward	2020. 03. 05 (1Y)
☒	Loop Antenna	HFH2-Z2	100506	Rohde & Schwarz	2021. 06. 27 (2Y)
☒	TRILOG BROADBAND ANTENNA	VULB9162	120	SCHWARZBECK	2020. 11. 23 (2Y)
☒	RF Pre Amplifier	SCU08	100747	Rohde & Schwarz	2020. 04. 17 (1Y)
☒	DOUBLE-RIDGE WAVEGUIDE HORN ANTENNA	HF907	102556	Rohde & Schwarz	2021. 08. 19 (2Y)
☒	RF Pre Amplifier	SCU18	102342	Rohde & Schwarz	2020. 04. 17 (1Y)
☒	Horn Antenna	LB-42-10-C-KF	J202024625	AINFO Inc.	2020. 04. 23 (2Y)
☒	RF Pre Amplifier	AMF-4F-18265-35-8P-1	771846	MITEQ	2020. 03. 04 (1Y)
☒	Horn Antenna	LB-28-10-C-KF	J202024627	AINFO Inc.	2020. 04. 23 (2Y)
☐	RF Pre Amplifier	AMF-4D-260400-45-6P	779919	MITEQ	2020. 03. 04 (1Y)
☒	EMI Test Receiver	ESR26	101461	Rohde & Schwarz	2020. 04. 17 (1Y)
☒	EMI Test Receiver	ESR26	101461	Rohde & Schwarz	2020. 04. 17 (1Y)
☒	LISN	ENV216	102194	Rohde & Schwarz	2020. 04. 16 (1Y)
☒	ATTENUATOR	WA76-20-1313	1633	WEINSCHTEL	2020. 03. 04 (1Y)
☒	RF Cable	MULTIFLEX_86	-	HUBER & SUHNER	-
☒	Chamber Cable	mw221	-	Junkosha	-

※ All test equipment used is calibration on a regular basis.



5. 20 dB Bandwidth & 99 % Bandwidth

5.1 Operating environment

Temperature : 22 °C


Relative humidity : 46 %

5.2 Measurement method

Standard : §15.247 (a) (2) / RSS-247 (5.1 a) & RSS-Gen(6.7)

5.3 Test setup

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 10 kHz, and peak detection was used. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.





5.4 Test data


Test date : 08. Oct. 2019
Operating mode : Transmit mode
Test Result : Pass


5.4.1 Measured Results

Operating Mode	Modulation Type	Channel (Frequency)	20 dB Bandwidth (kHz)	99 % Bandwidth (kHz)	Two-third 20 dB bandwidth of the hopping channel (kHz)
Transmit	BDR	0 (2 402 MHz)	961.00	890.21	640.67
		39 (2 441 MHz)	1 021.00	878.53	680.67
		78 (2 480 MHz)	1 021.00	883.57	680.67
	EDR (3 Mbps)	0 (2 402 MHz)	1 309.00	1 179.42	872.67
		39 (2 441 MHz)	1 333.00	1 171.74	888.67
		78 (2 480 MHz)	1 309.00	1 169.52	872.67




5.4.2 Measured Graph (20 dB Bandwidth)

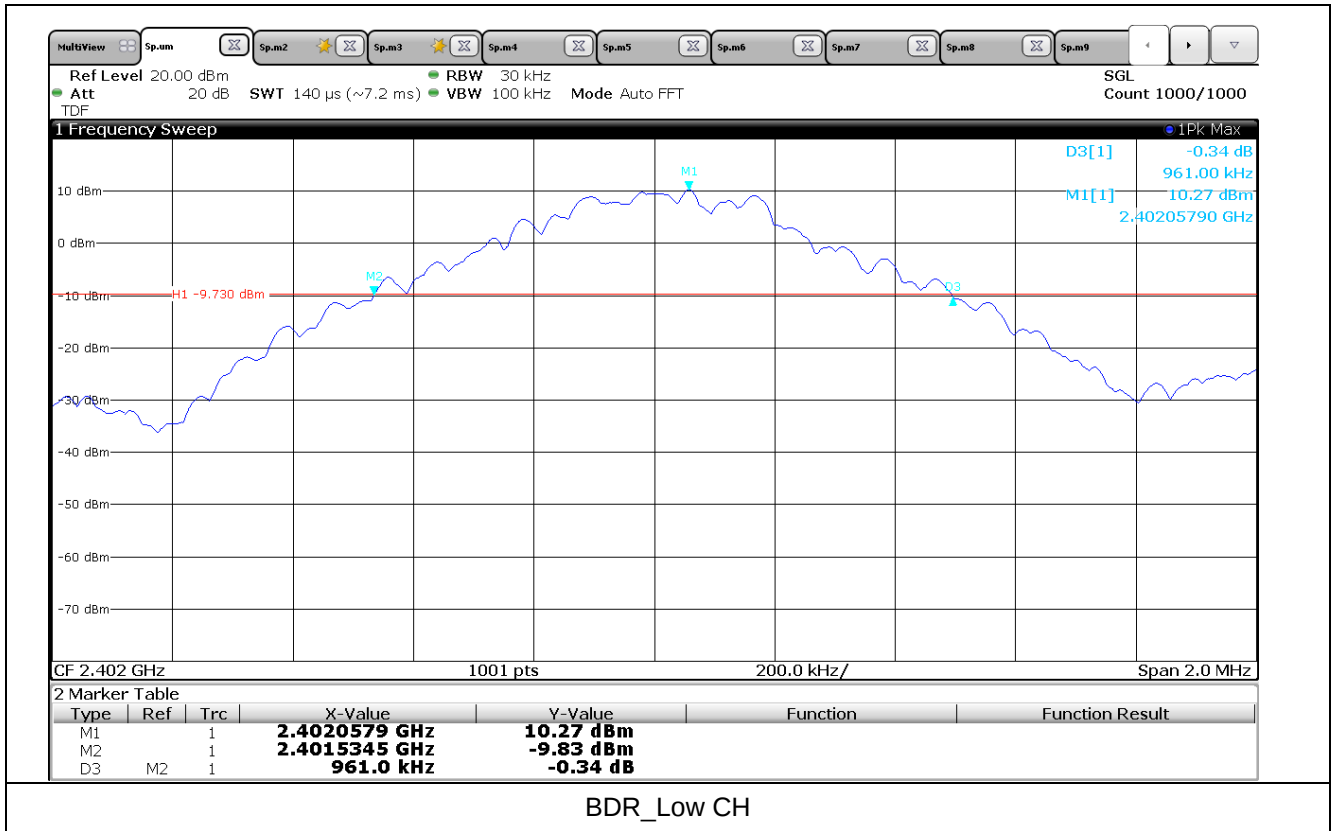


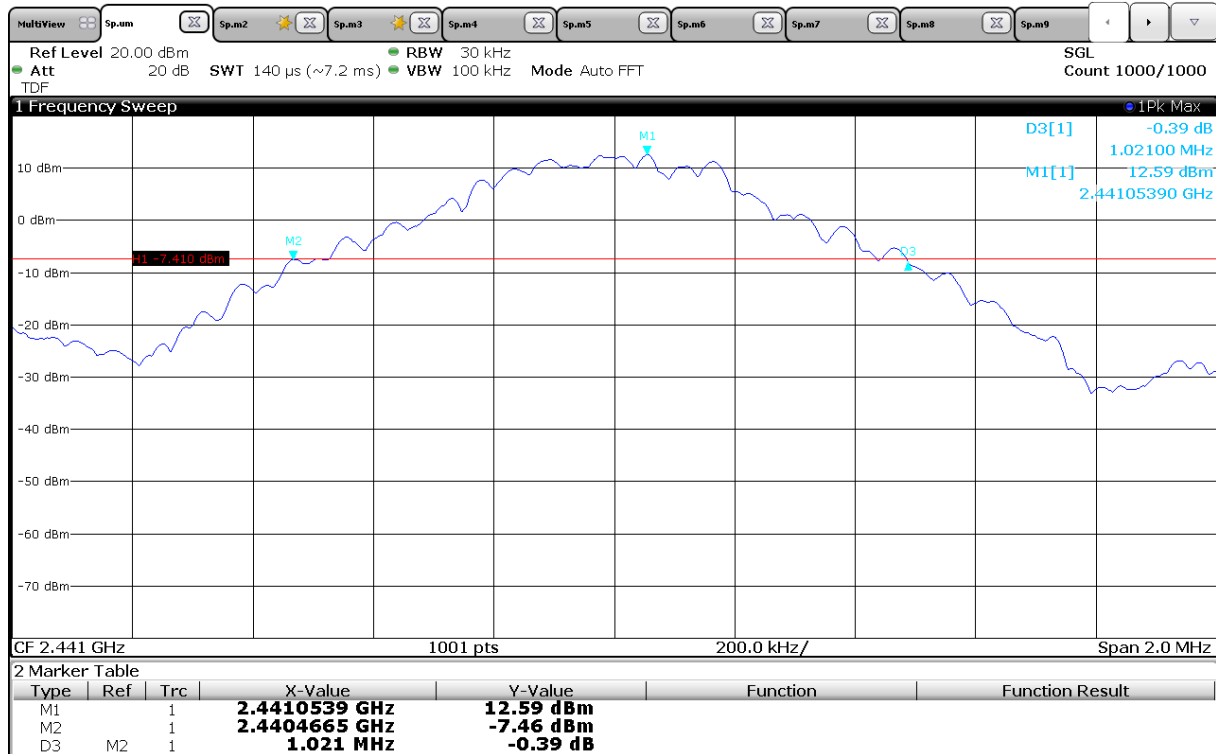


BDR_Mid CH

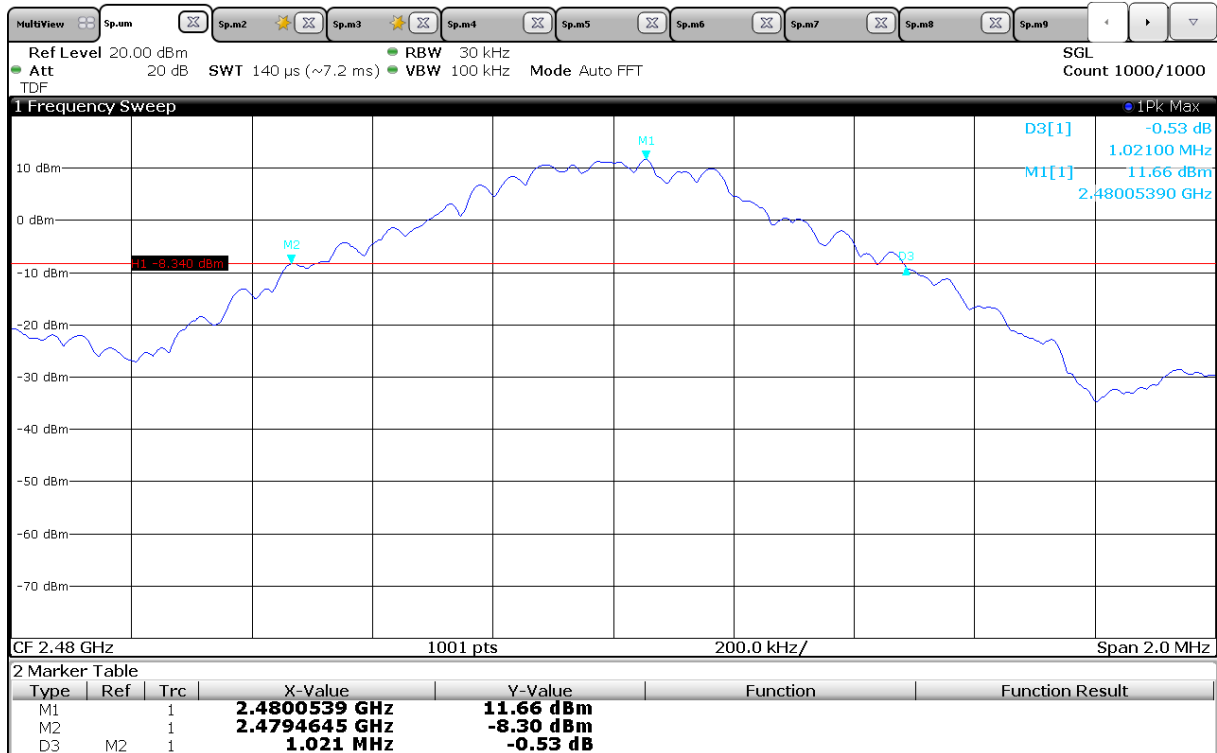


BDR_High CH

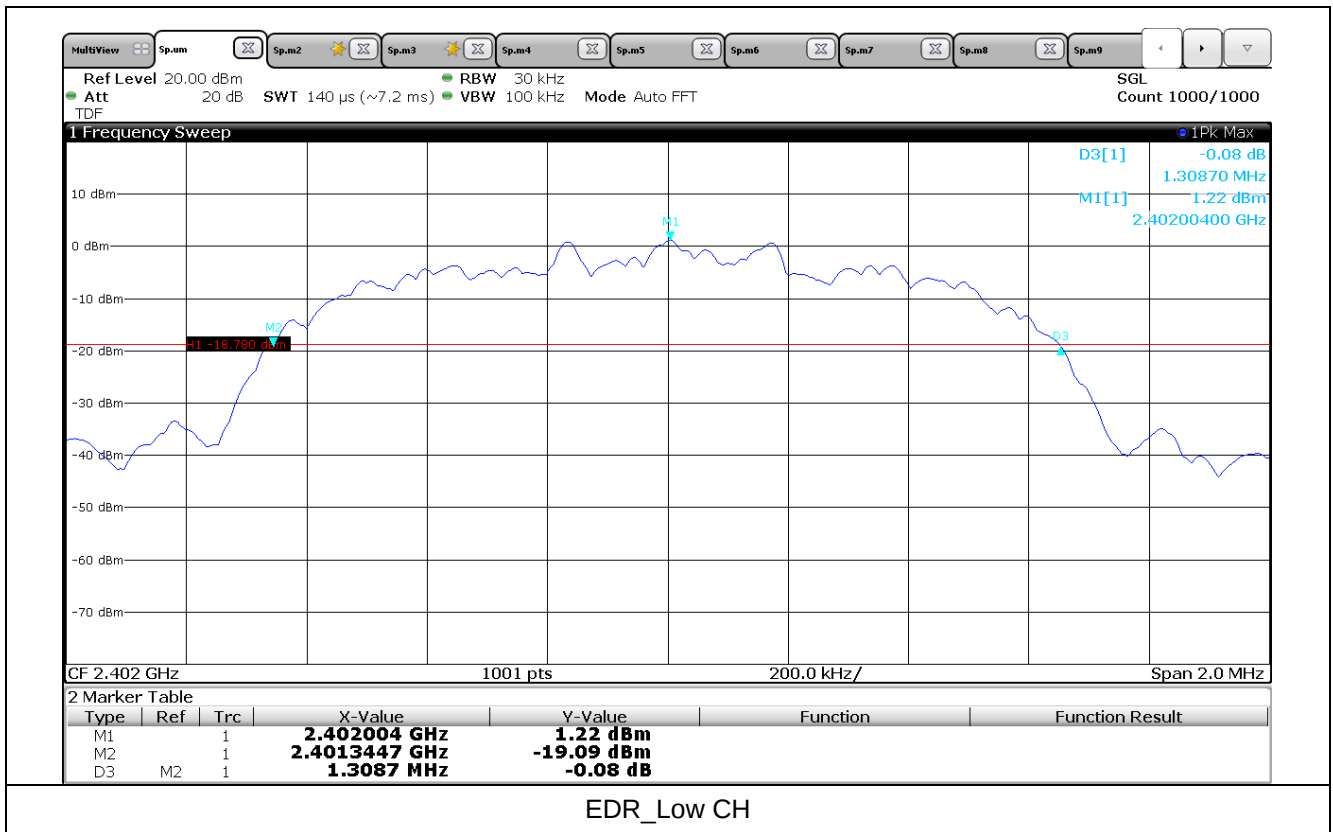

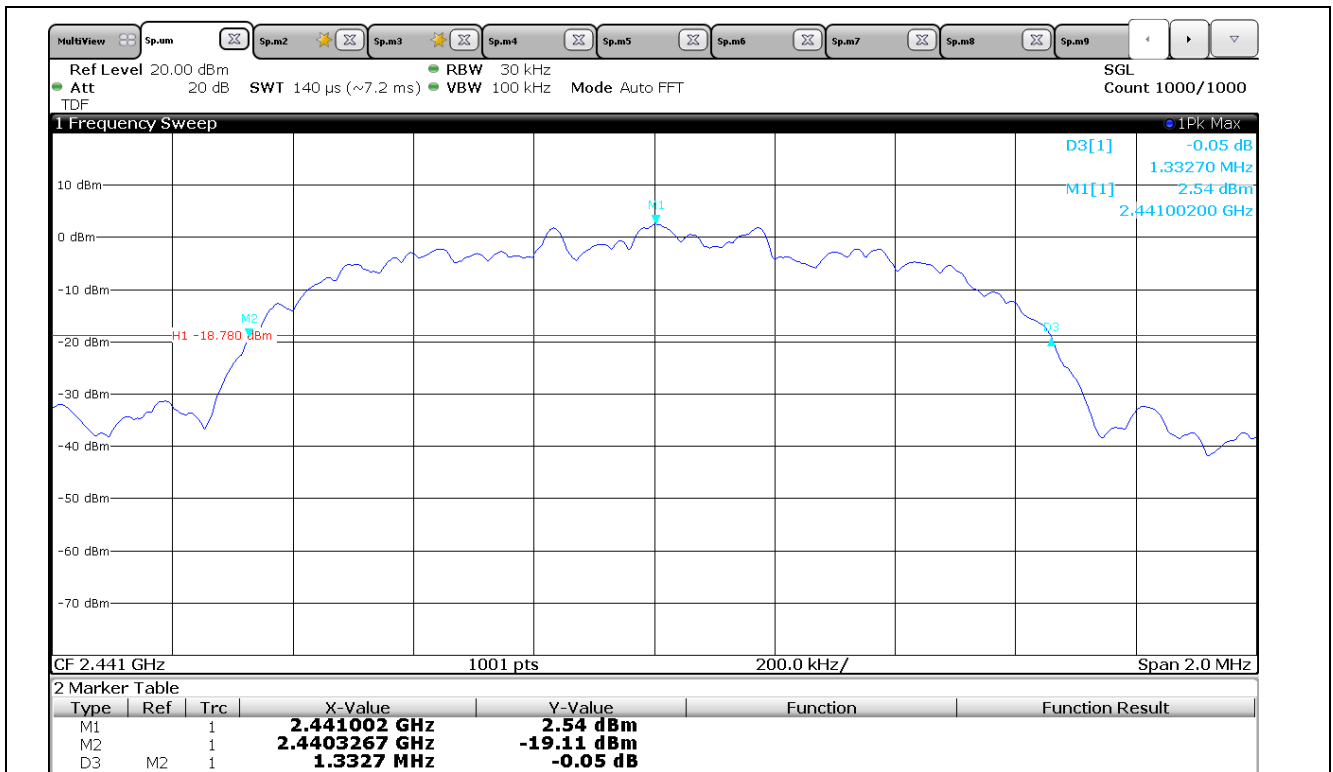


EDR_Mid CH

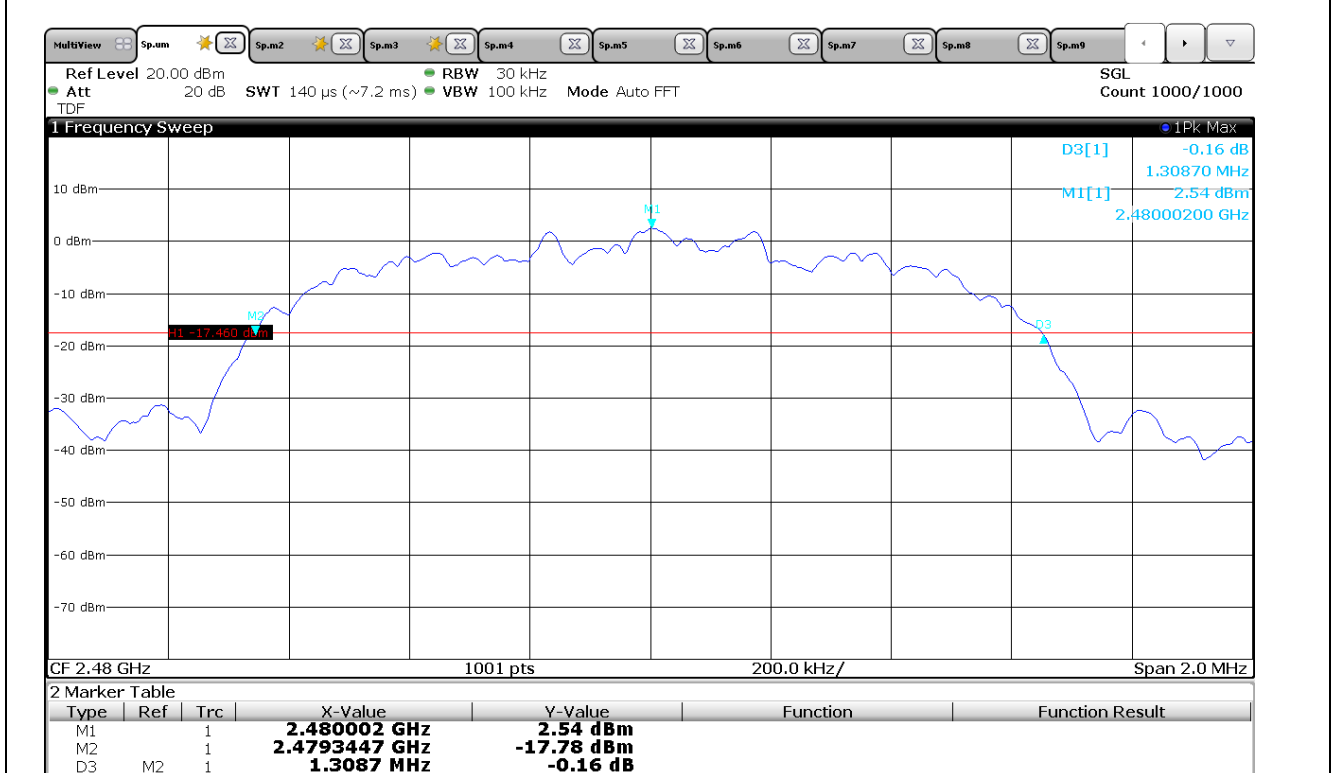


EDR_High CH




5.4.3 Measured Graph (99 % Bandwidth)

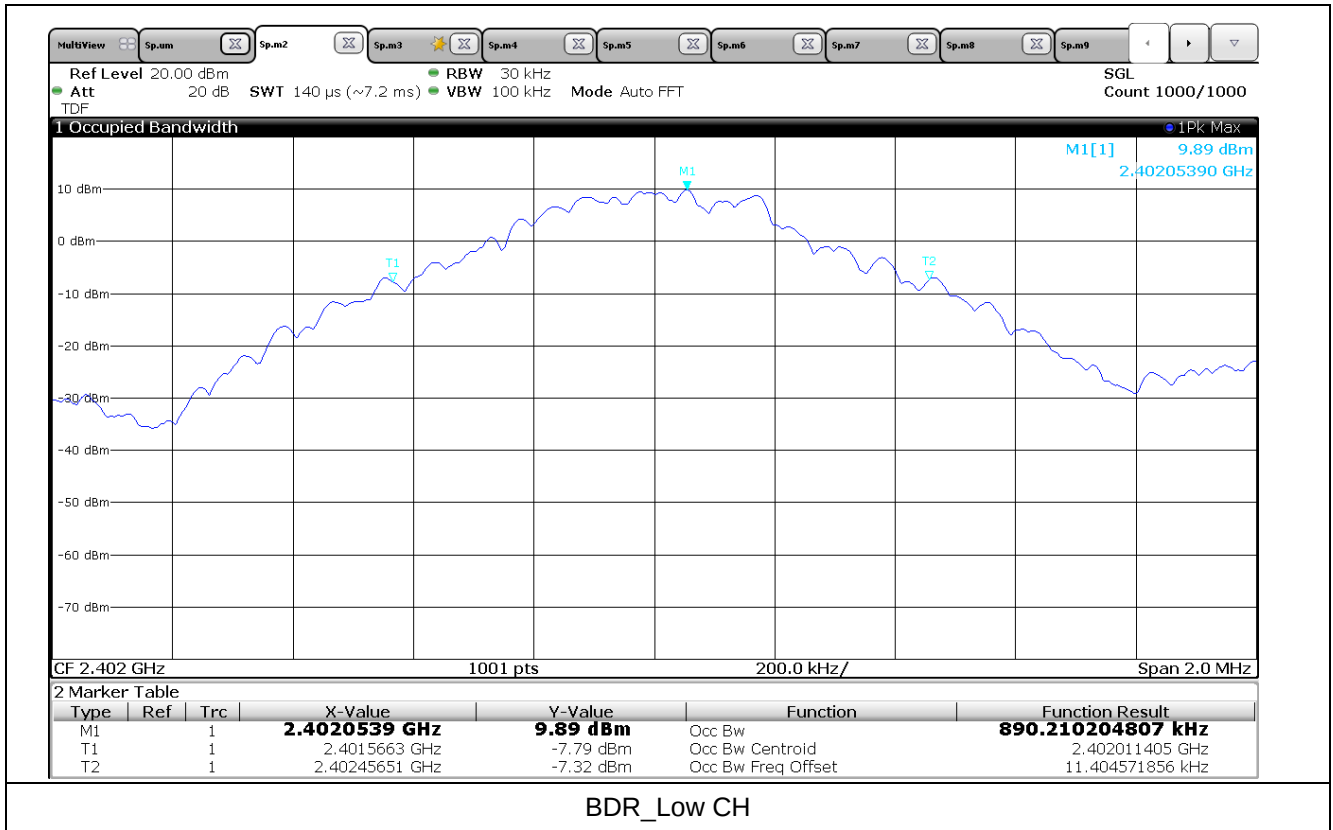


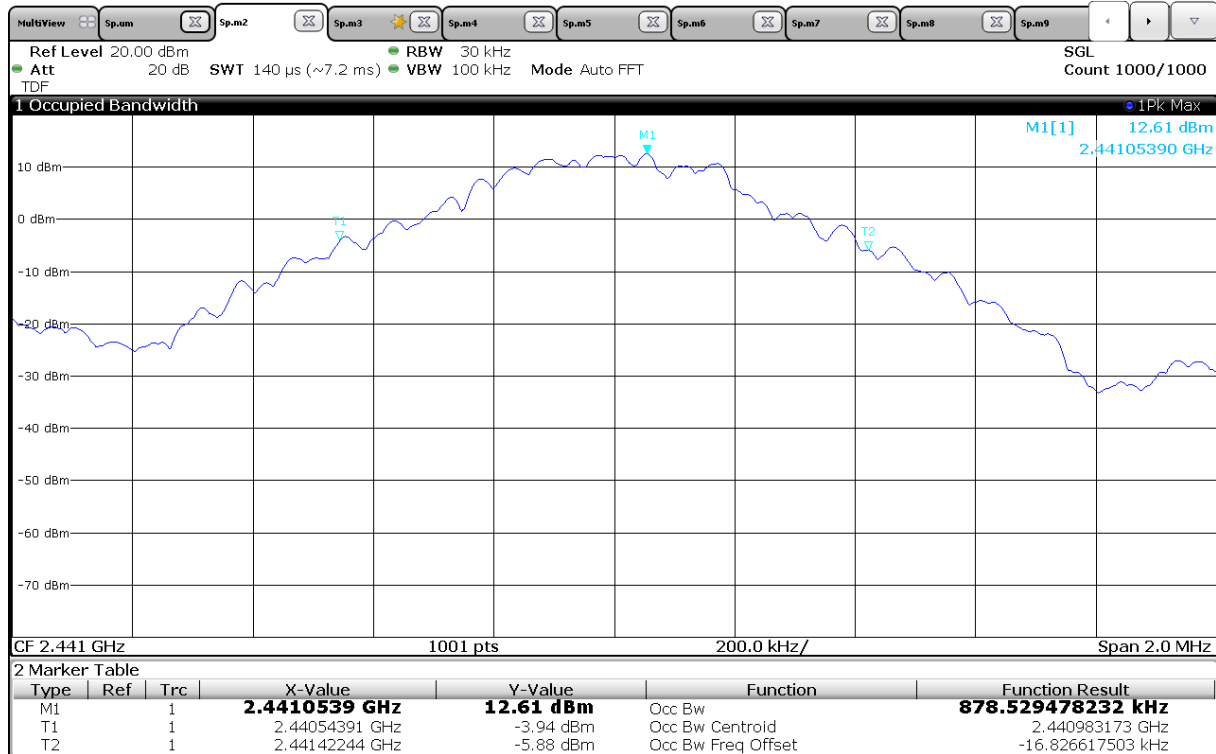


BDR_Mid CH

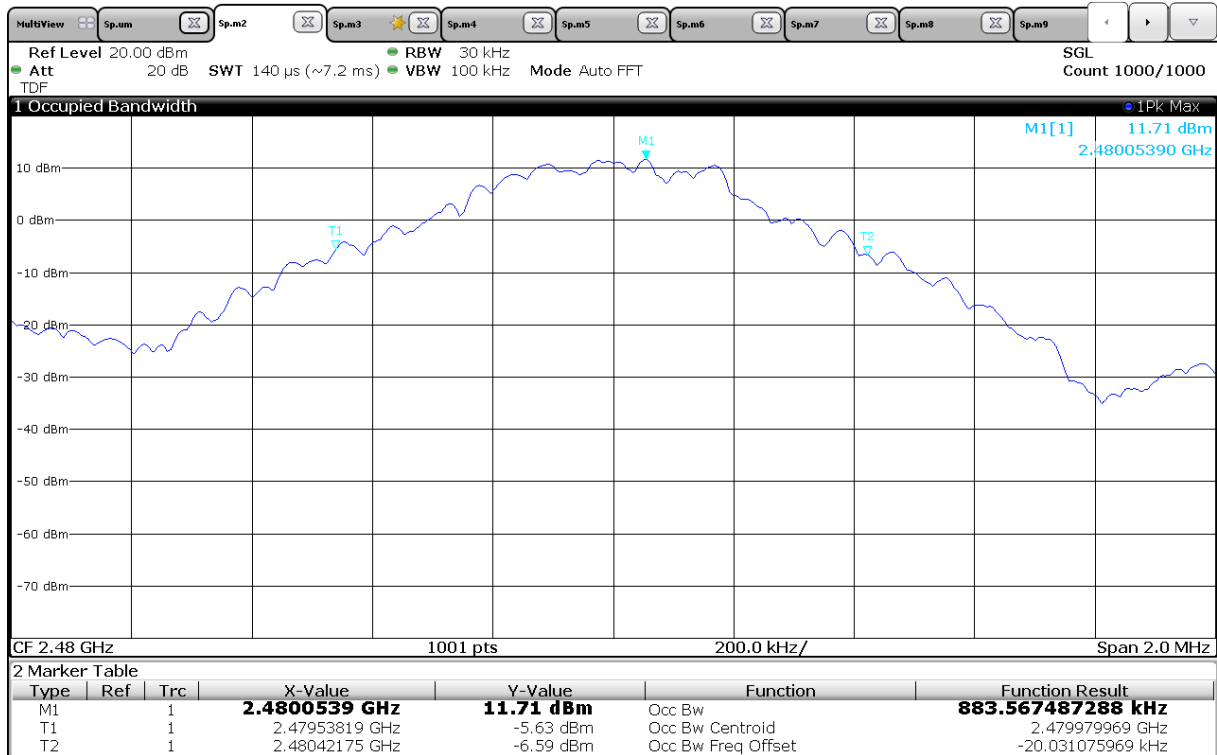


BDR_High CH

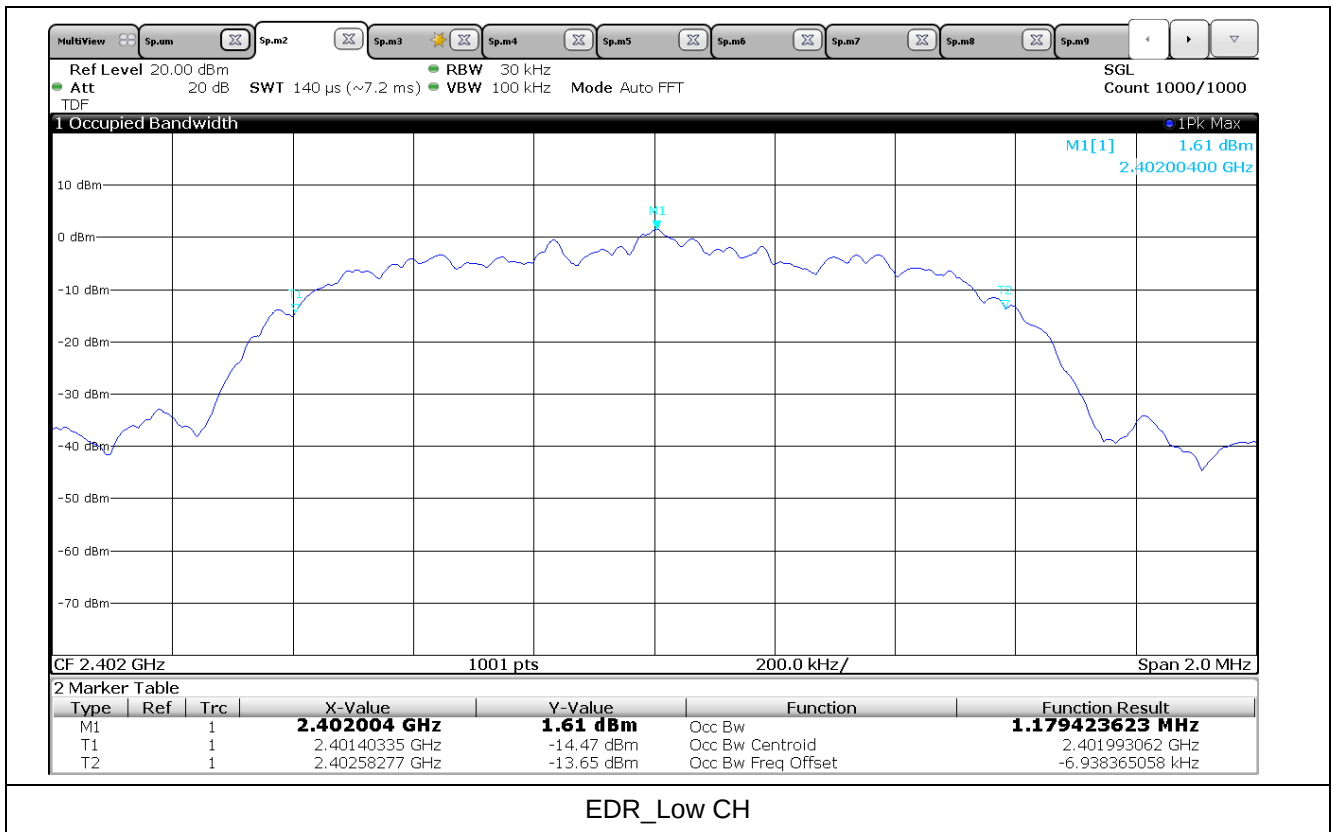

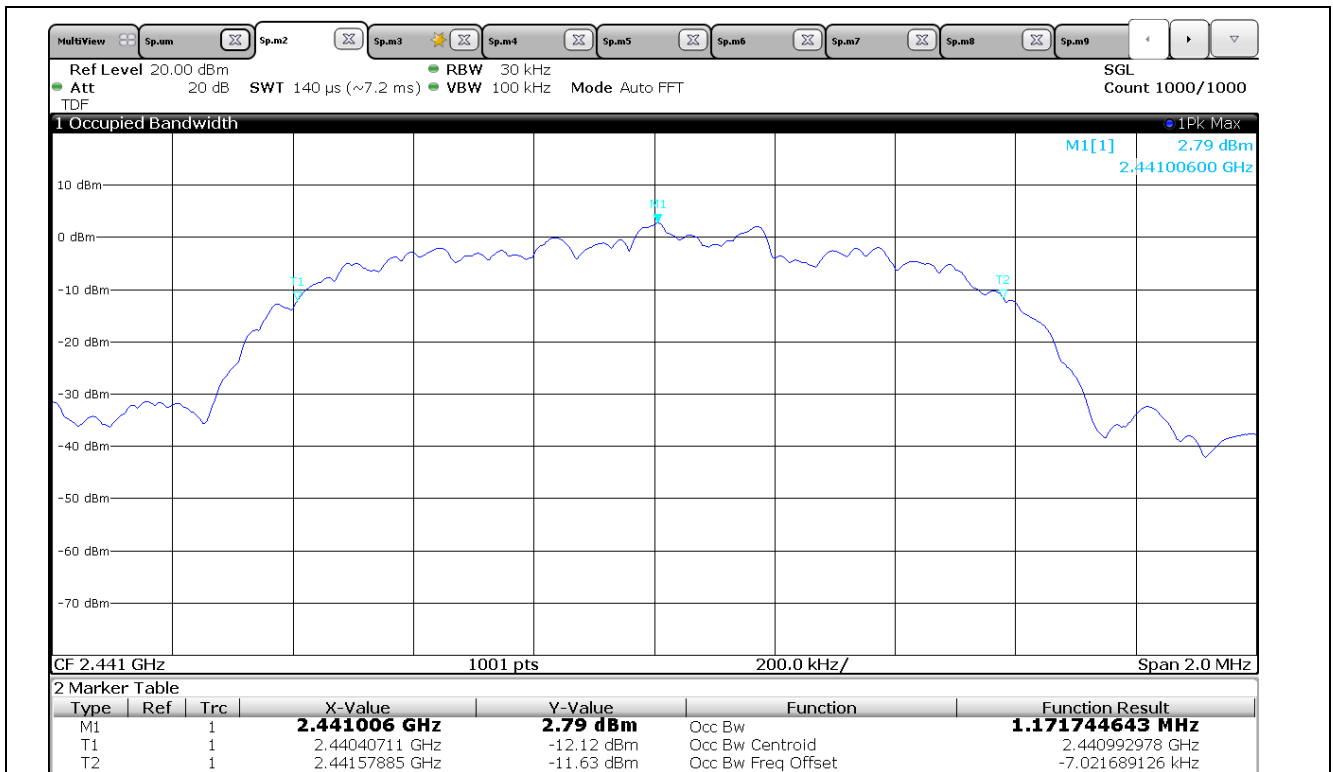

EDR_Mid CH

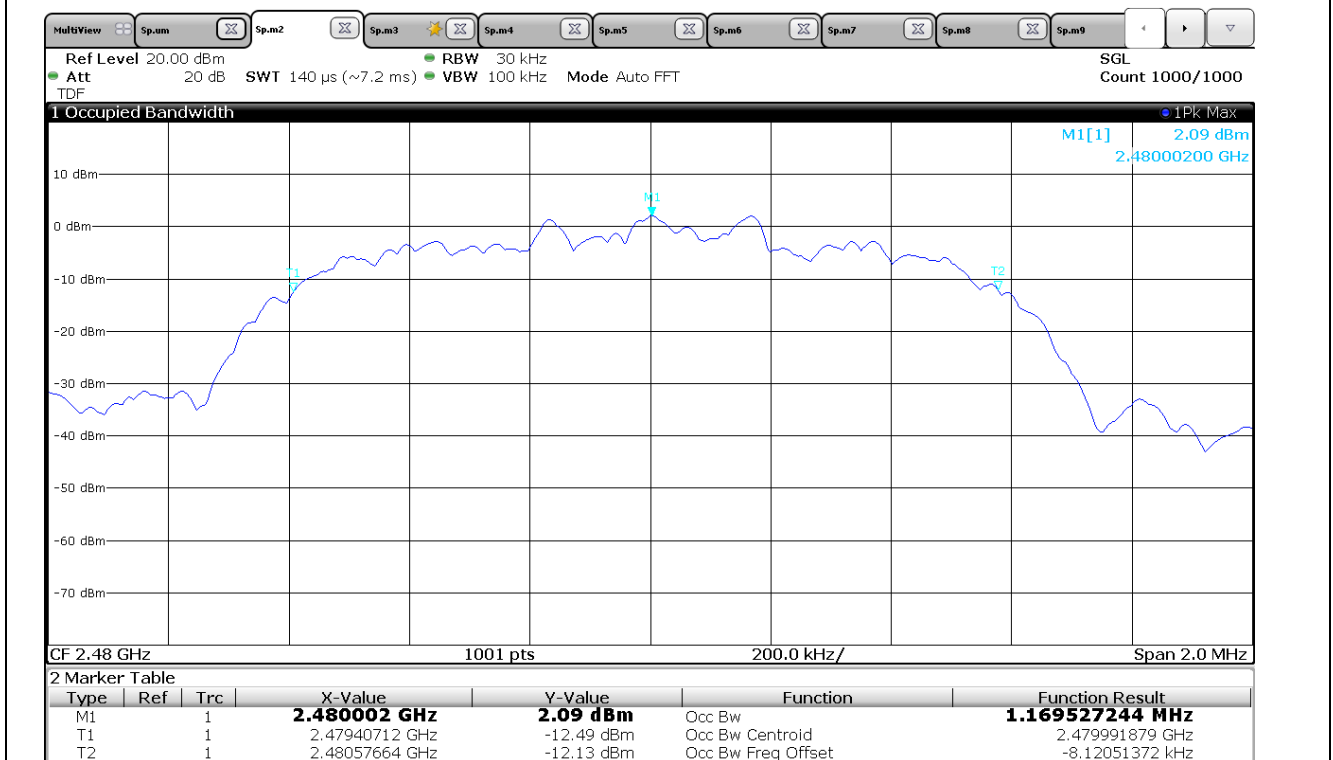

EDR_High CH



6. Carrier Frequency Separation

6.1 Operating environment


Temperature : 22 °C
Relative humidity : 46 %

6.2 Measurement method

Standard : §15.247 (a) (1) / RSS-247 (5.1 b)

6.3 Test setup

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 10 MHz. The analyzer is set to peak hold then a pseudo-random hopping sequence of the transmitter is captured. The mark delta function was used to measure the frequency separation between two adjacent hopping channels.






6.4 Test data


Test date : 08. Oct. 2019
 Operating mode : Transmit mode
 Test Result : Pass

6.4.1 Measured Results


Modulation type	Channel (Frequency)	Separation (kHz)	Two-third 20 dB bandwidth of the hopping channel (kHz)	Limit
BDR (1 Mbps)	0 (2 402 MHz)	1056.40	623.33	25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater
	39 (2 441 MHz)	999.00	626.33	
	78 (2 480 MHz)	1001.50	624.67	
EDR (3 Mbps)	0 (2 402 MHz)	999.00	837.87	
	39 (2 441 MHz)	999.00	835.20	
	78 (2 480 MHz)	999.00	836.53	

6.4.2 Measured Graph

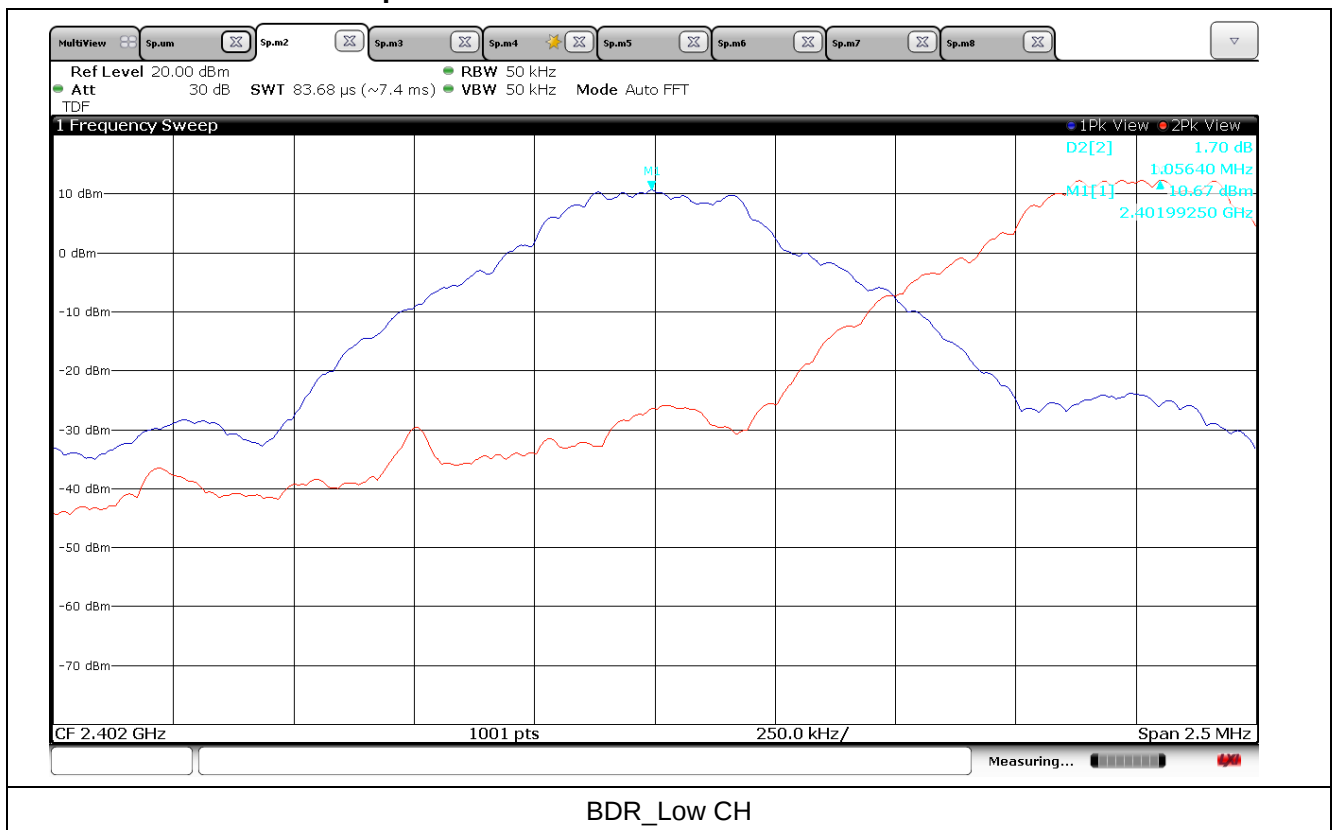


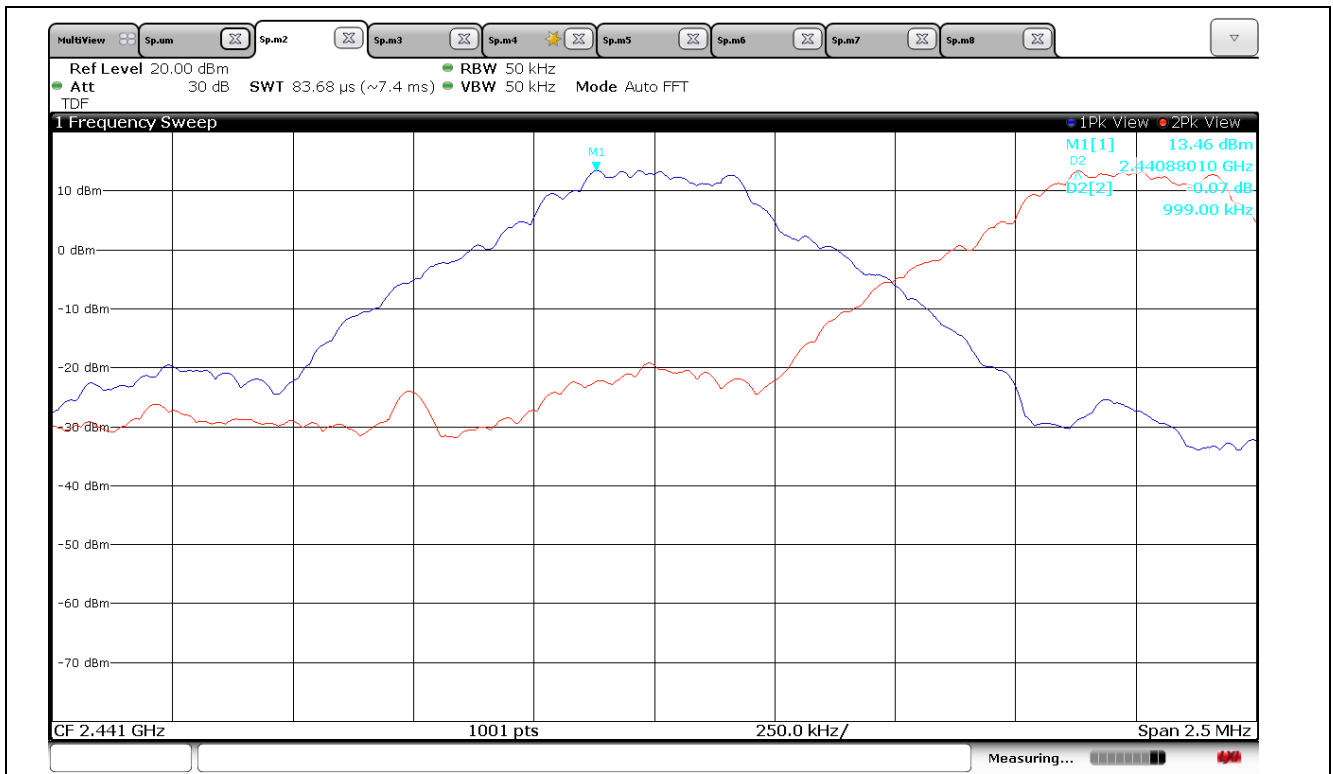


BDR_Mid CH

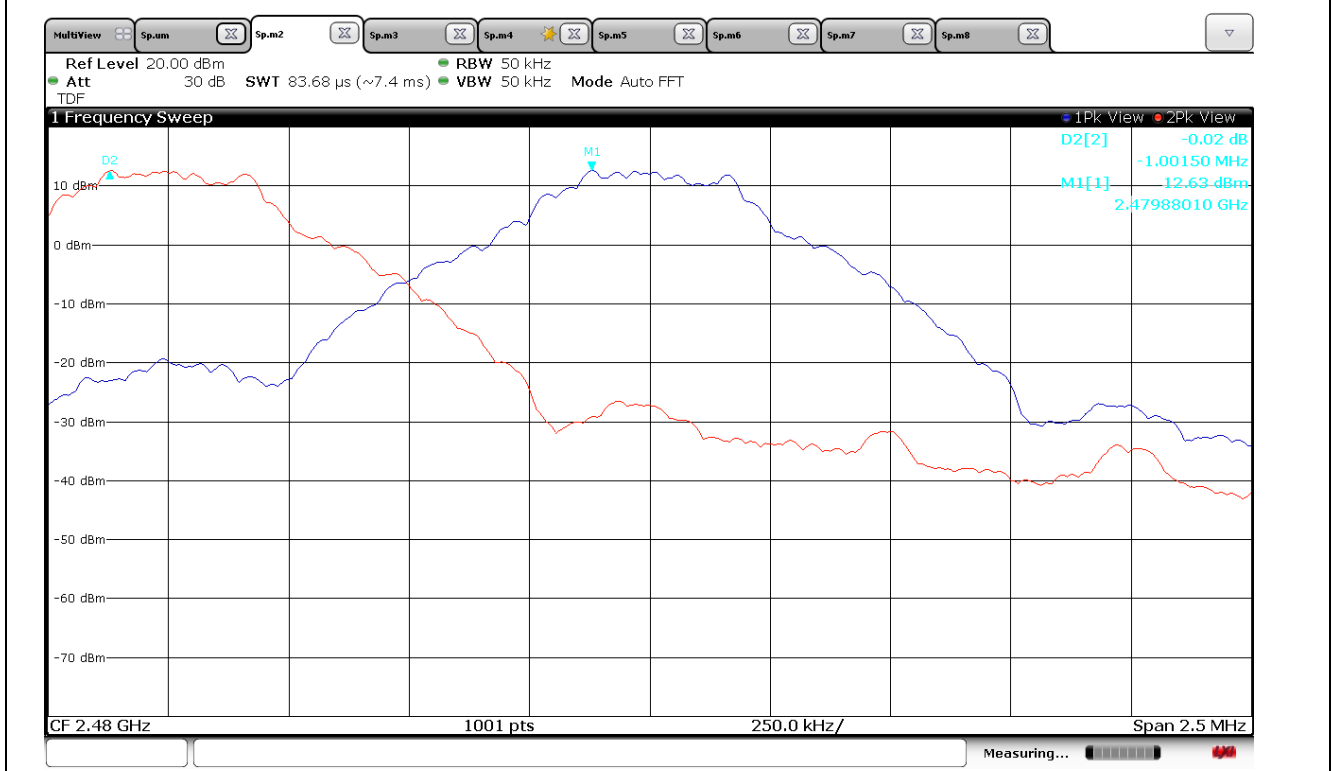


BDR_High CH

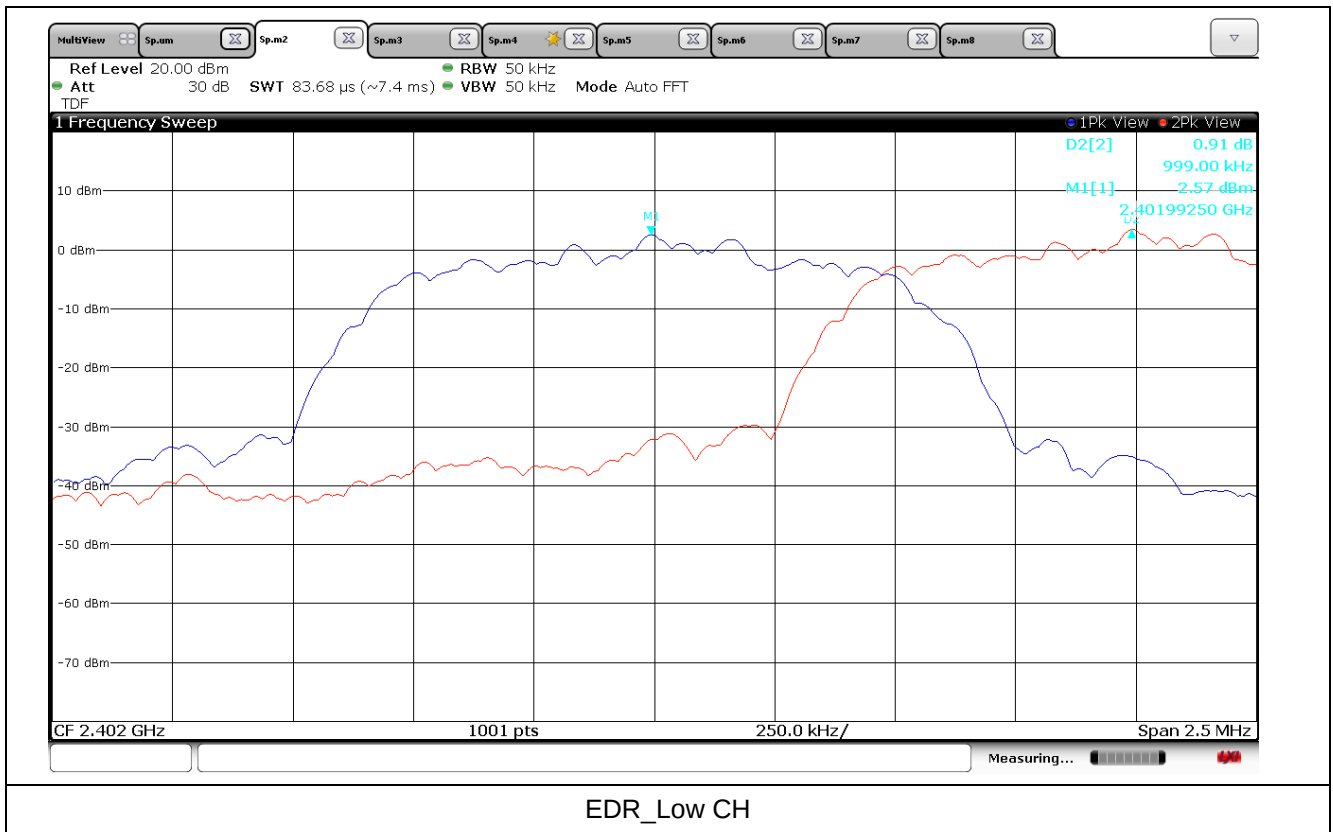

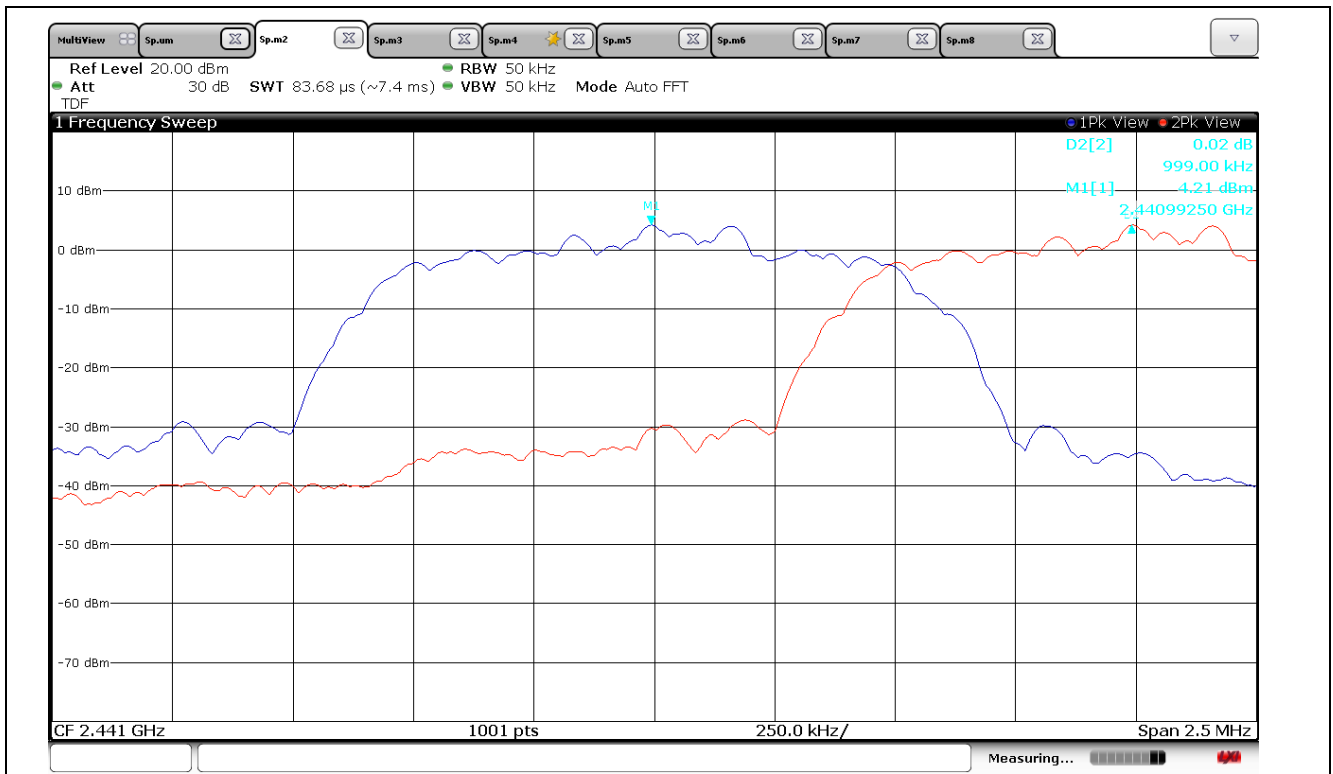

EDR_Mid CH

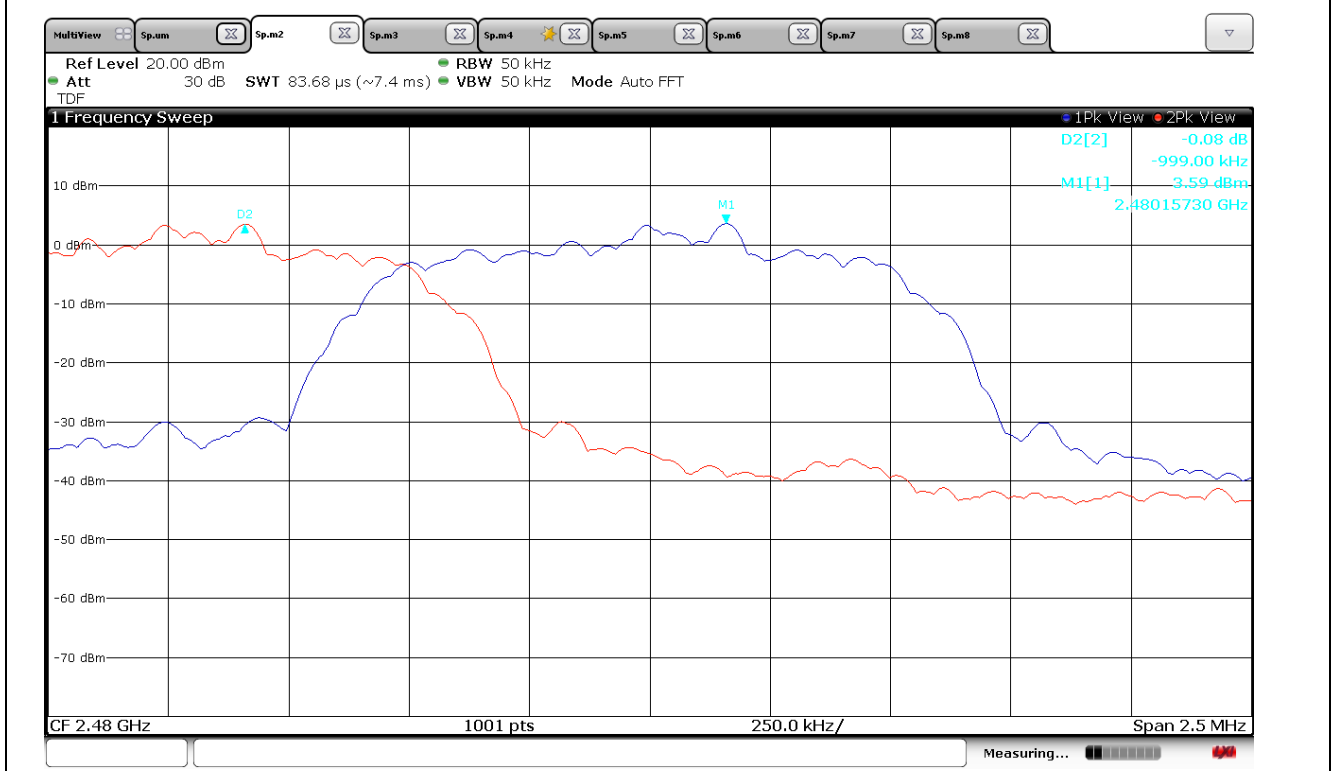

EDR_High CH



7. Number of Hopping Frequency

7.1 Operating environment


Temperature : 22 °C
Relative humidity : 46 %

7.2 Measurement method

Standard : §15.247 (a) (1) (iii) / RSS-247 (5.1 d)

7.3 Test setup

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 83.5 MHz and the resolution bandwidth is set to 100 kHz. The analyzer is set to peak hold and then complete pseudo-random hopping sequence of the transmitter is captured.





7.4 Test data


Test date : 08. Oct. 2019
Operating mode : Hopping mode
Test Result : Pass


7.4.1 Measured Results

Modulation type	Hopping Channel Number	Limit
BDR	79	> 15
EDR (3 Mbps)	79	



7.4.2 Measured Graph

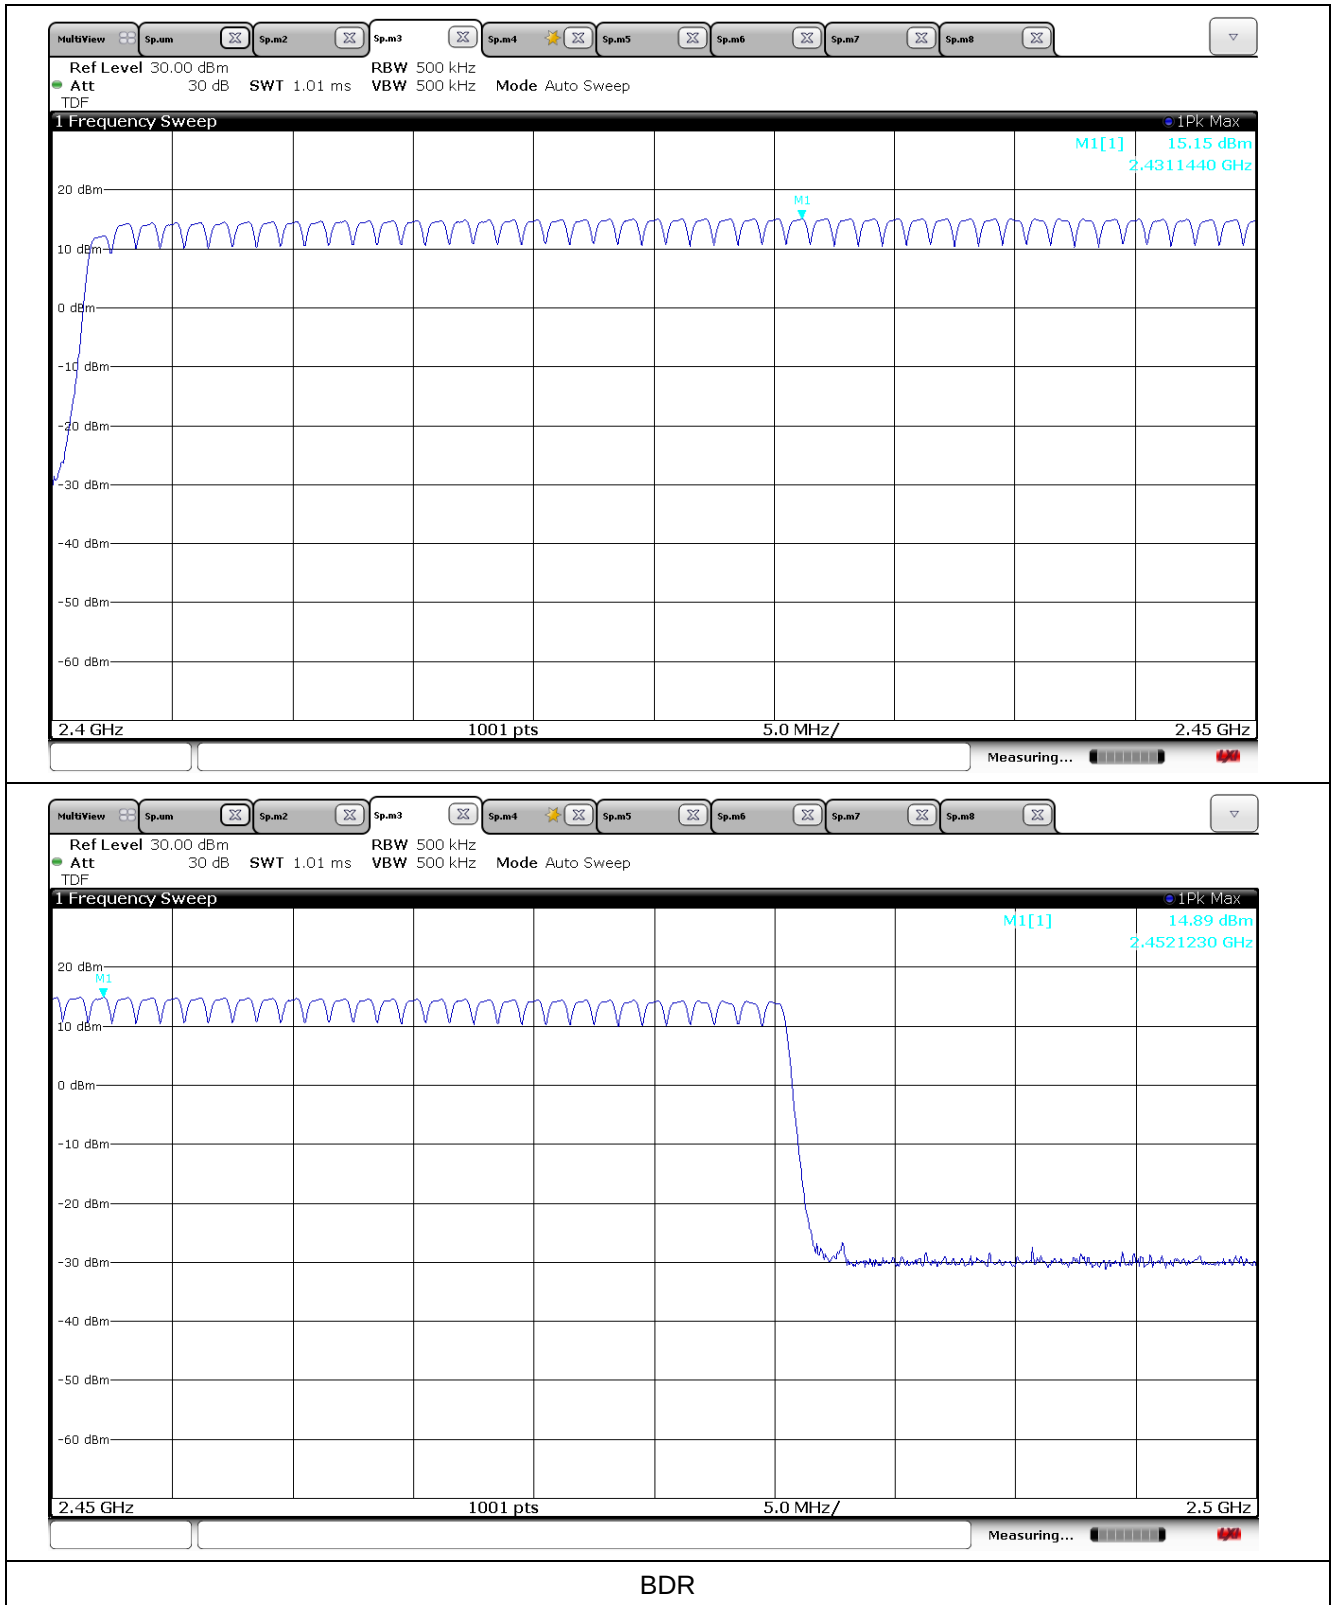

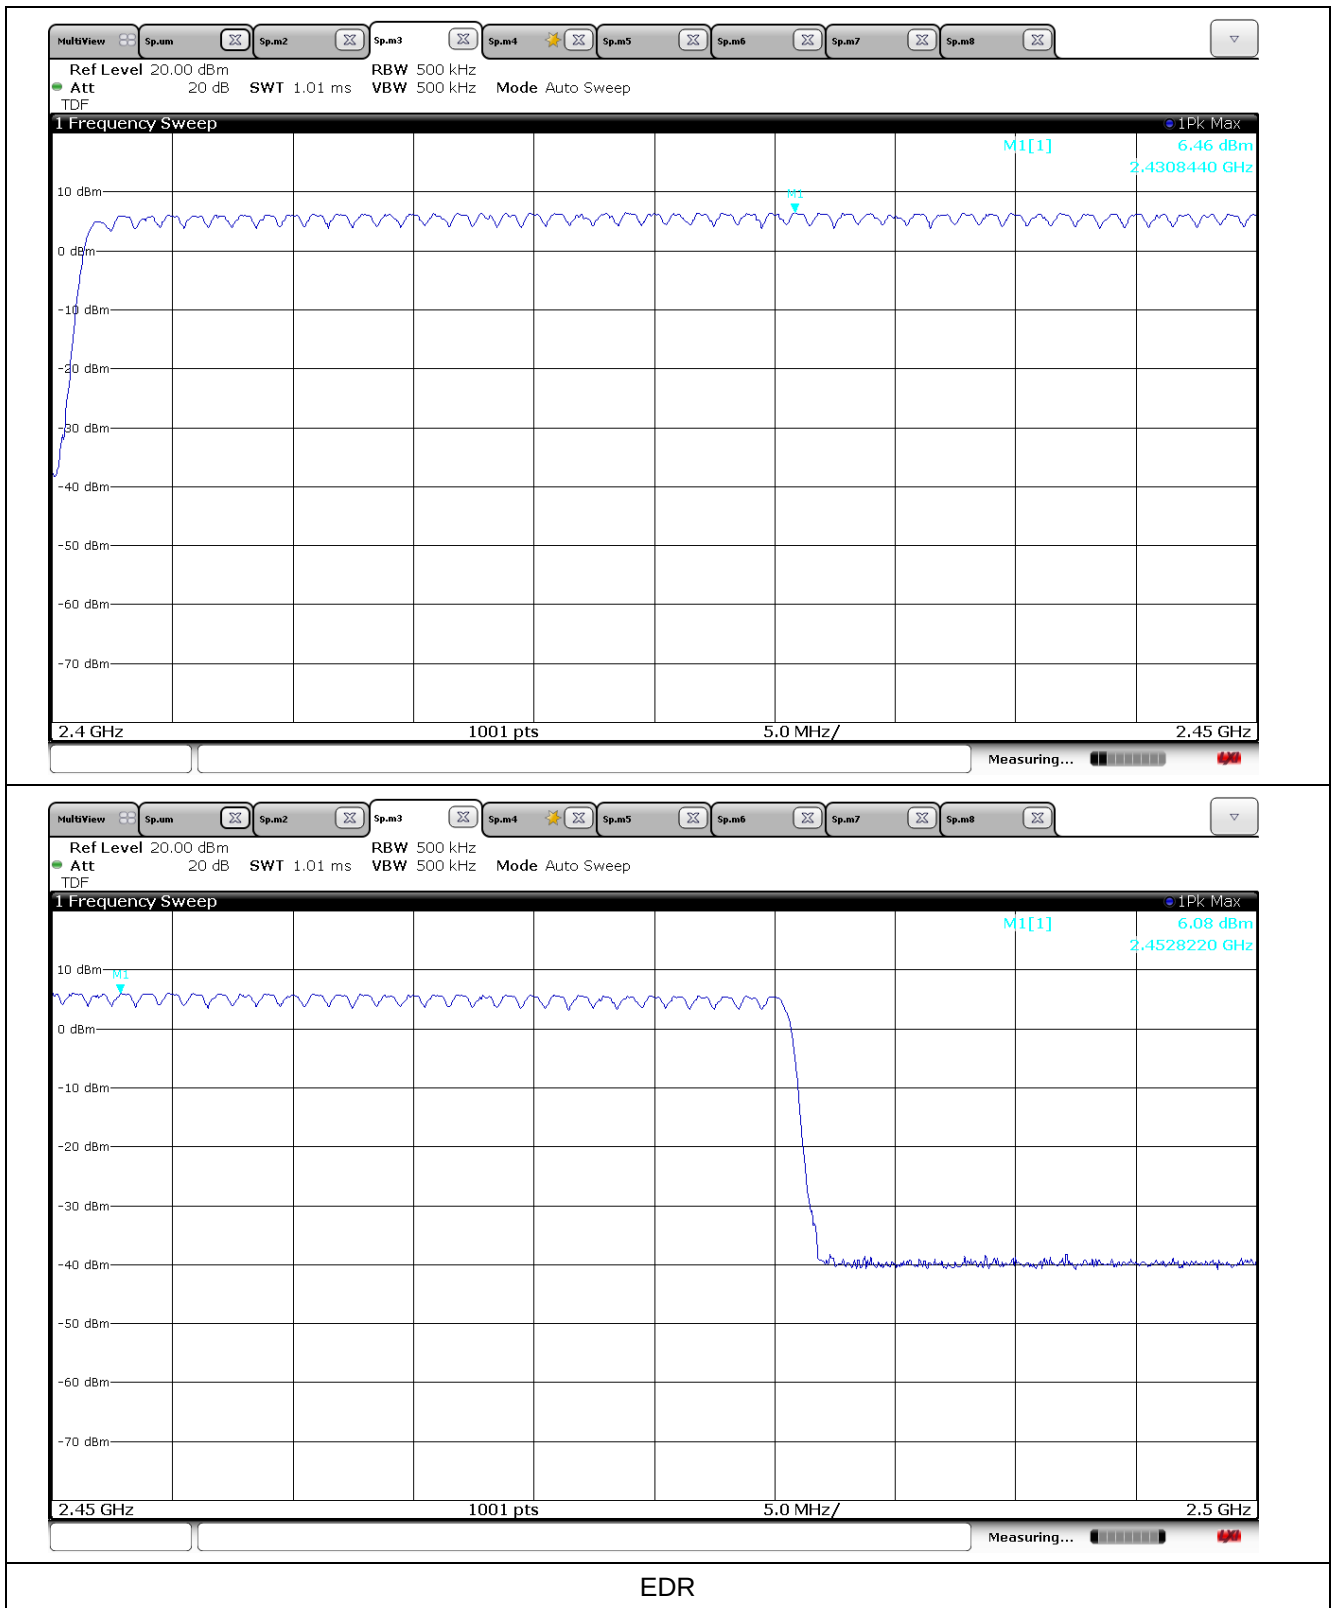

EDR



8. Average Time of Occupancy

8.1 Operating environment


Temperature : 22 °C
Relative humidity : 46 %

8.2 Measurement method

Standard : §15.247 (a) (1) (iii) / RSS-247 (5.1 d)

8.3 Test setup

The antenna output of the EUT was connected to the spectrum analyzer. The transmitter is set to operate in its normal frequency hopping mode. The center frequency of the spectrum analyzer is set to one of hopping channels near the center of the operating band and span is set to zero Hz. The sweep time is set to display one complete pulse. The mark delta function is used to measure the duration of the pulses.





8.4 Test data

Test date : 08. Oct. 2019

Test Result : Pass

In Theory,

- non-AFH mode: hopping rate is 1 600 hops/s with 6 slots in 79 hopping channels. With channel hopping rate $(1600 / 6 / 79)$ in Occupancy Time Limit (0.4×79) (s).
Hops Over Occupancy Time comes to $(1\ 600 / 6 / 79) \times (0.4 \times 79) = 106.67$ hops.
- AFH mode: hopping rate is 800 hops/s with 6 slots in 20 hopping channels. With channel hopping rate $(800 / 6 / 20)$ in Occupancy Time Limit (0.4×20) (s).
Hops Over Occupancy Time comes to $(800 / 6 / 20) \times (0.4 \times 20) = 53.33$ hops


8.4.1 Measured Results

Operating Mode	Mode	Hopping Channel Number	Hops Over Occupancy Time (ms/hops)	Package Transfer Time (ms)	Occupancy Time (s)	Limit (s)
Hopping	DH5(non-AFH)	79	106.67	2.89	0.31	0.4
	DH5(AFH)	20	53.33	2.89	0.15	
	3-DH5(non-AFH)	79	106.67	2.90	0.31	
	3-DH5(AFH)	20	53.33	2.90	0.15	


※ Occupancy Time (s) = Hops Over Occupancy Time (hops) x Package Transfer Time (ms)



8.4.2 Measured Graph

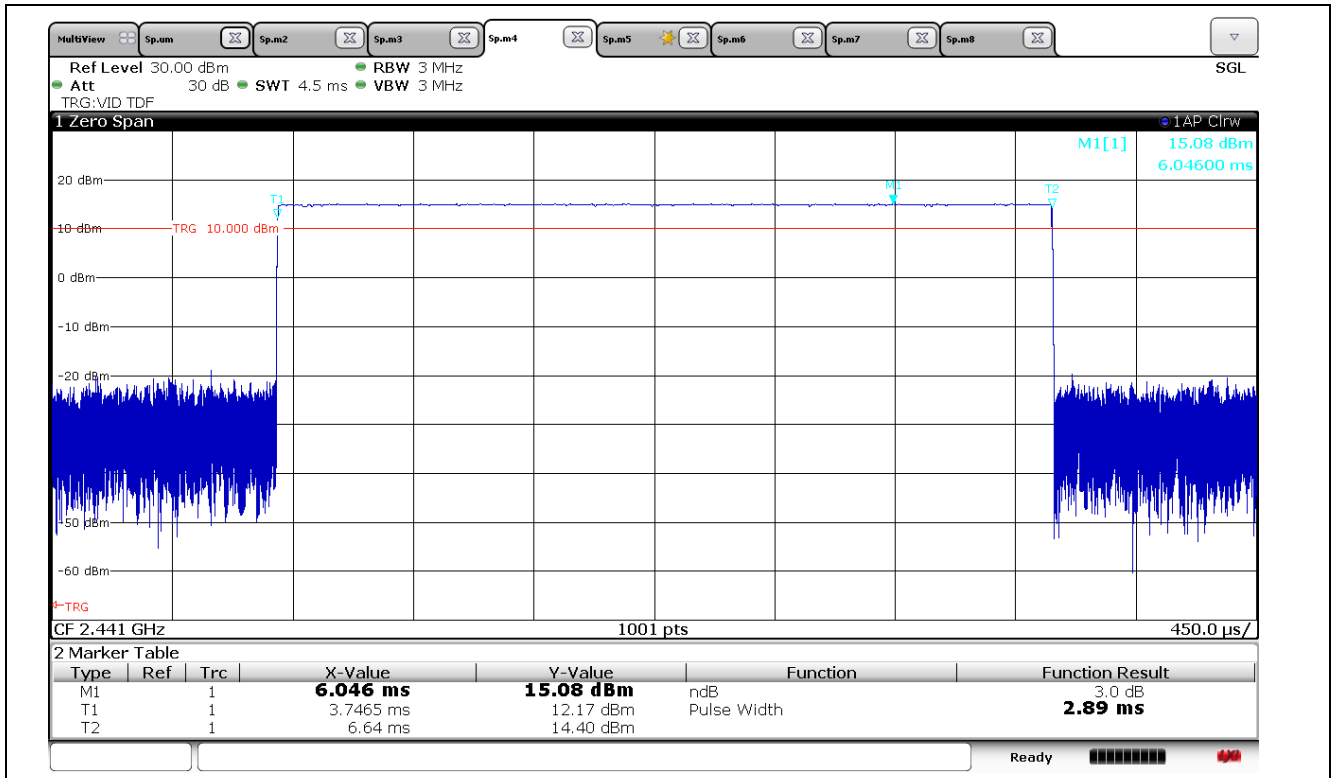

BDR

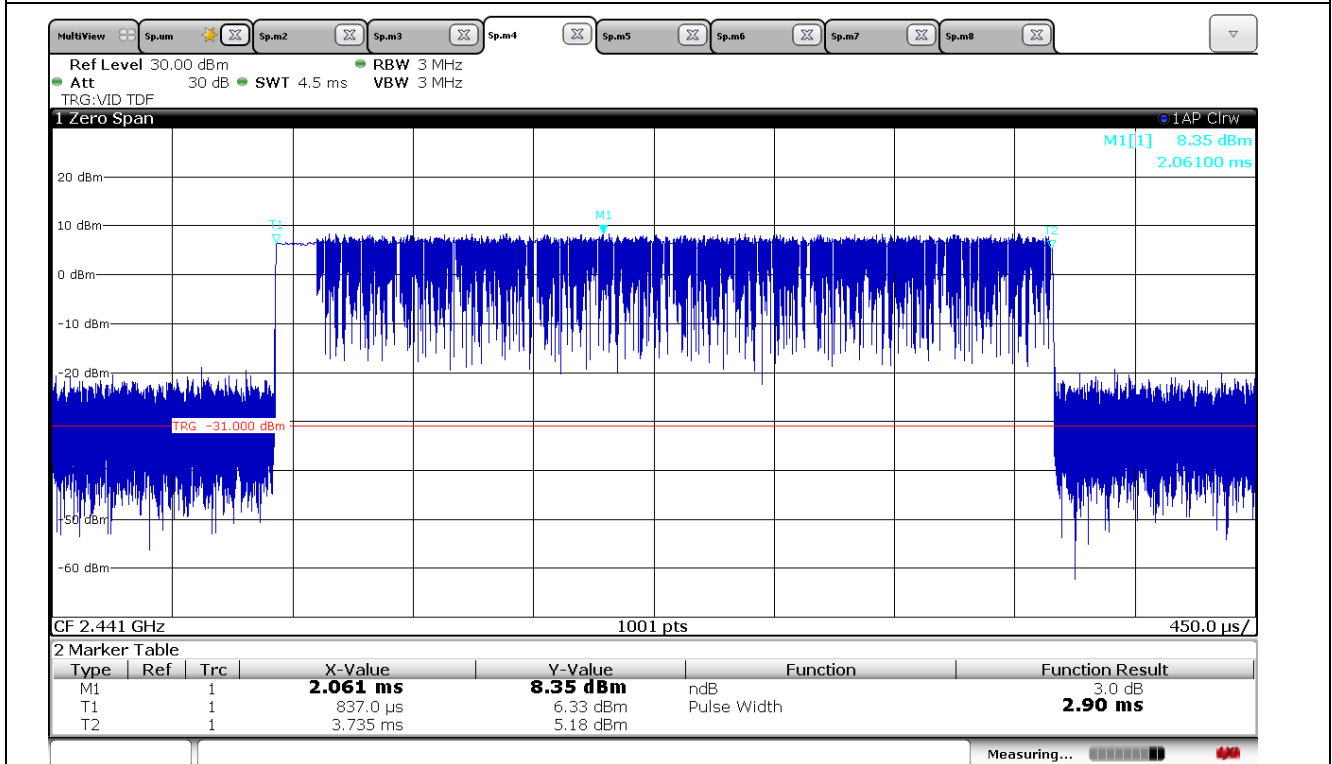

EDR



9. Maximum Conducted Output Power & e.i.r.p.

9.1 Operating environment


Temperature : 22 °C
Relative humidity : 46 %

9.2 Measurement method

Standard : §15.247 (b) (1) / RSS-247 (5.4 b)

9.3 Test setup

The maximum peak output power was measured with the spectrum analyzer connected to the antenna output of the EUT. The EUT was operating in transmit mode at the appropriate center frequency. And e.i.r.p. is added antenna maximum gain with the Maximum Conducted Output Power.





9.4 Test data

Test date : 08. Oct. 2019
 Operating mode : Transmit mode
 Test Result : Pass


9.4.1 Measured Results

Modulation Type	Channel (Frequency)	Maximum Conducted Output Power			e.i.r.p.	
		Measured value (dBm)	Average Power(dBm)	Limit	Measured value (dBm)	Limit
BDR (1 Mbps)	0 (2 402 MHz)	12.56	12.36	21 (dBm) (0.125 Watt)	13.49	36 (dBm) (4 Watt)
	39 (2 441 MHz)	15.23	14.57		16.16	
	78 (2 480 MHz)	14.38	12.82		15.31	
EDR (2 Mbps)	0 (2 402 MHz)	6.69	4.03		7.62	
	39 (2 441 MHz)	8.14	5.21		9.07	
	78 (2 480 MHz)	7.28	4.51		8.21	
EDR (3 Mbps)	0 (2 402 MHz)	7.09	4.04		8.02	
	39 (2 441 MHz)	8.48	5.34		9.41	
	78 (2 480 MHz)	7.60	4.67		8.53	

※ Antenna Gain : 0.93 dBi




9.4.2 Measured Graph

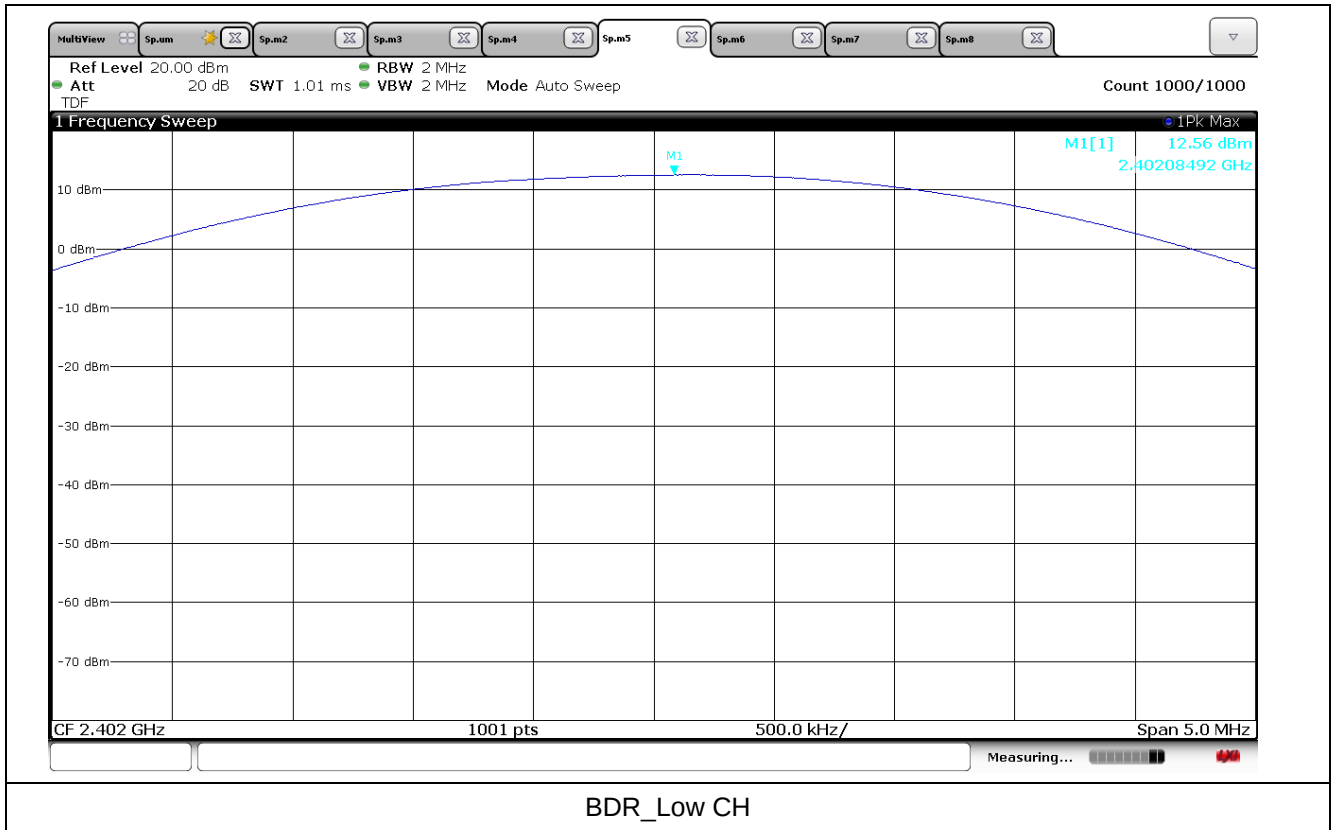





페이지(page) : (35)/(총(Total) 70)

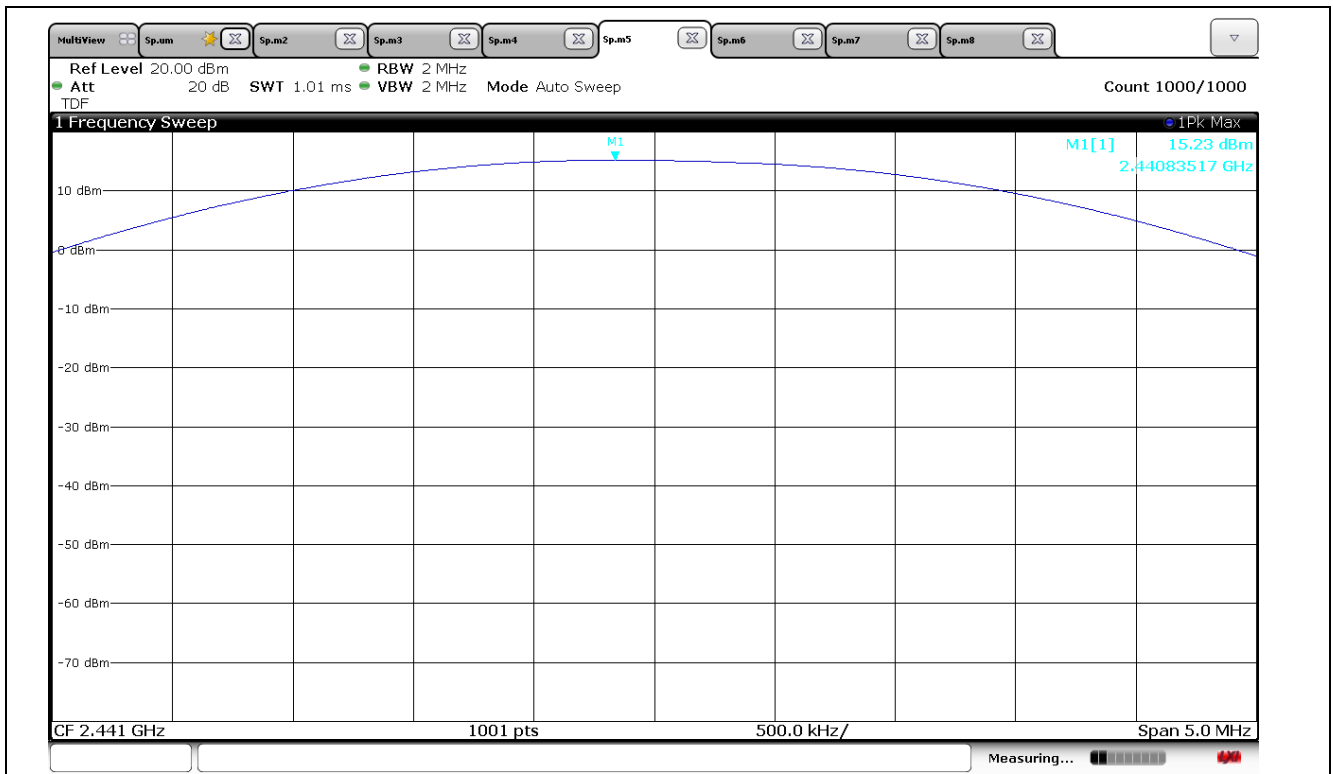


BDR_Mid CH

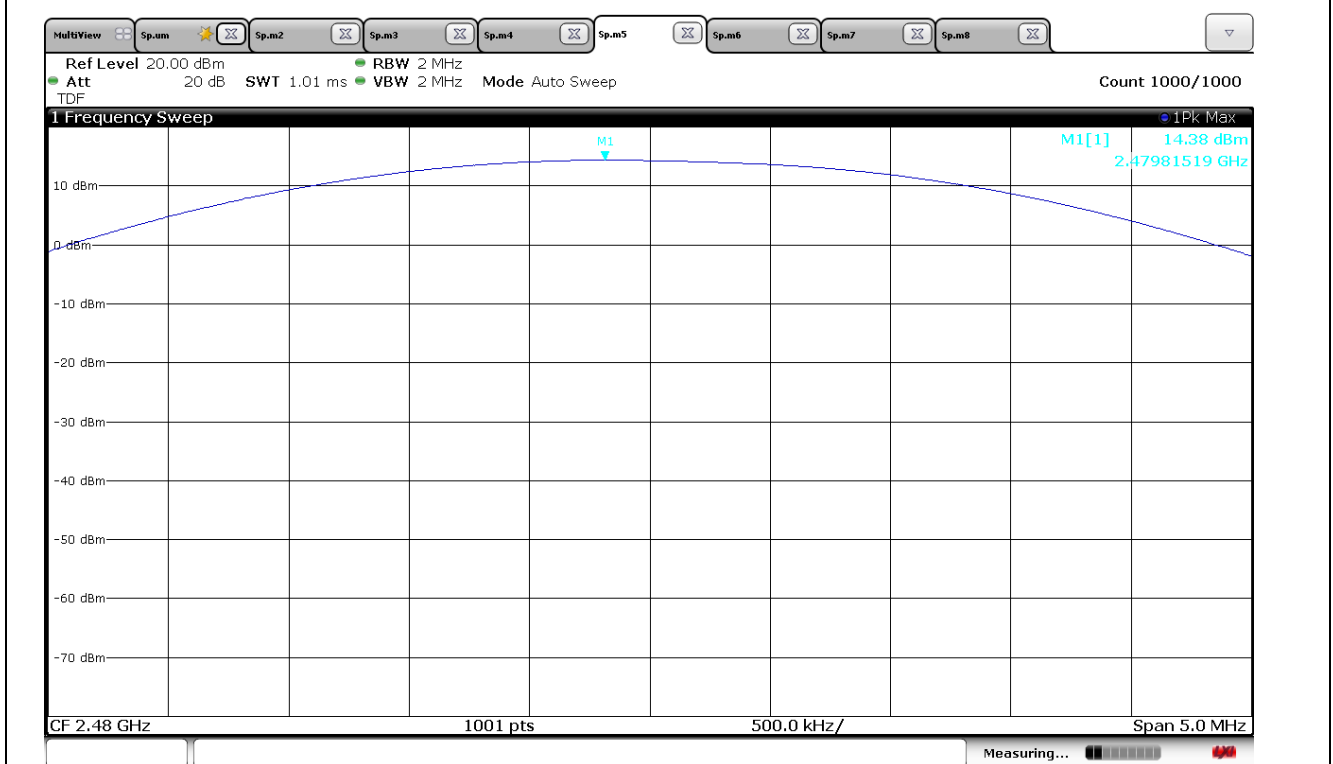


BDR_High CH

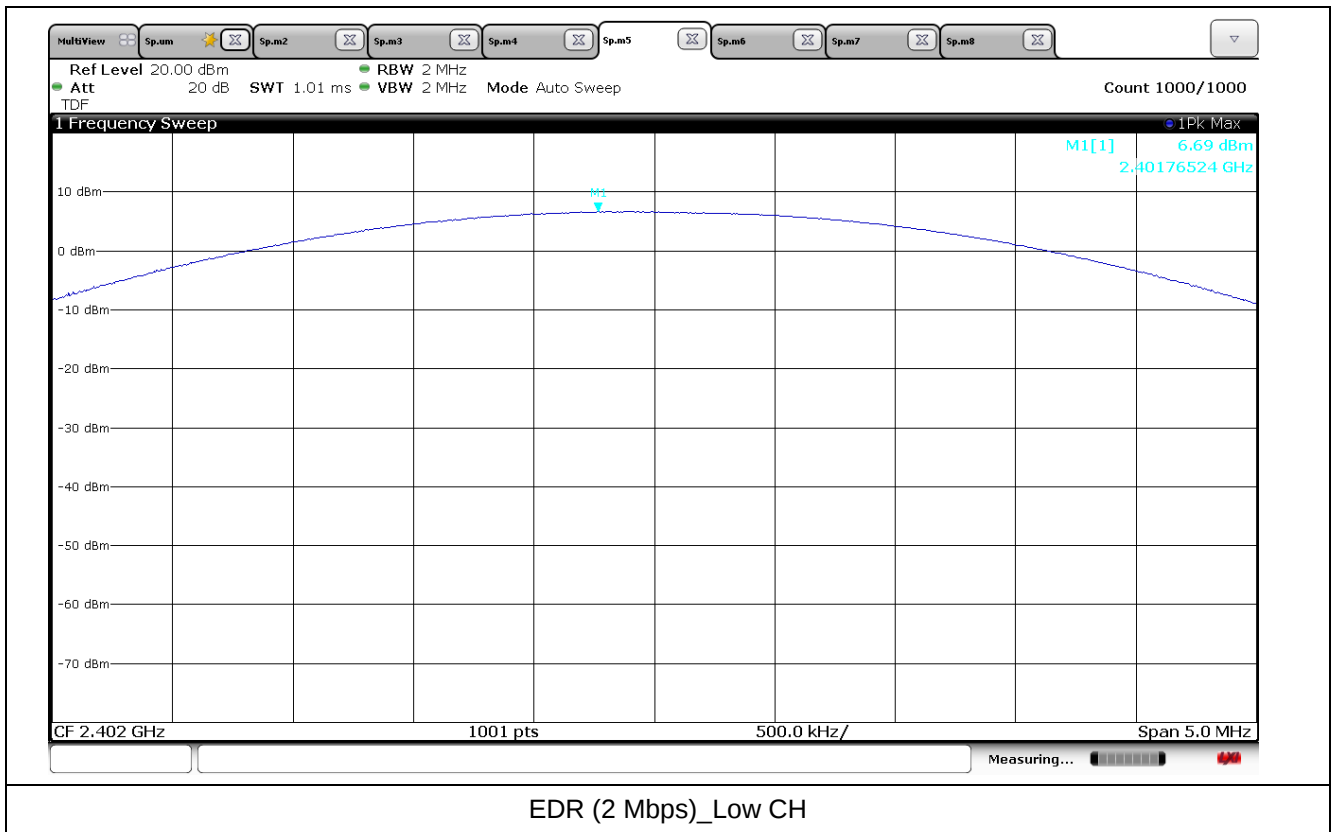


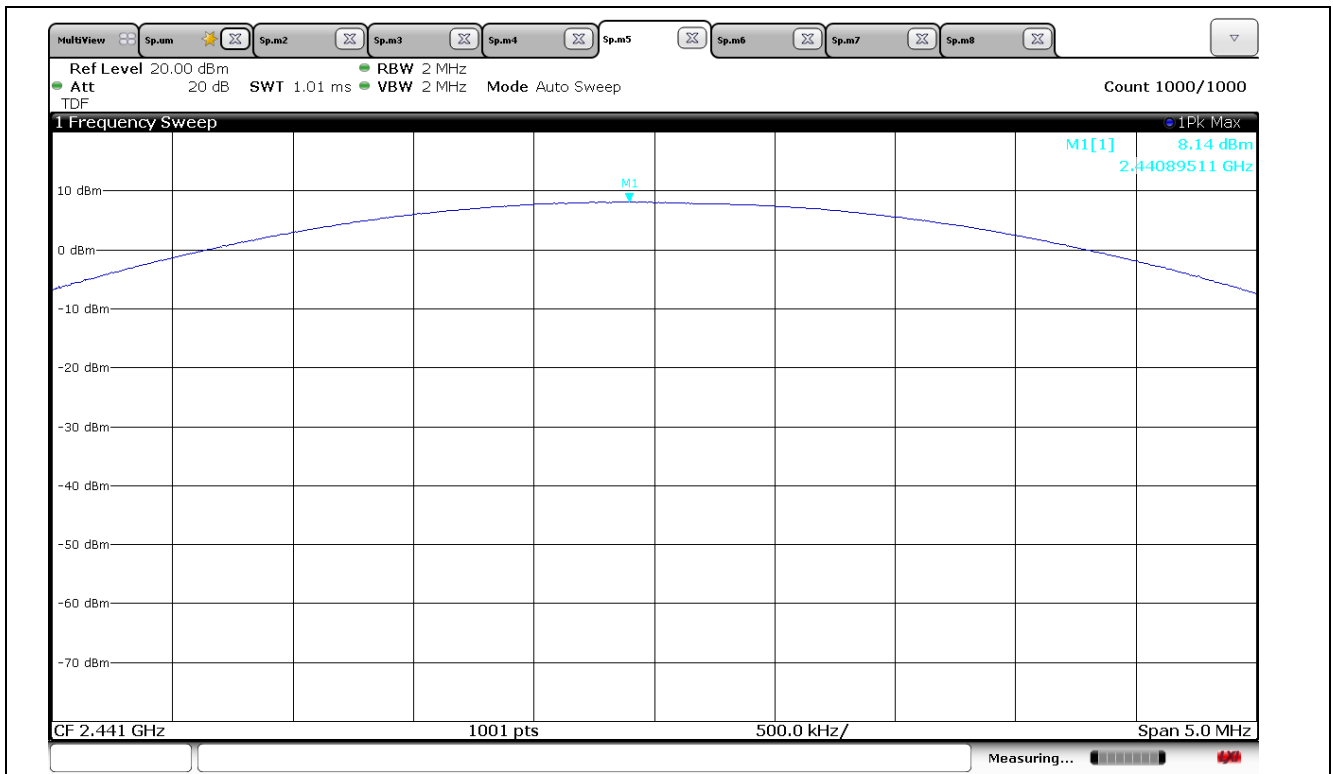


EDR (2 Mbps)_Mid CH

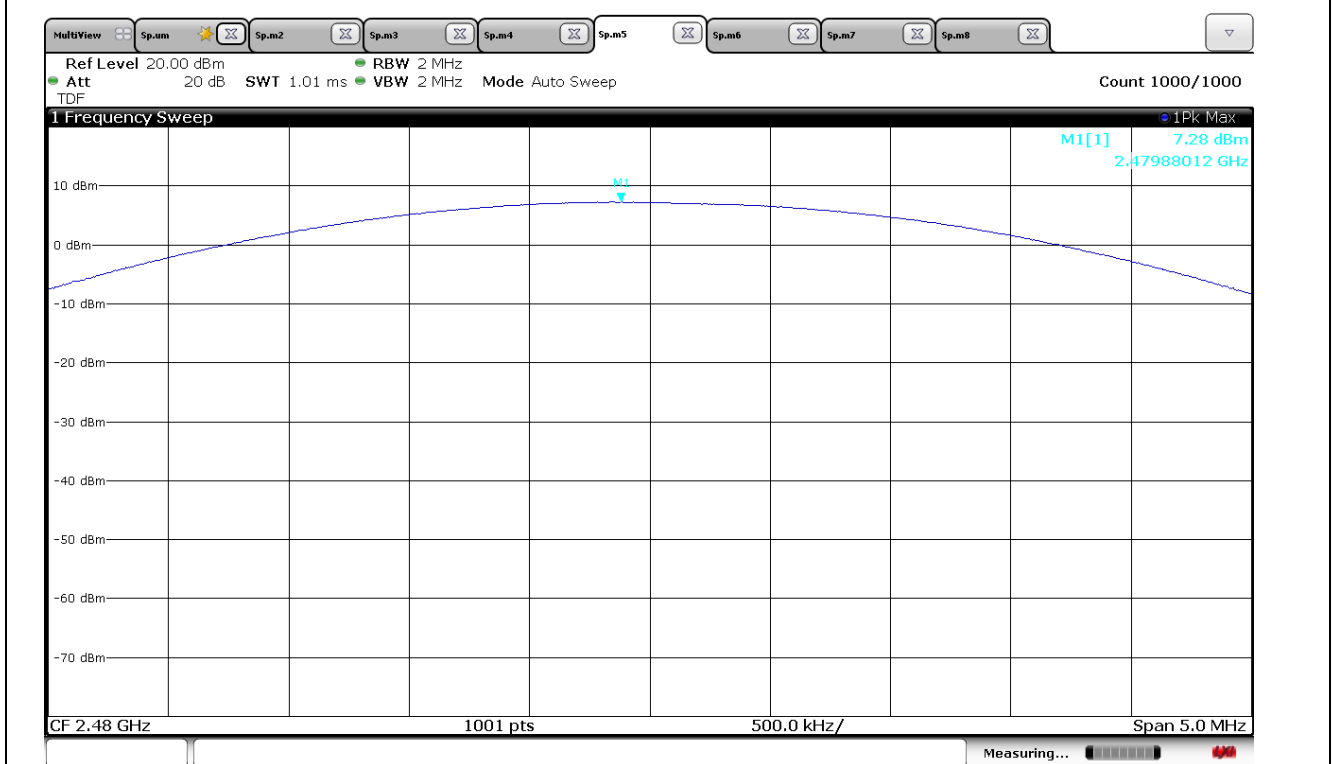


EDR (2 Mbps)_High CH

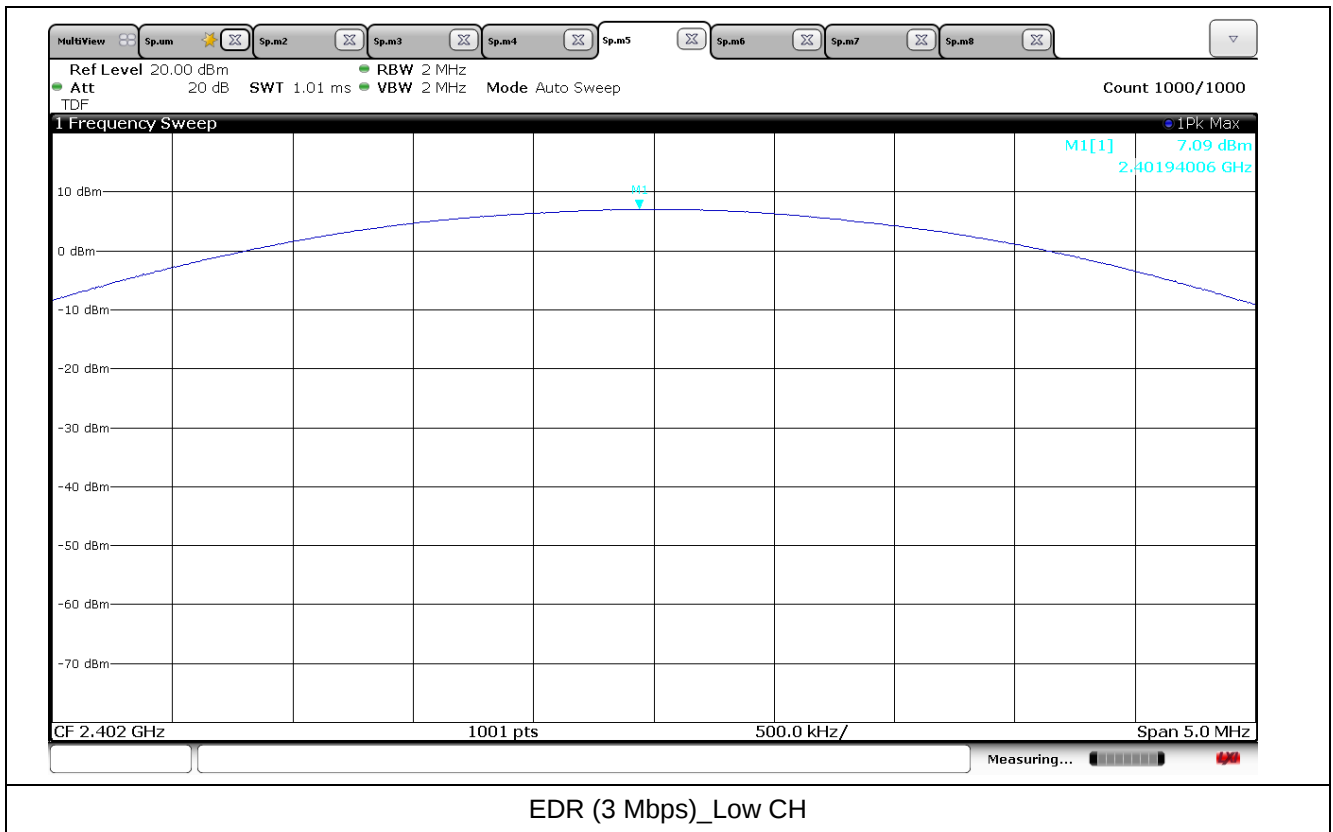

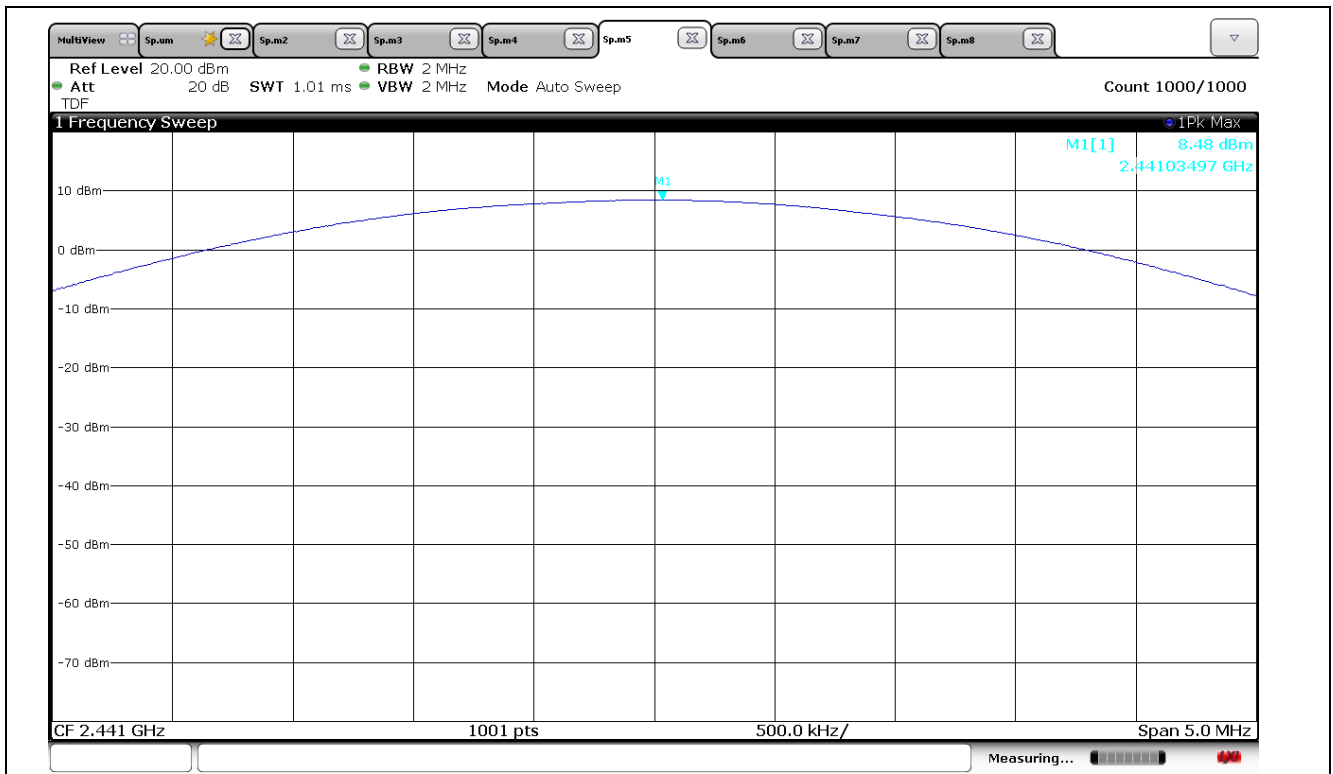

EDR (3 Mbps)_Mid CH

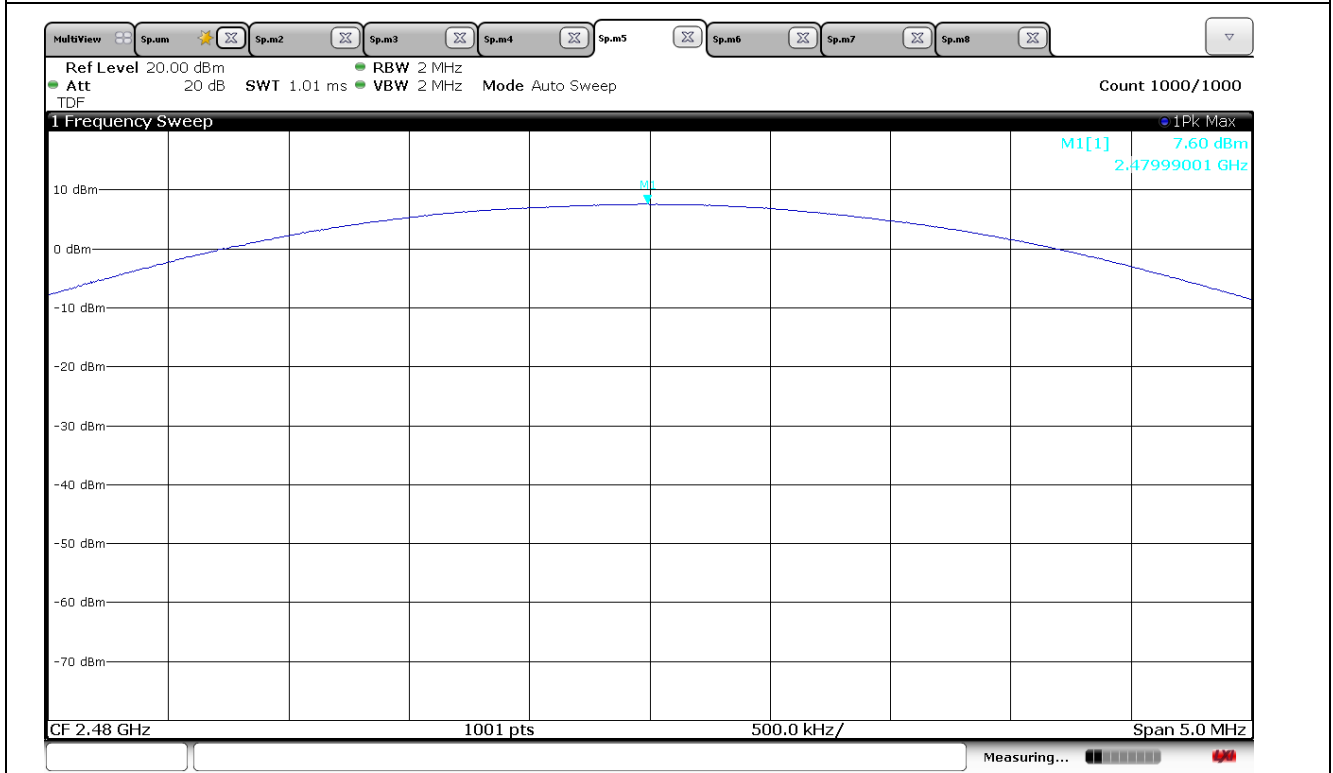

EDR (3 Mbps)_High CH



10. Conducted Spurious Emission

10.1 Operating environment


Temperature : 22 °C
Relative humidity : 46 %

10.2 Measurement method

Standard : §15.247 (d) / RSS-247 (5.5)

10.3 Test setup

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.






10.4 Test data

Test date : 08. Oct. 2019
Operating mode : Hopping mode
Test Result : Pass


10.4.1 Measured Results

10.4.1.1 Signal level (dB m)

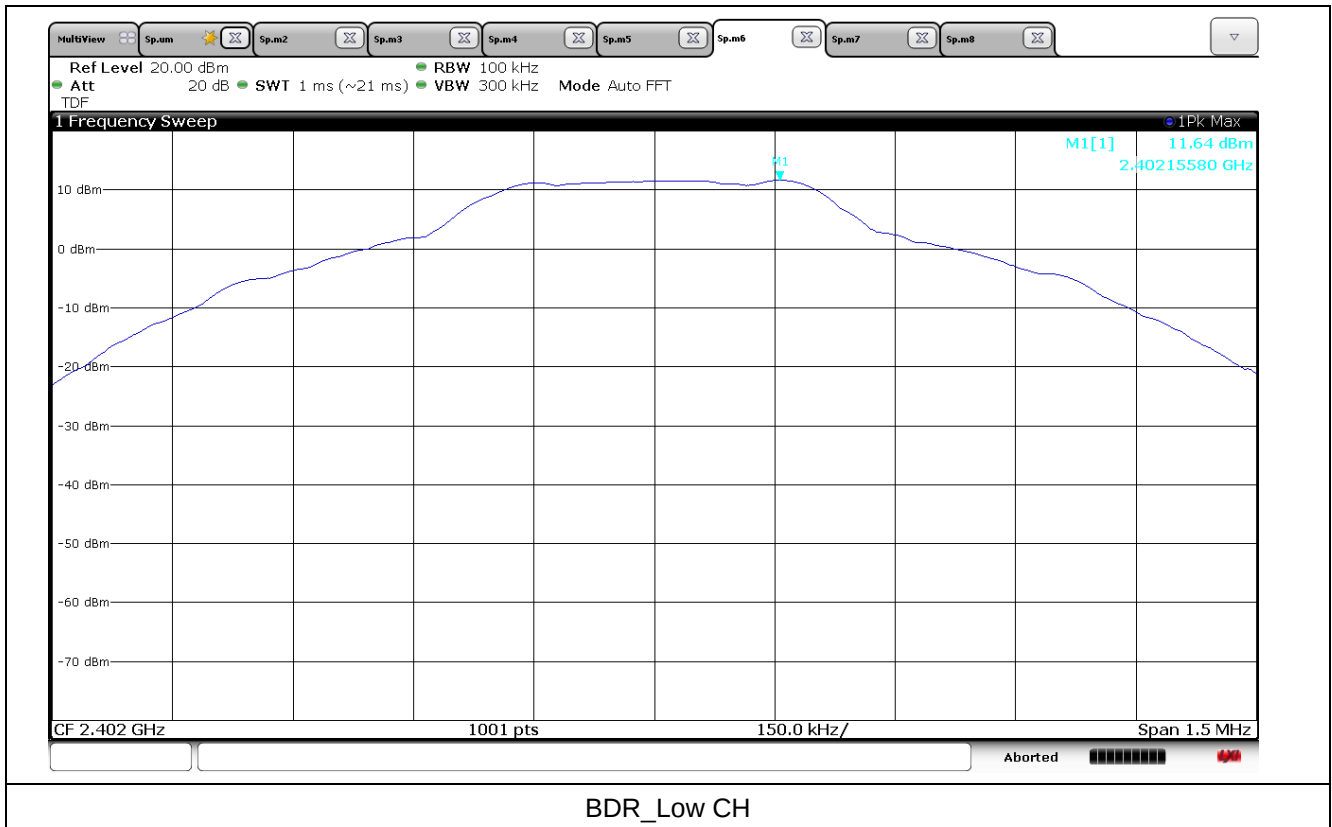





페이지(page) : (42)/(총(Total) 70)

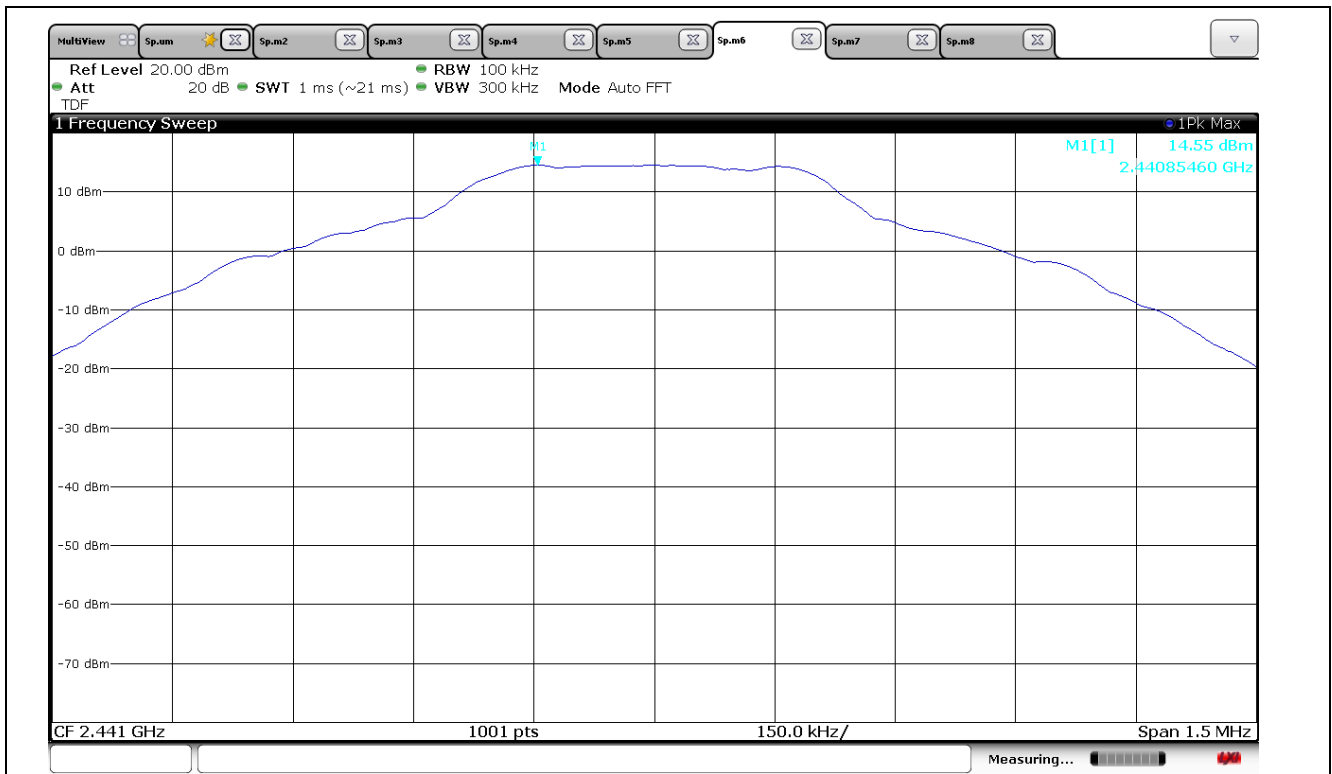


BDR_Mid CH

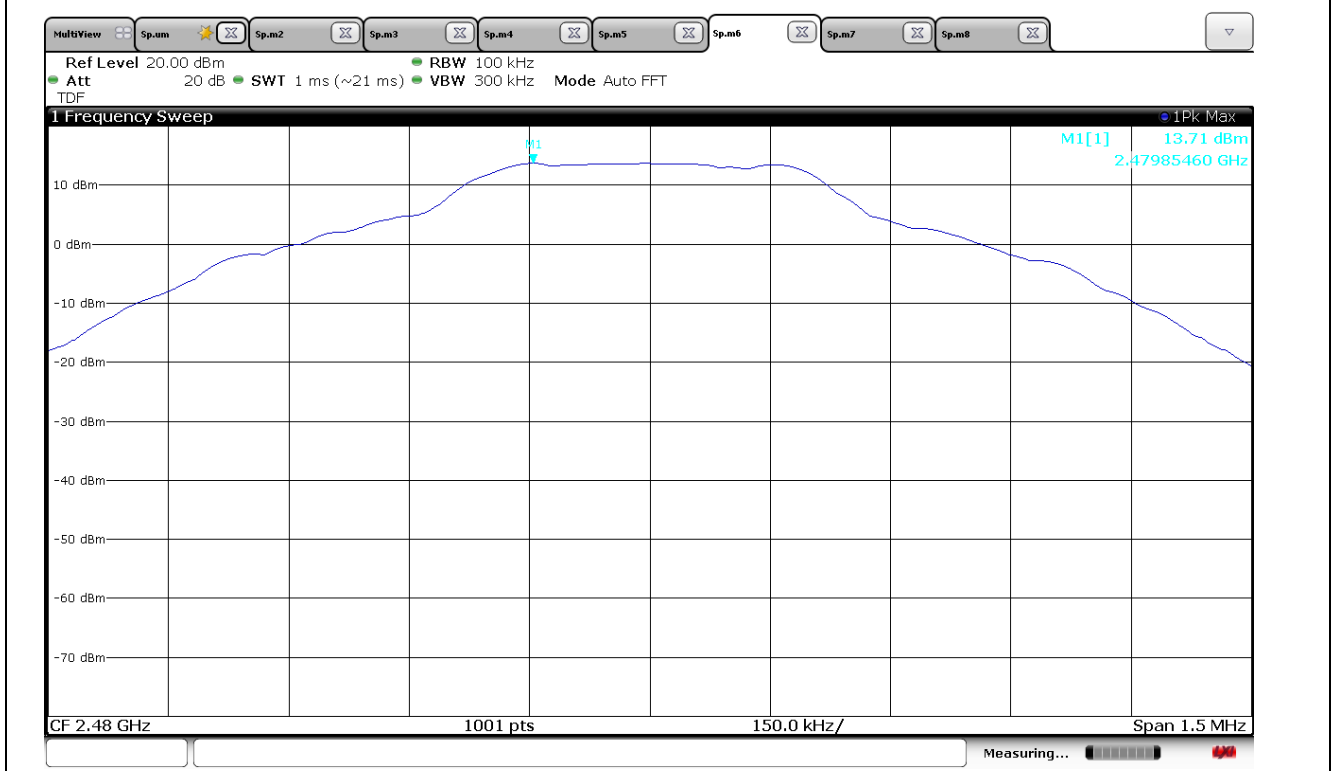


BDR_High CH

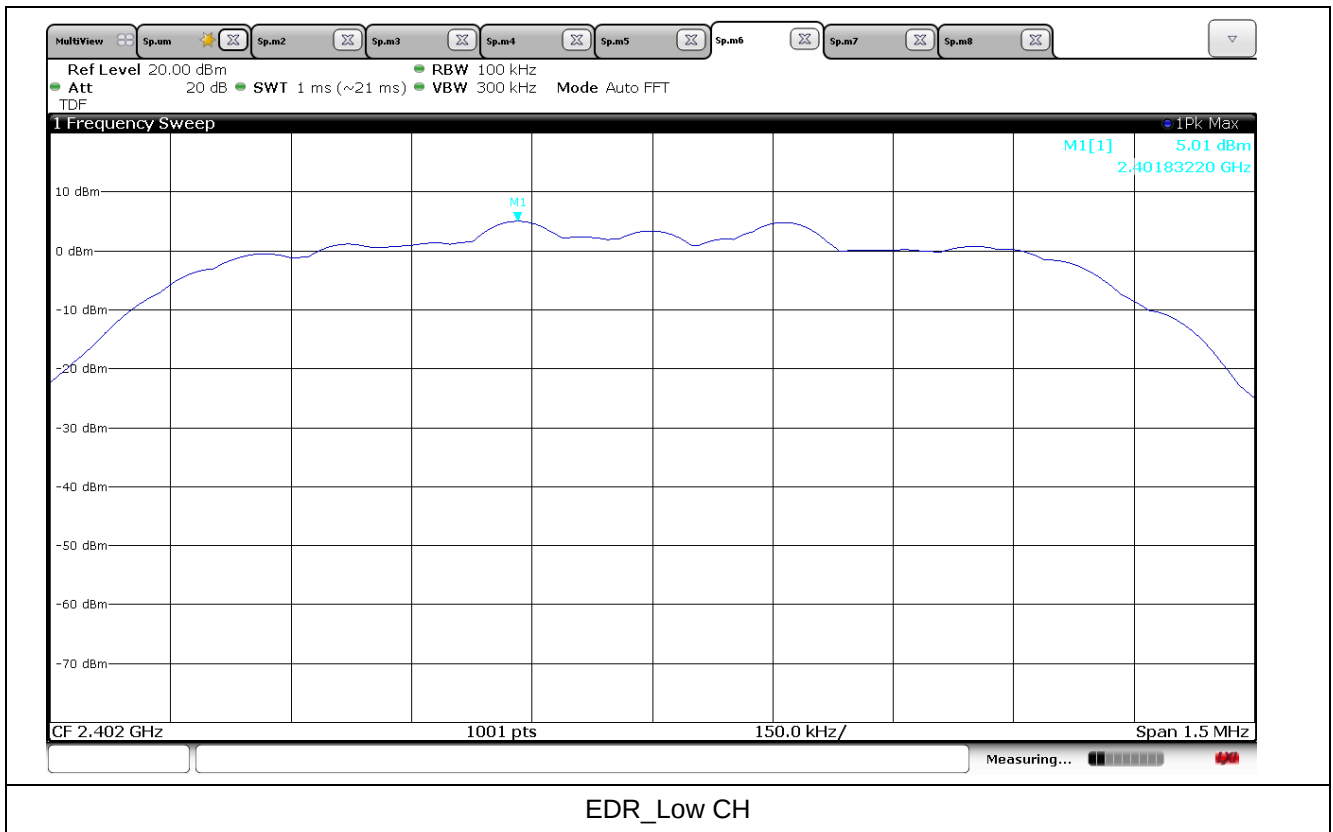

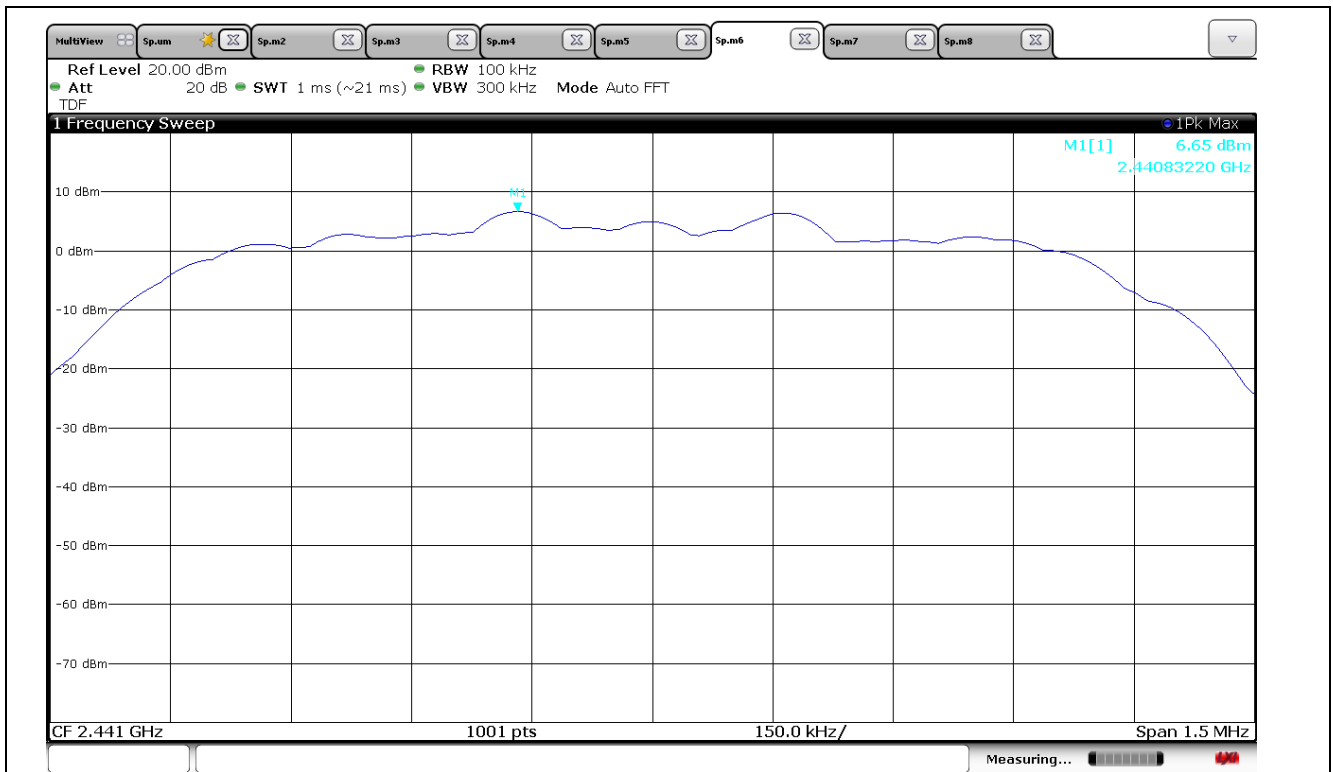


EDR_Mid CH

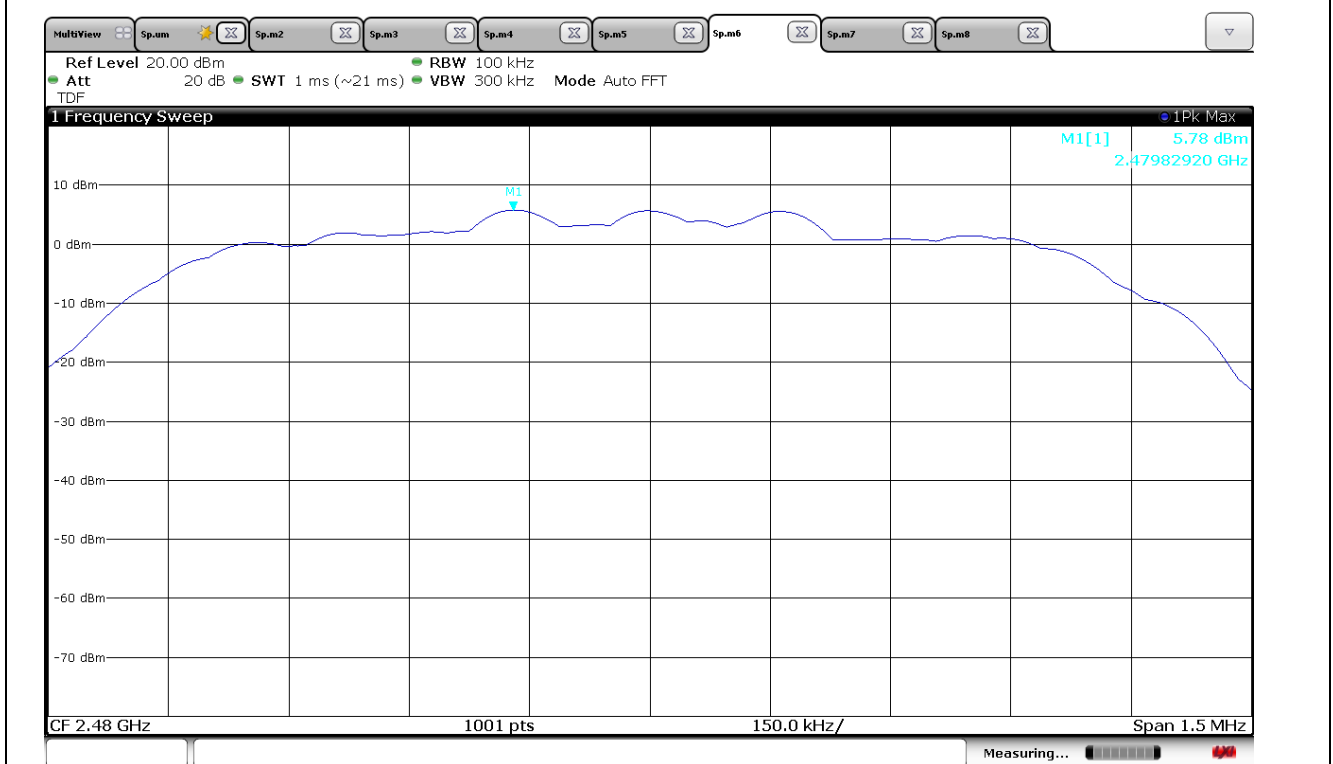


EDR_High CH




10.4.1.2 Unwanted Emissions In Non-Restricted Frequency Bands

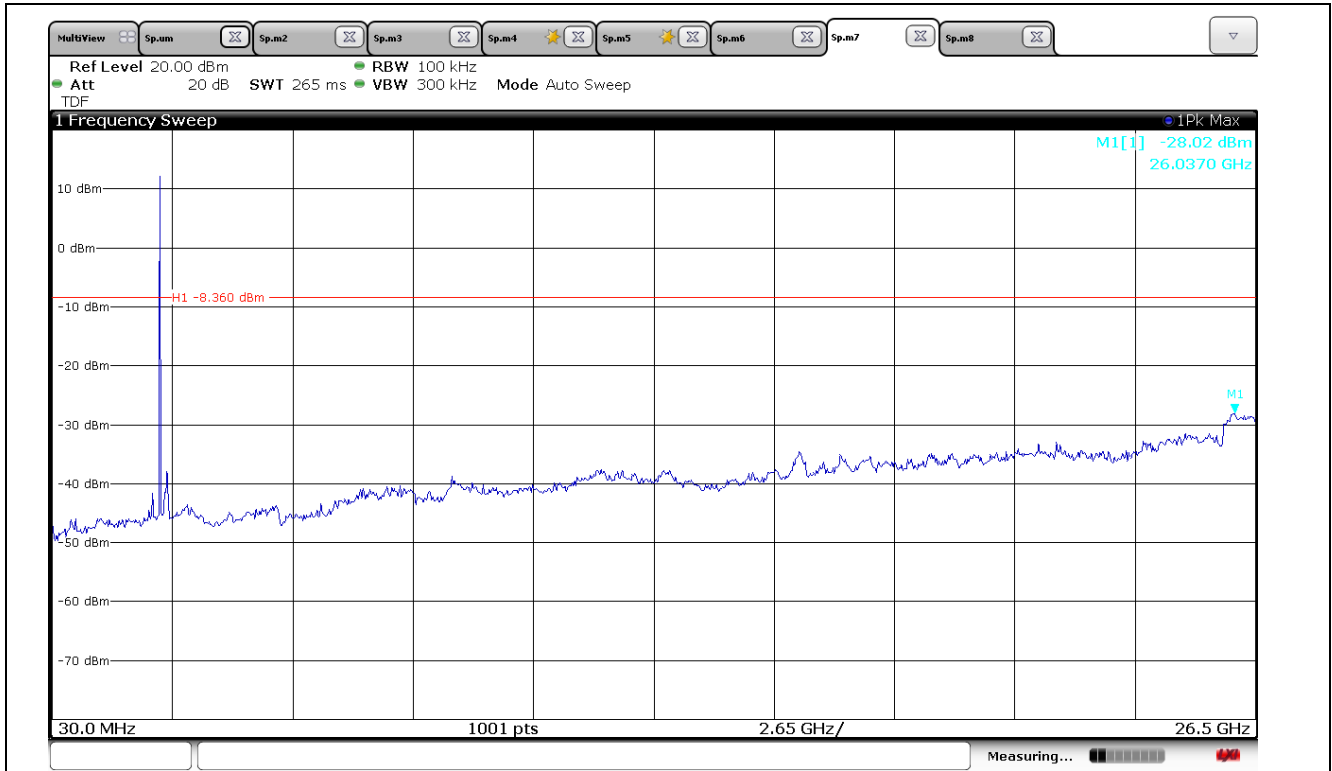

BDR_Low CH

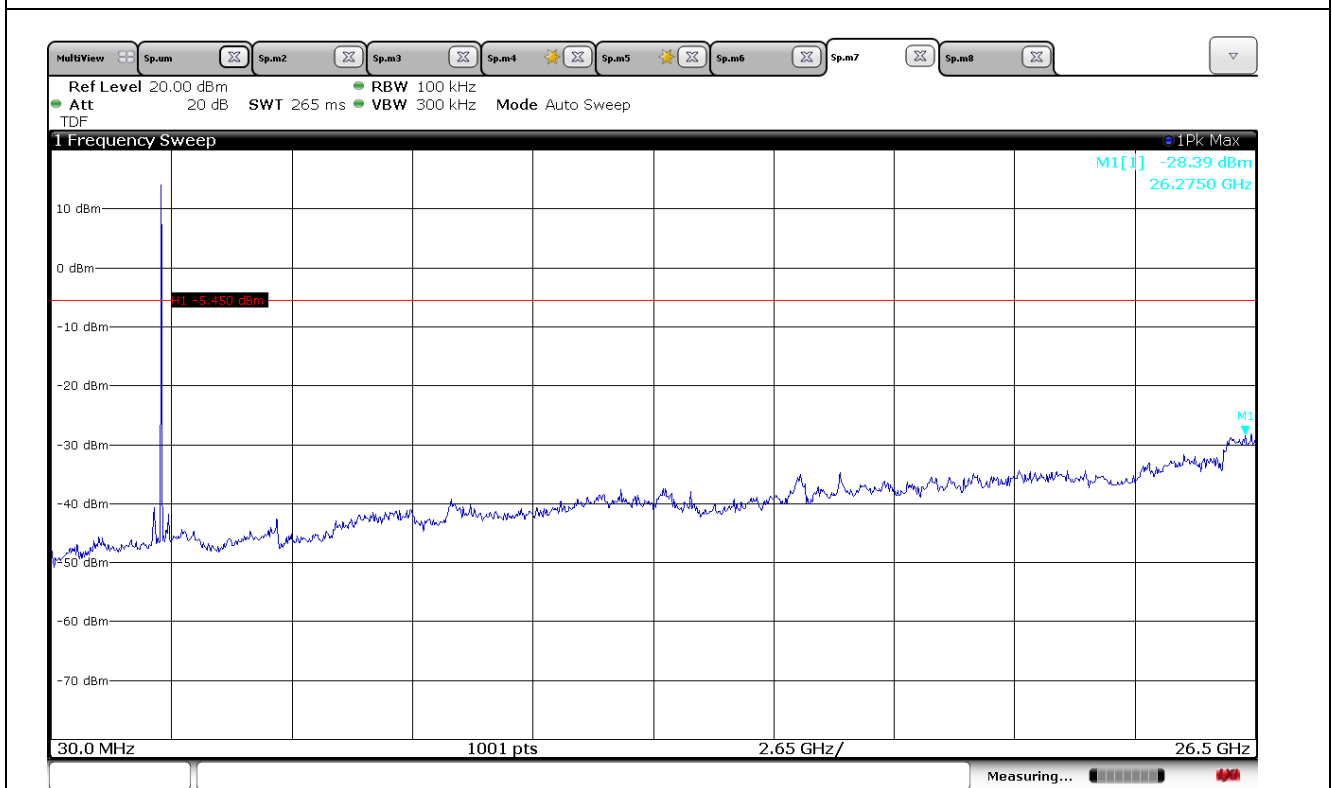


BDR_Mid CH

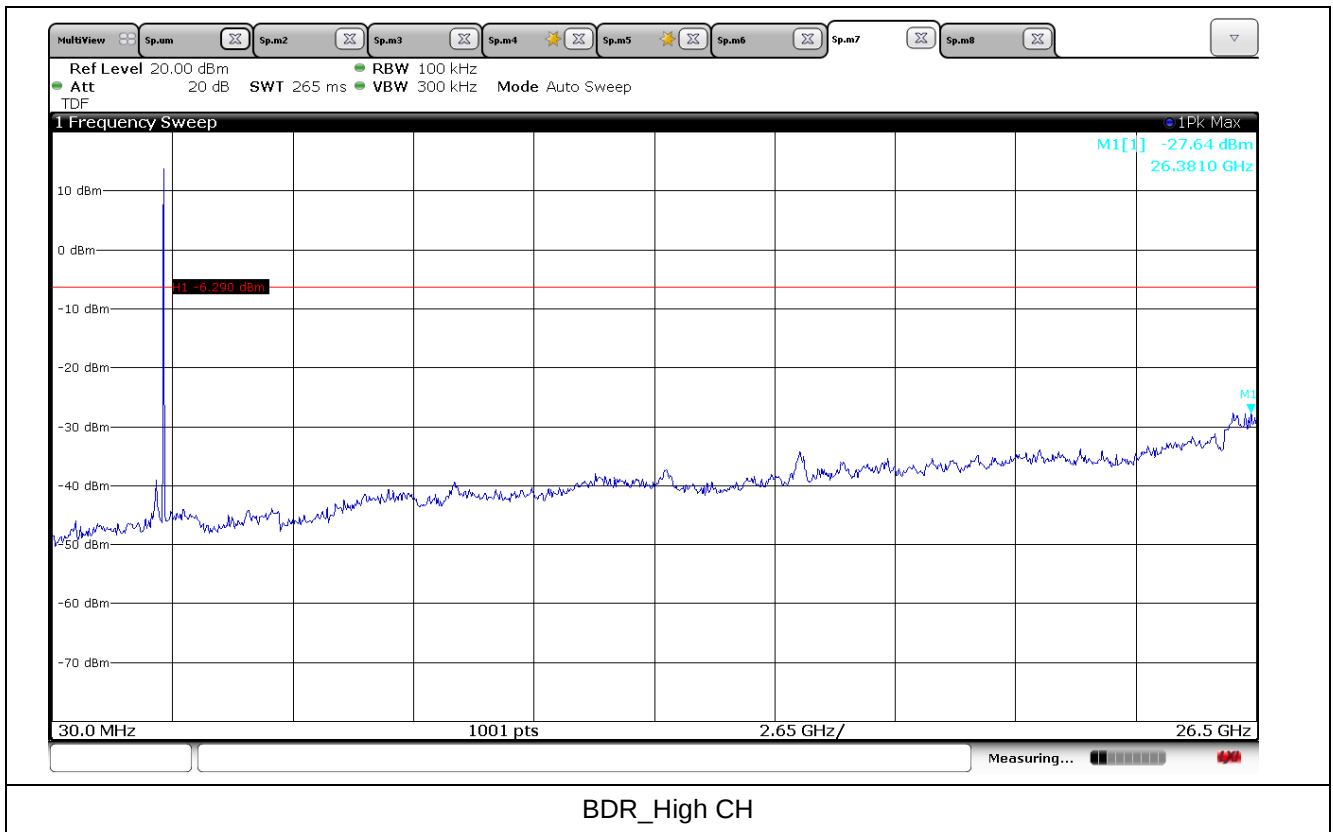





페이지(page) : (47)/(총(Total) 70)

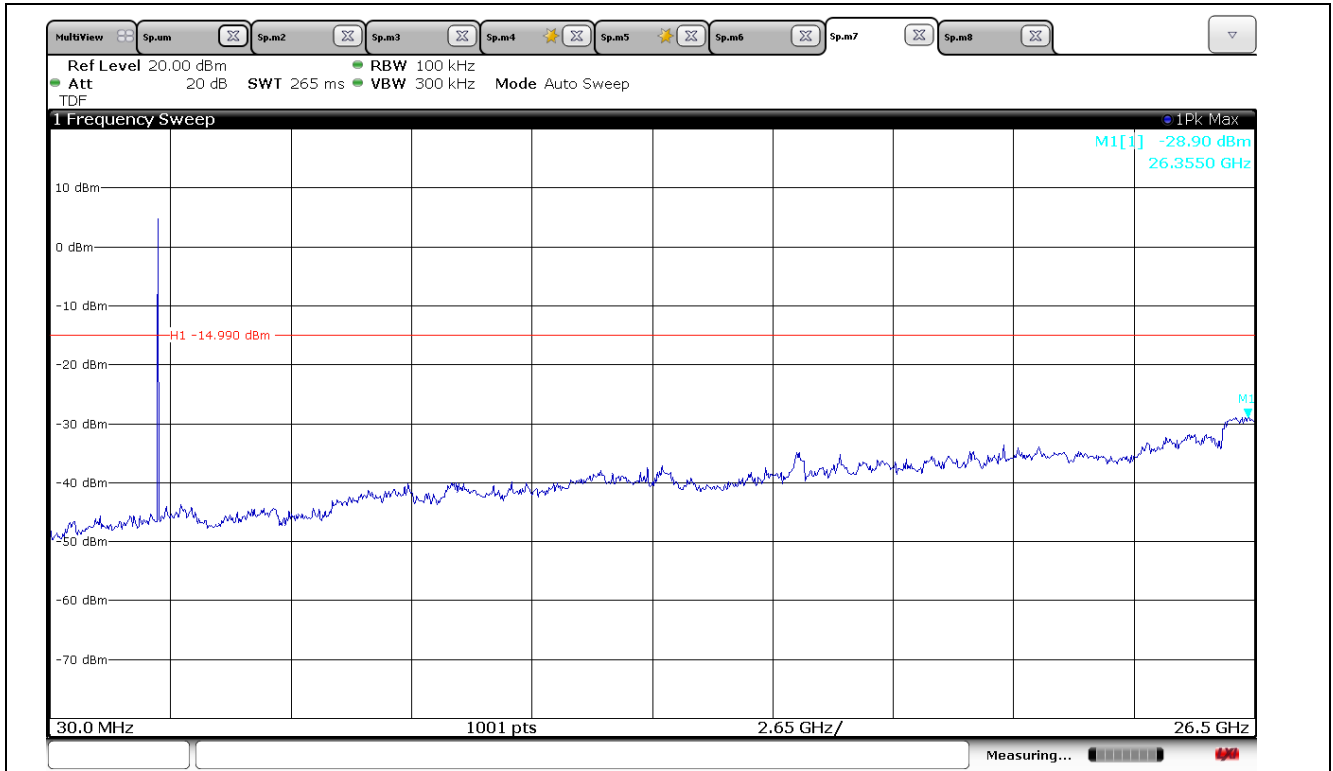

EDR_Low CH

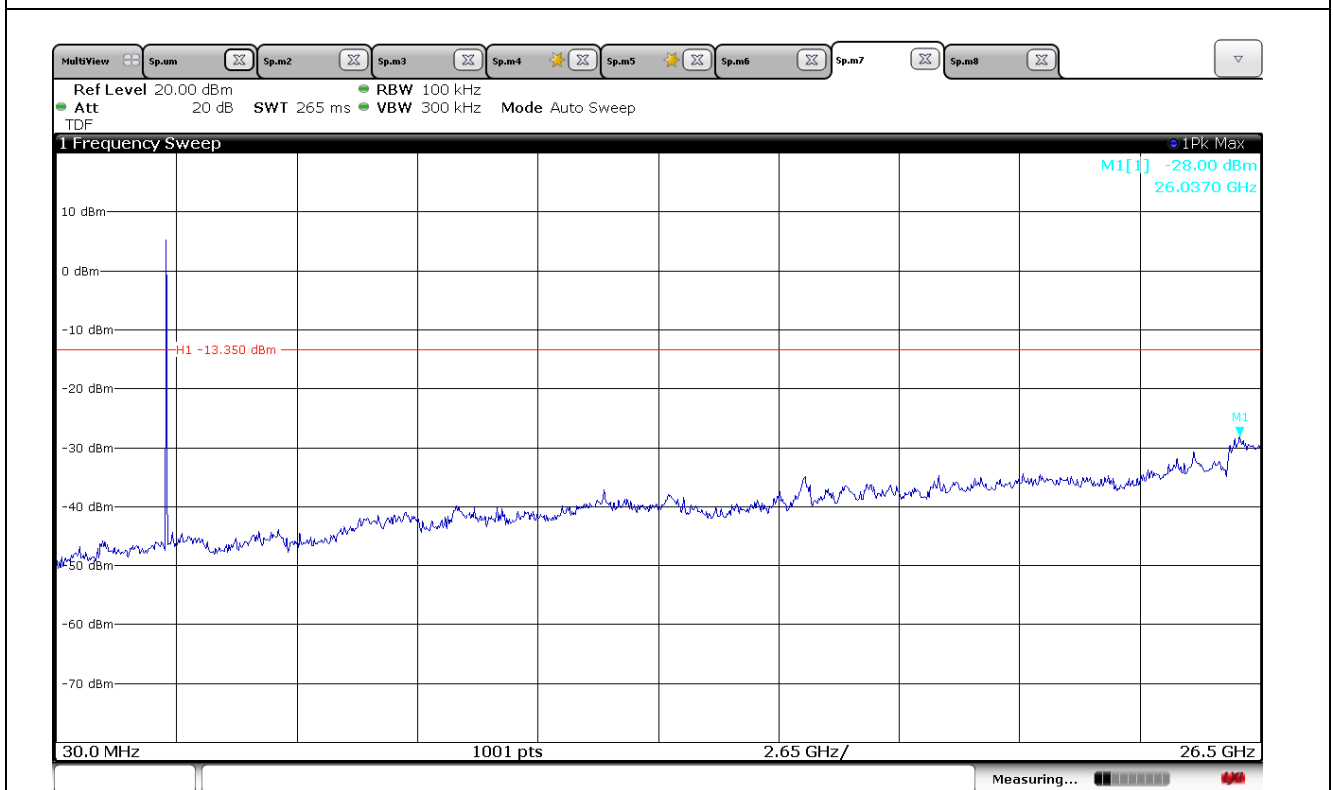


EDR_Mid CH

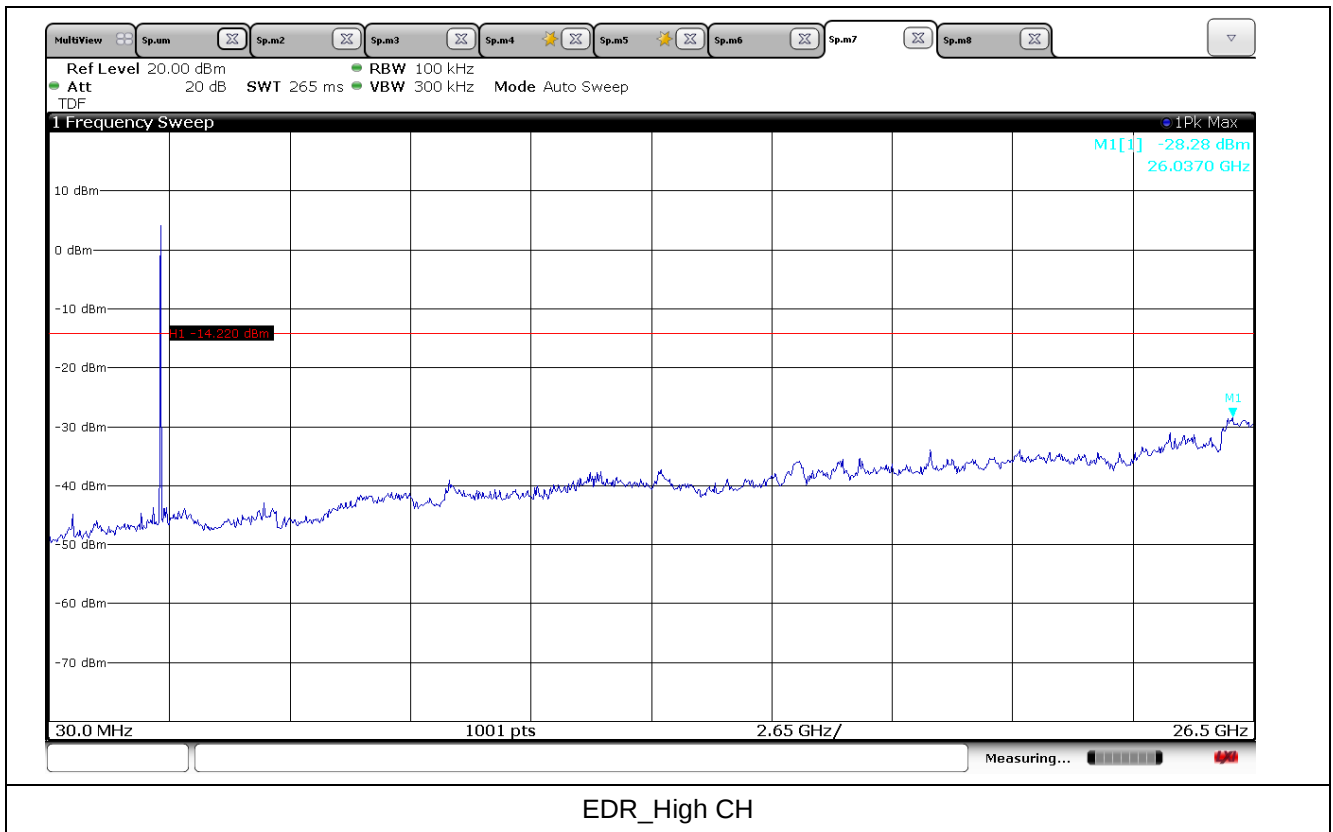





10.4.1.3 Band Edge

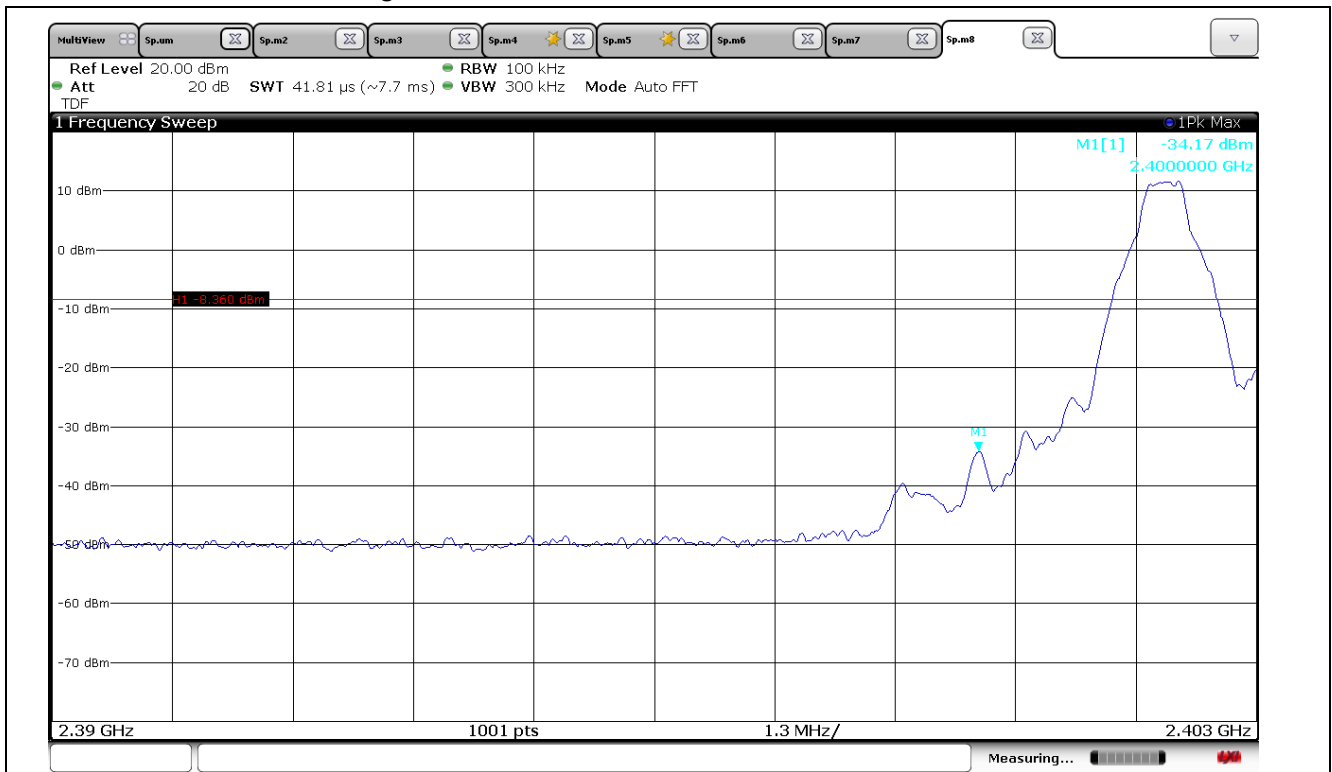


BDR_Low CH

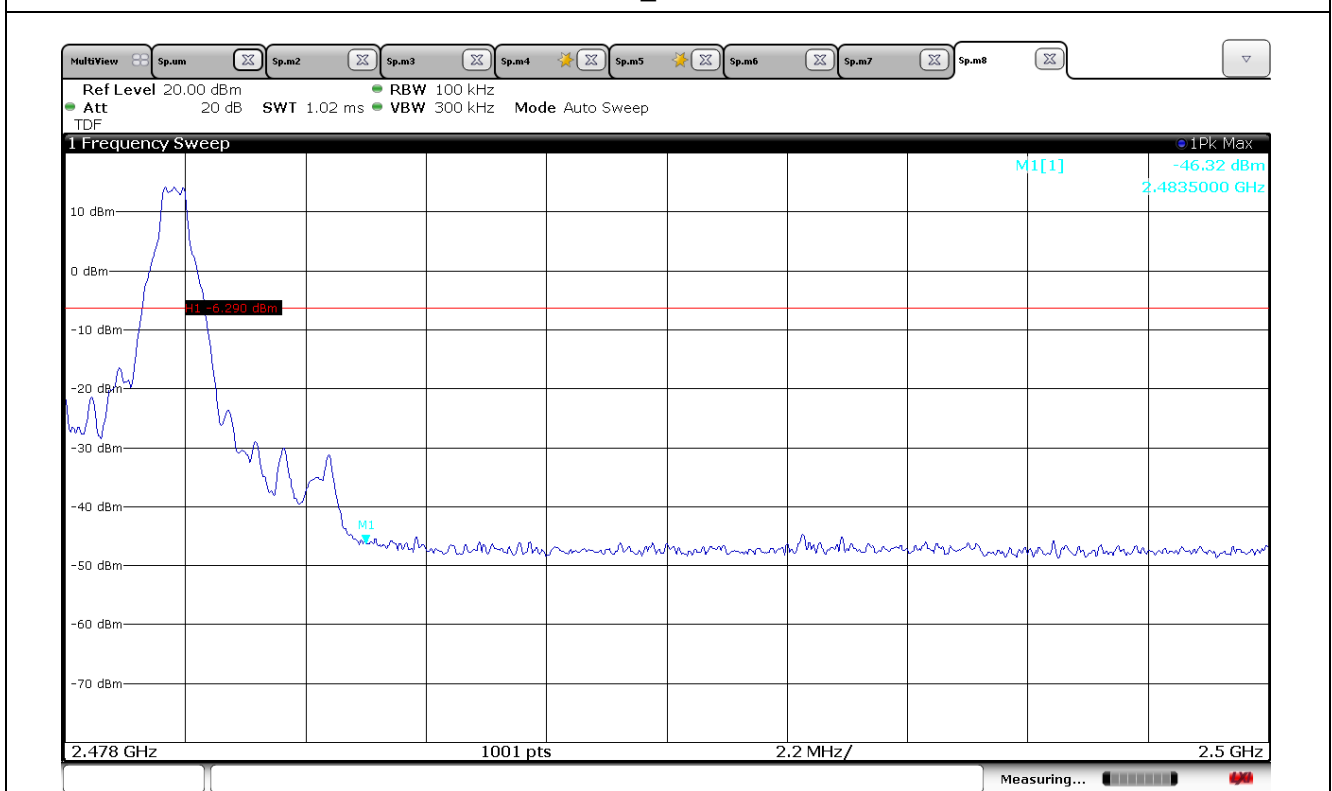


BDR_High CH

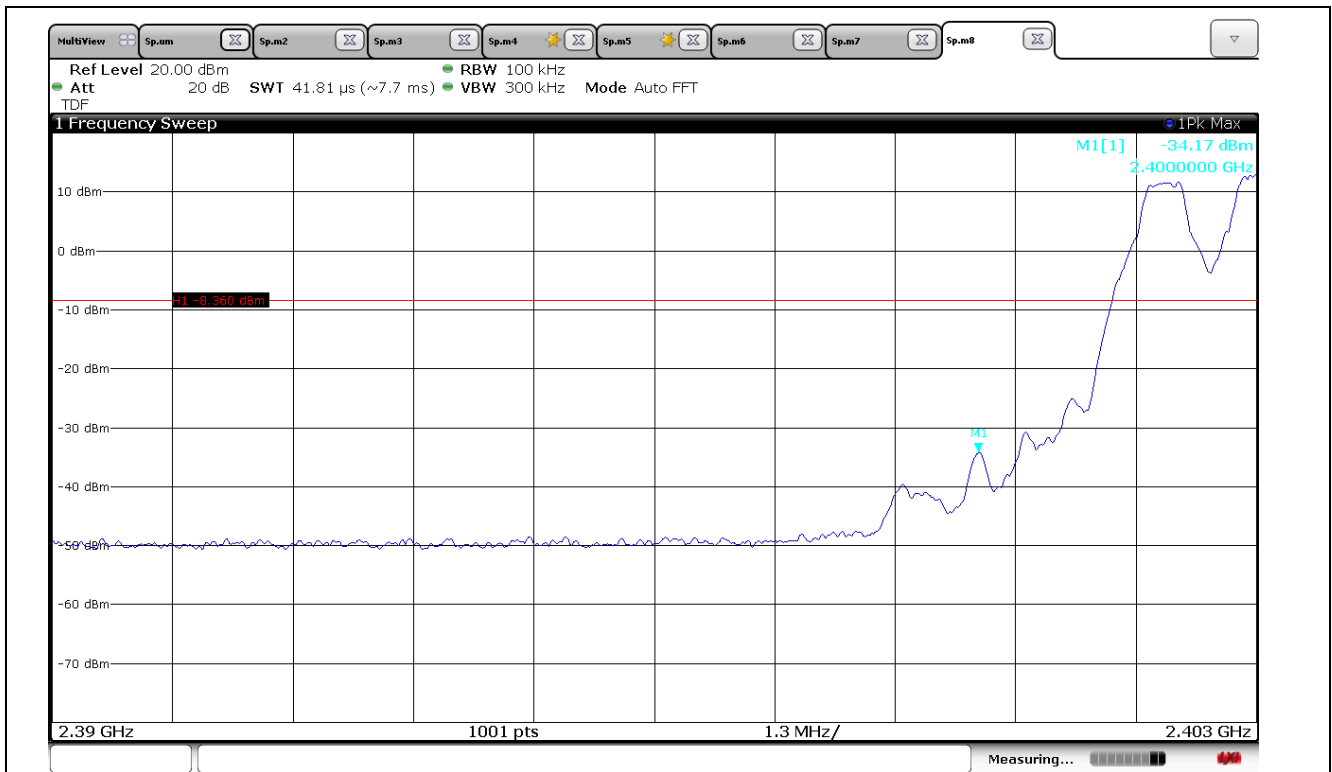


BDR_Hopping_Low CH

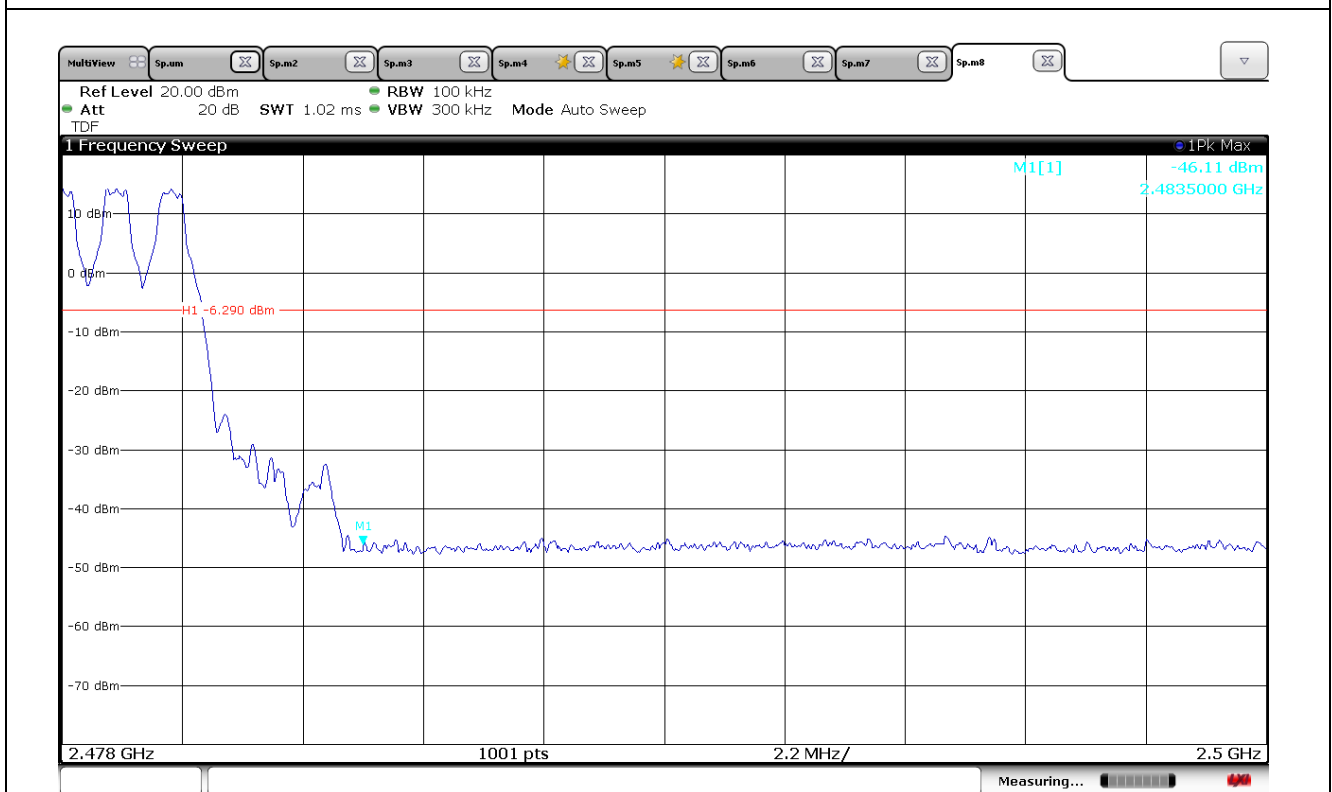


BDR_Hopping_High CH

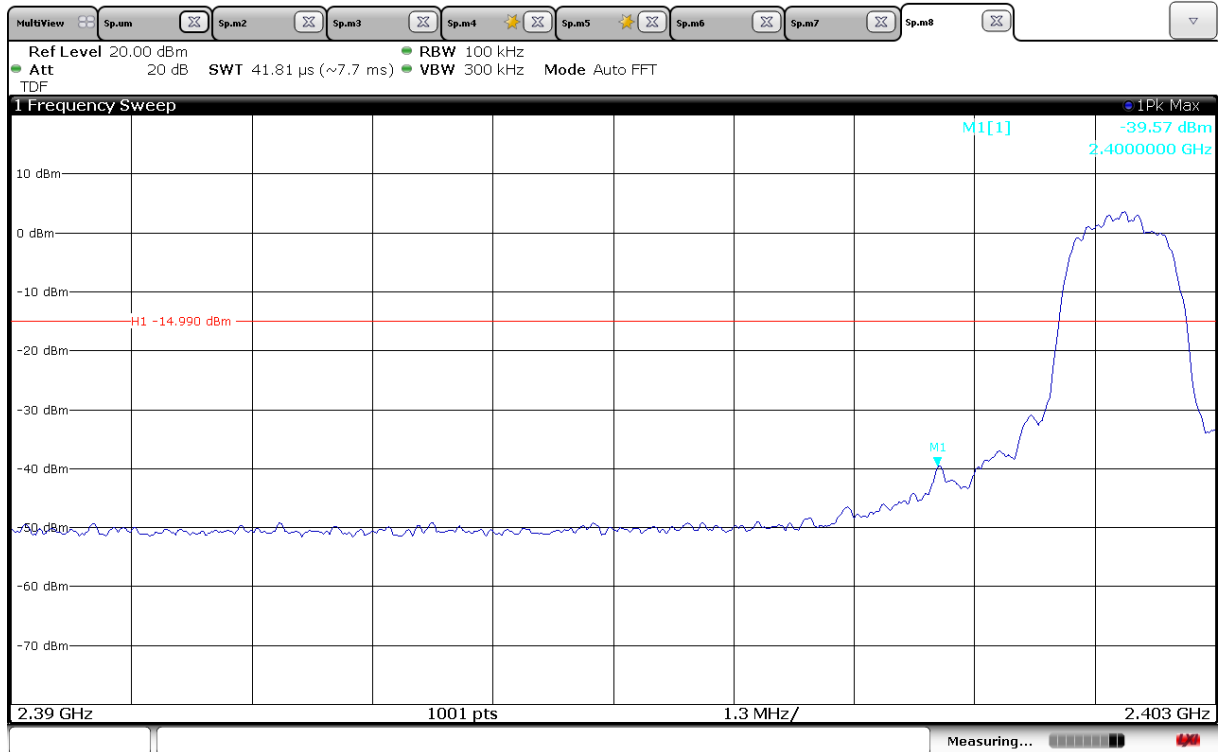


EDR_Low CH

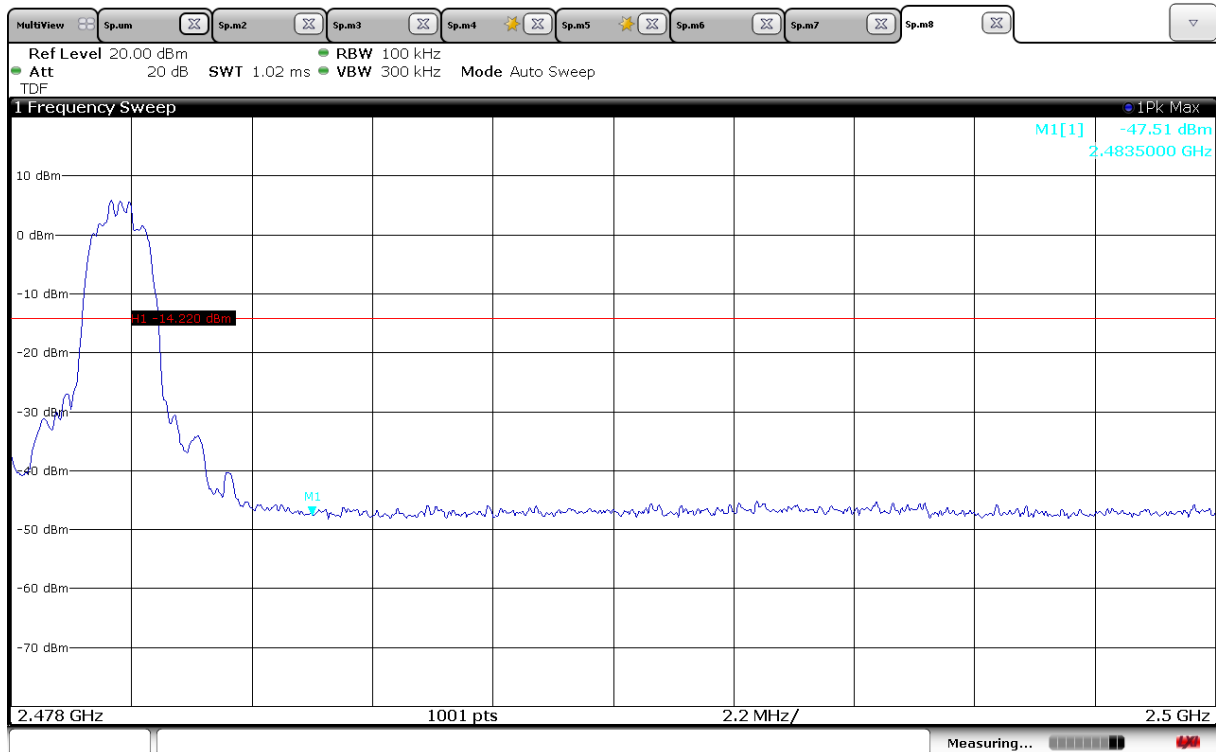

EDR_High CH

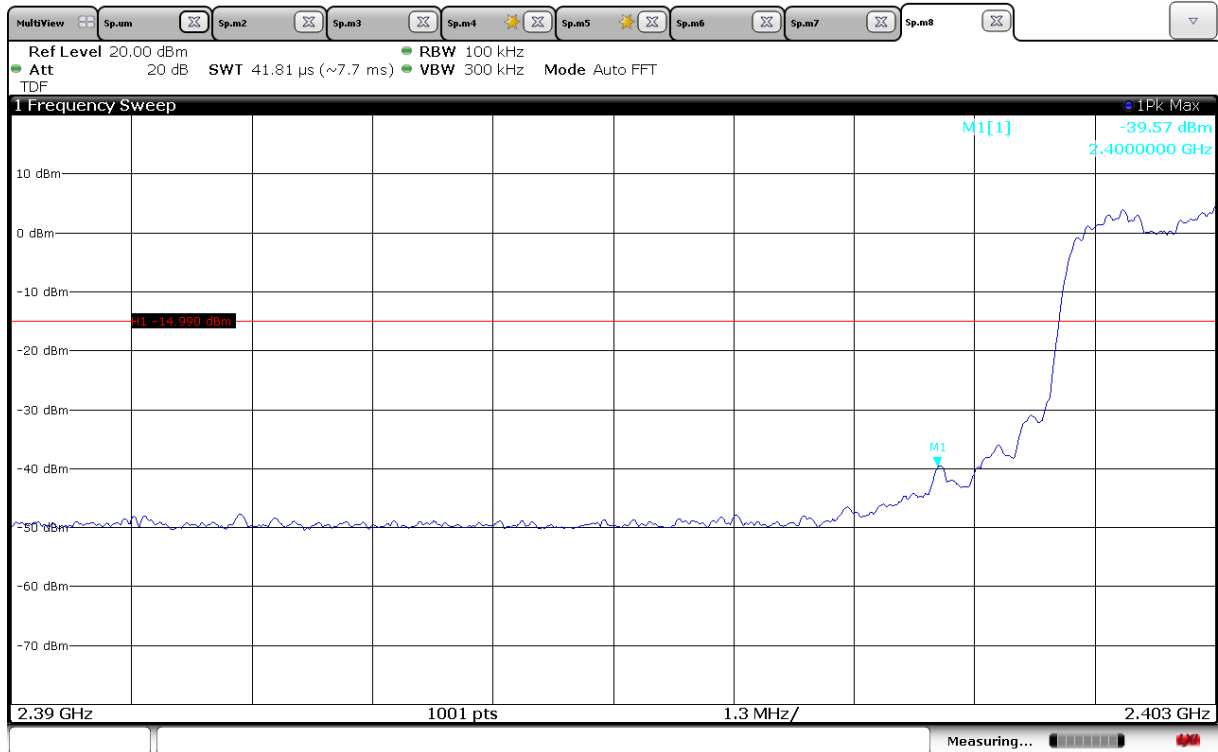

EDR_Hopping_Low CH

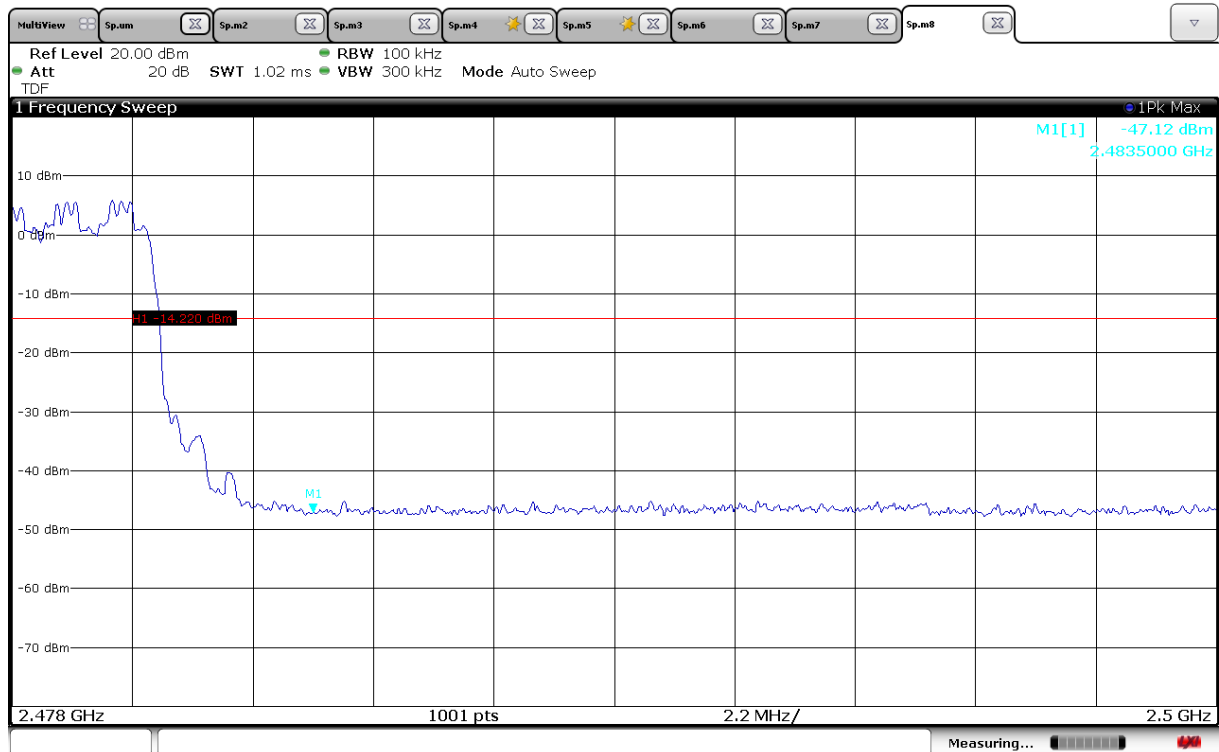

EDR_Hopping_High CH

11. Radiated Spurious Emission

11.1 Operating environment

Temperature : (22 ~ 24) °C
Relative humidity : (47 ~ 49) %

11.2 Measurement method


Standard : §15.247 (d), §15.209, §15.205
RSS-247 (5.5) & RSS-Gen (6.13)

11.3 Test setup


The radiated emissions measurements were performed on the 3 m, Semi-Anechoic Chamber. The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.


11.3.1 Below 30 MHz

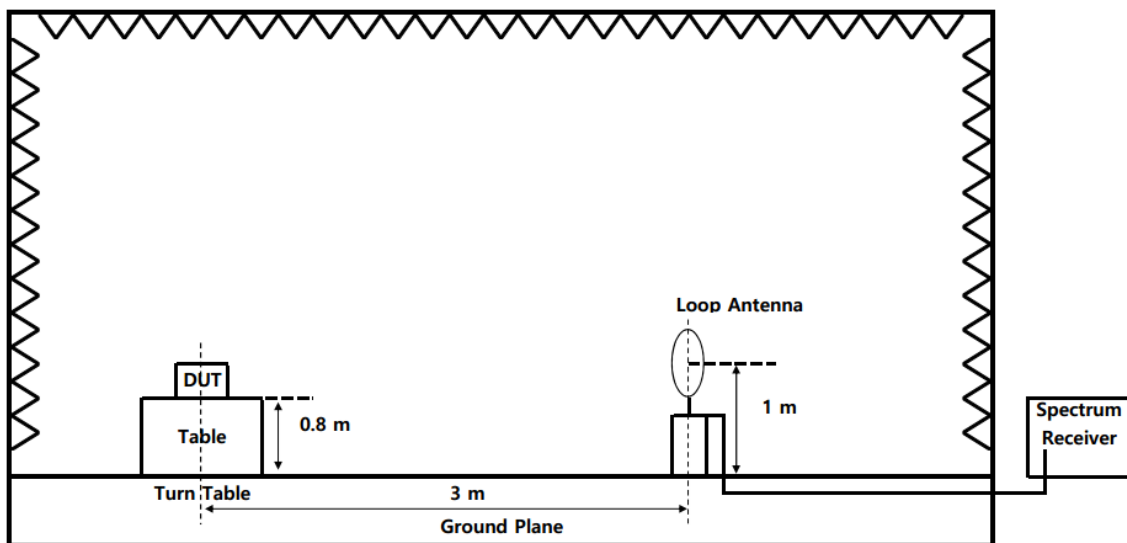

11.3.2 30 MHz to 1 GHz

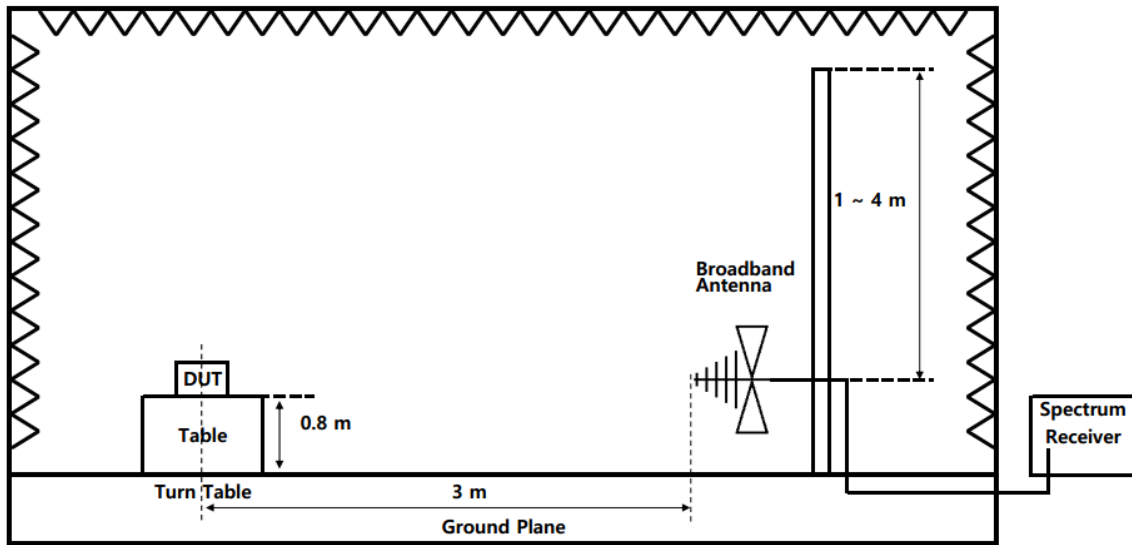

11.3.3 Above 1 GHz

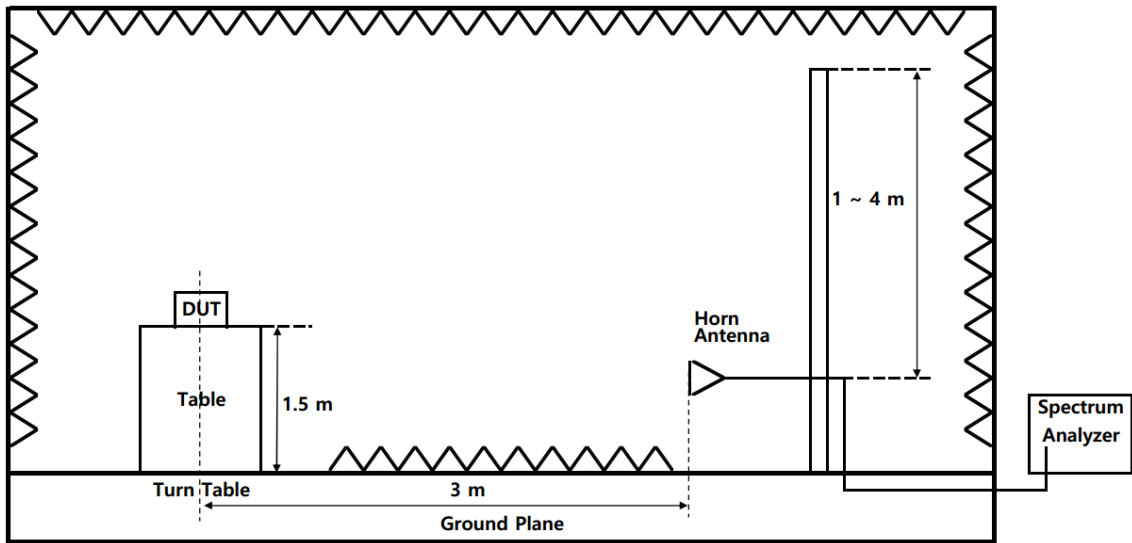

**11.4 Test data**

Test date : 18. Oct. 2019 ~ 21. Oct. 2019
 Operating mode : Continuous Transmit
 Test Result : Pass

11.4.1 Test data for Restricted band**11.4.1.1 BDR**

Frequency (MHz)	Reading (dBμV)	Detector	Ant. Pol. (H/V)	Corr. Factor (dB)	DCCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low CH								
2 376.29	50.46	Peak	H	-10.90	-	39.56	73.98	34.42
	40.84	Average	H		-24.79	5.15	53.98	48.83
High CH								
2 483.50	63.89	Peak	H	-9.50	-	54.39	73.98	19.59
	46.38	Average	H		-24.79	12.09	53.98	41.89

- ※ Ant. Pol. : Antenna Polarization
- ※ Corr Factor. : Antenna Factor + Cable Loss - Amplifier Gain
- ※ DCCF(Duty Cycle Correction Factor): $20 * \log(\text{worst case dwell time} / 100 \text{ ms}) \text{ dB}$
- ※ Result = Reading + Corr Factor+ DCCF
- ※ Margin = Limit- Result

11.4.1.2 EDR (3 Mbps)

Frequency (MHz)	Reading (dBμV)	Detector	Ant. Pol. (H/V)	Corr. Factor (dB)	DCCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low CH								
2 375.89	49.06	Peak	H	-10.90	-	38.16	73.98	35.82
	37.13	Average	H		-24.76	1.47	53.98	52.51
High CH								
2 483.64	61.34	Peak	H	-9.50	-	51.84	73.98	22.14
	42.27	Average	H		-24.76	8.01	53.98	45.97

- ※ Ant. Pol. : Antenna Polarization
- ※ Corr Factor. : Antenna Factor + Cable Loss - Amplifier Gain
- ※ DCCF(Duty Cycle Correction Factor): $20 * \log(\text{worst case dwell time} / 100 \text{ ms}) \text{ dB}$
- ※ Result = Reading + Corr Factor+ DCCF
- ※ Margin = Limit- Result



11.4.2 Test data for Spurious & Harmonic

11.4.2.1 Measurement Results for Below 30 MHz

11.4.2.1.1 BDR

Frequency (MHz)	Reading (dBμV)	Detector	Ant. Pol. (H/V)	Corr. Factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low CH							
It was not found any emissions peaks found from the EUT.							
Mid CH							
It was not found any emissions peaks found from the EUT.							
High CH							
It was not found any emissions peaks found from the EUT.							


11.4.2.1.2 EDR (3 Mbps)

Frequency (MHz)	Reading (dBμV)	Detector	Ant. Pol. (H/V)	Corr. Factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low CH							
It was not found any emissions peaks found from the EUT.							
Mid CH							
It was not found any emissions peaks found from the EUT.							
High CH							
It was not found any emissions peaks found from the EUT.							



11.4.2.2 Measurement Results for 30 MHz to 1 GHz


11.4.2.2.1 BDR

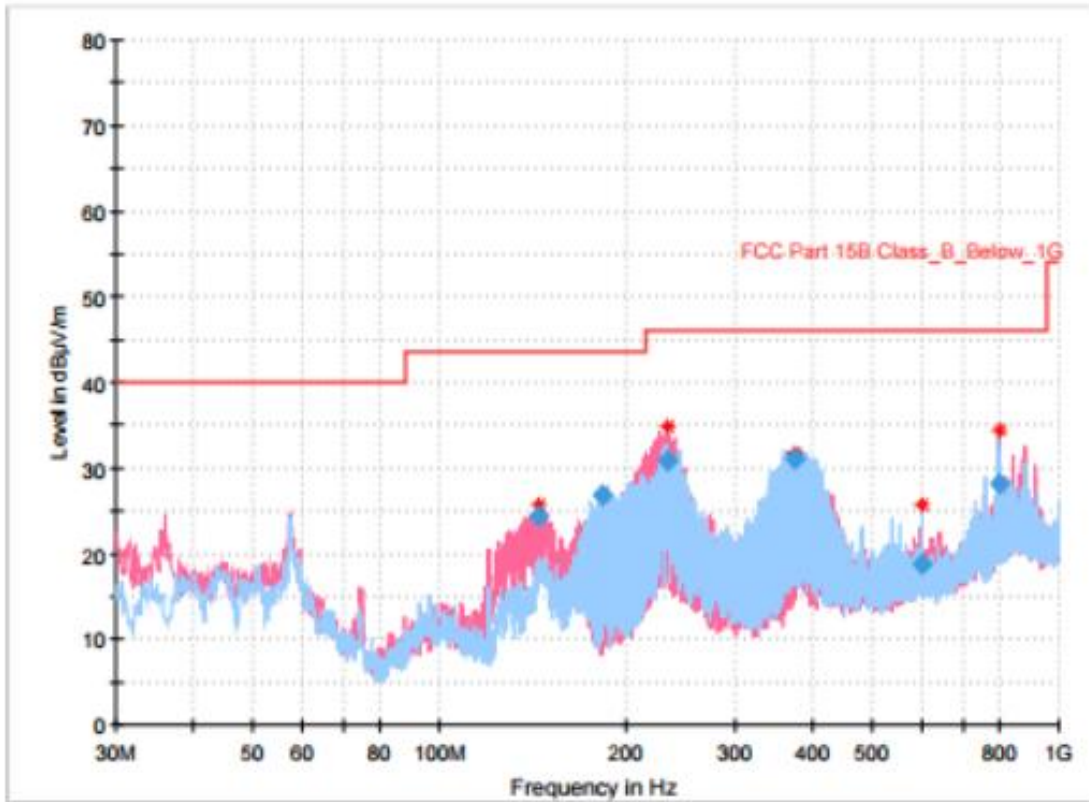

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
144.460000	24.38	43.50	19.12	1000.0	120.000	99.9	V	267.0	-24.7
183.454000	26.84	43.50	16.66	1000.0	120.000	200.1	H	262.0	-22.8
233.021000	30.85	46.00	15.15	1000.0	120.000	200.1	V	297.0	-20.1
374.544000	31.11	46.00	14.89	1000.0	120.000	200.1	H	327.0	-16.0
599.681000	18.69	46.00	27.31	1000.0	120.000	200.1	H	62.0	-11.4
799.501000	28.26	46.00	17.74	1000.0	120.000	200.1	V	64.0	-8.8


Low CH

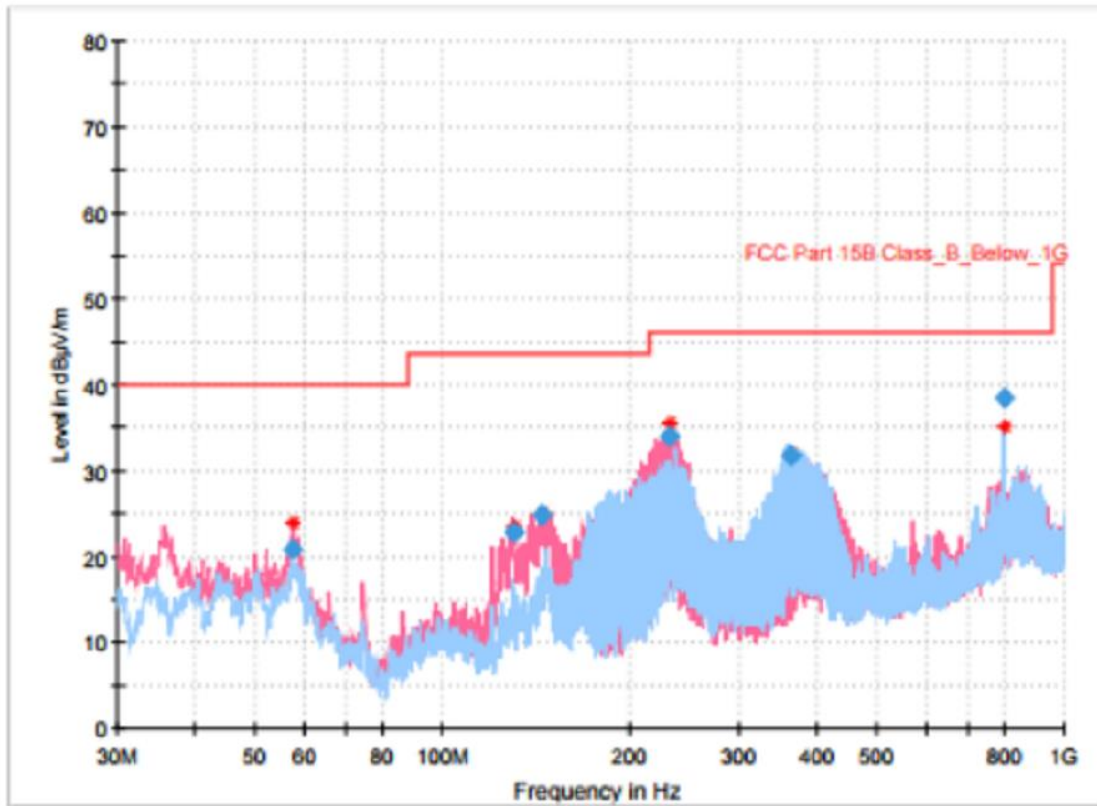

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
57.645000	20.76	40.00	19.24	1000.0	120.000	99.9	V	190.0	-20.0
129.910000	22.86	43.50	20.64	1000.0	120.000	99.9	V	326.0	-24.2
144.848000	24.71	43.50	18.79	1000.0	120.000	99.9	V	301.0	-24.8
232.148000	34.01	46.00	11.99	1000.0	120.000	200.1	V	306.0	-20.3
363.971000	31.71	46.00	14.29	1000.0	120.000	99.9	H	346.0	-16.4
799.792000	38.35	46.00	7.65	1000.0	120.000	99.9	V	301.0	-8.8

Mid CH

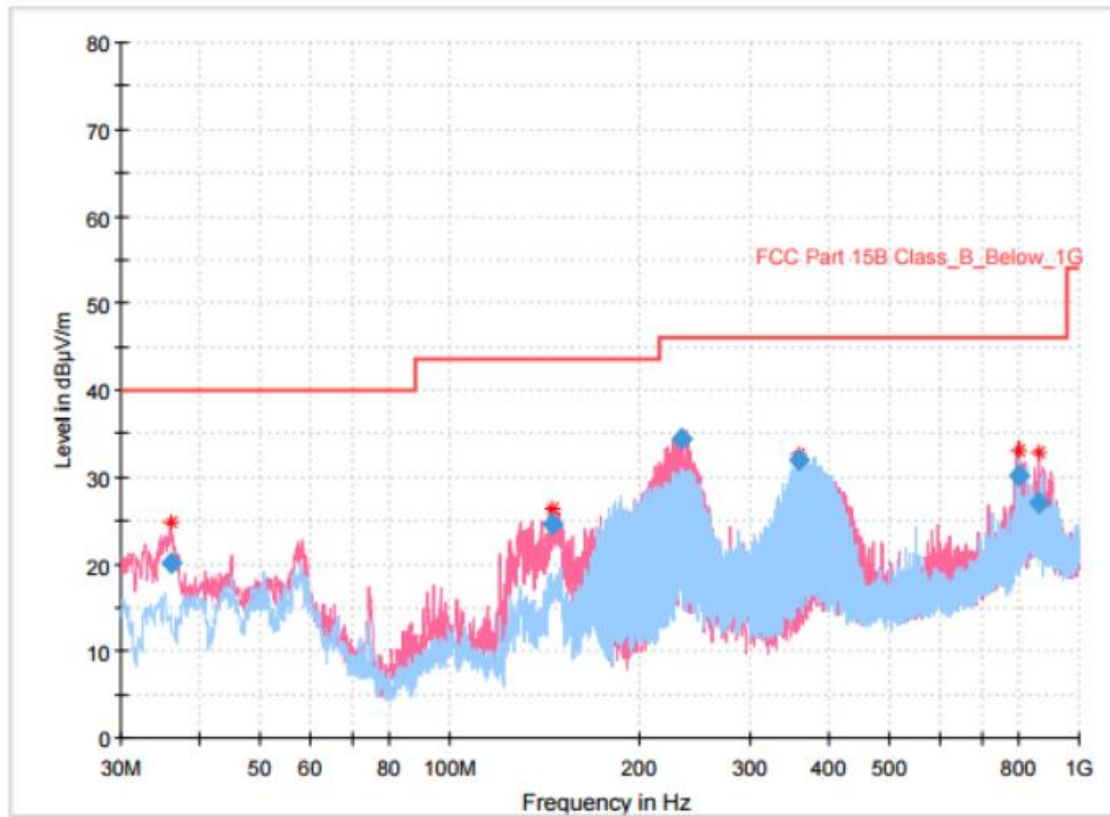


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
36.014000	20.01	40.00	19.99	1000.0	120.000	100.1	V	33.0	-21.7
145.430000	24.53	43.50	18.97	1000.0	120.000	100.1	V	274.0	-24.8
233.118000	34.34	46.00	11.66	1000.0	120.000	199.9	V	301.0	-20.1
359.218000	32.03	46.00	13.97	1000.0	120.000	100.1	H	334.0	-16.6
798.822000	30.08	46.00	15.92	1000.0	120.000	199.9	V	0.0	-8.8
859.835000	27.04	46.00	18.96	1000.0	120.000	100.1	V	318.0	-7.9

High CH




11.4.2.2.2 EDR (3 Mbps)

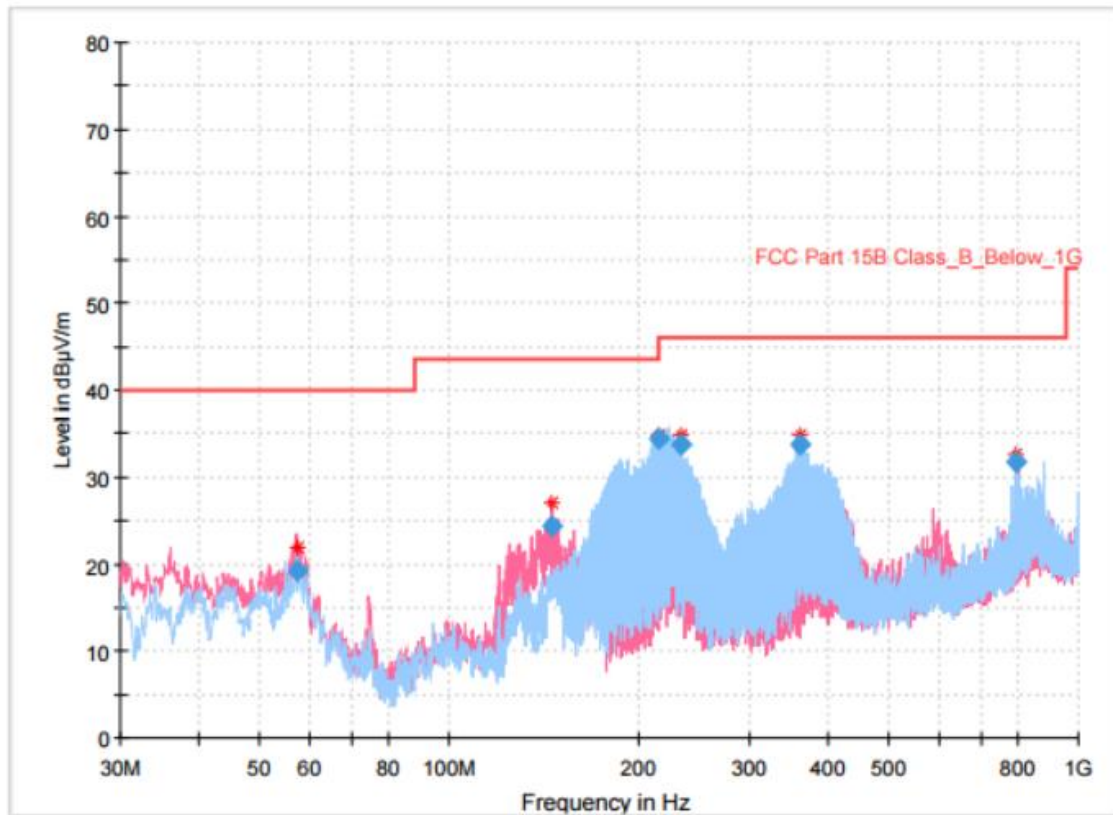

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
57.257000	19.11	40.00	20.89	1000.0	120.000	199.9	H	178.0	-20.1
145.527000	24.35	43.50	19.15	1000.0	120.000	100.1	V	285.0	-24.8
215.949000	34.36	43.50	9.14	1000.0	120.000	100.1	H	257.0	-21.4
233.118000	33.84	46.00	12.16	1000.0	120.000	100.1	H	269.0	-20.1
362.128000	33.75	46.00	12.25	1000.0	120.000	100.1	H	335.0	-16.5
796.882000	31.64	46.00	14.36	1000.0	120.000	199.9	H	53.0	-8.8


Low CH

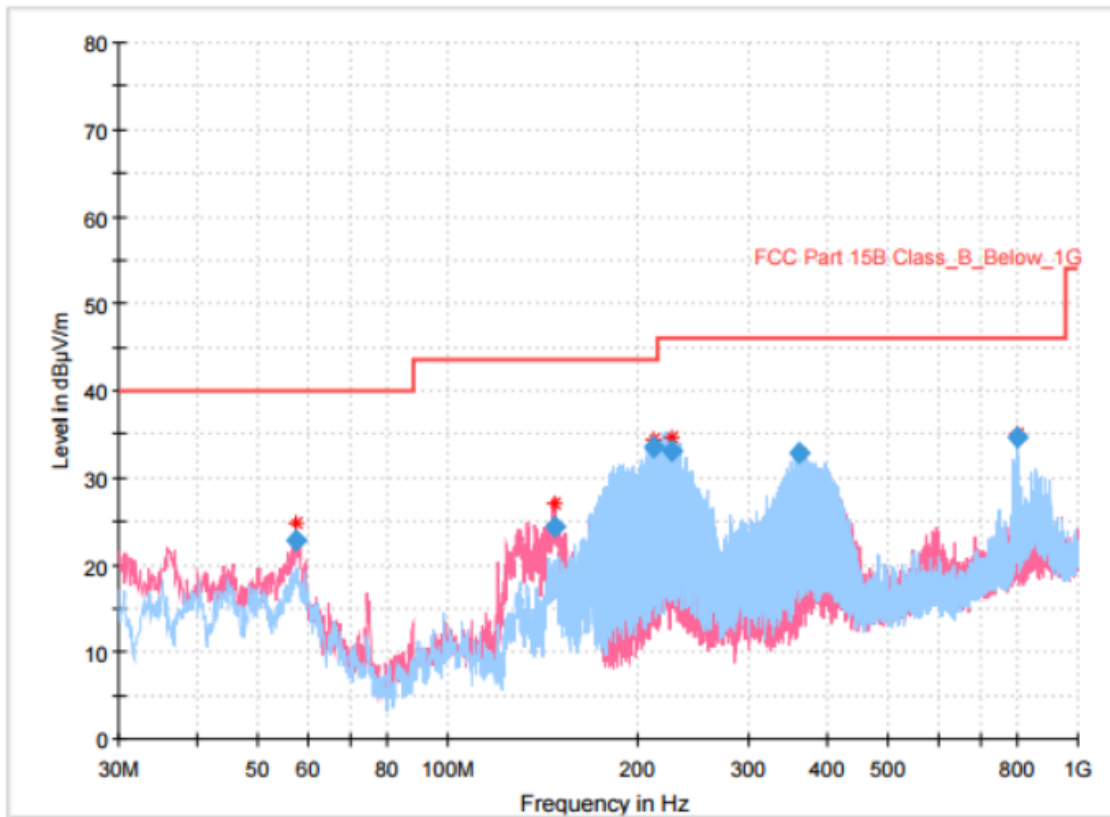

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
57.548000	22.86	40.00	17.14	1000.0	120.000	100.1	V	256.0	-20.0
147.661000	24.26	43.50	19.24	1000.0	120.000	100.1	V	287.0	-24.4
212.166000	33.52	43.50	9.98	1000.0	120.000	100.1	H	244.0	-21.8
227.492000	32.97	46.00	13.03	1000.0	120.000	100.1	H	255.0	-20.7
361.061000	32.79	46.00	13.21	1000.0	120.000	100.1	H	333.0	-16.6
798.822000	34.66	46.00	11.34	1000.0	120.000	100.1	H	300.0	-8.8

Mid CH

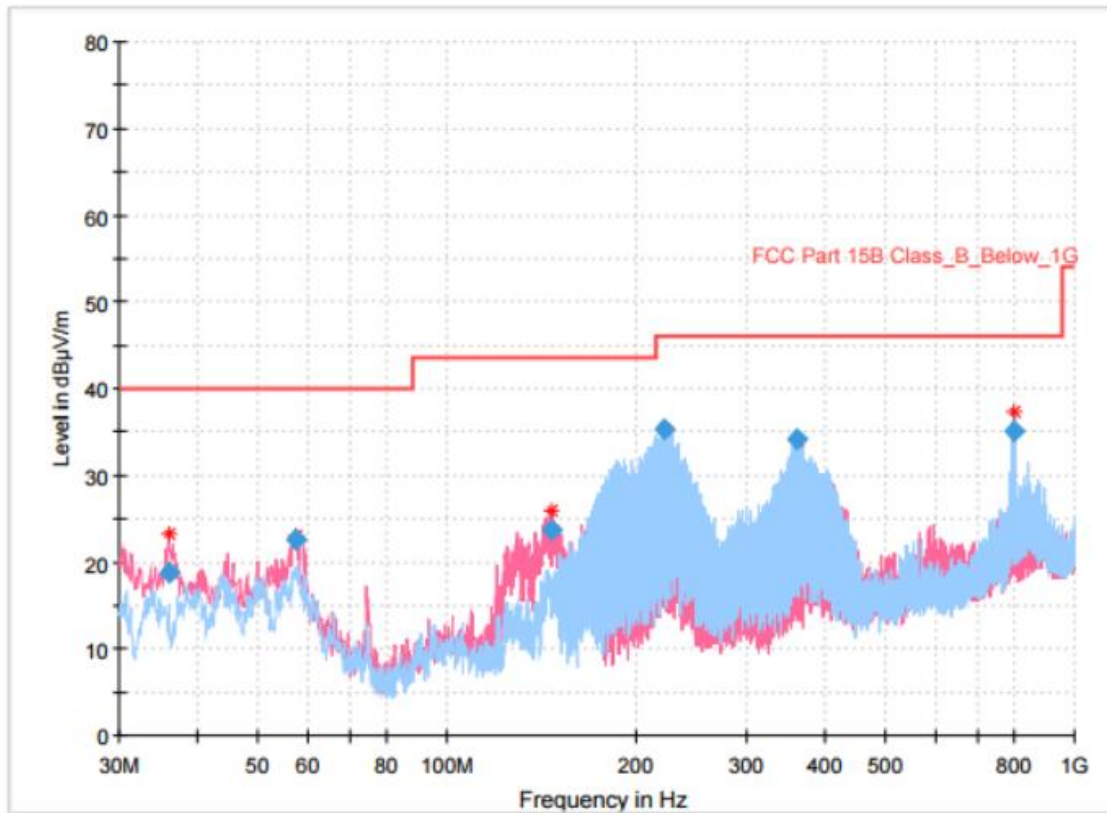

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
36.014000	18.66	40.00	21.34	1000.0	120.000	100.1	V	51.0	-21.7
57.451000	22.61	40.00	17.39	1000.0	120.000	100.1	V	312.0	-20.0
146.691000	23.75	43.50	19.75	1000.0	120.000	100.1	V	301.0	-24.6
221.672000	35.41	46.00	10.59	1000.0	120.000	100.1	H	265.0	-21.1
360.188000	34.29	46.00	11.71	1000.0	120.000	100.1	H	342.0	-16.6
799.016000	35.18	46.00	10.82	1000.0	120.000	100.1	H	287.0	-8.8

High CH



11.4.2.3 Measurement Results for Above 1 GHz

11.4.2.3.1 BDR

Frequency (MHz)	Reading (dBμV)	Detector	Ant. Pol. (H/V)	Corr. Factor (dB)	DCCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low CH								
4 804.00	54.87	Peak	H	-1.00	-	53.87	73.98	20.11
	47.06	Average	H		-24.79	21.27	53.98	32.71
7 206.00	50.68	Peak	V	6.90	-	57.58	73.98	16.40
	41.14	Average	V		-24.79	23.25	53.98	30.73
9 608.00	49.04	Peak	V	11.80	-	60.84	73.98	13.14
	37.64	Average	V		-24.79	24.65	53.98	29.33
Mid CH								
4 882.00	58.11	Peak	H	-1.40	-	56.71	73.98	17.27
	49.18	Average	H		-24.79	22.99	53.98	30.99
7 323.00	49.18	Peak	H	7.60	-	56.78	73.98	17.20
	38.11	Average	H		-24.79	20.92	53.98	33.06
9 764.00	47.78	Peak	H	13.00	-	60.78	73.98	13.20
	35.31	Average	H		-24.79	23.52	53.98	30.46
High CH								
4 960.00	57.33	Peak	V	-2.10	-	55.23	73.98	18.75
	49.34	Average	V		-24.79	22.45	53.98	31.53
7 323.00	48.56	Peak	H	7.20	-	55.76	73.98	18.22
	37.97	Average	H		-24.79	20.38	53.98	33.60
9 920.00	49.07	Peak	H	13.30	-	62.37	73.98	11.61
	37.29	Average	H		-24.79	25.80	53.98	28.18

※ Ant. Pol. : Antenna Polarization

※ Corr Factor. : Antenna Factor + Cable Loss - Amplifier Gain

※ DCCF(Duty Cycle Correction Factor): $20 * \log(\text{worst case dwell time} / 100 \text{ ms}) \text{ dB}$

※ Result = Reading + Corr Factor+ DCCF

※ Margin = Limit- Result




11.4.2.3.2 EDR (3 Mbps)

Frequency (MHz)	Reading (dBμV)	Detector	Ant. Pol. (H/V)	Corr. Factor (dB)	DCCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low CH								
4 804.00	51.21	Peak	V	-1.00	-	50.21	73.98	23.77
	39.41	Average	V		-24.76	13.65	53.98	40.33
Mid CH								
4 882.00	50.86	Peak	V	-1.40	-	49.46	73.98	24.52
	38.82	Average	V		-24.76	12.66	53.98	41.32
High CH								
4 960.00	50.16	Peak	V	-2.10	-	48.06	73.98	25.92
	38.82	Average	V		-24.76	11.96	53.98	42.02


- ※ Ant. Pol. : Antenna Polarization
- ※ Corr. Factor. : Antenna Factor + Cable Loss - Amplifier Gain
- ※ DCCF(Duty Cycle Correction Factor): $20 * \log(\text{worst case dwell time} / 100 \text{ ms}) \text{ dB}$
- ※ Result = Reading + Corr. Factor+ DCCF
- ※ Margin = Limit- Result



11.4.2.3.3 Measured Duty cycle

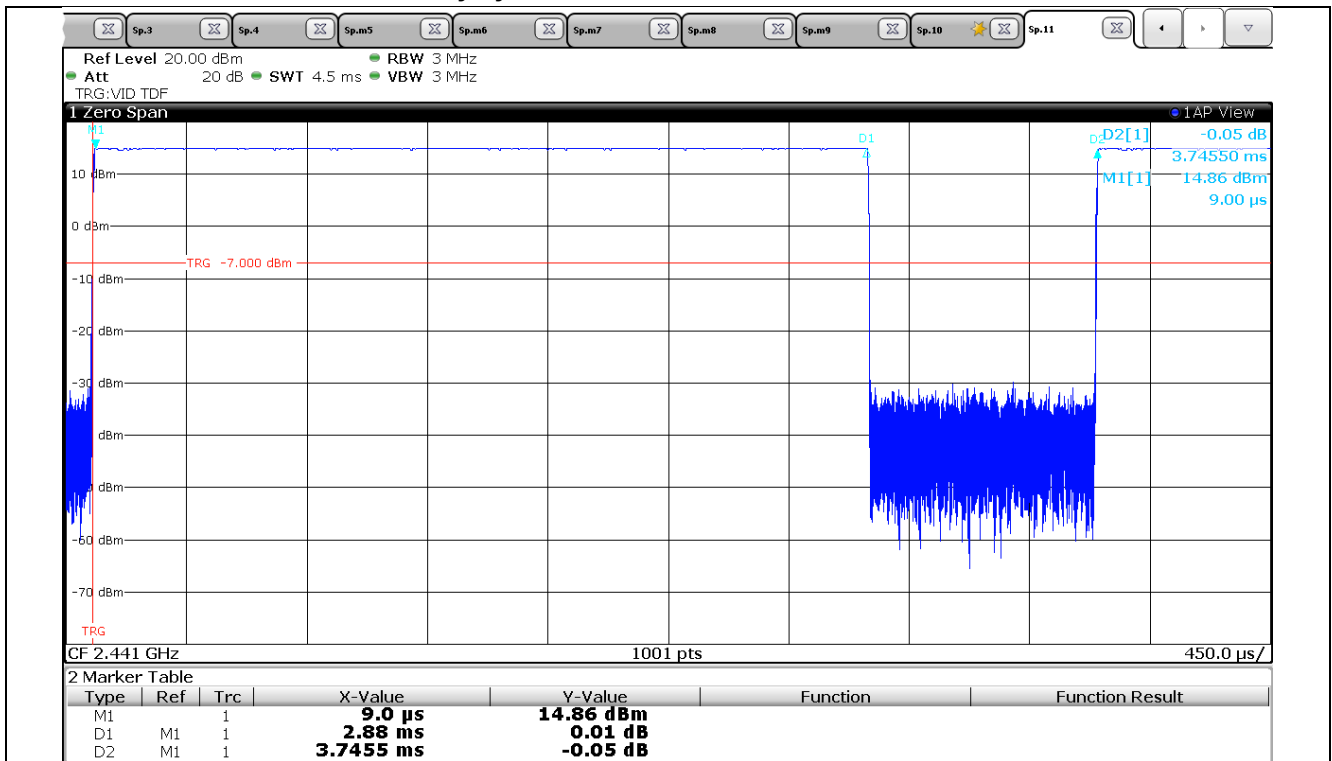

BDR

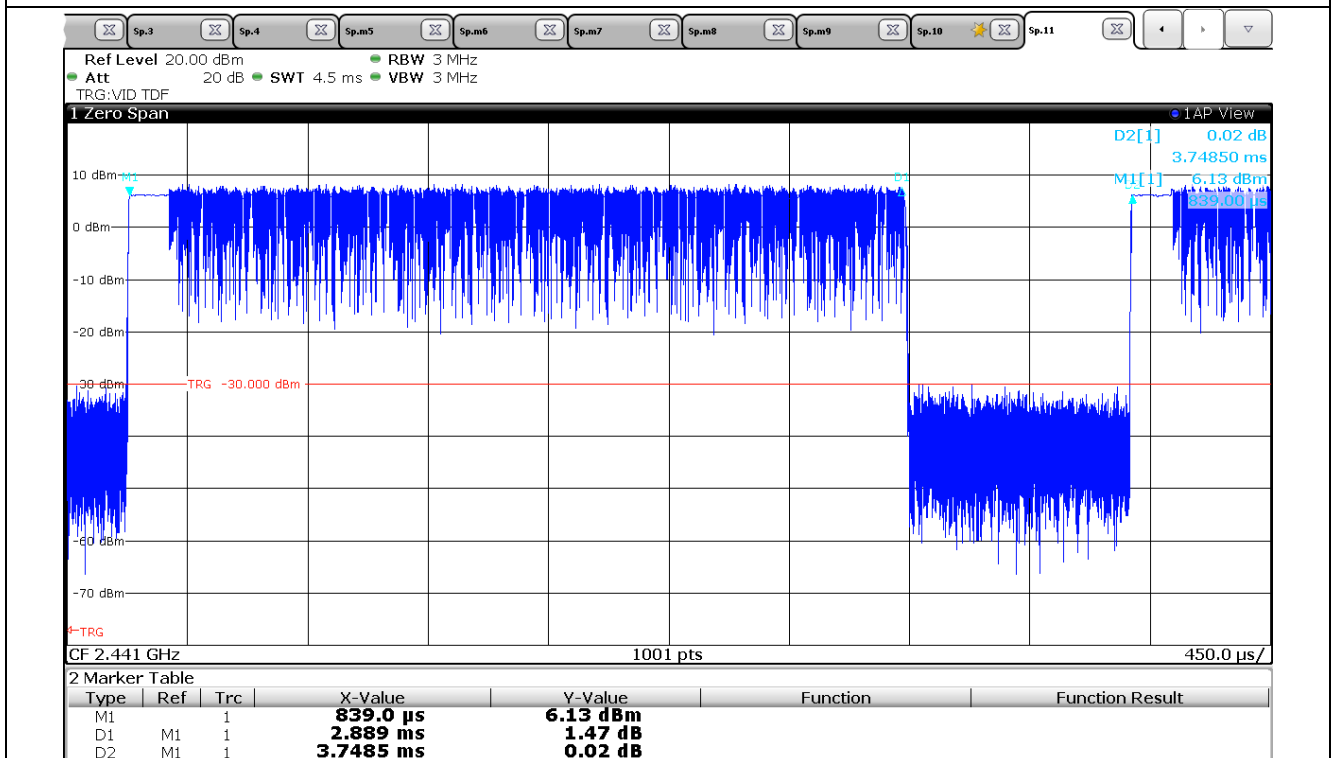

EDR

Dwell time: on time * No. of hop

DCCF(Duty cycle Correction Factor) = $20\log(\text{dwell time}/100)$



12. Power Line Conducted Emission

12.1 Operating environment

Temperature : 22 °C

Relative humidity : 44 %

12.2 Measurement method

Standard : §15.207 / RSS-GEN 8.8

12.3 Test setup

The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a 50 Ω / 50 μ H + 5 Ω Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.






12.4 Test data

Test date : 21. Oct. 2019
 Operating mode : Transmit mode
 Test Result : Pass


12.4.1 Measured Results & Graph

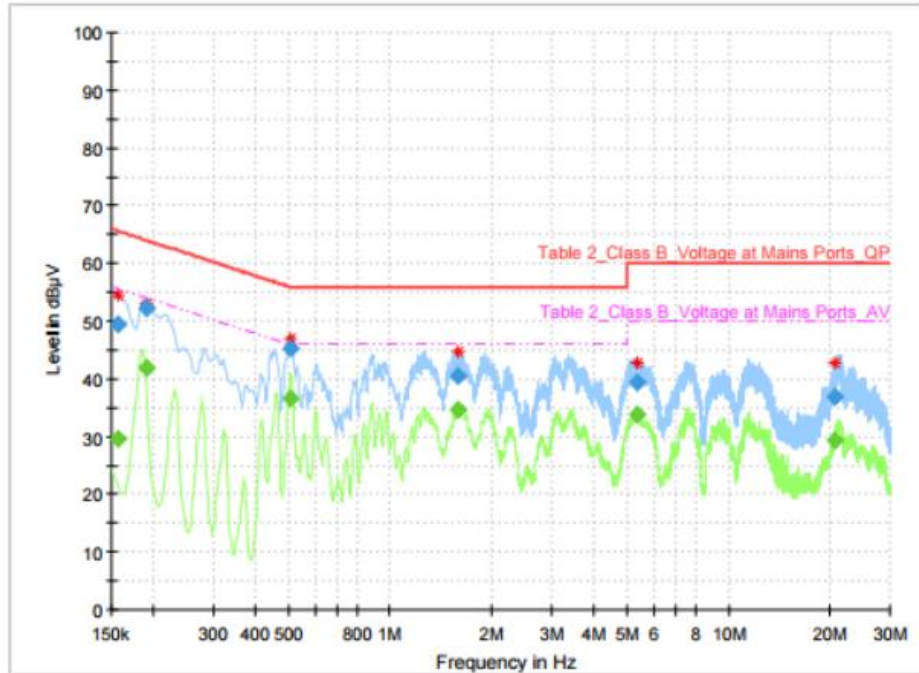

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.156750	---	29.74	55.63	25.89	1000.0	9.000	L1	ON	9.8
0.156750	49.44	---	65.63	16.20	1000.0	9.000	L1	ON	9.8
0.190500	---	42.00	54.02	12.01	1000.0	9.000	L1	ON	9.9
0.190500	52.10	---	64.02	11.91	1000.0	9.000	L1	ON	9.9
0.510000	---	36.52	46.00	9.48	1000.0	9.000	L1	ON	9.9
0.510000	45.37	---	56.00	10.64	1000.0	9.000	L1	ON	9.9
1.583250	---	34.52	46.00	11.48	1000.0	9.000	L1	ON	9.7
1.583250	40.62	---	56.00	15.38	1000.0	9.000	L1	ON	9.7
5.361000	---	33.76	50.00	16.24	1000.0	9.000	L1	ON	9.9
5.361000	39.43	---	60.00	20.57	1000.0	9.000	L1	ON	9.9
20.694750	---	29.27	50.00	20.73	1000.0	9.000	L1	ON	10.1
20.694750	36.75	---	60.00	23.25	1000.0	9.000	L1	ON	10.1


BDR_Live line

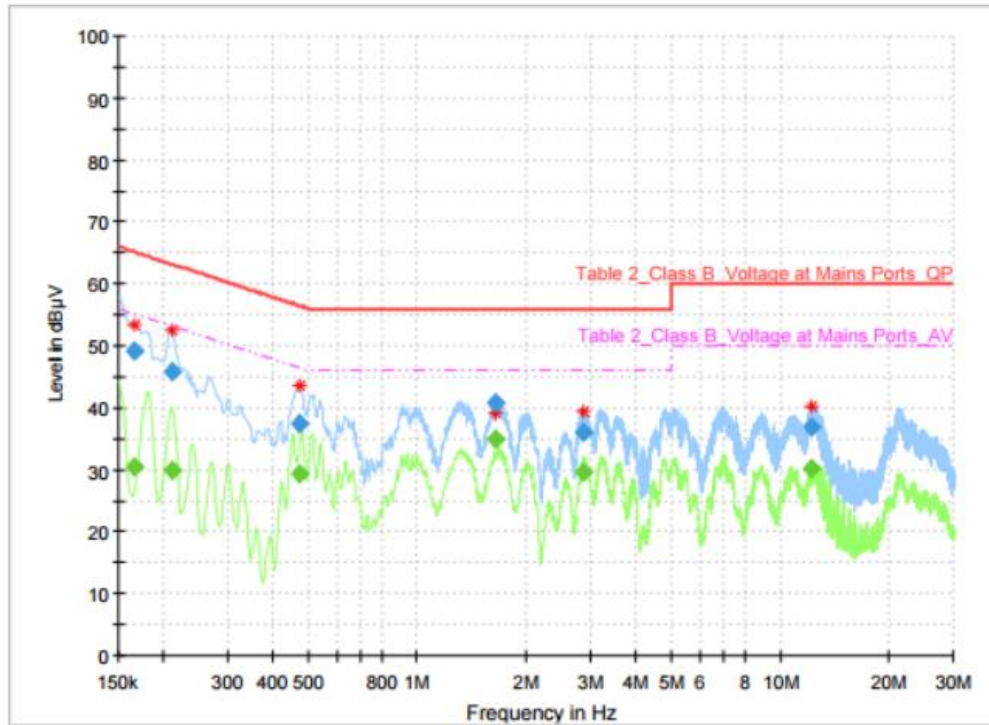

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.165750	---	30.42	55.17	24.76	1000.0	9.000	N	ON	10.0
0.165750	49.23	---	65.17	15.94	1000.0	9.000	N	ON	10.0
0.210750	---	29.86	53.18	23.31	1000.0	9.000	N	ON	9.8
0.210750	45.86	---	63.18	17.32	1000.0	9.000	N	ON	9.8
0.476250	---	29.33	46.40	17.07	1000.0	9.000	N	ON	9.9
0.476250	37.32	---	56.40	19.08	1000.0	9.000	N	ON	9.9
1.639500	---	34.98	46.00	11.02	1000.0	9.000	N	ON	9.8
1.639500	40.90	---	56.00	15.10	1000.0	9.000	N	ON	9.8
2.874750	---	29.70	46.00	16.30	1000.0	9.000	N	ON	9.8
2.874750	36.00	---	56.00	20.00	1000.0	9.000	N	ON	9.8
12.221250	---	30.30	50.00	19.70	1000.0	9.000	N	ON	10.1
12.221250	36.74	---	60.00	23.26	1000.0	9.000	N	ON	10.1


BDR_Neutral line

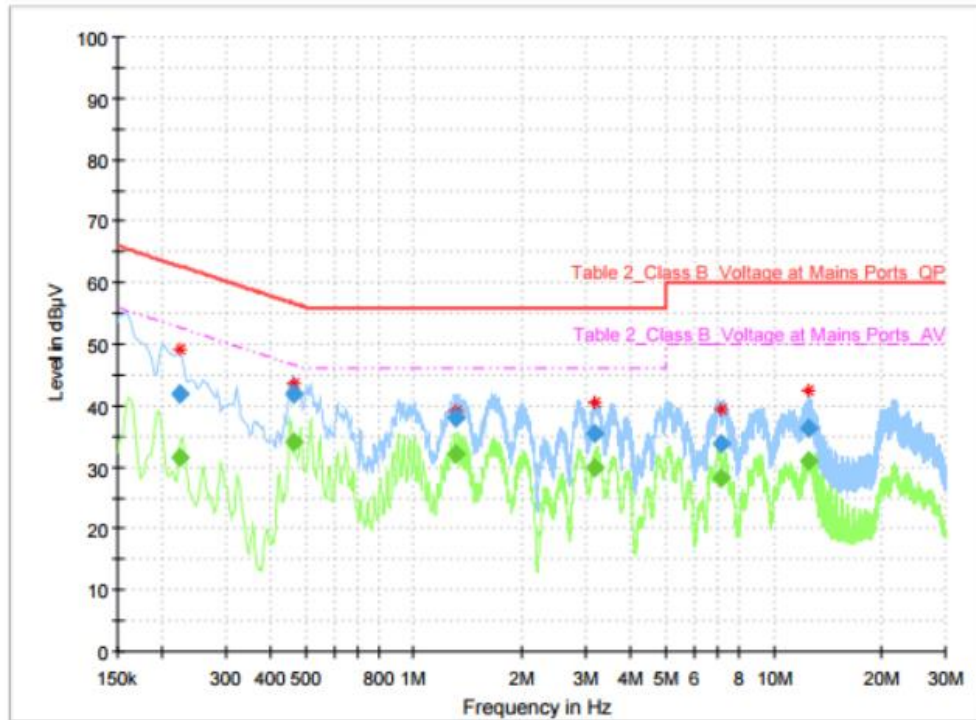

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.224250	---	31.53	52.66	21.13	1000.0	9.000	L1	ON	9.8
0.224250	42.01	---	62.66	20.65	1000.0	9.000	L1	ON	9.8
0.462750	---	34.09	46.64	12.55	1000.0	9.000	L1	ON	9.9
0.462750	42.00	---	56.64	14.64	1000.0	9.000	L1	ON	9.9
1.302000	---	32.18	46.00	13.82	1000.0	9.000	L1	ON	9.8
1.302000	37.87	---	56.00	18.13	1000.0	9.000	L1	ON	9.8
3.167250	---	29.78	46.00	16.22	1000.0	9.000	L1	ON	9.8
3.167250	35.53	---	56.00	20.47	1000.0	9.000	L1	ON	9.8
7.118250	---	28.20	50.00	21.80	1000.0	9.000	L1	ON	9.8
7.118250	33.84	---	60.00	26.16	1000.0	9.000	L1	ON	9.8
12.543000	---	31.06	50.00	18.94	1000.0	9.000	L1	ON	10.0
12.543000	36.35	---	60.00	23.65	1000.0	9.000	L1	ON	10.0

EDR_Live line

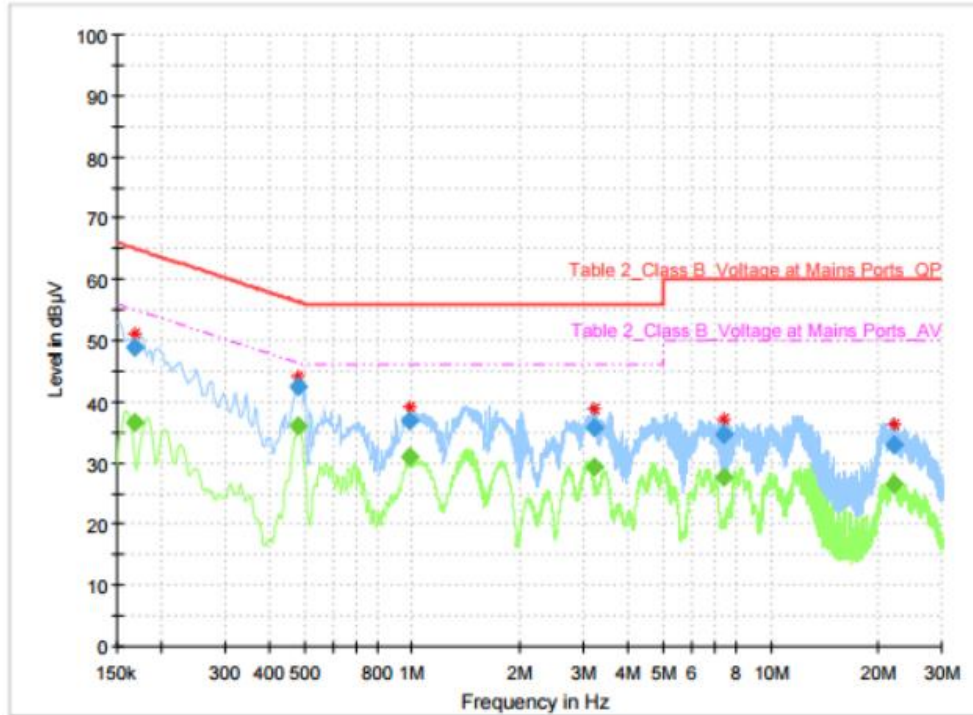

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.168000	---	36.59	55.06	18.47	1000.0	9.000	N	ON	10.0
0.168000	48.87	---	65.06	16.19	1000.0	9.000	N	ON	10.0
0.480750	---	35.90	46.33	10.43	1000.0	9.000	N	ON	9.9
0.480750	42.48	---	56.33	13.85	1000.0	9.000	N	ON	9.9
0.982500	---	31.10	46.00	14.90	1000.0	9.000	N	ON	9.8
0.982500	36.79	---	56.00	19.21	1000.0	9.000	N	ON	9.8
3.212250	---	29.31	46.00	16.69	1000.0	9.000	N	ON	9.8
3.212250	35.77	---	56.00	20.23	1000.0	9.000	N	ON	9.8
7.370250	---	27.62	50.00	22.38	1000.0	9.000	N	ON	9.9
7.370250	34.58	---	60.00	25.42	1000.0	9.000	N	ON	9.9
21.948000	---	26.42	50.00	23.58	1000.0	9.000	N	ON	10.1
21.948000	32.98	---	60.00	27.02	1000.0	9.000	N	ON	10.1

EDR_Neutral line

- END OF REPORT.