


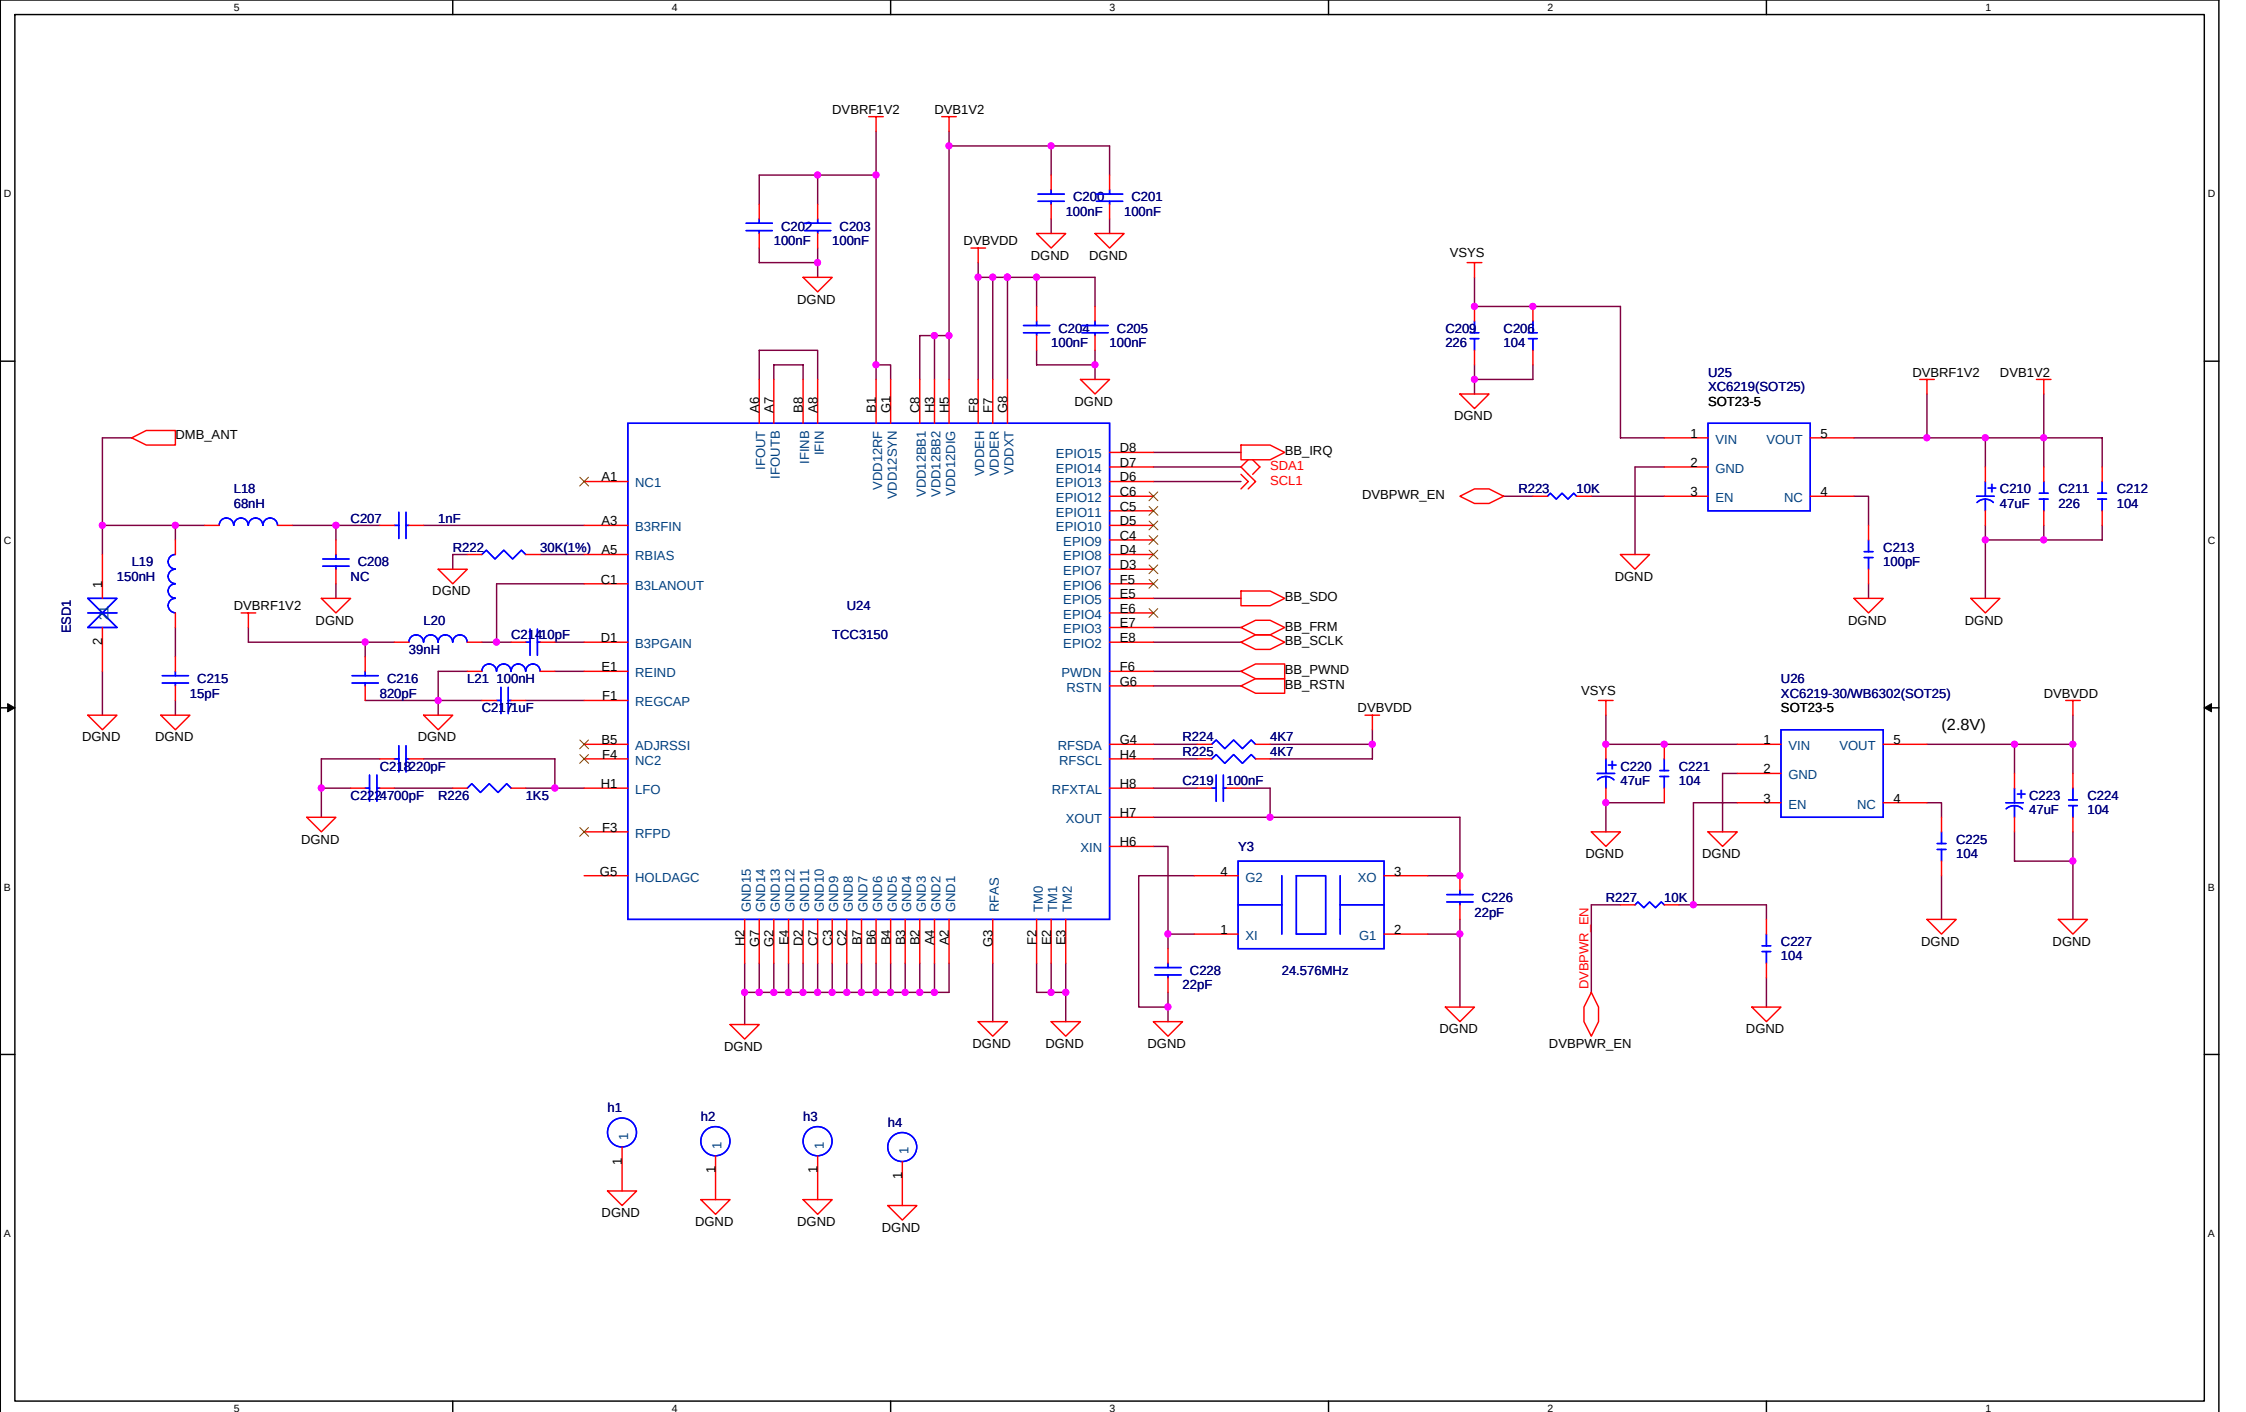


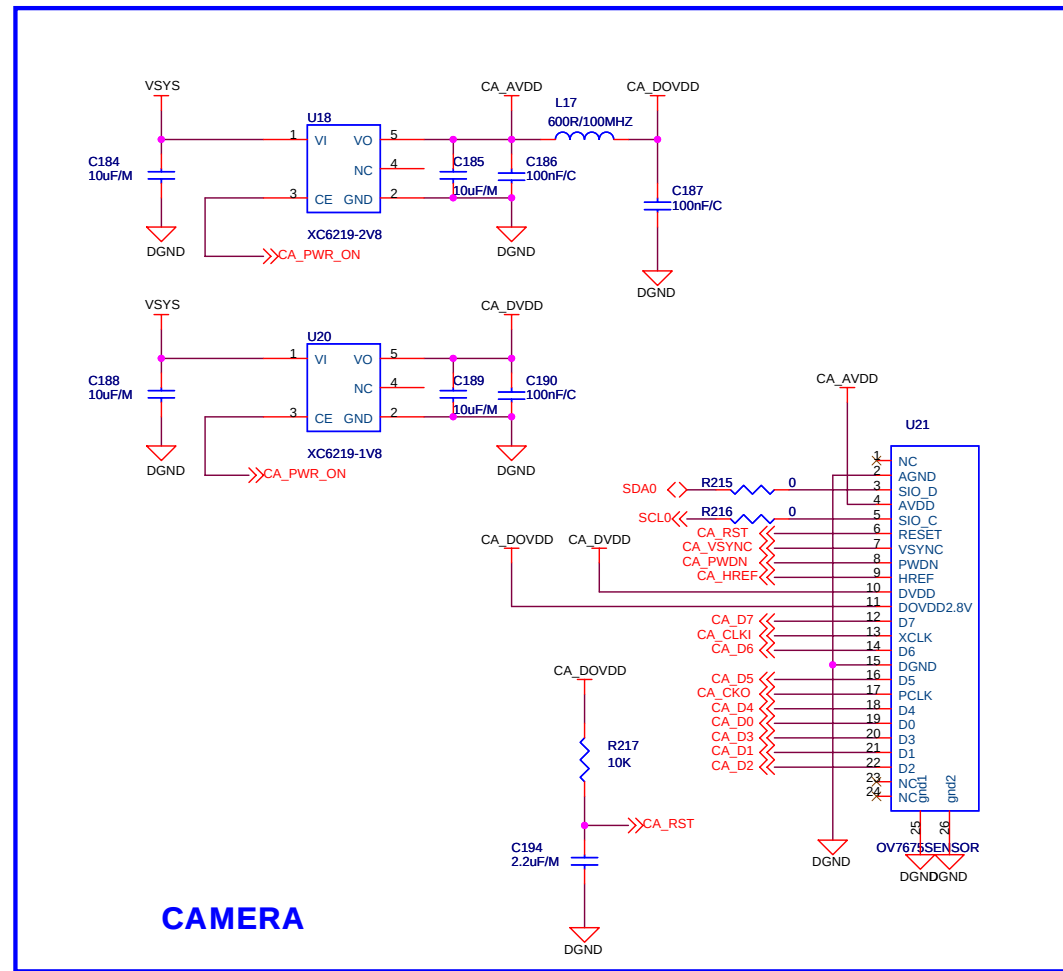


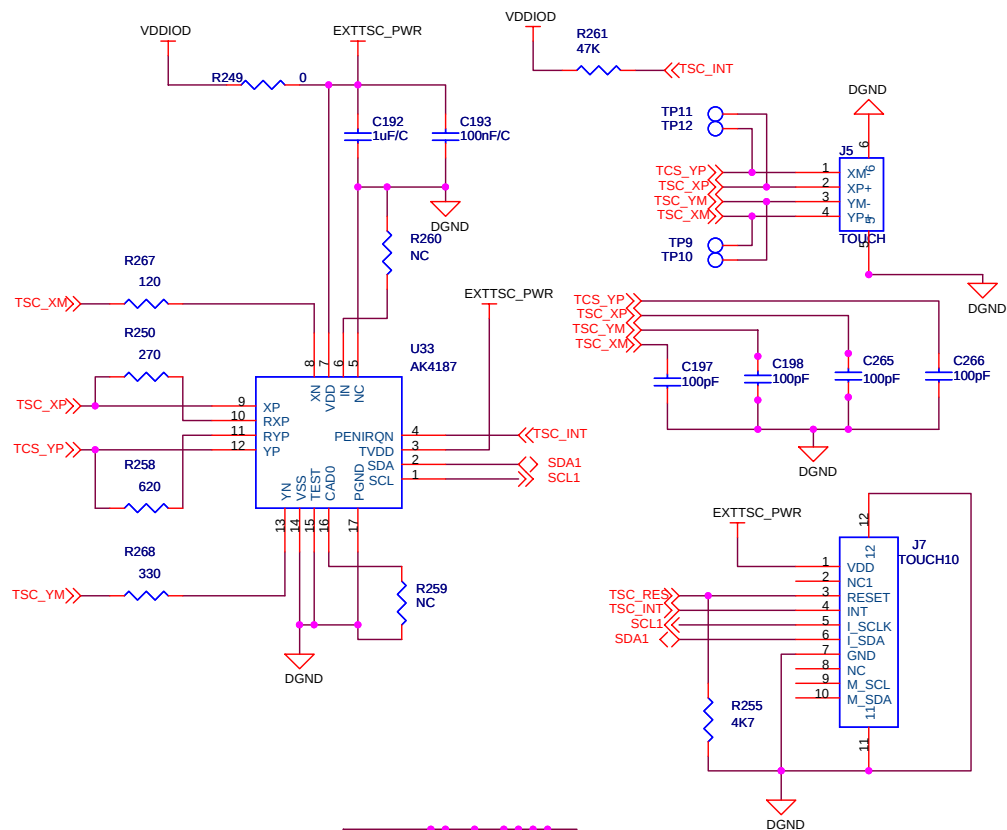


CAMERA

GPS



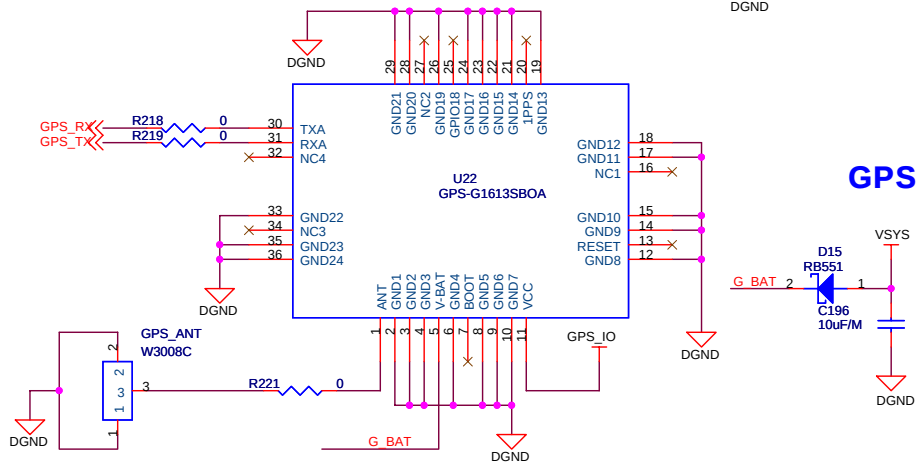


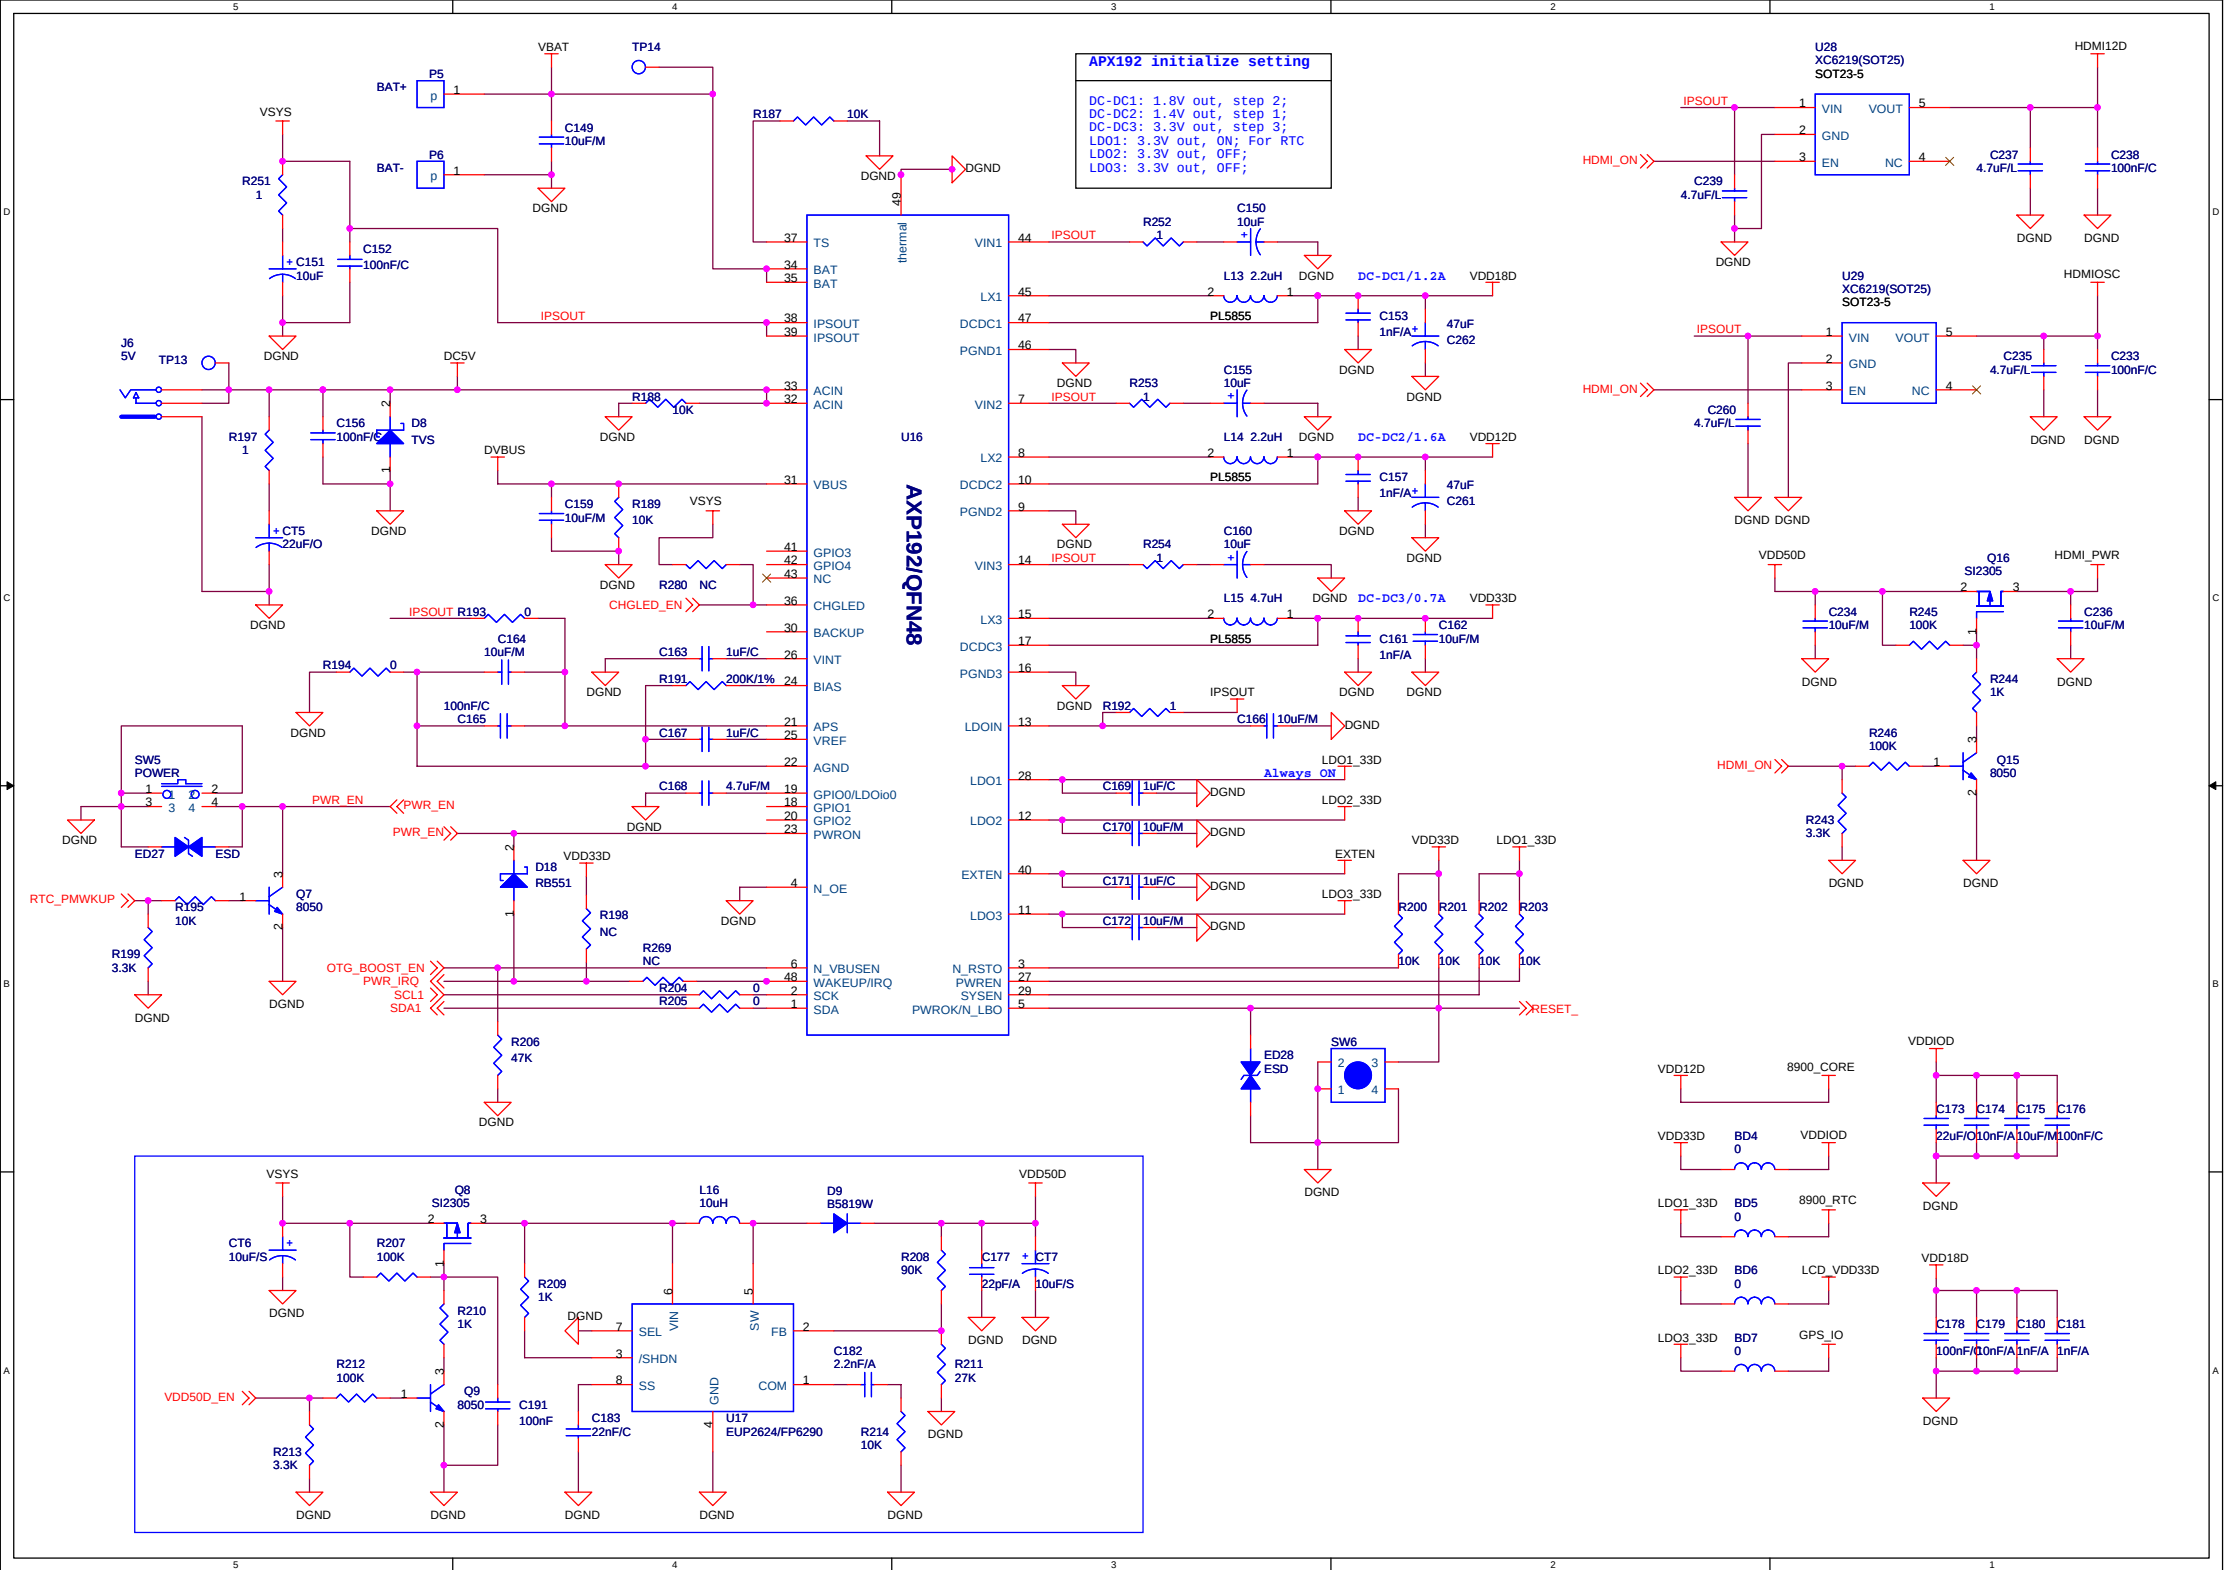


WIFI

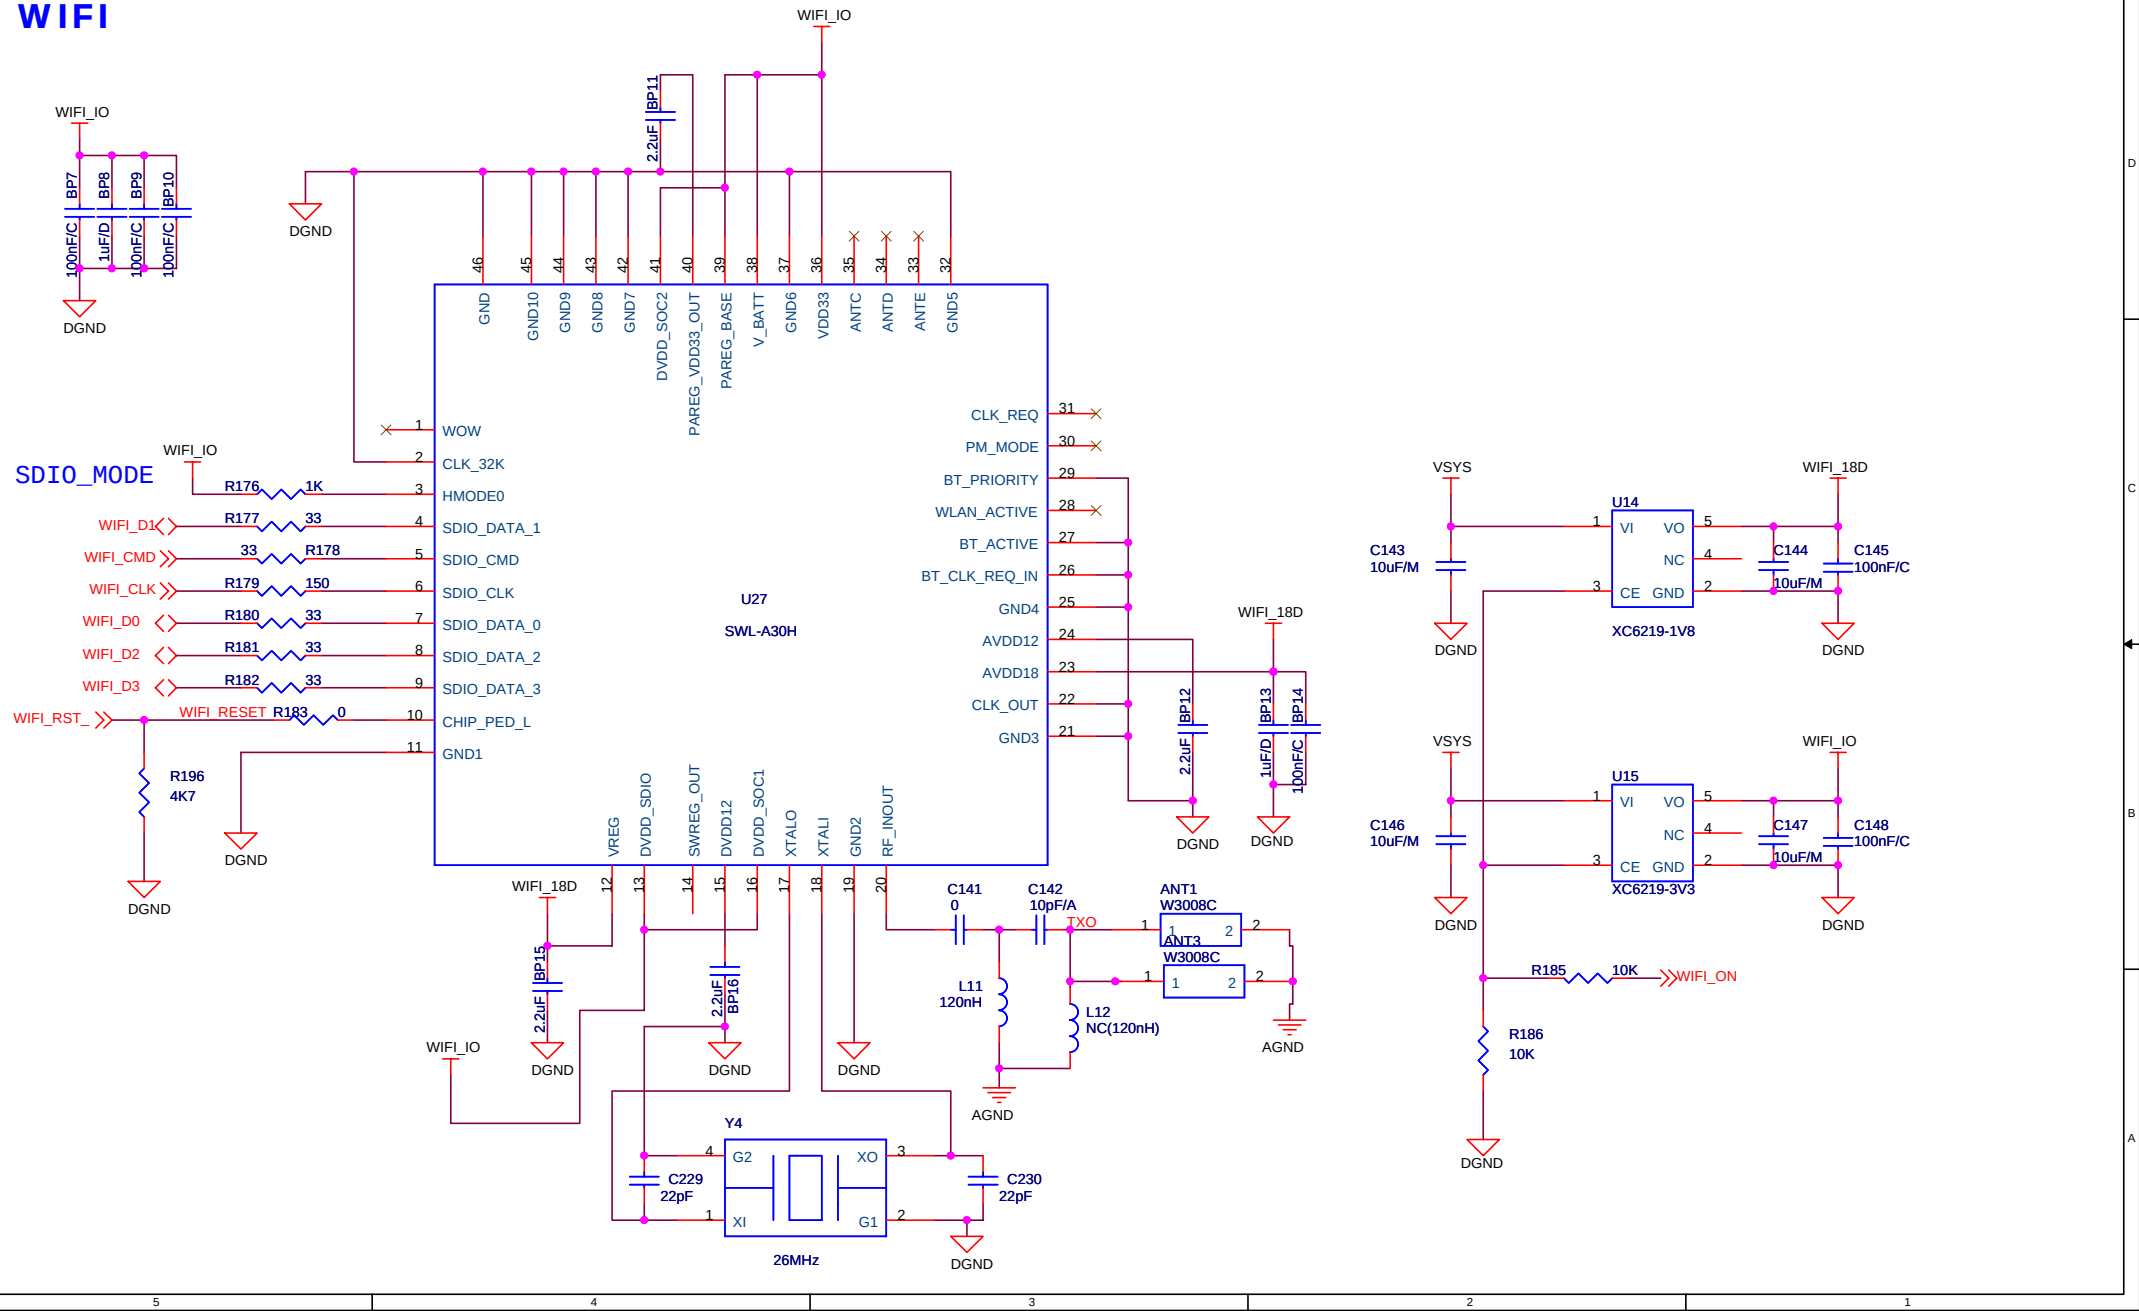


CODEC

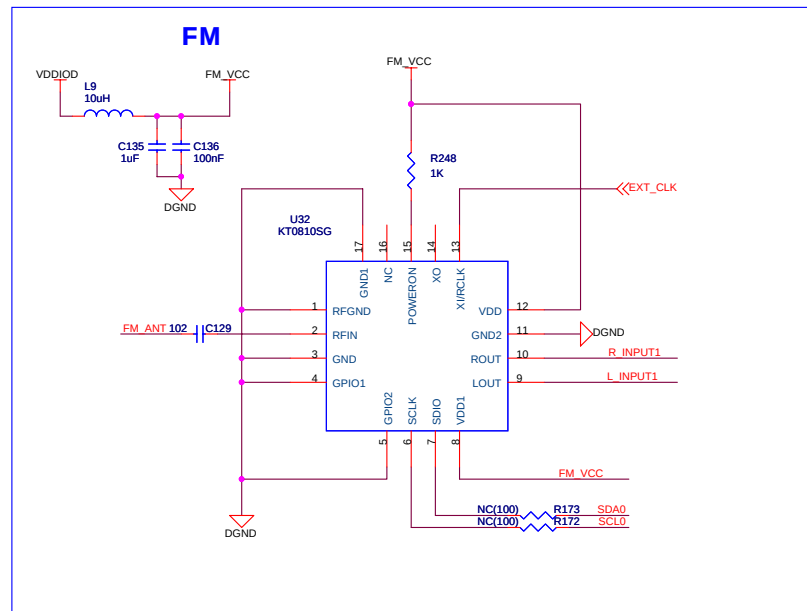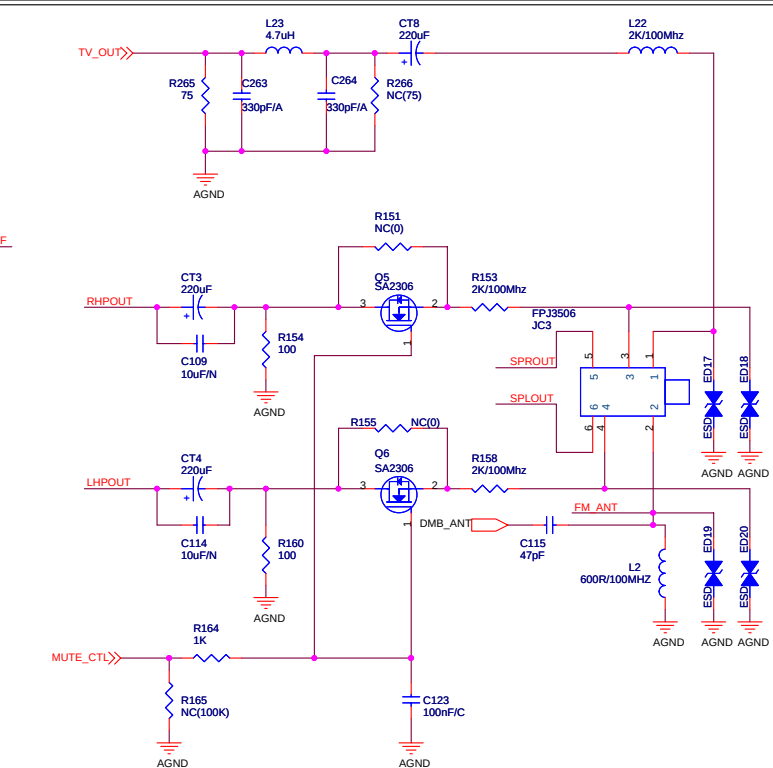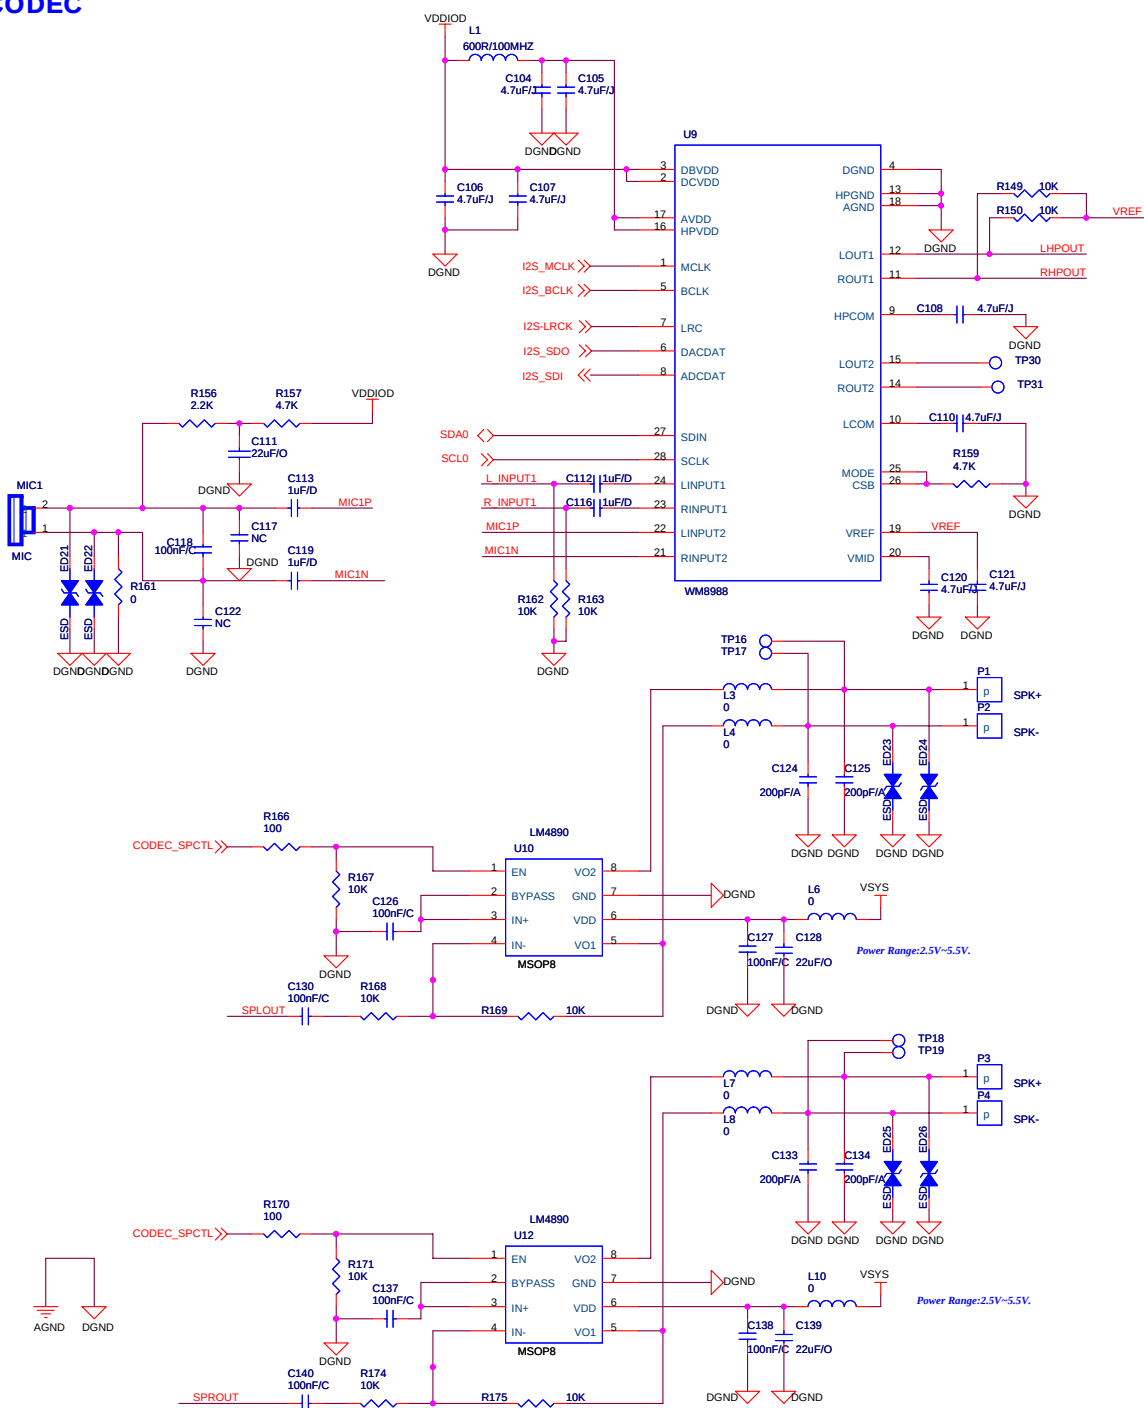


LCD BACK-LIGHT

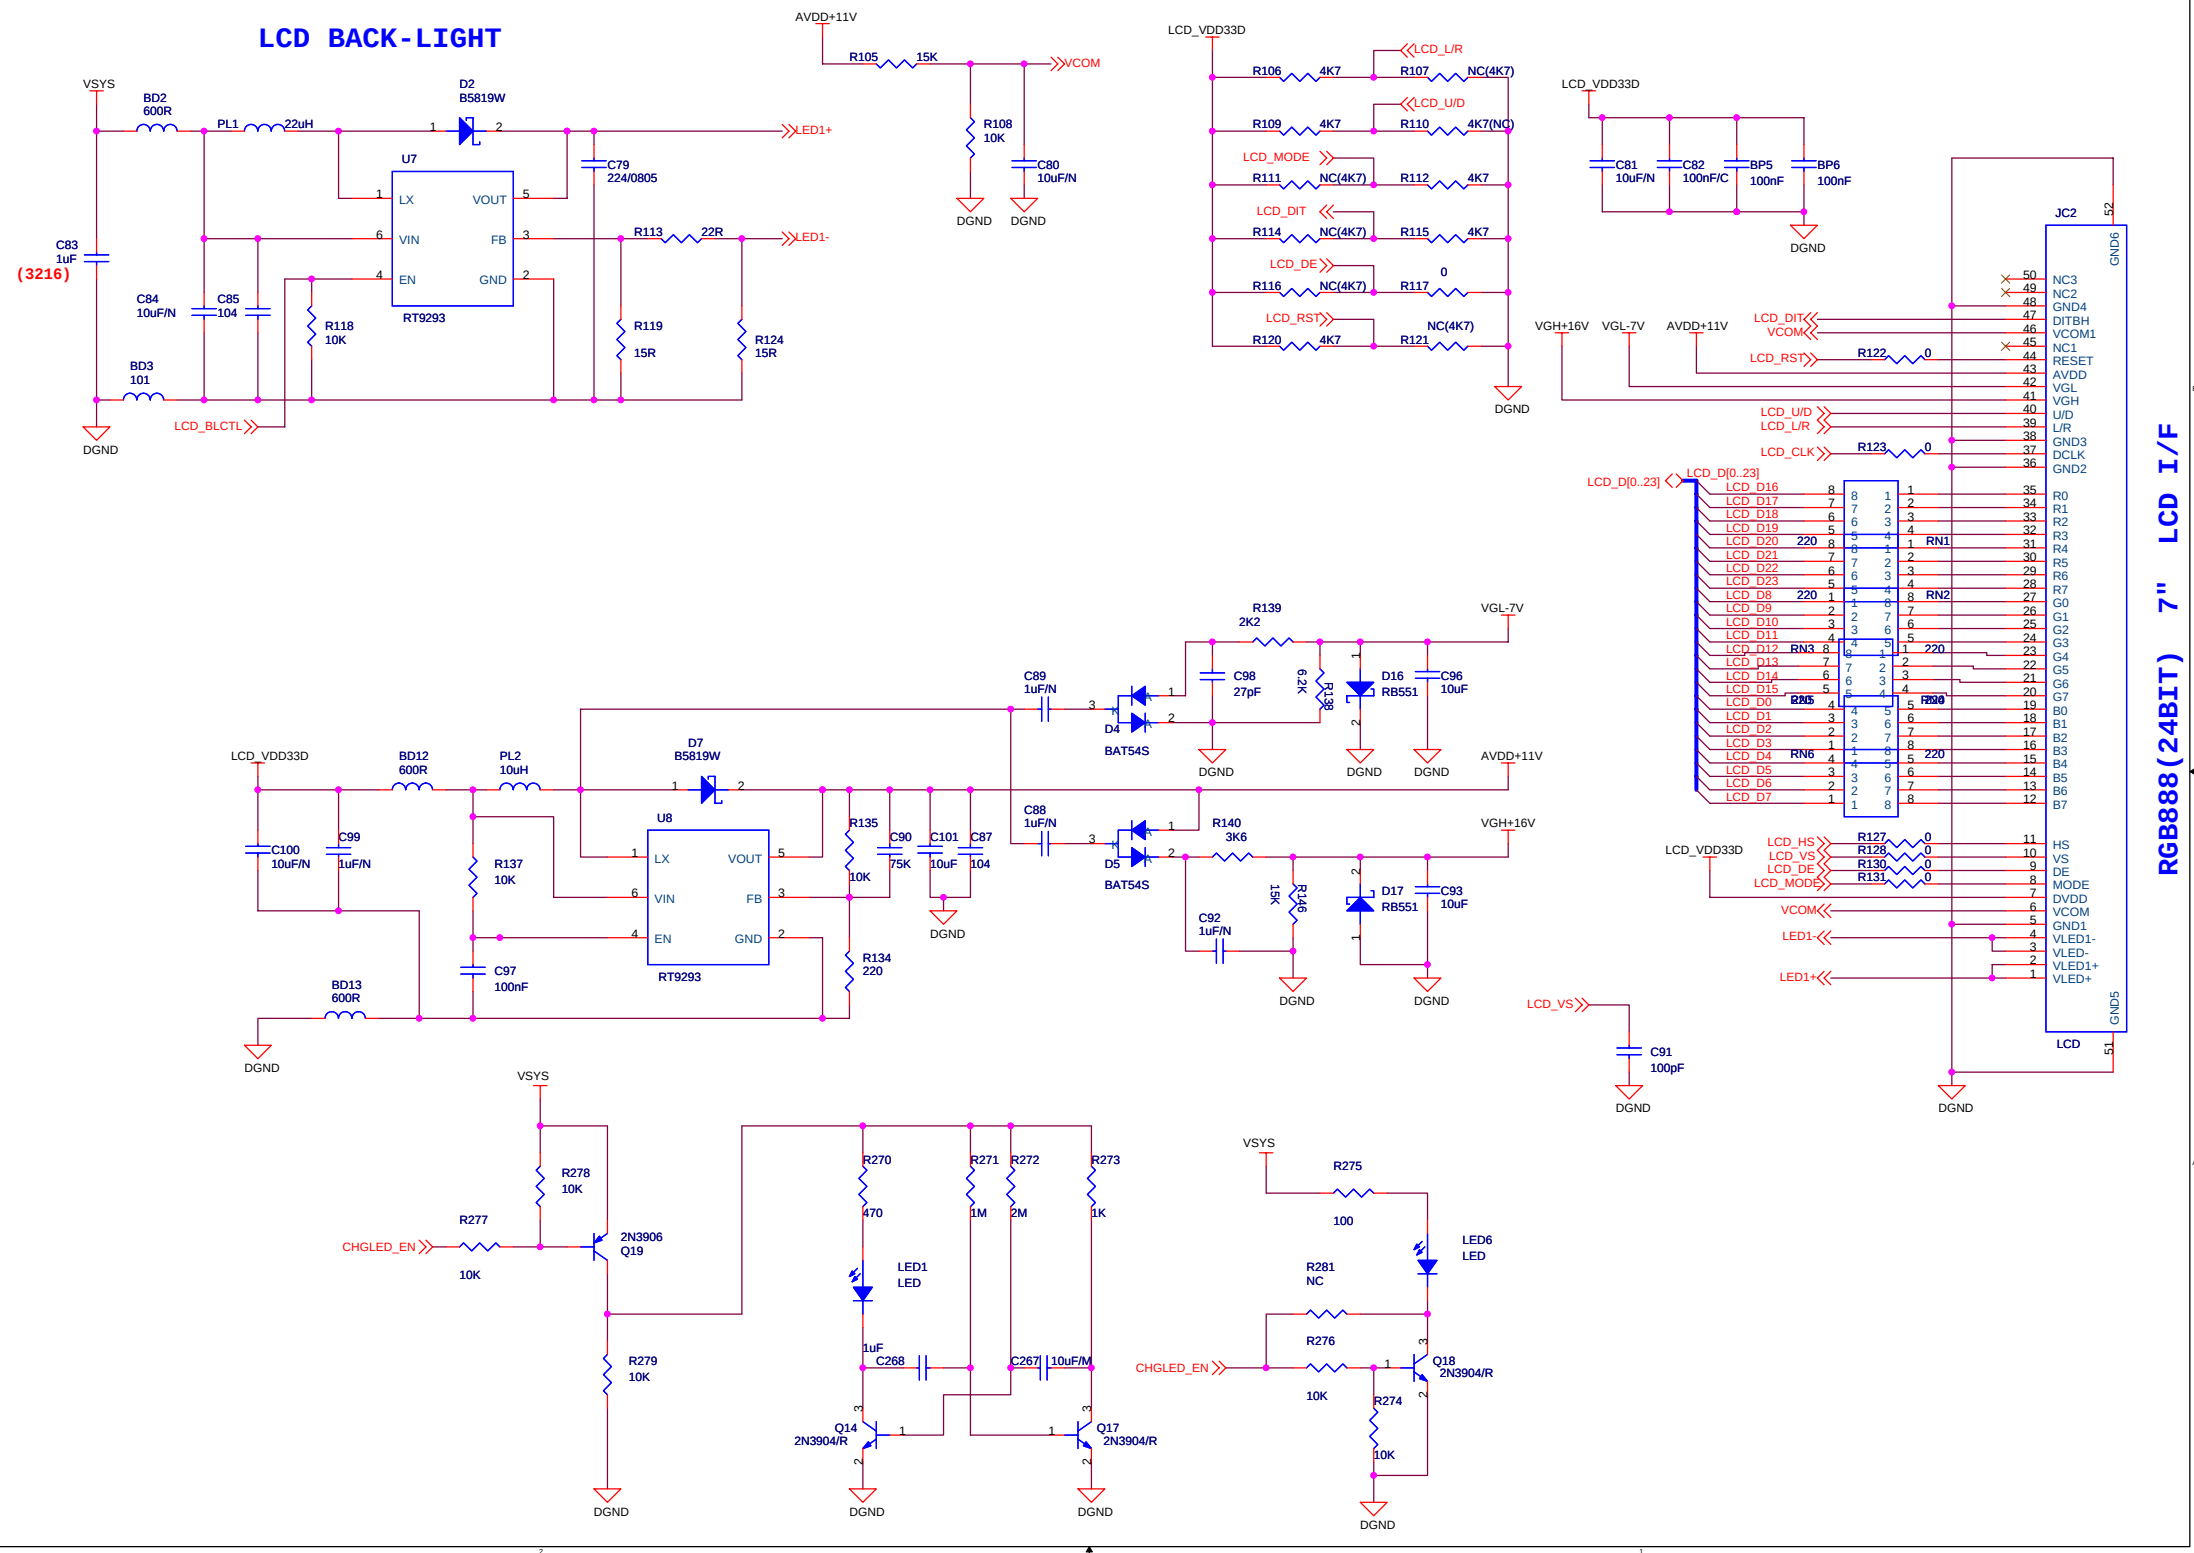


NAND

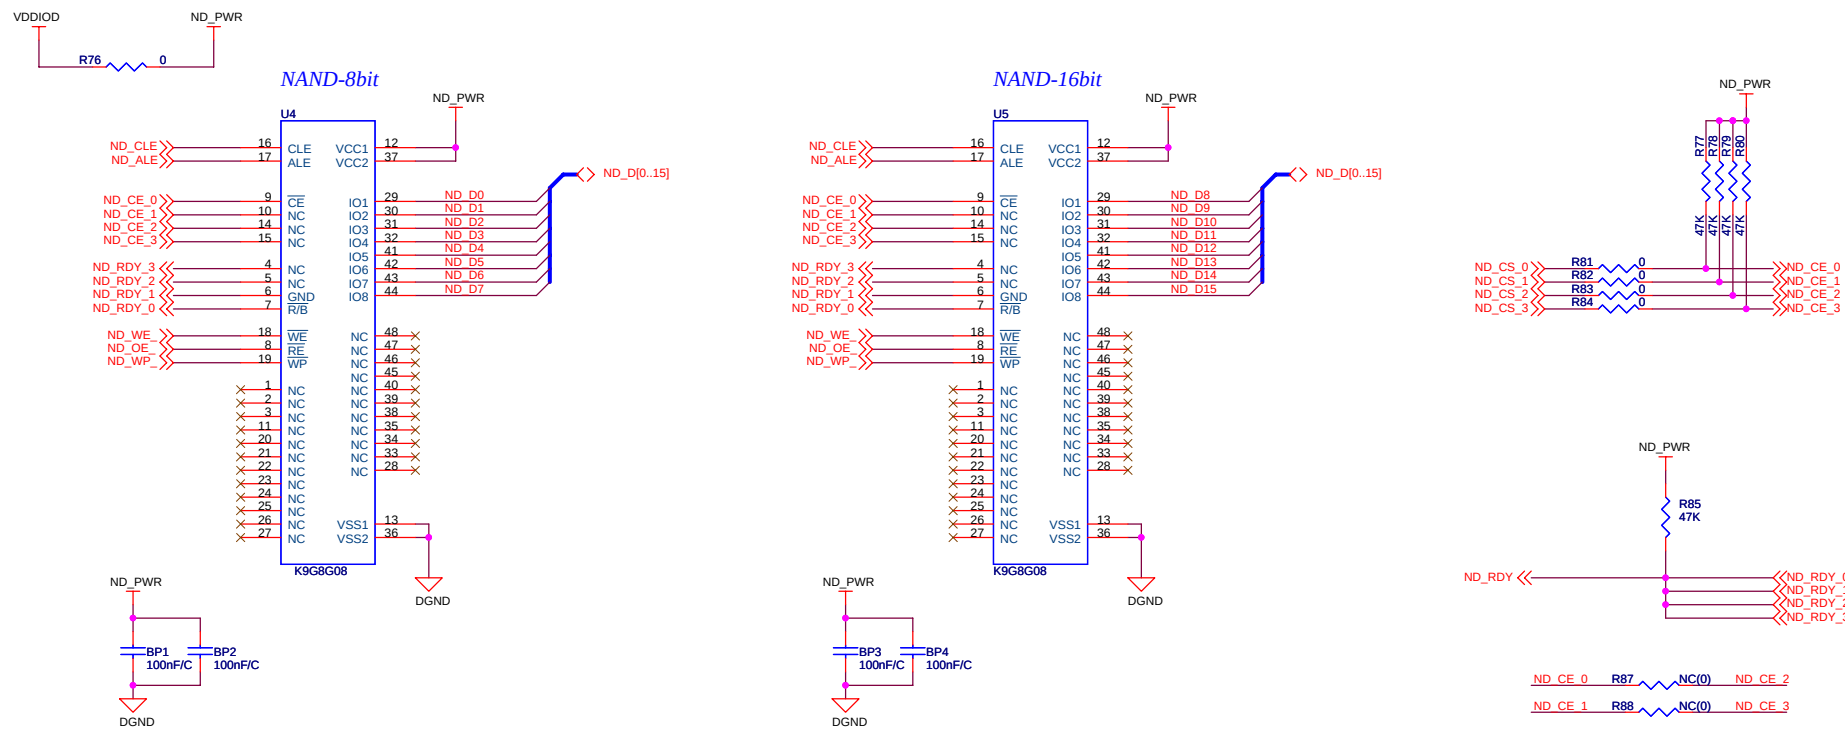







T-FLASH

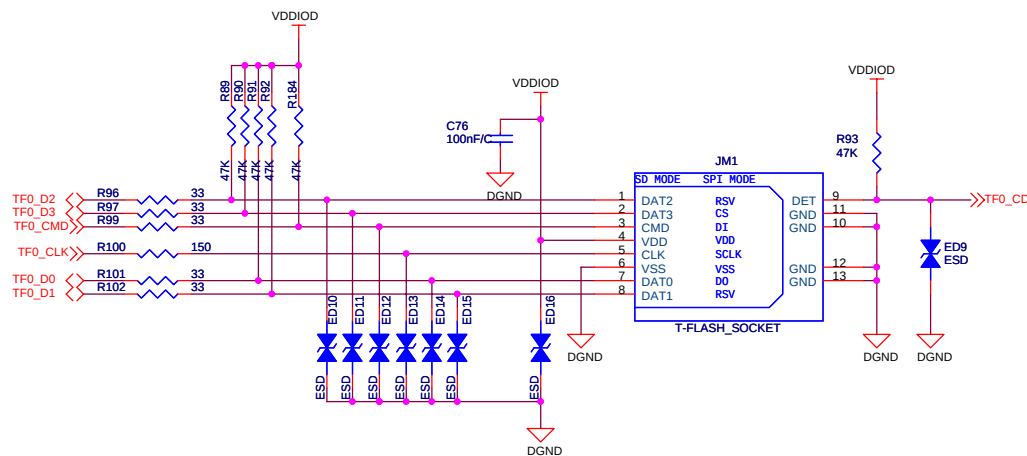

G-SENSOR








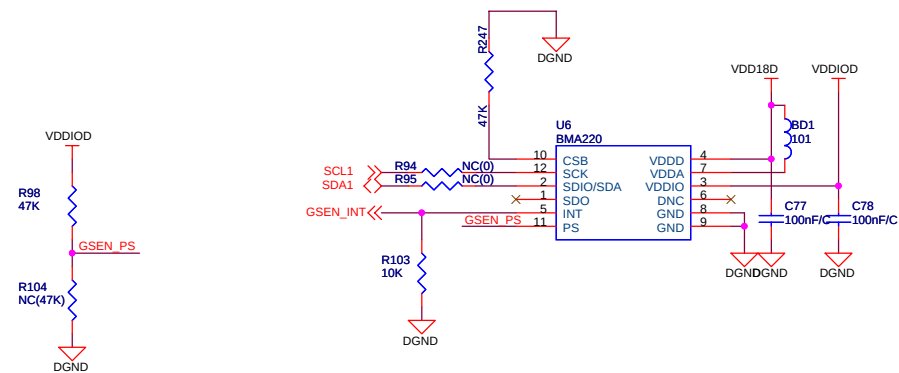


For suspend option

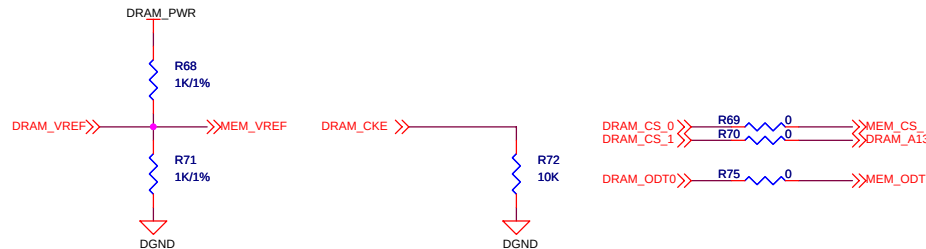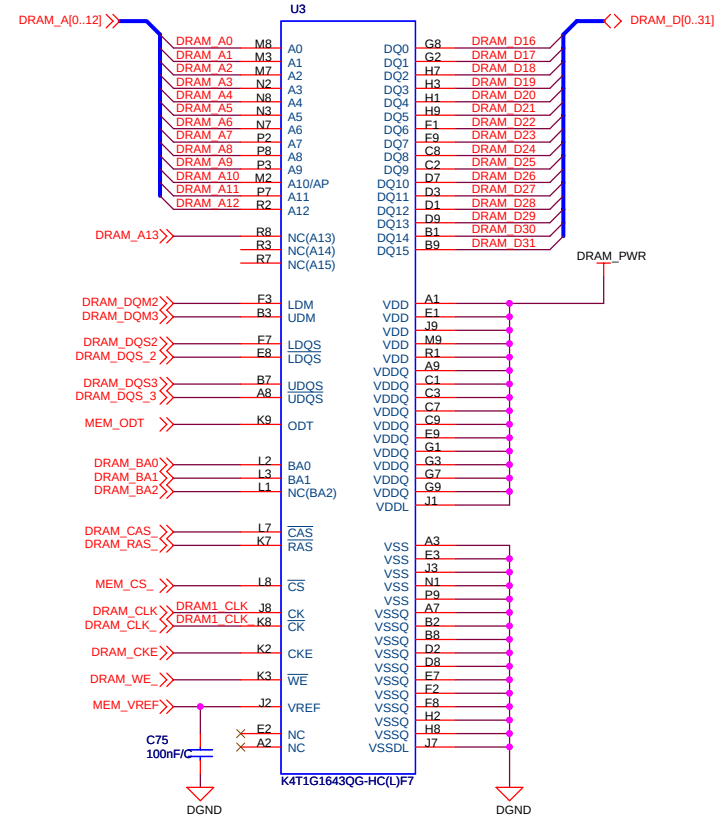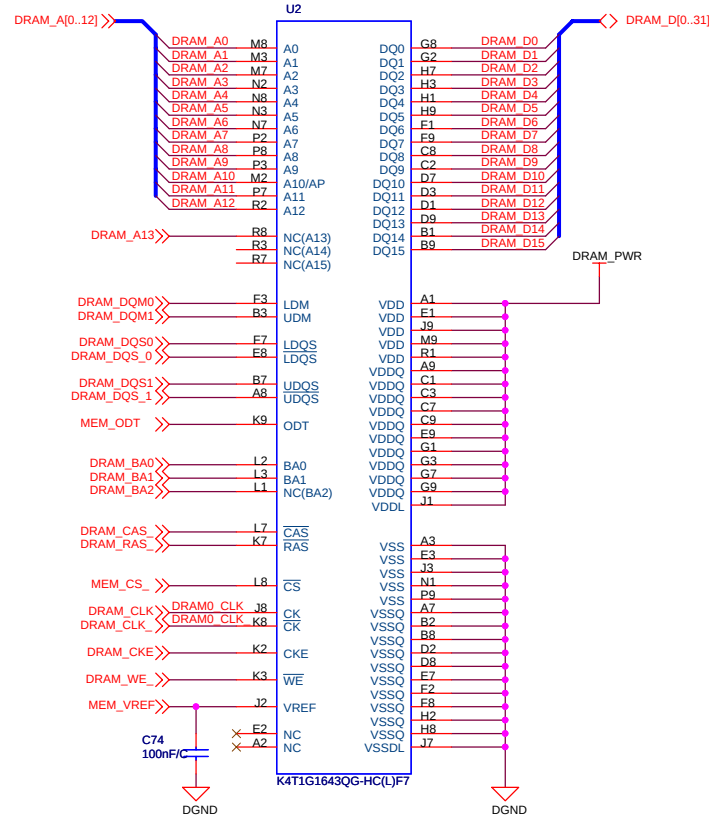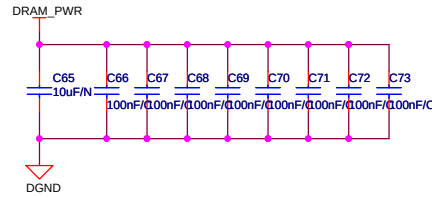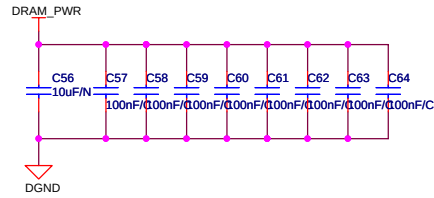

Do NOT omit [R74/R75] in design.
These parts are subject for signal quality improvement.

* Place these parts to "DRAM" as close as possible

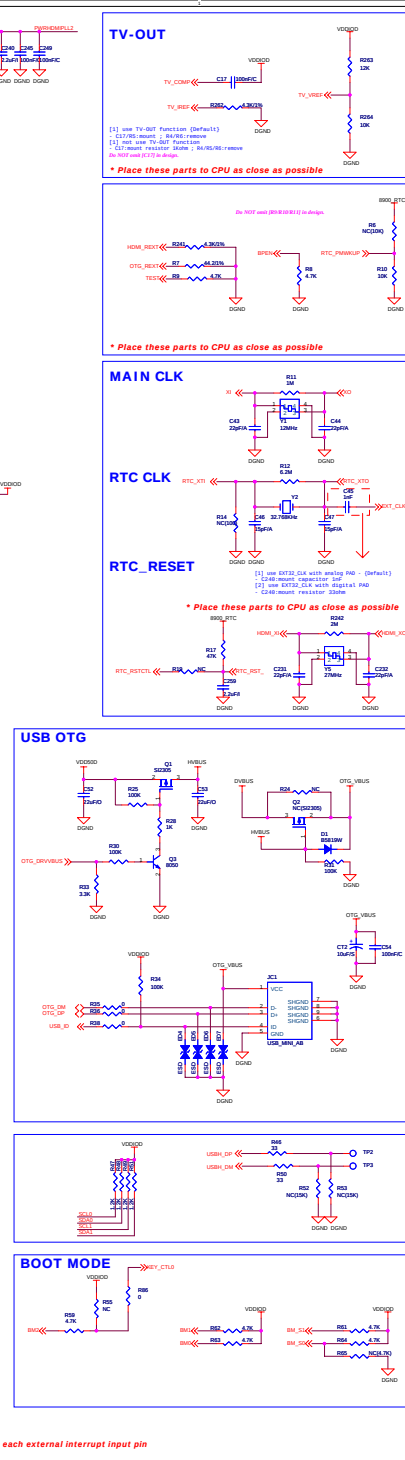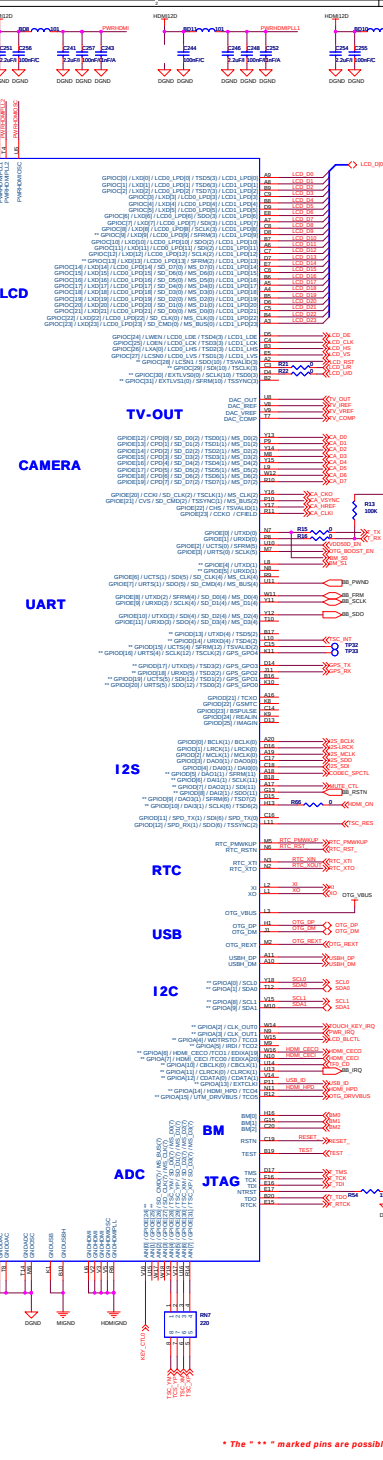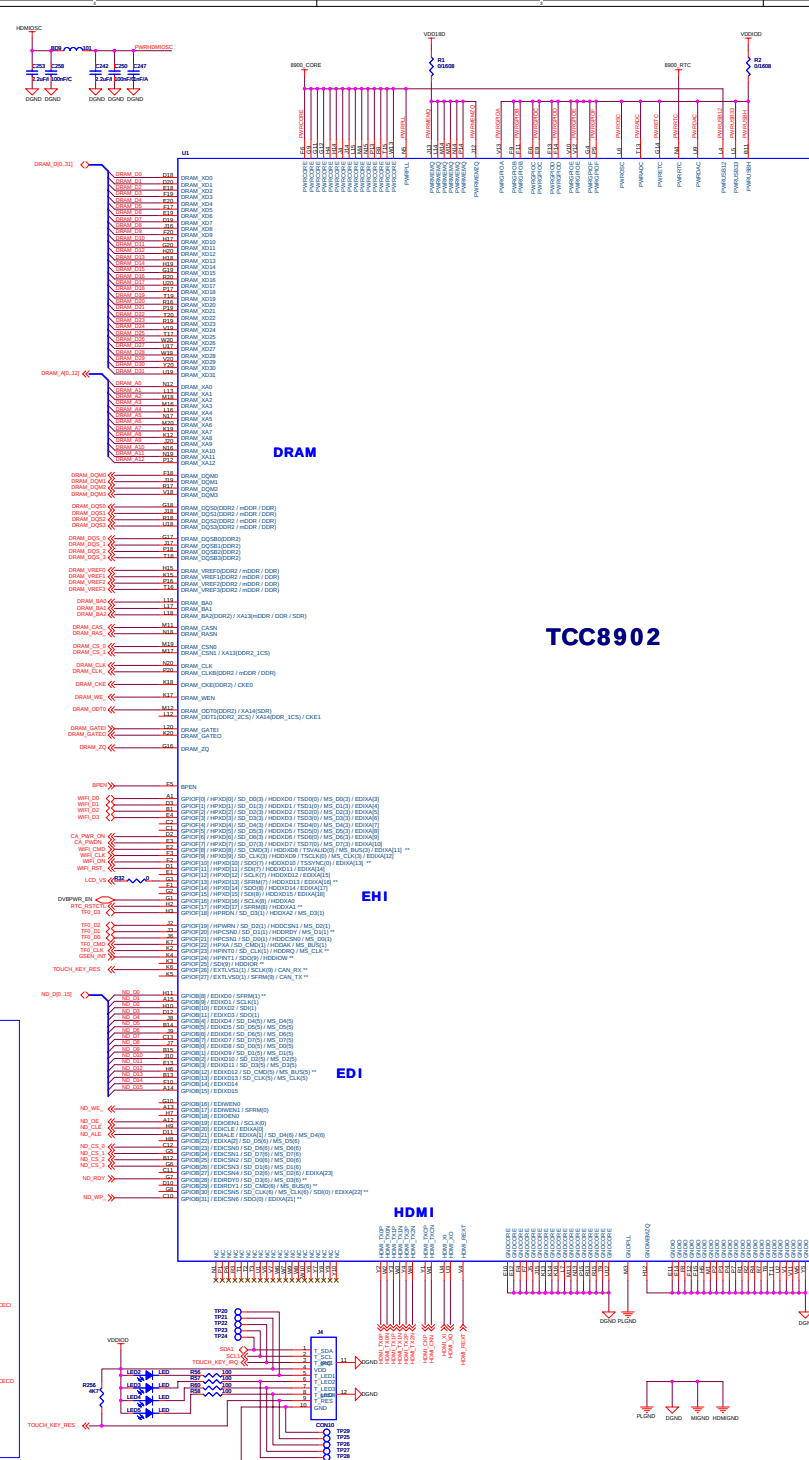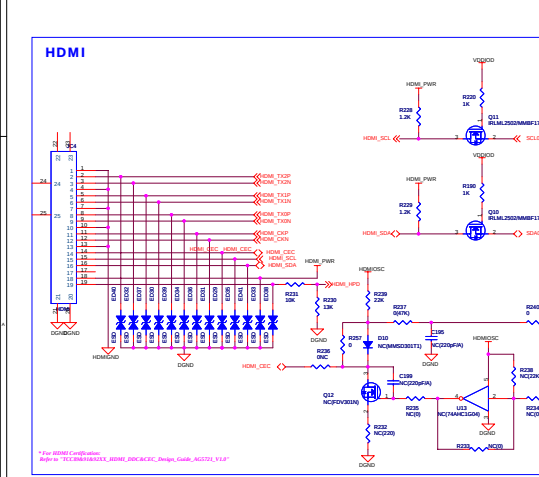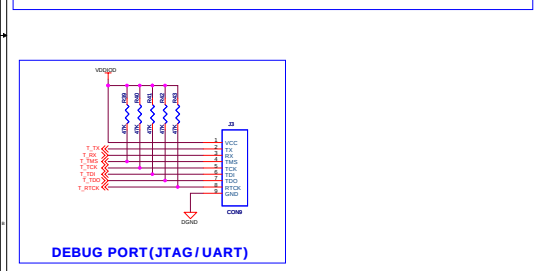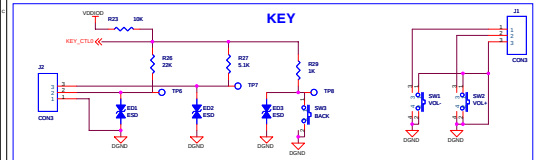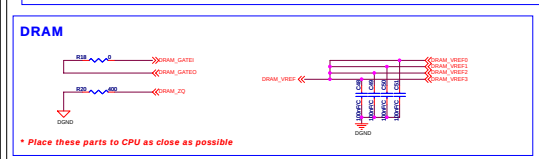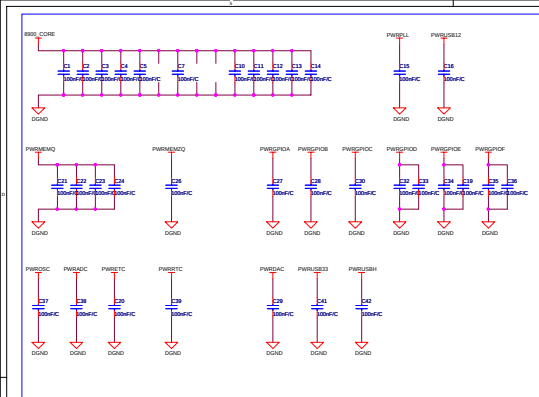

* The * marked pins are possible for each external interrupt input pin