

FCC PART 15.247
TEST REPORT

For

Coby Communications Ltd

Unit C-E, 8F, PO Shau Centre, 115 How Ming Street, Kwun Tong Kowloon, Hong Kong, China

FCC ID: S7IMID9742

Report Type: Original Report	Product Type: Mobile Internet Device
Test Engineer:	Dean Lau <i>Dean Lau</i>
Report Number:	R1DG120203002-00A
Report Date:	2012-03-01
Reviewed By:	Merry Zhao <i>merry.zhao</i> EMC Engineer
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk "★" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S)	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
LOCAL SUPPORT EQUIPMENT	7
EXTERNAL I/O CABLING LIST AND DETAILS.....	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	9
FCC §15.247 (i) & §1.1307 (b) (1) & §2.1093- RF EXPOSURE.....	10
APPLICABLE STANDARD	10
TEST RESULT	10
FCC §15.203 - ANTENNA REQUIREMENT.....	11
APPLICABLE STANDARD	11
ANTENNA CONNECTOR CONSTRUCTION	11
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	12
APPLICABLE STANDARD	12
MEASUREMENT UNCERTAINTY	12
EUT SETUP.....	12
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	13
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST RESULTS SUMMARY	13
TEST DATA	13
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	16
APPLICABLE STANDARD	16
MEASUREMENT UNCERTAINTY	16
EUT SETUP.....	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST RESULTS SUMMARY	18
TEST DATA	18
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	18
APPLICABLE STANDARD	18
TEST PROCEDURE	18
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST DATA	18

FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER	18
APPLICABLE STANDARD	18
TEST PROCEDURE	18
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST DATA	18
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	18
APPLICABLE STANDARD	18
TEST PROCEDURE	18
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST DATA	18
FCC §15.247(e) - POWER SPECTRAL DENSITY	18
APPLICABLE STANDARD	18
TEST PROCEDURE	18
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST DATA	18

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Coby Communications Ltd.*'s product, model number: *MID9742 (FCC ID: S7IMID9742)* or ("EUT") in this report is a Mobile Internet Device, which was measured approximately: 24.2 cm (L) x 19.0 cm (W) x 1.3 cm (H), rated input voltage: DC 5V from adapter and DC 3.7V from lithium battery

Adapter information: Switching adapter
Model: PS14K0502000U5
Input: 100-240V~50/60Hz 0.35A
Output: 5V 2000mA

** All measurement and test data in this report was gathered from production sample serial number: 1202094 (Assigned by BACL). The EUT was received on 2012-02-08.*

Objective

This report is prepared on behalf of *Coby Communications Ltd* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

The uncertainty of any RF tests which use conducted method measurement is ± 0.96 dB, the uncertainty of any radiation on emissions measurement is ± 4.0 dB

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11b and 802.11g, 802.11n20 mode, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

EUT for 802.11b, 802.11g and 802.11 n20 modes were tested with Channel 1, 6 and 11.


The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

EUT Exercise Software

The test was performed under “cmd.exe”

Equipment Modifications

- 1) Attaching a conductive foam on the several output ports connected to the aluminum foil, make the screen shell good contact, conductive foam specification 10*2.5*70mm.(as the following figure)
- 2) With good shielding and magnetic HDMI line.

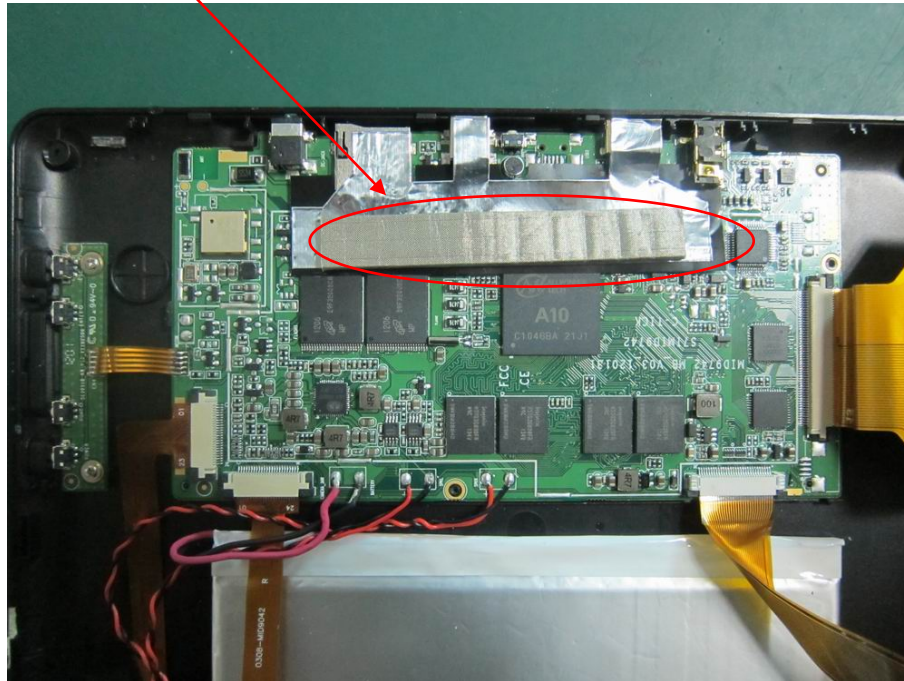

Local Support Equipment


Manufacturer	Description	Model	Serial Number
DELL	Monitor	E2010HC	CH-03D6N6-64180-042-DQ1M
Edifier	Earphone	\	\

External I/O Cabling List and Details

Cable Description	Length (m)	From	To
Shielded Detachable HDMI Cable with two cores	1.5	HDMI Port of EUT	Monitor
Audio Cable	1.0	Earphone Port of EUT	Earphone
Power Cable	1.5	Adapter	EUT

Block Diagram of Test Setup

Transmitting mode:

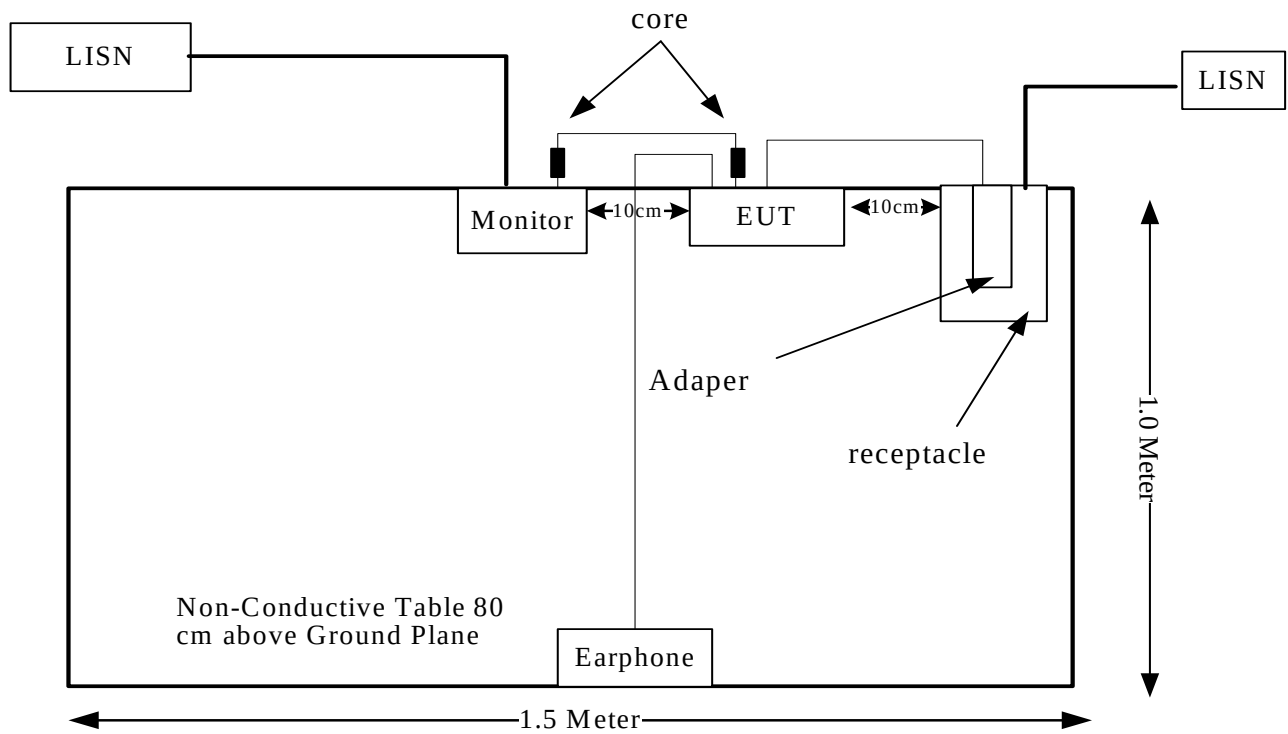

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b)(1), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1307 (b) (1) & §2.1093- RF EXPOSURE

Applicable Standard

According to FCC§1.1307 and §2.1093.

Test Result

Compliance, please refer to the SAR report: R1DG120203002-20

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has a chip antenna, which complied with 15.203, the maximum gain is 2.0 dBi, please refer to the internal photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard


FCC§15.207

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is ± 2.4 dB ($k=2$, 95% level of confidence).

EUT Setup

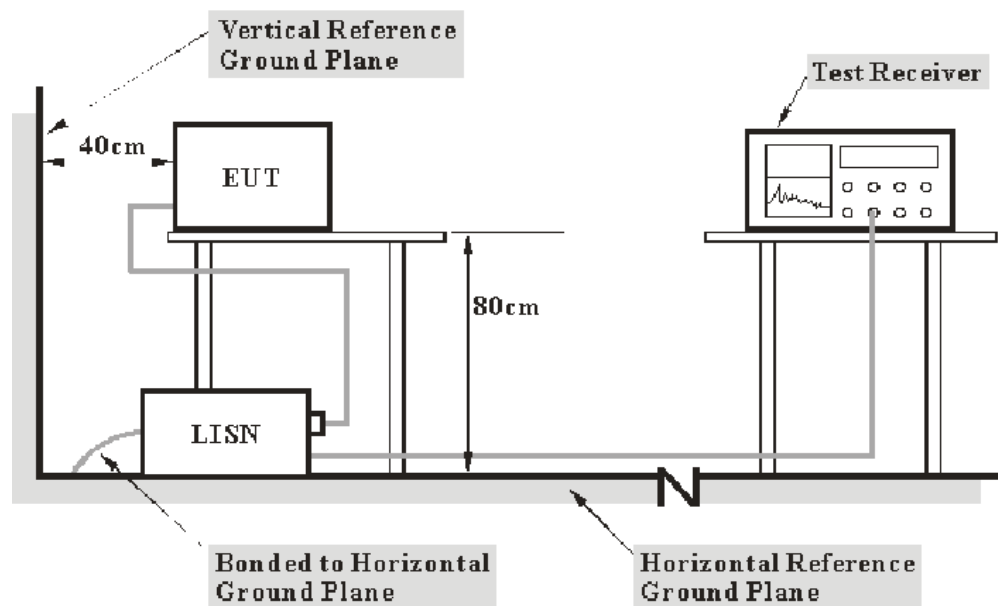

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<u>Frequency Range</u>	<u>IF B/W</u>
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245	2011-03-03	2012-03-02
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2011-04-09	2012-04-08

*** Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

12.48 dB at 0.540 MHz in Neutral conducted mode


Test Data

Environmental Conditions


Temperature:	25 ° C
Relative Humidity:	48 %
ATM Pressure:	100.0 kPa

The testing was performed by Dean Liu on 2012-02-28

Test Mode: Transmitting

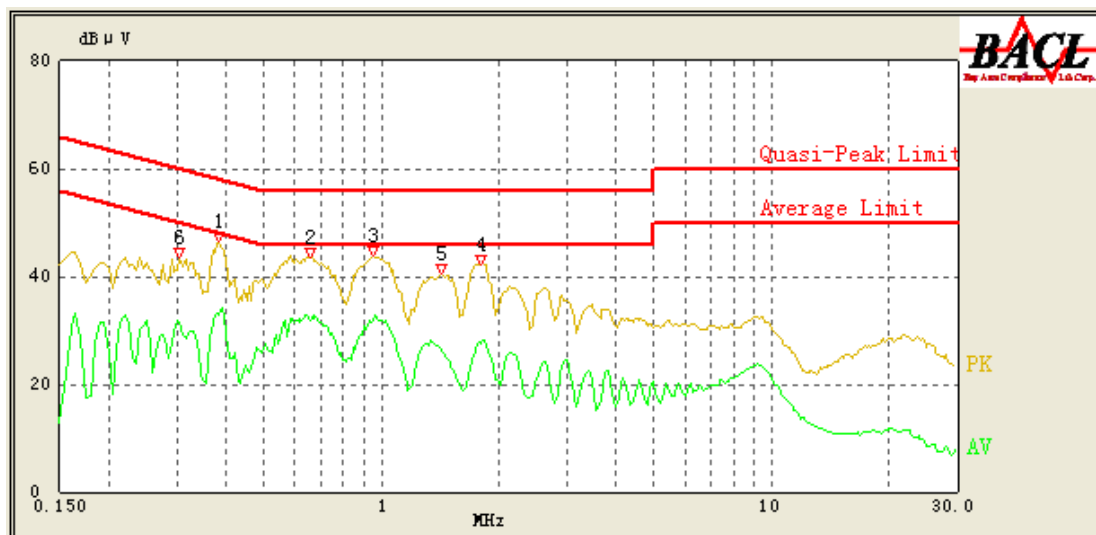120 V, 60 Hz, Line:

No.	Frequency (MHz)	Reading (dBμV)	Correction (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
1	0.385	43.49	1.10	59.29	15.80	QP
2	0.385	32.79	1.10	49.29	16.50	Ave.
3	0.660	41.77	1.10	56.00	14.23	QP
4	0.655	31.86	1.10	46.00	14.14	Ave.
5	0.950	40.83	1.10	56.00	15.17	QP
6	0.955	31.77	1.10	46.00	14.23	Ave.
7	1.795	37.31	1.10	56.00	18.69	QP
8	1.800	27.66	1.10	46.00	18.34	Ave.
9	1.425	34.79	1.10	56.00	21.21	QP
10	1.420	26.35	1.10	46.00	19.65	Ave.
11	0.305	40.33	1.10	61.57	21.24	QP
12	0.305	31.53	1.10	51.57	20.04	Ave.

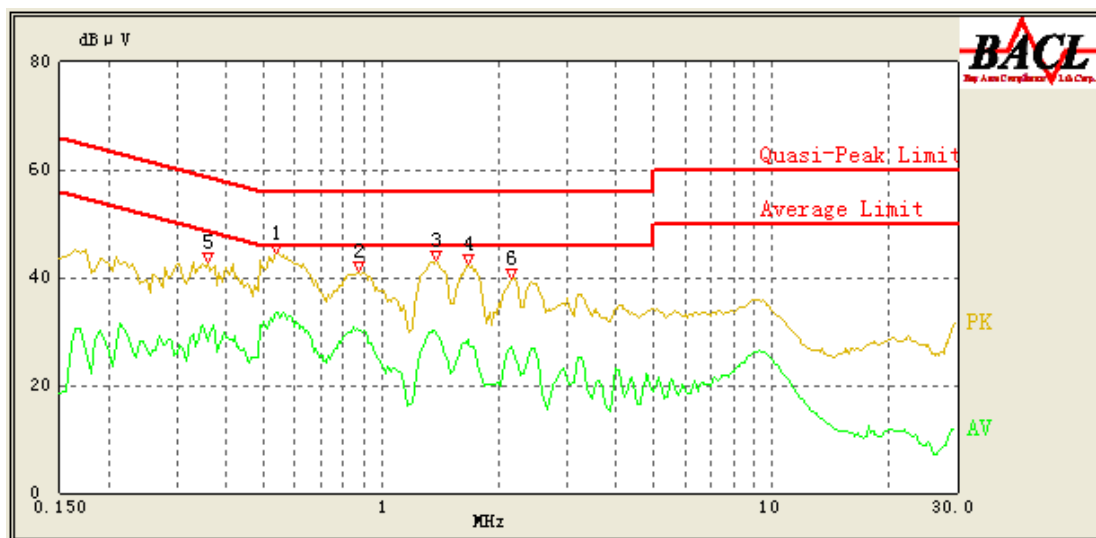120V, 60 Hz, Neutral:

No.	Frequency (MHz)	Reading (dBμV)	Correction (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
1	0.535	41.02	1.10	56.00	14.98	QP
2	0.540	33.52	1.10	46.00	12.48	Ave.
3	0.875	39.28	1.10	56.00	16.72	QP
4	0.880	30.32	1.10	46.00	15.68	Ave.
5	1.375	38.13	1.10	56.00	17.87	QP
6	1.380	30.00	1.10	46.00	16.00	Ave.
7	1.670	36.09	1.10	56.00	19.91	QP
8	1.670	28.66	1.10	46.00	17.34	Ave.
9	0.360	33.06	1.10	60.00	26.94	QP
10	0.360	28.27	1.10	50.00	21.73	Ave.
11	2.150	32.34	1.10	56.00	23.66	QP
12	2.155	27.01	1.10	46.00	18.99	Ave.

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;


Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 4.0 dB(k=2, 95% level of confidence) .

EUT Setup

Below 1GHz:

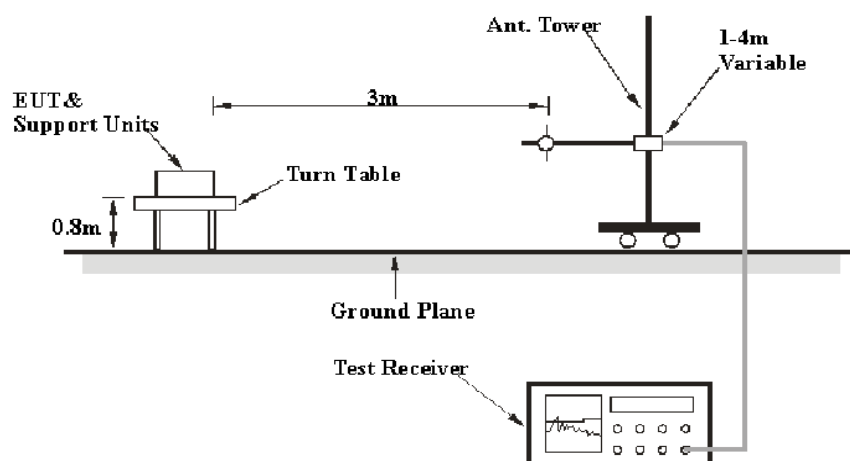

Above 1GHz:

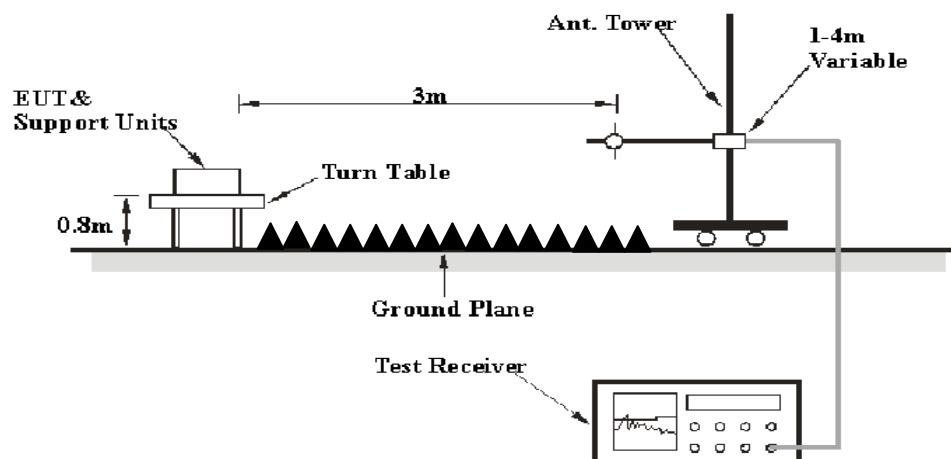

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>	<i>Detector</i>
30 MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	Ave.

Test Procedure

During the radiated emission test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2011-08-02	2012-08-01
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-07-05	2012-07-04
Mini-circuits	Amplifier	ZVA-213+	T-E27H	2011-07-08	2012-07-07
Sunol Sciences	Horn Antenna	DRH-118	A052604	2011-05-05	2012-05-04
HP	Spectrum Analyzer	8593A	2919A00242	2011-07-09	2012-07-08
Rohde & Schwarz	Signal Analyzer	FSIQ 26	609358	2011-07-08	2012-07-07

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Section 15.205, 15.209 and 15.247, with the worst margin reading of:

2.62 dB at 4924 MHz in the Vertical polarization (802.11b mode)

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	48 %
ATM Pressure:	100.0 kPa

The testing was performed by Dean Liu from 2012-02-27 to 2012-02-28.

Mode: Transmitting (depend on free scan 802.11b mode is the worst case)

802.11b Mode:

Frequency (MHz)	Reading (dBμV)	Detector (PK/QP /Ave.)	Polar (H/V)	Corrected factor (dB/m)	Correction Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Comment
Low Channel (2412 MHz)								
4824	28.98	PK	H	28.63	57.61	74	16.39	harmonic
4824	20.33	Ave.	H	28.63	48.96	54	5.04	harmonic
4824	30.22	PK	V	28.63	58.85	74	15.15	harmonic
4824	22.43	Ave.	V	28.63	51.06	54	2.94*	harmonic
2390	29.65	PK	H	23.23	52.88	74	21.12	spurious
2390	18.21	Ave.	H	23.23	41.44	54	12.56	spurious
2390	30.11	PK	V	23.23	53.34	74	20.66	spurious
2390	18.69	Ave.	V	23.23	41.92	54	12.08	spurious
2412	83.69	PK	H	23.37	107.06	N/A	N/A	Fundamental
2412	78.96	Ave.	H	23.37	102.33	N/A	N/A	Fundamental
2412	85.63	PK	V	23.37	109.00	N/A	N/A	Fundamental
2412	79.57	Ave.	V	23.37	102.94	N/A	N/A	Fundamental
120.35	41.36	QP	H	-8.61	32.75	43.5	10.75	spurious
120.35	42.69	QP	V	-8.61	34.08	43.5	9.42	spurious
Middle Channel (2437 MHz)								
4874	30.11	PK	H	28.79	58.90	74	15.10	harmonic
4874	21.05	Ave.	H	28.79	49.84	54	4.16	harmonic
4874	31.25	PK	V	28.79	60.04	74	13.96	harmonic
4874	21.67	Ave.	V	28.79	50.46	54	3.54*	harmonic
2437	85.63	PK	H	23.37	109.00	N/A	N/A	Fundamental
2437	80.25	Ave.	H	23.37	103.62	N/A	N/A	Fundamental
2437	86.52	PK	V	23.37	109.89	N/A	N/A	Fundamental
2437	80.61	Ave.	V	23.37	103.98	N/A	N/A	Fundamental
334.12	39.51	QP	H	-3.22	36.29	46	9.71	spurious
334.12	41.26	QP	V	-3.22	38.04	46	7.96	spurious
High Channel (2462 MHz)								
4924	31.59	PK	H	28.95	60.54	74	13.46	harmonic
4924	21.69	Ave.	H	28.95	50.64	54	3.36*	harmonic
4924	32.54	PK	V	28.95	61.49	74	12.51	harmonic
4924	22.43	Ave.	V	28.95	51.38	54	2.62*	harmonic
2483.5	29.32	PK	V	24.12	53.44	74	20.56	spurious
2483.5	19.52	Ave.	V	24.12	43.64	54	10.36	spurious
2483.5	27.65	PK	H	24.12	51.77	74	22.23	spurious
2483.5	18.14	Ave.	H	24.12	42.26	54	11.74	spurious
2462	88.32	PK	H	26.16	114.48	N/A	N/A	Fundamental
2462	83.14	Ave.	H	26.16	109.30	N/A	N/A	Fundamental
2462	89.39	PK	V	26.16	115.55	N/A	N/A	Fundamental
2462	84.13	Ave.	V	26.16	110.29	N/A	N/A	Fundamental
965.47	31.15	QP	H	4.96	36.11	54	17.89	spurious
965.47	33.42	QP	V	4.96	38.38	54	15.62	spurious

*Within measurement uncertainty.

802.11g Mode:


Frequency (MHz)	Reading (dBμV)	Detector (PK/QP /Ave.)	Polar (H/V)	Corrected factor (dB/m)	Correction Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Comment
Low Channel (2412 MHz)								
4824	29.33	PK	H	28.63	57.96	74	16.04	harmonic
4824	19.04	Ave.	H	28.63	47.67	54	6.33	harmonic
4824	31.41	PK	V	28.63	60.04	74	13.96	harmonic
4824	18.25	Ave.	V	28.63	46.88	54	7.12	harmonic
2400	21.74	PK	H	23.23	44.97	74	29.03	spurious
2400	14.63	Ave.	H	23.23	37.86	54	16.14	spurious
2400	22.36	PK	V	23.23	45.59	74	28.41	spurious
2400	15.21	Ave.	V	23.23	38.44	54	15.56	spurious
2412	75.32	PK	H	23.37	98.69	N/A	N/A	Fundamental
2412	62.01	Ave.	H	23.37	85.38	N/A	N/A	Fundamental
2412	76.58	PK	V	23.37	99.95	N/A	N/A	Fundamental
2412	63.45	Ave.	V	23.37	86.82	N/A	N/A	Fundamental
150.00	39.65	QP	H	-6.85	32.80	43.5	10.7	spurious
150.00	41.27	QP	V	-6.85	34.42	43.5	9.08	spurious
Middle Channel (2437 MHz)								
4874	29.97	PK	H	28.79	58.76	74	15.24	harmonic
4874	20.01	Ave.	H	28.79	48.80	54	5.20	harmonic
4874	30.24	PK	V	28.79	59.03	74	14.97	harmonic
4874	20.30	Ave.	V	28.79	49.09	54	4.91	harmonic
2437	76.24	PK	H	23.37	99.61	N/A	N/A	Fundamental
2437	62.87	Ave.	H	23.37	86.24	N/A	N/A	Fundamental
2437	77.56	PK	H	23.37	100.93	N/A	N/A	Fundamental
2437	63.85	Ave.	H	23.37	87.22	N/A	N/A	Fundamental
284.55	37.44	QP	H	-4.12	33.32	46	12.68	spurious
284.55	38.56	QP	V	-4.12	34.44	46	11.56	spurious
High Channel (2462 MHz)								
4924	30.62	PK	H	28.95	59.57	74	14.43	harmonic
4924	17.84	Ave.	H	28.95	46.79	54	7.21	harmonic
4924	30.85	PK	V	28.95	59.80	74	14.20	harmonic
4924	17.90	Ave.	V	28.95	46.85	54	7.15	harmonic
2483.5	26.01	PK	H	24.12	50.13	74	23.87	spurious
2483.5	16.92	Ave.	H	24.12	41.04	54	12.96	spurious
2483.5	27.54	PK	V	24.12	51.66	74	22.34	spurious
2483.5	17.69	Ave.	V	24.12	41.81	54	12.19	spurious
2462	83.87	PK	H	26.16	110.03	N/A	N/A	Fundamental
2462	72.52	Ave.	H	26.16	98.68	N/A	N/A	Fundamental
2462	84.21	PK	V	26.16	110.37	N/A	N/A	Fundamental
2462	73.29	Ave.	V	26.16	99.45	N/A	N/A	Fundamental
613.26	30.25	QP	H	4.02	34.27	46	11.73	spurious
613.26	32.15	QP	V	4.02	36.17	46	9.83	spurious

802.11n20 Mode:


Frequency (MHz)	Reading (dBμV)	Detector (PK/QP /Ave.)	Polar (H/V)	Corrected factor (dB/m)	Correction Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Comment
Low Channel (2412 MHz)								
4824	29.32	PK	H	28.63	57.95	74	16.05	harmonic
4824	17.25	Ave.	H	28.63	45.88	54	8.12	harmonic
4824	29.56	PK	V	28.63	58.19	74	15.81	harmonic
4824	17.44	Ave.	V	28.63	46.07	54	7.93	harmonic
2400	25.41	PK	H	23.23	48.64	74	25.36	spurious
2400	16.51	Ave.	H	23.23	39.74	54	14.26	spurious
2400	26.25	PK	V	23.23	49.48	74	24.52	spurious
2400	17.59	Ave.	V	23.23	40.82	54	13.18	spurious
2412	82.01	PK	V	23.37	105.38	N/A	N/A	Fundamental
2412	71.36	Ave.	V	23.37	94.73	N/A	N/A	Fundamental
2412	81.25	PK	H	23.37	104.62	N/A	N/A	Fundamental
2412	70.03	Ave.	H	23.37	93.40	N/A	N/A	Fundamental
132.47	38.54	QP	H	-7.25	31.29	43.5	12.21	spurious
132.47	37.65	QP	V	-7.25	30.40	43.5	13.10	spurious
Middle Channel (2437 MHz)								
4874	29.41	PK	H	28.79	58.20	74	15.80	harmonic
4874	17.36	Ave.	H	28.79	46.15	54	7.85	harmonic
4874	30.05	PK	V	28.79	58.84	74	15.16	harmonic
4874	17.69	Ave.	V	28.79	46.48	54	7.52	harmonic
2437	81.56	PK	H	23.37	104.93	N/A	N/A	Fundamental
2437	70.57	Ave.	H	23.37	93.94	N/A	N/A	Fundamental
2437	83.69	PK	V	23.37	107.06	N/A	N/A	Fundamental
2437	72.54	Ave.	V	23.37	95.91	N/A	N/A	Fundamental
276.5	37.69	QP	H	-3.69	34.00	46	12.00	spurious
276.5	39.02	QP	V	-3.69	35.33	46	10.67	spurious
High Channel (2462 MHz)								
4924	30.62	PK	H	28.95	59.57	74	14.43	harmonic
4924	17.84	Ave.	H	28.95	46.79	54	7.21	harmonic
4924	30.85	PK	V	28.95	59.80	74	14.20	harmonic
4924	17.90	Ave.	V	28.95	46.85	54	7.15	harmonic
2483.5	26.01	PK	H	24.12	50.13	74	23.87	spurious
2483.5	16.92	Ave.	H	24.12	41.04	54	12.96	spurious
2483.5	27.54	PK	V	24.12	51.66	74	22.34	spurious
2483.5	17.69	Ave.	V	24.12	41.81	54	12.19	spurious
2462	83.87	PK	H	26.16	110.03	N/A	N/A	Fundamental
2462	72.52	Ave.	H	26.16	98.68	N/A	N/A	Fundamental
2462	84.21	PK	V	26.16	110.37	N/A	N/A	Fundamental
2462	73.29	Ave.	V	26.16	99.45	N/A	N/A	Fundamental
611.22	28.96	QP	H	3.85	32.81	46	13.19	spurious
611.22	30.22	QP	V	3.85	34.07	46	11.93	spurious

Conducted Spurious Emissions at Antenna Port


802.11b Low Channel

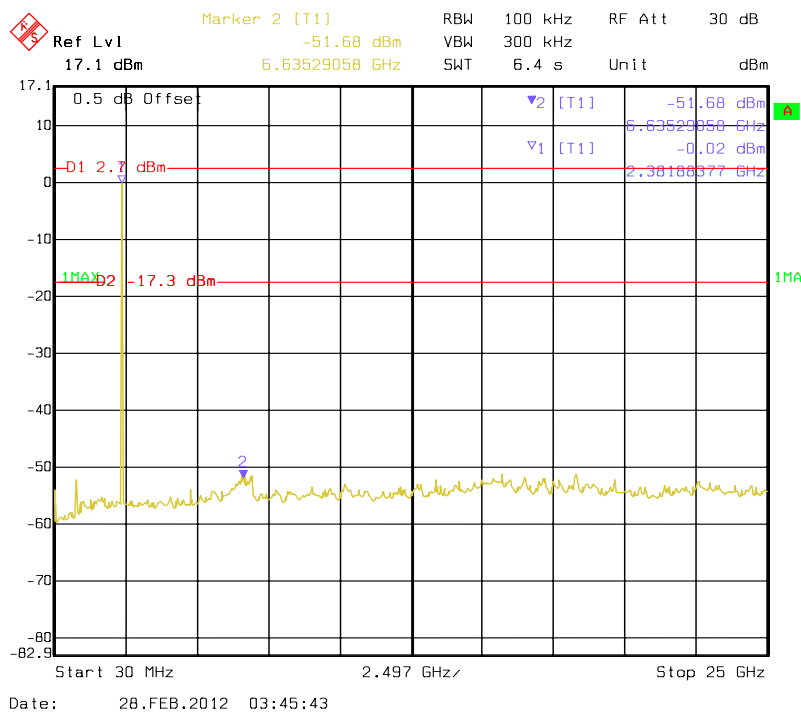


802.11b Middle Channel

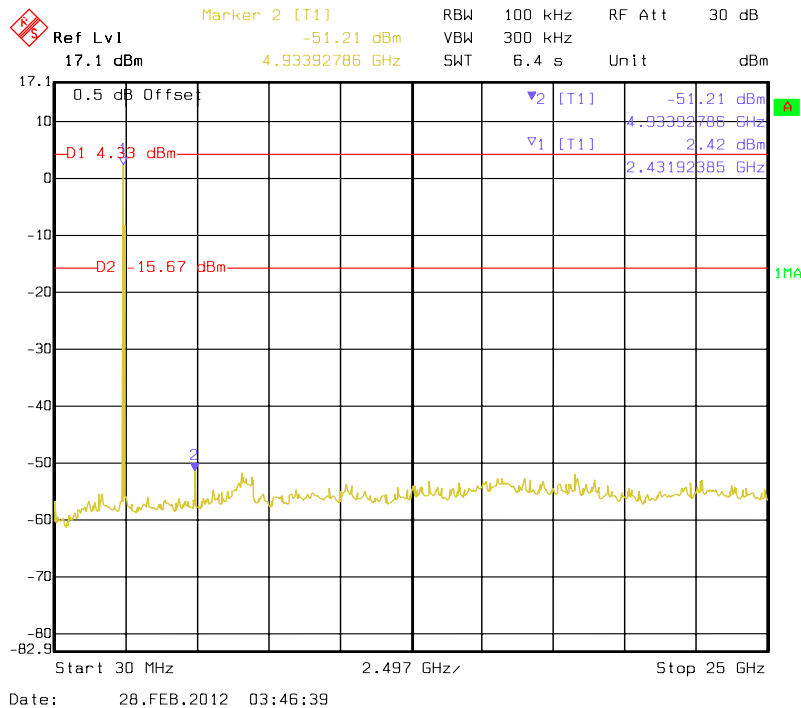


802.11b High Channel

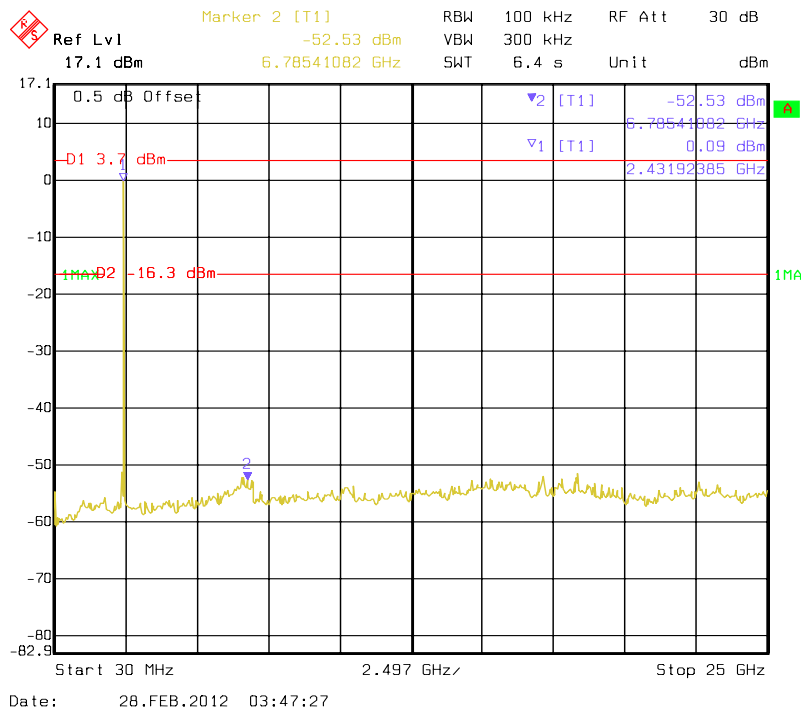


802.11g Low Channel

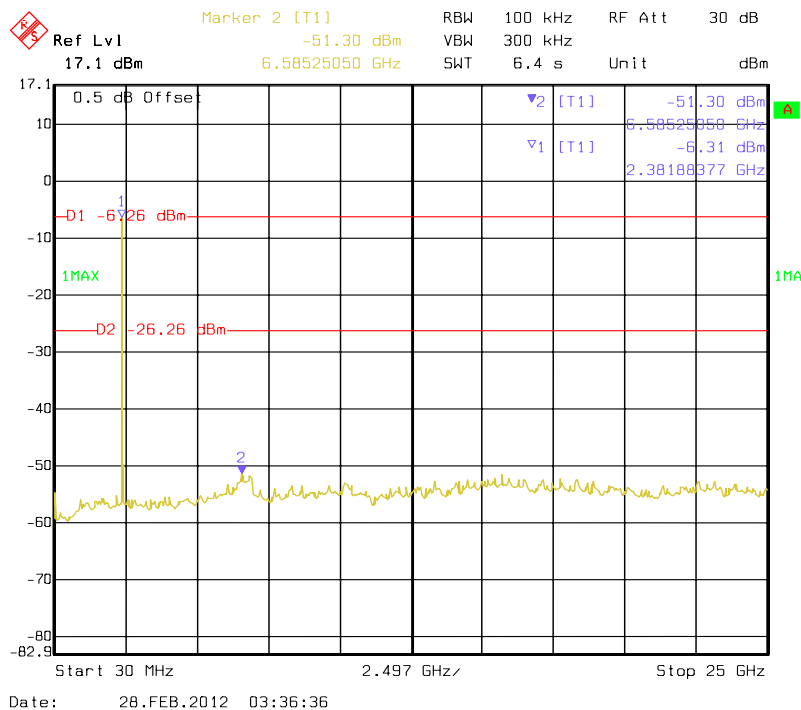


802.11g Middle Channel

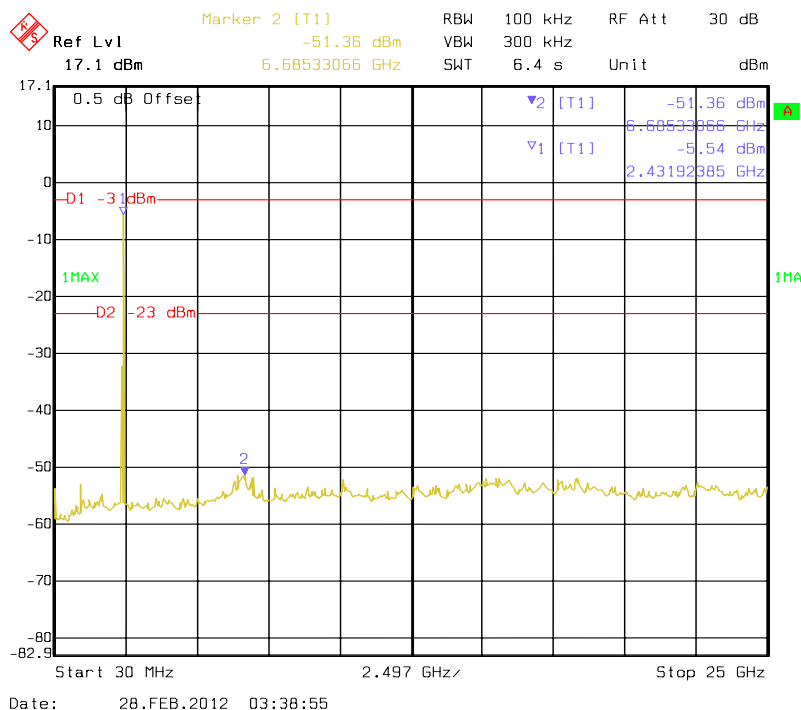


802.11g High Channel

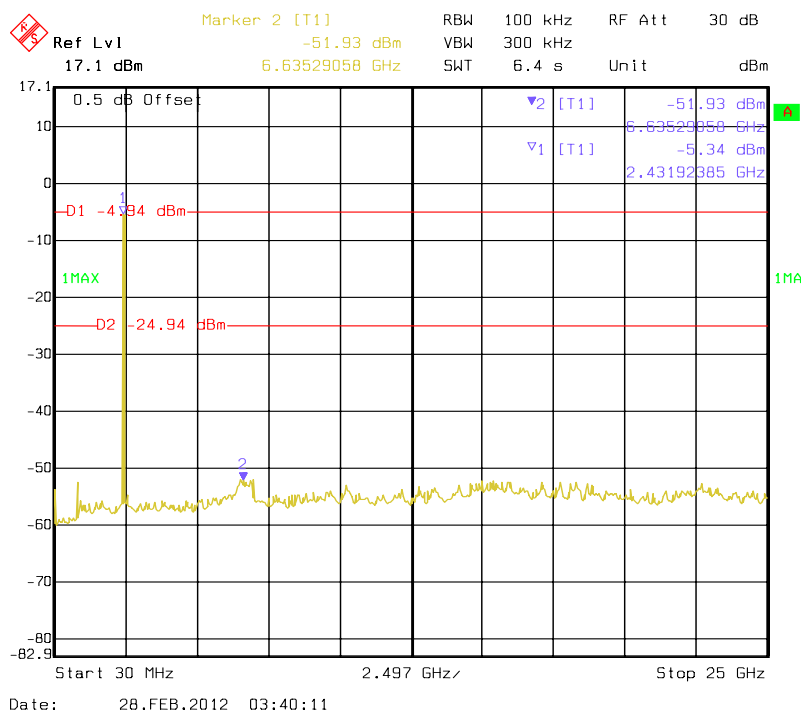


802.11n20 Low Channel

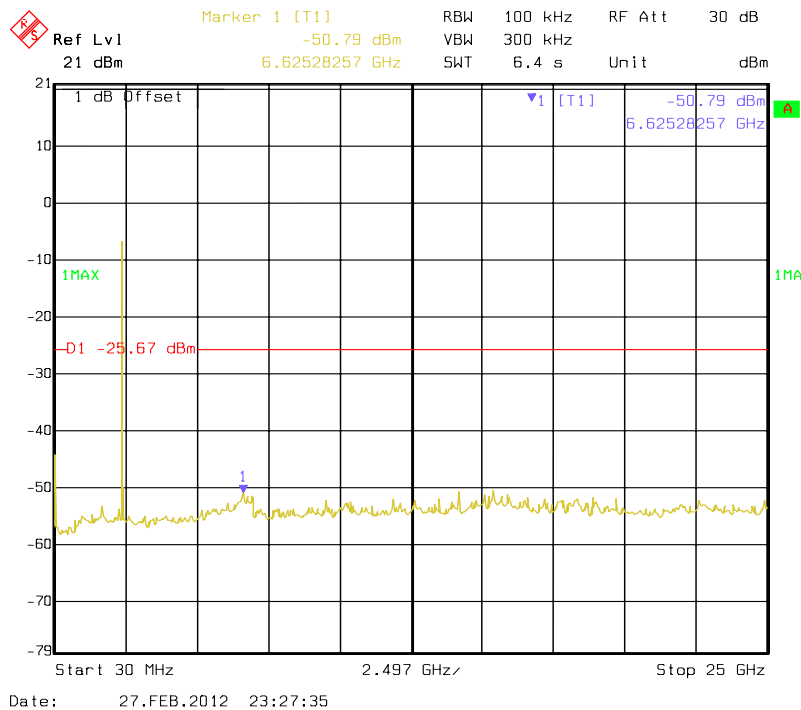

802.11n20 Middle Channel

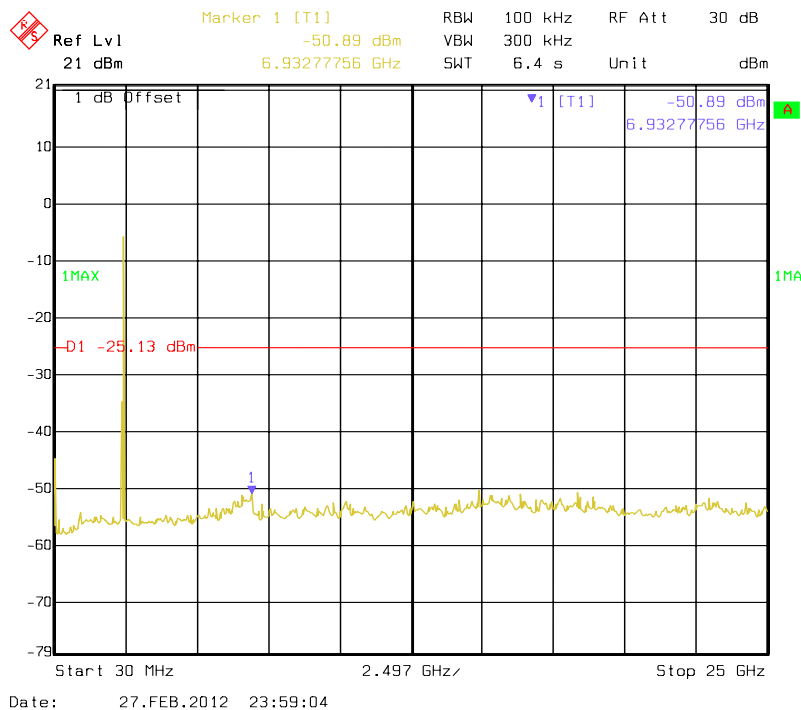

802.11n20 High Channel

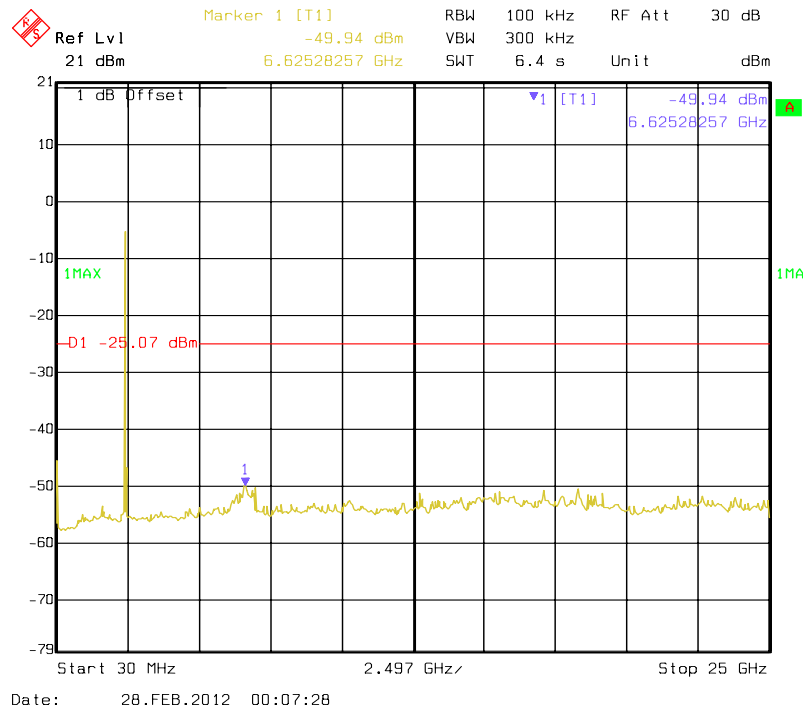


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH**Applicable Standard**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10
Rohde & Schwarz	Signal Analyzer	FSIQ 26	609358	2011-07-08	2012-07-07

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data**Environmental Conditions**

Temperature:	25 ° C
Relative Humidity:	48 %
ATM Pressure:	100.0kPa

The testing was performed by Dean Lau from 2012-02-27 to 2012-02-28.

Test Result: Pass.

Please refer to the following tables and plots.

Channel	6 dB Bandwidth (MHz)	Limit (KHz)
802.11b mode		
Low(2412 MHz)	8.28	>500
Middle(2437 MHz)	8.28	>500
High(2462 MHz)	8.23	>500
802.11g mode		
Low(2412 MHz)	16.72	>500
Middle(2437 MHz)	16.68	>500
High(2462 MHz)	16.72	>500
802.11n20 mode		
Low(2412 MHz)	17.92	>500
Middle(2437 MHz)	17.92	>500
High(2462 MHz)	17.91	>500

Ref 15 dBm Att 30 dB RBW 100 kHz Delta 2 [T1] 0.76 dB
 VBW 300 kHz SWT 2.5 ms 8.280000000 MHz

Offset 1 dB


OW 12.080000000 MHz
 Marker 1 [T1] -5.15 dBm
 2.407760000 GHz
 Temp 1 [T1 OW] -11.36 dBm
 2.405800000 GHz
 Temp 2 [T1 OW] -12.05 dBm
 2.417920000 GHz

D1 1.97 dBm
 D2 -4.03 dBm

T1
 T2


Center 2.412 GHz 4 MHz/ Span 40 MHz

802.11b Middle Channel

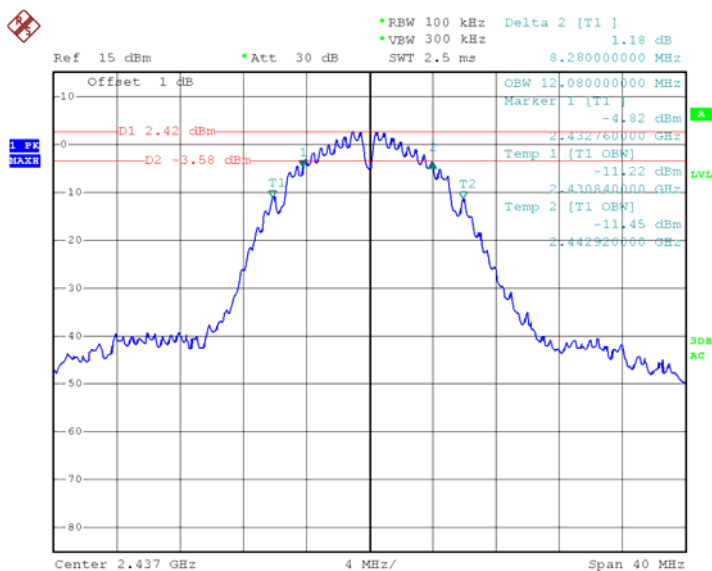


Date: 12.APR.2012 15:24:59

802.11b High Channel

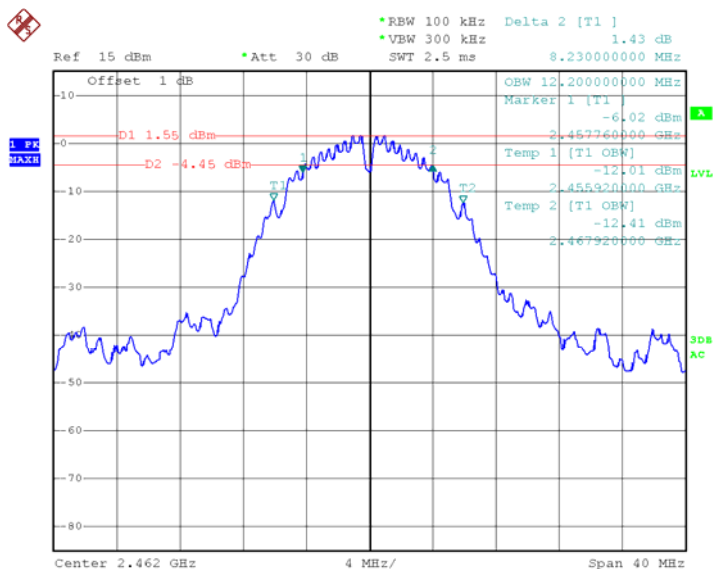


Date: 12.APR.2012 15:42:22

802.11g Low Channel

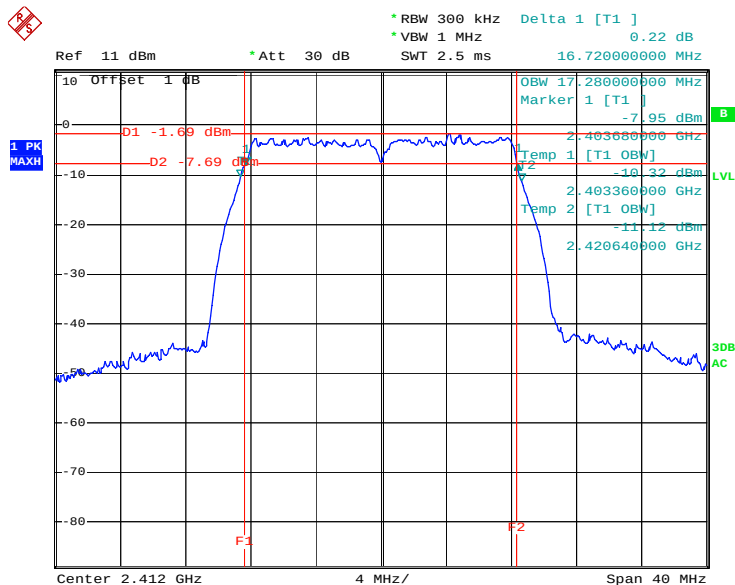


Date: 28.FEB.2012 13:17:16

802.11g Middle Channel

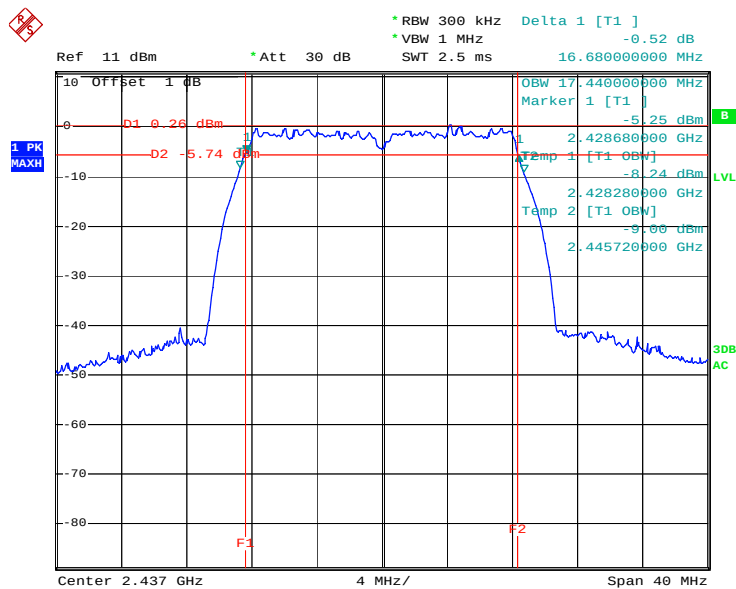


Date: 28.FEB.2012 13:42:03

802.11g High Channel

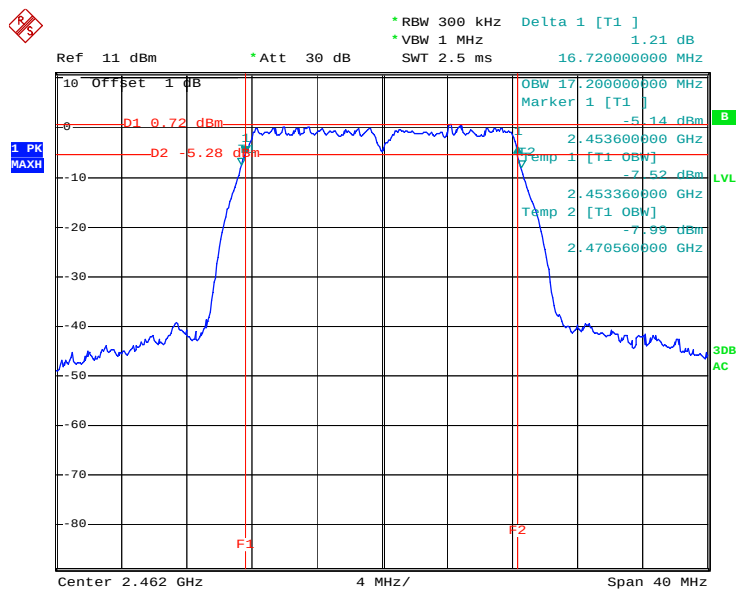


Date: 28.FEB.2012 13:43:08


802.11n20 Low Channel

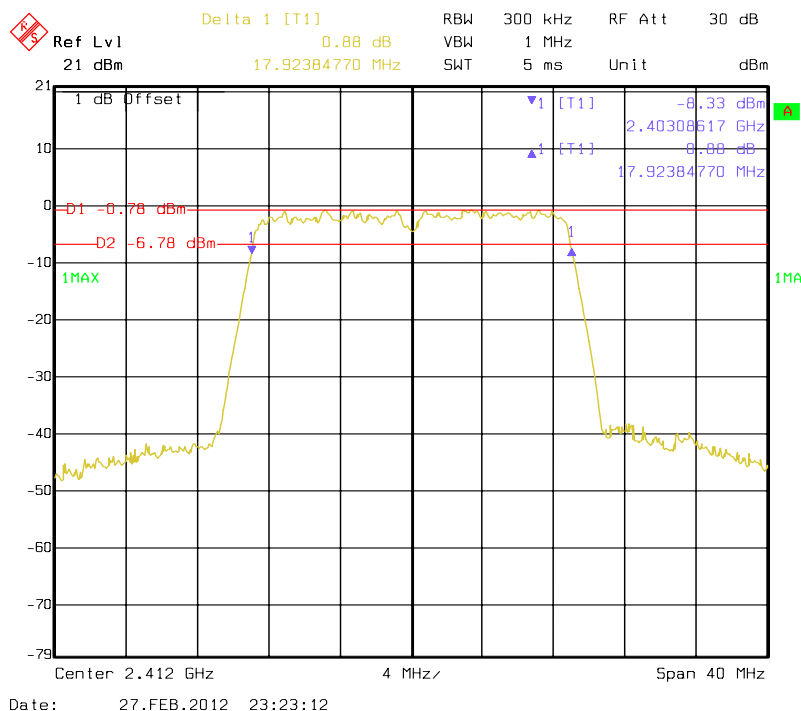

802.11n20 Middle Channel

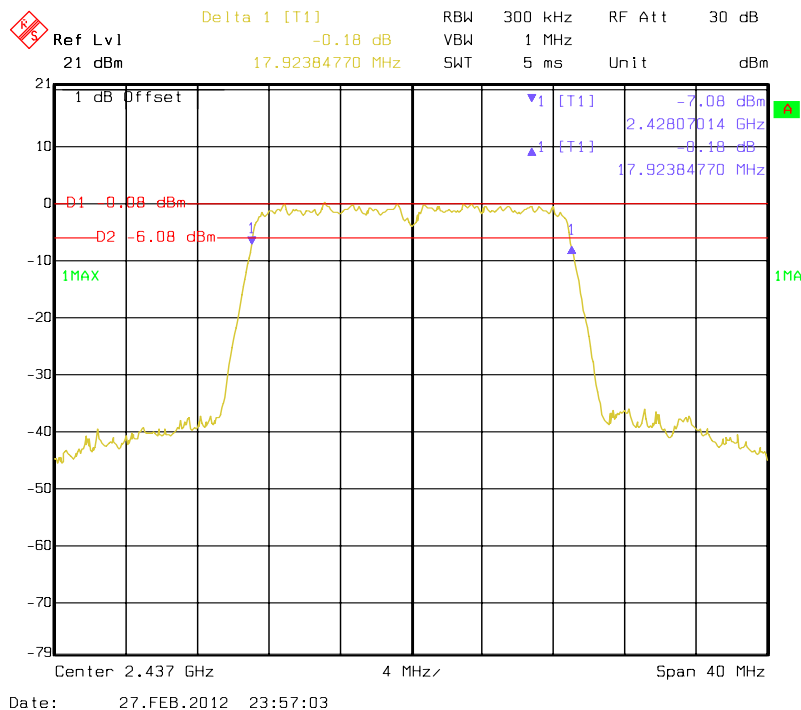

802.11n20 High Channel

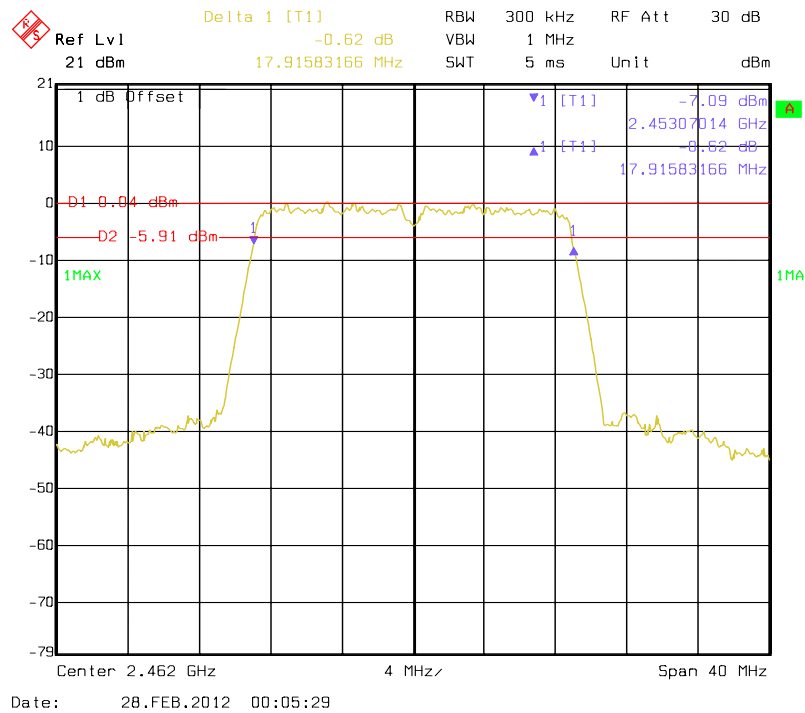


FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI Test Receiver.
3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10
Rohde & Schwarz	Signal Analyzer	FSIQ 26	609358	2011-07-08	2012-07-07

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	48 %
ATM Pressure:	100.0 kPa

The testing was performed by Dean Lau from 2012-02-27 to 2012-02-28.


Test Mode: Transmitting

Channel	Conducted Output Power (dBm)	Limit (dBm)
802.11b mode		
Low(2412 MHz)	15.09	30
Middle(2437 MHz)	16.22	30
High(2462 MHz)	16.72	30
802.11g mode		
Low(2412 MHz)	15.21	30
Middle(2437 MHz)	14.62	30
High(2462 MHz)	14.05	30
802.11n20 mode		
Low(2412 MHz)	16.04	30
Middle(2437 MHz)	16.14	30
High(2462 MHz)	16.41	30

Note: the antenna gain is 2.0 dBi.


Please refer to the following plots

802.11b RF Output Power, Low Channel

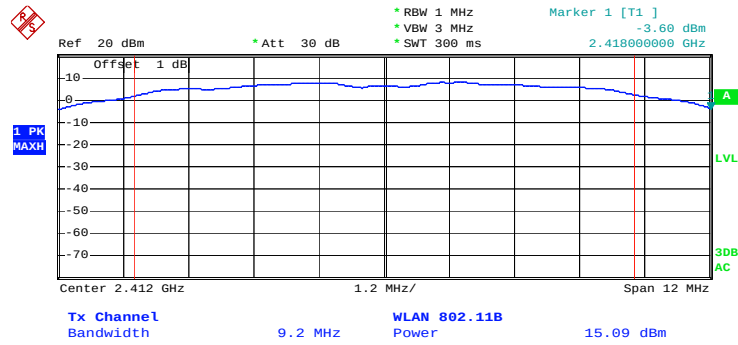


Date: 28.FEB.2012 12:01:45


802.11b RF Output Power, Middle Channel

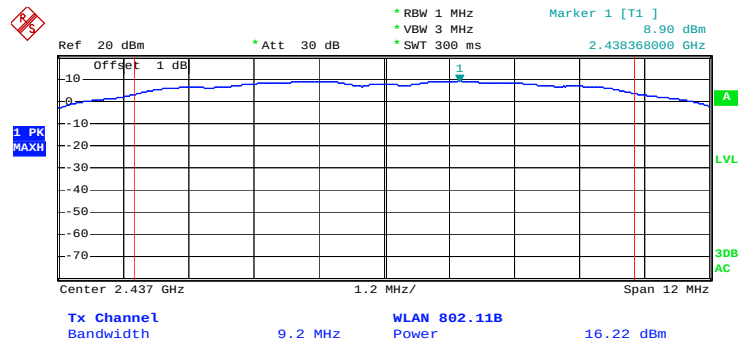


Date: 28.FEB.2012 12:03:26

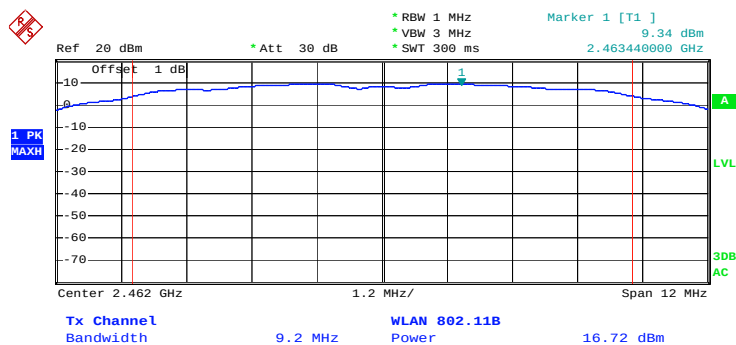802.11b RF Output Power, High Channel


Date: 28.FEB.2012 12:03:51

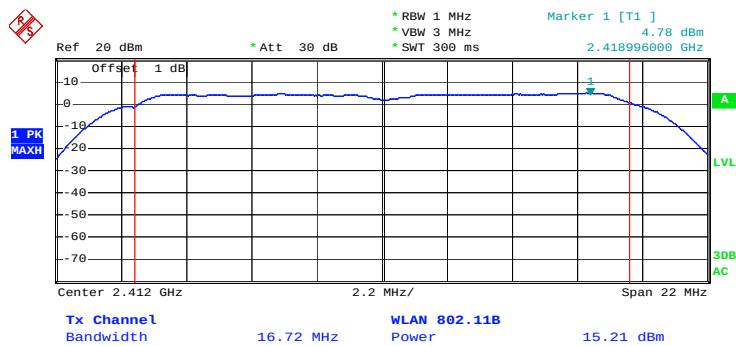802.11g RF Output Power, Low Channel

Date: 28.FEB.2012 13:45:53

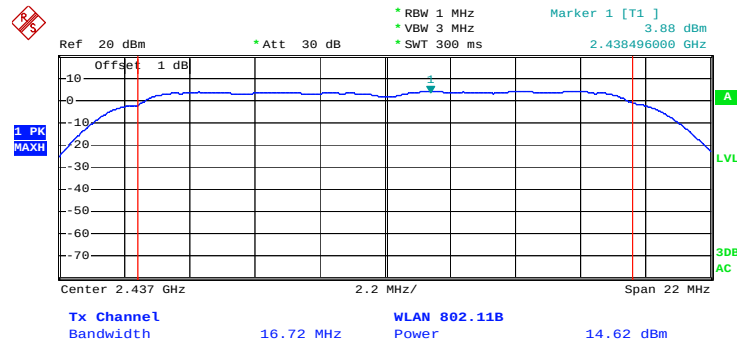
802.11g RF Output Power, Middle Channel

Date: 28.FEB.2012 13:45:17

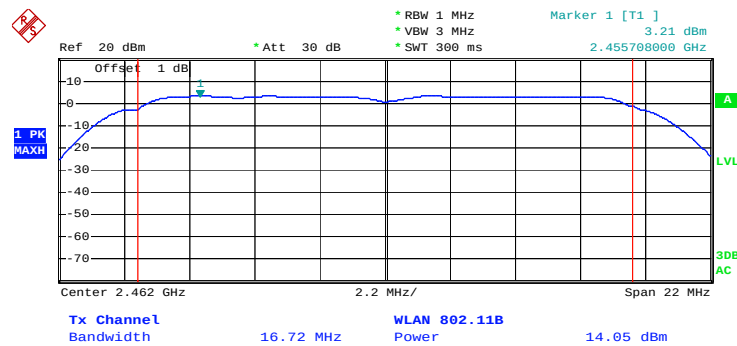
802.11g RF Output Power, High Channel

Date: 28.FEB.2012 13:44:17


802.11n20 RF Output Power, Low Channel

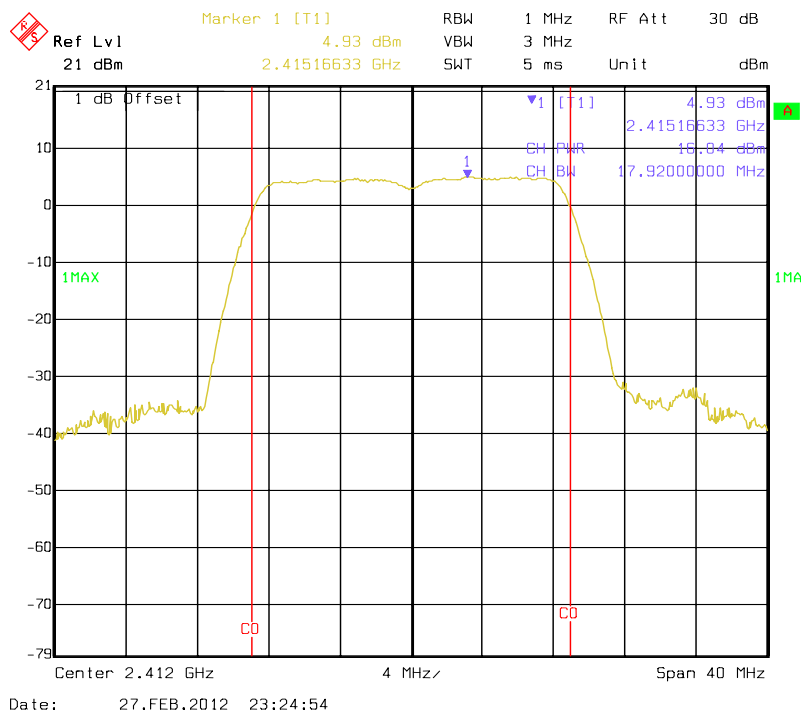

802.11n20 RF Output Power, Middle Channel

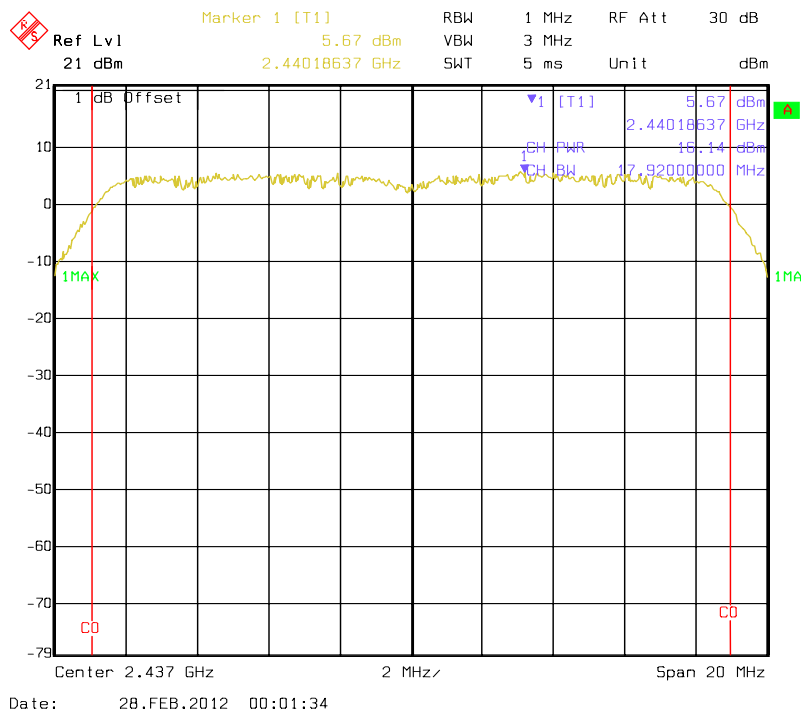

802.11n20 RF Output Power, High Channel

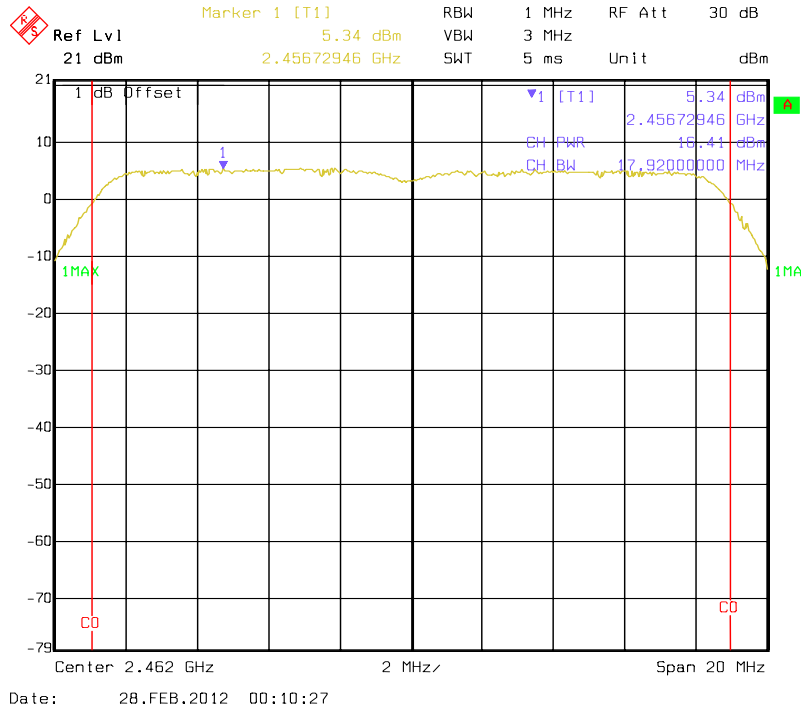

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10
Rohde & Schwarz	Signal Analyzer	FSIQ 26	609358	2011-07-08	2012-07-07

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data**Environmental Conditions**


Temperature:	25 ° C
Relative Humidity:	48 %
ATM Pressure:	100.0 kPa

The testing was performed by Dean Lau from 2012-02-27 to 2012-02-28

Test Result: *Compliance*


Please refer to following plots.

802.11b: Band Edge, Left Side

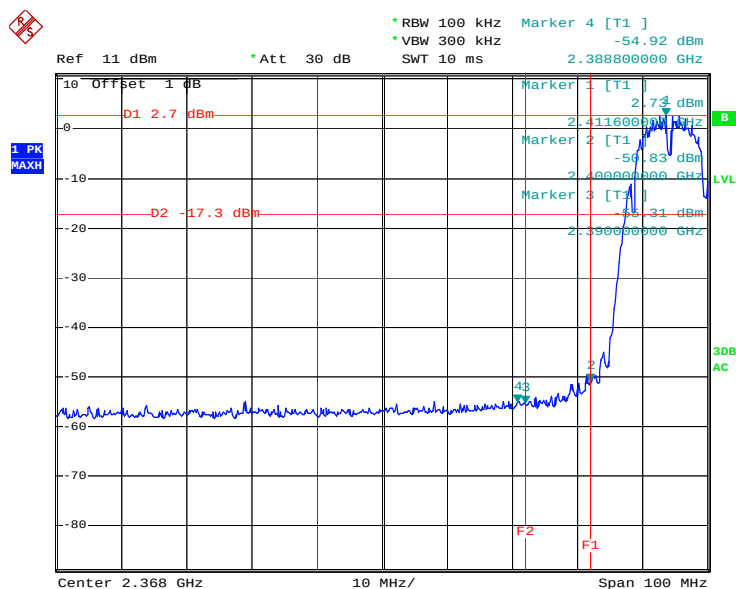


Date: 28.FEB.2012 12:09:16

802.11b: Band Edge, Right Side

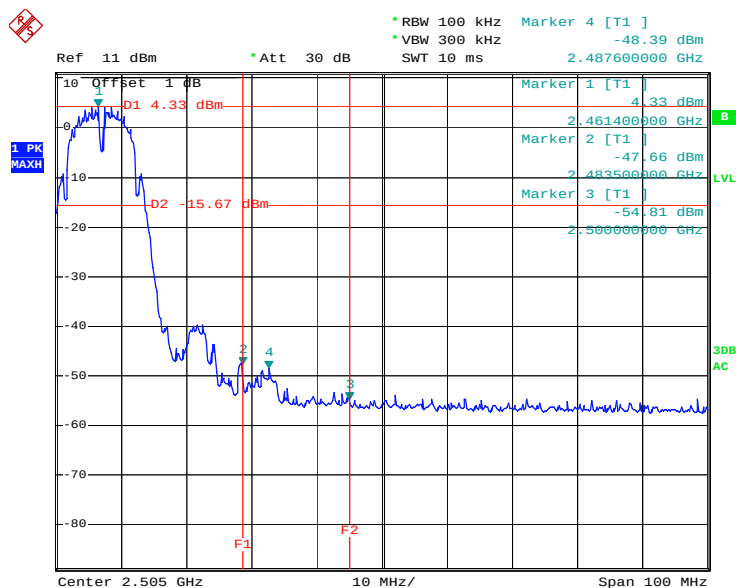


Date: 28.FEB.2012 13:04:42

802.11g: Band Edge, Left Side

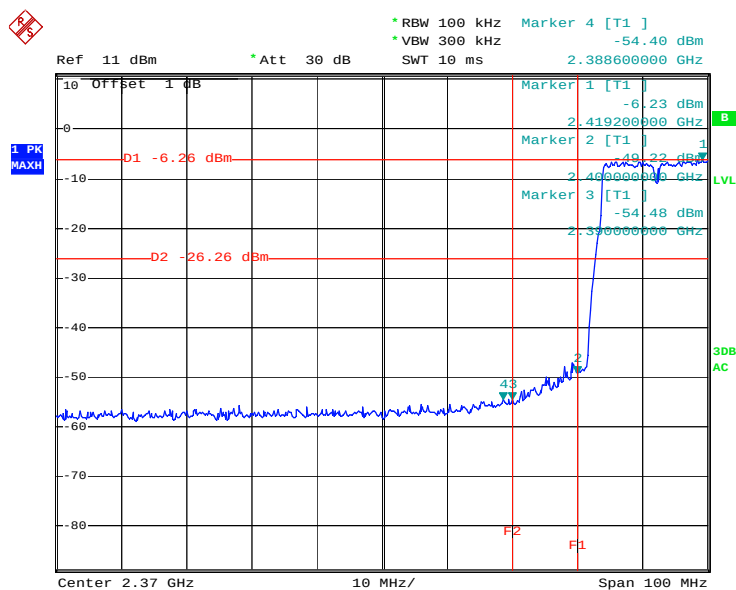


Date: 28.FEB.2012 13:52:01

802.11g: Band Edge, Right Side

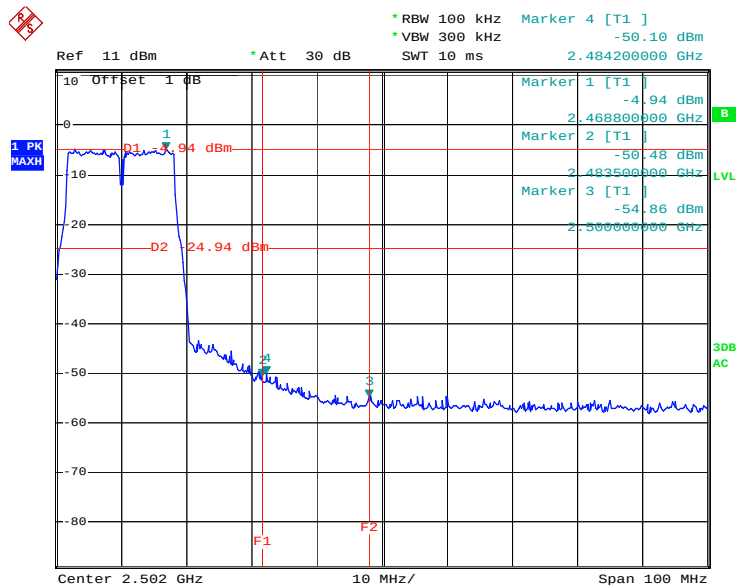


Date: 28.FEB.2012 13:50:52

802.11n20: Band Edge, Left Side

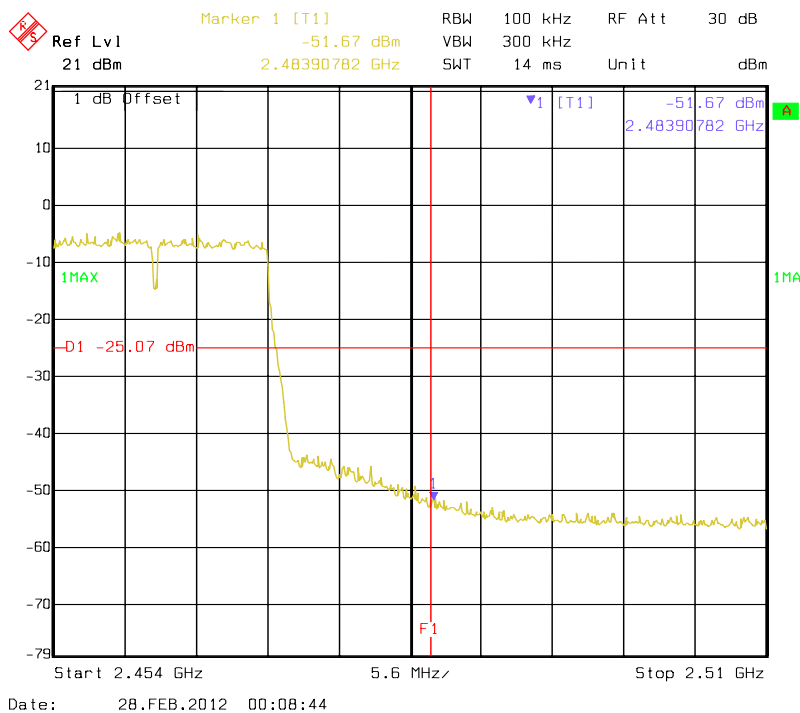

802.11n20: Band Edge, Right Side

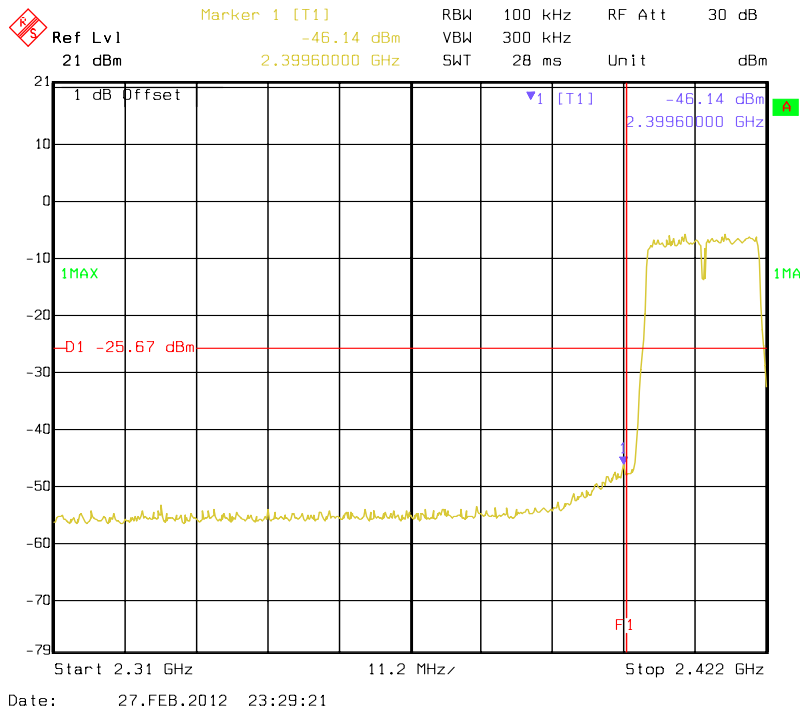

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW = 100 kHz, VBW $\geq$ 300 kHz, set the span to 5-30 % greater than the EBW.
4. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
5. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3\text{ kHz}/100\text{ kHz} = -15.2\text{ dB})$.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10
Rohde & Schwarz	Signal Analyzer	FSIQ 26	609358	2011-07-08	2012-07-07

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	48 %
ATM Pressure:	100.0 kPa

The testing was performed by Dean Lau from 2012-02-27 to 2012-02-28.


Test Mode: Transmitting

Test Result: Pass


Channel	Data Rate	Reading Level (dBm/100kHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
802.11b mode					
Low	1	2.69	-12.51	8	PASS
Middle	1	3.70	-11.5	8	PASS
High	1	4.14	-11.06	8	PASS
802.11g mode					
Low	6	-6.17	-21.37	8	PASS
Middle	6	-5.53	-20.73	8	PASS
High	6	-5.00	-20.2	8	PASS
802.11n20 mode					
Low	6.5	-5.67	-20.87	8	PASS
Middle	6.5	-5.13	-20.33	8	PASS
High	6.5	-5.07	-20.27	8	PASS

Note: the antenna gain is 2.0 dBi.

Please refer to the following plots

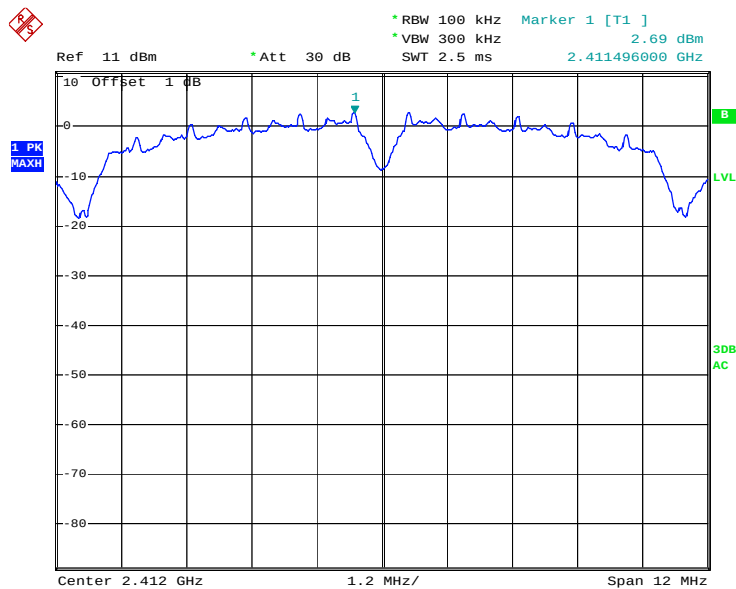
Power Spectral Density, 802.11b Low Channel

Date: 28.FEB.2012 12:07:29

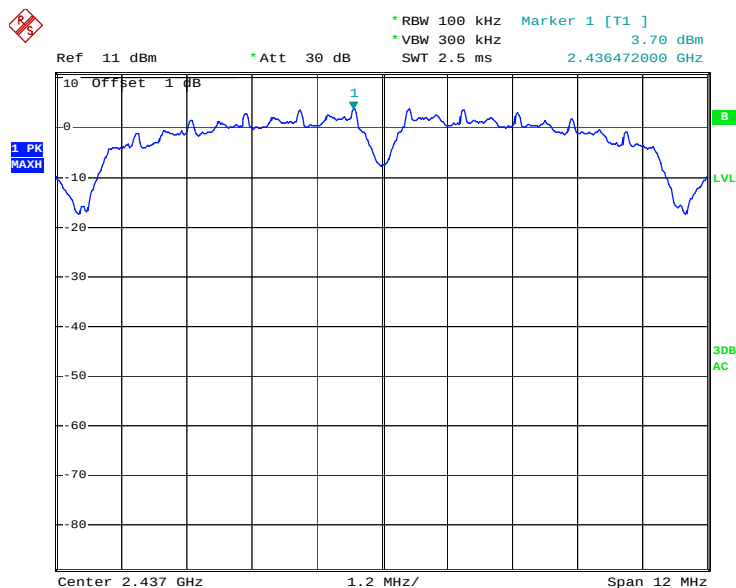Power Spectral Density, 802.11b Middle Channel


Date: 28.FEB.2012 12:05:15

Power Spectral Density, 802.11b High Channel

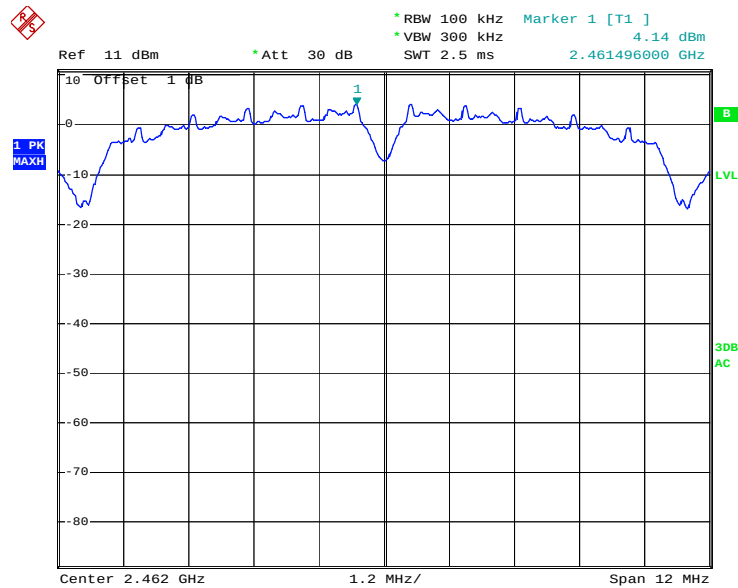


Date: 28.FEB.2012 12:04:40

Power Spectral Density, 802.11g Low Channel

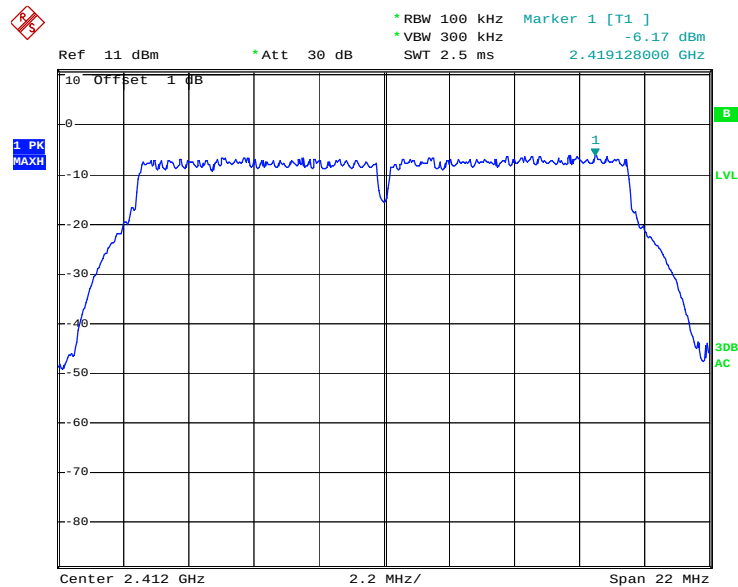


Date: 28.FEB.2012 13:47:54

Power Spectral Density, 802.11g Middle Channel


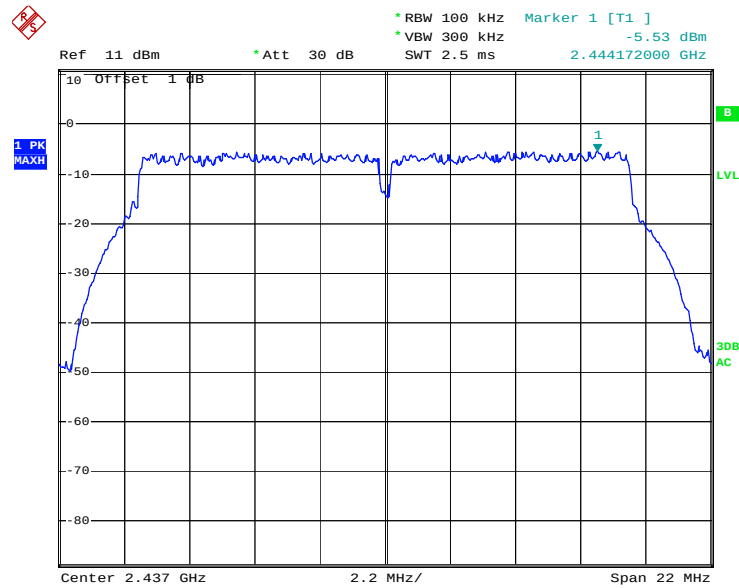


Date: 28.FEB.2012 13:48:23


Power Spectral Density, 802.11g High Channel

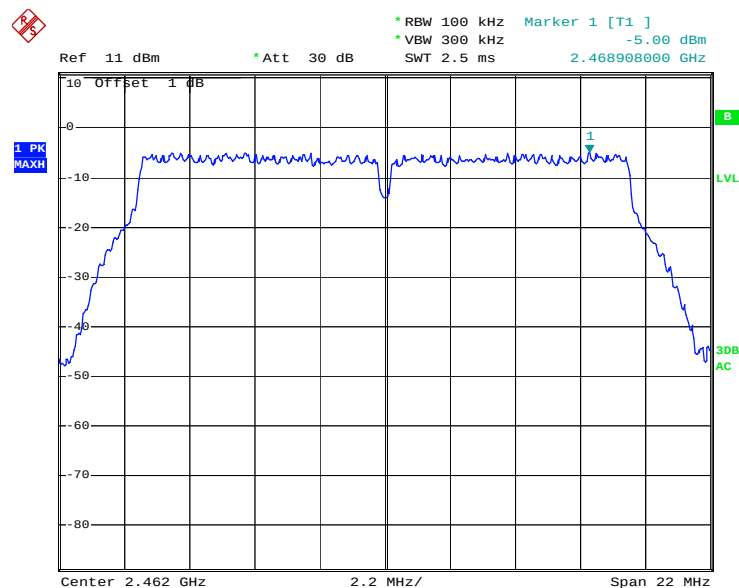

Date: 28.FEB.2012 13:49:33

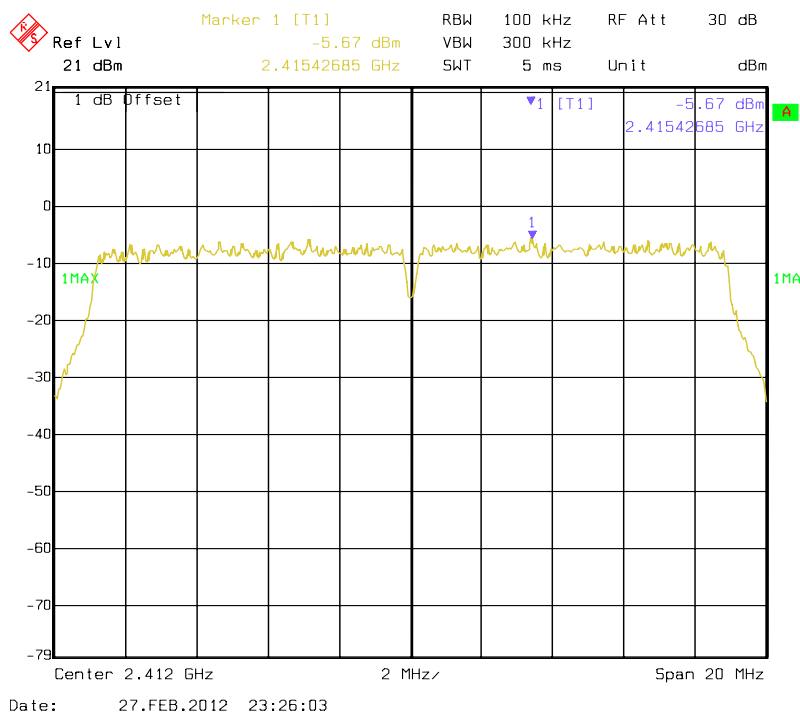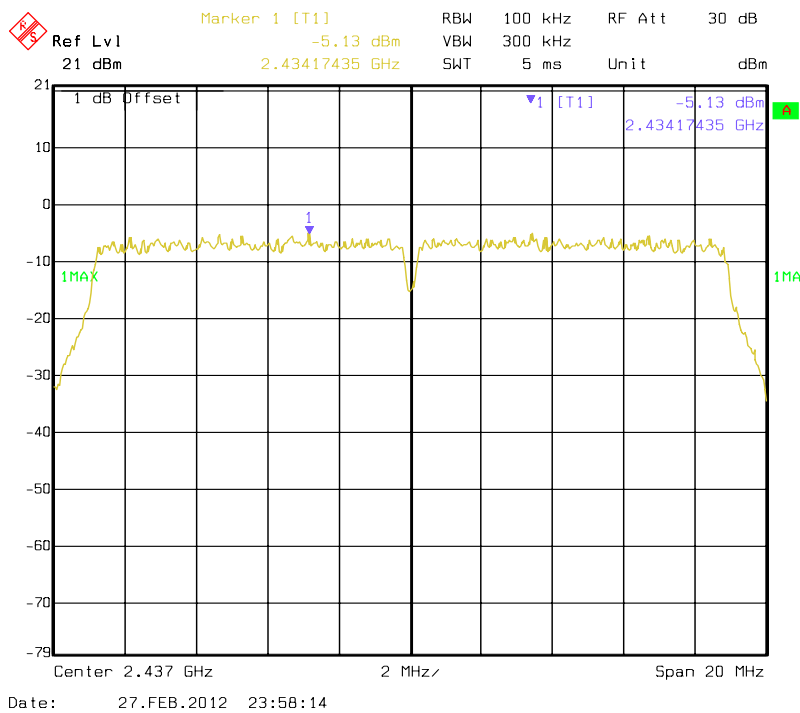Power Spectral Density, 802.11n20 Low Channel**Power Spectral Density, 802.11n20 Middle Channel**

Power Spectral Density, 802.11n20 High Channel

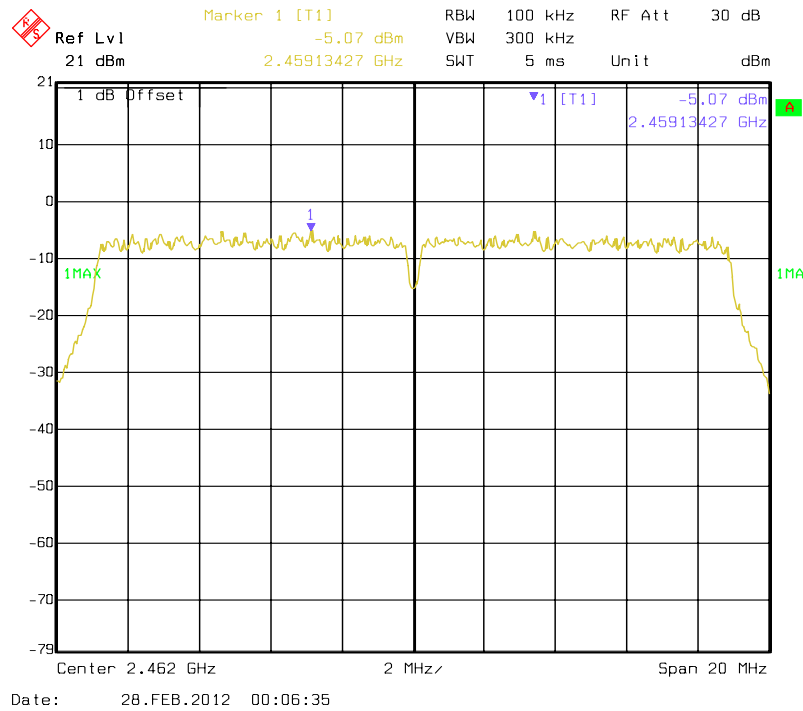

***** END OF REPORT *****