

Hong Kong Standards and Testing Centre

No.: HM153648

Applicant: Laars, Inc.,

dba Waterpik Technologies Pool Products &

Heating Systems.

6000 Condor Drive, Moorpark, CA93021, USA

Description of Samples: Model name: PDA pool/spa wireless remote

controller handheld

Model no.: 8265
Brand name: Jandy
FCC ID: S8F826X

Date Samples Received: 2005-03-22

Date Tested: 2005-04-13

Investigation Requested: FCC Part 15 Subpart C

Conclusions: The submitted product <u>COMPLIED</u> with the

requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on

Section 2.2 in this Test Report.

Remarks: For additional models details, see page 5.

K C Lee, EMD for Chief Executive

This report shall not be reproduced unless with prior written approval from the Hong Kong Standards and Testing Centre.



Hong Kong Standards and Testing Centre

No.: HM153648

CONTENT:

	Cover Content	Page 1 of 17 Page 2-3 of 17
<u>1.0</u>	General Details	
1.1	Test Laboratory	Page 4 of 17
1.2	Applicant Details HKSTC Code Number for Applicant Manufacturer	Page 4 of 17
1.3	Equipment Under Test [EUT] Description of EUT operation	Page 5 of 17
1.4	Date of Order	Page 5 of 17
1.5	Submitted Sample	Page 5 of 17
1.6	Test Duration	Page 5 of 17
1.7	Country of Origin	Page 5 of 17
1.8	Additional Information of EUT	Page 6 of 17
<u>2.0</u>	Technical Details	
2.1	Investigations Requested	Page 7 of 17
2.2	Test Standards and Results Summary	Page 7 of 17
<u>3.0</u>	Test Results	
3.1	Radiated Emission	Page 8-13 of 17
3.2	Conducted Emission	Page 14 of 17



Hong Kong Standards and Testing Centre

No.: HM153648

Appendix A

List of Measurement Equipment Page 15 of 17

Appendix B

Photographs Page 16-17 of 17



Hong Kong Standards and Testing Centre

No.: HM153648

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

1.2 Applicant Details

Laars, Inc., dba Waterpik Technologies Pool Products & Heating Systems. 6000 Condor Drive, Moorpark, CA93021, USA

HKSTC Code Number for Applicant

HKS001

Manufacturer

Laars, Inc., dba Waterpik Technologies Pool Products & Heating Systems. 6000 Condor Drive, Moorpark, CA93021, USA



Hong Kong Standards and Testing Centre

No.: HM153648

1.3 Equipment Under Test [EUT] Description of Sample

Product: PDA pool/spa wireless remote controller handheld
Manufacturer: Laars, Inc., dba Waterpik Technologies Pool Products &

Heating Systems.

Brand Name: Jandy Model Number: 8265

Input Voltage: 3Vd.c. ("AA" size battery x 2)

Additional Product: Wireless SpaLink remote controller handheld

Additional Model Number: 8266

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a PDA pool/spa wireless remote controller handheld, the transmission signal is frequency hopping of channels frequency range 915.3 - 923.7MHz.

1.4 Date of Order

2005-03-22

1.5 Submitted Sample(s):

1 Sample per model

1.6 Test Duration

2005-04-13

1.7 Country of Origin

China



Hong Kong Standards and Testing Centre

No.: HM153648

1.8 Additional Information of EUT

	Submitted	Not Available
User Manual		
Part List		5
Circuit Diagram		
Printed Circuit Board [PCB] Layout		
Block diagram	\boxtimes	
FCC ID Label	\boxtimes	



Hong Kong Standards and Testing Centre

No.: HM153648

2.0 Technical Details

2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15 Regulations and ANSI C63.4:2003 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION								
Test Condition Test Requirement Test Method Class / Test Result								
	'		Severity	Pass	Fail	N/A		
Field Strength of Fundamental & Harmonics Emissions	FCC 47CFR 15.249	ANSI C63.4:2003	N/A					
Radiated Emissions, 30MHz to 1GHz	FCC 47CFR 15.209	ANSI C63.4:2003	Class B					
Conducted Emissions on AC, 0.15MHz to 30MHz	FCC 47CFR 15.207	ANSI C63.4:2003	N/A					

Note: N/A - Not Applicable



Hong Kong Standards and Testing Centre

Date: 2005-05-17 **TEST REPORT** Page 8 of 17

No.: HM153648

3.0 Test Results

3.1 Emission

3.1.1 Radiated Emissions

Test Requirement: FCC 47CFR 15.249
Test Method: ANSI C63.4:2003
Test Date: 2005-04-13


Mode of Operation: Tx mode & Rx mode

Test Method:

The sample was placed 0.8m above the ground plane on the *OATS / **Semi-anechoic Chamber, measurements in both horizontal and vertical antenna polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The worst case(s) of emission is/are shown in Test Results of the following pages.

- * OATS [Open Area Test Site] located at HKSTC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 90657.
- ** Semi-anechoic chamber located at HKSTC filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756. (This has been used in the report)

Test Setup:

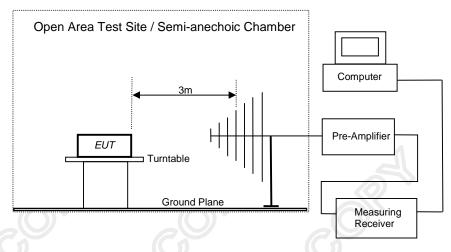



Hong Kong Standards and Testing Centre

No.: HM153648

Limits for Field Strength of Fundamental & Harmonics Emissions [FCC 47CFR 15.249]:

Frequency Range of Fundamental	Field Strength of Fundamental Emission	Field Strength of Harmonics Emission		
[MHz]	[microvolts/meter]	[microvolts/meter]		
902-928	50,000 [Average]	500 [Average]		
2400-2483.5	50,000 [Average]	500 [Average]		

Results of Tx Mode (Lowest Channel Frequency): Pass

	Field Strength of Fundamental Emissions							
	Peak Value							
F	Frequency Measured Correction Field Field				Limit @3m	E-Field		
		Level @3m	Factor	Strength	Strength		Polarity	
	MHz	dBµV/m	dBµV/m	dBµV/m	μV/m	μV/m		
	915.3	55.9	26.7	82.6	13,489.6	50,000	Vertical	
	1830.6	15.1	34.6	49.7	305.5	500	Horizontal	
*	2745.9	4		1		500	Vertical	
*	3661.2	7(500	Vertical	
*	4576.5					500	Vertical	
	5491.8		No Emission	n Detected		500	Vertical	
	6407.1					500	Vertical	
*	7322.4					500	Vertical	
*	8237.7					500	Vertical	
*	9153.0	\				500	Vertical	

Remarks:

*: Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000 MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Calculated measurement uncertainty : 30MHz to 1GHz ±4.1dB 1GHz to 18GHz ±4.4dB





Hong Kong Standards and Testing Centre

No.: HM153648

Results of Tx Mode (Middle Channel Frequency): Pass

Field Strength of Fundamental Emissions Peak Value							
Frequency	Measured Level @3m	Correction Factor	Field Strength	Field Strength	Limit @3m	E-Field Polarity	
MHz	dBµV/m	dBµV/m	dBµV/m	μV/m	μV/m	Tolarity	
920.1	56.7	26.6	83.3	14,621.8	50,000	Horizontal	
1840.2	15.3	34.6	49.9	312.6	500	Vertical	
* 2760.3					500	Vertical	
* 3680.4					500	Vertical	
* 4600.5					500	Vertical	
5520.6		No Emission	n Detected		500	Vertical	
6440.7	1				500	Vertical	
* 7360.8	1		500	Vertical			
* 8280.9	1				500	Vertical	
9201.0	1				500	Vertical	

Remarks:

*: Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000 MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Calculated measurement uncertainty : 30MHz to 1GHz ±4.1dB

1GHz to 18GHz ±4.4dB



Hong Kong Standards and Testing Centre

No.: HM153648

Results of Tx Mode Highest Channel Frequency: Pass

	Field Strength of Fundamental Emissions Peak Value							
F	requency MHz	Measured Level @3m dBµV/m	Correction Factor dBµV/m	Field Strength dBµV/m	Field Strength µV/m	Limit @3m µV/m	E-Field Polarity	
	923.7	56.7	26.6	83.3	14,621.8	50,000	Horizontal	
	1847.4	15.1	34.7	49.8	309.0	500	Vertical	
*	2771.1					500	Vertical	
*	3694.8					500	Vertical	
*	4618.5					500	Vertical	
	5542.2		No Emissio	n Detected		500	Vertical	
	6465.9					500	Vertical	
*	7389.6				500	Vertical		
*	8313.3					500	Vertical	
*	9237.0					500	Vertical	

Remarks:

*: Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000 MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Calculated measurement uncertainty : 30MHz to 1GHz ±4.1dB


1GHz to 18GHz ±4.4dB




Hong Kong Standards and Testing Centre

No.: HM153648

Lower Frequency

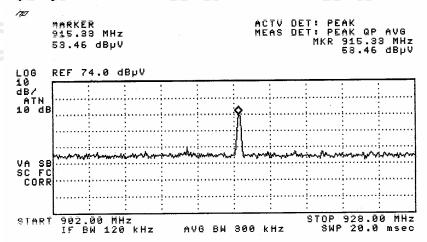

Highest Frequency

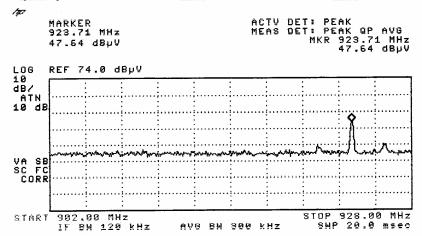



Hong Kong Standards and Testing Centre

No.: HM153648

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [μV/m]		
30-88	100		
88-216	150		
216-960	200		
Above960	500		

The emission limits shown in the above table are based on measurement employing a CISPR quasipeak detector and above 1000MHz are based on measurements employing an average detector.

Results of Rx Mode (Lowest Channel Frequency): Pass

Radiated Emissions Quasi-Peak							
Emission	E-Field	Level	Limit	Level @3m	Limit		
Frequency	Polarity	@3m	@3m	@3m	@3m		
MHz		dBµV/m	dBµV/m	μV/m	μV/m		
321.0	Horizontal	34.9	46	55.6	200		

Results of Rx Mode (Highest Channel Frequency): Pass

Radiated Emissions Quasi-Peak						
Emission	E-Field	Level	Limit	Level @3m	Limit	
Frequency	Polarity	@3m	@3m	@3m	@3m	
MHz		dBµV/m	dBµV/m	μV/m	μV/m	
321.0	Horizontal	33.5	46	47.3	200	

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz ±4.1dB

1GHz to 18GHz ±4.4dB



Hong Kong Standards and Testing Centre

No.: HM153648

3.1.1 Conducted Emissions (0.15MHz to 30MHz)

Test Requirement: FCC 47CFR 15.107
Test Method: ANSI C63.4:2003

Test Date: N/A
Mode of Operation: N/A

Results: N/A

The EUT is operated by a single source of internal battery power [located in the battery compartment], therefore power line conducted emission was deemed unnecessary.



Hong Kong Standards and Testing Centre

No.: HM153648

Appendix A

List of Measurement Equipment

Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL
EM007	SPECTRUM ANALYZER	HEWLETT PACKARD	HP85660B	3144A21192	15/06/04
EM008	SPECTRUM ANALYZER DISPLAY	HEWLETT PACKARD	HP85662A	3144A20514	15/06/04
EM009	QUASI PEAK ADAPTOR	HEWLETT PACKARD	HP85650A	3303A01702	15/06/04
EM010	RF PRESELECTOR	HEWLETT PACKARD	HP85685A	3221A01410	15/06/04
EM011	ATTENNUATOR/SWITCH	HEWLETT PACKARD	HP11713A	2508A10595	15/06/04
EM012	PRE-AMPLIFIER	HEWLETT PACKARD	HP8449B	3008A00262	15/06/04
EM013	CONTROLLER (COMPUTER), COLOR MONITOR, KEYBOARD & MOUSE FLOPPY DRIVE	HEWLETT PACKARD HEWLETT PACKARD HEWLETT PACKARD	HP9000 HP A1097C HP9133L	6226A60314 3151J39517 2623A02468	15/06/04
EM020	HORN ANTENNA	EMCO	3115	4032	30/07/03
EM022	LOOP ANTENNA	EMCO	6502	1189-2424	30/07/03
EM072	SIGNAL GENERATOR	HEWLETT PACKARD	8640B	1948A11892	N/A
EM083	HKSTC OPEN AREA TEST SITE	HKSTC	N/A	N/A	08/02/03
EM131	PORTABLE SPECTRUM ANALYSER	HEWLETT PACKARD	8595EM	3710A00155	13/01/04
EM145	EMI TEST RECEIVER	R&S	ESCS 30	830245/021	04/10/04
EM219	BICONILOG ANTENNA	EMCO	3142C	00029071	28/10/03
EM195	ANTENNA POSITIONING MAST	EMCO	2075	2368	N/A
EM196	MULTI-DEVICE CONTROLLER	EMCO	2090	1662	N/A
EM223	HORN ANTENNA	EMCO	3160-09	08163126	18/06/04
EM224	HORN ANTENNA	EMCO	3160-09	08198430	20/06/04

Line Conducted

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL
EM078	VARIAC	SHANGHAI VOLTAGE	TDGC-3/0.5	N/A	CM
EM081	SMALL SCREENED ROOM	MIKO INST HK	N/A	N/A	17/10/03
EM119	LISN	R&S	ESH3-Z5	0831.5518.52	14/10/04
EM127	ISOLATION TRANSFORMER 220 TO 300	WING SUN	N/A	N/A	СМ
EM142	PULES LIMITER	R&S	ESH3Z2	357.8810.52	04/08/04
EM181	EMI TEST RECEIVER	R&S	ESIB7	100072	06/01/04
EM154	SHIELDING ROOM	SIEMENA MATSUSHITA COMPONENTS	N/A	803-740-057- 99A	17/10/03
EM197	LISN	EMCO	4825/2	1193	05/06/04

Remarks:-

CM Corrective Maintenance N/A Not Applicable or Not Available

TBD To Be Determined



香 港 準 定 心


Hong Kong **Standards** and **Testing** Centre

TEST REPORT Date: 2005-05-17 Page 16 of 17

No.: HM153648

Appendix B

Photographs of EUT






Rear View of the product



Inner Circuit Top View

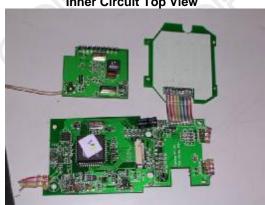

Inner Circuit Bottom View





Hong Kong Standards and Testing Centre

No.: HM153648

Photographs of EUT

Measurement of Radiated Emission Test Set Up

***** End of Test Report *****