

4.4.4 Test Procedure (Radiated)

1. Antenna and Turntable test procedure same as Radiated Emission Measurement.
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN: 100MHz
RBW: 1MHz
VBW: 3MHz
Center frequency: 2.375GHz, 2.500GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
3. Find the next peak frequency outside the operation frequency band
4. For peak frequency emission level measurement in Restricted Band ,
Change RBW: 1MHz
VBW: 10Hz
Span: 100MHz.
5. Get the spectrum reading after Maximum Hold function is completed.

4.4.5 Test Setup (Radiated)

Same as *Radiated Emission Measurement*

4.4.6 Test Data

Table Band Edge measurement (Radiated)

Temp. (deg. C): 25

Test Engr: Mailes Hsieh


Humidity (%): 37

Channel	Frequency (MHz)	Spectrum Reading (dBuV)	Correction Factor (dB/m)	Emission Level (dBuV/m)	dBc (Limit: > 20dBc)	Limit (dBuV/m)	Equip. Setup VBW	Pass or Fail
00(peak mode)	2402	53.64	35.48	89.12	---	---	1MHz	---
Outside band	2400	26.48	35.48	61.96	27.16	---	1MHz	Pass
00(average mode)	2402.1	53.77	35.48	89.25	---	---	10Hz	---
Restricted band	2390	5.1	35.47	40.57	---	54	10Hz	Pass
78(peak mode)	2478	54.67	35.51	90.18	---	---	1MHz	---
Outside band	2479.6	17.81	35.51	53.32	36.86	---	1MHz	Pass
78(average mode)	2478	54.63	35.51	90.14	---	---	10Hz	---
Restricted band	2483.5	5.92	35.51	41.43	---	54	10Hz	Pass


Note:

- ✂ The Spectrum plot of emission level measurement in Restricted band is attached.
- ✂ Emission Level=Spectrum Reading+Correction Factor
- ✂ Correction Factor=Antenna Factor+cable loss–amplifier gain
- ✂ Both Horizontal and Vertical polarizaion have been tested and the worst data is listed above.


**Band Edge measurement for radiated emission in Restricted Band(Radiated)
Peak Mode (Channel 00)**

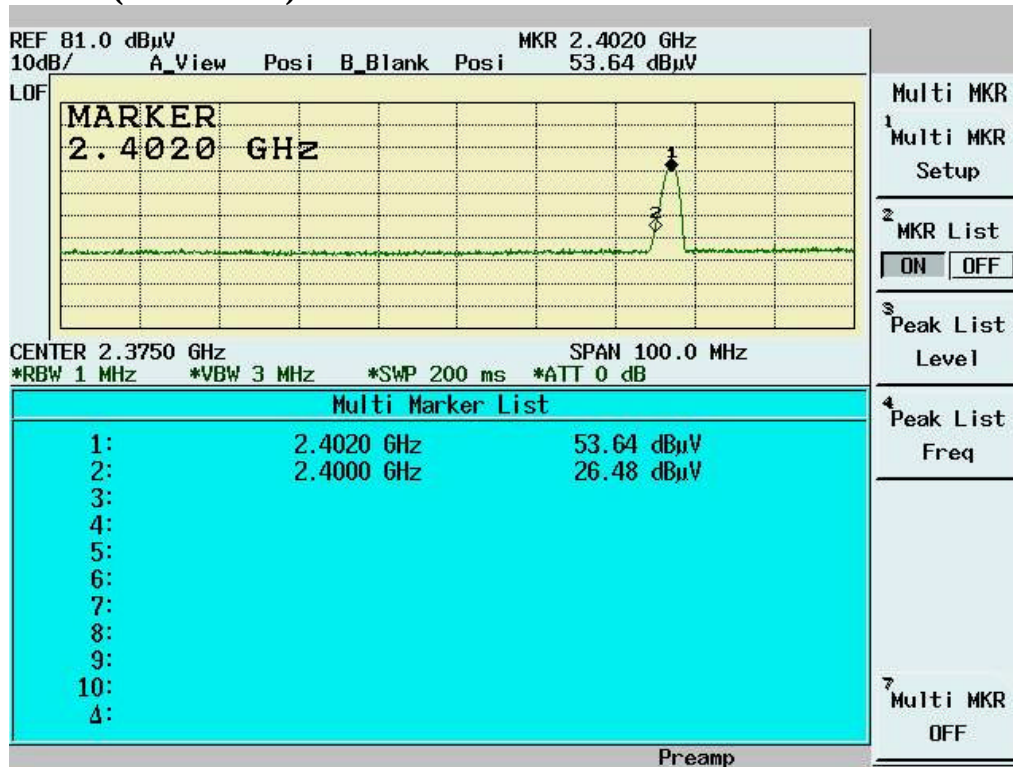


**Band Edge measurement for radiated emission in Restricted Band(Radiated)
Average Mode (Channel 00)**

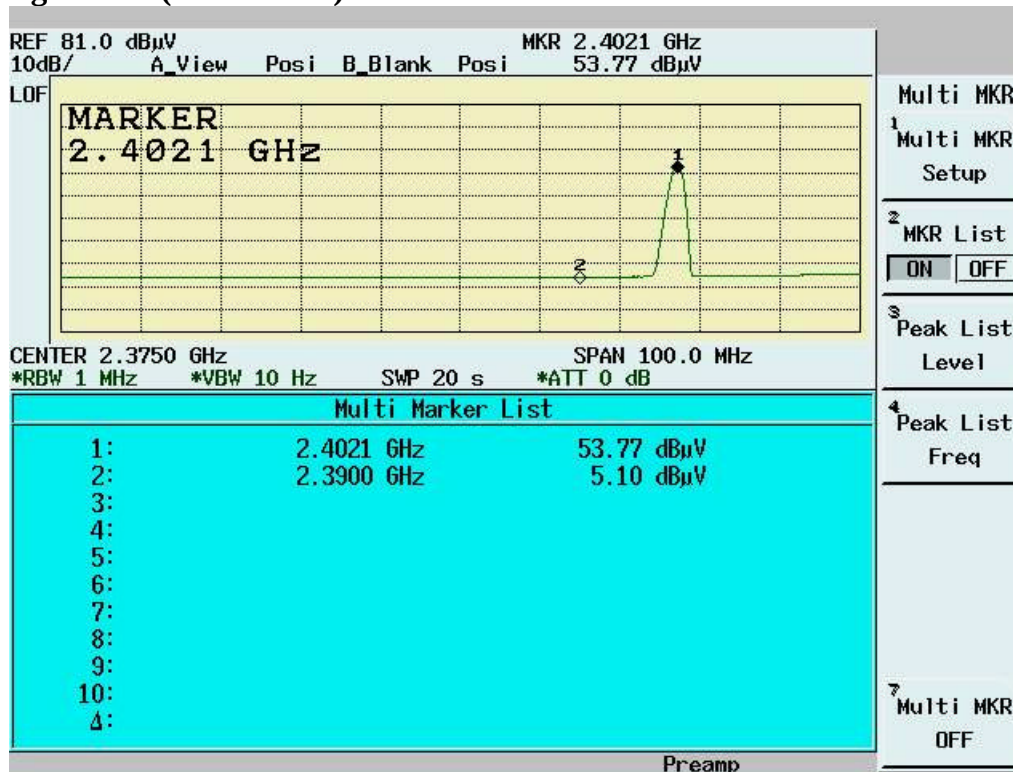

Band Edge measurement for radiated emission in Restricted Band(Radiated) Peak Mode (Channel 78)

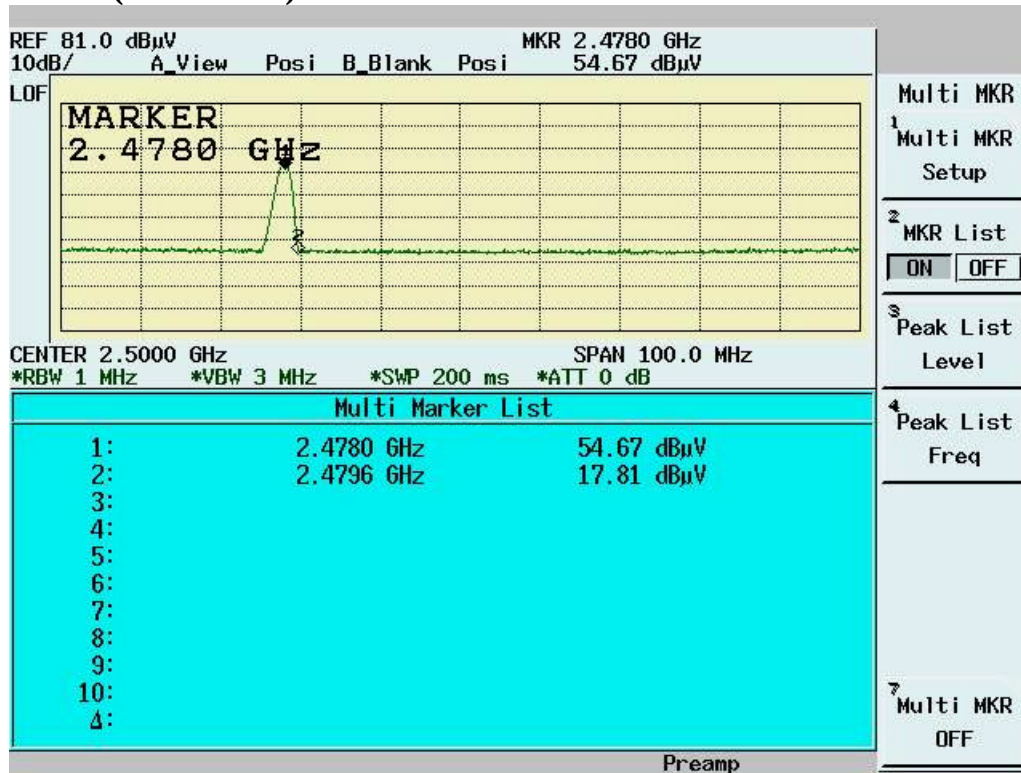

Band Edge measurement for radiated emission in Restricted Band(Radiated) Average Mode (Channel 78)

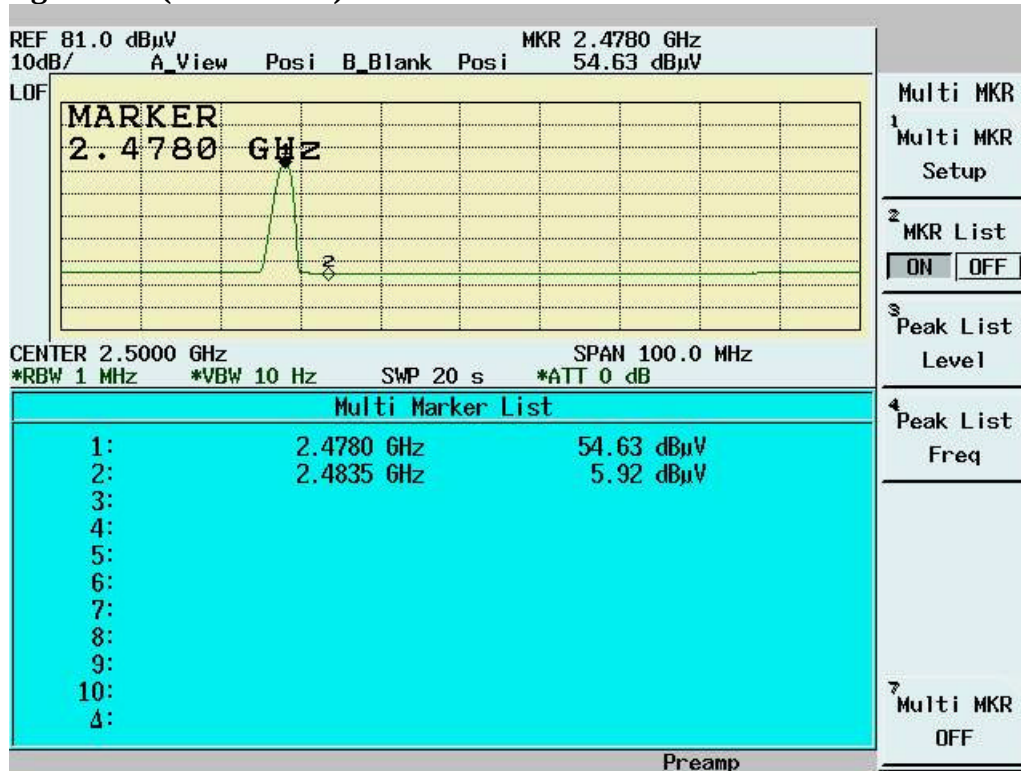

4.5 Bandwidth & Hopping Channel Separation

4.5.1 Standard Applicable

According to §15.247(a)(1), frequency hopping system shall have, hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies.

4.5.2 Test Procedure

Bandwidth Test Procedure


The Transmitter output of EUT was connected to the spectrum analyzer. The 20 dB bandwidth of the fundamental frequency was measured. The setting of spectrum analyzer is as follows

Equipment mode	Spectrum analyzer
Detector function	Peak mode
RBW	30KHz
VBW	100KHz

Hopping Channel Separation Test Procedure

1. Connect EUT antenna terminal to the spectrum analyzer with a low loss cable.
Equipment mode: Spectrum analyzer
RBW: 100KHz
VBW: 300KHz
SPAN:3MHz
2. By using the Max-Hold function record the separation of two adjacent channels.
3. Measure the frequency difference of these two adjacent channels by spectrum analyzer Marker function.
4. Repeat above procedures until all frequencies measured were complete.

4.5.3 Test Setup

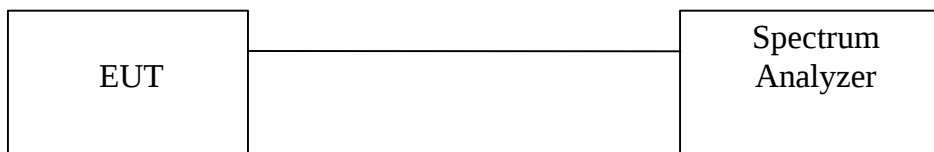

4.5.4 Test Data

20dB Bandwidth

Temp. (deg. C): 19

Test Engr: Mailes Hsieh Humidity (%): 43

Chennel	Frequency (MHz)	20dB Bandwidth (KHz)	Limit (KHz)	Pass/Fail
00	2402	840	1000	Pass
39	2441	844	1000	Pass
78	2480	836	1000	Pass

Hopping Channel Separation

Temp. (deg. C): 19

Test Engr: Mailes Hsieh Humidity (%): 43

Chennel	Frequency (MHz)	Separation (KHz)	Limit (KHz)	Pass/Fail
00	2402	1002	840	Pass
39	2441	999	844	Pass
78	2480	999	836	Pass


20dB Bandwidth Channel 00:



20dB Bandwidth Channel 39:



20dB Bandwidth Channel 78:

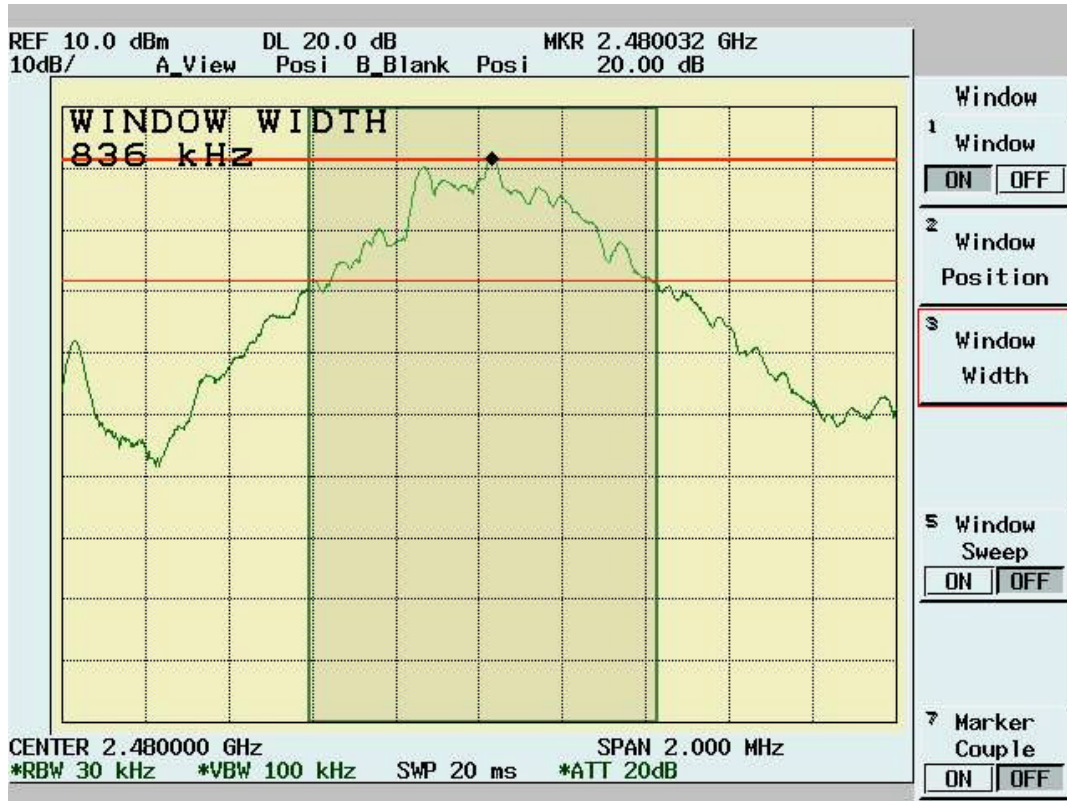

Hopping Channel Separation Channel 00



Hopping Channel Separation Channel 39



Hopping Channel Separation Channel 78



4.6 Number of Hopping Frequency Used

Test Procedure

1. Connect EUT antenna terminal to the spectrum analyzer with a low loss cable.
Equipment mode: Spectrum analyzer
RBW: 300KHz
VBW: 1MHz
2. Set the spectrum analyzer on Max-Hold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
3. Repeat above procedures until all frequencies measured were complete.


4.6.1 Test Setup




4.6.2 Test Data

Number of Hopping Frequency Used		
Test result	Limit (KHz)	Pass/Fail
79	>75	Pass

2400~2405MHz

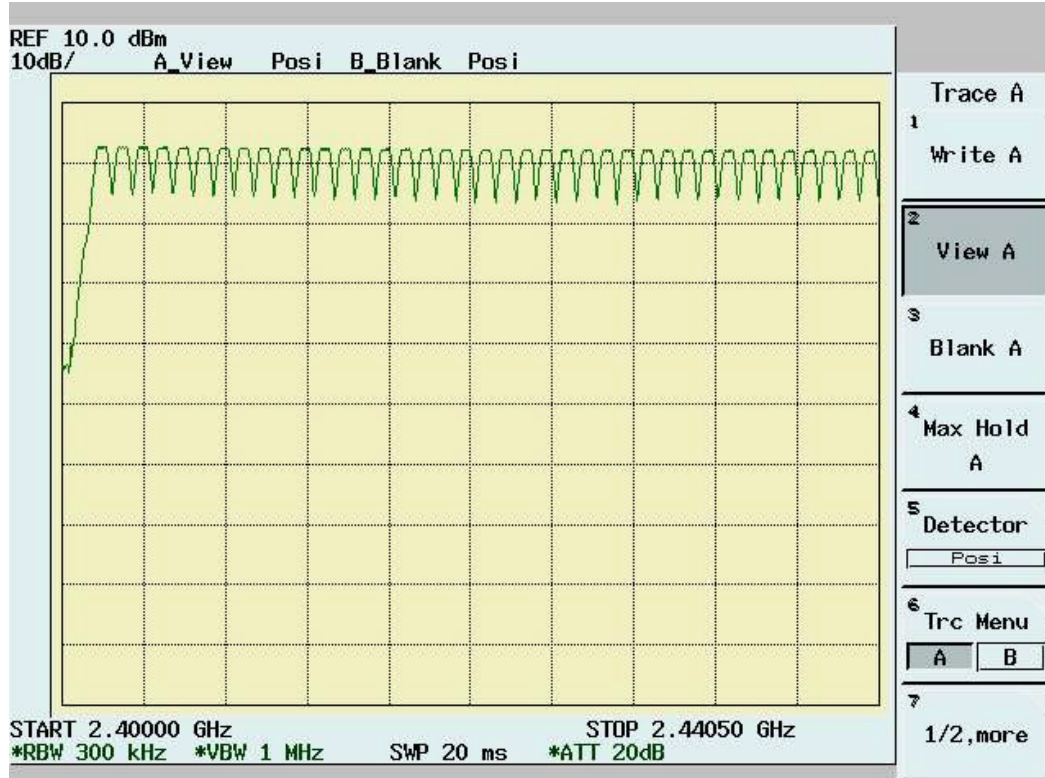

2405~2482MHz

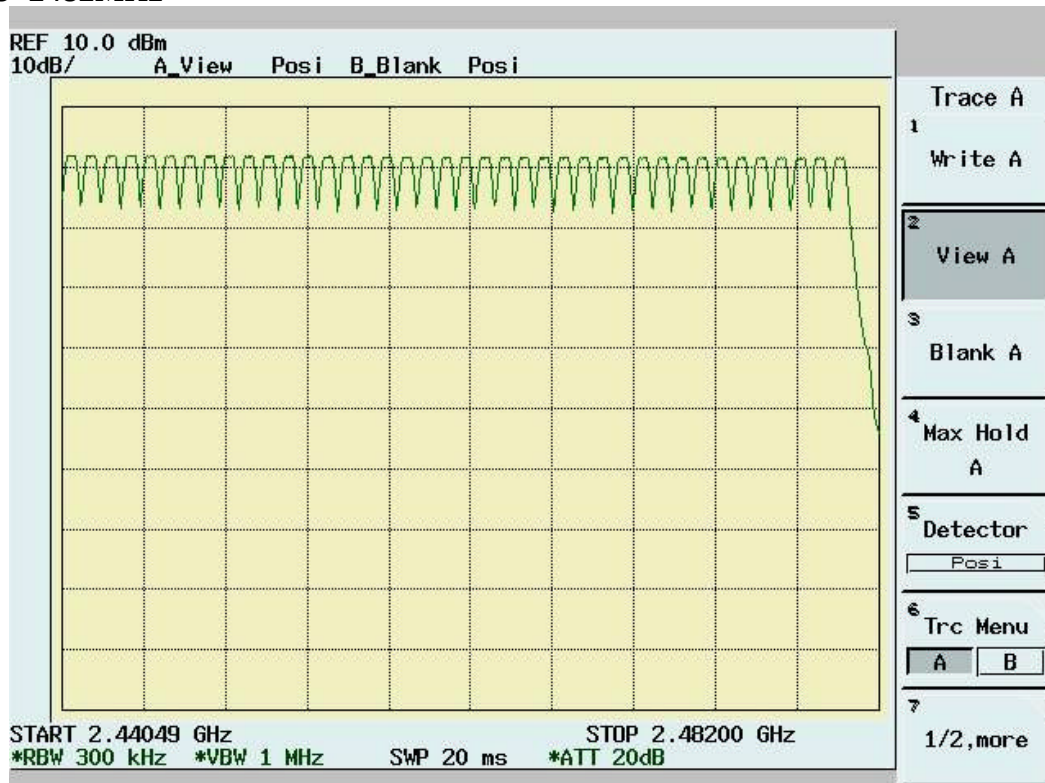

4.7 Dwell Time

4.7.1 Test Procedure

- 1 Connect EUT antenna terminal to the spectrum analyzer with a low loss cable.
Equipment mode: Spectrum analyzer
RBW: 1MHz
VBW: 1MHz
SPAN: Zero Span
- 2 Adjust the center frequency of spectrum analyzer on any frequency be measured.
- 3 Measure the Dwell Time by spectrum analyzer Marker function.
- 4 Repeat above procedures until all frequencies measured were complete.

4.7.2 Test Setup



4.7.3 Test Data

Dwell Time

Temp. (deg. C): 19

Test Engr:

Mailes Hsieh


Humidity (%): 43

Chennel	Frequency (MHz)	Spectrum Reading (μs)	Test Result (ms)	Limit (ms)	Pass/Fail
00	2402	476	304.59	< 400	Pass
39	2441	474	303.31	< 400	Pass
78	2480	470	300.75	< 400	Pass

Note:

1. $1600(\text{times})/79(\text{channel})(\text{sec})=20.25(\text{times})/(\text{channel})(\text{sec})$, $79 \times 0.4(\text{sec})=31.6(\text{sec})$, $20.25 \times 31.6=639.9(\text{times})$


Channel 00

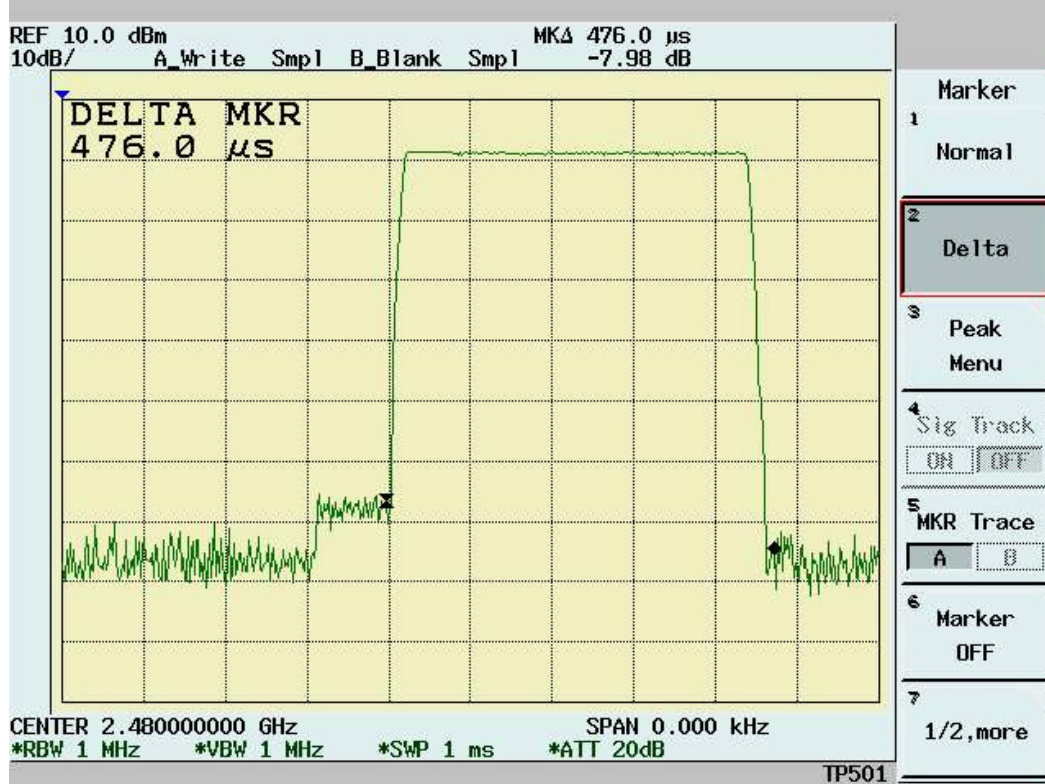

Channel 39



Channel 78

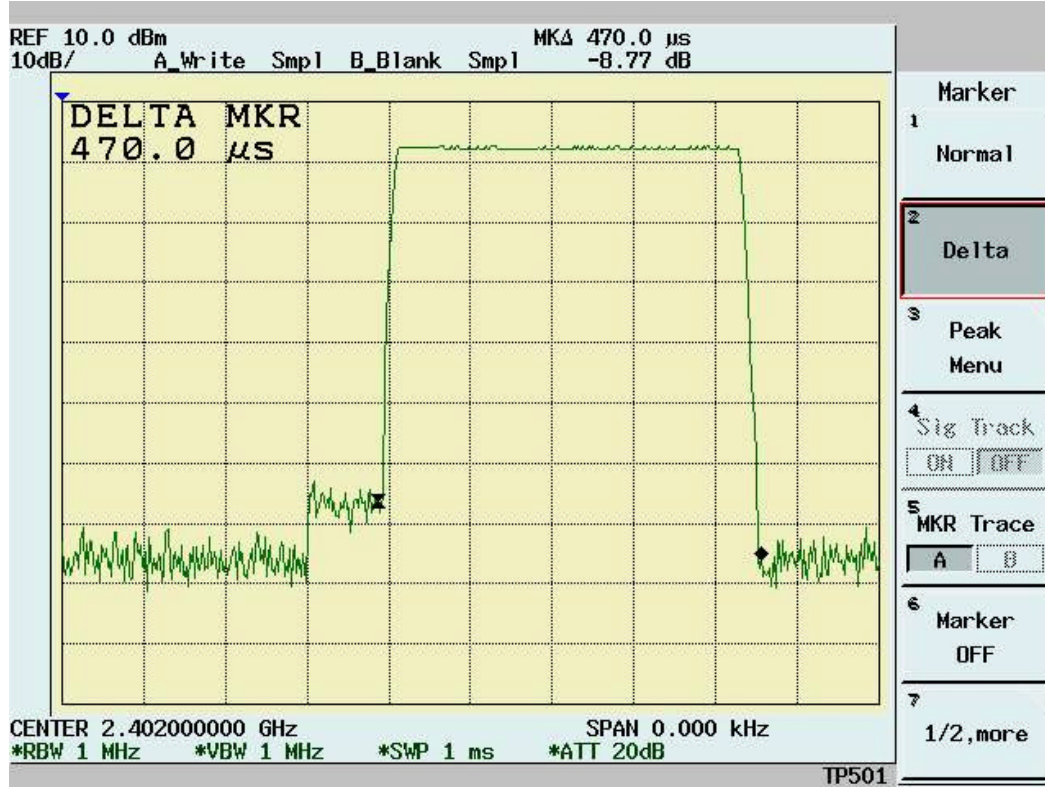

International Standards Laboratory

Report Number: 05LR007FC

HC LAB:NVLAP:200234-0;VCCI: R-341,C-354;NEMKO:ELA 113a,113c;BSMI:SL2-IN-E-0037;SL2-R1-E-0037;CNLA:1178
LT LAB:NVLAP:200234-0;VCCI: R-1435,C-1440;NEMKO:ELA 113b,113d;BSMI:SL2-IN-E-0013;CNLA:0997

5. Appendix

5.1 Appendix A: Measurement Procedure for Power line Conducted Emissions

The measurements are performed in a 3.5m x 3.4m x 2.5m shielded room, which referred as Conduction 01 test site, or a 3m x 3m x 2.3m test site, which referred as Conduction 02 test site. The EUT was placed on non-conduction 1.0m x 1.5m table, which is 0.8 meters above an earth-grounded.

Power to the EUT was provided through the LISN which has the Impedance (50ohm/50uH) vs. Frequency Characteristic in accordance with the required standard. Power to the LISNs were filtered to eliminate ambient signal interference and these filters were bonded to the ground plane. Peripheral equipment required to provide a functional system (support equipment) for EUT testing was powered from the second LISN through a ganged, metal power outlet box which is bonded to the ground plane at the LISN.

If the EUT is supplied with a flexible power cord, the power cord length in excess of the distance separating the EUT from the LISN shall be folded back and forth at the center of the lead so as to form a bundle not exceeding 40cm in length. If the EUT is provided with a permanently coiled power cord, bundling of the cord is not required. If the EUT is supplied without a power cord, the EUT shall be connected to the LISN by a power cord of the type specified by the manufacturer which shall not be longer than 1 meter. The excess power cord shall be bundled as described above. If a non-flexible power cord is provided with the EUT, it shall be cut to the length necessary to attach the EUT to the LISN and shall not be bundled.

The interconnecting cables were arranged and moved to get the maximum emission. Both the line of power cord, hot and neutral, were measured.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

5.2 Appendix B: Test Procedure for Radiated Emissions

Preliminary Measurements in the Anechoic Chamber

The radiated emissions are initially measured in the anechoic chamber at a measurement distance of 3 meters. Desktop EUT are placed on a wooden stand 0.8 meter in height. The measurement antenna is 3 meters from the EUT. The test setup in anechoic chamber is the same as open site. The turntable rotated 360°C. The antenna height is varied from 1-2.5m. The primary objective of the radiated measurements in the anechoic chamber is to identify the frequency spectrum in the absence of the electromagnetic environment existing on the open test site. The frequencies can then be pre-selected on the open test site to obtain the corresponding amplitude. The initial scan is made with the spectrum analyzer in automatic sweep mode. The spectrum peaks are then measured manually to determine the exact frequencies.

Measurements on the Open Site or 10m EMC Chamber

The radiated emissions test will then be repeated on the open site or 10m EMC chamber to measure the amplitudes accurately and without the multiple reflections existing in the shielded room. The EUT and support equipment are set up on the turntable of one of the 3 or 10 meter open field sites. Desktop EUT are set up on a wooden stand 0.8 meter above the ground.

For the initial measurements, the receiving antenna is varied from 1-4 meter height and is changed in the vertical plane from vertical to horizontal polarization at each frequency. Both reading are recorded with the quasi-peak detector with 120KHz bandwidth. For frequency between 30 MHz and 1000MHz, the reading is recorded with peak detector or quasi-peak detector. For frequency above 1 GHz, the reading is recorded with peak detector or average detector with 1 MHz bandwidth.

At the highest amplitudes observed, the EUT is rotated in the horizontal plane while changing the antenna polarization in the vertical plane to maximize the reading. The interconnecting cables were arranged and moved to get the maximum emission. Once the maximum reading is obtained, the antenna elevation and polarization will be varied between specified limits to maximize the readings.

5.3 Appendix C: Test Equipment

5.3.1 Test Equipment List

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Conduction	Coaxial Cable 1F-C2	Harbourindustries	RG400	1F-C2	06/02/2004	06/02/2005
Conduction	Digital Hygro-Thermometer Conduct	MicroLife	HT-2126G	ISL-Conductio n02	11/30/2004	11/30/2005
Conduction	EMI Receiver 02	HP	85460A	3448A00183	10/01/2004	10/01/2005
Conduction	LISN 01	R&S	ESH2-Z5	890485/013	04/29/2004	04/29/2005
Conduction	LISN 06	R&S	ESH3-Z5	828874/009	12/18/2004	12/18/2005
Radiation	BILOG Antenna 08	Schaffner	CBL6112B	2756	06/02/2004	06/02/2005
Radiation	Coaxial Cable Chmb 02-10M	Belden	RG-8/U	Chmb 02-10M	11/16/2004	11/16/2005
Radiation	Digital Hygro-Thermometer Chmb 02	MicroLife	HT-2126G	Chmb 02	11/30/2004	12/30/2005
Radiation	EMI Receiver 03	HP	85460A	3448A00209	01/08/2005	01/08/2006
Radiation	Spectrum Analyzer 13	Advantest	R3132	121200411	02/16/2005	02/16/2006
Radiation	Horn Antenna 02	Com-Power	AH-118	10088	02/17/2005	02/17/2006
Radiation	Horn Antenna 04	Com-Power	AH-826	081-001	01/13/2005	01/13/2006
Radiation	Microwave Cable RF SK-01	HUBER+SUHNERAG.	Sucoflex 102	22139 /2	07/07/2004	07/07/2005
Chamber 05	Peak Power Analyzer	HP	8990A	3621A01269	02/15/2005	02/15/2006
Chamber 05	Power Sensor Radar	HP	84815A	3318A01828	02/15/2005	02/15/2006
Radiation	Preamplifier 02	MITEQ	AFS44-001026 50-40-10P-44	728229	01/28/2005	01/28/2006
Radiation	Preamplifier 10	MITEQ	JS-26004000-2 7-5A	818471	02/28/2005	02/28/2006
Radiation	High Pass Filter 01	HEWLETT-PACKARD	84300-80038	001	N/A	N/A
Radiation	High Pass Filter 02	HEWLETT-PACKARD	84300-80039	005	N/A	N/A
Radiation	Spectrum Analyzer 14	Advantest	R3182	140600028	09/09/2004	09/09/2006


Note: Calibration is traceable to NIST or national or international standards.

5.3.2 Software for Controlling Spectrum/Receiver and Calculating Test Data


Radiation/Conduction	Filename	Version	Issued Date
Conduction	Tile.exe	1.12E	7/7/2000
Radiation	Tile.exe	1.12C	6/16/2000

5.4 Appendix D: Layout of EUT and Support Equipment

5.4.1 General Conducted Test Configuration

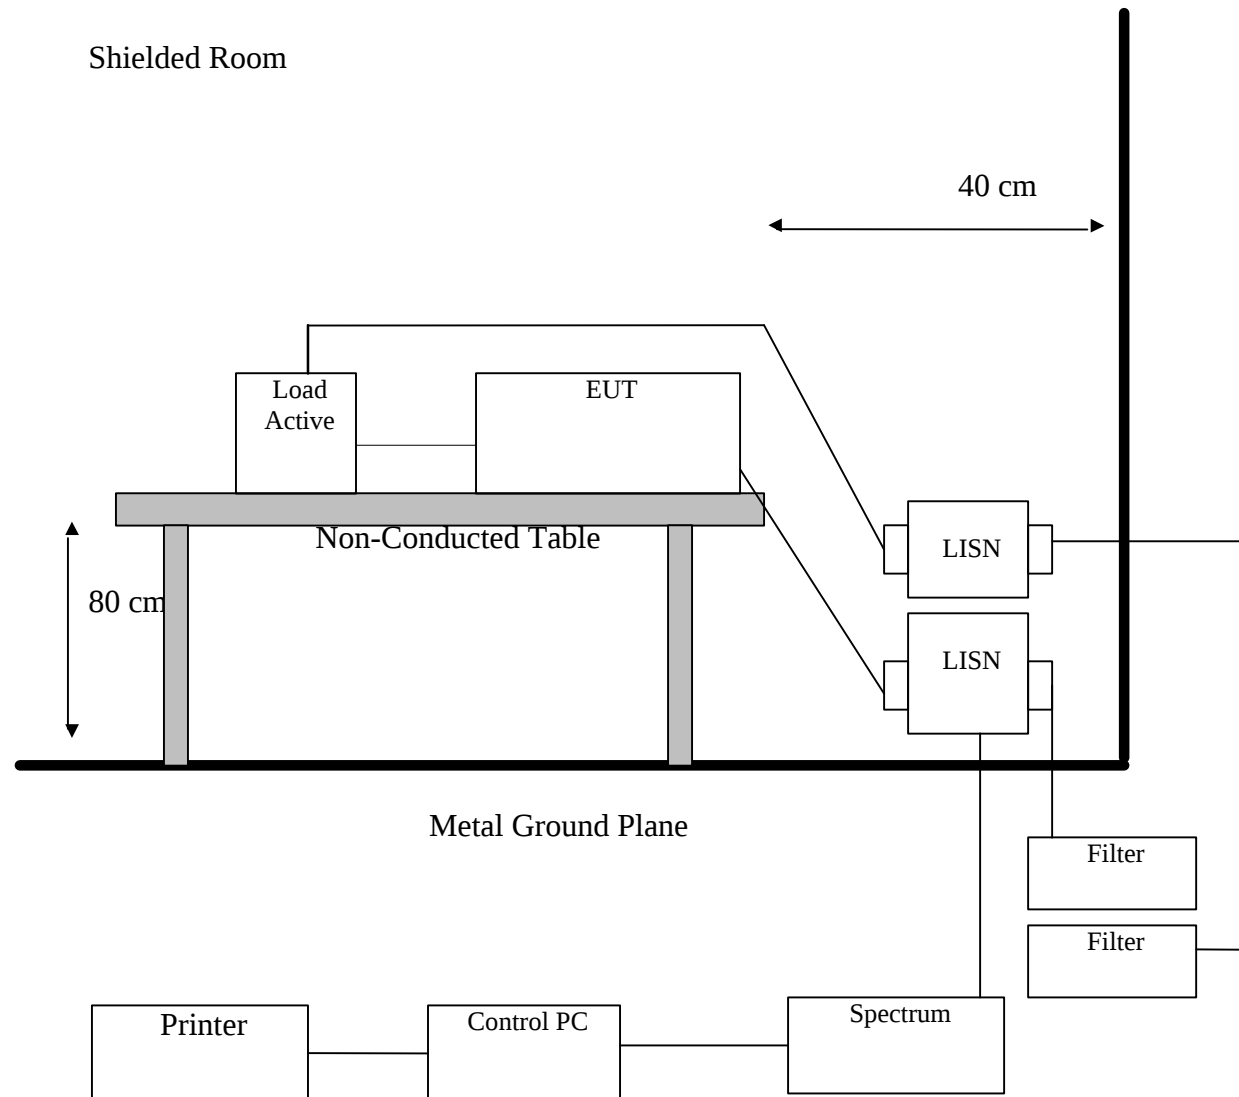

5.4.2 General Radiation Test Configuration

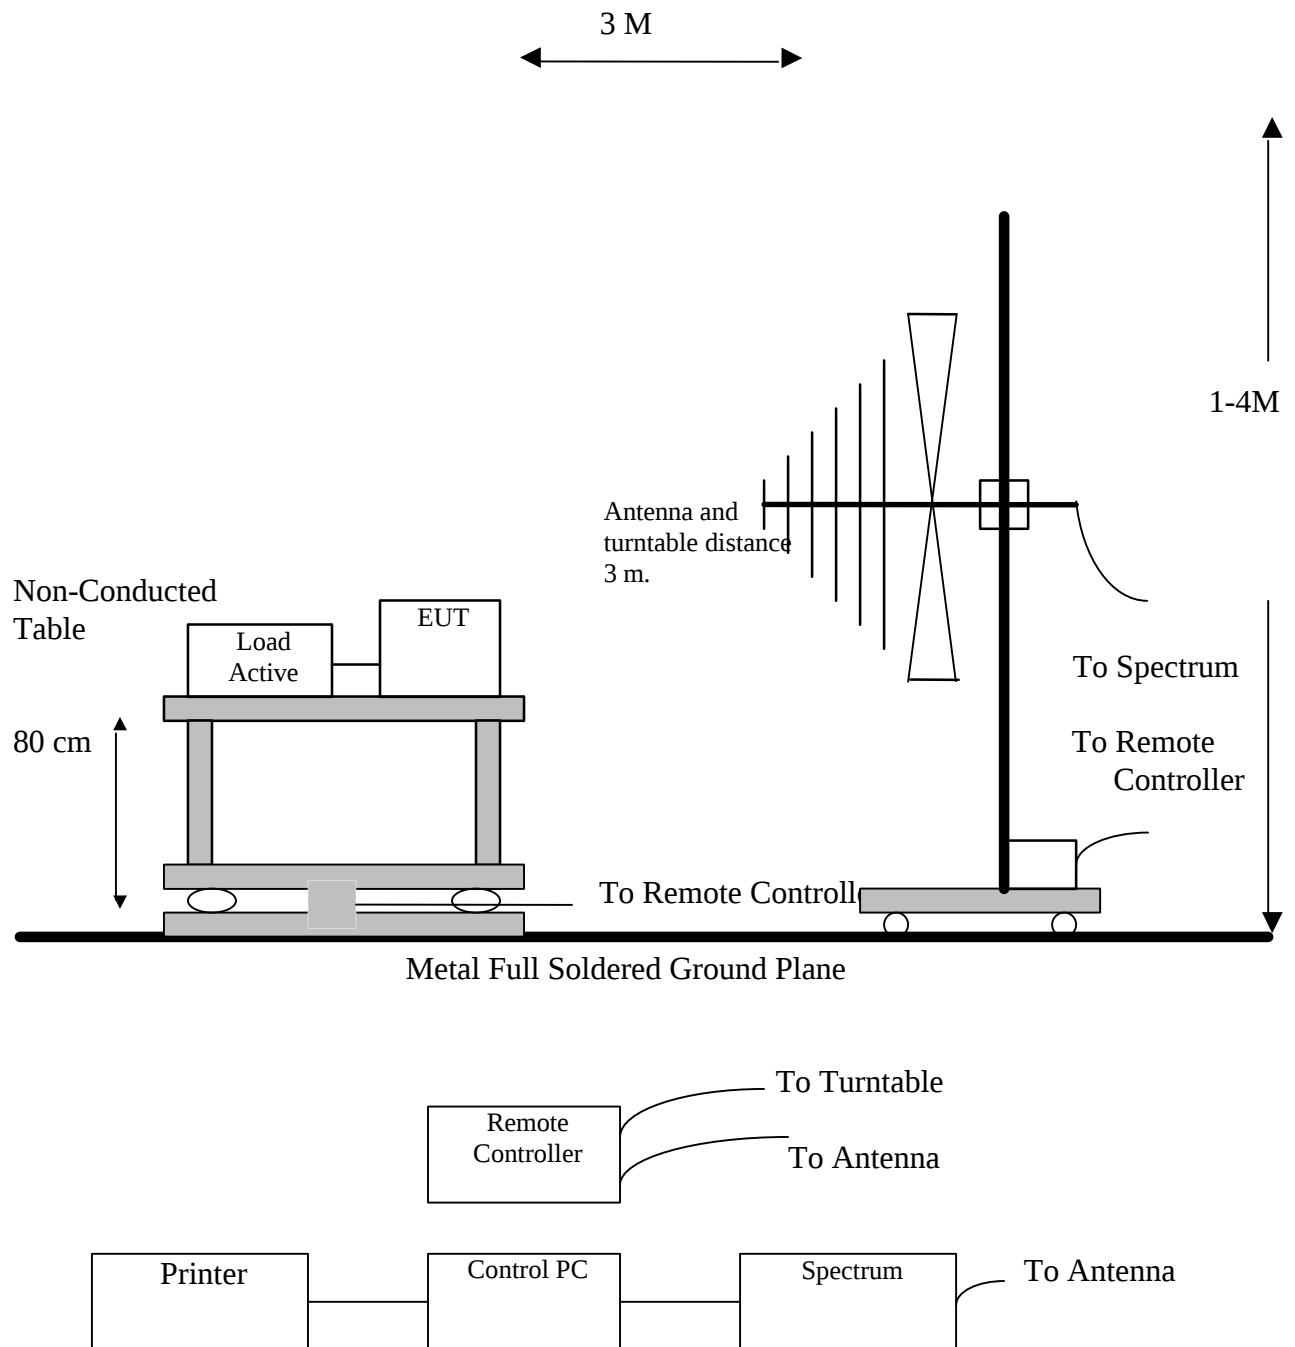

5.5 Appendix E: Description of Support Equipment

5.5.1 Description of Support Equipment

Support Unit 1.

Description:	DELL USB Mouse
Model Number:	M-UR69
Serial Number:	LNA24412741
Power Supply Type:	N/A
Power Cord:	N/A
FCC ID:	N/A (Comply with FCC DOC)

Support Unit 2.

Description:	Acer Monitor
Model:	G781
Serial Number:	999007101214400445T7AA31T
Power Cord:	Non-shielded, Detachable
FCC ID:	(Comply with FCC Standards)

Support Unit 3.

Description:	DELL Notebook Personal Computer
Model:	Latitude D400
Serial Number:	N/A
CPU:	Pentium M- 1.5GHz(FSB 400 MHz)
A/C Adapter Type:	LITEON 65W (Model PA-1650-05D) 3 Pins
Hard Disk Driver:	Toshiba (Model: MK4019GAX) 40 GB
MDC Modem:	Conexant (Model: RD01-D480)
VGA Connector:	One 15 Pins
Serial Connector:	One 9 Pins
RJ11 Connector:	One 2 Pins
RJ45 Connector:	One 8 Pins
USB Connector:	Two 4 Pins
1394 Connector:	One 4 Pins
Smart Card Slot:	One
PCMCIA Slot:	One
Earphone Port:	One
Microphone Port:	One
Power In Port:	One
Battery:	Sanyo 6-cell (Model: 6T087)
RAM:	Nanya DDR 256MB x 1
LCD Panel and Inverter:	Toshiba 12.1" XGA (Model: LTM12C505D) ; RICOH KEIKI Inverter (Model: K3E19T5 0090)
Power Cord:	Non-shielded, Detachable

5.5.2 Software for Controlling Support Unit

Test programs exercising various part of EUT were used. The programs were executed as follows:

- A. Read and write to the disk drives.
- B. Send H pattern to the video port device (Monitor).
- C. The RF software makes the transmitter continuously sending RF signals
- D. Repeat the above steps.

	Filename	Issued Date
Bluetooth Test Utility	BlueSuiteCasira_v1.18.exe	2003/02/20
Monitor	HH.bat	8/20/1991

5.5.3 I/O Cable Condition of EUT and Support Units

Description	Path	Cable Length	Cable Type	Connector Type
AC Power Cord	110V (~240V) to AC Power Cord Inlet (3-pin)	1.8M	Nonshielded, Detachable	Plastic Head
Monitor Data Cable	Monitor to PC VGA port	1.6M	Shielded, Un-detachable	Metal Head
Mouse Data Cable	Mouse to PC Mouse port	1.8M	Shielded, Un-detachable	Metal Head

5.6 Appendix F: Accuracy of Measurement

Test Site: Conduction 02

Item	Source of Uncertainty	Probability Distribution	Total Uncertainties (dB)		Standard Uncertainty (dB)	
1	Systematic Effects: (Assessment from 20 repeat observation; 1 reading on EUT)	Normal	k=2	0.104	k=1	0.052
2	Random Effects: (Assessment from 20 random observations; 1 reading on EUT)	Normal	k=2	0.330	k=1	0.165
3	Receiver Calibration	Rectangular	k=1.73	1.000	k=1	0.577
4	LISN Factor Calibration	Normal	k=2	1.200	k=1	0.600
5	Cable Loss Calibration	Normal	k=2	1.000	k=1	0.500
6	Combined Standard Uncertainty $U_c(y)$	Normal			k=1	0.850
7	Total Uncertainty @95% min. Confidence Level	Normal	k=2	1.701		

Measurement Uncertainty Calculations:

$$U_c(y) = \text{square root} (u_1(y)^2 + u_2(y)^2 + \dots + u_n(y)^2)$$

$$U = 2 * U_c(y)$$

Note: The measurement Uncertainties mentioned above also refer to NIS 81-1994 of NAMAS :
The treatment of Uncertainty in EMC Measurement.

Test Site: Chamber 02-3M

Item	Source of Uncertainty	Probability Distribution	Total Uncertainties (dB)		Standard Uncertainty (dB)	
1	Systematic Effects: (Assessment from 20 repeat observation; 1 reading on EUT)	Normal	k=2	0.067	k=1	0.034
2	Random Effects: (Assessment from 20 random observations; 1 reading on EUT)	Normal	k=2	0.103	k=1	0.052
3	Receiver Calibration	Rectangular	k=1.73	1.000	k=1	0.577
4	Antenna Factor Calibration	Normal	k=2	1.700	k=1	0.850
5	Cable Loss Calibration	Normal	k=2	1.000	k=1	0.500
6	Combined Standard Uncertainty Uc(y)	Normal			k=1	1.029
7	Total Uncertainty @95% mim. Confidence Level	Normal	k=2	2.059		

Measurement Uncertainty Calculations:


$$Uc(y) = \text{square root} (u_1(y)^2 + u_2(y)^2 + \dots + u_n(y)^2)$$

$$U = 2 * Uc(y)$$



Note: The measurement Uncertainties mentioned above also refer to NIS 81-1994 of NAMAS :
The treatment of Uncertainty in EMC Measurement.

5.7 Appendix G: Photographs of EUT Configuration Test Set Up


The Front View of Highest Conducted Set-up For EUT

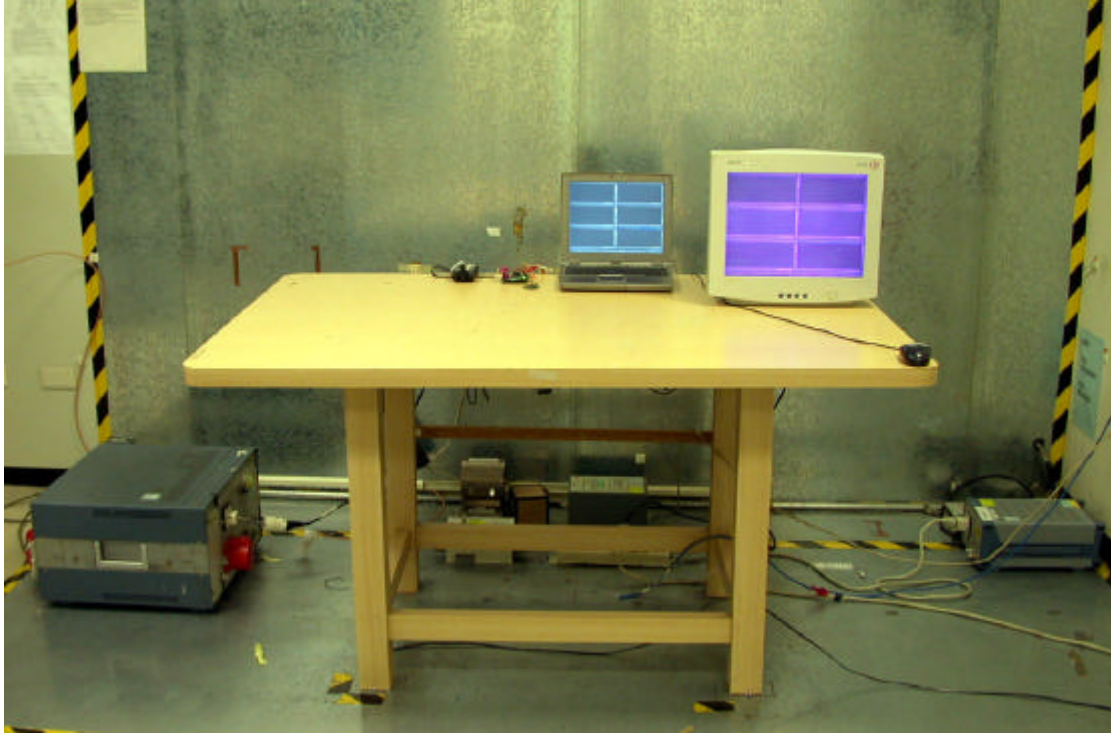


The Back View of Highest Conducted Set-up For EUT

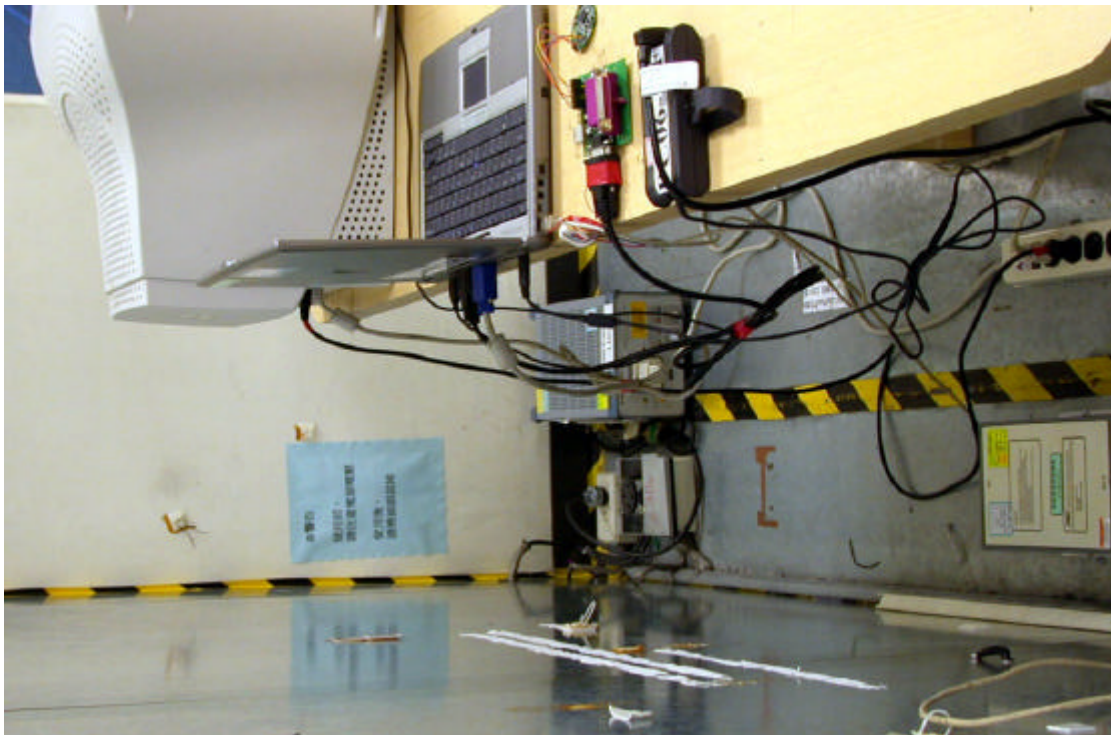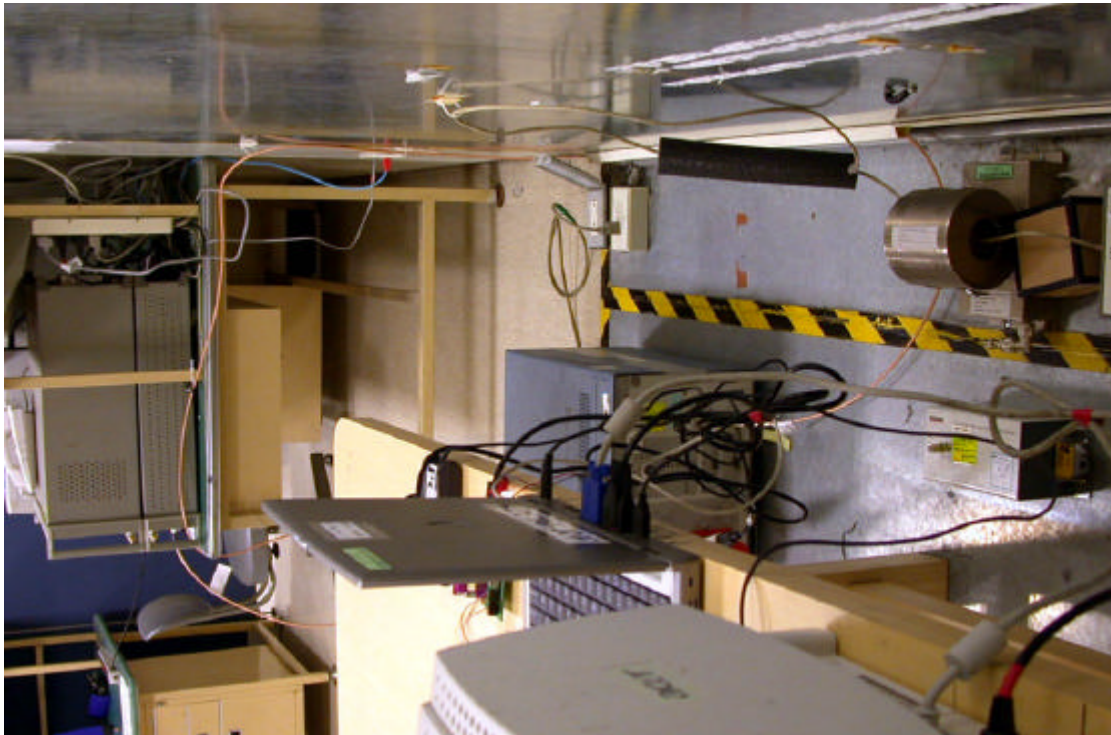

The Front View of Highest Radiated Set-up For EUT

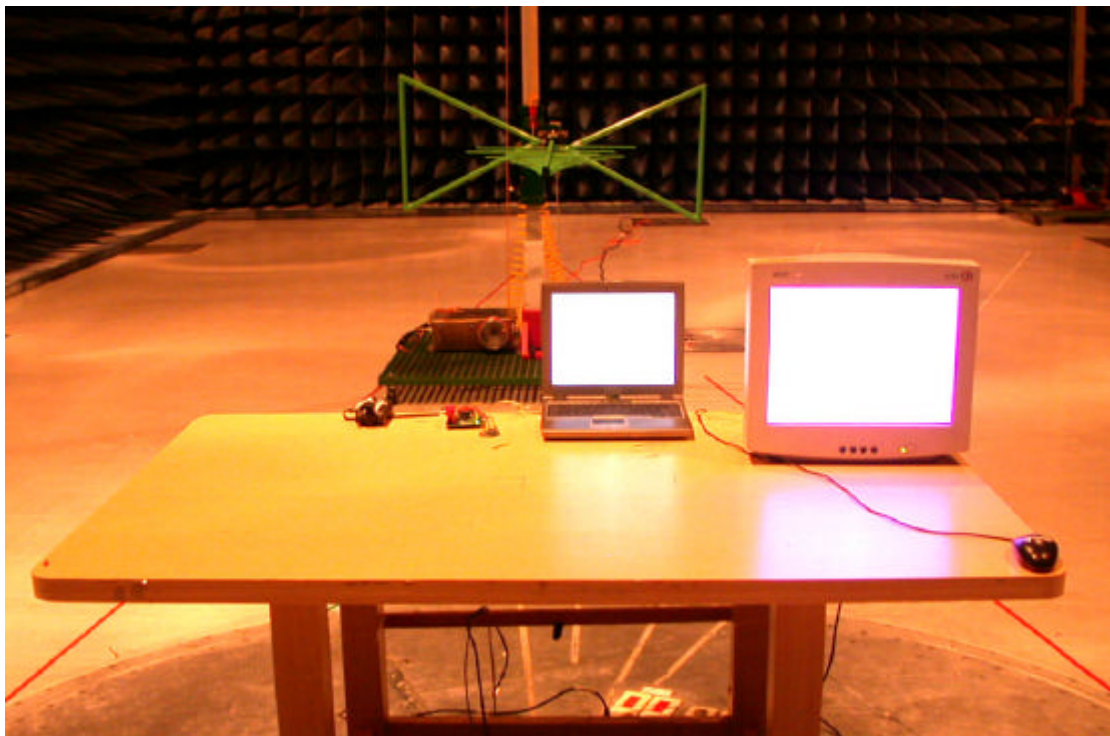

The Back View of Highest Radiated Set-up For EUT

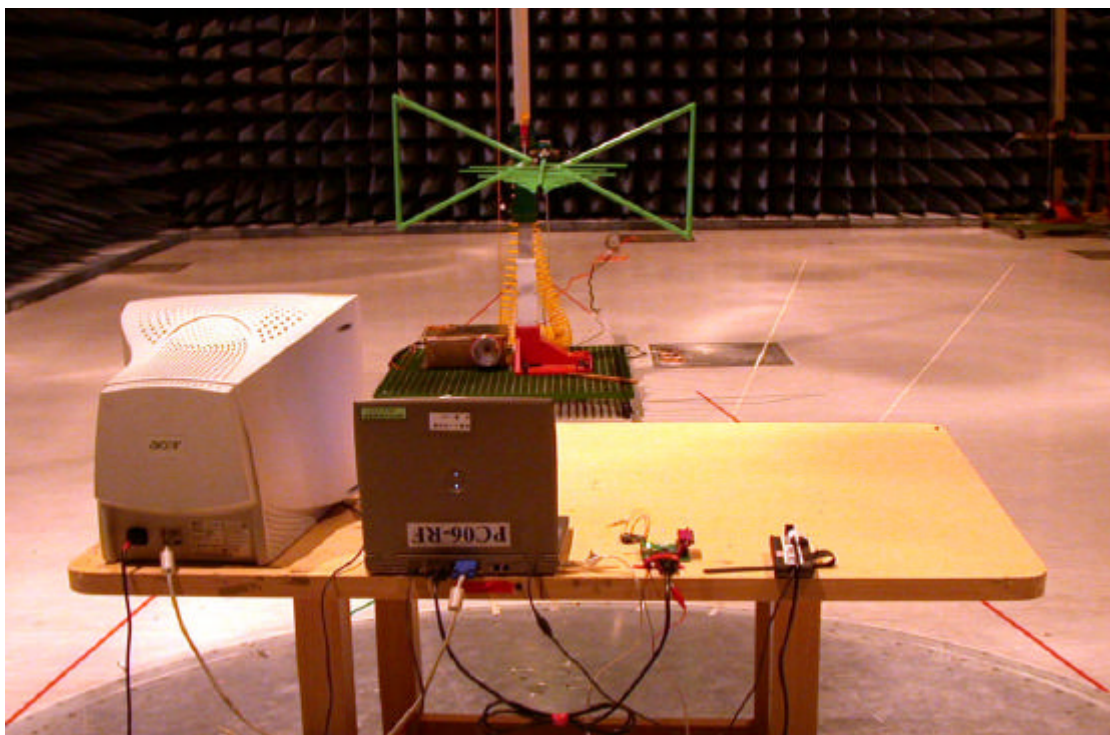

5.8 Appendix H: Antenna Spec.

Please refer to the attached file.