

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)

Report No.: RFBICM-WTW-P25020305-1

FCC ID: S9E-135100

Product: Rugged Controller

Brand: Trimble or



Model No.: 135100

Received Date: 2025/2/12

Test Date: 2025/3/6 ~ 2025/4/10

Issued Date: 2025/5/16

Applicant: Trimble Inc.

Address: 5475 Kellenburger Road, Dayton, Ohio 45424

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

FCC Registration / 198487 / TW2021

Designation Number:

Approved by:

Jeremy Lin

Date:

2025/5/16

Jeremy Lin / Project Engineer

This test report consists of 66 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Annie Chang / Senior Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description	7
3.2 Antenna Description of EUT	8
3.3 Channel List	9
3.4 Test Mode Applicability and Tested Channel Detail	10
3.5 Duty Cycle of Test Signal	11
3.6 Test Program Used and Operation Descriptions	13
3.7 Connection Diagram of EUT and Peripheral Devices	13
3.8 Configuration of Peripheral Devices and Cable Connections	13
4 Test Instruments	14
4.1 RF Output Power	14
4.2 Power Spectral Density	14
4.3 6 dB Bandwidth	14
4.4 Conducted Out of Band Emissions	14
4.5 AC Power Conducted Emissions	15
4.6 Unwanted Emissions below 1 GHz	16
4.7 Unwanted Emissions above 1 GHz	17
5 Limits of Test Items.....	18
5.1 RF Output Power	18
5.2 Power Spectral Density	18
5.3 6 dB Bandwidth	18
5.4 Conducted Out of Band Emissions	18
5.5 AC Power Conducted Emissions	18
5.6 Unwanted Emissions below 1 GHz	19
5.7 Unwanted Emissions above 1 GHz	19
6 Test Arrangements	20
6.1 RF Output Power	20
6.1.1 Test Setup	20
6.1.2 Test Procedure	20
6.2 Power Spectral Density	20
6.2.1 Test Setup	20
6.2.2 Test Procedure	20
6.3 6 dB Bandwidth	21
6.3.1 Test Setup	21
6.3.2 Test Procedure	21
6.4 Conducted Out of Band Emissions	21
6.4.1 Test Setup	21
6.4.2 Test Procedure	21
6.5 AC Power Conducted Emissions	22
6.5.1 Test Setup	22
6.5.2 Test Procedure	22
6.6 Unwanted Emissions below 1 GHz	23
6.6.1 Test Setup	23
6.6.2 Test Procedure	24
6.7 Unwanted Emissions above 1 GHz	25
6.7.1 Test Setup	25
6.7.2 Test Procedure	25
7 Test Results of Test Item	26

7.1	RF Output Power.....	26
7.2	Power Spectral Density	30
7.3	6 dB Bandwidth	33
7.4	Conducted Out of Band Emissions	35
7.5	AC Power Conducted Emissions	43
7.6	Unwanted Emissions below 1 GHz	47
7.7	Unwanted Emissions above 1 GHz.....	49
8	Pictures of Test Arrangements	65
9	Information of the Testing Laboratories	66

Release Control Record

Issue No.	Description	Date Issued
RFBICM-WTW-P25020305-1	Original release.	2025/5/16

1 Certificate

Product: Rugged Controller

Brand: Trimble or 

Test Model: 135100

Sample Status: Engineering sample

Applicant: Trimble Inc.

Test Date: 2025/3/6 ~ 2025/4/10

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)

Measurement procedure: ANSI C63.10-2013
KDB 558074 D01 15.247 Meas Guidance v05r02
KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Standard / Clause	Test Item	Result	Remark
15.247(b)	RF Output Power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
15.247(d)	Conducted Out of Band Emissions	Pass	Meet the requirement of limit.
15.207	AC Power Conducted Emissions	Pass	Minimum passing margin is -12.24 dB at 0.53383 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -6.9 dB at 213.34 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -0.4 dB at 2390.00 MHz and 2483.50 MHz
15.203	Antenna Requirement	Pass	Antenna connector is ipex 4 not a standard connector.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Specification	Uncertainty (±)
RF Output Power	-	1.1 dB
Power Spectral Density	-	1.3 dB
6 dB Bandwidth	-	960 Hz
Conducted Out of Band Emissions	9 kHz ~ 40 GHz	2.7 dB
AC Power Conducted Emissions	9 kHz ~ 30 MHz	2.9 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	2.55 dB
	30 MHz ~ 1 GHz	5.77 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 6 GHz	4.71 dB
	6 GHz ~ 18 GHz	5.3 dB
	18 GHz ~ 40 GHz	4.98 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description

Product	Rugged Controller
Brand	Trimble or 
Test Model	135100
Host Marketing Name (HMN)	Rugged Controller
Status of EUT	Engineering sample
Power Supply Rating	7.26Vdc from battery 5.0Vdc from adapter or host equipment
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in VHT mode 1024QAM for OFDMA in 11ax mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	Up to 573.5 Mbps
Operating Frequency	2.412 GHz ~ 2.462 GHz
Number of Channel	802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 11 802.11n (HT40), VHT40, 802.11ax (HE40): 7
Output Power	614.074 mW (27.88 dBm)

Note:

1. The EUT uses following accessories.

Item	Brand	Model	Specification
USB-C Cable	Trimble	140100-00	1.95m, type C to type C, shielded
Touch Pen	Trimble	122338	-
Adapter(Optional)	FULLPOWER	TYPE-C45IC	Input Power: 100-240Vac, 50/60Hz, 1.3A Output Power: 5.0V=3.0A/9.0V=3.0A/12.0V=3.0A, 15.0V=3.0A/20.0V=2.25A 45.0W

2. The EUT consumes power from the following battery:

Item	Brand	Model No.	Specification
Battery	ETICA Battery Inc.	SGB-02	7.26V, 32.67Wh, 4500mAh

3. There are WWAN, WLAN, Bluetooth & NFC technology used for the EUT.

4. Contain FCC ID: S9E-N7NEM75T.

5. Simultaneously transmission combination.

Combination	Technology			
1	WWAN	WLAN 2.4GHz (MIMO)	-	NFC
2	WWAN	WLAN 2.4GHz (Main)	BT (Aux)	NFC
3	WWAN	WLAN 5GHz (MIMO)	BT (Aux)	NFC

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

6. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

RF Chain NO.	Brand	Model	Gain (dBi)	Frequency range	Antenna Type	Connector Type
Main	Pulse	TZ2977E	2.69	2.4~2.4835GHz	PIFA	ipex 4
Aux	Pulse	TZ29770	2.47	2.4~2.4835GHz	PIFA	ipex 4

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a MIMO function:

2.4 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11b	2TX	2RX
802.11g	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
VHT20	2TX	2RX
VHT40	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX

Note: The modulation and bandwidth are similar for 802.11n mode for 20 MHz (40 MHz), VHT mode for 20 MHz (40 MHz) and 802.11ax mode for 20 MHz (40 MHz). Therefore the investigated worst case is the representative mode in test report.

3.3 Channel List

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40), VHT40, 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
3	2422 MHz	7	2442 MHz
4	2427 MHz	8	2447 MHz
5	2432 MHz	9	2452 MHz
6	2437 MHz		

3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	1. EUT can be used in the following ways: X-axis/ Y-axis/ Z-axis. Pre-scan these ways and find the worst case as a representative test condition. 2. For Unwanted Emission below/ above 1 GHz has Battery/ EUT with USB cable(Adapter)/ EUT with USB cable(Laptop) mode of power supply. Pre-scan these modes and find the worst case as a representative test condition.
Worst Case:	1. X-axis/ Y-axis/ Z-axis Worst Condition: X-axis. 2. For Unwanted Emission below/ above 1 GHz Worst Condition: EUT with USB cable(Adapter).

Following channel(s) was (were) selected for the final test as listed below:

Test Item	EUT Configure Mode	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter
RF Output Power	A	802.11b	CDD	1, 6, 11	DBPSK	1Mb/s
		802.11g	CDD	1, 6, 11	BPSK	6Mb/s
		802.11n (HT20)	CDD	1, 6, 11	BPSK	MCS0
		802.11n (HT40)	CDD	3, 6, 9	BPSK	MCS0
		VHT20	CDD	1, 6, 11	BPSK	MCS0
		VHT40	CDD	3, 6, 9	BPSK	MCS0
		802.11ax (HE20)	CDD	1, 6, 11	BPSK	MCS0
		802.11ax (HE40)	CDD	3, 6, 9	BPSK	MCS0
Power Spectral Density	A	802.11b	CDD	1, 6, 11	DBPSK	1Mb/s
		802.11g	CDD	1, 6, 11	BPSK	6Mb/s
		802.11ax (HE20)	CDD	1, 6, 11	BPSK	MCS0
		802.11ax (HE40)	CDD	3, 6, 9	BPSK	MCS0
6 dB Bandwidth / Conducted Out of Band Emissions	A	802.11b	CDD	1, 6, 11	DBPSK	1Mb/s
		802.11g	CDD	1, 6, 11	BPSK	6Mb/s
		802.11ax (HE20)	CDD	1, 6, 11	BPSK	MCS0
		802.11ax (HE40)	CDD	3, 6, 9	BPSK	MCS0
AC Power Conducted Emissions	A	802.11ax (HE20)	CDD	6	BPSK	MCS0
	B	802.11ax (HE20)	CDD	6	BPSK	MCS0
Unwanted Emissions below 1 GHz	A	802.11ax (HE20)	CDD	6	BPSK	MCS0
Unwanted Emissions above 1 GHz	A	802.11b	CDD	1, 6, 11	DBPSK	1Mb/s
		802.11g	CDD	1, 6, 11	BPSK	6Mb/s
		802.11ax (HE20)	CDD	1, 6, 11	BPSK	MCS0
		802.11ax (HE40)	CDD	3, 6, 9	BPSK	MCS0
EUT Configure Mode:	A	EUT with USB cable(Adapter)				
	B	EUT with USB cable(Laptop)				


3.5 Duty Cycle of Test Signal

802.11b: Duty cycle = 0.664 ms / 0.677 ms x 100% = 98.1%


802.11g: Duty cycle = 2.061 ms / 2.076 ms x 100% = 99.3%

802.11ax (HE20): Duty cycle = 5.445 ms / 5.46 ms x 100% = 99.7%

802.11ax (HE40): Duty cycle = 5.445 ms / 5.46 ms x 100% = 99.7%

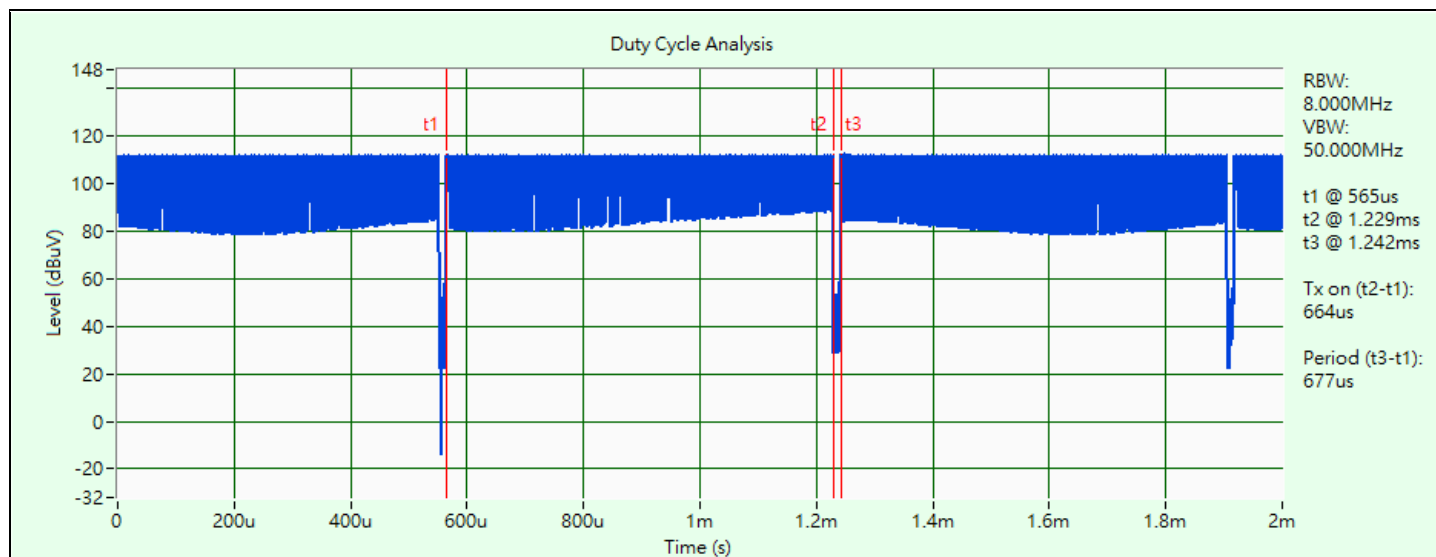


802.11b

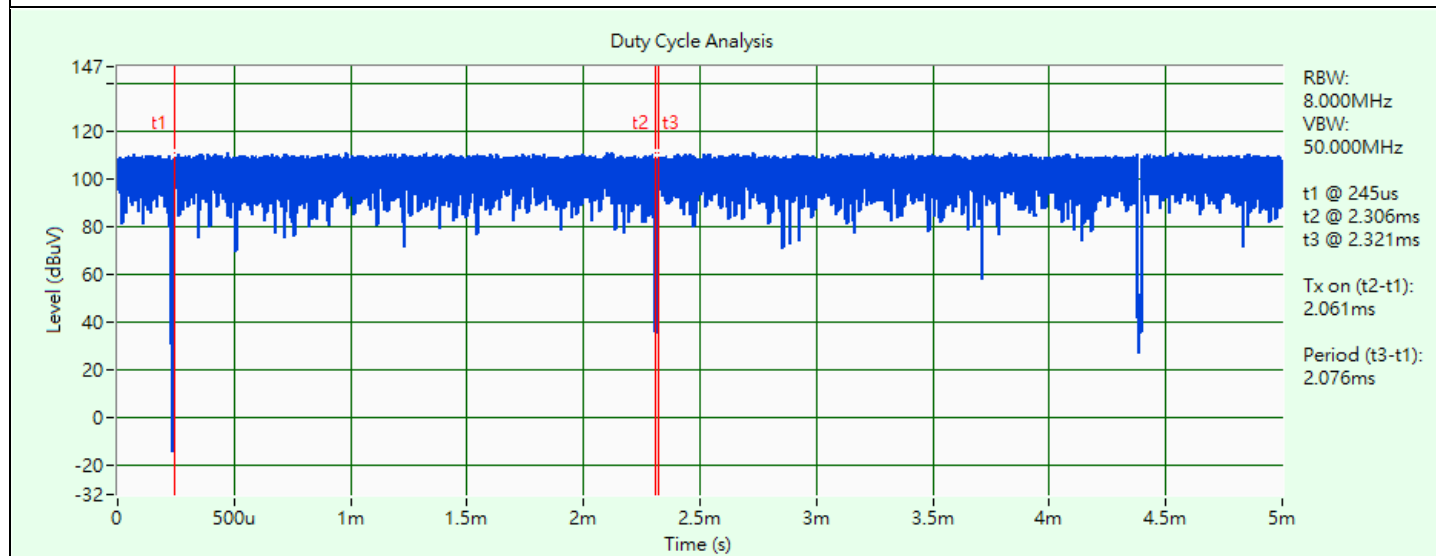


802.11g

Duty Cycle Analysis

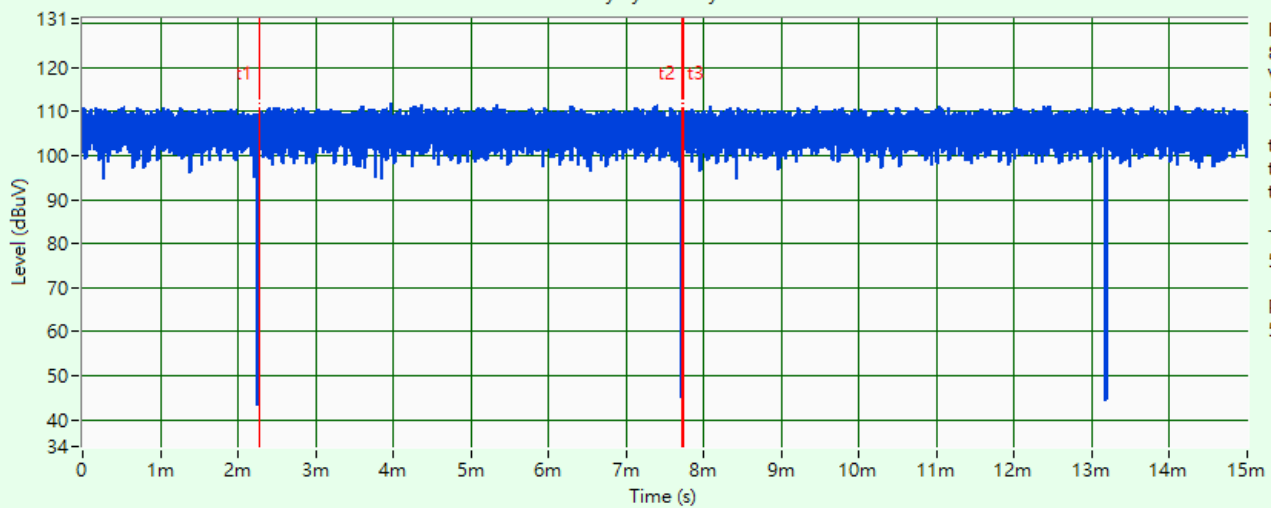

802.11ax (HE20)

Duty Cycle Analysis

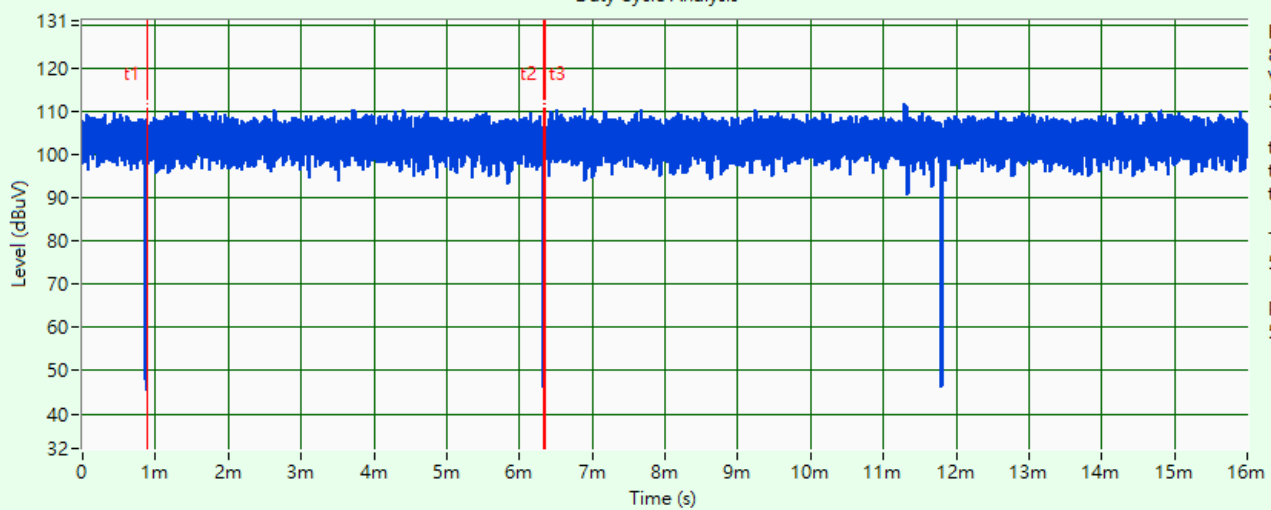


802.11ax (HE40)

3.6 Test Program Used and Operation Descriptions


Controlling software (QRCT v4.0.211) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

Mode A

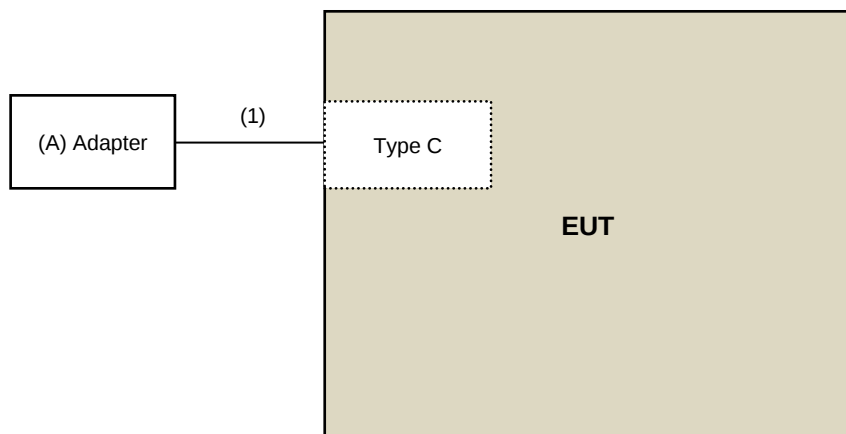

Mode B

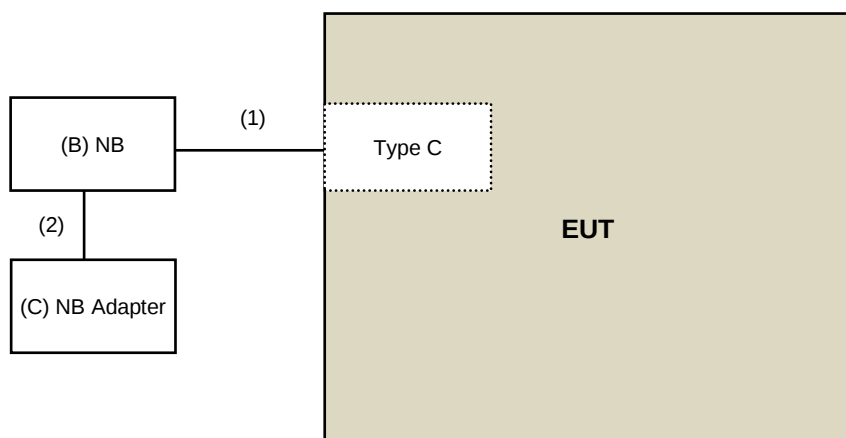

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Adapter	FULLPOWER	TYPE-C451C	N/A	N/A	Supplied by applicant
B	NB	Lenovo	IdeaPad 5 15ITL05	N/A	N/A	Provided by Lab
C	NB Adapter	Lenovo	ADLX65CLGC2A	N/A	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	USB-C Cable	1	1.95	Y	0	Supplied by applicant
2	DC cable	1	1.9	N	0	Provided by Lab

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Pulse Power Sensor Anritsu	MA2411B	0738404	2024/5/13	2025/5/12
RF Power Meter Anritsu	ML2495A	0842014	2024/5/13	2025/5/12
USB Wideband Power Sensor Keysight	U2021XA	U2021XA_001	2024/6/7	2025/6/6
Fixed Attenuator Solvang Technology	STI02-3310-10	STI02-3310-10_013	2024/6/19	2025/6/18

Notes:

1. The test was performed in LK - Oven
2. Tested Date: 2025/4/1

4.2 Power Spectral Density

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
PXA Signal Analyzer Keysight	N9030A	MY54490260	2024/7/17	2025/7/16
Signal Analyzer R&S	FSV40	101042	2024/9/12	2025/9/11
Software	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A
Fixed Attenuator Solvang Technology	STI02-3310-10	STI02-3310-10_013	2024/6/19	2025/6/18

Notes:

1. The test was performed in LK - Oven
2. Tested Date: 2025/4/1

4.3 6 dB Bandwidth

Refer to section 4.2 to get the tested date and information of the instruments.

4.4 Conducted Out of Band Emissions

Refer to section 4.2 to get the tested date and information of the instruments.

4.5 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance LYNICS	0900510	E1-011284	2024/9/16	2025/9/15
		E1-011285	2024/9/25	2025/9/24
EMI Test Receiver R&S	ESR3	102412	2024/12/26	2025/12/25
		102414	2024/12/11	2025/12/10
Fixed Attenuator STI	STI02-2200-10	NO.4	2024/8/30	2025/8/29
High Voltage Probe Schwarzbeck	TK9420	00982	2024/12/6	2025/12/5
Isolation Transformer Erika Fiedler	D-65396	017	2024/9/18	2025/9/17
LISN R&S	ENV216	101196	2024/5/22	2025/5/21
LISN Schwarzbeck	NNLK 8121	8121-731	2024/6/12	2025/6/11
		8121-808	2024/4/26	2025/4/25
	NNLK 8129	8129229	2024/10/14	2025/10/13
	NSLK 8128	8128-244	2024/11/11	2025/11/10
Passive Voltage Probe R&S	ESH2-Z3	100073	2024/5/16	2025/5/15
RF Coaxial Cable PEWC	5D-FB	Cable-CO5-01	2025/1/17	2026/1/16
Software BVADT	Cond_V7.4.1.0	N/A	N/A	N/A

Notes:

1. The test was performed in Linkou Conduction 5.
2. Tested Date: 2025/3/20 ~ 2025/4/10

4.6 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Bi_Log Antenna Schwarzbeck	VULB 9168	137	2024/10/9	2025/10/8
Coupling / Decoupling Network Schwarzbeck	CDNE-M2	00097	2024/5/28	2025/5/27
	CDNE-M3	00091	2024/5/28	2025/5/27
MXE EMI Receiver Keysight	N9038A	MY55420137	2024/5/8	2025/5/7
Preamplifier Agilent	8447D	2944A11064	2025/2/14	2026/2/13
Preamplifier EMCI	EMC001340	980269	2024/6/25	2025/6/24
Radiating Loop Antenna TESEQ	RLA 6120-20	80002	2024/7/30	2025/7/29
RF Coaxial Cable Pacific	8D-FB	Cable-CH6-02	2024/6/25	2025/6/24
Signal Analyzer R&S	FSV40	101544	2024/6/20	2025/6/19
Software BVADT	Radiated_V8.7.08	N/A	N/A	N/A
Tower ADT	AT100	0306	N/A	N/A
Turn Table ADT	TT100	0306	N/A	N/A

Notes:

1. The test was performed in Linkou 966 Chamber 6 (CH 6).
2. Tested Date: 2025/3/14

4.7 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Boresight antenna tower fixture BV	BAF-02	6	N/A	N/A
High Pass Filter Wainwright	WHK 3.1/18G-10SS	SN 8	2024/5/24	2025/5/23
Horn Antenna EMCO	3115	00028257	2024/11/10	2025/11/9
Horn Antenna ETS-Lindgren	3117-PA	00215857	2024/11/10	2025/11/9
Horn Antenna Schwarzbeck	BBHA 9170	212	2024/10/18	2025/10/17
		BBHA9170190	2024/11/10	2025/11/9
MXE EMI Receiver Keysight	N9038A	MY55420137	2024/5/8	2025/5/7
Notch Filter Micro-Tronics	BRC50703-01	010	2024/5/24	2025/5/23
	BRM17690	005	2024/5/24	2025/5/23
Preamplifier EMCI	EMC0126545	980076	2025/2/14	2026/2/13
	EMC184045B	980175	2024/8/25	2025/8/24
		980235	2025/2/14	2026/2/13
Preamplifier HP	8449B	3008A01201	2025/2/14	2026/2/13
RF Coaxial Cable EMCI	EMC104	190801	2024/7/5	2025/7/4
		190804	2024/7/5	2025/7/4
RF Coaxial Cable EMEC	EM102-KMKM-100	02	2024/7/5	2025/7/4
RF Coaxial Cable HUBER+SUHNER	SF-104	Cable-CH6-01	2024/7/5	2025/7/4
Signal Analyzer R&S	FSV40	101042	2024/9/12	2025/9/11
		101544	2024/6/20	2025/6/19
Software BVADT	Radiated_V7.7.1.1.1	N/A	N/A	N/A
Tower ADT	AT100	0306	N/A	N/A
Turn Table ADT	TT100	0306	N/A	N/A

Notes:

1. The test was performed in Linkou 966 Chamber 6 (CH 6).
2. Tested Date: 2025/3/6 ~ 2025/3/7

5 Limits of Test Items

5.1 RF Output Power

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less, for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

5.2 Power Spectral Density

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz.

5.3 6 dB Bandwidth

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

5.4 Conducted Out of Band Emissions

Below 20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

5.5 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.6 Unwanted Emissions below 1 GHz

Radiated emissions up to 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.7 Unwanted Emissions above 1 GHz

Radiated emissions above 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3


Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

6 Test Arrangements

6.1 RF Output Power

6.1.1 Test Setup

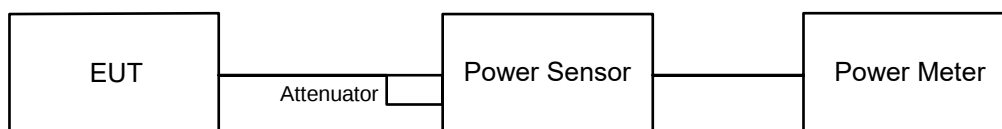

6.1.2 Test Procedure

Peak Power:


A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average Power:

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

6.2 Power Spectral Density

6.2.1 Test Setup




6.2.2 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: 3 kHz.
- Set the VBW $\geq 3 \times$ RBW.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

6.3 6 dB Bandwidth

6.3.1 Test Setup




6.3.2 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.4 Conducted Out of Band Emissions

6.4.1 Test Setup



6.4.2 Test Procedure

MEASUREMENT PROCEDURE REF


- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOBE

- Set RBW = 100 kHz.
- Set VBW ≥ 300 kHz.
- Detector = peak.
- Sweep = auto couple.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

6.5 AC Power Conducted Emissions

6.5.1 Test Setup

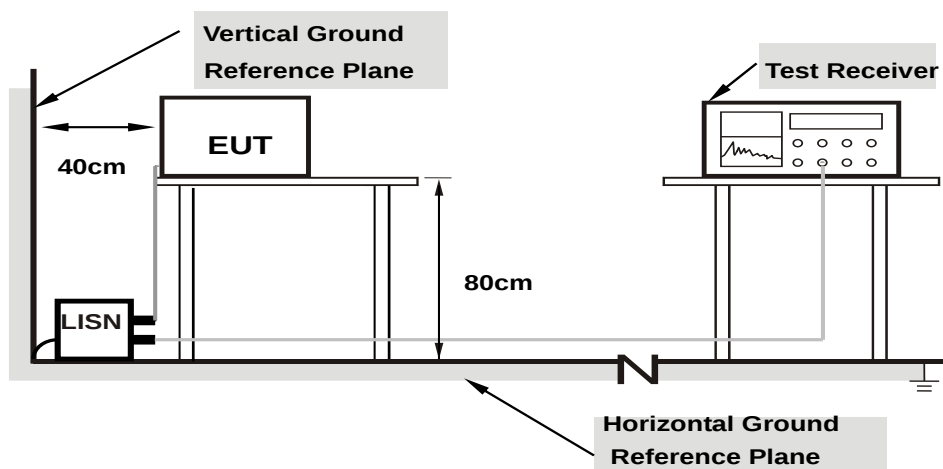

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.5.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


6.6 Unwanted Emissions below 1 GHz

6.6.1 Test Setup

For Radiated emission below 30 MHz

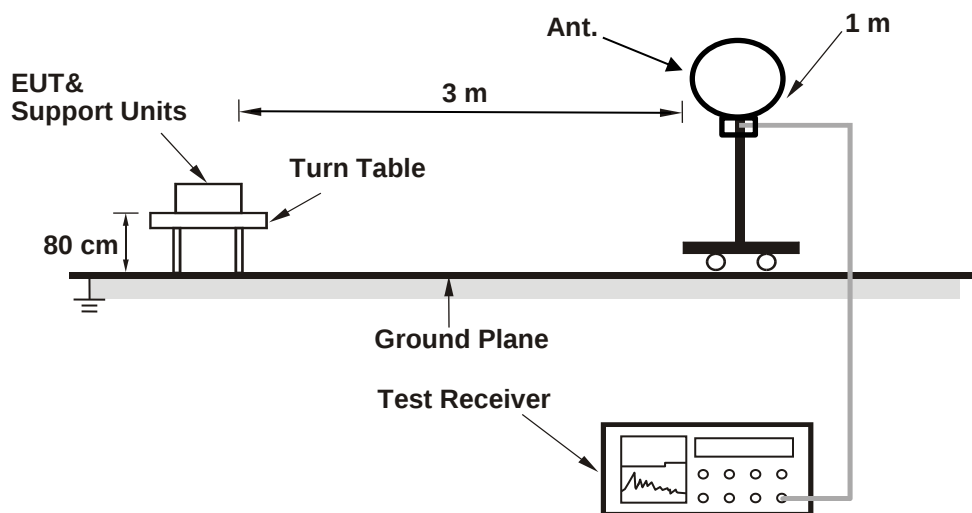

For Radiated emission above 30 MHz

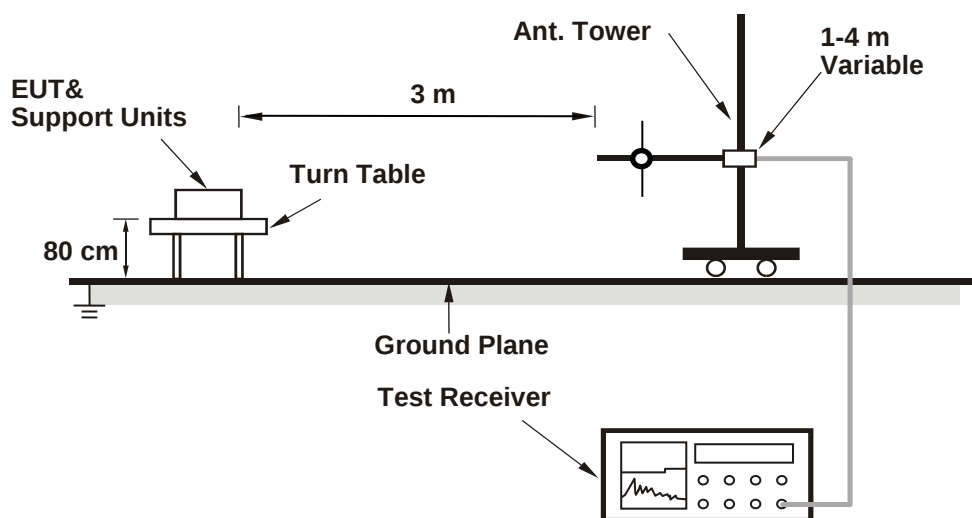

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.6.2 Test Procedure

For Radiated emission below 30 MHz

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
- All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz


- The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Notes:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

6.7 Unwanted Emissions above 1 GHz

6.7.1 Test Setup

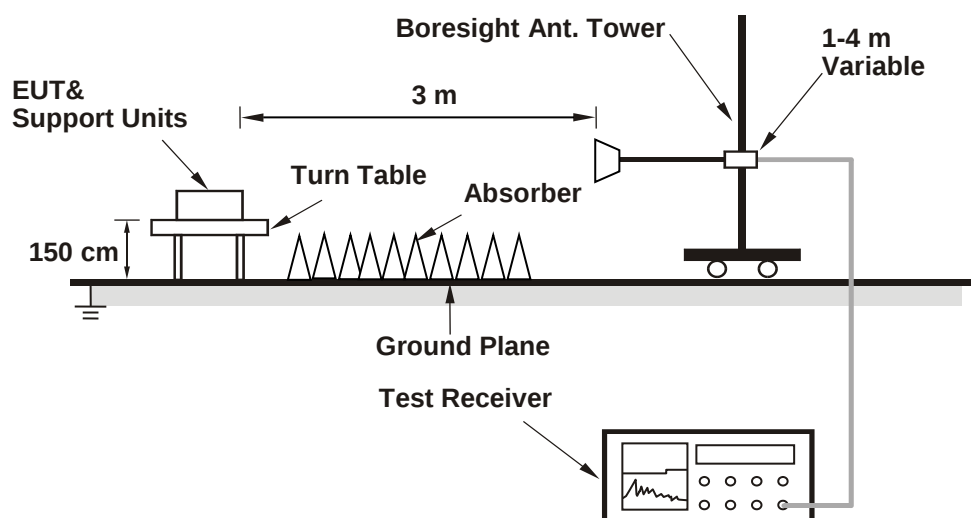

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 RF Output Power

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Waydi Tuan
--------------	----------------	---------------------------	--------------	------------	------------

For Peak Power

802.11b

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	21.74	23.23	359.657	25.56	30	Pass
6	2437	21.80	23.34	367.131	25.65	30	Pass
11	2462	21.37	23.31	351.377	25.46	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 2.69 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11g

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	24.19	24.69	556.864	27.46	30	Pass
6	2437	24.29	24.58	555.613	27.45	30	Pass
11	2462	23.79	24.80	541.327	27.33	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 2.69 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11n (HT20)

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	23.59	24.69	523.002	27.19	30	Pass
6	2437	24.42	24.91	586.436	27.68	30	Pass
11	2462	23.15	24.24	471.999	26.74	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 2.69 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11n (HT40)

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
3	2422	24.07	24.66	547.685	27.39	30	Pass
6	2437	23.25	24.53	495.141	26.95	30	Pass
9	2452	22.72	23.84	429.171	26.33	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 2.69 dBi < 6 dBi, so the output power limit shall not be reduced.

VHT20

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	23.77	24.86	544.428	27.36	30	Pass
6	2437	24.53	25.01	600.749	27.79	30	Pass
11	2462	23.27	24.39	487.114	26.88	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 2.69 dBi < 6 dBi, so the output power limit shall not be reduced.

VHT40

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
3	2422	24.25	24.79	567.373	27.54	30	Pass
6	2437	23.43	24.69	514.735	27.12	30	Pass
9	2452	22.91	24.04	448.947	26.52	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 2.69 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	23.93	25.00	563.4	27.51	30	Pass
6	2437	24.62	25.11	614.074	27.88	30	Pass
11	2462	23.39	24.49	499.463	26.99	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 2.69 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
3	2422	24.36	24.97	586.949	27.69	30	Pass
6	2437	23.61	24.83	533.703	27.27	30	Pass
9	2452	23.08	24.20	466.263	26.69	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 2.69 dBi < 6 dBi, so the output power limit shall not be reduced.

For Average Power

802.11b

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Average Power (mW)	Total Average Power (dBm)
		Chain 0	Chain 1		
1	2412	19.39	21.03	213.661	23.30
6	2437	19.41	21.18	218.517	23.39
11	2462	18.95	21.13	208.241	23.19

802.11g

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Average Power (mW)	Total Average Power (dBm)
		Chain 0	Chain 1		
1	2412	18.14	19.54	155.113	21.91
6	2437	19.40	20.35	195.489	22.91
11	2462	15.97	18.09	103.954	20.17

802.11n (HT20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Average Power (mW)	Total Average Power (dBm)
		Chain 0	Chain 1		
1	2412	17.52	19.03	136.477	21.35
6	2437	19.22	20.23	188.999	22.76
11	2462	15.27	17.60	91.195	19.60

802.11n (HT40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Average Power (mW)	Total Average Power (dBm)
		Chain 0	Chain 1		
3	2422	17.06	18.76	125.978	21.00
6	2437	16.64	18.42	115.634	20.63
9	2452	14.95	17.12	82.784	19.18

VHT20

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Average Power (mW)	Total Average Power (dBm)
		Chain 0	Chain 1		
1	2412	17.62	19.20	140.986	21.49
6	2437	19.28	20.34	192.866	22.85
11	2462	15.45	17.73	94.368	19.75

VHT40

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Average Power (mW)	Total Average Power (dBm)
		Chain 0	Chain 1		
3	2422	17.19	18.96	131.065	21.17
6	2437	16.74	18.57	119.151	20.76
9	2452	15.15	17.30	86.437	19.37

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Average Power (mW)	Total Average Power (dBm)
		Chain 0	Chain 1		
1	2412	17.72	19.39	146.052	21.65
6	2437	19.38	20.45	197.614	22.96
11	2462	15.56	17.88	97.351	19.88

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Average Power (mW)	Total Average Power (dBm)
		Chain 0	Chain 1		
3	2422	17.33	19.10	135.358	21.31
6	2437	16.91	18.68	122.881	20.89
9	2452	15.35	17.40	89.231	19.51

7.2 Power Spectral Density

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Waydi Tuan
--------------	----------------	---------------------------	--------------	------------	------------

802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
Chain 0	1	2412	-3.77	3.01	-0.76	8	Pass
	6	2437	-3	3.01	0.01	8	Pass
	11	2462	-4.52	3.01	-1.51	8	Pass
Chain 1	1	2412	-2.17	3.01	0.84	8	Pass
	6	2437	-1.66	3.01	1.35	8	Pass
	11	2462	-1.67	3.01	1.34	8	Pass

Notes:

1. Method E) 2) c) Measure and add 10 log(NANT) dB of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. The directional gain is 5.59 dBi < 6 dBi, so the power density limit shall not be reduced.

802.11g

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
Chain 0	1	2412	-9.35	3.01	-6.34	8	Pass
	6	2437	-6.7	3.01	-3.69	8	Pass
	11	2462	-10.9	3.01	-7.89	8	Pass
Chain 1	1	2412	-7.14	3.01	-4.13	8	Pass
	6	2437	-5.92	3.01	-2.91	8	Pass
	11	2462	-8.01	3.01	-5	8	Pass

Notes:

1. Method E) 2) c) Measure and add 10 log(NANT) dB of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. The directional gain is 5.59 dBi < 6 dBi, so the power density limit shall not be reduced.

802.11ax (HE20)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
Chain 0	1	2412	-8.74	3.01	-5.73	8	Pass
	6	2437	-6.62	3.01	-3.61	8	Pass
	11	2462	-12.15	3.01	-9.14	8	Pass
Chain 1	1	2412	-7.09	3.01	-4.08	8	Pass
	6	2437	-4.42	3.01	-1.41	8	Pass
	11	2462	-10.14	3.01	-7.13	8	Pass

Notes:

1. Method E) 2) c) Measure and add 10 log(NANT) dB of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{\text{Chain0/20}} + 10^{\text{Chain1/20}})^2 / 2]$
3. The directional gain is 5.59 dBi < 6 dBi, so the power density limit shall not be reduced.


802.11ax (HE40)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
Chain 0	3	2422	-12.09	3.01	-9.08	8	Pass
	6	2437	-12.95	3.01	-9.94	8	Pass
	9	2452	-15.86	3.01	-12.85	8	Pass
Chain 1	3	2422	-10.9	3.01	-7.89	8	Pass
	6	2437	-11.69	3.01	-8.68	8	Pass
	9	2452	-12.16	3.01	-9.15	8	Pass


Notes:

1. Method E) 2) c) Measure and add 10 log(NANT) dB of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{\text{Chain0/20}} + 10^{\text{Chain1/20}})^2 / 2]$
3. The directional gain is 5.59 dBi < 6 dBi, so the power density limit shall not be reduced.


Spectrum Plot of Maximum Value

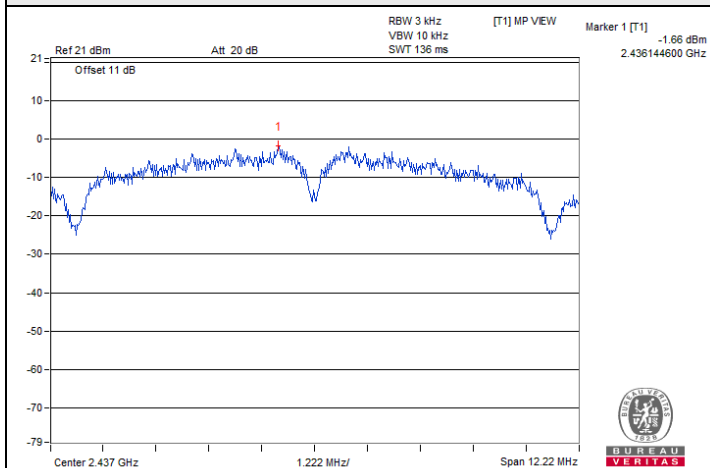


802.11b / Chain 1 : CH 6

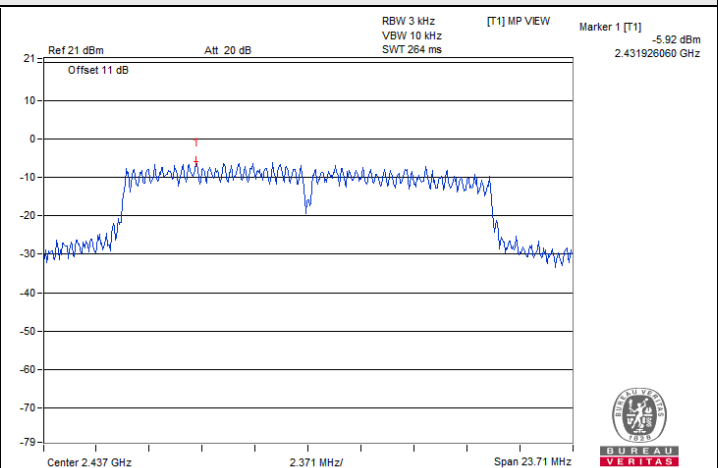

802.11g / Chain 1 : CH 6

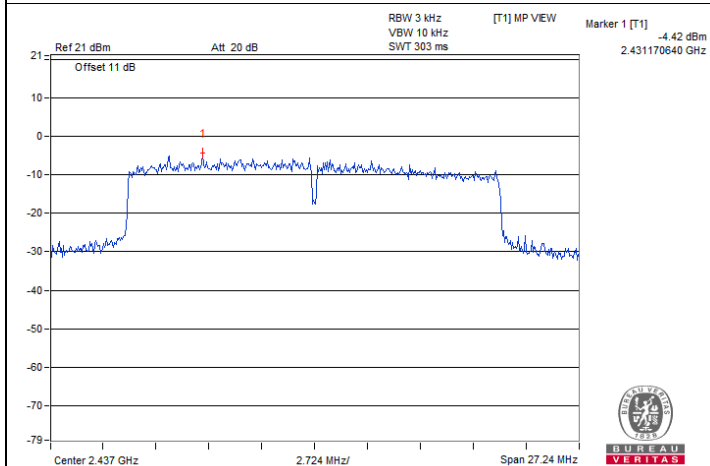

802.11ax (HE20) / Chain 1 : CH 6

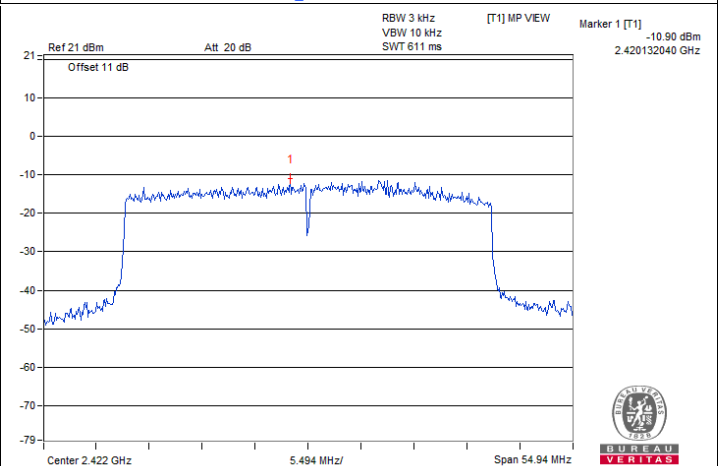

802.11ax (HE40) / Chain 1 : CH 3

7.3 6 dB Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Waydi Tuan
--------------	----------------	---------------------------	--------------	------------	------------

802.11b

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	2412	8.60	9.07	0.5	Pass
6	2437	8.13	8.15	0.5	Pass
11	2462	8.12	8.13	0.5	Pass

802.11g

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	2412	16.09	16.35	0.5	Pass
6	2437	15.76	15.81	0.5	Pass
11	2462	16.53	16.51	0.5	Pass





802.11ax (HE20)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	2412	18.77	18.57	0.5	Pass
6	2437	18.05	18.16	0.5	Pass
11	2462	17.84	17.77	0.5	Pass

802.11ax (HE40)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
3	2422	36.57	36.63	0.5	Pass
6	2437	35.57	37.20	0.5	Pass
9	2452	37.95	37.90	0.5	Pass


Spectrum Plot of Minimum Value





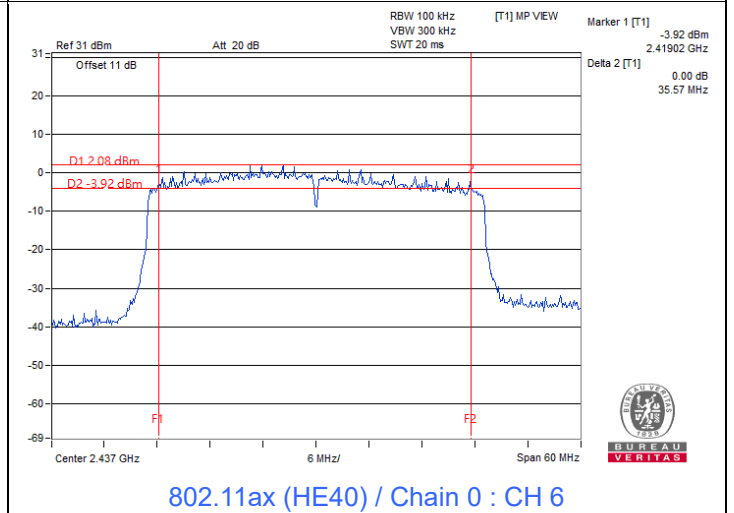
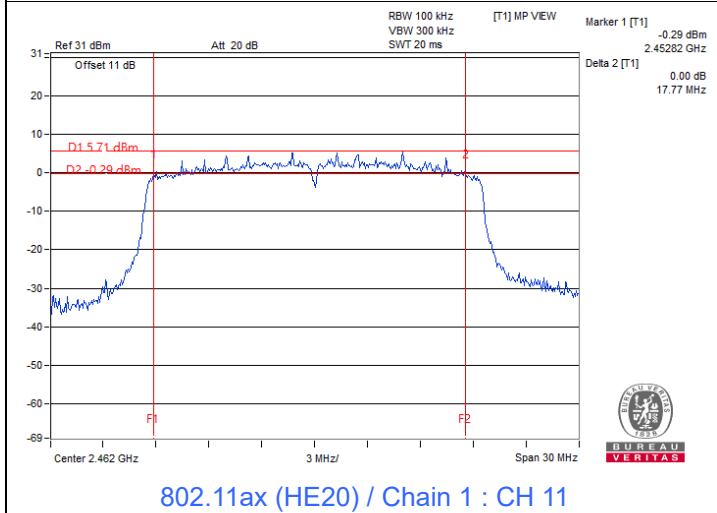
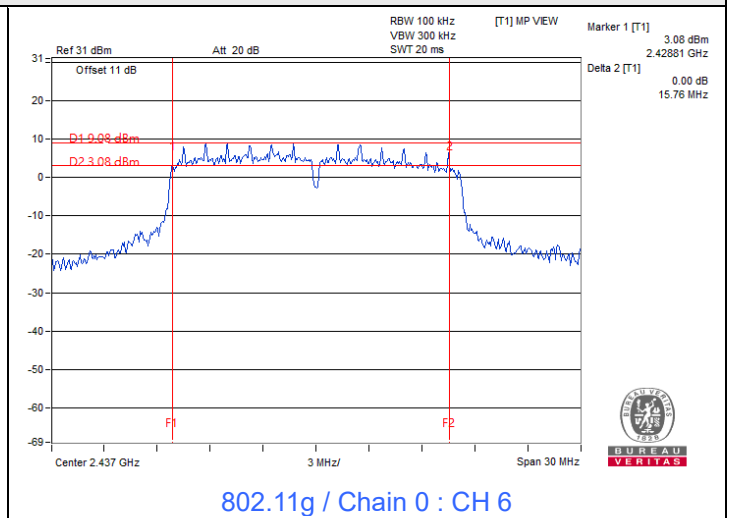
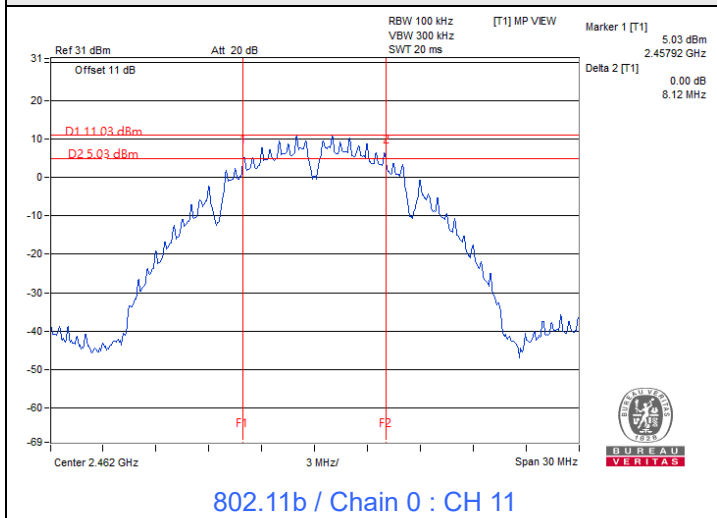


7.4 Conducted Out of Band Emissions


Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Waydi Tuan
--------------	----------------	---------------------------	--------------	------------	------------









802.11b

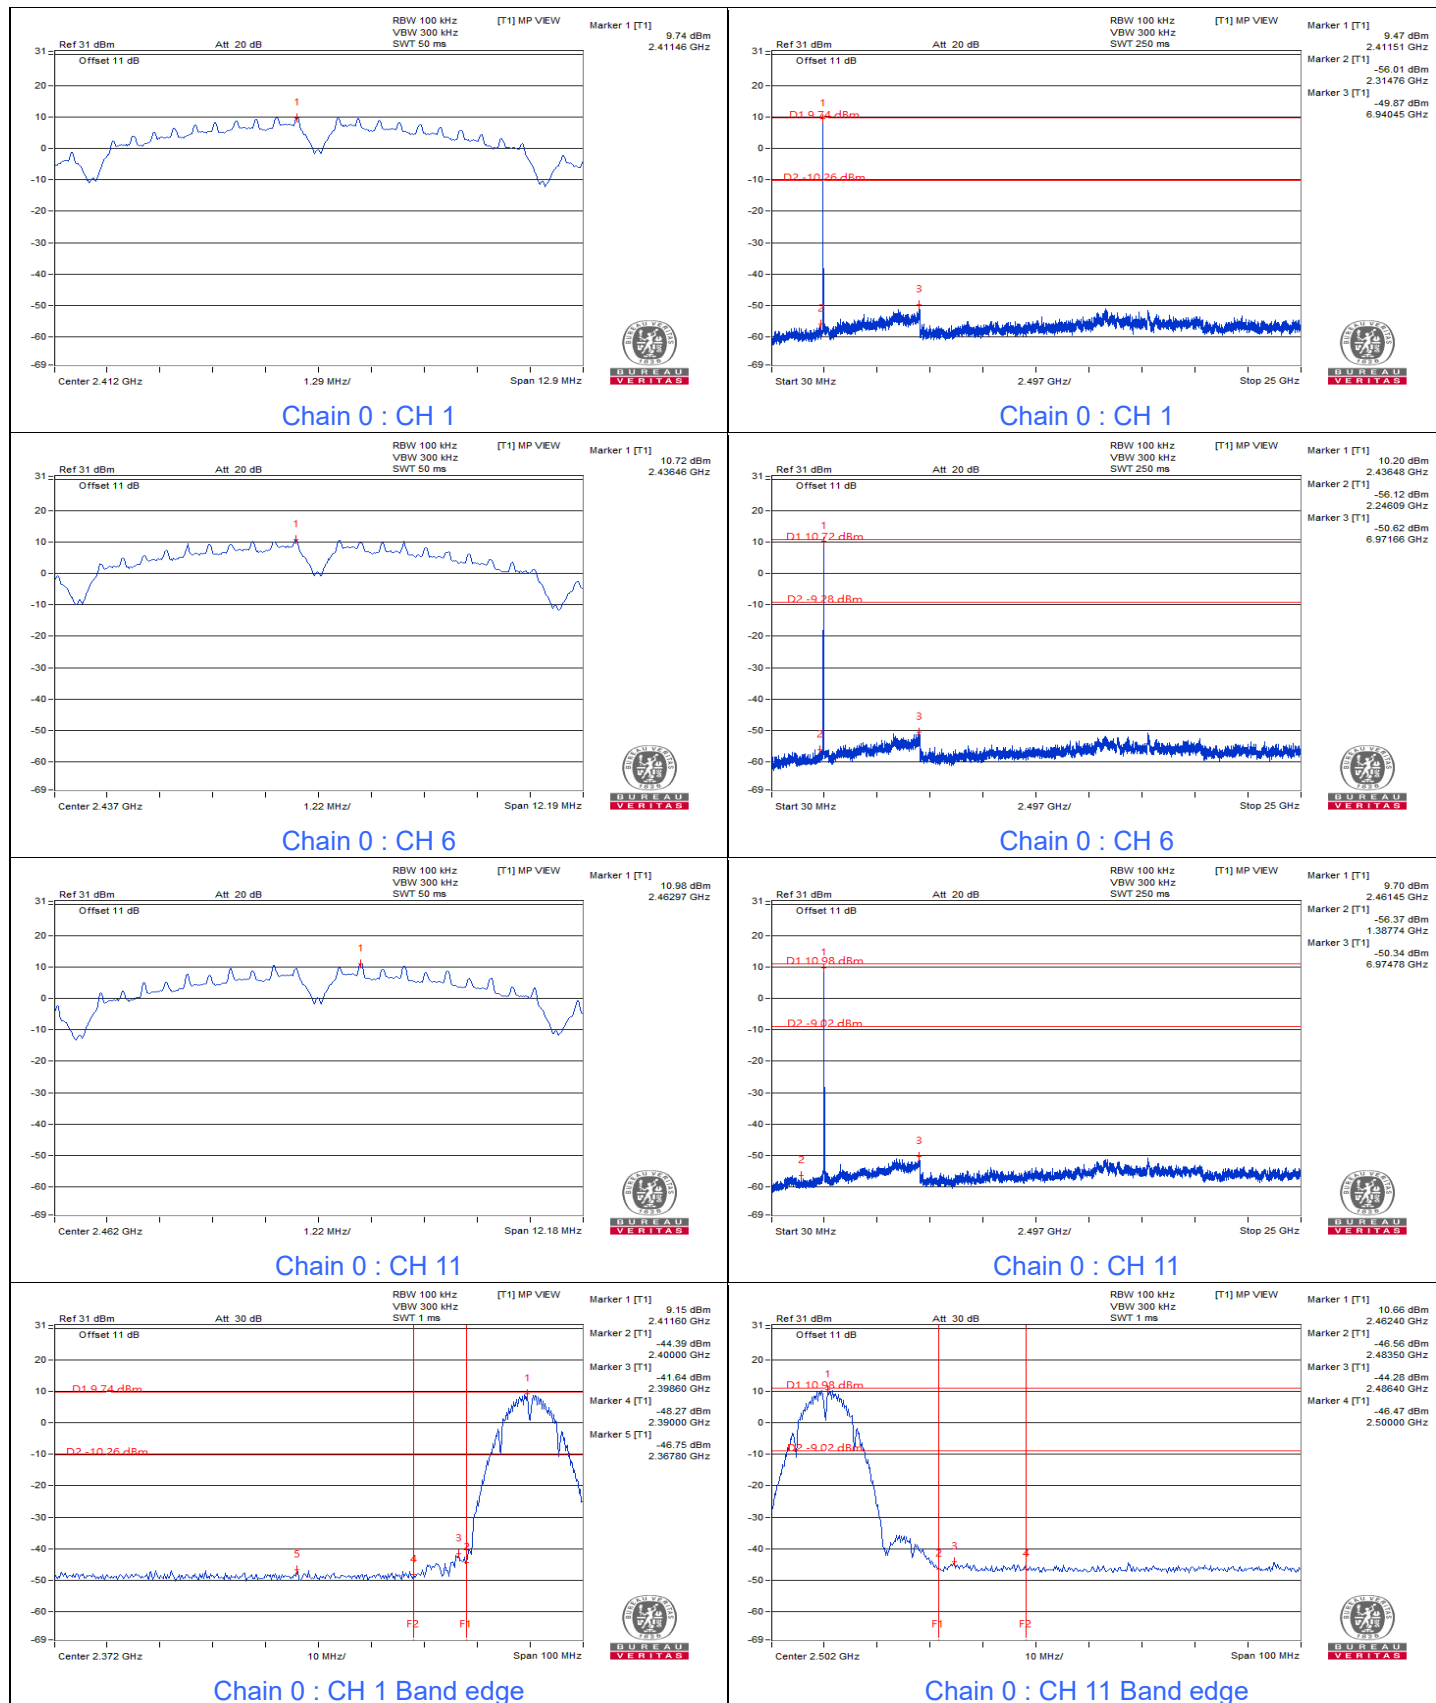

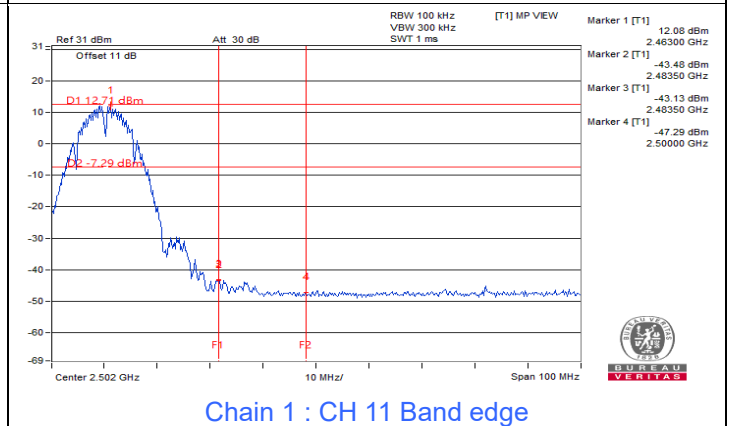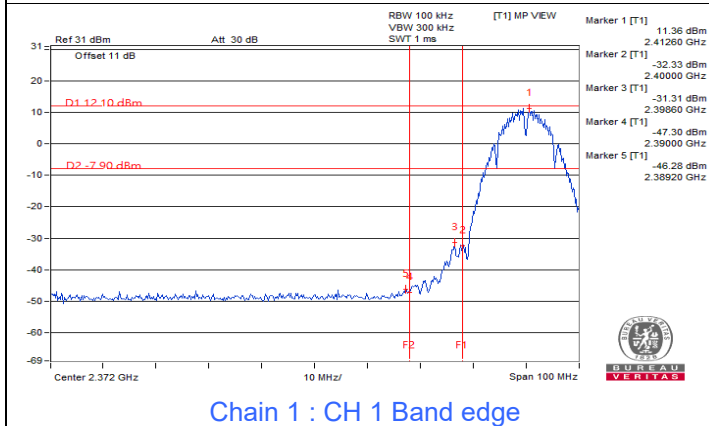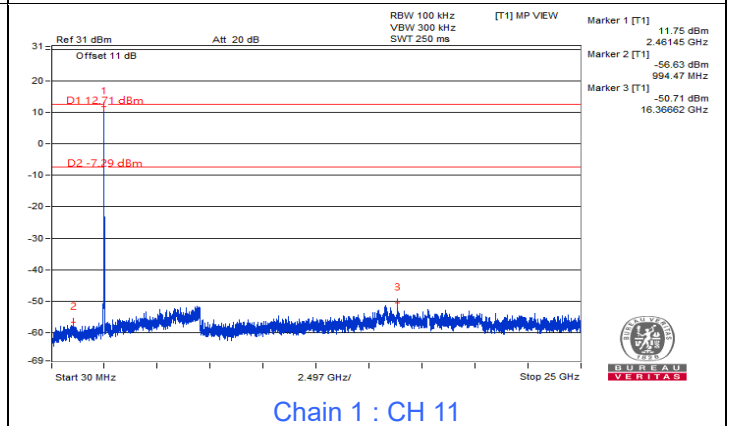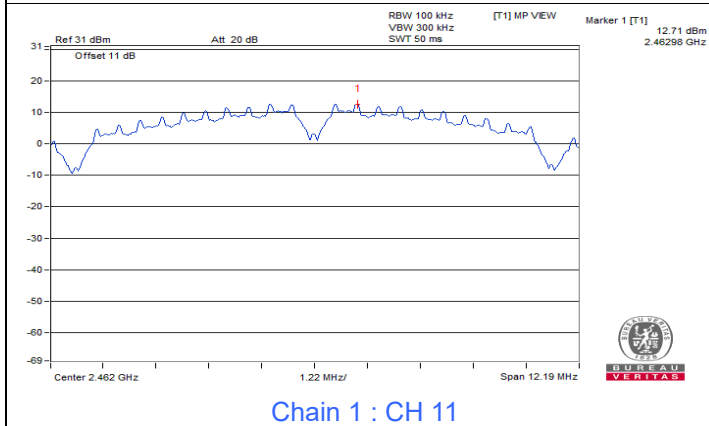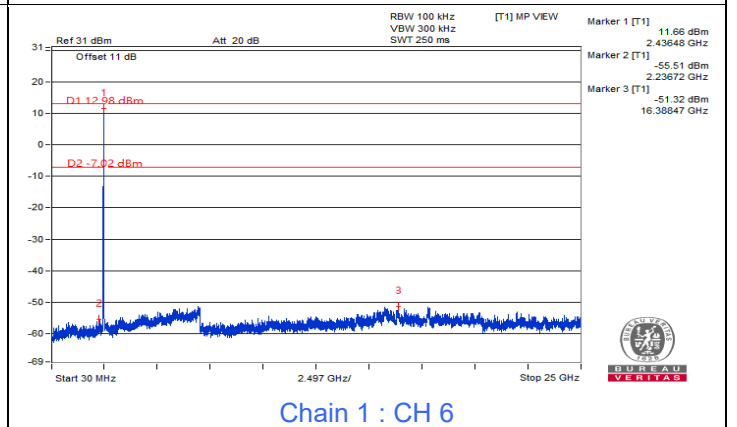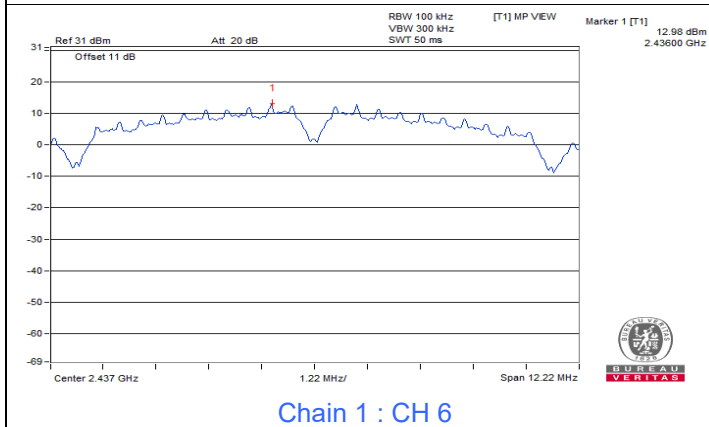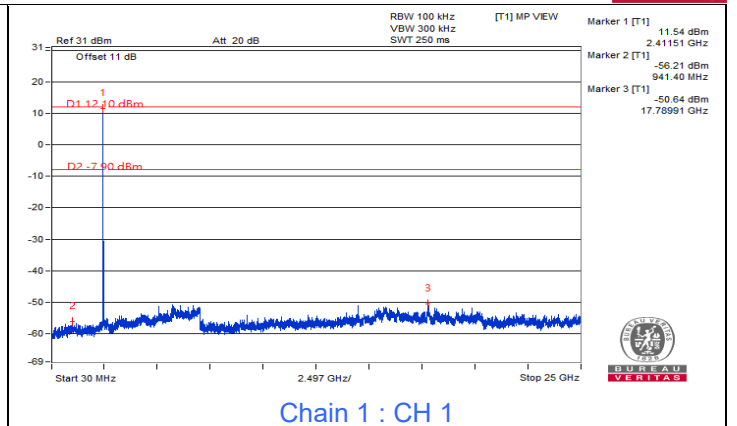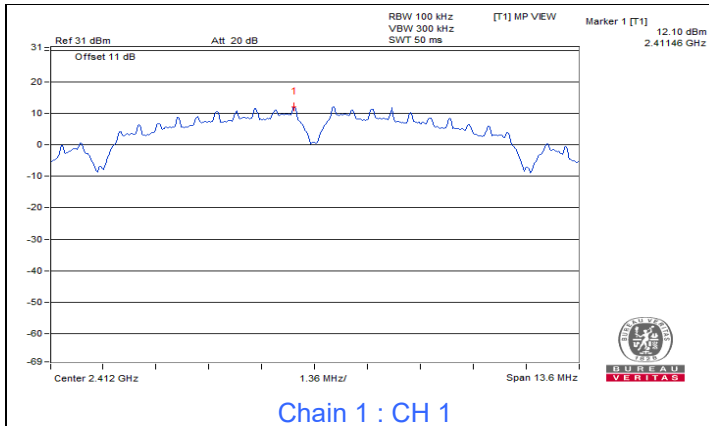










802.11g

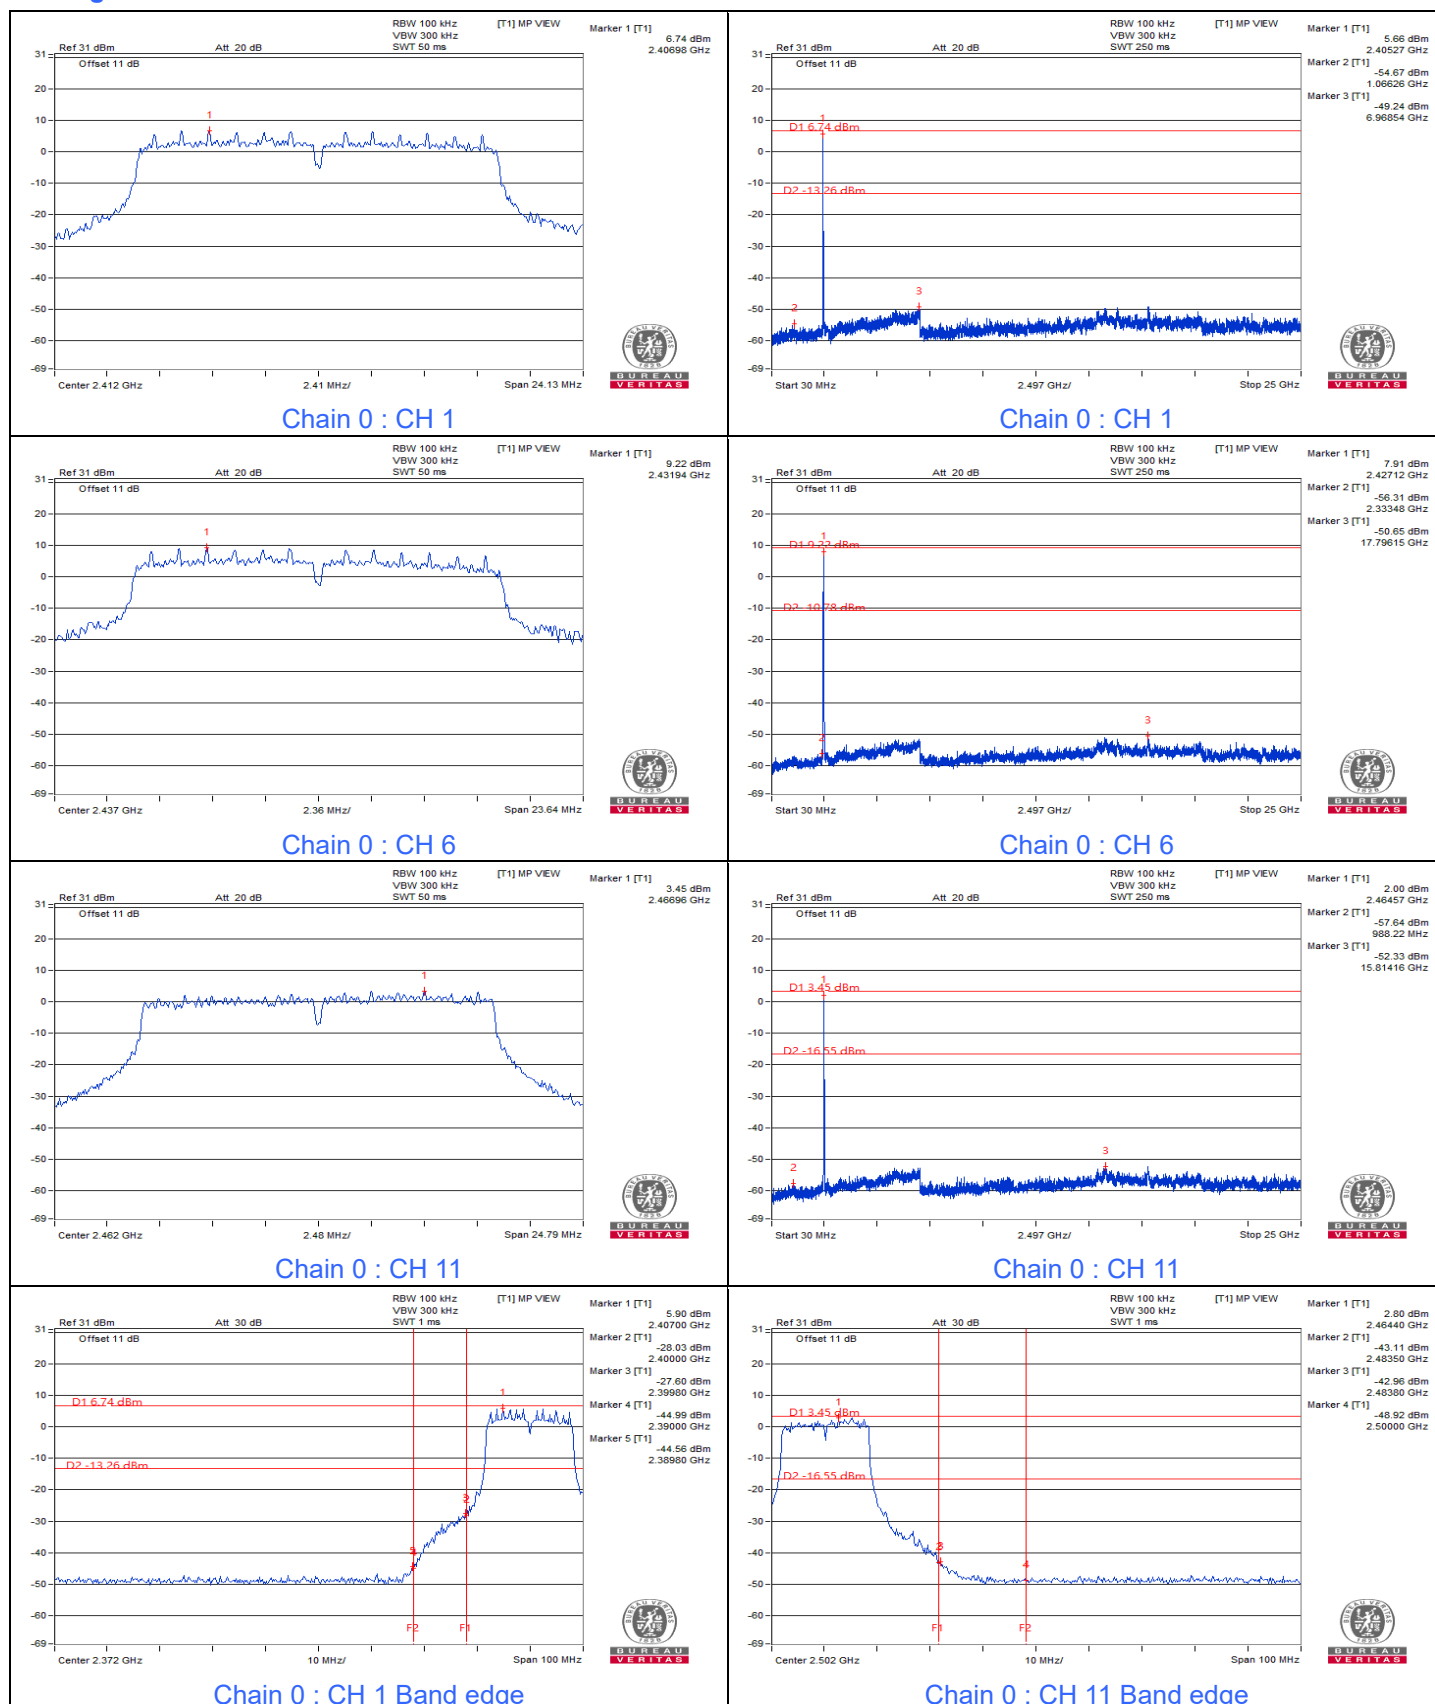

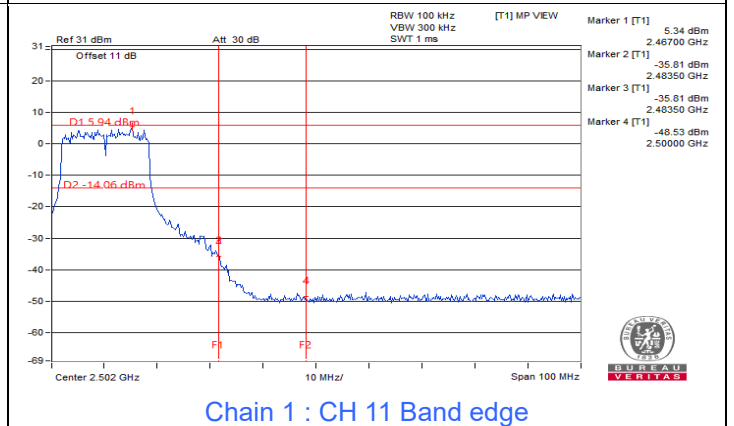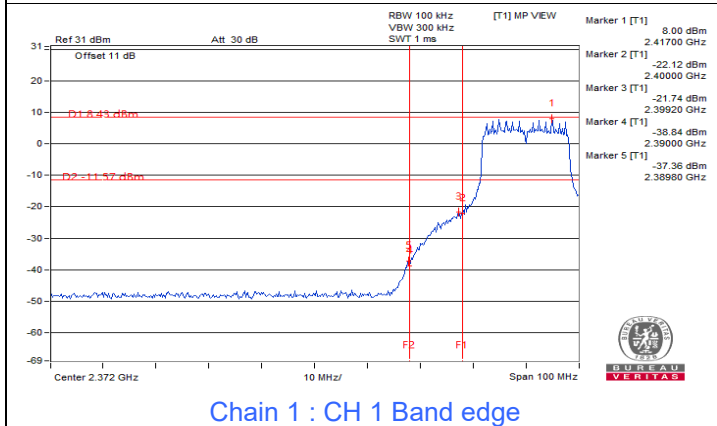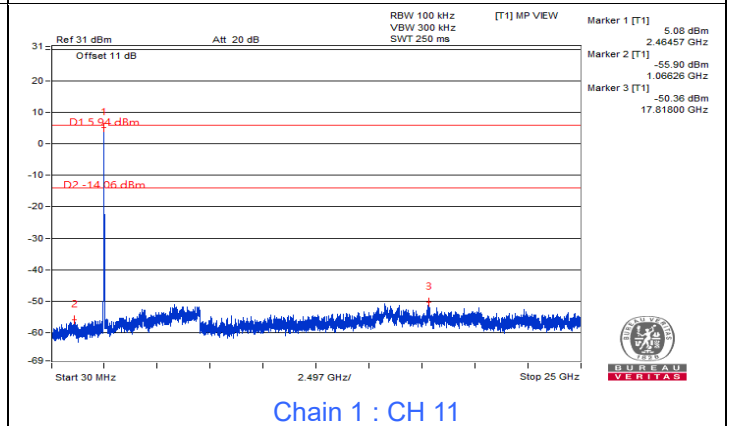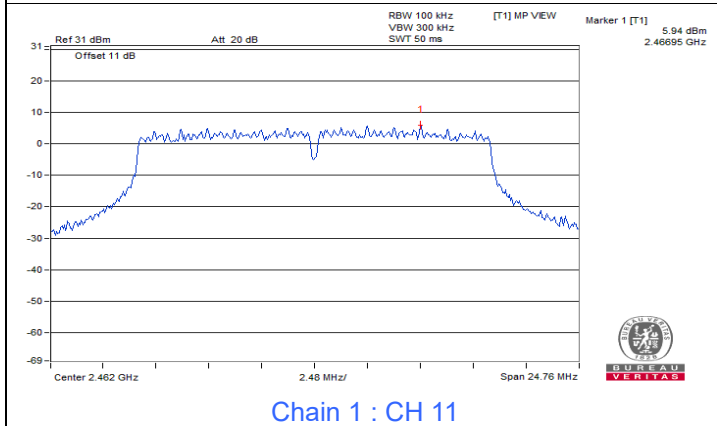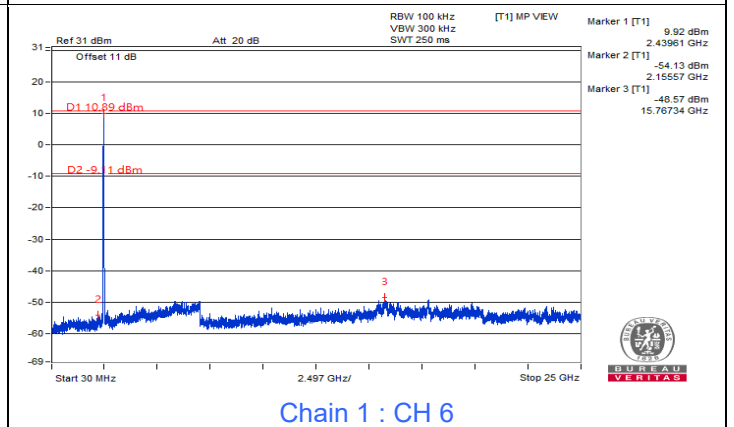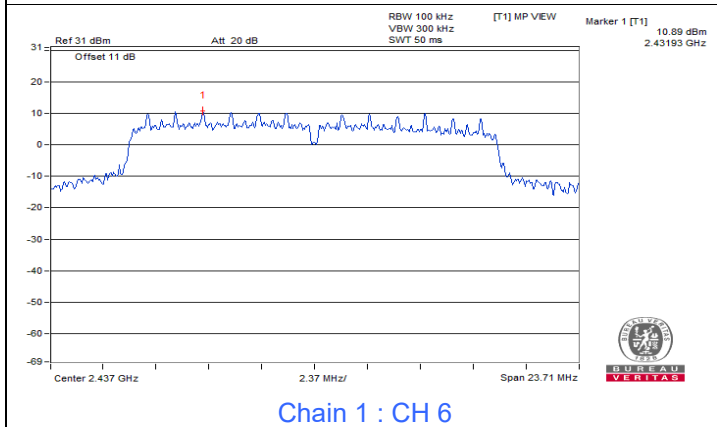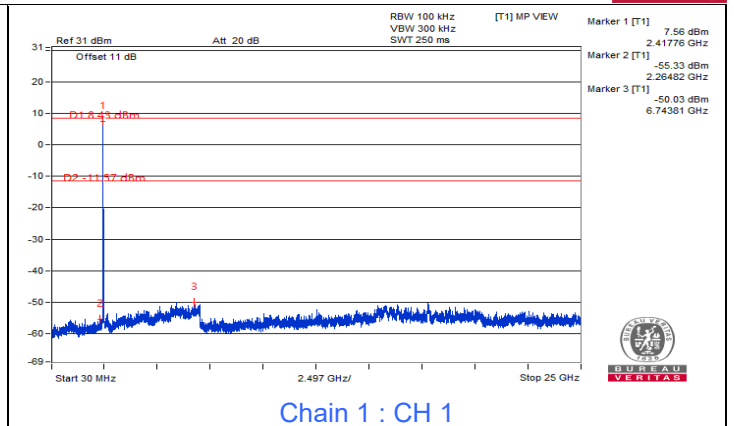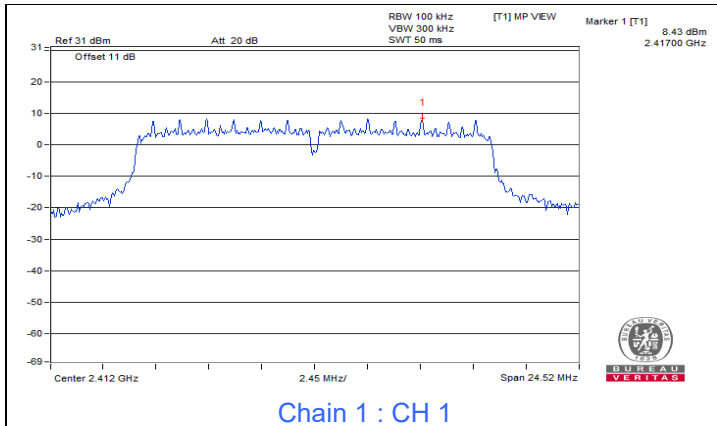










802.11ax (HE20)

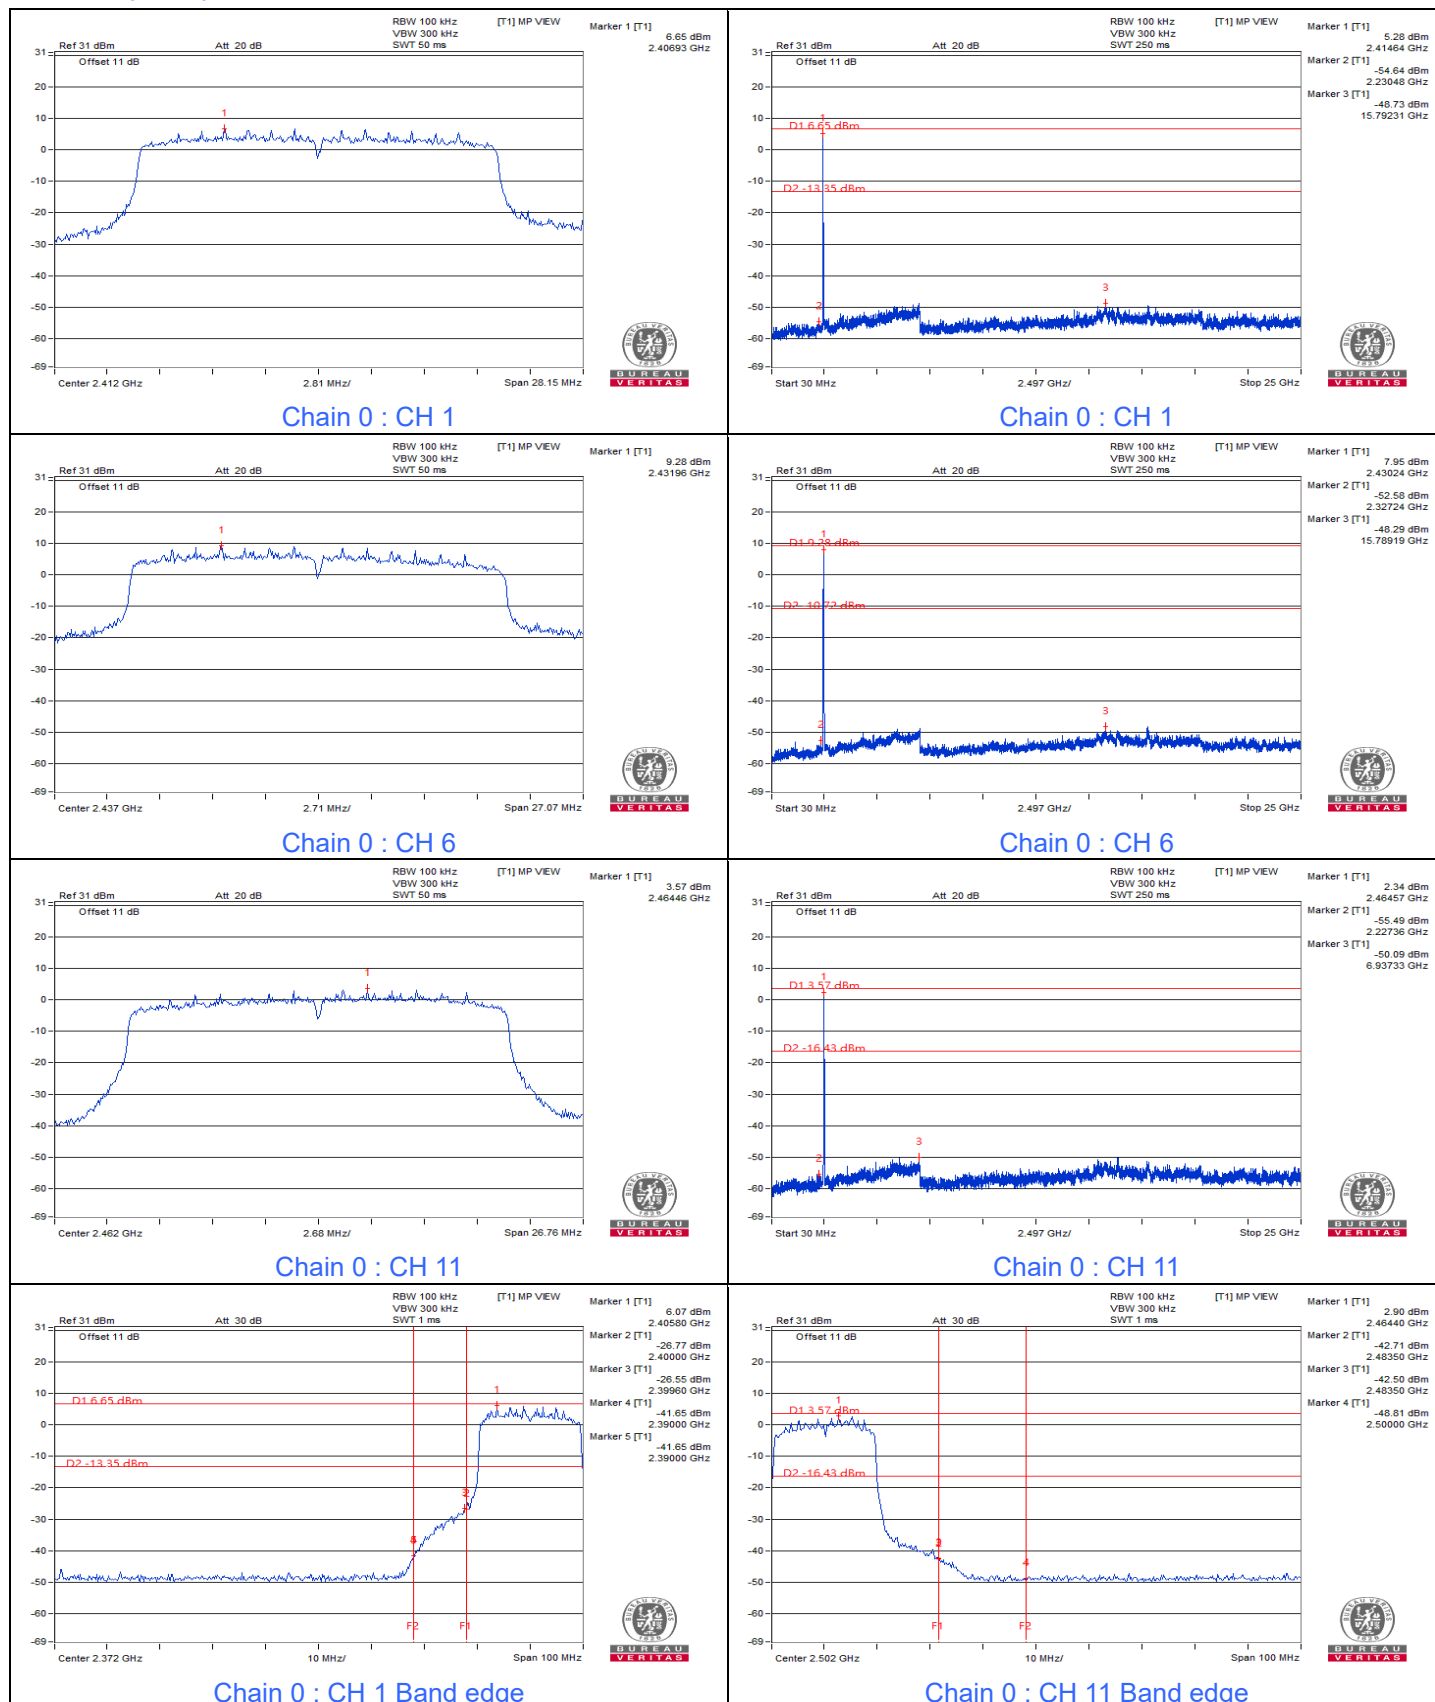

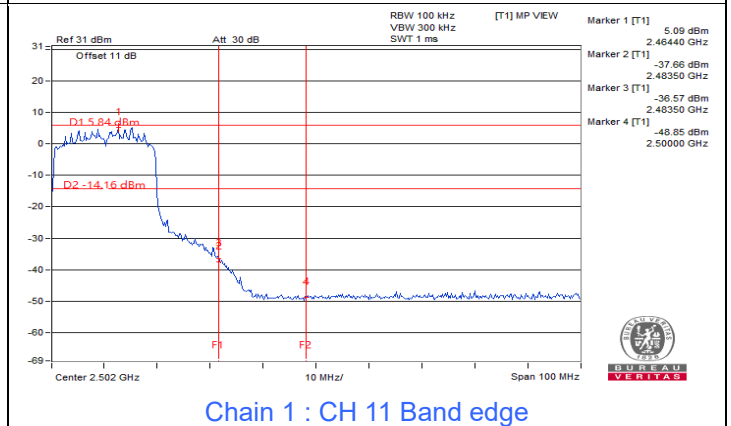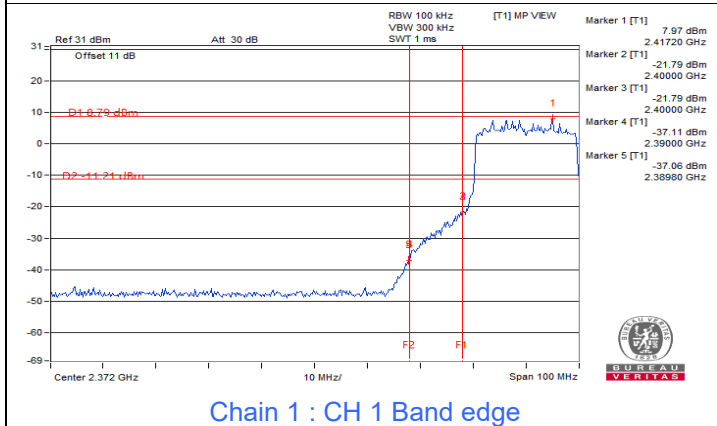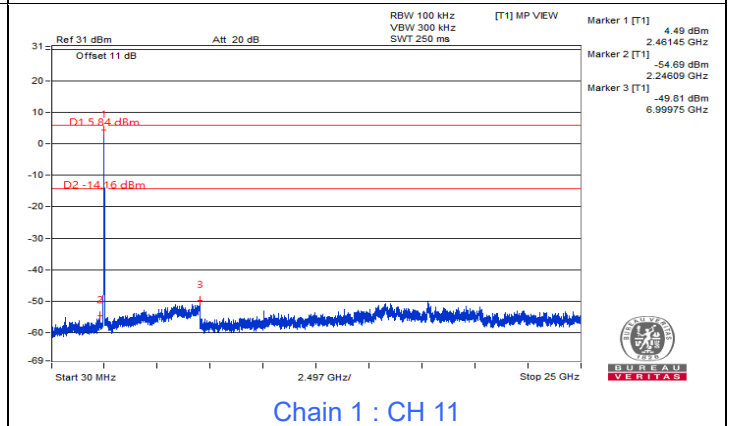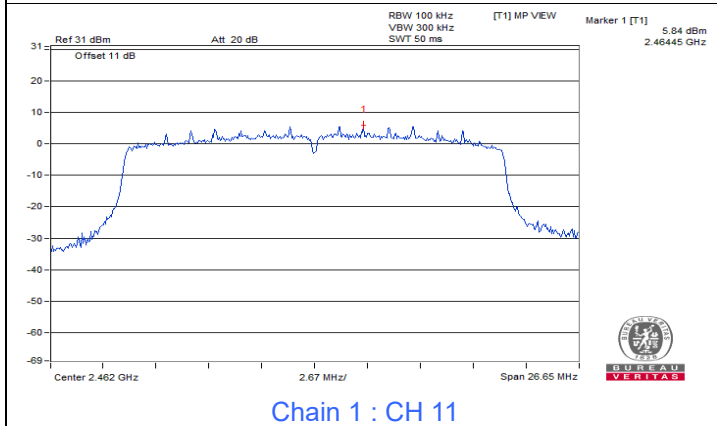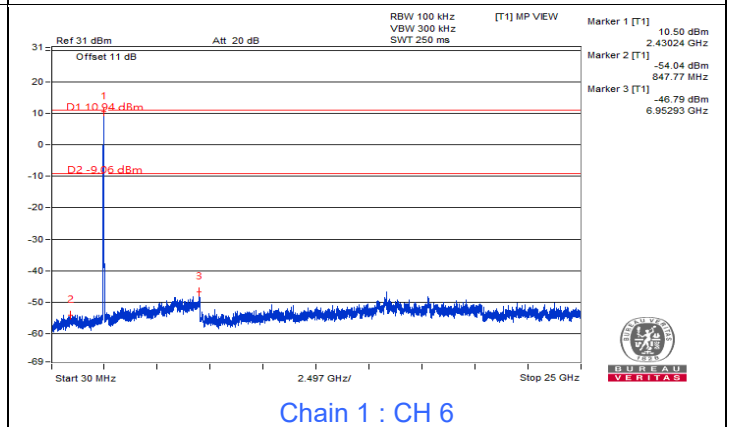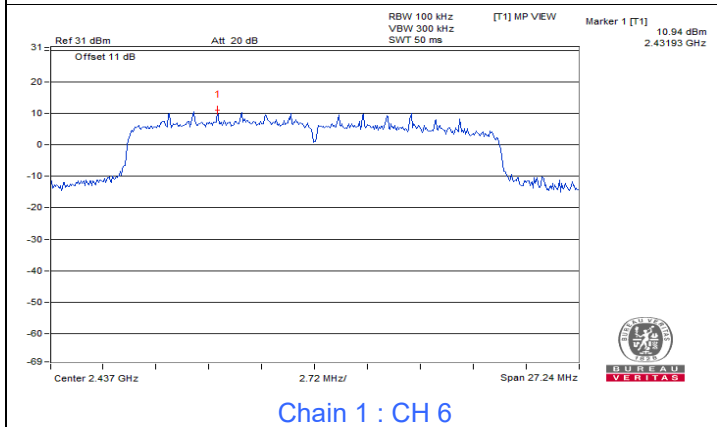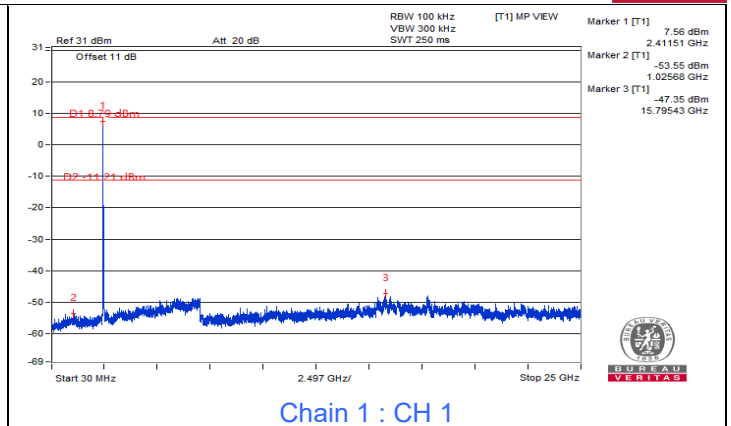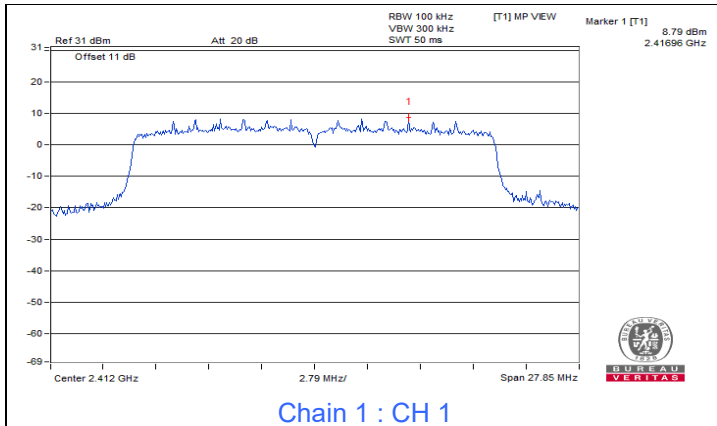

802.11ax (HE40)

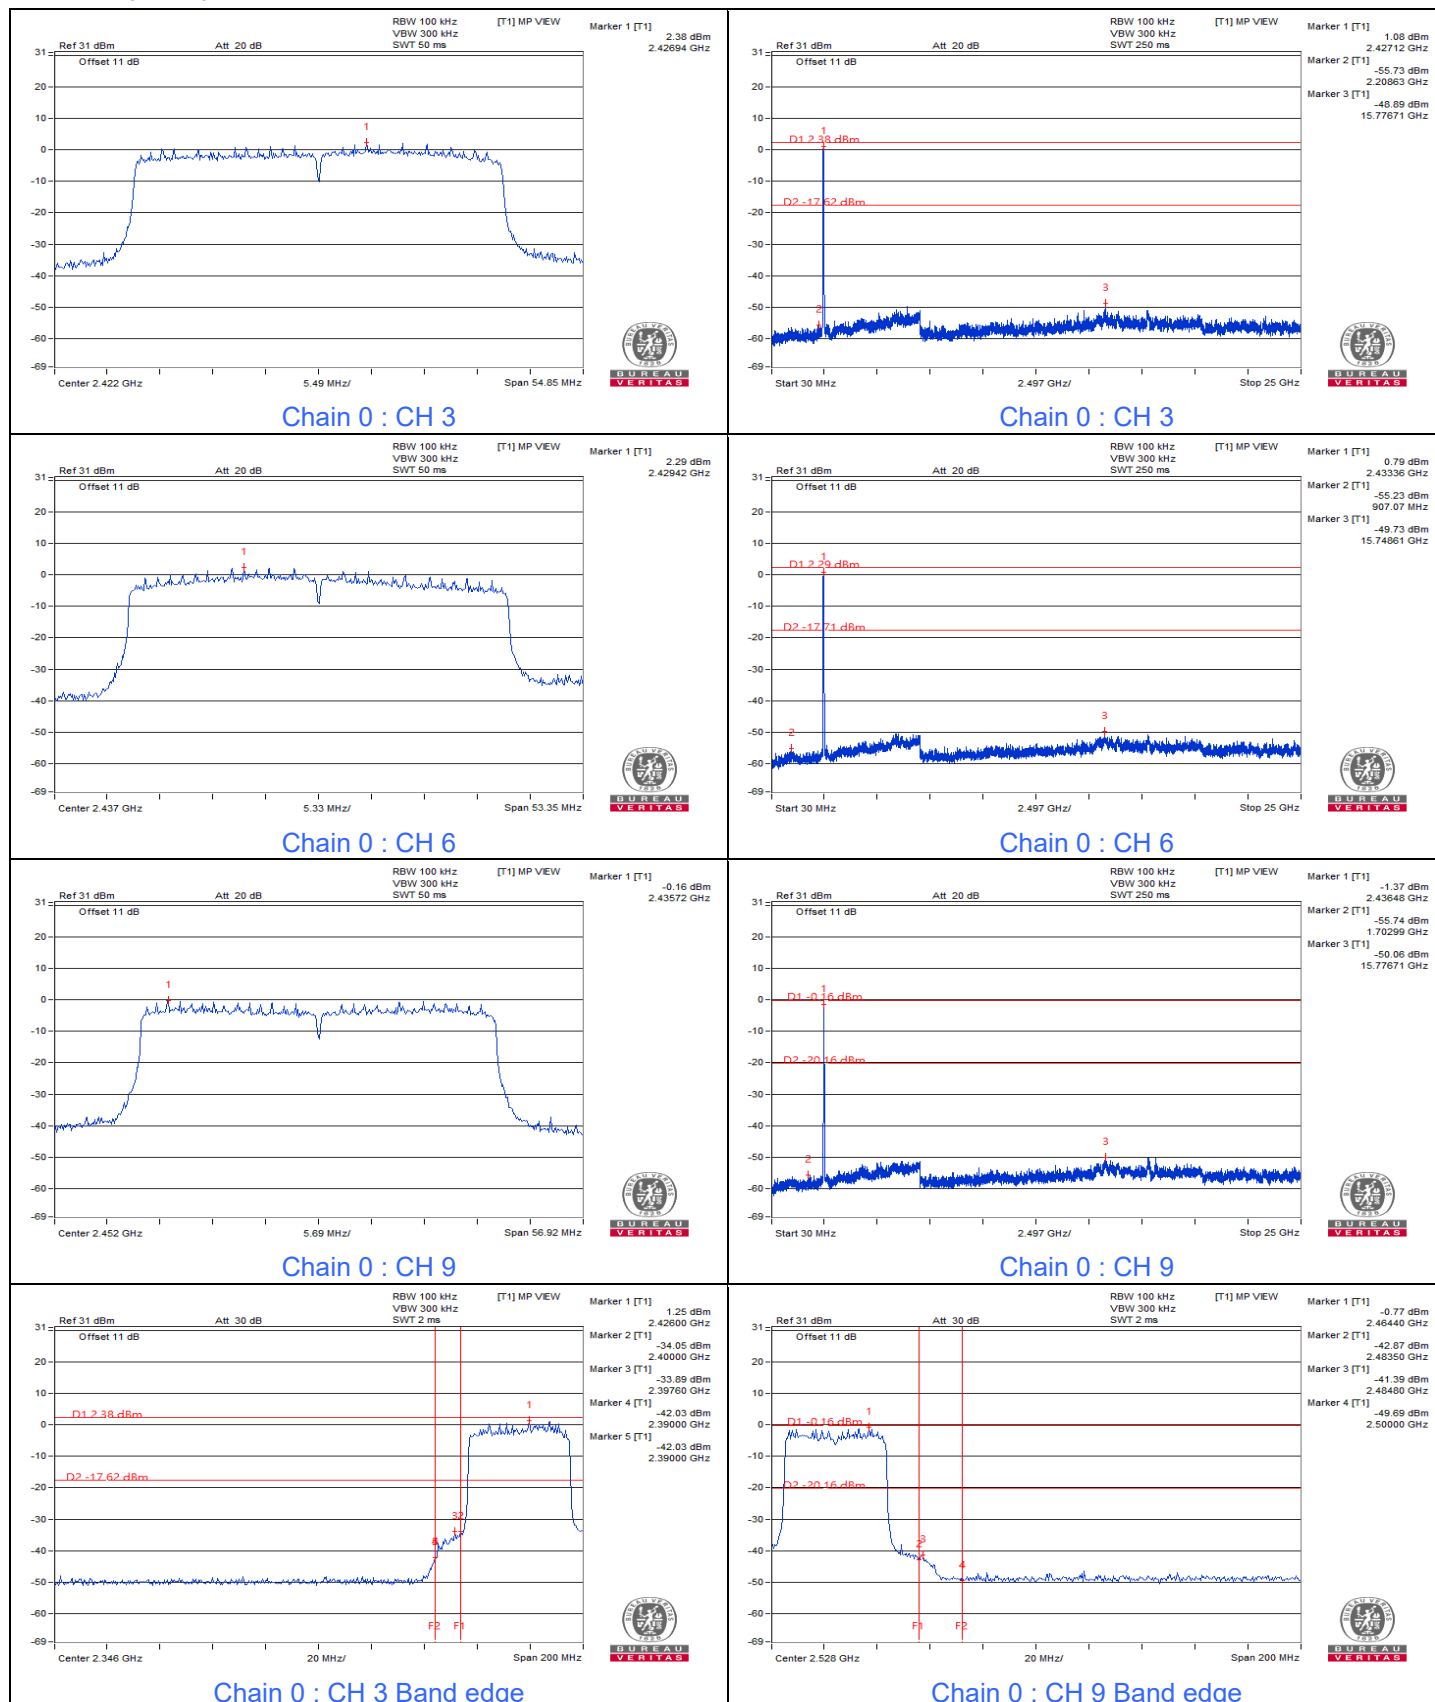

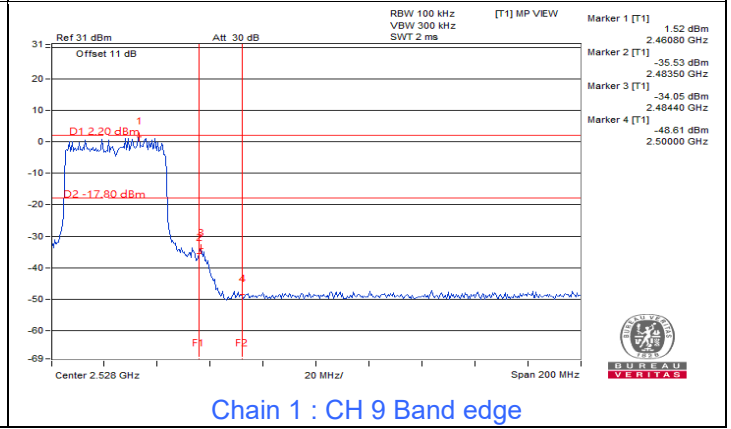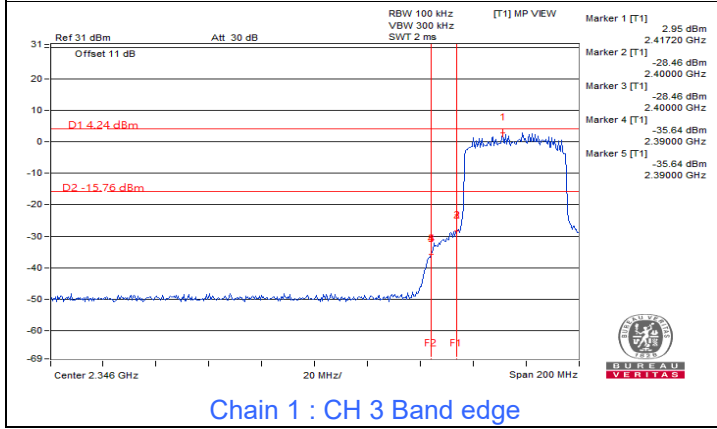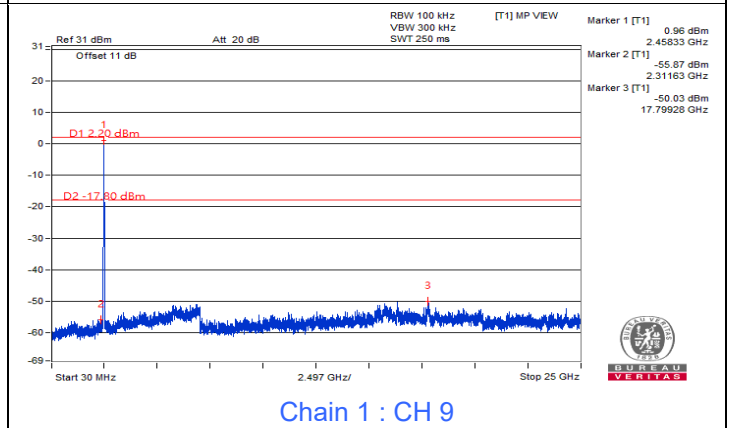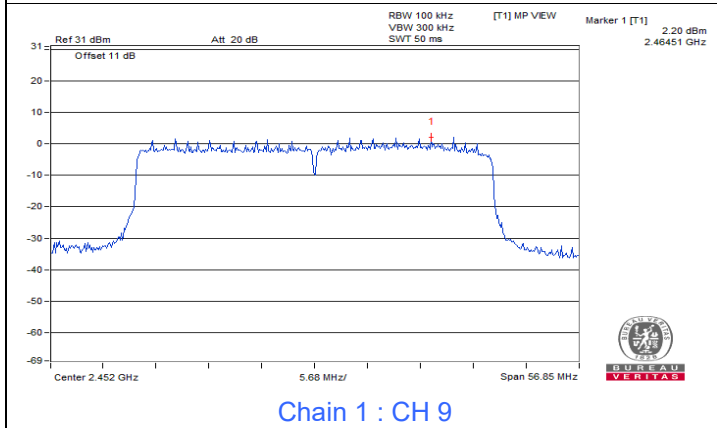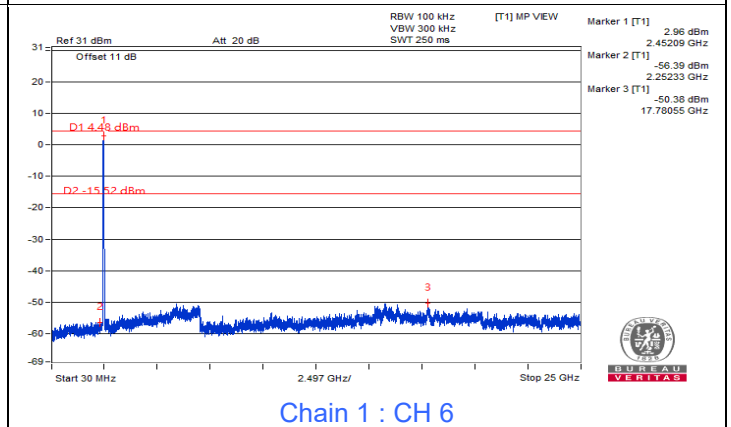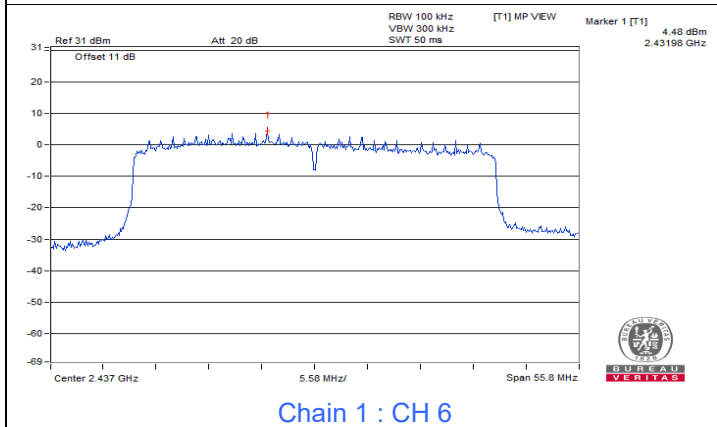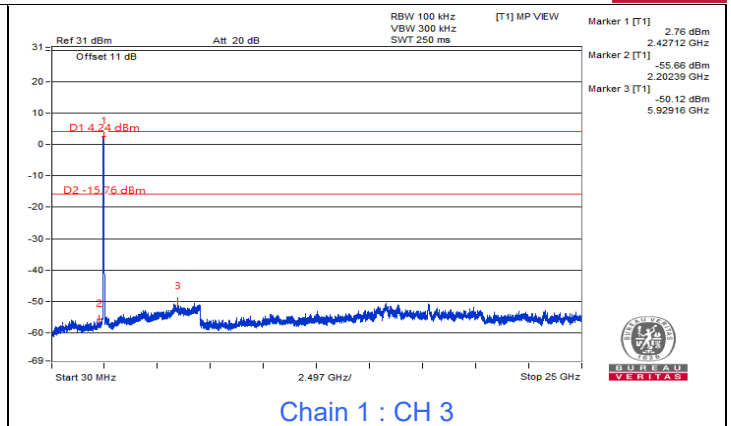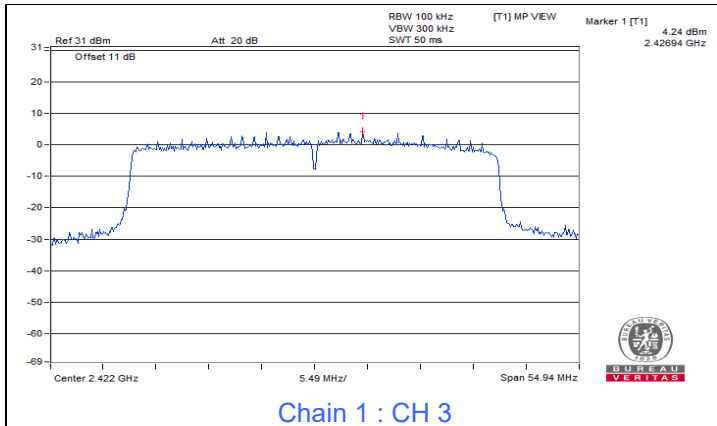

7.5 AC Power Conducted Emissions


Mode A

RF Mode	802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Dalen Dei		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.03	26.05	8.41	36.08	18.44	65.79	55.79	-29.71	-37.35
2	0.37293	10.12	22.71	15.66	32.83	25.78	58.44	48.44	-25.61	-22.66
3	0.88719	10.19	13.48	4.94	23.67	15.13	56.00	46.00	-32.33	-30.87
4	1.82974	10.26	12.99	4.52	23.25	14.78	56.00	46.00	-32.75	-31.22
5	3.62306	10.35	12.95	3.74	23.30	14.09	56.00	46.00	-32.70	-31.91
6	15.65747	10.68	8.02	2.17	18.70	12.85	60.00	50.00	-41.30	-37.15

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

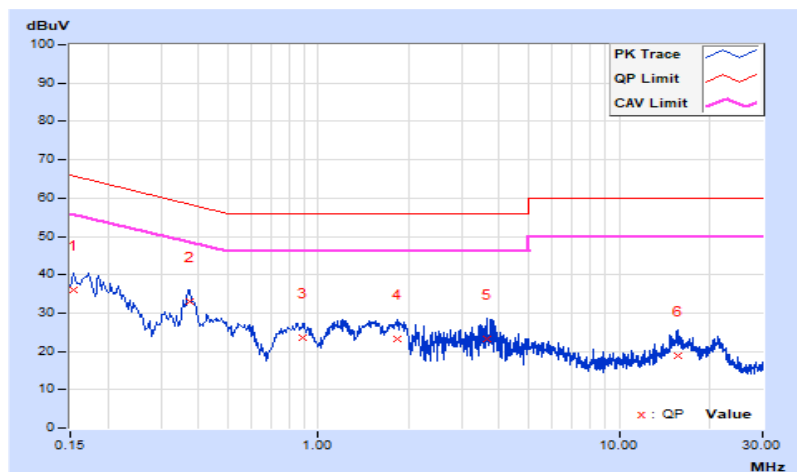


RF Mode	802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Dalen Dei		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.04	26.62	9.73	36.66	19.77	66.00	56.00	-29.34	-36.23
2	0.36902	10.05	24.23	16.86	34.28	26.91	58.52	48.52	-24.24	-21.61
3	0.82852	10.08	14.37	6.13	24.45	16.21	56.00	46.00	-31.55	-29.79
4	1.50904	10.12	12.79	4.43	22.91	14.55	56.00	46.00	-33.09	-31.45
5	3.61524	10.22	14.99	5.91	25.21	16.13	56.00	46.00	-30.79	-29.87
6	15.53623	10.55	8.63	2.57	19.18	13.12	60.00	50.00	-40.82	-36.88

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

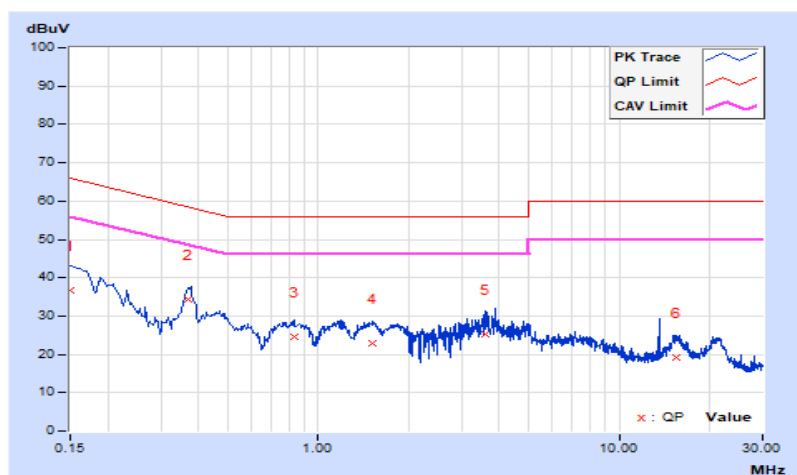


Mode B

RF Mode	802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Dalen Dei		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.03	38.16	22.74	48.19	32.77	65.79	55.79	-17.60	-23.02
2	0.49808	10.14	30.39	20.52	40.53	30.66	56.03	46.03	-15.50	-15.37
3	0.56123	10.15	30.39	23.52	40.54	33.67	56.00	46.00	-15.46	-12.33
4	1.16096	10.22	21.88	15.89	32.10	26.11	56.00	46.00	-23.90	-19.89
5	3.71093	10.36	24.03	13.14	34.39	23.50	56.00	46.00	-21.61	-22.50
6	10.88997	10.60	12.28	6.46	22.88	17.06	60.00	50.00	-37.12	-32.94

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

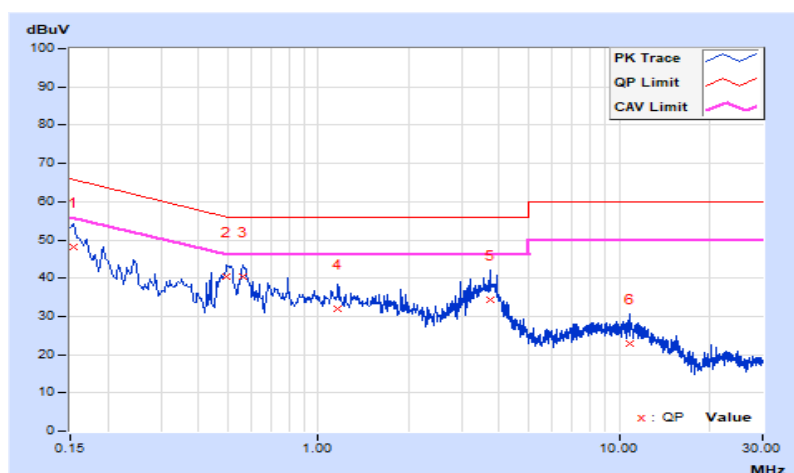


RF Mode	802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Dalen Dei		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15760	10.04	38.72	23.08	48.76	33.12	65.59	55.59	-16.83	-22.47
2	0.53383	10.06	30.83	23.70	40.89	33.76	56.00	46.00	-15.11	-12.24
3	1.25091	10.10	17.59	11.57	27.69	21.67	56.00	46.00	-28.31	-24.33
4	3.67964	10.22	24.12	12.09	34.34	22.31	56.00	46.00	-21.66	-23.69
5	8.06622	10.42	13.37	7.40	23.79	17.82	60.00	50.00	-36.21	-32.18
6	11.93811	10.53	14.05	8.52	24.58	19.05	60.00	50.00	-35.42	-30.95

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

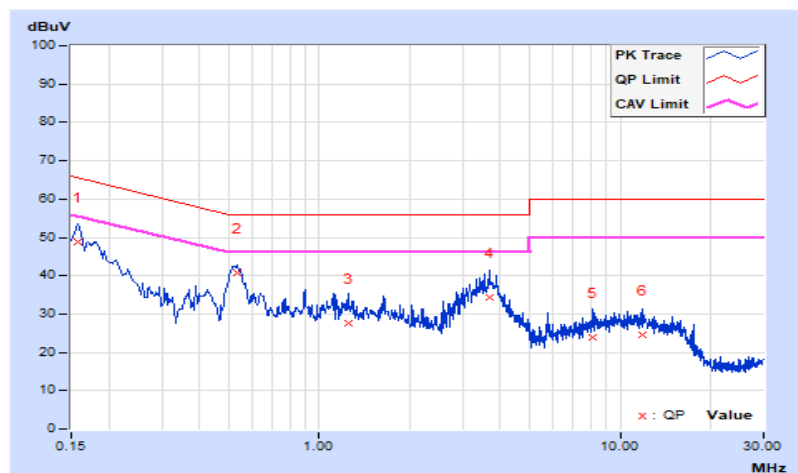


7.6 Unwanted Emissions below 1 GHz

RF Mode	802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 72 % RH
Tested By	Dalen Dai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.64	23.9 QP	40.0	-16.1	1.34 H	23	33.0	-9.1
2	66.86	30.0 QP	40.0	-10.0	1.09 H	15	39.6	-9.6
3	213.34	36.6 QP	43.5	-6.9	1.67 H	146	46.5	-9.9
4	363.68	37.8 QP	46.0	-8.2	1.44 H	244	41.9	-4.1
5	507.24	28.0 QP	46.0	-18.0	1.96 H	129	29.1	-1.1
6	780.78	34.5 QP	46.0	-11.5	1.53 H	333	29.4	5.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

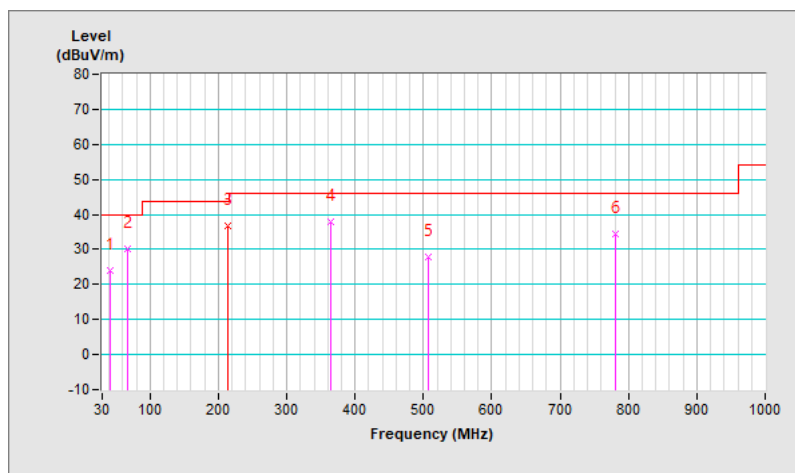


RF Mode	802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 72 % RH
Tested By	Dalen Dai		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	43.58	29.3 QP	40.0	-10.7	1.63 V	38	38.3	-9.0
2	66.86	31.5 QP	40.0	-8.5	1.81 V	85	41.1	-9.6
3	219.86	35.7 QP	46.0	-10.3	1.52 V	287	45.6	-9.9
4	398.60	26.9 QP	46.0	-19.1	1.66 V	163	30.2	-3.3
5	600.36	30.1 QP	46.0	-15.9	1.95 V	4	28.9	1.2
6	821.52	34.7 QP	46.0	-11.3	2.07 V	219	29.0	5.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

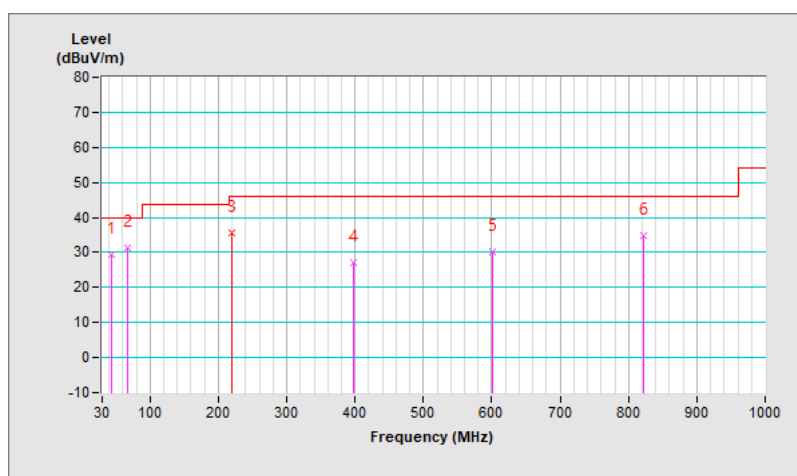

7.7 Unwanted Emissions above 1 GHz

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 73 % RH
Tested By	Dalen Dai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.4 PK	74.0	-20.6	2.62 H	10	54.6	-1.2
2	2390.00	43.5 AV	54.0	-10.5	2.62 H	10	44.7	-1.2
3	*2412.00	110.8 PK			2.62 H	10	111.9	-1.1
4	*2412.00	107.7 AV			2.62 H	10	108.8	-1.1
5	4824.00	48.1 PK	74.0	-25.9	1.73 H	256	40.7	7.4
6	4824.00	37.8 AV	54.0	-16.2	1.73 H	256	30.4	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.6 PK	74.0	-21.4	1.08 V	32	53.8	-1.2
2	2390.00	42.1 AV	54.0	-11.9	1.08 V	32	43.3	-1.2
3	*2412.00	104.5 PK			1.08 V	32	105.6	-1.1
4	*2412.00	101.8 AV			1.08 V	32	102.9	-1.1
5	4824.00	47.5 PK	74.0	-26.5	1.37 V	189	40.1	7.4
6	4824.00	37.4 AV	54.0	-16.6	1.37 V	189	30.0	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 73 % RH
Tested By	Dalen Dai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	111.7 PK			1.61 H	0	112.7	-1.0
2	*2437.00	109.4 AV			1.61 H	0	110.4	-1.0
3	4874.00	48.4 PK	74.0	-25.6	1.85 H	266	40.7	7.7
4	4874.00	38.1 AV	54.0	-15.9	1.85 H	266	30.4	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	105.9 PK			1.13 V	27	106.9	-1.0
2	*2437.00	103.4 AV			1.13 V	27	104.4	-1.0
3	4874.00	47.6 PK	74.0	-26.4	1.29 V	177	39.9	7.7
4	4874.00	37.5 AV	54.0	-16.5	1.29 V	177	29.8	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 73 % RH
Tested By	Dalen Dai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.2 PK			1.59 H	358	110.9	-0.7
2	*2462.00	107.3 AV			1.59 H	358	108.0	-0.7
3	2483.50	54.7 PK	74.0	-19.3	1.59 H	358	55.2	-0.5
4	2483.50	45.9 AV	54.0	-8.1	1.59 H	358	46.4	-0.5
5	4924.00	47.6 PK	74.0	-26.4	1.79 H	248	39.7	7.9
6	4924.00	37.3 AV	54.0	-16.7	1.79 H	248	29.4	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	104.4 PK			1.24 V	39	105.1	-0.7
2	*2462.00	101.6 AV			1.24 V	39	102.3	-0.7
3	2483.50	53.3 PK	74.0	-20.7	1.24 V	39	53.8	-0.5
4	2483.50	42.7 AV	54.0	-11.3	1.24 V	39	43.2	-0.5
5	4924.00	47.1 PK	74.0	-26.9	1.41 V	190	39.2	7.9
6	4924.00	37.2 AV	54.0	-16.8	1.41 V	190	29.3	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 73 % RH
Tested By	Dalen Dai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.5 PK	74.0	-7.5	1.11 H	334	67.7	-1.2
2	2390.00	53.4 AV	54.0	-0.6	1.11 H	334	54.6	-1.2
3	*2412.00	111.8 PK			1.11 H	334	112.9	-1.1
4	*2412.00	103.3 AV			1.11 H	334	104.4	-1.1
5	4824.00	47.6 PK	74.0	-26.4	1.75 H	277	40.2	7.4
6	4824.00	37.3 AV	54.0	-16.7	1.75 H	277	29.9	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.2 PK	74.0	-11.8	1.06 V	11	63.4	-1.2
2	2390.00	49.6 AV	54.0	-4.4	1.06 V	11	50.8	-1.2
3	*2412.00	107.2 PK			1.06 V	11	108.3	-1.1
4	*2412.00	98.1 AV			1.06 V	11	99.2	-1.1
5	4824.00	46.9 PK	74.0	-27.1	1.25 V	184	39.5	7.4
6	4824.00	36.7 AV	54.0	-17.3	1.25 V	184	29.3	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 73 % RH
Tested By	Dalen Dai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	113.4 PK			1.11 H	331	114.4	-1.0
2	*2437.00	104.5 AV			1.11 H	331	105.5	-1.0
3	4874.00	47.8 PK	74.0	-26.2	1.82 H	273	40.1	7.7
4	4874.00	37.5 AV	54.0	-16.5	1.82 H	273	29.8	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	108.8 PK			1.05 V	9	109.8	-1.0
2	*2437.00	99.9 AV			1.05 V	9	100.9	-1.0
3	4874.00	47.2 PK	74.0	-26.8	1.31 V	179	39.5	7.7
4	4874.00	37.0 AV	54.0	-17.0	1.31 V	179	29.3	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 73 % RH
Tested By	Dalen Dai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.6 PK			1.56 H	316	111.3	-0.7
2	*2462.00	101.8 AV			1.56 H	316	102.5	-0.7
3	2483.50	66.7 PK	74.0	-7.3	1.56 H	316	67.2	-0.5
4	2483.50	52.8 AV	54.0	-1.2	1.56 H	316	53.3	-0.5
5	4924.00	47.4 PK	74.0	-26.6	1.72 H	280	39.5	7.9
6	4924.00	37.2 AV	54.0	-16.8	1.72 H	280	29.3	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	105.2 PK			1.03 V	15	105.9	-0.7
2	*2462.00	56.1 AV			1.03 V	15	56.8	-0.7
3	2483.50	59.1 PK	74.0	-14.9	1.03 V	15	59.6	-0.5
4	2483.50	45.4 AV	54.0	-8.6	1.03 V	15	45.9	-0.5
5	4924.00	46.8 PK	74.0	-27.2	1.31 V	179	38.9	7.9
6	4924.00	36.6 AV	54.0	-17.4	1.31 V	179	28.7	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 73 % RH
Tested By	Dalen Dai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.7 PK	74.0	-4.3	1.60 H	324	70.9	-1.2
2	2390.00	53.5 AV	54.0	-0.5	1.60 H	324	54.7	-1.2
3	*2412.00	114.4 PK			1.60 H	324	115.5	-1.1
4	*2412.00	102.3 AV			1.60 H	324	103.4	-1.1
5	4824.00	47.5 PK	74.0	-26.5	1.73 H	269	40.1	7.4
6	4824.00	37.2 AV	54.0	-16.8	1.73 H	269	29.8	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.2 PK	74.0	-7.8	1.27 V	14	67.4	-1.2
2	2390.00	51.8 AV	54.0	-2.2	1.27 V	14	53.0	-1.2
3	*2412.00	108.9 PK			1.27 V	14	110.0	-1.1
4	*2412.00	97.2 AV			1.27 V	14	98.3	-1.1
5	4824.00	46.9 PK	74.0	-27.1	1.30 V	178	39.5	7.4
6	4824.00	36.7 AV	54.0	-17.3	1.30 V	178	29.3	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20 °C, 73 % RH
Tested By	Dalen Dai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	116.5 PK			1.59 H	327	117.5	-1.0
2	*2437.00	104.7 AV			1.59 H	327	105.7	-1.0
3	4874.00	47.6 PK	74.0	-26.4	1.86 H	278	39.9	7.7
4	4874.00	37.4 AV	54.0	-16.6	1.86 H	278	29.7	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	111.2 PK			1.28 V	16	112.2	-1.0
2	*2437.00	99.9 AV			1.28 V	16	100.9	-1.0
3	4874.00	47.1 PK	74.0	-26.9	1.31 V	175	39.4	7.7
4	4874.00	37.1 AV	54.0	-16.9	1.31 V	175	29.4	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 76 % RH
Tested By	Dalen Dai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.1 PK			1.60 H	314	113.8	-0.7
2	*2462.00	102.0 AV			1.60 H	314	102.7	-0.7
3	2483.50	69.5 PK	74.0	-4.5	1.60 H	314	70.0	-0.5
4	2483.50	52.6 AV	54.0	-1.4	1.60 H	314	53.1	-0.5
5	4924.00	47.2 PK	74.0	-26.8	1.80 H	275	39.3	7.9
6	4924.00	37.0 AV	54.0	-17.0	1.80 H	275	29.1	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.5 PK			1.14 V	8	109.2	-0.7
2	*2462.00	96.4 AV			1.14 V	8	97.1	-0.7
3	2483.50	66.7 PK	74.0	-7.3	1.14 V	8	67.2	-0.5
4	2483.50	51.6 AV	54.0	-2.4	1.14 V	8	52.1	-0.5
5	4924.00	47.4 PK	74.0	-26.6	1.76 V	271	39.5	7.9
6	4924.00	37.1 AV	54.0	-16.9	1.76 V	271	29.2	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 76 % RH
Tested By	Dalen Dai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.6 PK	74.0	-2.4	1.15 H	322	72.8	-1.2
2	2390.00	53.2 AV	54.0	-0.8	1.15 H	322	54.4	-1.2
3	*2422.00	112.3 PK			1.15 H	322	113.3	-1.0
4	*2422.00	100.4 AV			1.15 H	322	101.4	-1.0
5	4844.00	47.3 PK	74.0	-26.7	1.76 H	274	39.8	7.5
6	4844.00	37.0 AV	54.0	-17.0	1.76 H	274	29.5	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.6 PK	74.0	-2.4	1.00 V	7	72.8	-1.2
2	2390.00	53.6 AV	54.0	-0.4	1.00 V	7	54.8	-1.2
3	*2422.00	106.3 PK			1.00 V	7	107.3	-1.0
4	*2422.00	94.8 AV			1.00 V	7	95.8	-1.0
5	4844.00	46.8 PK	74.0	-27.2	1.29 V	180	39.3	7.5
6	4844.00	36.7 AV	54.0	-17.3	1.29 V	180	29.2	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 76 % RH
Tested By	Dalen Dai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	111.9 PK			1.35 H	325	112.9	-1.0
2	*2437.00	100.3 AV			1.35 H	325	101.3	-1.0
3	2483.50	67.1 PK	74.0	-6.9	1.35 H	325	67.6	-0.5
4	2483.50	53.2 AV	54.0	-0.8	1.35 H	325	53.7	-0.5
5	4874.00	47.5 PK	74.0	-26.5	1.73 H	271	39.8	7.7
6	4874.00	37.1 AV	54.0	-16.9	1.73 H	271	29.4	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	107.7 PK			1.22 V	3	108.7	-1.0
2	*2437.00	95.6 AV			1.22 V	3	96.6	-1.0
3	2483.50	62.1 PK	74.0	-11.9	1.22 V	3	62.6	-0.5
4	2483.50	48.9 AV	54.0	-5.1	1.22 V	3	49.4	-0.5
5	4874.00	47.4 PK	74.0	-26.6	1.30 V	179	39.7	7.7
6	4874.00	37.1 AV	54.0	-16.9	1.30 V	179	29.4	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 76 % RH
Tested By	Dalen Dai		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	109.6 PK			1.35 H	307	110.5	-0.9
2	*2452.00	97.8 AV			1.35 H	307	98.7	-0.9
3	2483.50	73.4 PK	74.0	-0.6	1.35 H	307	73.9	-0.5
4	2483.50	53.6 AV	54.0	-0.4	1.35 H	307	54.1	-0.5
5	4904.00	47.6 PK	74.0	-26.4	1.76 H	283	39.7	7.9
6	4904.00	37.5 AV	54.0	-16.5	1.76 H	283	29.6	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	105.7 PK			1.00 V	3	106.6	-0.9
2	*2452.00	93.9 AV			1.00 V	3	94.8	-0.9
3	2483.50	69.4 PK	74.0	-4.6	1.00 V	3	69.9	-0.5
4	2483.50	50.9 AV	54.0	-3.1	1.00 V	3	51.4	-0.5
5	4904.00	47.4 PK	74.0	-26.6	1.31 V	174	39.5	7.9
6	4904.00	37.3 AV	54.0	-16.7	1.31 V	174	29.4	7.9


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.


Plot of Band Edge

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11b Channel 1

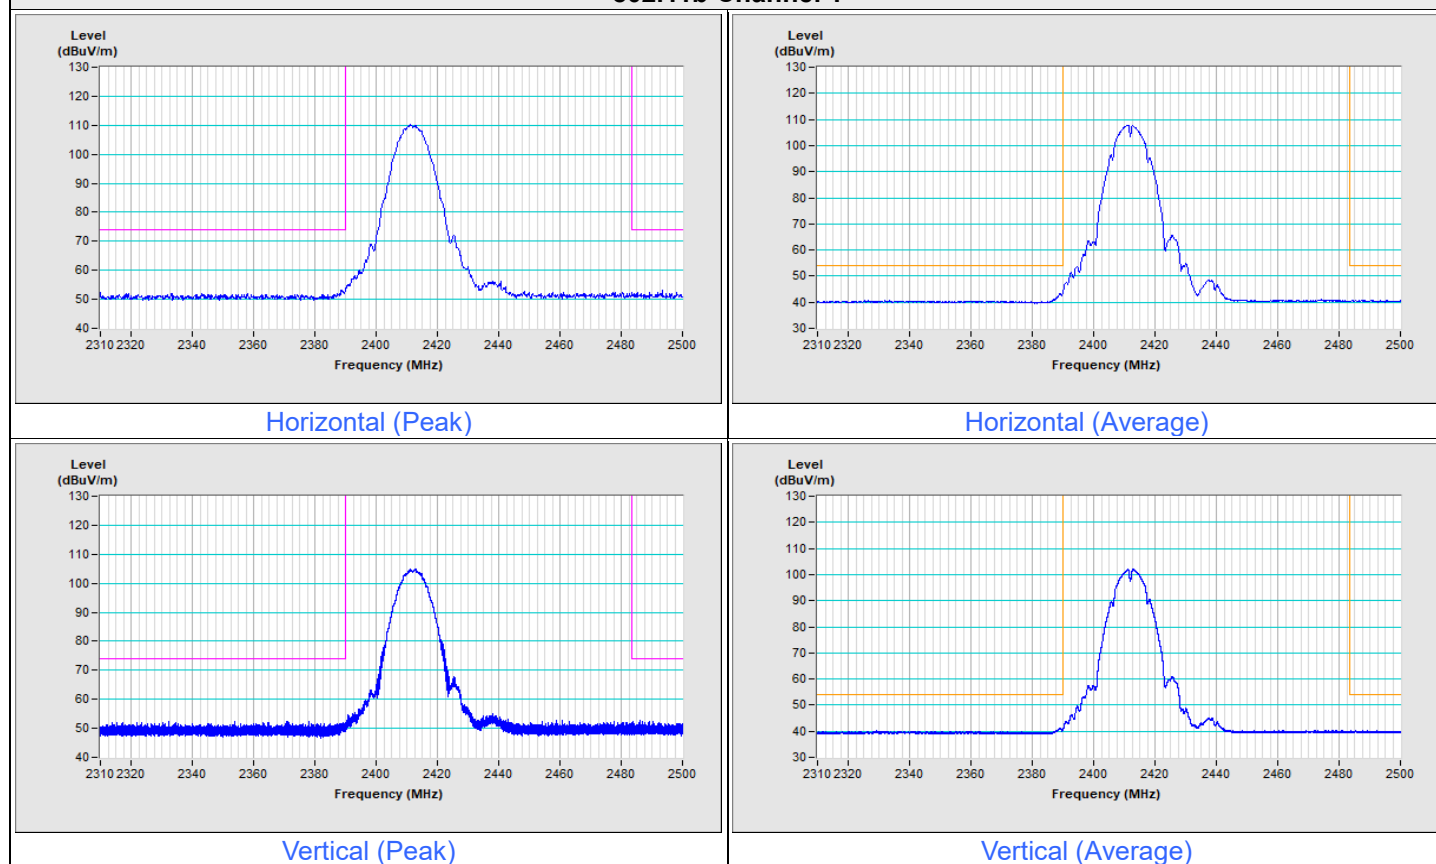


802.11b Channel 11

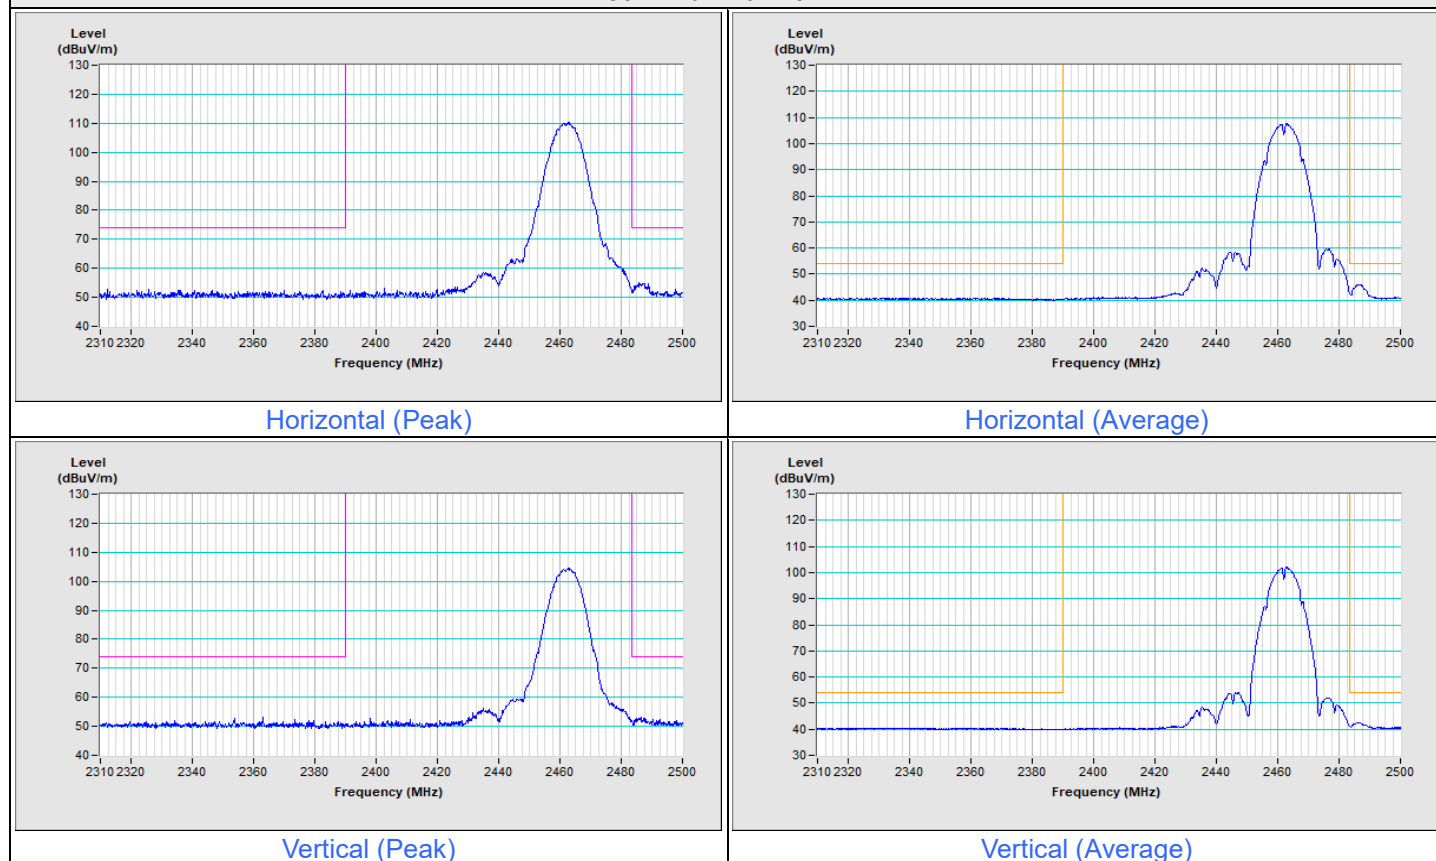


Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11g Channel 1

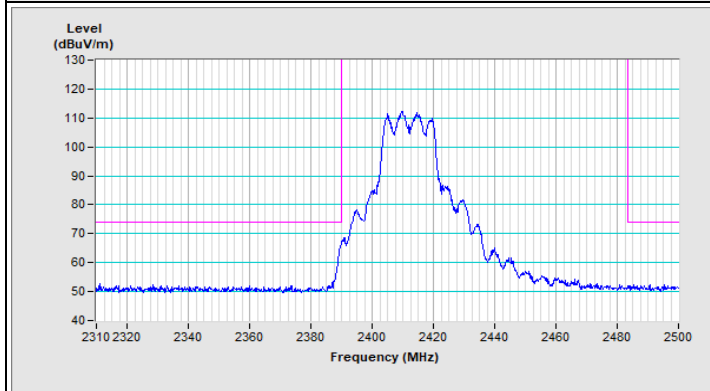


Horizontal (Peak)

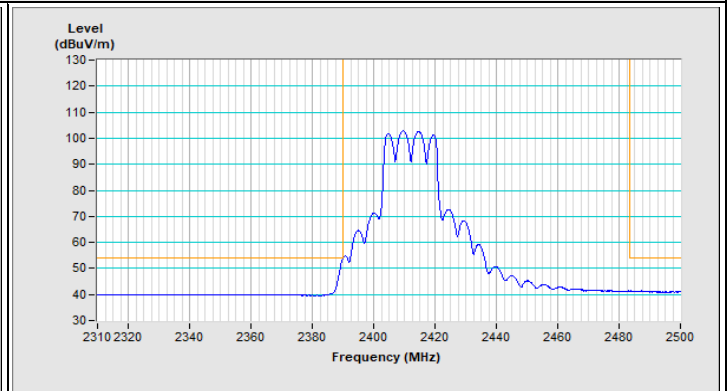

Horizontal (Average)

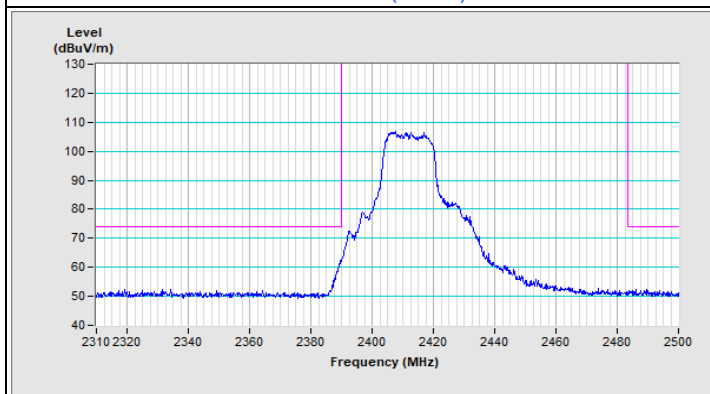


Vertical (Peak)

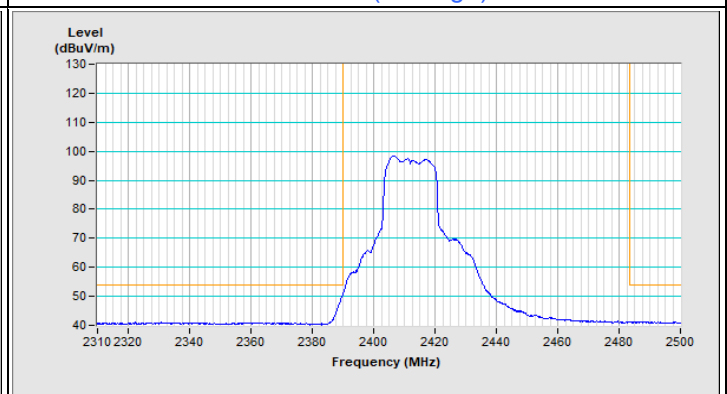


Vertical (Average)


802.11g Channel 11

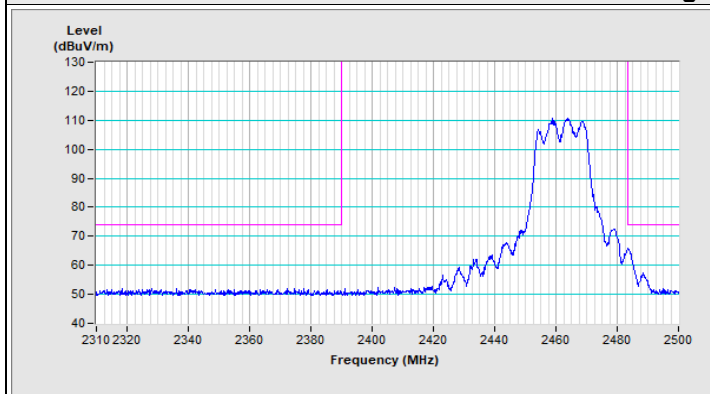


Horizontal (Peak)

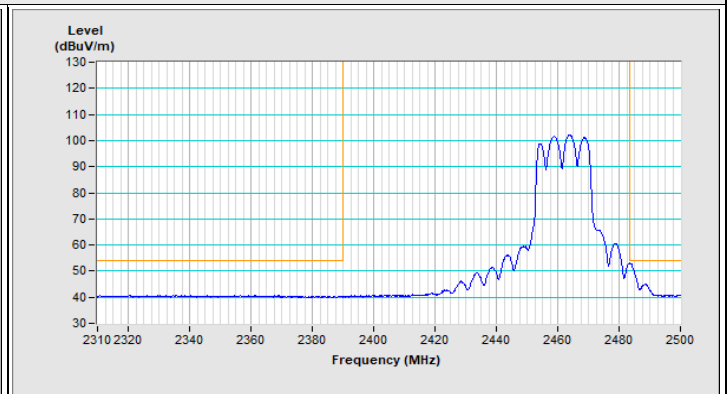

Horizontal (Average)

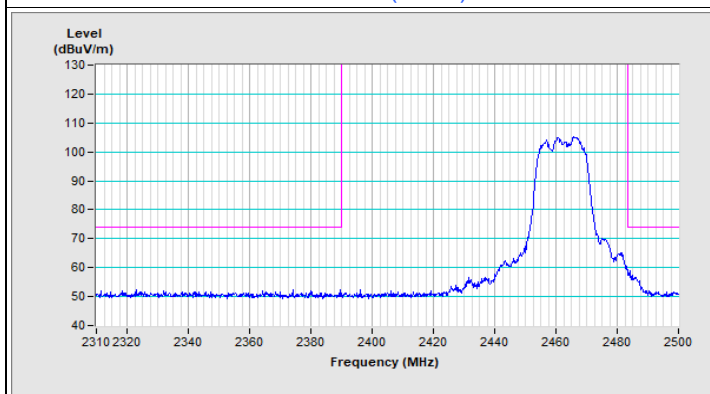


Vertical (Peak)

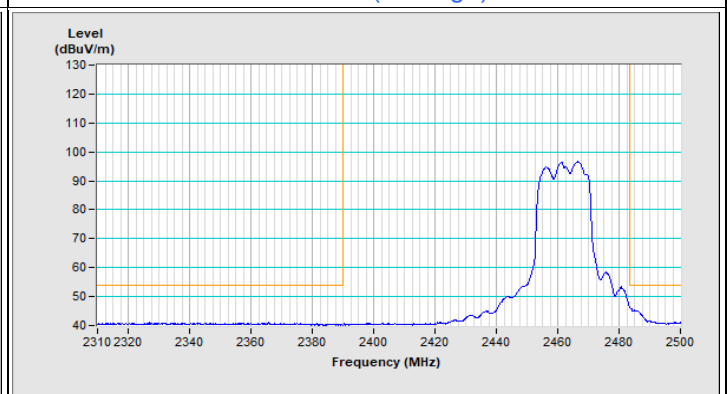


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11ax (HE20) Channel 1

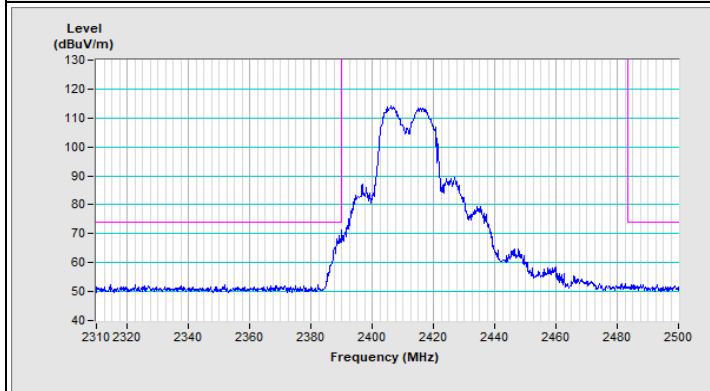


Horizontal (Peak)

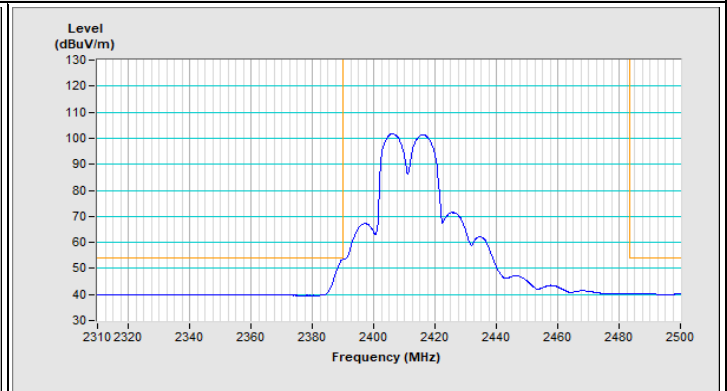

Horizontal (Average)

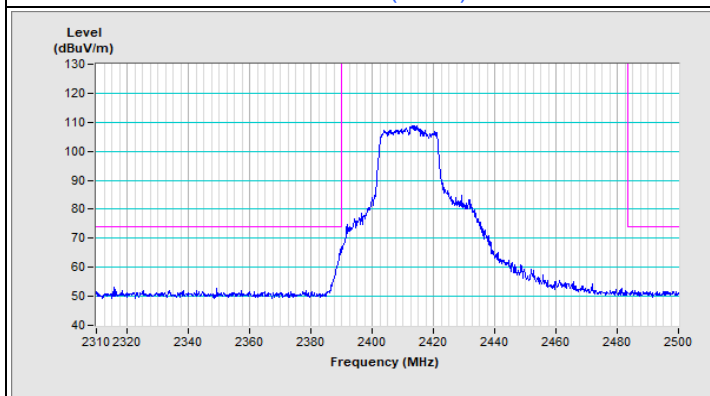


Vertical (Peak)

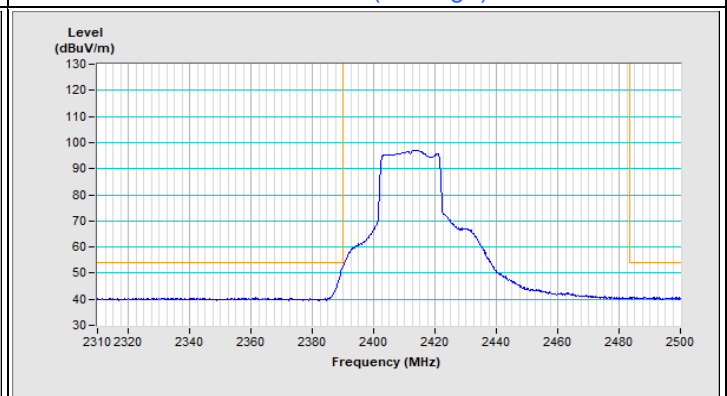


Vertical (Average)


802.11ax (HE20) Channel 11

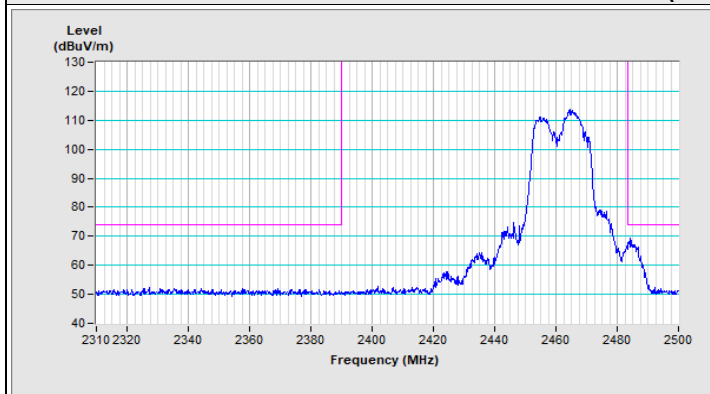


Horizontal (Peak)

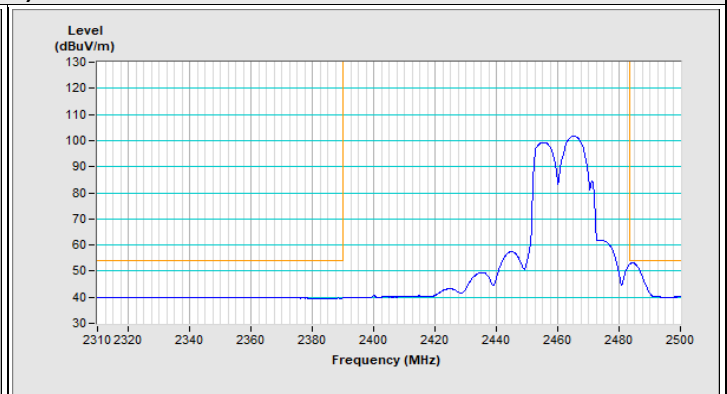

Horizontal (Average)

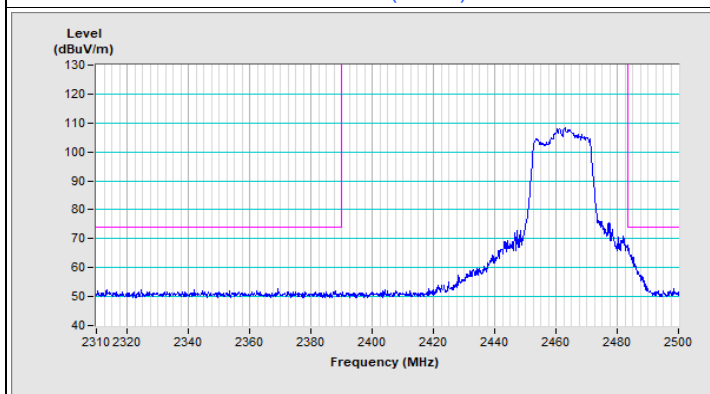


Vertical (Peak)

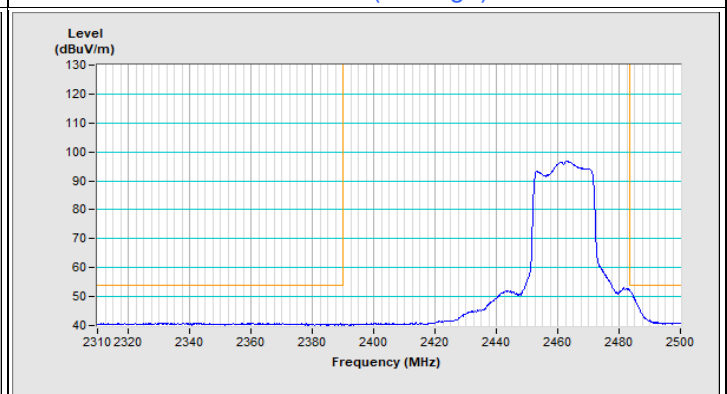


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11ax (HE40) Channel 3

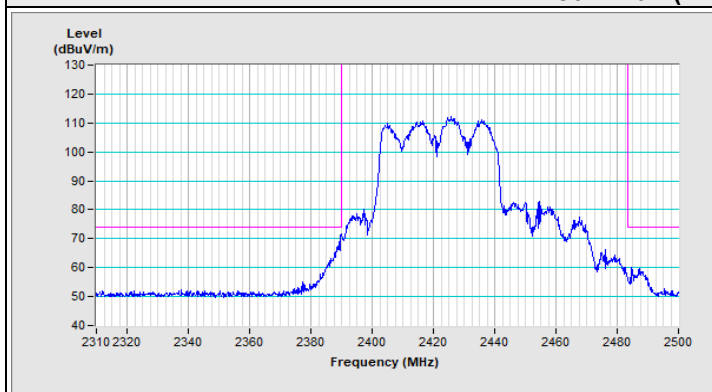


Horizontal (Peak)

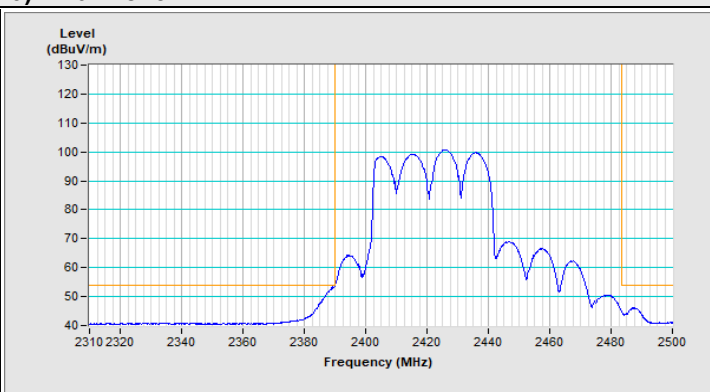

Horizontal (Average)

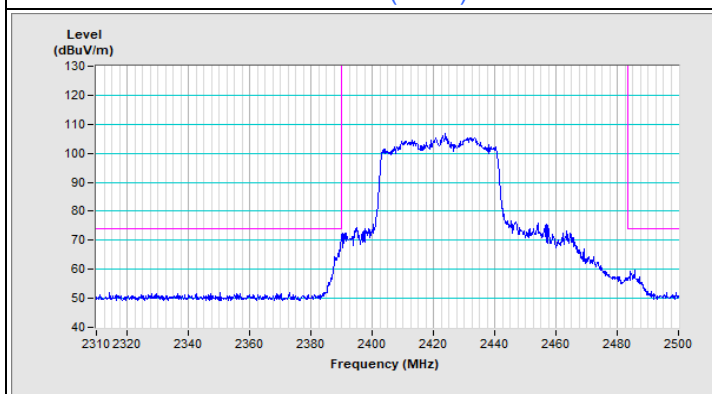


Vertical (Peak)

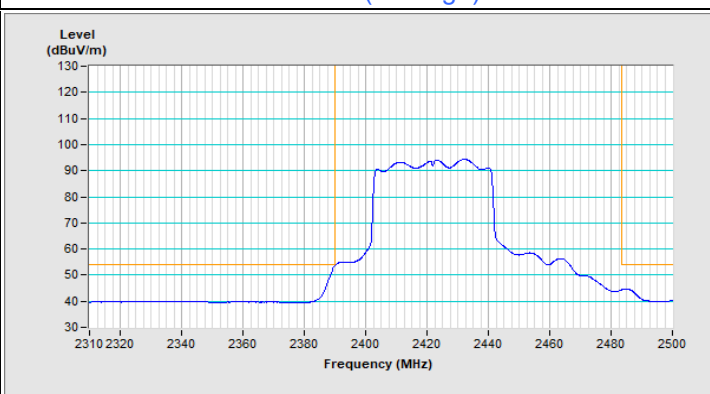


Vertical (Average)


802.11ax (HE40) Channel 9

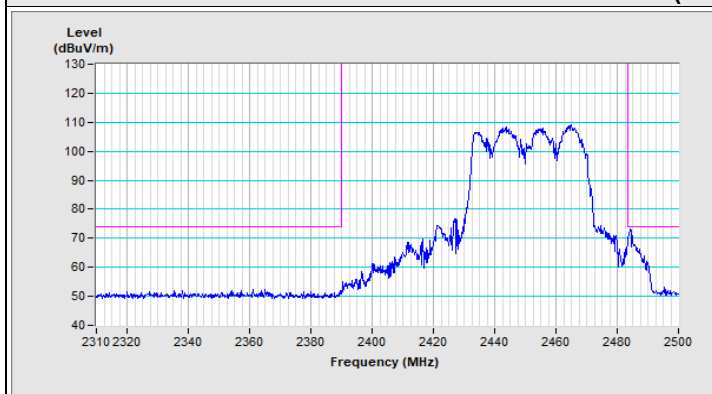


Horizontal (Peak)

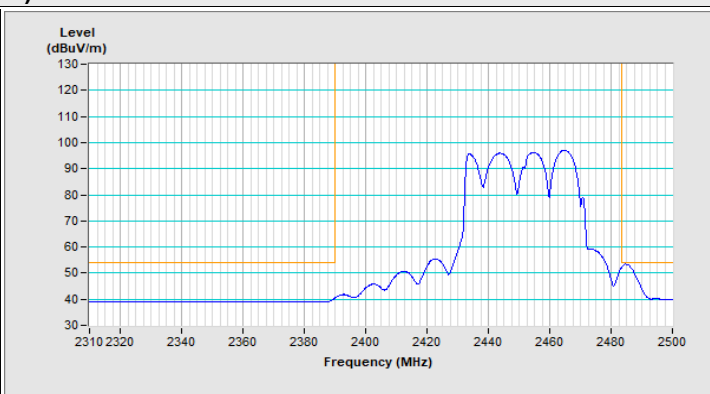

Horizontal (Average)

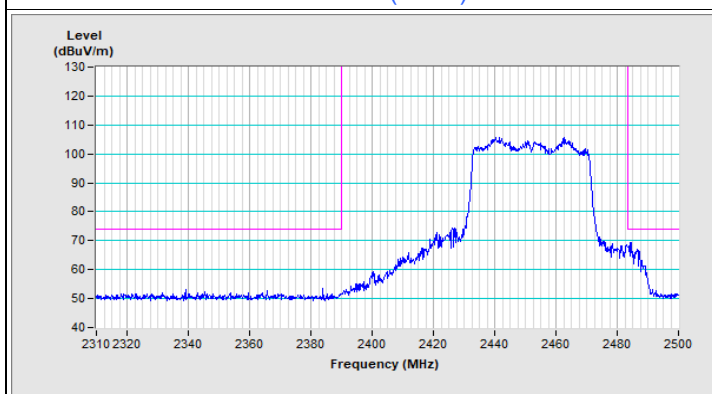

Vertical (Peak)

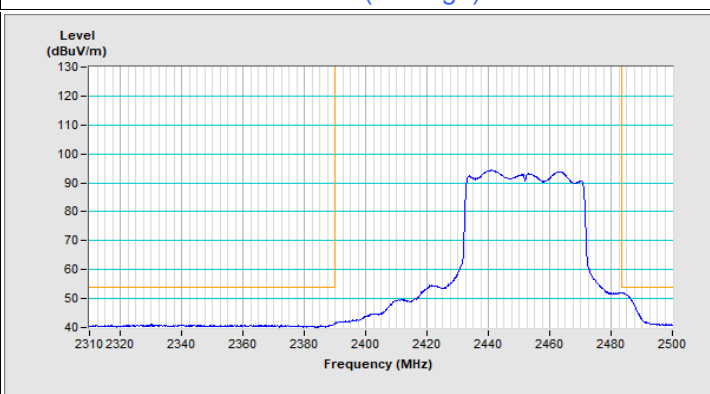

Vertical (Average)

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---