




Restricted Band Measurement Plots:

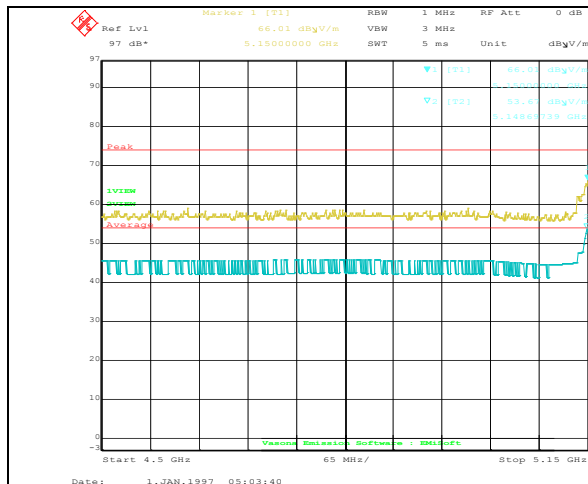


Restricted Band-802.11a 5180M- Edge Freq 5150MHz

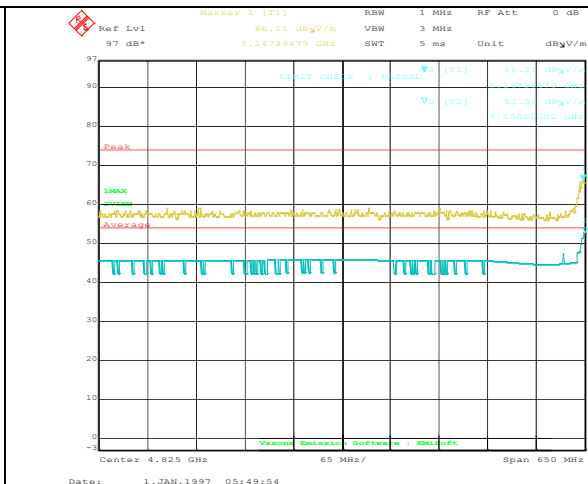

Restricted Band-802.11n-20M 5180M- Edge Freq 5150MHz

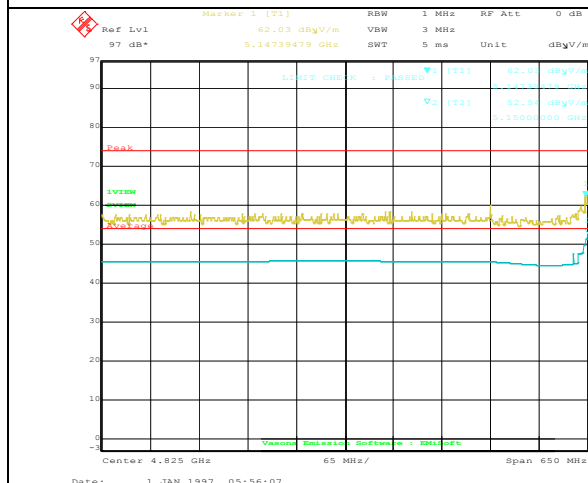

Restricted Band-802.11n-40M 5190M- Edge Freq 5150MHz

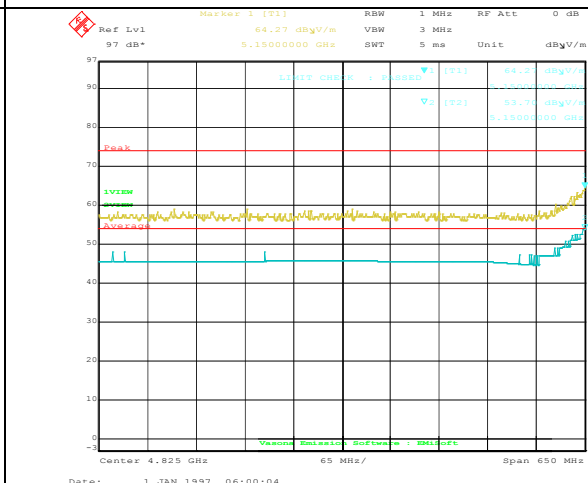

Restricted Band-802.11ac-80M 5210M- Edge Freq 5150MHz

Radiated Emission Test Results (Above 1GHz)

1GHz-40GHz – 802.11a – 5180MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
10361.22	35.19	8.3	9.24	52.73	Peak Max	V	115	174	74	-21.27	Pass
15539.22	41.35	9.02	8.8	59.17	Peak Max	V	194	327	74	-14.83	Pass
10362.5	35.76	8.3	9.24	53.3	Peak Max	H	110	356	74	-20.7	Pass
15539.16	42.03	9.02	8.8	59.85	Peak Max	H	110	356	74	-14.15	Pass
10361.22	25.18	8.3	9.24	42.72	Average Max	V	115	174	54	-11.28	Pass
15539.22	31.34	9.02	8.8	49.16	Average Max	V	194	327	54	-4.84	Pass
10362.5	26.05	8.3	9.24	43.59	Average Max	H	110	356	54	-10.41	Pass
15539.16	32	9.02	8.8	49.82	Average Max	H	110	356	54	-4.18	Pass

1GHz-40GHz – 802.11a – 5200MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
10400	32.55	8.32	9.31	50.18	Peak Max	V	115	174	74	-23.82	Pass
15600.22	40.34	9.03	8.92	58.29	Peak Max	V	194	327	74	-15.71	Pass
10400	35.7	8.32	9.31	53.33	Peak Max	H	110	356	74	-20.67	Pass
15600.22	42.57	9.03	8.92	60.52	Peak Max	H	110	356	74	-13.48	Pass
10400	24.23	8.32	9.31	41.86	Average Max	V	115	174	54	-12.14	Pass
15600.22	31.03	9.03	8.92	48.98	Average Max	V	194	327	54	-5.02	Pass
10400	25.98	8.32	9.31	43.61	Average Max	H	110	356	54	-10.39	Pass
15600.22	32.54	9.03	8.92	50.49	Average Max	H	110	356	54	-3.51	Pass

1GHz-40GHz – 802.11a – 5240MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
10480.16	35.64	8.32	9.49	53.45	Peak Max	V	115	174	74	-20.55	Pass
15720.16	43.46	9.03	9.03	61.52	Peak Max	V	194	327	74	-12.48	Pass
10480.32	37.81	8.32	9.49	55.62	Peak Max	H	110	356	74	-18.38	Pass
15720.32	44.07	9.03	9.03	62.13	Peak Max	H	110	356	74	-11.87	Pass
10480.16	25.64	8.32	9.49	43.45	Average Max	V	115	174	54	-10.55	Pass
15720.16	32.57	9.03	9.03	50.63	Average Max	V	194	327	54	-3.37	Pass
10480.32	27.66	8.32	9.49	45.47	Average Max	H	110	356	54	-8.53	Pass
15720.32	32.21	9.03	9.03	50.27	Average Max	H	110	356	54	-3.73	Pass

1GHz-40GHz – 802.11n-20M – 5180MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
10361.31	34.19	8.3	9.24	51.73	Peak Max	V	115	174	74	-22.27	Pass
15539.31	40.02	9.02	8.8	57.84	Peak Max	V	194	327	74	-16.16	Pass
10362.3	34.88	8.3	9.24	52.42	Peak Max	H	110	356	74	-21.58	Pass
15539.48	41.89	9.02	8.8	59.71	Peak Max	H	110	356	74	-14.29	Pass
10361.31	23.85	8.3	9.24	41.39	Average Max	V	115	174	54	-12.61	Pass
15539.31	28.41	9.02	8.8	46.23	Average Max	V	194	327	54	-7.77	Pass
10362.3	24.63	8.3	9.24	42.17	Average Max	H	110	356	54	-11.83	Pass
15539.48	30.75	9.02	8.8	48.57	Average Max	H	110	356	54	-5.43	Pass

1GHz-40GHz – 802.11n-20M – 5200MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
10400.16	33.16	8.32	9.31	50.79	Peak Max	V	115	174	74	-23.21	Pass
15600.12	41.42	9.03	8.92	59.37	Peak Max	V	194	327	74	-14.63	Pass
10400.16	34.35	8.32	9.31	51.98	Peak Max	H	110	356	74	-22.02	Pass
15600.12	42.23	9.03	8.92	60.18	Peak Max	H	110	356	74	-13.82	Pass
10400.16	24.14	8.32	9.31	41.77	Average Max	V	115	174	54	-12.23	Pass
15600.12	30.32	9.03	8.92	48.27	Average Max	V	194	327	54	-5.73	Pass
10400.16	25.28	8.32	9.31	42.91	Average Max	H	110	356	54	-11.09	Pass
15600.12	32.16	9.03	8.92	50.11	Average Max	H	110	356	54	-3.89	Pass

1GHz-40GHz – 802.11n-20M – 5240MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
10480.23	34.27	8.32	9.49	52.08	Peak Max	V	115	174	74	-21.92	Pass
15720.23	43.23	9.03	9.03	61.29	Peak Max	V	194	327	74	-12.71	Pass
10480.08	35.89	8.32	9.49	53.7	Peak Max	H	110	356	74	-20.3	Pass
15720.08	43.86	9.03	9.03	61.92	Peak Max	H	110	356	74	-12.08	Pass
10480.23	24.72	8.32	9.49	42.53	Average Max	V	115	174	54	-11.47	Pass
15720.23	32.5	9.03	9.03	50.56	Average Max	V	194	327	54	-3.44	Pass
10480.08	25.42	8.32	9.49	43.23	Average Max	H	110	356	54	-10.77	Pass
15720.08	33.18	9.03	9.03	51.24	Average Max	H	110	356	54	-2.76	Pass

1GHz-40GHz – 802.11n-40M – 5190MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
10380.14	33.4	8.3	9.17	50.87	Peak Max	V	115	174	74	-23.13	Pass
15570.14	34.36	9.02	8.73	52.11	Peak Max	V	194	327	74	-21.89	Pass
10380.09	33.45	8.3	9.17	50.92	Peak Max	H	110	356	74	-23.08	Pass
15570.09	34.16	9.02	8.73	51.91	Peak Max	H	110	356	74	-22.09	Pass
10380.14	22.49	8.3	9.17	39.96	Average Max	V	115	174	54	-14.04	Pass
15570.14	24.56	9.02	8.73	42.31	Average Max	V	194	327	54	-11.69	Pass
10380.09	22.36	8.3	9.17	39.83	Average Max	H	110	356	54	-14.17	Pass
15570.09	24.65	9.02	8.73	42.4	Average Max	H	110	356	54	-11.6	Pass

1GHz-40GHz – 802.11n-40M – 5230MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
10460.41	34.39	8.32	9.49	52.2	Peak Max	V	115	174	74	-21.8	Pass
15690.17	40.27	9.03	9.03	58.33	Peak Max	V	194	327	74	-15.67	Pass
10460.09	33.69	8.32	9.49	51.5	Peak Max	H	110	356	74	-22.5	Pass
15690.25	41.41	9.03	9.03	59.47	Peak Max	H	110	356	74	-14.53	Pass
10460.41	22.63	8.32	9.49	40.44	Average Max	V	115	174	54	-13.56	Pass
15690.17	29.19	9.03	9.03	47.25	Average Max	V	194	327	54	-6.75	Pass
10460.09	22.48	8.32	9.49	40.29	Average Max	H	110	356	54	-13.71	Pass
15690.25	30.88	9.03	9.03	48.94	Average Max	H	110	356	54	-5.06	Pass

1GHz-40GHz – 802.11ac-80M – 5210MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
10420.18	32.58	8.3	9.17	50.05	Peak Max	V	115	174	74	-23.95	Pass
15630.18	36.9	9.04	8.73	54.67	Peak Max	V	194	327	74	-19.33	Pass
10420.25	31.75	8.3	9.17	49.22	Peak Max	H	110	356	74	-24.78	Pass
15630.25	35.31	9.04	8.73	53.08	Peak Max	H	110	356	74	-20.92	Pass
10420.18	22.59	8.3	9.17	40.06	Average Max	V	115	174	54	-13.94	Pass
15630.18	25.11	9.04	8.73	42.88	Average Max	V	194	327	54	-11.12	Pass
10420.25	22.48	8.3	9.17	39.95	Average Max	H	110	356	54	-14.05	Pass
15630.25	25.41	9.04	8.73	43.18	Average Max	H	110	356	54	-10.82	Pass

1GHz-40GHz – 802.11a – 5745MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
11490.25	45.5	8.54	8.08	62.12	Peak Max	V	115	174	74	-11.88	Pass
17235.22	45.17	9.31	5.24	59.72	Peak Max	V	194	327	74	-14.28	Pass
11490.43	43.66	8.54	8.08	60.28	Peak Max	H	110	356	74	-13.72	Pass
17235.43	46.22	9.31	5.24	60.77	Peak Max	H	110	356	74	-13.23	Pass
11490.25	35.21	8.54	8.08	51.83	Average Max	V	115	174	54	-2.17	Pass
17235.22	34.59	9.31	5.24	49.14	Average Max	V	194	327	54	-4.86	Pass
11490.43	33.33	8.54	8.08	49.95	Average Max	H	110	356	54	-4.05	Pass
17235.43	34.87	9.31	5.24	49.42	Average Max	H	110	356	54	-4.58	Pass

1GHz-40GHz - 802.11a– 5785MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
11570.14	44.64	8.56	8.02	61.22	Peak Max	V	115	174	74	-12.78	Pass
17355.14	45.01	9.4	4.15	58.56	Peak Max	V	194	327	74	-15.44	Pass
11570.21	41.59	8.56	8.02	58.17	Peak Max	H	110	356	74	-15.83	Pass
17355.21	44.97	9.4	4.15	58.52	Peak Max	H	110	356	74	-15.48	Pass
11570.14	35.5	8.56	8.02	52.08	Average Max	V	115	174	54	-1.92	Pass
17355.14	34.6	9.4	4.15	48.15	Average Max	V	194	327	54	-5.85	Pass
11570.21	31.67	8.56	8.02	48.25	Average Max	H	110	356	54	-5.75	Pass
17355.21	34.17	9.4	4.15	47.72	Average Max	H	110	356	54	-6.28	Pass

1GHz-40GHz - 802.11a - 5825MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
11650.42	46.07	8.58	8.01	62.66	Peak Max	V	115	174	74	-11.34	Pass
17475.42	45.43	9.38	3.94	58.75	Peak Max	V	194	327	74	-15.25	Pass
11650.23	41.59	8.58	8.01	58.18	Peak Max	H	110	356	74	-15.82	Pass
17475.23	46.76	9.38	3.94	60.08	Peak Max	H	110	356	74	-13.92	Pass
11650.42	35.74	8.58	8.01	52.33	Average Max	V	115	174	54	-1.67	Pass
17475.42	35.63	9.38	3.94	48.95	Average Max	V	194	327	54	-5.05	Pass
11650.23	31.67	8.58	8.01	48.26	Average Max	H	110	356	54	-5.74	Pass
17475.23	35.15	9.38	3.94	48.47	Average Max	H	110	356	54	-5.53	Pass

1GHz-40GHz – 802.11n-20M – 5745MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
11650.18	43.4	8.54	8.08	60.02	Peak Max	V	115	174	74	-13.98	Pass
17475.18	45.74	9.31	5.24	60.29	Peak Max	V	194	327	74	-13.71	Pass
11650.24	42.73	8.54	8.08	59.35	Peak Max	H	110	356	74	-14.65	Pass
17475.24	44.66	9.31	5.24	59.21	Peak Max	H	110	356	74	-14.79	Pass
11650.18	31.91	8.54	8.08	48.53	Average Max	V	115	174	54	-5.47	Pass
17475.18	34.47	9.31	5.24	49.02	Average Max	V	194	327	54	-4.98	Pass
11650.24	30.72	8.54	8.08	47.34	Average Max	H	110	356	54	-6.66	Pass
17475.24	33.95	9.31	5.24	48.5	Average Max	H	110	356	54	-5.5	Pass

1GHz-40GHz - 802.11n-20M– 5785MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
11570.14	44.43	8.56	8.02	61.01	Peak Max	V	115	174	74	-12.99	Pass
17355.14	44.31	9.4	4.15	57.86	Peak Max	V	194	327	74	-16.14	Pass
11570.21	41.68	8.56	8.02	58.26	Peak Max	H	110	356	74	-15.74	Pass
17355.21	46.12	9.4	4.15	59.67	Peak Max	H	110	356	74	-14.33	Pass
11570.14	32.87	8.56	8.02	49.45	Average Max	V	115	174	54	-4.55	Pass
17355.14	34.15	9.4	4.15	47.7	Average Max	V	194	327	54	-6.3	Pass
11570.21	30.3	8.56	8.02	46.88	Average Max	H	110	356	54	-7.12	Pass
17355.21	34.31	9.4	4.15	47.86	Average Max	H	110	356	54	-6.14	Pass

1GHz-40GHz - 802.11n-20M - 5825MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
11650.42	44.66	8.58	8.01	61.25	Peak Max	V	115	174	74	-12.75	Pass
17475.42	44.99	9.38	3.94	58.31	Peak Max	V	194	327	74	-15.69	Pass
11650.23	43.62	8.58	8.01	60.21	Peak Max	H	110	356	74	-13.79	Pass
17475.23	45.9	9.38	3.94	59.22	Peak Max	H	110	356	74	-14.78	Pass
11650.42	32.79	8.58	8.01	49.38	Average Max	V	115	174	54	-4.62	Pass
17475.42	34.97	9.38	3.94	48.29	Average Max	V	194	327	54	-5.71	Pass
11650.23	32.91	8.58	8.01	49.5	Average Max	H	110	356	54	-4.5	Pass
17475.23	36.32	9.38	3.94	49.64	Average Max	H	110	356	54	-4.36	Pass

1GHz-40GHz – 802.11n-40M – 5755MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
11510.62	41.69	8.54	8.08	58.31	Peak Max	V	115	174	74	-15.69	Pass
17265.62	46.83	9.43	3.05	59.31	Peak Max	V	194	327	74	-14.69	Pass
11510.45	39.48	8.54	8.08	56.1	Peak Max	H	110	356	74	-17.9	Pass
17265.45	46.26	9.43	3.05	58.74	Peak Max	H	110	356	74	-15.26	Pass
11510.62	32.68	8.54	8.08	49.3	Average Max	V	115	174	54	-4.7	Pass
17265.62	35.45	9.43	3.05	47.93	Average Max	V	194	327	54	-6.07	Pass
11510.45	29.78	8.54	8.08	46.4	Average Max	H	110	356	54	-7.6	Pass
17265.45	35.75	9.43	3.05	48.23	Average Max	H	110	356	54	-5.77	Pass

1GHz-40GHz - 802.11n-40M– 5795MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
11590.43	43.76	8.57	8.02	60.35	Peak Max	V	115	174	74	-13.65	Pass
17385.43	45.92	9.34	3.94	59.2	Peak Max	V	194	327	74	-14.8	Pass
11590.18	41.66	8.57	8.02	58.25	Peak Max	H	110	356	74	-15.75	Pass
17385.18	44.72	9.34	3.94	58	Peak Max	H	110	356	74	-16	Pass
11590.43	33.84	8.57	8.02	50.43	Average Max	V	115	174	54	-3.57	Pass
17385.43	35.16	9.34	3.94	48.44	Average Max	V	194	327	54	-5.56	Pass
11590.18	30.84	8.57	8.02	47.43	Average Max	H	110	356	54	-6.57	Pass
17385.18	34.14	9.34	3.94	47.42	Average Max	H	110	356	54	-6.58	Pass

1GHz-40GHz - 802.11ac-80M - 5775MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
11550.23	39.52	8.55	8.07	56.14	Peak Max	V	115	174	74	-17.86	Pass
17325.23	45.59	9.35	4.12	59.06	Peak Max	V	194	327	74	-14.94	Pass
11550.42	38.35	8.55	8.07	54.97	Peak Max	H	110	356	74	-19.03	Pass
17325.42	45.74	9.35	4.12	59.21	Peak Max	H	110	356	74	-14.79	Pass
11550.23	30.31	8.55	8.07	46.93	Average Max	V	115	174	54	-7.07	Pass
17325.23	34.72	9.35	4.12	48.19	Average Max	V	194	327	54	-5.81	Pass
11550.42	28.07	8.55	8.07	44.69	Average Max	H	110	356	54	-9.31	Pass
17325.42	35.09	9.35	4.12	48.56	Average Max	H	110	356	54	-5.44	Pass

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
Conducted Emissions						
R & S Receiver	ESIB 40	100179	06/08/2016	1 Year	06/08/2017	☒
CHASE LISN	MN2050B	1018	08/07/2015	1 Year	08/07/2016	☒
Radiated Emissions						
R & S Receiver	ESIB 40	1018	08/07/2015	1 Year	08/07/2016	☒
Bi-Log antenna (30MHz~2GHz)	JB1	A030702	08/12/2015	1 Year	08/12/2016	☒
Horn Antenna (1GHz~26GHz)	3115	100059	08/25/2015	1 Year	08/25/2016	☒
Horn Antenna (26GHz~40GHz)	AH-840	101013	08/28/2015	1 Year	08/28/2016	☒
Pre-Amp (30MHz~40GHz)	LPA-6-30	11140711	02/10/2016	1 Year	02/10/2017	☒
3 Meters SAC	3M	N/A	08/08/2015	1 Year	08/08/2016	☒
10 Meters SAC	10M	N/A	09/05/2015	1 Year	09/05/2016	☒
RF Conducted Measurement						
Spectrum Analyzer	N9010A	10SL0219	08/20/2015	1 Year	08/20/2016	☒
R & S Receiver	ESIB 40	100179	06/08/2016	1 Year	06/08/2017	☒
ETS-Lingren USB RF Power Sensor	7002-006	10SL0190	09/03/2015	1 Year	09/03/2016	☒

Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		A1 , A2 , A3 , A4 , B1 , B2 , B3 , B4 , C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		Radio & Telecommunications Terminal Equipment: EN45001 – EN ISO/IEC 17025
		Electromagnetic Compatibility: EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)	 	Phase I , Phase II
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
Hong Kong OFCA		(Phase II) OFCA Foreign Certification Body for Radio and Telecom
		(Phase I) Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		Radio: Scope A – All Radio Standard Specification in Category I
		Telecom: CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		Radio: A1. Terminal equipment for purpose of calling Telecom: B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law
Korea CAB Accreditation		EMI: KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI EMS: KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS Radio: RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68 Telecom: President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		R-3083: Radiation 3 meter site C-3421: Main Ports Conducted Interference Measurement T-1597: Telecommunication Ports Conducted Interference Measurement
Australia CAB Recognition		EMC: AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4 Radio communications: AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771 Telecommunications: AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06, AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2