



FCC RADIO TEST REPORT

FCC ID : S9GR770
Equipment : R770 Access Point
Brand Name : RUCKUS
Model Name : R770
Applicant : Ruckus Wireless LLC
350 W. Java Dr., Sunnyvale CA 94089 USA
Manufacturer : Ruckus Wireless LLC
350 W. Java Dr., Sunnyvale CA 94089 USA
Standard : FCC Part 15 Subpart E §15.407

The product was received on Jan. 03, 2024 and testing was performed from Jan. 16, 2025 to Mar. 10, 2025. We, Sporton International (USA) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval from Sporton International (USA) Inc., the test report shall not be reproduced except in full.

Approved by: Neil Kao

Sporton International (USA) Inc.
1175 Montague Expressway, Milpitas, CA 95035



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	7
1.3 Testing Location	8
1.4 Applicable Standards.....	8
2 Test Configuration of Equipment Under Test	9
2.1 Carrier Frequency and Channel	9
2.2 Test Mode.....	11
2.3 Connection Diagram of Test System.....	12
2.4 Support Unit used in test configuration and system	12
2.5 EUT Operation Test Setup	13
2.6 Measurement Results Explanation Example.....	13
3 Test Result	14
3.1 99% Occupied Bandwidth Measurement	14
3.2 Maximum Conducted Output Power Measurement	15
3.3 Power Spectral Density Measurement	17
3.4 Unwanted Emissions Measurement	19
3.5 Antenna Requirements	24
4 List of Measuring Equipment.....	25
5 Measurement Uncertainty	26
Appendix A. Conducted Test Results	
Appendix B. Radiated Spurious Emission Test Data	
Appendix C. Duty Cycle Plots	
Appendix D. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR230524001-06A	01	Initial issue of report	May 13, 2025
FR230524001-06A	02	Revise Appendix A This report is an updated version, replacing the report issued on May 13, 2025.	May 20, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	15.403	26dB Bandwidth	Pass	See Note
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	Pass	-
3.3	15.407(a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	-
-	15.207	AC Conducted Emission	Pass	See Note
3.5	15.203	Antenna Requirement	Pass	-

Note: This is a variant report intend to show compliace after replaced a new RF filter and change of small components, such as Resistor, Capacitors, and inductors. All the test cases were performed on original report which can be referred to Sporton Report Number FR230524001D. Based on the original report, the test cases were verified.

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs	Bluetooth-LE, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax/be, Wi-Fi 5GHz 802.11a/n/ac/ax/be, Wi-Fi 6GHz 802.11a/n/ac/ax/be, GPS and ZigBee.
Antenna Type	WLAN: <Ant. A>: Omni-Directional Antenna <Ant. B>: Omni-Directional Antenna <Ant. C>: Omni-Directional Antenna <Ant. D>: Omni-Directional Antenna <Ant. E>: Omni-Directional Antenna <Ant. F>: Omni-Directional Antenna Bluetooth-LE/ZigBee: Omni-Directional Antenna GPS: Omni-Directional Antenna

Antenna information		
5180 MHz ~ 5240 MHz	Peak Gain (dBi)	<Ant. D>: 3.6 <Ant. B>: 3.1 <Ant. C>: 3.1 <Ant. A>: 3.6
5260 MHz ~ 5320 MHz	Peak Gain (dBi)	<Ant. D>: 3.2 <Ant. B>: 3.2 <Ant. C>: 3.2 <Ant. A>: 3.2
5500 MHz ~ 5720 MHz	Peak Gain (dBi)	<Ant. D>: 3.2 <Ant. B>: 3.2 <Ant. C>: 3.2 <Ant. A>: 3.2

Remark:

1. The device is a special case of MIMO system with four outputs driving a cross-polarized pair of linearly polarized antennas which are vertically/horizontally mounted on the PCB board as indicated in equipment photo exhibits.
2. The EUT information mentioned or listed above is declared by the manufacturer.

1.1.1 Antenna Directional Gain

The device is the special case of a MIMO system with four outputs driving a cross-polarized pair of linearly polarized antennas (noted as “vertical” and “horizontal”).

Refer to KDB 662911 D01 v02r01 F)2)c) for a system in which the antennas have fixed orientations relative to one another that ensure that the antennas are cross-polarized regardless of any user actions, the directional gain is computed as follows.

The total gain—including array gain—is computed separately for each of the two polarizations using the procedures presented in KDB 662911 D01 v02r01. The highest of the total gains shall apply.

For power measurements on IEEE 802.11 devices,

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

G_{ANT} is set equal to the gain of the antenna having the highest gain.

For PSD measurements, the directional gain calculation follows F)2)f)i) of KDB 662911 D01

Directional gain = $G_{ANT\ MAX} + 10 \log(N_{ANT}/N_{SS})$ dBi, where N_{SS} = the number of independent spatial streams of data and $G_{ANT\ MAX}$ is the gain of the antenna having the highest gain (in dBi).

	Ant D Vertical polarization (dBi)	Ant A Vertical polarization (dBi)	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
Band I	3.60	3.60	3.60	6.61	0.00	0.61
Band II	3.20	3.20	3.20	6.21	0.00	0.21
Band III	3.20	3.20	3.20	6.21	0.00	0.21

	Ant B Horizontal polarization (dBi)	Ant C Horizontal polarization (dBi)	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
Band I	3.10	3.10	3.10	6.11	0.00	0.11
Band II	3.20	3.20	3.20	6.21	0.00	0.21
Band III	3.20	3.20	3.20	6.21	0.00	0.21

Calculation:

Directional gain of power measurement:

= max. antenna gain (3.6dBi, 3.6dBi) + 0 = 3.6 dBi

Directional gain of PSD measurement (Horizontal polarization):

= max. antenna gain (3.1dBi, 3.1dBi)+10*log(2/1) = 6.11dBi

Directional gain of PSD measurement (Vertical polarization):

= max. antenna gain (3.6dBi, 3.6dBi)+10*log(2/1) = 6.61dBi

Directional gain of PSD measurement:

= max directional gain of Horizontal and Vertical

= max. directional gain (6.11dBi, 6.61dBi) = 6.61 dBi

Modification of EUT

No modifications made to the EUT during the testing.

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

Test Site	Sporton International (USA) Inc.
Test Site Location	1175 Montague Expressway, Milpitas, CA 95035 TEL : 408 9043300
Test Site No.	Sporton Site No. TH01-CA, CO01-CA, 03CH02-CA

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: US1250

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark: All the test items were validated and recorded in accordance with the standards without any modification during the testing.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5725 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq. (MHz)
5150-5350 MHz	50 [@]	5250
5470-5725 MHz	114 [@]	5570

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142*	5710		

Note:

1. The above Frequency and Channel with "*" are 802.11n HT40 and 802.11ac VHT40 and 802.11ax HE40 and 802.11be EHT40.
2. The above Frequency and Channel with "[#]" are 802.11ac VHT80 and 802.11ax HE80 and 802.11be EHT80.
3. The above Frequency and Channel with "@^u" are 802.11ac VHT160 and 802.11ax HE160 and 802.11be EHT160.

2.2 Test Mode

The final test modes include the worst data rates for each modulation shown in the table below.


MIMO Mode

Specification	MCS index /Data Rate
802.11a	6 Mbps
802.11n HT20 (Covered by EHT20)	MCS0
802.11n HT40 (Covered by EHT40)	MCS0
802.11ac VHT20 (Covered by EHT20)	MCS0
802.11ac VHT40 (Covered by EHT40)	MCS0
802.11ac VHT80 (Covered by EHT80)	MCS0
802.11ac VHT160 (Covered by EHT160)	MCS0
802.11ax HE20 (Covered by EHT20)	MCS0
802.11ax HE40 (Covered by EHT40)	MCS0
802.11ax HE80 (Covered by EHT80)	MCS0
802.11ax HE160 (Covered by EHT160)	MCS0
802.11be EHT20	MCS0
802.11be EHT40	MCS0
802.11be EHT80	MCS0
802.11be EHT160	MCS0

Remark:

- 1 Based on the manufacturer's declaration, 802.11be covers the 802.11n, 11ac and 11ax due to the same modulation family scheme. For 802.11be, only full resource unit assignment mode is tested since the EUT does not support partial resource unit assignment mode.
- 2 Based on the manufacturer's declaration, RF power on each chain in MIMO mode is parameterized to be greater than the power in SISO mode, giving the condition that the SISO Mode is covered by MIMO Mode which is deemed the worst case selected for testing.
- 3 The EUT information mentioned or listed above is declared by the manufacturer.
- 4 For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.
- 5 The detailed radiated test modes are shown in Appendix B.

2.3 Connection Diagram of Test System

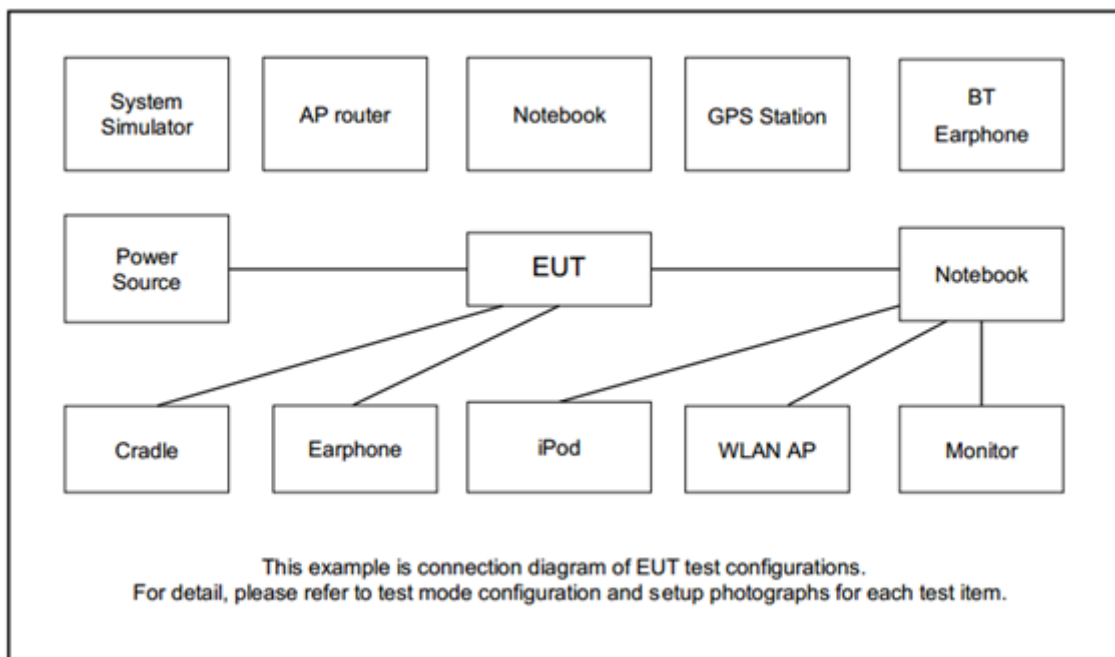

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Laptop	DELL	Latitue 5410	N/A	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
2.	POE Adapter	Ruckus	GRT-480125A	NA	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “QSPR Version 6.00.00169.2” and “QUTS Version1.18.2.17” was installed in laptop which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 99% Occupied Bandwidth Measurement

3.1.1 Description of 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For the 5.15–5.25 GHz bands:

■ For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25–5.725 GHz bands:

■ The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures


The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

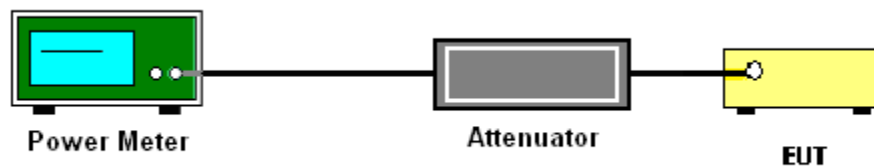

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For the 5.15–5.25 GHz bands:

The maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25–5.725 GHz bands:

The maximum power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section F) Maximum power spectral density.

Method SA-2


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT is connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 4 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points; the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2, output 3 and output 4 to obtain the value for the first frequency bin of the summed spectrum.

3.3.4 Test Setup

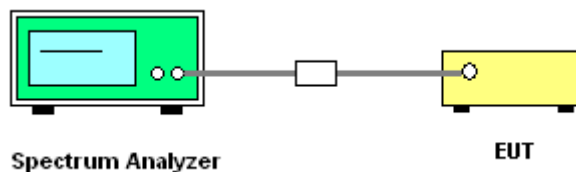

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions falls in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dB μ V/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

(i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.

(ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000 MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold


(3) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW $\geq$ $1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.

3.4.4 Test Setup


For radiated emissions below 30MHz

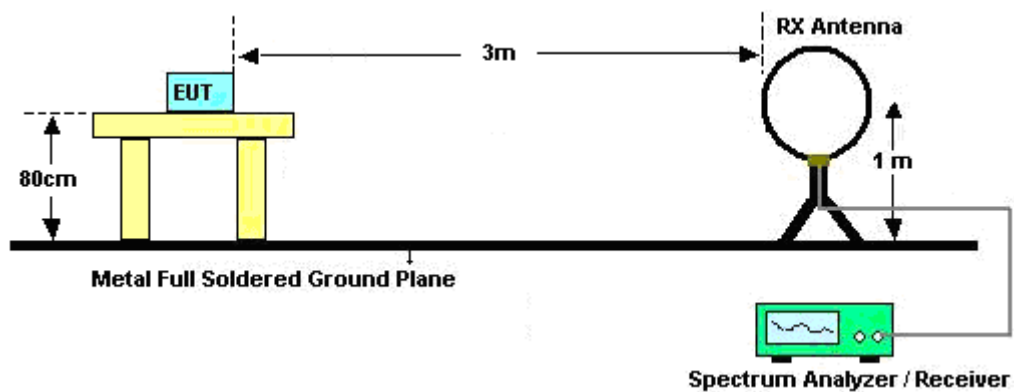


For radiated emissions from 30MHz to 1GHz

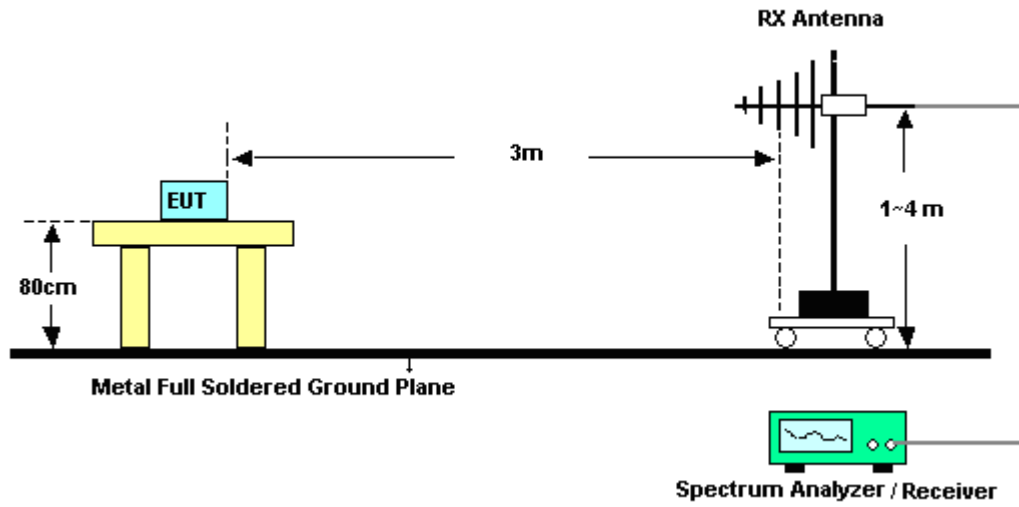

For radiated test from 1GHz to 18GHz

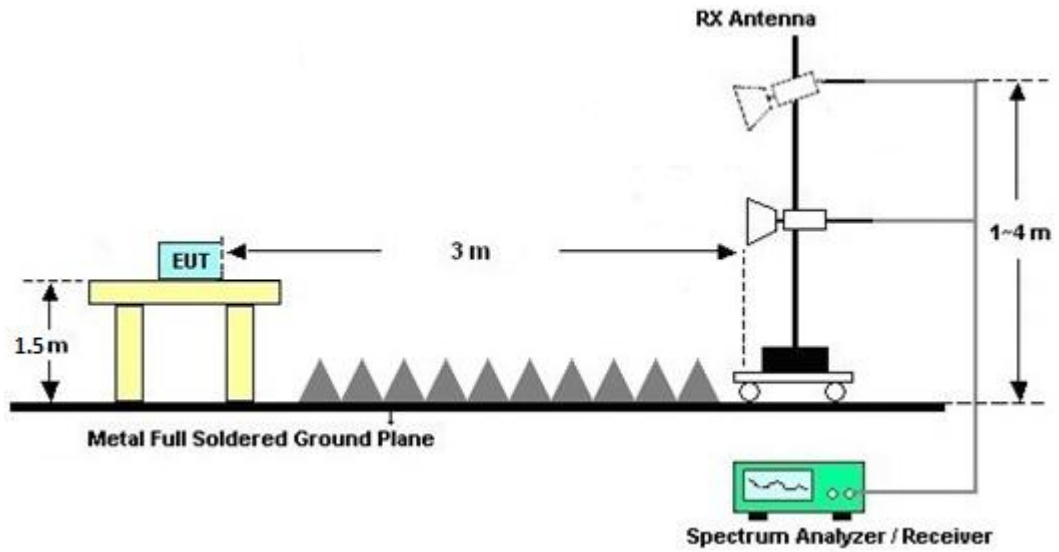

For radiated test above 18GHz

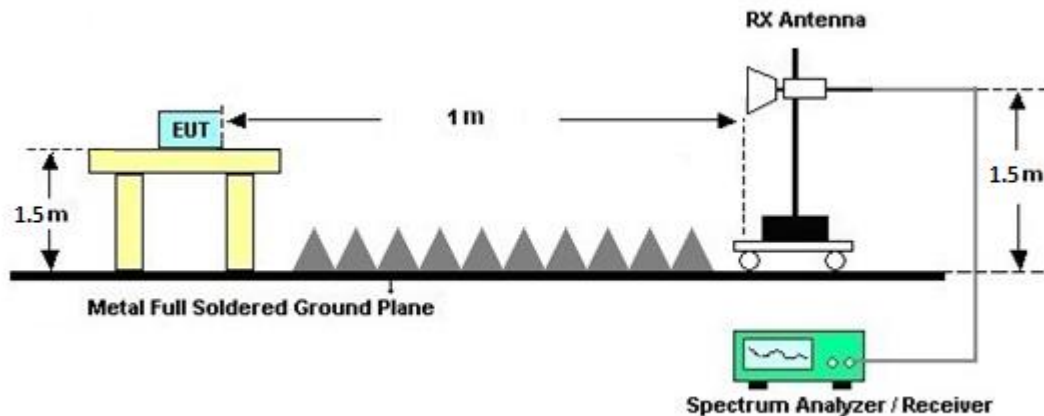

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.4.7 Duty Cycle

Please refer to Appendix C.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix B.



3.5 Antenna Requirements

3.5.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.5.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	6111D	50392	30MHz~1GHz	Aug. 13, 2024	Jan. 16, 2025~ Mar. 10, 2025	Nov. 12, 2025	Radiation (03CH02-CA)
Loop Antenna	R&S	HFH2-Z2E	100840	9kHz~30MHz	May 02, 2024	Jan. 16, 2025~ Mar. 10, 2025	May 01, 2025	Radiation (03CH02-CA)
Horn Antenna	SCHWARZBE CK	BBHA 9120D	02140	1GHz~18GHz	Jan. 29, 2024	Jan. 16, 2025~ Jan. 27, 2025	Jan. 28, 2025	Radiation (03CH02-CA)
Horn Antenna	SCHWARZBE CK	BBHA 9120D	02115	1GHz~18GHz	Aug. 06, 2024	Jan. 28, 2025~ Mar. 10, 2025	Aug. 05, 2025	Radiation (03CH02-CA)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA9170	00841	18GHz~40GHz	Aug. 07, 2024	Jan. 16, 2025~ Mar. 10, 2025	Aug. 06, 2025	Radiation (03CH02-CA)
Amplifier	SONOMA	310N	372240	9kHz~1GHz	Apr. 24, 2024	Jan. 16, 2025~ Mar. 10, 2025	Apr. 23, 2025	Radiation (03CH02-CA)
Filter	WOKEN	WFIL-H6750-1 8000F	WR67BWC6B 1	6.75GHz High Pass Filter	Jun. 04, 2024	Jan. 16, 2025~ Mar. 10, 2025	Jun. 03, 2025	Radiation (03CH02-CA)
Filter	Wainwright	WLK12-1200-1 272-11000-40 SS	SN1	1.2GHz Low Pass Filter	Jun. 04, 2024	Jan. 16, 2025~ Mar. 10, 2025	Jun. 03, 2025	Radiation (03CH02-CA)
Preamplifier	Keysight	83017A	MY53270321	1GHz~26.5GHz	Apr. 25, 2024	Jan. 16, 2025~ Mar. 10, 2025	Apr. 24, 2025	Radiation (03CH02-CA)
Preamplifier	E-instrument	ERA-100M-18 G-56-01-A70	EC1900251	1GHz~18GHz	Apr. 24, 2024	Jan. 16, 2025~ Mar. 10, 2025	Apr. 23, 2025	Radiation (03CH02-CA)
Preamplifier	EMEC	EMC18G40G	060726	18G-40G	Apr. 04, 2024	Jan. 16, 2025~ Mar. 10, 2025	Apr. 03, 2025	Radiation (03CH02-CA)
RF Cable	HUBER+SUH NER	SUCOFLEX 102	804209/2, 802406/2, 802875/2, 802952/2	N/A	Oct. 10, 2024	Jan. 16, 2025~ Mar. 10, 2025	Oct. 09, 2025	Radiation (03CH02-CA)
Hygrometer	TESEO	608-H1	45142602	N/A	Aug. 14, 2024	Jan. 16, 2025~ Mar. 10, 2025	Aug. 13, 2025	Radiation (03CH02-CA)
Controller	Chaintek	EM-1000	060876	Control Turn Table & Antenna Mast	N/A	Jan. 16, 2025~ Mar. 10, 2025	N/A	Radiation (03CH02-CA)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Jan. 16, 2025~ Mar. 10, 2025	N/A	Radiation (03CH02-CA)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Jan. 16, 2025~ Mar. 10, 2025	N/A	Radiation (03CH02-CA)
Test Software	Audix E3	E3	N/A	N/A	N/A	Jan. 16, 2025~ Mar. 10, 2025	N/A	Radiation (03CH02-CA)
Hygrometer	Testo	608-H1	45141354	N/A	Aug. 14, 2024	Jan. 30, 2025~ Feb. 15, 2025	Aug. 13, 2025	Conducted (TH01-CA)
Power Sensor	DARE!!	RPR3006W	RPR8W-2301 002	10MHz-8GHz	Feb. 22, 2024	Jan. 30, 2025~ Feb. 15, 2025	Feb. 21, 2025	Conducted (TH01-CA)
Spectrum analyzer	Rhodes & Schwarz	FSV40	101089	10Hz~40GHz	Apr. 24, 2024	Jan. 30, 2025~ Feb. 15, 2025	Apr. 23, 2025	Conducted (TH01-CA)
Switch Box	EM Electronics	EMSW26	1090304	N/A	Oct. 04, 2024	Jan. 30, 2025~ Feb. 15, 2025	Oct. 03, 2025	Conducted (TH01-CA)

5 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.4 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
--	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Venkata Kondepudi	Temperature:	18~24	°C
Test Date:	2025/01/30~2025/02/14	Relative Humidity:	37.4~65.3	%

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 MIMO 4Tx Mode																						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)				Average Conducted Power (dBm)					FCC Conducted Power Limit (dBm)				DG (dBi)				Pass/Fail
					Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A	SUM	Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A	
11a	6Mbps	4	36	5180	0.25	0.28	0.29	0.21	20.45	20.46	20.11	20.33	26.36	30.00				3.60				Pass
11a	6Mbps	4	44	5220	0.25	0.28	0.29	0.21	21.58	21.84	21.78	21.87	27.79	30.00				3.60				Pass
11a	6Mbps	4	48	5240	0.25	0.28	0.29	0.21	21.79	22.02	22.06	21.99	27.99	30.00				3.60				Pass

Note 1: The device has 4 antennas, each one has polarization which is orthogonal to the other.

TEST RESULTS DATA
Power Spectral Density

FCC U-NII-1 MIMO 4Tx Mode																			
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Power Density with Duty Factor (dBm/MHz)					Average PSD Limit (dBm/MHz)				DG (dBi)				Pass /Fail	
					Ant D	Ant B	Ant C	Ant A	SUM	Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A		
11a	6Mbps	4	36	5180	-				14.01	16.39				6.61				-	Pass
11a	6Mbps	4	44	5220	-				15.45	16.39				6.61					Pass
11a	6Mbps	4	48	5240	-				15.52	16.39				6.61					Pass

Note 1: The device has 4 antennas, each one has polarization which is orthogonal to the other.

TEST RESULTS DATA
26dB and 99% OBW

U-NII-1 MIMO 4Tx Mode													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)				26 dB Bandwidth (MHz)				Note
					Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A	
11a	6Mbps	4	36	5180	17.04	17.03	17.02	17.01	22.48	22.76	22.94	22.45	-
11a	6Mbps	4	44	5220	17.05	17.02	17.00	17.01	22.43	22.76	22.95	22.49	
11a	6Mbps	4	48	5240	17.05	17.03	17.01	17.00	22.56	22.70	22.81	22.49	

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A MIMO 4Tx Mode																							
Mod.	Data Rate	N _{rx}	CH.	Freq. (MHz)	Duty Factor (dB)				Average Conducted Power (dBm)					FCC Conducted Power Limit (dBm)				DG (dBi)				EIRP Power Limit (dBm)	Pass/Fail
					Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A	SUM	Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A		
11a	6Mbps	4	52	5260	0.25	0.28	0.29	0.21	15.99	16.13	16.19	16.36	22.19	23.98				3.20				30.00	Pass
11a	6Mbps	4	60	5300	0.25	0.28	0.29	0.21	16.21	15.99	16.22	16.41	22.23	23.98				3.20				30.00	Pass
11a	6Mbps	4	64	5320	0.25	0.28	0.29	0.21	16.83	16.71	16.78	16.88	22.82	23.98				3.20				30.00	Pass

Note 1: The device has 4 antennas, each one has polarization which is orthogonal to the other.

TEST RESULTS DATA
Power Spectral Density

U-NII-2A MIMO 4Tx Mode																			
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Power Density with Duty Factor (dBm/MHz)					Average PSD Limit (dBm/MHz)				DG (dBi)					Pass /Fail
					Ant D	Ant B	Ant C	Ant A	SUM	Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A		
11a	6Mbps	4	52	5260	-				9.73	10.79				6.21				-	Pass
11a	6Mbps	4	60	5300	-				9.99	10.79				6.21					Pass
11a	6Mbps	4	64	5320	-				10.65	10.79				6.21					Pass

Note 1: The device has 4 antennas, each one has polarization which is orthogonal to the other.

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2A MIMO 4Tx Mode																	
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)				26 dB Bandwidth (MHz)				FCC 26dB Bandwidth Power Limit (dBm)				Note
					Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A	
11a	6Mbps	4	52	5260	17.05	17.04	17.03	17.10	22.56	22.80	22.86	22.47	23.98				-
11a	6Mbps	4	60	5300	17.06	17.03	17.02	17.01	22.99	22.81	22.65	22.57	23.98				
11a	6Mbps	4	64	5320	17.07	17.04	17.03	17.02	22.54	22.54	22.59	22.62	23.98				

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C MIMO 4Tx Mode																							
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)				Average Conducted Power (dBm)					FCC Conducted Power Limit (dBm)				DG (dBi)				EIRP Power Limit (dBm)	Pass/Fail
					Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A	SUM	Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A		
11a	6Mbps	4	100	5500	0.25	0.28	0.29	0.21	16.72	16.31	16.44	16.65	22.55	23.98				3.20				30.00	Pass
11a	6Mbps	4	116	5580	0.25	0.28	0.29	0.21	16.66	16.56	16.35	16.7	22.59	23.98				3.20				30.00	Pass
11a	6Mbps	4	140	5700	0.25	0.28	0.29	0.21	16.82	16.73	16.8	17.01	22.86	23.98				3.20				30.00	Pass

FCC U-NII-2C straddle channel MIMO 4Tx Mode																							
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)				Average Conducted Power (dBm)					FCC Conducted Power Limit (dBm)				DG (dBi)				EIRP Power Limit (dBm)	Pass/Fail
					Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A	SUM	Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A		
11a	6Mbps	4	144	5720	0.25	0.28	0.29	0.21	16.25	16.24	16.1	16.38	22.26	23.12				3.20				30.00	Pass

Note 1: The device has 4 antennas, each one has polarization which is orthogonal to the other.

TEST RESULTS DATA
Power Spectral Density

U-NII-2C MIMO 4Tx Mode																			
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Power Density with Duty Factor (dBm/MHz)					Average PSD Limit (dBm/MHz)				DG (dBi)				Pass /Fail	
					Ant D	Ant B	Ant C	Ant A	SUM	Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A		
11a	6Mbps	4	100	5500	-				10.70	10.79				6.21				-	Pass
11a	6Mbps	4	116	5580	-				10.60	10.79				6.21					Pass
11a	6Mbps	4	140	5700	-				10.48	10.79				6.21					Pass

U-NII-2C straddle channel MIMO 4Tx Mode																			
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Power Density (dBm/MHz)					Average PSD Limit (dBm/MHz)				DG (dBi)				Pass /Fail	
					Ant D	Ant B	Ant C	Ant A	SUM	Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A		
11a	6Mbps	4	144	5720	-				10.29	10.79				6.21				-	Pass

Note 1: The device has 4 antennas, each one has polarization which is orthogonal to the other.

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2C MIMO 4Tx Mode																				
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth In U-NII 2C (MHz)				26 dB Bandwidth In U-NII 2C (MHz)				FCC 26dB Bandwidth Power Limit (dBm)							
					Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A				
11a	6Mbps	4	100	5500	17.05	17.03	17.02	17.04	22.50	22.52	22.89	22.59	23.98							
11a	6Mbps	4	116	5580	17.06	17.01	17.05	17.04	22.60	22.83	22.86	22.57	23.98							
11a	6Mbps	4	140	5700	17.06	17.04	17.03	17.01	22.49	22.82	23.01	23.05	23.98				----			

U-NII-2C straddle channel MIMO 4Tx Mode																				
Mod.	Data Rate	N _{Tx}	CH.	Freq. (MHz)	99% Bandwidth In U-NII 2C (MHz)				26 dB Bandwidth In U-NII 2C (MHz)				FCC 26dB Bandwidth Power Limit (dBm)				6 dB Bandwidth for Straddle Channel (MHz)			
					Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A
11a	6Mbps	4	144	5720	13.59	13.55	13.55	13.56	16.30	16.32	16.16	16.27	23.12				3.16	3.16	3.16	3.16

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 MIMO 4Tx Mode																							
Mod.	Data Rate	N _{Tx}	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)				Average Conducted Power (dBm)					FCC Conducted Power Limit (dBm)				DG (dBi)				Pass/Fail
						Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A	SUM	Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A	
EHT20	MCS0	4	36	5180	Full	0.94	0.94	0.95	0.95	20.02	20.02	19.84	20.04	26.00	30.00				3.60				Pass
EHT20	MCS0	4	44	5220	Full	0.94	0.94	0.95	0.95	21.64	21.88	21.93	21.98	27.88	30.00				3.60				Pass
EHT20	MCS0	4	48	5240	Full	0.94	0.94	0.95	0.95	21.88	22.14	22.2	21.98	28.07	30.00				3.60				Pass
EHT40	MCS0	4	38	5190	Full	0.95	0.94	0.95	0.96	17.79	17.65	17.74	17.88	23.79	30.00				3.60				Pass
EHT40	MCS0	4	46	5230	Full	0.95	0.94	0.95	0.96	21.51	21.75	21.69	21.64	27.67	30.00				3.60				Pass
EHT80	MCS0	4	42	5210	Full	0.94	0.95	0.94	0.96	17.63	17.38	17.33	17.50	23.48	30.00				3.60				Pass
EHT160	MCS0	4	50	5250	Full	0.95	0.93	0.99	0.95	15.83	15.95	16.00	16.08	21.99	30.00				3.60				Pass

Note 1: The device has 4 antennas, each one has polarization which is orthogonal to the other.

TEST RESULTS DATA
Power Spectral Density

FCC U-NII-1 MIMO 4Tx Mode																				
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Average Power Density with Duty Factor (dBm/MHz)					Average PSD Limit (dBm/MHz)				DG (dBi)				Pass /Fail	
						Ant D	Ant B	Ant C	Ant A	SUM	Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A		
EHT20	MCS0	4	36	5180	Full	-				13.27	16.39				6.61				-	Pass
EHT20	MCS0	4	44	5220	Full	-				15.23	16.39				6.61					Pass
EHT20	MCS0	4	48	5240	Full	-				15.39	16.39				6.61					Pass
EHT40	MCS0	4	38	5190	Full	-				7.75	16.39				6.61					Pass
EHT40	MCS0	4	46	5230	Full	-				11.65	16.39				6.61					Pass
EHT80	MCS0	4	42	5210	Full	-				4.52	16.39				6.61					Pass
EHT160	MCS0	4	50	5250	Full	-				0.13	16.39				6.61					Pass

Note 1: The device has 4 antennas, each one has polarization which is orthogonal to the other.

TEST RESULTS DATA
26dB and 99% OBW

U-NII-1 MIMO 4Tx Mode														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)				26 dB Bandwidth (MHz)				Note
						Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A	
EHT20	MCS0	4	36	5180	Full	19.16	19.17	19.14	19.15	23.43	23.46	23.74	23.99	-
EHT20	MCS0	4	44	5220	Full	19.15	19.14	19.17	19.16	23.13	23.44	23.35	23.70	
EHT20	MCS0	4	48	5240	Full	19.14	19.16	19.15	19.17	23.21	23.51	23.52	23.70	
EHT40	MCS0	4	38	5190	Full	38.50	38.49	38.52	38.48	45.94	44.90	45.76	45.97	
EHT40	MCS0	4	46	5230	Full	38.58	38.49	38.51	38.47	45.42	44.96	46.13	44.64	
EHT80	MCS0	4	42	5210	Full	77.88	77.81	77.84	77.86	90.69	89.63	89.12	89.76	
EHT160	MCS0	4	50	5250	Full	157.93	157.69	157.66	157.64	174.91	172.99	172.18	172.80	

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A MIMO 4Tx Mode																								
Mod.	Data Rate	N _{rx}	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)				Average Conducted Power (dBm)					FCC Conducted Power Limit (dBm)				DG (dBi)				EIRP Power Limit (dBm)	Pass/Fail
						Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A	SUM	Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A		
EHT20	MCS0	4	52	5260	Full	0.94	0.94	0.95	0.95	16.61	16.72	16.84	16.88	22.78	23.98				3.20				30.00	Pass
EHT20	MCS0	4	60	5300	Full	0.94	0.94	0.95	0.95	16.95	16.59	16.86	16.96	22.86	23.98				3.20				30.00	Pass
EHT20	MCS0	4	64	5320	Full	0.94	0.94	0.95	0.95	16.51	16.47	16.46	16.69	22.55	23.98				3.20				30.00	Pass
EHT40	MCS0	4	54	5270	Full	0.95	0.94	0.95	0.96	17.44	17.32	17.52	17.57	23.48	23.98				3.20				30.00	Pass
EHT40	MCS0	4	62	5310	Full	0.95	0.94	0.95	0.96	17.58	17.45	17.66	17.63	23.60	23.98				3.20				30.00	Pass
EHT80	MCS0	4	58	5290	Full	0.94	0.95	0.94	0.96	17.55	17.26	17.50	17.59	23.50	23.98				3.20				30.00	Pass

Note 1: The device has 4 antennas, each one has polarization which is orthogonal to the other.

TEST RESULTS DATA
Power Spectral Density

U-NII-2A MIMO 4Tx Mode																				
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Average Power Density with Duty Factor (dBm/MHz)					Average PSD Limit (dBm/MHz)				DG (dBi)				Pass /Fail	
						Ant D	Ant B	Ant C	Ant A	SUM	Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A		
EHT20	MCS0	4	52	5260	Full	-	-	-	-	9.97	-	-	-	-	-	6.21	-	-	-	Pass
EHT20	MCS0	4	60	5300	Full	-	-	-	-	10.27	-	-	-	-	-	6.21	-	-	-	Pass
EHT20	MCS0	4	64	5320	Full	-	-	-	-	9.82	-	-	-	-	-	6.21	-	-	-	Pass
EHT40	MCS0	4	54	5270	Full	-	-	-	-	7.44	-	-	-	-	-	6.21	-	-	-	Pass
EHT40	MCS0	4	62	5310	Full	-	-	-	-	7.69	-	-	-	-	-	6.21	-	-	-	Pass
EHT80	MCS0	4	58	5290	Full	-	-	-	-	4.53	-	-	-	-	-	6.21	-	-	-	Pass

Note 1: The device has 4 antennas, each one has polarization which is orthogonal to the other.

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2A MIMO 4Tx Mode																		
Mod.	Data Rate	N _{rx}	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)				26 dB Bandwidth (MHz)				FCC 26dB Bandwidth Power Limit (dBm)				Note
						Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A	
EHT20	MCS0	4	52	5260	Full	19.14	19.18	19.15	19.17	23.25	23.70	23.73	24.56	23.98				-
EHT20	MCS0	4	60	5300	Full	19.18	19.14	19.15	19.19	23.12	23.55	24.24	24.64	23.98				
EHT20	MCS0	4	64	5320	Full	19.15	19.14	19.18	19.21	23.42	23.59	23.80	23.62	23.98				
EHT40	MCS0	4	54	5270	Full	38.52	38.53	38.49	38.51	46.14	45.54	44.67	45.76	23.98				
EHT40	MCS0	4	62	5310	Full	38.54	38.53	38.51	38.49	45.41	46.10	45.57	45.41	23.98				
EHT80	MCS0	4	58	5290	Full	77.91	77.82	77.90	77.86	89.95	89.09	90.85	90.56	23.98				

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C MIMO 4Tx Mode																								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)				Average Conducted Power (dBm)					FCC Conducted Power Limit (dBm)				DG (dBi)				EIRP Power Limit (dBm)	Pass/Fail
						Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A	SUM	Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A		
EHT20	MCS0	4	100	5500	Full	0.94	0.94	0.95	0.95	17.40	16.91	17.08	17.33	23.21	23.98				3.20				30.00	Pass
EHT20	MCS0	4	116	5580	Full	0.94	0.94	0.95	0.95	17.28	17.02	17.06	17.36	23.20	23.98				3.20				30.00	Pass
EHT20	MCS0	4	140	5700	Full	0.94	0.94	0.95	0.95	16.91	16.70	16.91	17.07	22.92	23.98				3.20				30.00	Pass
EHT40	MCS0	4	102	5510	Full	0.95	0.94	0.95	0.96	17.53	17.18	17.32	17.53	23.41	23.98				3.20				30.00	Pass
EHT40	MCS0	4	110	5550	Full	0.95	0.94	0.95	0.96	17.28	17.26	17.50	17.59	23.43	23.98				3.20				30.00	Pass
EHT40	MCS0	4	134	5670	Full	0.95	0.94	0.95	0.96	17.63	17.71	17.83	18.03	23.82	23.98				3.20				30.00	Pass
EHT80	MCS0	4	106	5530	Full	0.94	0.95	0.94	0.96	17.38	17.30	17.38	17.67	23.46	23.98				3.20				30.00	Pass
EHT80	MCS0	4	122	5610	Full	0.94	0.95	0.94	0.96	17.18	17.32	17.19	17.37	23.29	23.98				3.20				30.00	Pass
EHT160	MCS0	4	114	5570	Full	0.95	0.93	0.99	0.95	15.96	15.93	16.06	16.18	22.05	23.98				3.20				30.00	Pass

FCC U-NII-2C straddle channel MIMO 4Tx Mode																								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)				Average Conducted Power (dBm)					FCC Conducted Power Limit (dBm)				DG (dBi)				EIRP Power Limit (dBm)	Pass/Fail
						Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A	SUM	Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A		
EHT20	MCS0	4	144	5720	Full	0.94	0.94	0.95	0.95	16.31	16.27	16.37	16.48	22.38	23.17				3.20				30.00	Pass
EHT40	MCS0	4	142	5710	Full	0.95	0.94	0.95	0.96	17.15	16.99	17.12	17.16	23.13	23.98				3.20				30.00	Pass
EHT80	MCS0	4	138	5690	Full	0.94	0.95	0.94	0.96	17.59	17.59	17.76	17.64	23.67	23.98				3.20				30.00	Pass

Note 1: The device has 4 antennas, each one has polarization which is orthogonal to the other.

TEST RESULTS DATA
Power Spectral Density

U-NII-2C MIMO 4Tx Mode																				
Mod.	Data Rate	N _{Tx}	CH.	Freq. (MHz)	RU Config.	Average Power Density with Duty Factor (dBm/MHz)					Average PSD Limit (dBm/MHz)				DG (dBi)				Pass /Fail	
						Ant D	Ant B	Ant C	Ant A	SUM	Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A		
EHT20	MCS0	4	100	5500	Full	-				10.74	10.79				6.21				-	Pass
EHT20	MCS0	4	116	5580	Full	-				10.44	10.79				6.21					Pass
EHT20	MCS0	4	140	5700	Full	-				10.28	10.79				6.21					Pass
EHT40	MCS0	4	102	5510	Full	-				7.75	10.79				6.21					Pass
EHT40	MCS0	4	110	5550	Full	-				7.73	10.79				6.21					Pass
EHT40	MCS0	4	134	5670	Full	-				7.77	10.79				6.21					Pass
EHT80	MCS0	4	106	5530	Full	-				4.70	10.79				6.21					Pass
EHT80	MCS0	4	122	5610	Full	-				4.41	10.79				6.21					Pass
EHT160	MCS0	4	114	5570	Full	-				0.47	10.79				6.21				Pass	

U-NII-2C straddle channel MIMO 4Tx Mode																				
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Average Power Density (dBm/MHz)					Average PSD Limit (dBm/MHz)				DG (dBi)				Pass /Fail	
						Ant D	Ant B	Ant C	Ant A	SUM	Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A		
EHT20	MCS0	4	144	5720	Full	-				9.75	10.79				6.21				-	Pass
EHT40	MCS0	4	142	5710	Full	-				7.36	10.79				6.21					Pass
EHT80	MCS0	4	138	5690	Full	-				4.88	10.79				6.21					Pass

Note 1: The device has 4 antennas, each one has polarization which is orthogonal to the other.

TEST RESULTS DATA
26dB and 99% OBW


U-NII-2C MIMO 4Tx Mode																					
Mod.	Data Rate	N _{rx}	CH.	Freq. (MHz)	RU Config.	99% Bandwidth In U-NII 2C (MHz)				26 dB Bandwidth In U-NII 2C (MHz)				FCC 26dB Bandwidth Power Limit (dBm)							
						Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A				
EHT20	MCS0	4	100	5500	Full	19.15	19.14	19.16	19.17	23.41	23.58	23.58	24.53	23.98							
EHT20	MCS0	4	116	5580	Full	19.16	19.14	19.17	19.15	23.54	23.49	23.54	23.64	23.98							
EHT20	MCS0	4	140	5700	Full	19.14	19.16	19.17	19.18	23.34	23.85	23.74	23.89	23.98							
EHT40	MCS0	4	102	5510	Full	38.53	38.54	38.52	38.49	45.49	46.11	45.81	45.38	23.98							
EHT40	MCS0	4	110	5550	Full	38.58	38.56	38.53	38.51	45.82	45.42	45.15	45.15	23.98							
EHT40	MCS0	4	134	5670	Full	38.58	38.51	38.53	38.54	45.20	45.12	45.18	45.71	23.98							
EHT80	MCS0	4	106	5530	Full	77.93	77.86	77.91	77.90	89.18	89.41	90.37	89.50	23.98							
EHT80	MCS0	4	122	5610	Full	77.91	77.90	77.84	77.93	89.66	88.93	91.71	89.44	23.98							
EHT160	MCS0	4	114	5570	Full	157.83	157.81	157.71	157.74	174.48	173.09	173.42	172.94	23.98							

U-NII-2C straddle channel MIMO 4Tx Mode																					
Mod.	Data Rate	N _{rx}	CH.	Freq. (MHz)	RU Config.	99% Bandwidth In U-NII 2C (MHz)				26 dB Bandwidth In U-NII 2C (MHz)				FCC 26dB Bandwidth Power Limit (dBm)				6 dB Bandwidth for Straddle Channel (MHz)			
						Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A	Ant D	Ant B	Ant C	Ant A
EHT20	MCS0	4	144	5720	Full	14.58	14.60	14.59	14.59	16.74	16.50	16.57	17.34	23.17				4.49	4.52	4.51	4.55
EHT40	MCS0	4	142	5710	Full	34.27	34.25	34.26	34.27	37.77	38.06	37.85	37.96	23.98				4.05	4.02	4.02	4.11
EHT80	MCS0	4	138	5690	Full	73.90	73.91	73.97	73.98	80.15	80.76	79.06	80.66	23.98				4.14	4.06	4.07	4.07

**Test Result of 99% Occupied Bandwidth & 26dB Bandwidth**

MIMO <Ant. D+B+C+A>


<802.11a>

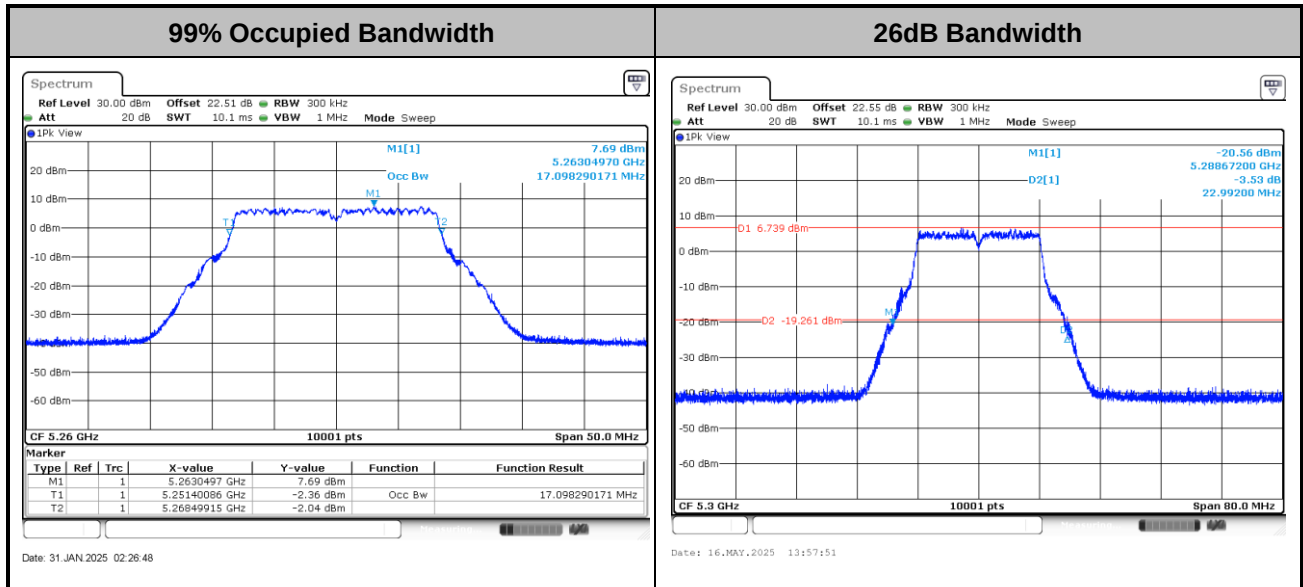

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11be EHT20>

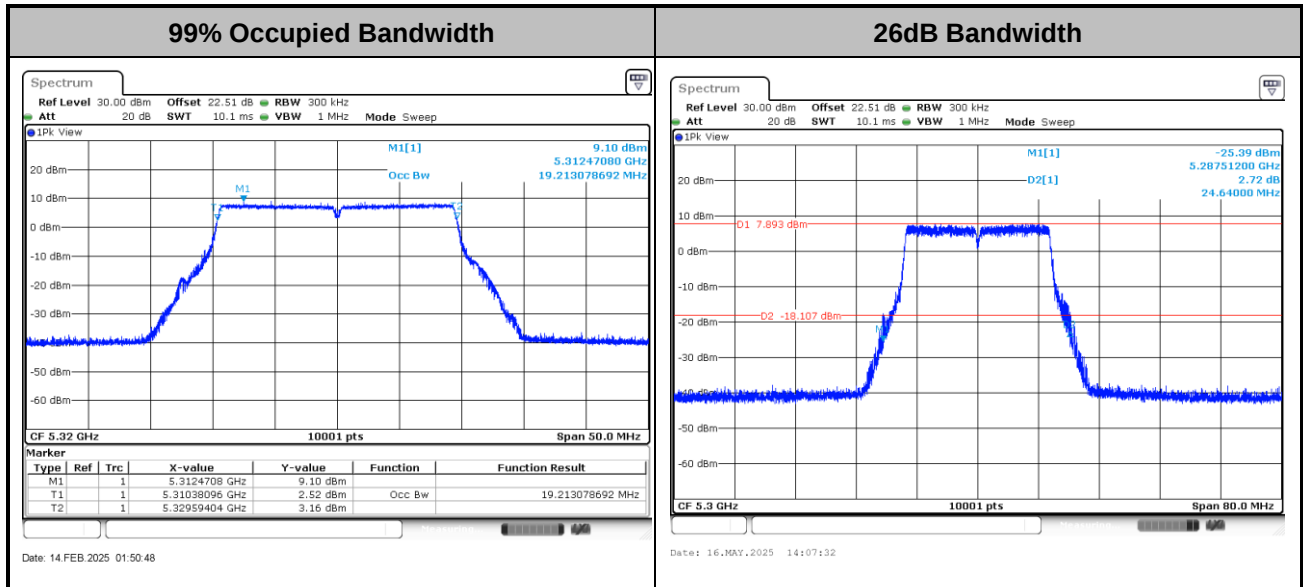

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11be EHT40>

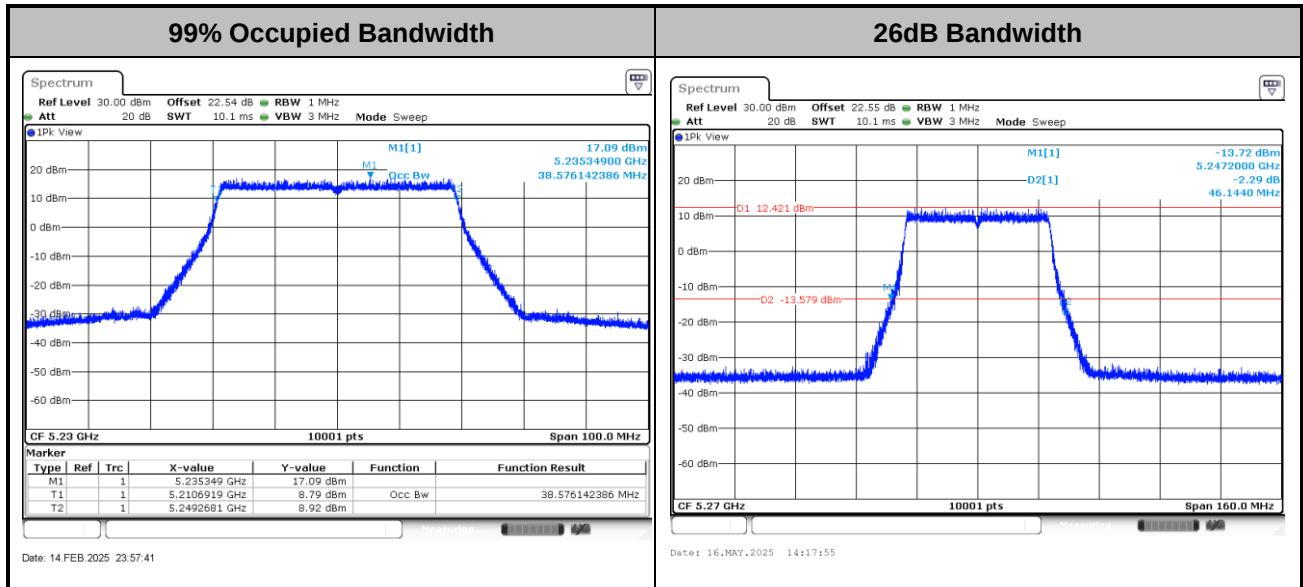

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11be EHT80>

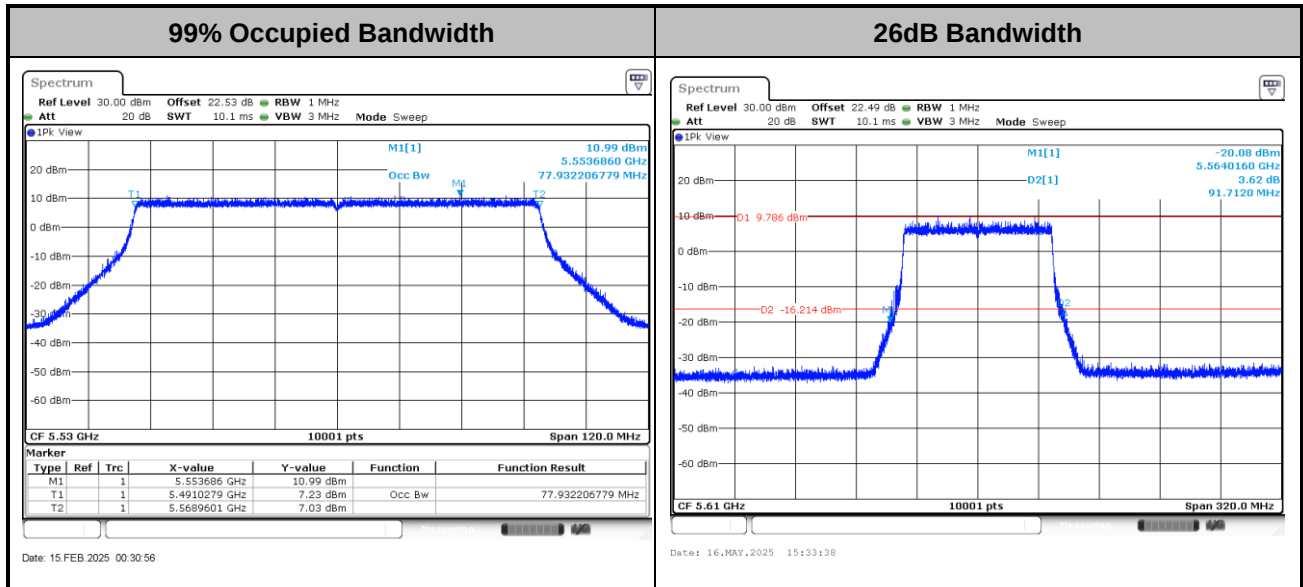

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11be EHT160>

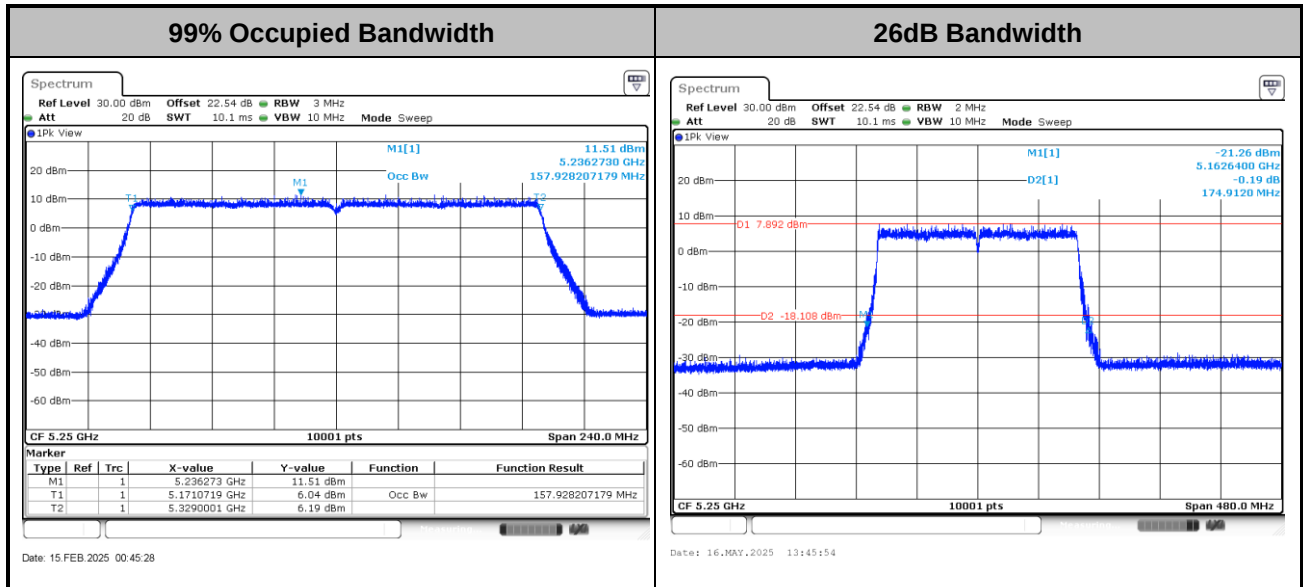





Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

**Test Result of Power Spectral Density**

<802.11a>

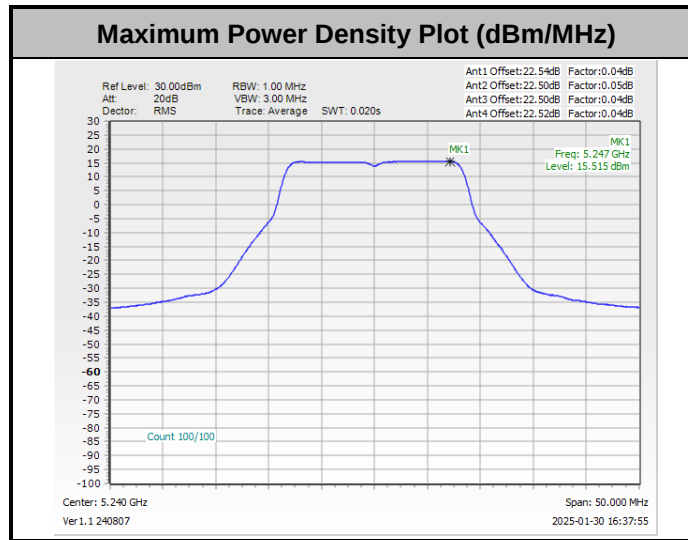


Remark: The test plot is showing a bin by bin combined result mathematically adds all traces.

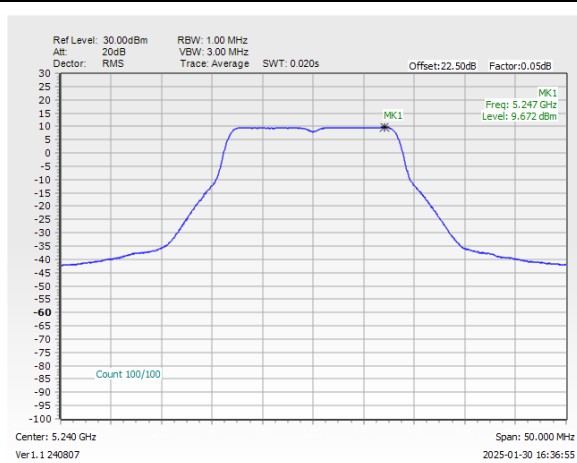
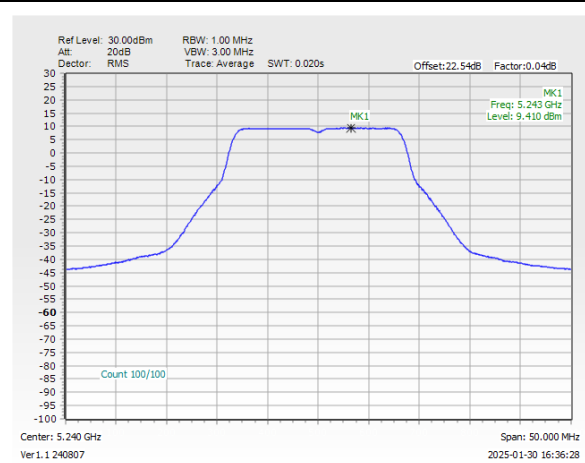
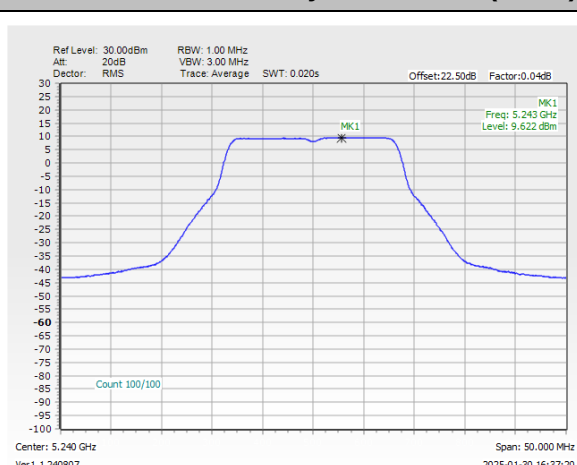
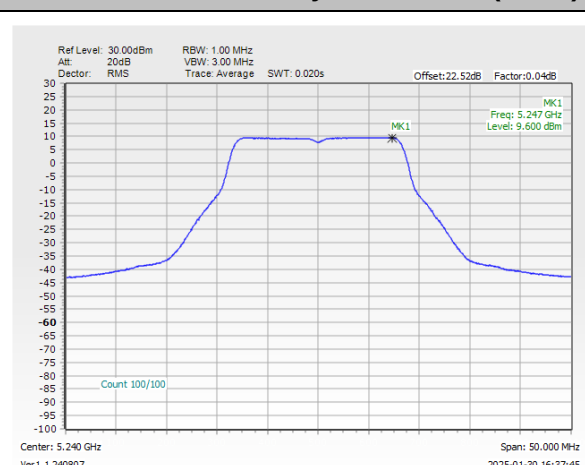
Maximum Power Density Plot Trace 1 (Ant D)**Maximum Power Density Plot Trace 2 (Ant B)****Maximum Power Density Plot Trace 3 (Ant C)****Maximum Power Density Plot Trace 4 (Ant A)**



<802.11be EHT20>

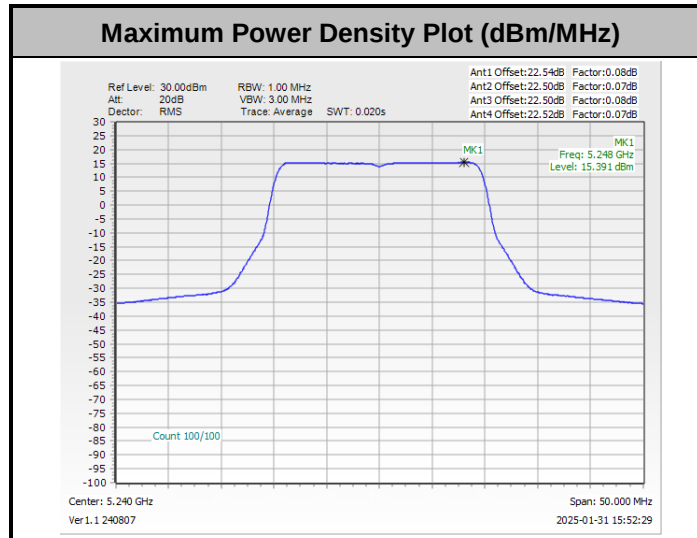


Remark: The test plot is showing a bin by bin combined result mathematically adds all traces.

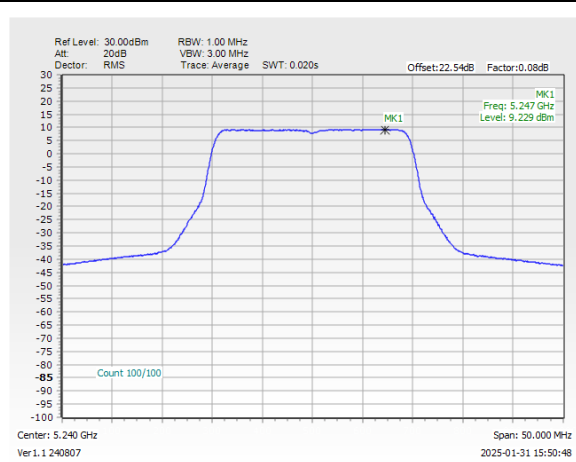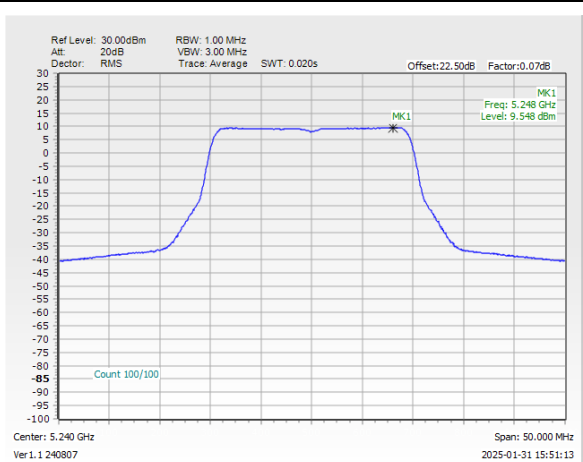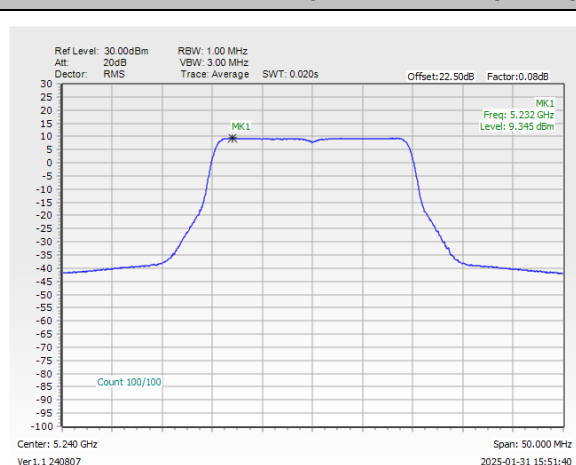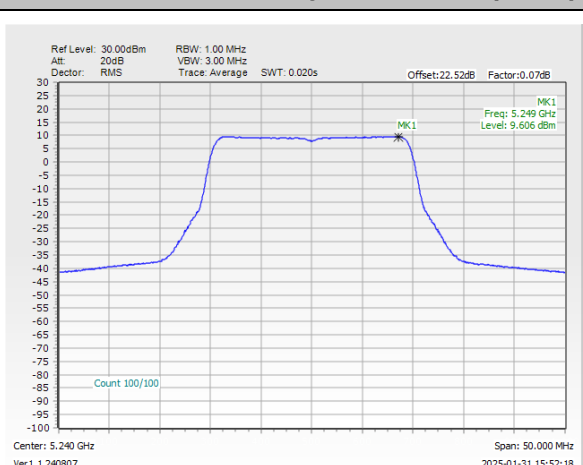
Maximum Power Density Plot Trace 1 (Ant D)**Maximum Power Density Plot Trace 2 (Ant B)****Maximum Power Density Plot Trace 3 (Ant C)****Maximum Power Density Plot Trace 4 (Ant A)**



<802.11be EHT40>

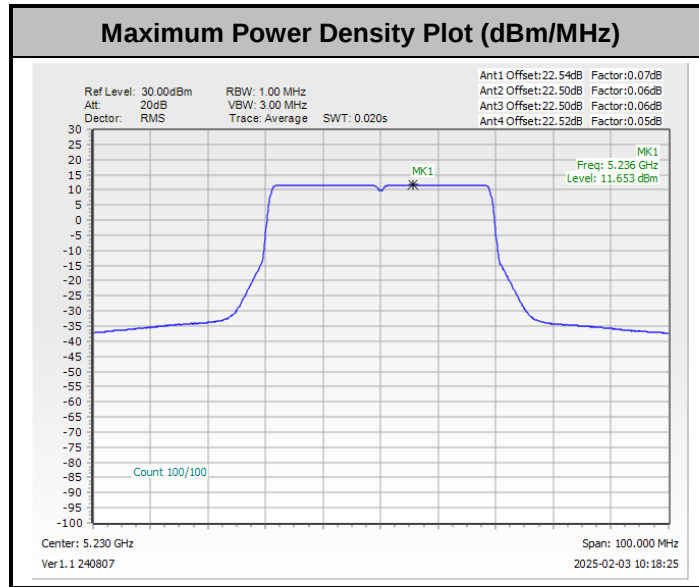


Remark: The test plot is showing a bin by bin combined result mathematically adds all traces.

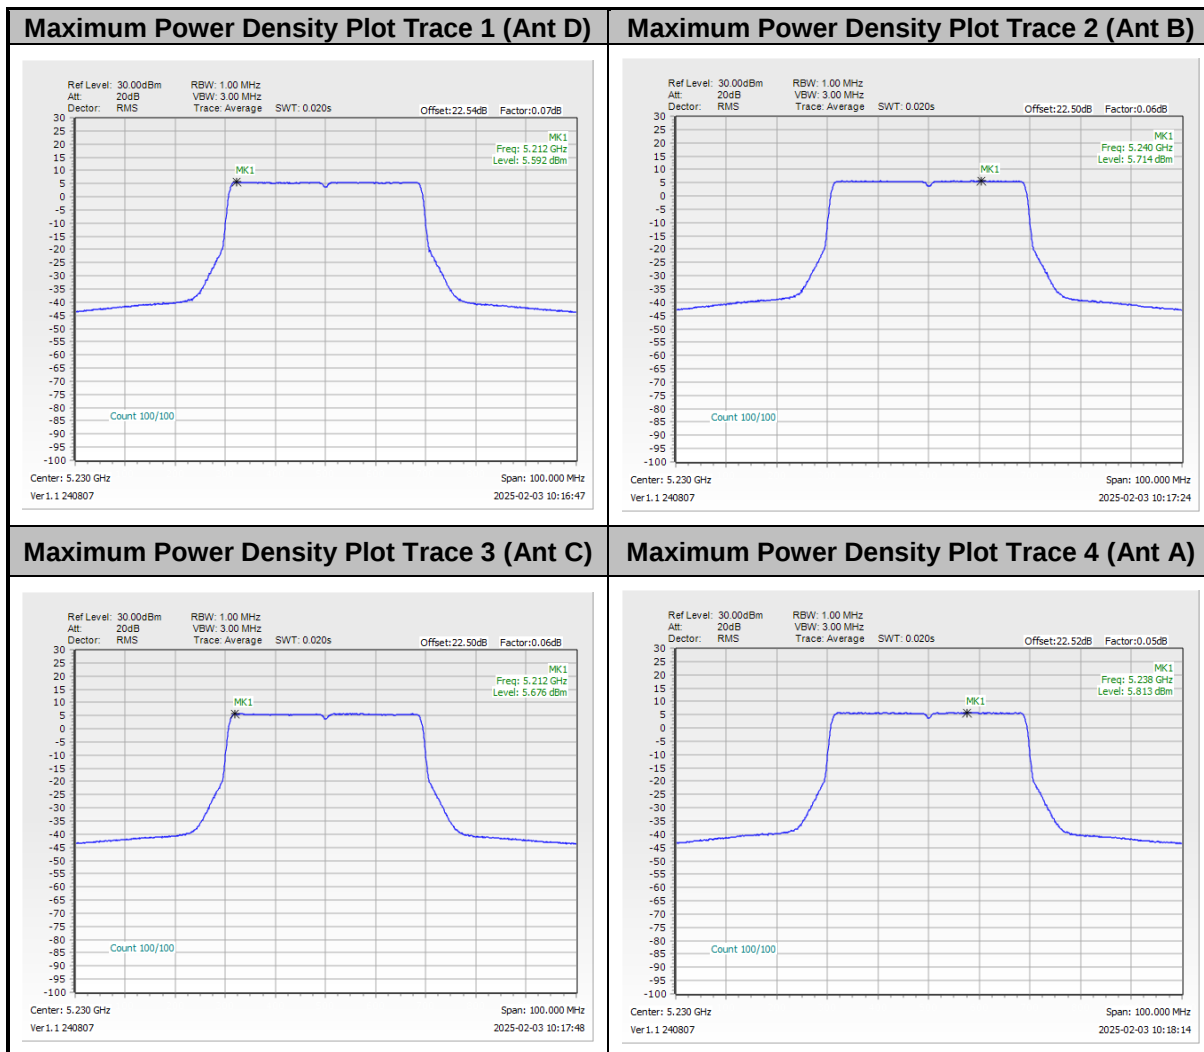




<802.11be EHT80>

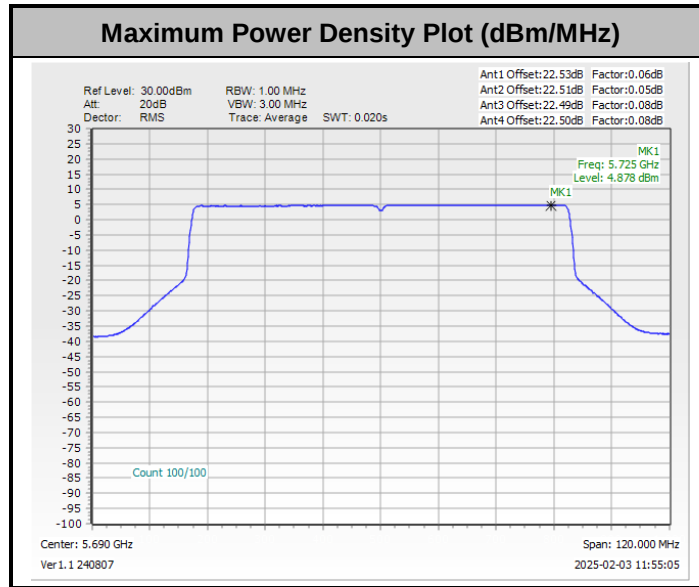


Remark: The test plot is showing a bin by bin combined result mathematically adds all traces.

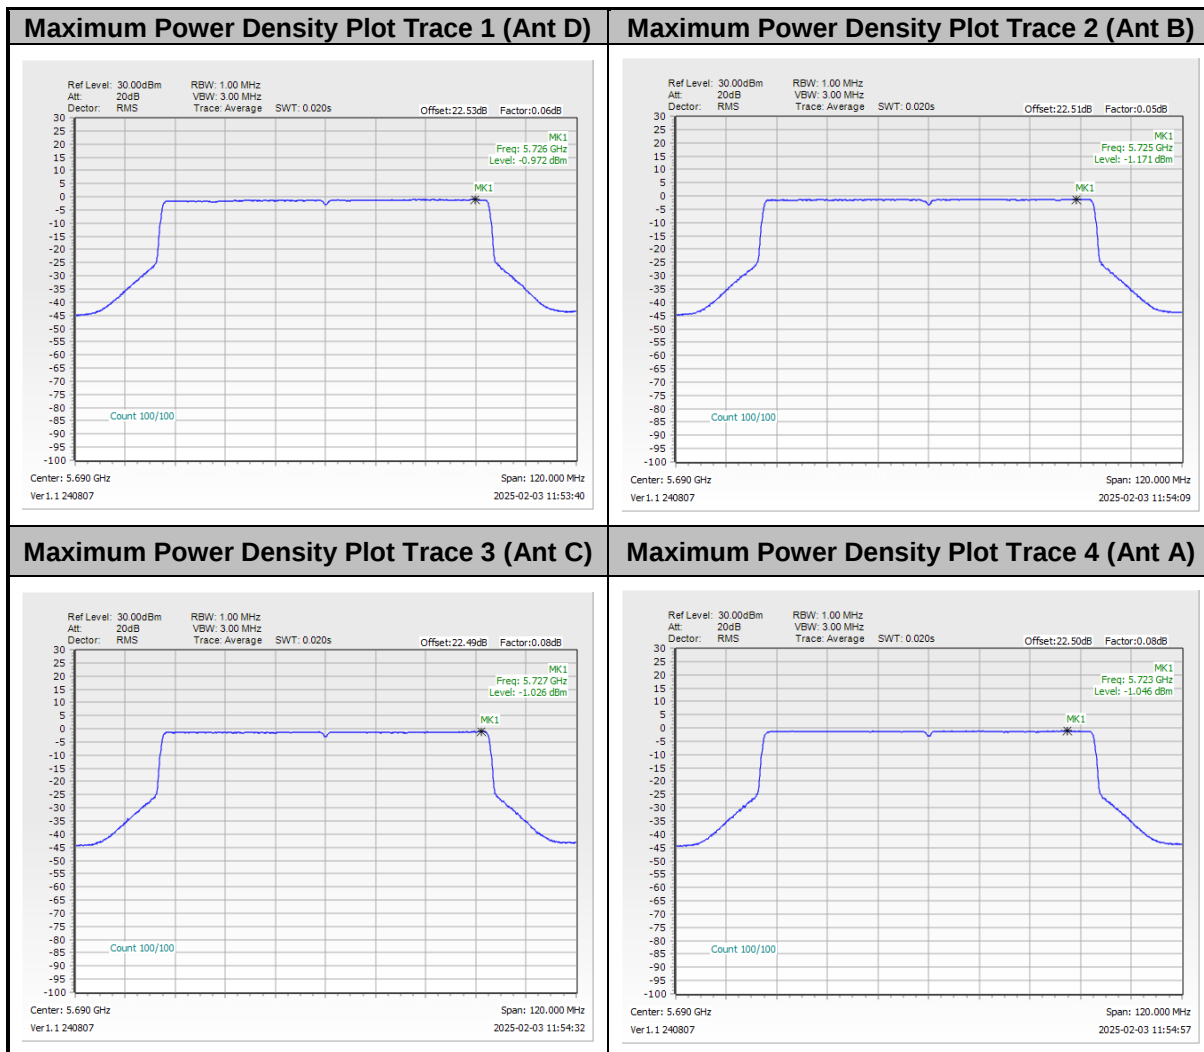




<802.11be EHT160>

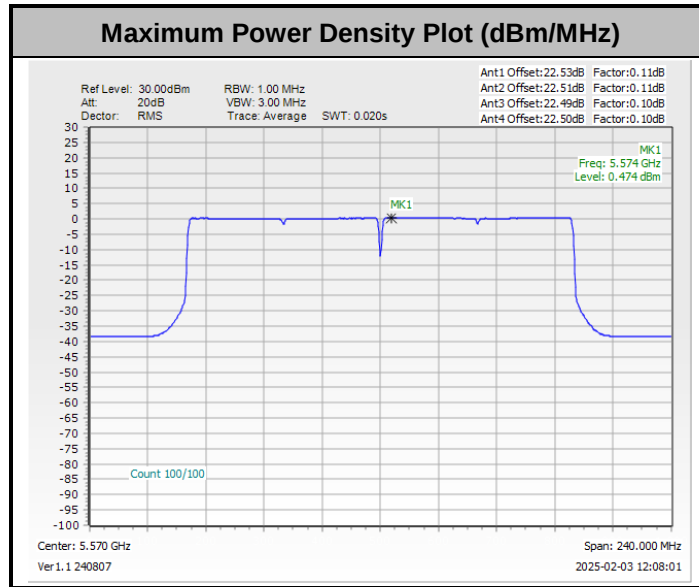

Remark: The test plot is showing a bin by bin combined result mathematically adds all traces.

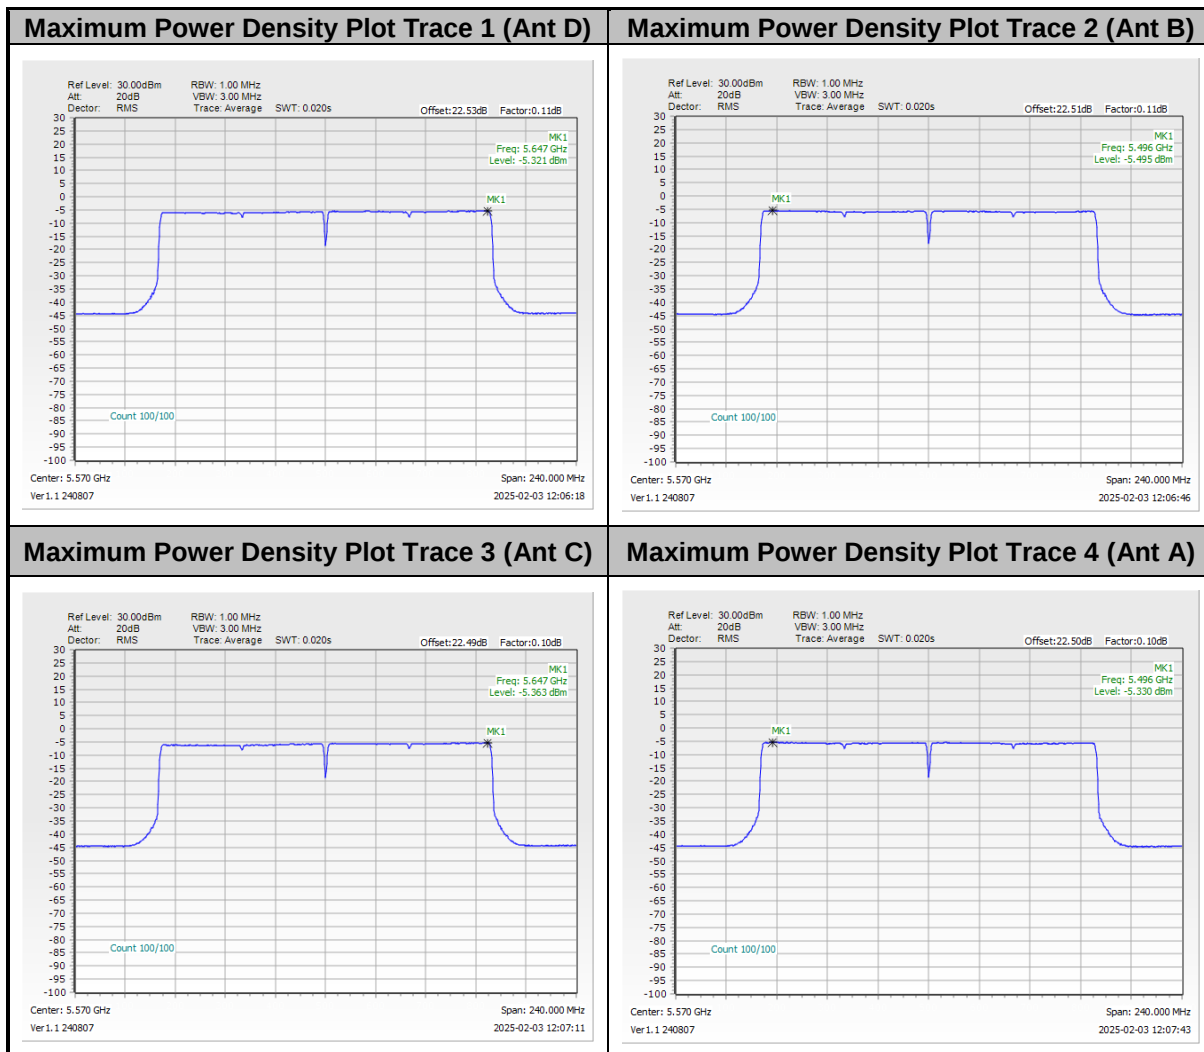



Appendix B. Radiated Spurious Emission Test Data

Test Engineer :	Ken Kuo and Edward Liao	Temperature :	21.1~23.9°C
		Relative Humidity :	42.1~53.6%

Note symbol

-L	Low channel location
-R	High channel location

**B1. Radiated Spurious Emission Test Modes**

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	D+B+C+A	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	D+B+C+A	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	D+B+C+A	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-1	5.15-5.25	D+B+C+A	802.11be EHT20	36	5180	MCS0	-	-
Mode 5	U-NII-1	5.15-5.25	D+B+C+A	802.11be EHT20	44	5220	MCS0	-	-
Mode 6	U-NII-1	5.15-5.25	D+B+C+A	802.11be EHT20	48	5240	MCS0	-	-
Mode 7	U-NII-1	5.15-5.25	D+B+C+A	802.11be EHT40	38	5190	MCS0	-	-
Mode 8	U-NII-1	5.15-5.25	D+B+C+A	802.11be EHT40	46	5230	MCS0	-	-
Mode 9	U-NII-1	5.15-5.25	D+B+C+A	802.11be EHT80	42	5210	MCS0	-	-
Mode 10	U-NII-1	5.15-5.25	D+B+C+A	802.11be EHT160	50	5250	MCS0	-	-
Mode 11	U-NII-2A	5.25-5.35	D+B+C+A	802.11a	52	5260	6Mbps	-	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 12	U-NII-2A	5.25-5.35	D+B+C+A	802.11a	60	5300	6Mbps	-	-
Mode 13	U-NII-2A	5.25-5.35	D+B+C+A	802.11a	64	5320	6Mbps	-	-
Mode 14	U-NII-2A	5.25-5.35	D+B+C+A	802.11be EHT20	52	5260	MCS0	-	-
Mode 15	U-NII-2A	5.25-5.35	D+B+C+A	802.11be EHT20	60	5300	MCS0	-	-
Mode 16	U-NII-2A	5.25-5.35	D+B+C+A	802.11be EHT20	64	5320	MCS0	-	-
Mode 17	U-NII-2A	5.25-5.35	D+B+C+A	802.11be EHT40	54	5270	MCS0	-	-
Mode 18	U-NII-2A	5.25-5.35	D+B+C+A	802.11be EHT40	62	5310	MCS0	-	-
Mode 19	U-NII-2A	5.25-5.35	D+B+C+A	802.11be EHT80	58	5290	MCS0	-	-
Mode 20	U-NII-2C	5.47-5.725	D+B+C+A	802.11a	100	5500	6Mbps	-	-
Mode 21	U-NII-2C	5.47-5.725	D+B+C+A	802.11a	116	5580	6Mbps	-	-
Mode 22	U-NII-2C	5.47-5.725	D+B+C+A	802.11a	140	5700	6Mbps	-	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 23	U-NII-2C	5.47-5.725	D+B+C+A	802.11a	144	5720	6Mbps	-	-
Mode 24	U-NII-2C	5.47-5.725	D+B+C+A	802.11be EHT20	100	5500	MCS0	-	-
Mode 25	U-NII-2C	5.47-5.725	D+B+C+A	802.11be EHT20	116	5580	MCS0	-	-
Mode 26	U-NII-2C	5.47-5.725	D+B+C+A	802.11be EHT20	140	5700	MCS0	-	-
Mode 27	U-NII-2C	5.47-5.725	D+B+C+A	802.11be EHT20	144	5720	MCS0	-	-
Mode 28	U-NII-2C	5.47-5.725	D+B+C+A	802.11be EHT40	102	5510	MCS0	-	-
Mode 29	U-NII-2C	5.47-5.725	D+B+C+A	802.11be EHT40	110	5550	MCS0	-	-
Mode 30	U-NII-2C	5.47-5.725	D+B+C+A	802.11be EHT40	134	5670	MCS0	-	-
Mode 31	U-NII-2C	5.47-5.725	D+B+C+A	802.11be EHT40	142	5710	MCS0	-	-
Mode 32	U-NII-2C	5.47-5.725	D+B+C+A	802.11be EHT80	106	5530	MCS0	-	-
Mode 33	U-NII-2C	5.47-5.725	D+B+C+A	802.11be EHT80	122	5610	MCS0	-	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 34	U-NII-2C	5.47-5.725	D+B+C+A	802.11be EHT80	138	5690	MCS0	-	-
Mode 35	U-NII-2C	5.47-5.725	D+B+C+A	802.11be EHT160	114	5570	MCS0	-	-
Mode 36	U-NII-2A	5.25-5.35	D+B+C+A	802.11be EHT40	62	5310	MCS0	-	LF
Mode 37	U-NII-2A	5.25-5.35	D+B+C+A	802.11be EHT40	62	5310	MCS0	-	SHF

B2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	802.11a	36	5149.94	53.80	54.00	-0.20	V	Avg.	Pass	-	Band Edge
	802.11a	36	-	-	-	-	-	-	-	-	Harmonic
2	802.11a	44	-	-	-	-	-	-	-	-	Band Edge
	802.11a	44	10440.00	56.48	68.20	-11.72	V	Peak	Pass	-	Harmonic
3	802.11a	48	5388.50	46.97	54.00	-7.03	V	Avg.	Pass	-	Band Edge
	802.11a	48	-	-	-	-	-	-	-	-	Harmonic
4	802.11be EHT20	36	5149.94	53.44	54.00	-0.56	V	Avg.	Pass	-	Band Edge
	802.11be EHT20	36	10360.00	53.87	68.20	-14.33	V	Peak	Pass	-	Harmonic
5	802.11be EHT20	44	5149.82	47.51	54.00	-6.49	V	Avg.	Pass	-	Band Edge
	802.11be EHT20	44	10440.00	53.12	68.20	-15.08	V	Peak	Pass	-	Harmonic
6	802.11be EHT20	48	5402.14	47.45	54.00	-6.55	V	Avg.	Pass	-	Band Edge



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
6	802.11be EHT20	48	10480.00	55.55	68.20	-12.65	V	Peak	Pass	-	Harmonic
7	802.11be EHT40	38	5142.12	52.02	54.00	-1.98	V	Avg.	Pass	-	Band Edge
	802.11be EHT40	38	15570.00	40.88	54.00	-13.12	V	Avg.	Pass	-	Harmonic
8	802.11be EHT40	46	5141.22	50.98	54.00	-3.02	V	Avg.	Pass	-	Band Edge
	802.11be EHT40	46	15690.00	38.83	54.00	-15.17	H	Avg.	Pass	-	Harmonic
9	802.11be EHT80	42	5141.75	52.34	54.00	-1.66	V	Avg.	Pass	-	Band Edge
	802.11be EHT80	42	15630.00	39.72	54.00	-14.28	V	Avg.	Pass	-	Harmonic
10	802.11be EHT160	50	5361.09	53.19	54.00	-0.81	V	Avg.	Pass	-	Band Edge
	802.11be EHT160	50	15750.00	39.58	54.00	-14.42	V	Avg.	Pass	-	Harmonic
11	802.11a	52	5421.00	47.50	54.00	-6.50	V	Avg.	Pass	-	Band Edge
	802.11a	52	-	-	-	-	-	-	-	-	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
12	802.11a	60	-	-	-	-	-	-	-	-	Band Edge
	802.11a	60	10600.00	45.21	54.00	-8.79	V	Avg.	Pass	-	Harmonic
13	802.11a	64	5350.52	52.69	54.00	-1.31	V	Avg.	Pass	-	Band Edge
	802.11a	64	-	-	-	-	-	-	-	-	Harmonic
14	802.11be EHT20	52	5422.00	47.51	54.00	-6.49	V	Avg.	Pass	-	Band Edge
	802.11be EHT20	52	10520.00	56.00	68.20	-12.20	V	Peak	Pass	-	Harmonic
15	802.11be EHT20	60	5350.72	52.65	54.00	-1.35	V	Avg.	Pass	-	Band Edge
	802.11be EHT20	60	10600.00	42.82	54.00	-11.18	H	Avg.	Pass	-	Harmonic
16	802.11be EHT20	64	5351.22	53.38	54.00	-0.62	V	Avg.	Pass	-	Band Edge
	802.11be EHT20	64	15960.00	38.11	54.00	-15.89	V	Avg.	Pass	-	Harmonic
17	802.11be EHT40	54	5353.79	52.76	54.00	-1.24	V	Avg.	Pass	-	Band Edge



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
17	802.11be EHT40	54	15810.00	39.36	54.00	-14.64	V	Avg.	Pass	-	Harmonic
18	802.11be EHT40	62	5350.05	53.97	54.00	-0.03	V	Avg.	Pass	-	Band Edge
	802.11be EHT40	62	10620.00	38.92	54.00	-15.08	V	Avg.	Pass	-	Harmonic
19	802.11be EHT80	58	5351.20	53.60	54.00	-0.40	V	Avg.	Pass	-	Band Edge
	802.11be EHT80	58	15870.00	38.99	54.00	-15.01	H	Avg.	Pass	-	Harmonic
20	802.11a	100	5457.85	50.66	54.00	-3.34	V	Avg.	Pass	-	Band Edge
	802.11a	100	-	-	-	-	-	-	-	-	Harmonic
21	802.11a	116	-	-	-	-	-	-	-	-	Band Edge
	802.11a	116	11160.00	43.79	54.00	-10.21	V	Avg.	Pass	-	Harmonic
22	802.11a	140	5730.88	64.10	68.20	-4.10	V	Peak	Pass	-	Band Edge
	802.11a	140	-	-	-	-	-	-	-	-	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
23	802.11a	144	-	-	-	-	-	-	-	-	Band Edge
	802.11a	144	17160.00	48.90	68.20	-19.30	H	Peak	Pass	-	Harmonic
24	802.11be EHT20	100	5468.80	67.46	68.20	-0.74	V	Peak	Pass	-	Band Edge
	802.11be EHT20	100	11000.00	39.01	54.00	-14.99	V	Avg.	Pass	-	Harmonic
25	802.11be EHT20	116	5417.62	48.88	54.00	-5.12	V	Avg.	Pass	-	Band Edge
	802.11be EHT20	116	11160.00	43.22	54.00	-10.78	V	Avg.	Pass	-	Harmonic
26	802.11be EHT20	140	5725.68	67.01	68.20	-1.19	V	Peak	Pass	-	Band Edge
	802.11be EHT20	140	11400.00	38.09	54.00	-15.91	V	Avg.	Pass	-	Harmonic
27	802.11be EHT20	144	-	-	-	-	-	-	-	-	Band Edge
	802.11be EHT20	144	11440.00	38.07	54.00	-15.93	H	Avg.	Pass	-	Harmonic
28	802.11be EHT40	102	5459.92	51.78	54.00	-2.22	V	Avg.	Pass	-	Band Edge







Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
28	802.11be EHT40	102	11020.00	38.65	54.00	-15.35	V	Avg.	Pass	-	Harmonic
29	802.11be EHT40	110	5460.00	50.50	54.00	-3.50	V	Avg.	Pass	-	Band Edge
	802.11be EHT40	110	16650.00	49.06	68.20	-19.14	V	Peak	Pass	-	Harmonic
30	802.11be EHT40	134	5729.28	64.88	68.20	-3.32	V	Peak	Pass	-	Band Edge
	802.11be EHT40	134	11340.00	38.53	54.00	-15.47	H	Avg.	Pass	-	Harmonic
31	802.11be EHT40	142	-	-	-	-	-	-	-	-	Band Edge
	802.11be EHT40	142	11420.00	38.48	54.00	-15.52	V	Avg.	Pass	-	Harmonic
32	802.11be EHT80	106	5459.98	53.06	54.00	-0.94	V	Avg.	Pass	-	Band Edge
	802.11be EHT80	106	11060.00	37.88	54.00	-16.12	V	Avg.	Pass	-	Harmonic
33	802.11be EHT80	122	5459.98	49.46	54.00	-4.54	V	Avg.	Pass	-	Band Edge
	802.11be EHT80	122	11220.00	37.85	54.00	-16.15	H	Avg.	Pass	-	Harmonic







Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
34	802.11be EHT80	138	-	-	-	-	-	-	-	-	Band Edge
	802.11be EHT80	138	11380.00	38.71	54.00	-15.29	V	Avg.	Pass	-	Harmonic
35	802.11be EHT160	114	5441.30	53.54	54.00	-0.46	V	Avg.	Pass	-	Band Edge
	802.11be EHT160	114	11140.00	38.54	54.00	-15.46	H	Avg.	Pass	-	Harmonic
36	LF	62	46.49	30.02	40.00	-9.98	V	Peak	Pass	-	LF
37	SHF	62	39274.00	54.44	74.00	-19.56	V	Peak	Pass	-	SHF

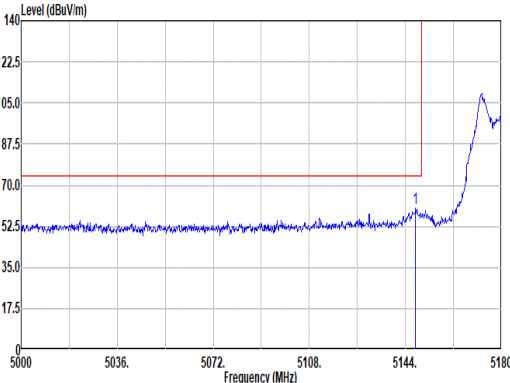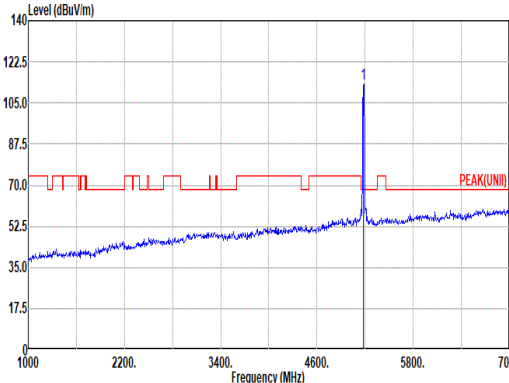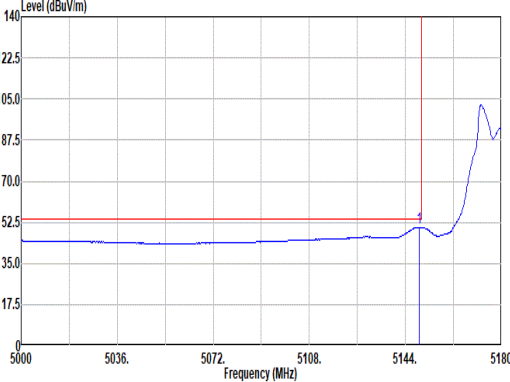
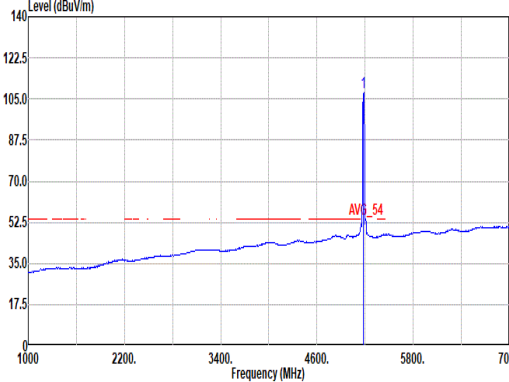


Mode	1																																																																																																																							
	Band Edge																																																																																																																							
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																																							
ANT	D+B+C+A																																																																																																																							
Pol.	Horizontal						Fundamental																																																																																																																	
Peak	 Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5147.78</td><td>60.01</td><td>74.00</td><td>-13.99</td><td>44.79</td><td>33.09</td><td>12.05</td><td>29.92</td><td>0.00</td><td>300</td><td>131 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5147.78	60.01	74.00	-13.99	44.79	33.09	12.05	29.92	0.00	300	131 PEAK	 Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5180.00</td><td>113.14</td><td>-----</td><td>-----</td><td>97.87</td><td>33.04</td><td>12.13</td><td>29.90</td><td>0.00</td><td>300</td><td>131 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5180.00	113.14	-----	-----	97.87	33.04	12.13	29.90	0.00	300	131 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	5147.78	60.01	74.00	-13.99	44.79	33.09	12.05	29.92	0.00	300	131 PEAK																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	5180.00	113.14	-----	-----	97.87	33.04	12.13	29.90	0.00	300	131 PEAK																																																																																																													
Avg	 Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5149.22</td><td>50.35</td><td>54.00</td><td>-3.65</td><td>35.13</td><td>33.09</td><td>12.05</td><td>29.92</td><td>0.00</td><td>300</td><td>131 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5149.22	50.35	54.00	-3.65	35.13	33.09	12.05	29.92	0.00	300	131 AVERAGE	 Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5180.00</td><td>107.58</td><td>-----</td><td>-----</td><td>92.31</td><td>33.04</td><td>12.13</td><td>29.90</td><td>0.00</td><td>300</td><td>131 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5180.00	107.58	-----	-----	92.31	33.04	12.13	29.90	0.00	300	131 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	5149.22	50.35	54.00	-3.65	35.13	33.09	12.05	29.92	0.00	300	131 AVERAGE																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	5180.00	107.58	-----	-----	92.31	33.04	12.13	29.90	0.00	300	131 AVERAGE																																																																																																													

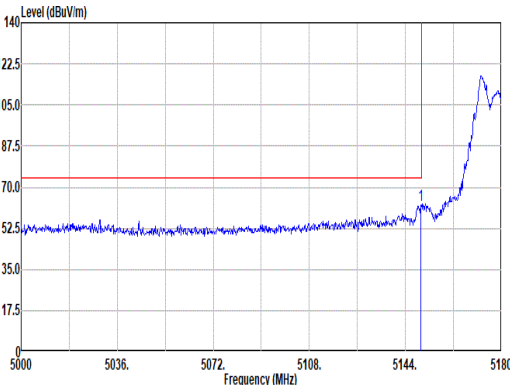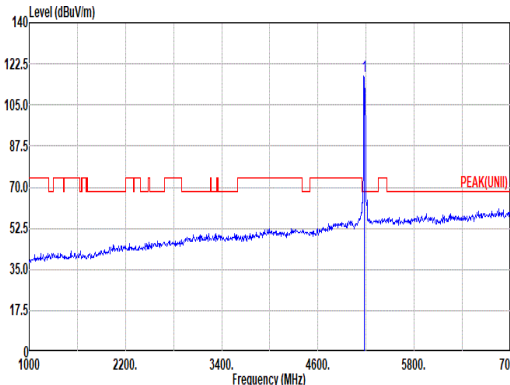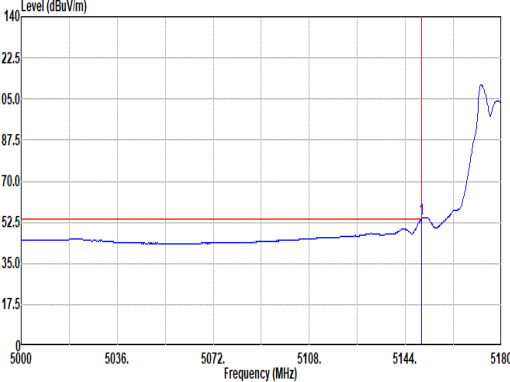
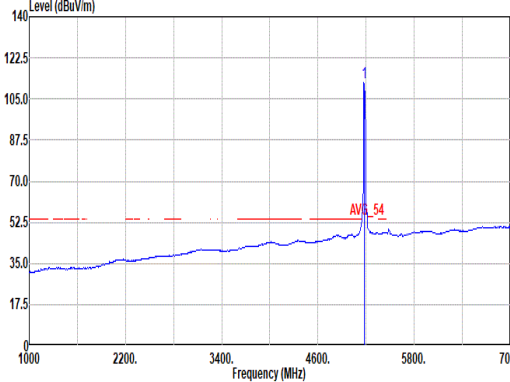


Mode	1																																																																																																		
	Band Edge																																																																																																		
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																		
ANT	D+B+C+A																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.76</td><td>62.45</td><td>74.00</td><td>-11.55</td><td>47.23</td><td>33.09</td><td>12.05</td><td>29.92</td><td>0.00</td><td>339</td><td>244</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.76	62.45	74.00	-11.55	47.23	33.09	12.05	29.92	0.00	339	244	PEAK	Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>117.09</td><td>-----</td><td>-----</td><td>101.04</td><td>33.07</td><td>12.09</td><td>29.91</td><td>0.00</td><td>339</td><td>244</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	117.09	-----	-----	101.04	33.07	12.09	29.91	0.00	339	244
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5149.76	62.45	74.00	-11.55	47.23	33.09	12.05	29.92	0.00	339	244	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	117.09	-----	-----	101.04	33.07	12.09	29.91	0.00	339	244	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.94</td><td>53.80</td><td>54.00</td><td>-0.20</td><td>38.58</td><td>33.09</td><td>12.05</td><td>29.92</td><td>0.00</td><td>339</td><td>244</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.94	53.80	54.00	-0.20	38.58	33.09	12.05	29.92	0.00	339	244	AVERAGE	Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>112.15</td><td>-----</td><td>-----</td><td>96.90</td><td>33.07</td><td>12.09</td><td>29.91</td><td>0.00</td><td>339</td><td>244</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	112.15	-----	-----	96.90	33.07	12.09	29.91	0.00	339	244
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5149.94	53.80	54.00	-0.20	38.58	33.09	12.05	29.92	0.00	339	244	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	112.15	-----	-----	96.90	33.07	12.09	29.91	0.00	339	244	AVERAGE																																																																																							

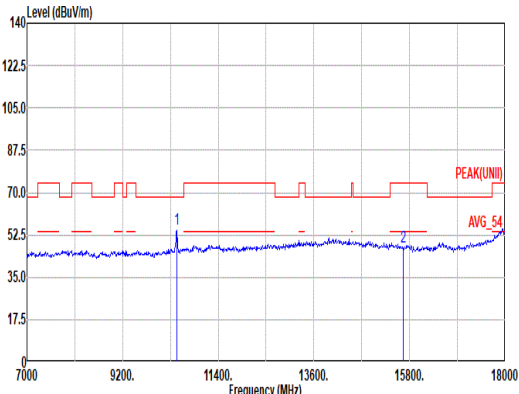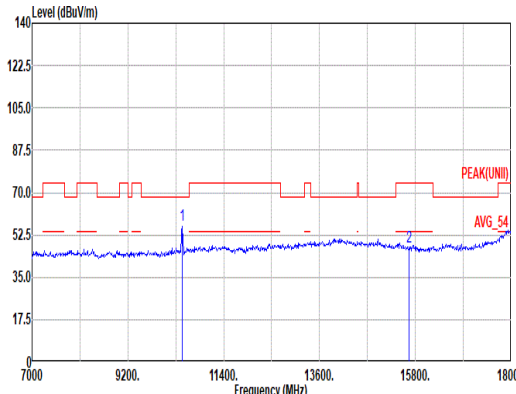

Mode	2																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																																			
ANT	D+B+C+A																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																		
Peak Avg	 Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>54.92</td><td>68.20</td><td>-13.28</td><td>66.61</td><td>38.84</td><td>17.50</td><td>68.42</td><td>0.39</td><td>316</td><td>349</td><td>PEAK</td></tr><tr><td>2</td><td>15660.00</td><td>47.59</td><td>74.00</td><td>-26.41</td><td>54.92</td><td>38.16</td><td>21.58</td><td>67.42</td><td>0.35</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	54.92	68.20	-13.28	66.61	38.84	17.50	68.42	0.39	316	349	PEAK	2	15660.00	47.59	74.00	-26.41	54.92	38.16	21.58	67.42	0.35	--	--	PEAK	 Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>56.48</td><td>68.20</td><td>-11.72</td><td>68.17</td><td>38.84</td><td>17.50</td><td>68.42</td><td>0.39</td><td>309</td><td>179</td><td>PEAK</td></tr><tr><td>2</td><td>15660.00</td><td>47.47</td><td>74.00</td><td>-26.53</td><td>54.80</td><td>38.16</td><td>21.58</td><td>67.42</td><td>0.35</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	56.48	68.20	-11.72	68.17	38.84	17.50	68.42	0.39	309	179	PEAK	2	15660.00	47.47	74.00	-26.53	54.80	38.16	21.58	67.42	0.35	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	10440.00	54.92	68.20	-13.28	66.61	38.84	17.50	68.42	0.39	316	349	PEAK																																																																																																								
2	15660.00	47.59	74.00	-26.41	54.92	38.16	21.58	67.42	0.35	--	--	PEAK																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	10440.00	56.48	68.20	-11.72	68.17	38.84	17.50	68.42	0.39	309	179	PEAK																																																																																																								
2	15660.00	47.47	74.00	-26.53	54.80	38.16	21.58	67.42	0.35	--	--	PEAK																																																																																																								

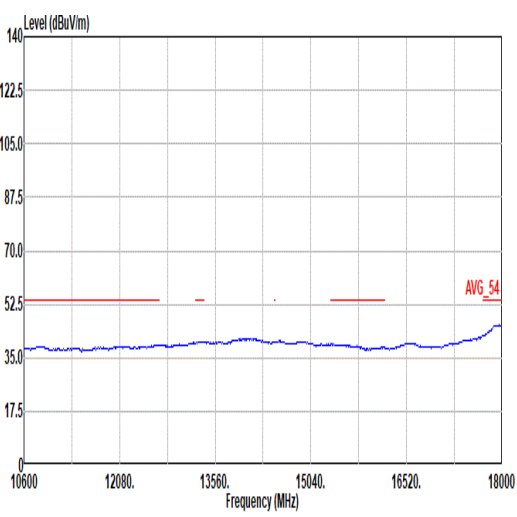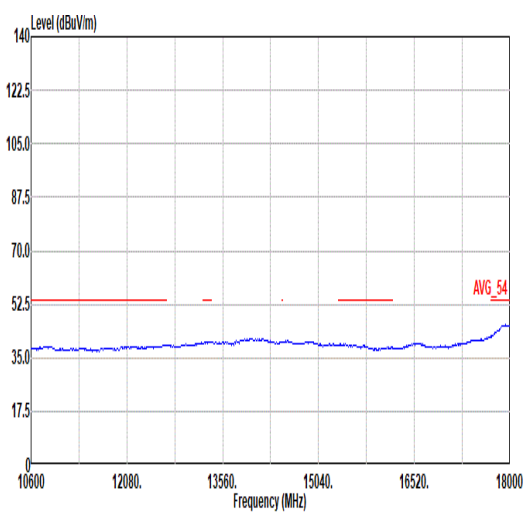

Mode	2	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G -18G Avg	 Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL	 Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL



		3									
Mode	Band Edge - L										
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz										
ANT	D+B+C+A										
Pol.	Horizontal										
Peak	Fundamental										
	Fundamental										
Avg	Horizontal										
	Horizontal										
Avg	Fundamental										
	Fundamental										

Level (dBuV/m)

140

122.5

105.0

87.5

70.0

52.5

35.0

17.5

0

5000

5048

5096

5144

5192

5240

Frequency (MHz)

Site : 03CH02-CA

Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL

: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg
1 5115.20	55.54	74.00	-18.46	40.33	33.15	11.97	29.91	0.00	292 168 PEAK

Level (dBuV/m)

140

122.5

105.0

87.5

70.0

52.5

35.0

17.5

0

1000

2200

3400

4600

5800

7000

Frequency (MHz)

Site : 03CH02-CA

Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL

: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg
1 5240.00	116.14	-----	-----	100.85	32.98	12.20	29.89	0.00	292 168 PEAK

Level (dBuV/m)

140

122.5

105.0

87.5

70.0

52.5

35.0

17.5

0

5000

5048

5096

5144

5192

5240

Frequency (MHz)

Site : 03CH02-CA

Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL

: RBW:1000.000kHz VBW:0.010kHz SMT:Auto

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg
1 5145.68	45.74	54.00	-8.26	30.52	33.10	12.04	29.92	0.00	292 168 AVERAGE

Level (dBuV/m)

140

122.5

105.0

87.5

70.0

52.5

35.0

17.5

0

1000

2200

3400

4600

5800

7000

Frequency (MHz)



Site : 03CH02-CA

Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL





: RBW:1000.000kHz VBW:0.010kHz SMT:Auto

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg
1 5240.00	110.53	-----	-----	95.24	32.98	12.20	29.89	0.00	292 168 AVERAGE

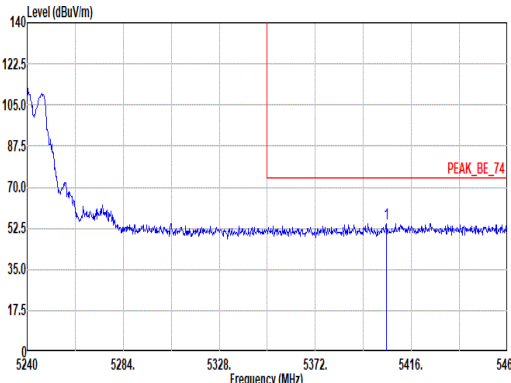
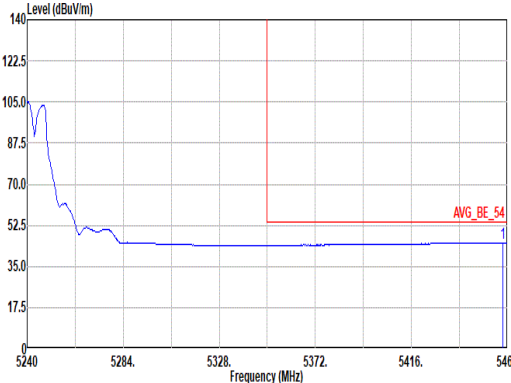


Mode	3																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																							
ANT	D+B+C+A																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	 Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5404.56</td><td>54.60</td><td>74.00</td><td>-19.40</td><td>39.06</td><td>33.03</td><td>12.42</td><td>29.91</td><td>0.00</td><td>292</td><td>168</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5404.56	54.60	74.00	-19.40	39.06	33.03	12.42	29.91	0.00	292	168	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																		
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																														
1	5404.56	54.60	74.00	-19.40	39.06	33.03	12.42	29.91	0.00	292	168	PEAK																																												
Avg	 Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5458.02</td><td>44.92</td><td>54.00</td><td>-9.08</td><td>29.43</td><td>32.92</td><td>12.48</td><td>29.91</td><td>0.00</td><td>292</td><td>168</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5458.02	44.92	54.00	-9.08	29.43	32.92	12.48	29.91	0.00	292	168	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																		
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																														
1	5458.02	44.92	54.00	-9.08	29.43	32.92	12.48	29.91	0.00	292	168	AVERAGE																																												

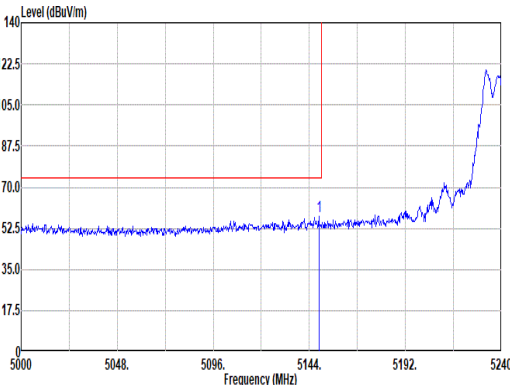
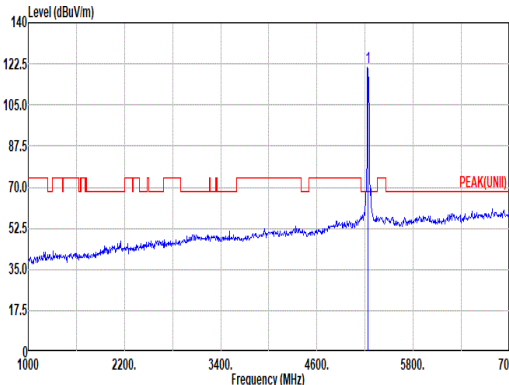
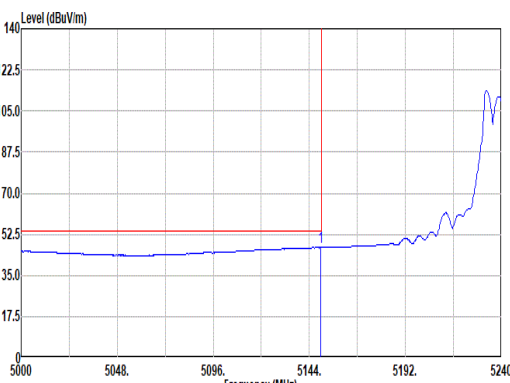
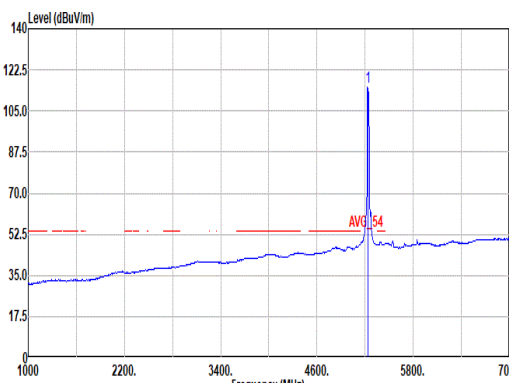


Mode	3																																																																																															
	Band Edge - L																																																																																															
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																															
ANT	D+B+C+A																																																																																															
Pol.	Vertical						Fundamental																																																																																									
Peak	 Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5148.80</td><td>57.47</td><td>74.00</td><td>-16.53</td><td></td><td>42.25</td><td>33.09</td><td>12.05</td><td>29.92</td><td>0.00</td><td>248</td><td>243</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5148.80	57.47	74.00	-16.53		42.25	33.09	12.05	29.92	0.00	248	243	PEAK	 Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>120.98</td><td>-----</td><td>-----</td><td></td><td>105.68</td><td>32.99</td><td>12.20</td><td>29.89</td><td>0.00</td><td>248</td><td>243</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5240.00	120.98	-----	-----		105.68	32.99	12.20	29.89	0.00	248	243	PEAK
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																			
1	5148.80	57.47	74.00	-16.53		42.25	33.09	12.05	29.92	0.00	248	243	PEAK																																																																																			
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																			
1	5240.00	120.98	-----	-----		105.68	32.99	12.20	29.89	0.00	248	243	PEAK																																																																																			
Avg	 Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.76</td><td>46.82</td><td>54.00</td><td>-7.18</td><td></td><td>31.60</td><td>33.09</td><td>12.05</td><td>29.92</td><td>0.00</td><td>248</td><td>243</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5149.76	46.82	54.00	-7.18		31.60	33.09	12.05	29.92	0.00	248	243	AVERAGE	 Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>115.11</td><td>-----</td><td>-----</td><td></td><td>99.81</td><td>32.99</td><td>12.20</td><td>29.89</td><td>0.00</td><td>248</td><td>243</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5240.00	115.11	-----	-----		99.81	32.99	12.20	29.89	0.00	248	243	AVERAGE
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																			
1	5149.76	46.82	54.00	-7.18		31.60	33.09	12.05	29.92	0.00	248	243	AVERAGE																																																																																			
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																			
1	5240.00	115.11	-----	-----		99.81	32.99	12.20	29.89	0.00	248	243	AVERAGE																																																																																			



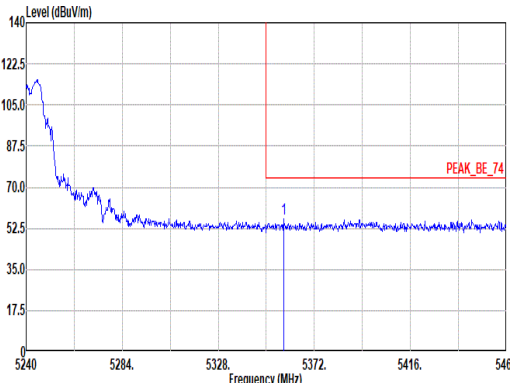
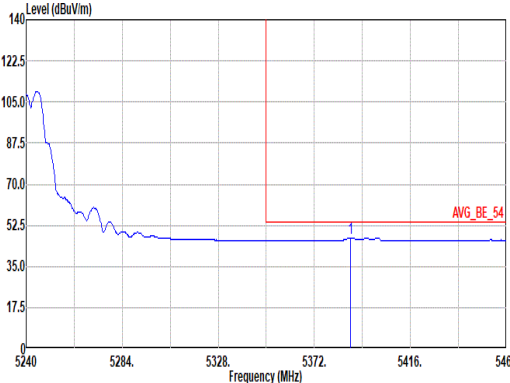


Mode	3																																																						
	Band Edge - R																																																						
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																						
ANT	D+B+C+A																																																						
Pol.	Vertical						Fundamental																																																
Peak	 Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5357.92</td><td>56.32</td><td>74.00</td><td>-17.68</td><td>40.79</td><td>33.07</td><td>12.36</td><td>29.90</td><td>0.00</td><td>248</td><td>243 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5357.92	56.32	74.00	-17.68	40.79	33.07	12.36	29.90	0.00	248	243 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1 5357.92	56.32	74.00	-17.68	40.79	33.07	12.36	29.90	0.00	248	243 PEAK																																													
Avg	 Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5388.50</td><td>46.97</td><td>54.00</td><td>-7.03</td><td>31.43</td><td>33.05</td><td>12.40</td><td>29.91</td><td>0.00</td><td>248</td><td>243 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5388.50	46.97	54.00	-7.03	31.43	33.05	12.40	29.91	0.00	248	243 AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1 5388.50	46.97	54.00	-7.03	31.43	33.05	12.40	29.91	0.00	248	243 AVERAGE																																													

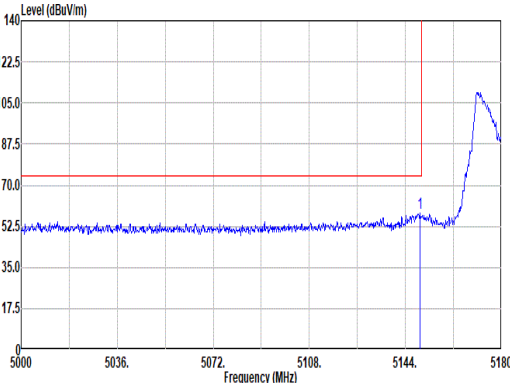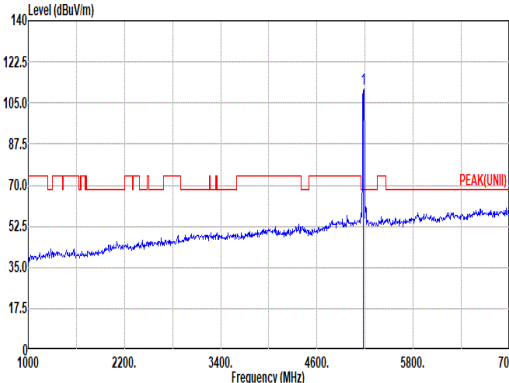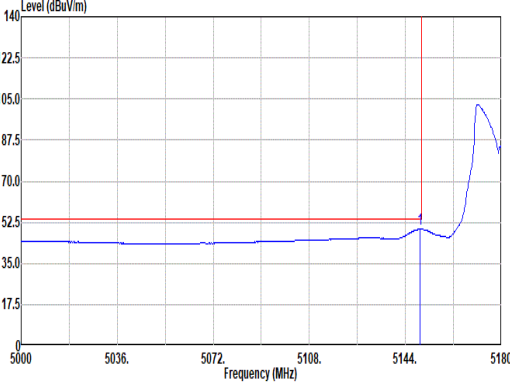
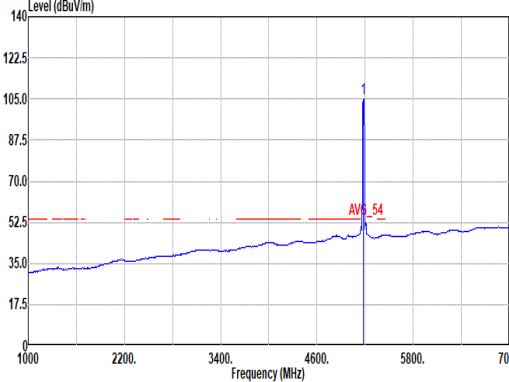


Mode	4																																																																																																																							
	Band Edge																																																																																																																							
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_5180MHz																																																																																																																							
ANT	D+B+C+A																																																																																																																							
Pol.	Horizontal						Fundamental																																																																																																																	
Peak	 Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5149.58</td><td>50.35</td><td>74.00</td><td>-15.65</td><td>43.13</td><td>33.09</td><td>12.05</td><td>29.92</td><td>0.00</td><td>300</td><td>129 PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5149.58	50.35	74.00	-15.65	43.13	33.09	12.05	29.92	0.00	300	129 PEAK	 Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>110.68</td><td>-----</td><td>-----</td><td>95.41</td><td>33.04</td><td>12.13</td><td>29.90</td><td>0.00</td><td>300</td><td>129 PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5180.00	110.68	-----	-----	95.41	33.04	12.13	29.90	0.00	300	129 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	5149.58	50.35	74.00	-15.65	43.13	33.09	12.05	29.92	0.00	300	129 PEAK																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	5180.00	110.68	-----	-----	95.41	33.04	12.13	29.90	0.00	300	129 PEAK																																																																																																													
Avg	 Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5149.40</td><td>49.54</td><td>54.00</td><td>-4.46</td><td>34.32</td><td>33.09</td><td>12.05</td><td>29.92</td><td>0.00</td><td>300</td><td>129 AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5149.40	49.54	54.00	-4.46	34.32	33.09	12.05	29.92	0.00	300	129 AVERAGE	 Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>105.36</td><td>-----</td><td>-----</td><td>90.09</td><td>33.04</td><td>12.13</td><td>29.90</td><td>0.00</td><td>300</td><td>129 AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5180.00	105.36	-----	-----	90.09	33.04	12.13	29.90	0.00	300	129 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	5149.40	49.54	54.00	-4.46	34.32	33.09	12.05	29.92	0.00	300	129 AVERAGE																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	5180.00	105.36	-----	-----	90.09	33.04	12.13	29.90	0.00	300	129 AVERAGE																																																																																																													

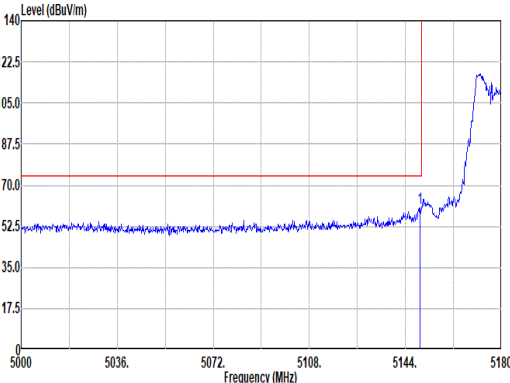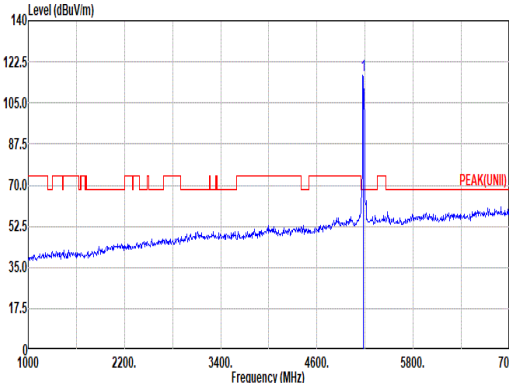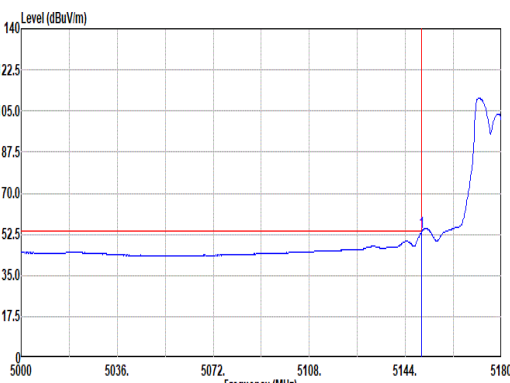
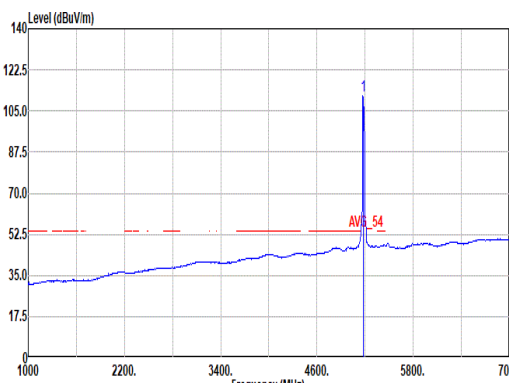


Mode	4																																																																																								
	Band Edge																																																																																								
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_5180MHz																																																																																								
ANT	D+B+C+A																																																																																								
Pol.	Vertical						Fundamental																																																																																		
Peak																																																																																									
	Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.40</td><td>60.33</td><td>74.00</td><td>-13.67</td><td>45.11</td><td>33.09</td><td>12.05</td><td>29.92</td><td>0.00</td><td>300</td><td>244</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5149.40	60.33	74.00	-13.67	45.11	33.09	12.05	29.92	0.00	300	244	PEAK	Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>116.70</td><td>-----</td><td>-----</td><td>101.45</td><td>33.07</td><td>12.09</td><td>29.91</td><td>0.00</td><td>300</td><td>244</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5180.00	116.70	-----	-----	101.45	33.07	12.09	29.91	0.00	300	244
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																													
1	5149.40	60.33	74.00	-13.67	45.11	33.09	12.05	29.92	0.00	300	244	PEAK																																																																													
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																													
1	5180.00	116.70	-----	-----	101.45	33.07	12.09	29.91	0.00	300	244	PEAK																																																																													
Avg																																																																																									
	Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.94</td><td>53.44</td><td>54.00</td><td>-0.56</td><td>38.22</td><td>33.09</td><td>12.05</td><td>29.92</td><td>0.00</td><td>300</td><td>244</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5149.94	53.44	54.00	-0.56	38.22	33.09	12.05	29.92	0.00	300	244	AVERAGE	Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>111.65</td><td>-----</td><td>-----</td><td>96.40</td><td>33.07</td><td>12.09</td><td>29.91</td><td>0.00</td><td>300</td><td>244</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5180.00	111.65	-----	-----	96.40	33.07	12.09	29.91	0.00	300	244
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																													
1	5149.94	53.44	54.00	-0.56	38.22	33.09	12.05	29.92	0.00	300	244	AVERAGE																																																																													
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																													
1	5180.00	111.65	-----	-----	96.40	33.07	12.09	29.91	0.00	300	244	AVERAGE																																																																													



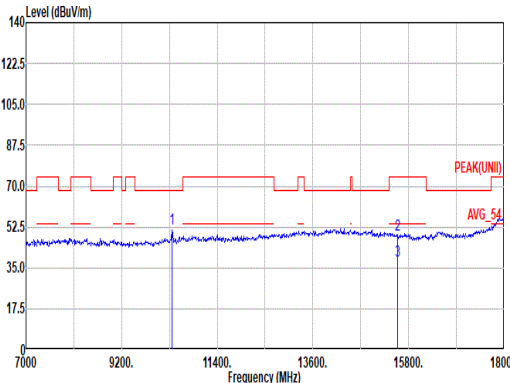
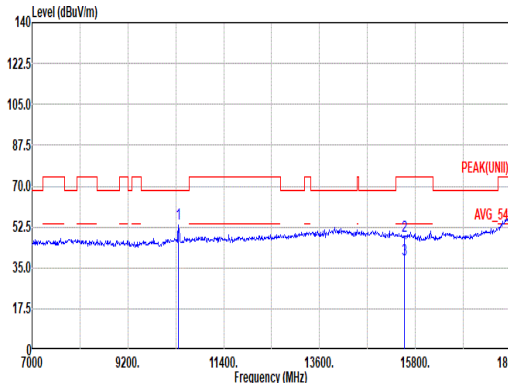


Mode	4																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_5180MHz																																																																																																																																													
ANT	D+B+C+A																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	 Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL Mode : 4 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>51.71</td><td>68.20</td><td>-16.49</td><td>63.61</td><td>38.78</td><td>17.42</td><td>68.50</td><td>0.40</td><td>400</td><td>270</td><td>PEAK</td></tr><tr><td>2</td><td>15540.00</td><td>48.94</td><td>74.00</td><td>-25.06</td><td>55.87</td><td>38.43</td><td>21.49</td><td>67.19</td><td>0.34</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>15540.00</td><td>38.29</td><td>54.00</td><td>-15.71</td><td>45.22</td><td>38.43</td><td>21.49</td><td>67.19</td><td>0.34</td><td>--</td><td>--</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	51.71	68.20	-16.49	63.61	38.78	17.42	68.50	0.40	400	270	PEAK	2	15540.00	48.94	74.00	-25.06	55.87	38.43	21.49	67.19	0.34	--	--	PEAK	3	15540.00	38.29	54.00	-15.71	45.22	38.43	21.49	67.19	0.34	--	--	Average	 Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL Mode : 4 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>53.87</td><td>68.20</td><td>-14.33</td><td>65.77</td><td>38.78</td><td>17.42</td><td>68.50</td><td>0.40</td><td>298</td><td>176</td><td>PEAK</td></tr><tr><td>2</td><td>15540.00</td><td>48.86</td><td>74.00</td><td>-25.14</td><td>55.79</td><td>38.43</td><td>21.49</td><td>67.19</td><td>0.34</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>15540.00</td><td>38.32</td><td>54.00</td><td>-15.68</td><td>45.25</td><td>38.43</td><td>21.49</td><td>67.19</td><td>0.34</td><td>--</td><td>--</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	53.87	68.20	-14.33	65.77	38.78	17.42	68.50	0.40	298	176	PEAK	2	15540.00	48.86	74.00	-25.14	55.79	38.43	21.49	67.19	0.34	--	--	PEAK	3	15540.00	38.32	54.00	-15.68	45.25	38.43	21.49	67.19	0.34	--	--	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	10360.00	51.71	68.20	-16.49	63.61	38.78	17.42	68.50	0.40	400	270	PEAK																																																																																																																																		
2	15540.00	48.94	74.00	-25.06	55.87	38.43	21.49	67.19	0.34	--	--	PEAK																																																																																																																																		
3	15540.00	38.29	54.00	-15.71	45.22	38.43	21.49	67.19	0.34	--	--	Average																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	10360.00	53.87	68.20	-14.33	65.77	38.78	17.42	68.50	0.40	298	176	PEAK																																																																																																																																		
2	15540.00	48.86	74.00	-25.14	55.79	38.43	21.49	67.19	0.34	--	--	PEAK																																																																																																																																		
3	15540.00	38.32	54.00	-15.68	45.25	38.43	21.49	67.19	0.34	--	--	Average																																																																																																																																		

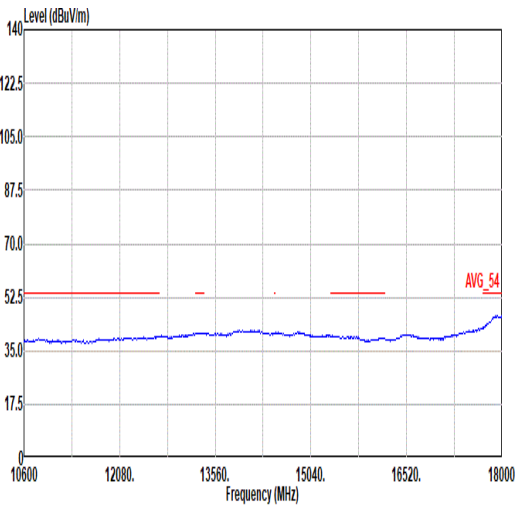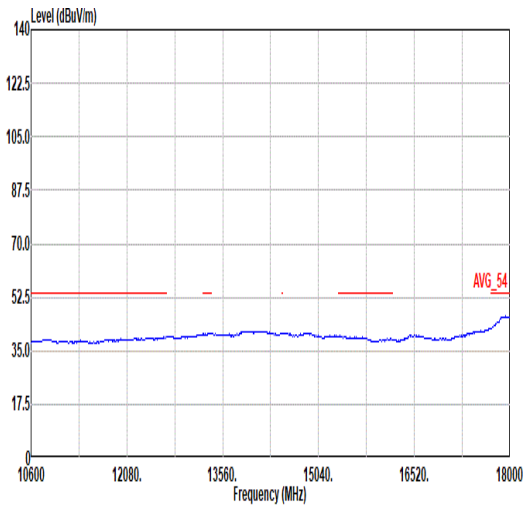

Mode	4	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_5180MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G -18G Avg	 Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL Mode : 4	 Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL Mode : 4

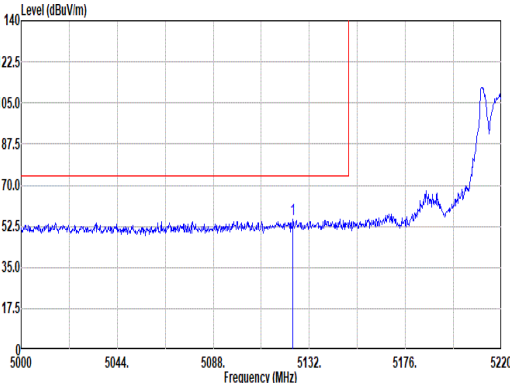
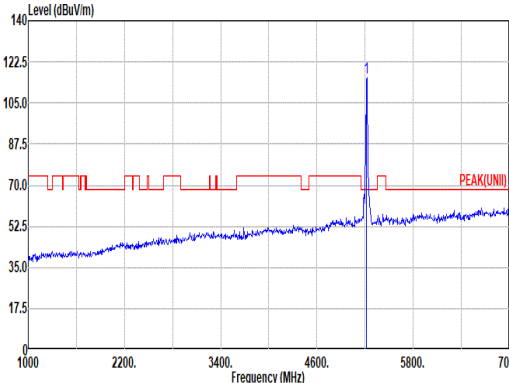
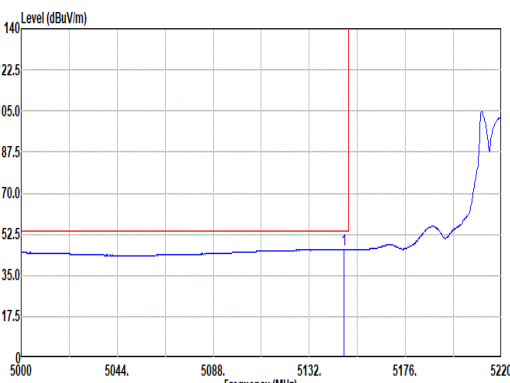
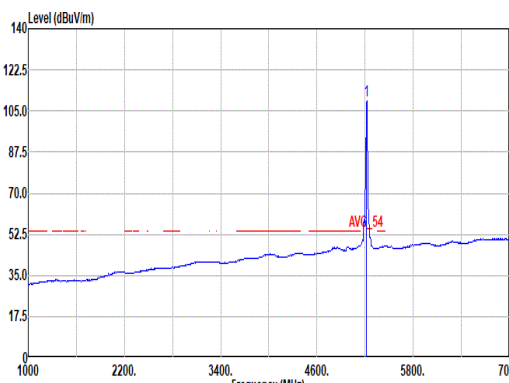


		5																																																																																											
Mode		Band Edge - L																																																																																											
		U-NII-1_5.15-5.25_802.11be EHT20_CH44_5220MHz																																																																																											
ANT		D+B+C+A																																																																																											
Pol.																																																																																													
Peak	Horizontal	Fundamental																																																																																											
	 Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5124.52</td><td>55.42</td><td>74.00</td><td>-18.58</td><td>40.21</td><td>33.13</td><td>11.99</td><td>29.91</td><td>0.00</td><td>300</td><td>135</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5124.52	55.42	74.00	-18.58	40.21	33.13	11.99	29.91	0.00	300	135	PEAK	 Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>115.53</td><td>-----</td><td>-----</td><td>100.23</td><td>33.00</td><td>12.19</td><td>29.89</td><td>0.00</td><td>300</td><td>135</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	115.53	-----	-----	100.23	33.00	12.19	29.89	0.00	300	135
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5124.52	55.42	74.00	-18.58	40.21	33.13	11.99	29.91	0.00	300	135	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5220.00	115.53	-----	-----	100.23	33.00	12.19	29.89	0.00	300	135	PEAK																																																																																	
Avg	Horizontal	Fundamental																																																																																											
	 Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.84</td><td>46.04</td><td>54.00</td><td>-7.96</td><td>30.82</td><td>33.09</td><td>12.05</td><td>29.92</td><td>0.00</td><td>300</td><td>135</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.84	46.04	54.00	-7.96	30.82	33.09	12.05	29.92	0.00	300	135	AVERAGE	 Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>109.12</td><td>-----</td><td>-----</td><td>93.82</td><td>32.99</td><td>12.20</td><td>29.89</td><td>0.00</td><td>300</td><td>135</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	109.12	-----	-----	93.82	32.99	12.20	29.89	0.00	300	135
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5147.84	46.04	54.00	-7.96	30.82	33.09	12.05	29.92	0.00	300	135	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5220.00	109.12	-----	-----	93.82	32.99	12.20	29.89	0.00	300	135	AVERAGE																																																																																	





Mode	5																																																					
	Band Edge - R																																																					
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_5220MHz																																																					
ANT	D+B+C+A																																																					
Pol.	Horizontal										Fundamental																																											
Peak	Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5399.76</td><td>54.44</td><td>74.00</td><td>-19.56</td><td>38.90</td><td>33.04</td><td>12.41</td><td>29.91</td><td>0.00</td><td>300</td><td>135</td><td>PEAK</td></tr></table>										Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5399.76	54.44	74.00	-19.56	38.90	33.04	12.41	29.91	0.00	300	135	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																												
1 5399.76	54.44	74.00	-19.56	38.90	33.04	12.41	29.91	0.00	300	135	PEAK																																											
Avg	Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5459.28</td><td>45.34</td><td>54.00</td><td>-8.66</td><td>29.85</td><td>32.92</td><td>12.48</td><td>29.91</td><td>0.00</td><td>300</td><td>135</td><td>AVERAGE</td></tr></table>										Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5459.28	45.34	54.00	-8.66	29.85	32.92	12.48	29.91	0.00	300	135	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																												
1 5459.28	45.34	54.00	-8.66	29.85	32.92	12.48	29.91	0.00	300	135	AVERAGE																																											

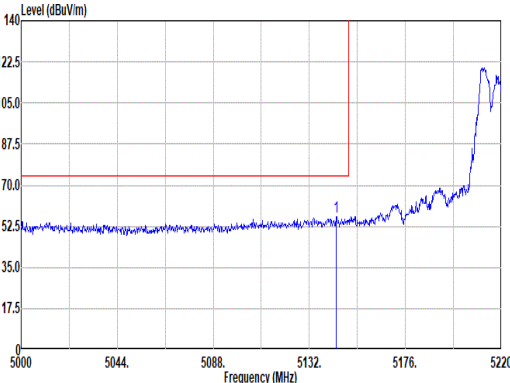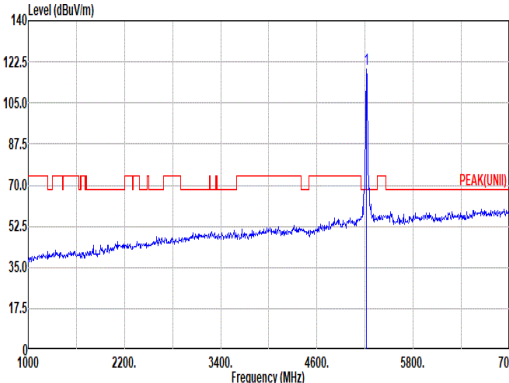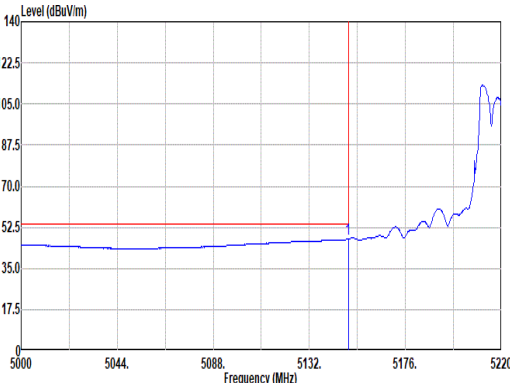
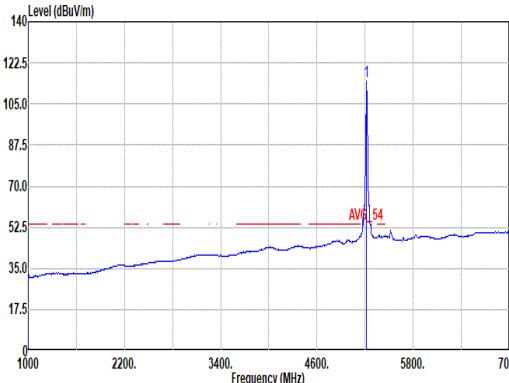


Mode	5																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_5220MHz																																																																																																		
ANT	D+B+C+A																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5144.32</td><td>56.71</td><td>74.00</td><td>-17.29</td><td>41.49</td><td>33.10</td><td>12.04</td><td>29.92</td><td>0.00</td><td>307</td><td>250</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5144.32	56.71	74.00	-17.29	41.49	33.10	12.04	29.92	0.00	307	250	PEAK	Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>119.45</td><td>-----</td><td>-----</td><td>104.16</td><td>33.01</td><td>12.18</td><td>29.90</td><td>0.00</td><td>307</td><td>250</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	119.45	-----	-----	104.16	33.01	12.18	29.90	0.00	307	250
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5144.32	56.71	74.00	-17.29	41.49	33.10	12.04	29.92	0.00	307	250	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5220.00	119.45	-----	-----	104.16	33.01	12.18	29.90	0.00	307	250	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.82</td><td>47.51</td><td>54.00</td><td>-6.49</td><td>32.29</td><td>33.09</td><td>12.05</td><td>29.92</td><td>0.00</td><td>307</td><td>250</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.82	47.51	54.00	-6.49	32.29	33.09	12.05	29.92	0.00	307	250	AVERAGE	Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>114.54</td><td>-----</td><td>-----</td><td>99.25</td><td>33.01</td><td>12.18</td><td>29.90</td><td>0.00</td><td>307</td><td>250</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	114.54	-----	-----	99.25	33.01	12.18	29.90	0.00	307	250
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5149.82	47.51	54.00	-6.49	32.29	33.09	12.05	29.92	0.00	307	250	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5220.00	114.54	-----	-----	99.25	33.01	12.18	29.90	0.00	307	250	AVERAGE																																																																																							

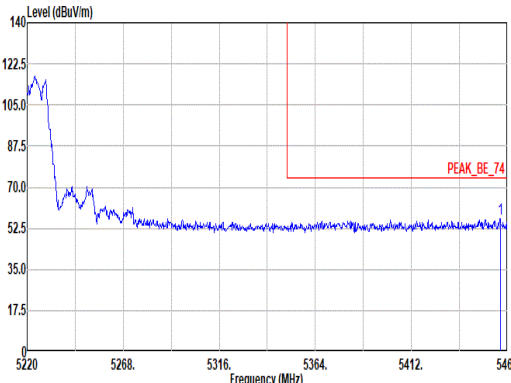
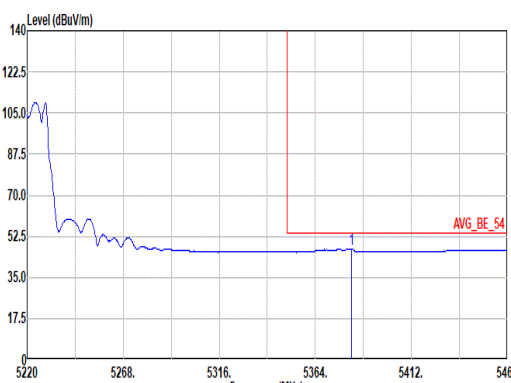


Mode	5																																														
	Band Edge - R																																														
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_5220MHz																																														
ANT	D+B+C+A																																														
Pol.	Vertical						Fundamental																																								
Peak	 Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5456.40</td><td>56.64</td><td>74.00</td><td>-17.36</td><td>41.16</td><td>32.92</td><td>12.47</td><td>29.91</td><td>0.00</td><td>307</td><td>250</td><td>PEAK</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5456.40	56.64	74.00	-17.36	41.16	32.92	12.47	29.91	0.00	307	250	PEAK	Blank				
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																					
1 5456.40	56.64	74.00	-17.36	41.16	32.92	12.47	29.91	0.00	307	250	PEAK																																				
Avg	 Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5382.24</td><td>47.02</td><td>54.00</td><td>-6.98</td><td>31.49</td><td>33.05</td><td>12.39</td><td>29.91</td><td>0.00</td><td>307</td><td>250</td><td>AVERAGE</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5382.24	47.02	54.00	-6.98	31.49	33.05	12.39	29.91	0.00	307	250	AVERAGE	Blank				
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																					
1 5382.24	47.02	54.00	-6.98	31.49	33.05	12.39	29.91	0.00	307	250	AVERAGE																																				



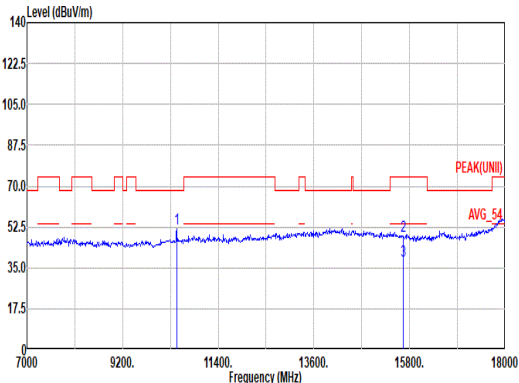
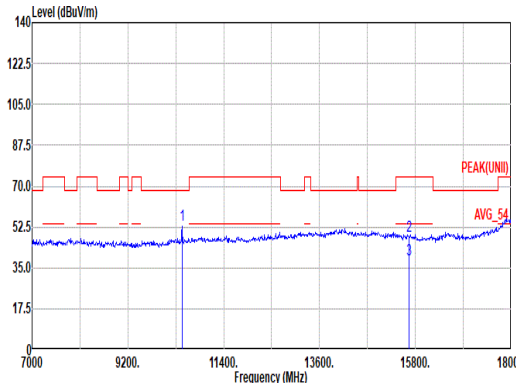


Mode	5																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_5220MHz																																																																																																																																													
ANT	D+B+C+A																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	 Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL Mode : 5 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>51.75</td><td>68.20</td><td>-16.45</td><td>63.44</td><td>38.84</td><td>17.50</td><td>68.42</td><td>0.39</td><td>400</td><td>271</td><td>PEAK</td></tr><tr><td>2</td><td>15660.00</td><td>48.68</td><td>74.00</td><td>-25.32</td><td>56.01</td><td>38.16</td><td>21.58</td><td>67.42</td><td>0.35</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>15660.00</td><td>38.15</td><td>54.00</td><td>-15.85</td><td>45.48</td><td>38.16</td><td>21.58</td><td>67.42</td><td>0.35</td><td>--</td><td>--</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	51.75	68.20	-16.45	63.44	38.84	17.50	68.42	0.39	400	271	PEAK	2	15660.00	48.68	74.00	-25.32	56.01	38.16	21.58	67.42	0.35	--	--	PEAK	3	15660.00	38.15	54.00	-15.85	45.48	38.16	21.58	67.42	0.35	--	--	Average	 Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL Mode : 5 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>53.12</td><td>68.20</td><td>-15.08</td><td>64.81</td><td>38.84</td><td>17.50</td><td>68.42</td><td>0.39</td><td>297</td><td>176</td><td>PEAK</td></tr><tr><td>2</td><td>15660.00</td><td>48.50</td><td>74.00</td><td>-25.50</td><td>55.83</td><td>38.16</td><td>21.58</td><td>67.42</td><td>0.35</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>15660.00</td><td>38.61</td><td>54.00</td><td>-15.39</td><td>45.94</td><td>38.16</td><td>21.58</td><td>67.42</td><td>0.35</td><td>--</td><td>--</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	53.12	68.20	-15.08	64.81	38.84	17.50	68.42	0.39	297	176	PEAK	2	15660.00	48.50	74.00	-25.50	55.83	38.16	21.58	67.42	0.35	--	--	Peak	3	15660.00	38.61	54.00	-15.39	45.94	38.16	21.58	67.42	0.35	--	--	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	10440.00	51.75	68.20	-16.45	63.44	38.84	17.50	68.42	0.39	400	271	PEAK																																																																																																																																		
2	15660.00	48.68	74.00	-25.32	56.01	38.16	21.58	67.42	0.35	--	--	PEAK																																																																																																																																		
3	15660.00	38.15	54.00	-15.85	45.48	38.16	21.58	67.42	0.35	--	--	Average																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	10440.00	53.12	68.20	-15.08	64.81	38.84	17.50	68.42	0.39	297	176	PEAK																																																																																																																																		
2	15660.00	48.50	74.00	-25.50	55.83	38.16	21.58	67.42	0.35	--	--	Peak																																																																																																																																		
3	15660.00	38.61	54.00	-15.39	45.94	38.16	21.58	67.42	0.35	--	--	Average																																																																																																																																		

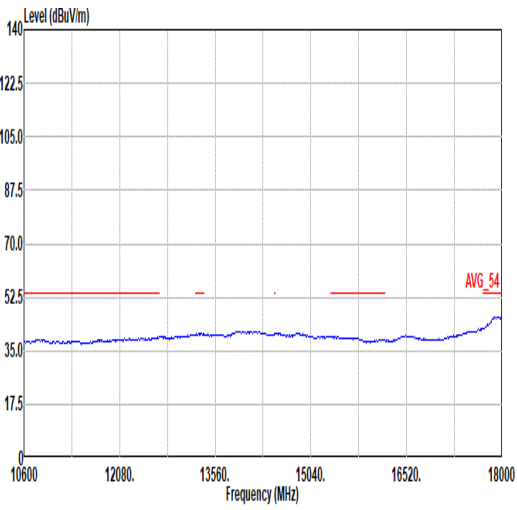
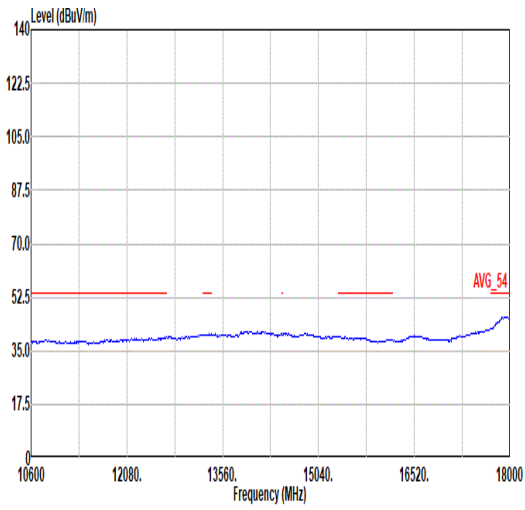


Mode	5	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_5220MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G -18G Avg	 Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL Mode : 5	 Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL Mode : 5

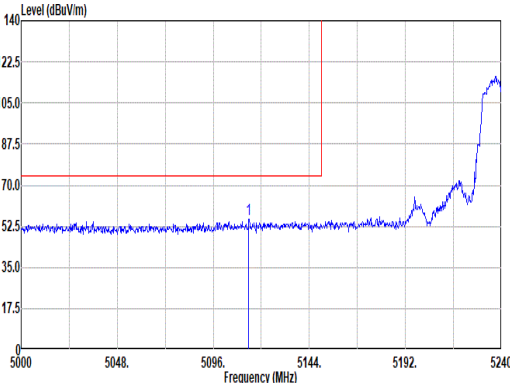
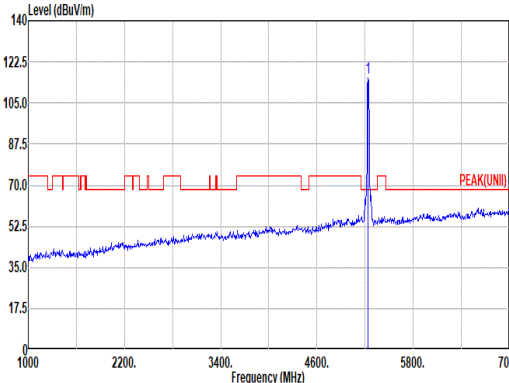
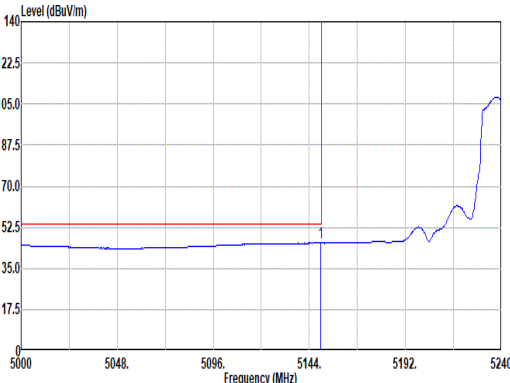
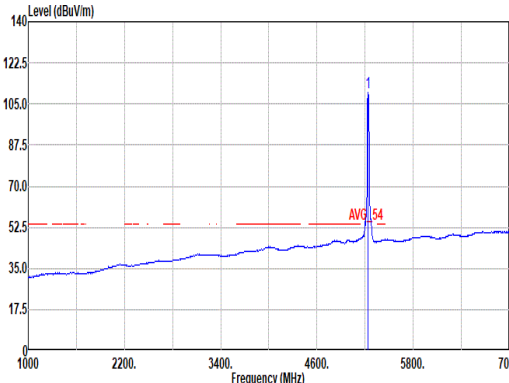


	6																																																																																																		
Mode	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_5240MHz																																																																																																		
ANT	D+B+C+A																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5113.76</td><td>55.58</td><td>74.00</td><td>-18.42</td><td>40.37</td><td>33.15</td><td>11.97</td><td>29.91</td><td>0.00</td><td>300</td><td>169</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5113.76	55.58	74.00	-18.42	40.37	33.15	11.97	29.91	0.00	300	169	PEAK	Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>115.93</td><td>-----</td><td>-----</td><td>100.64</td><td>32.98</td><td>12.20</td><td>29.89</td><td>0.00</td><td>300</td><td>169</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	115.93	-----	-----	100.64	32.98	12.20	29.89	0.00	300	169
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5113.76	55.58	74.00	-18.42	40.37	33.15	11.97	29.91	0.00	300	169	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5240.00	115.93	-----	-----	100.64	32.98	12.20	29.89	0.00	300	169	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.76</td><td>45.76</td><td>54.00</td><td>-8.24</td><td>30.54</td><td>33.09</td><td>12.05</td><td>29.92</td><td>0.00</td><td>300</td><td>169</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.76	45.76	54.00	-8.24	30.54	33.09	12.05	29.92	0.00	300	169	AVERAGE	Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>109.62</td><td>-----</td><td>-----</td><td>94.33</td><td>32.98</td><td>12.20</td><td>29.89</td><td>0.00</td><td>300</td><td>169</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	109.62	-----	-----	94.33	32.98	12.20	29.89	0.00	300	169
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5149.76	45.76	54.00	-8.24	30.54	33.09	12.05	29.92	0.00	300	169	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5240.00	109.62	-----	-----	94.33	32.98	12.20	29.89	0.00	300	169	AVERAGE																																																																																							

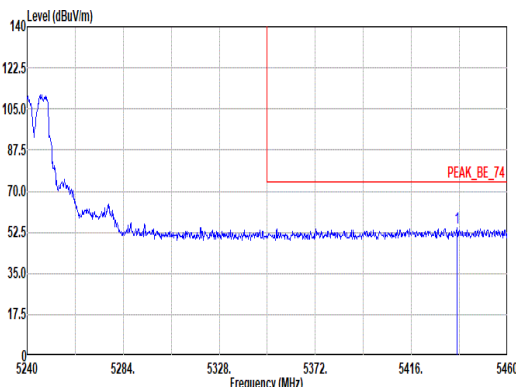
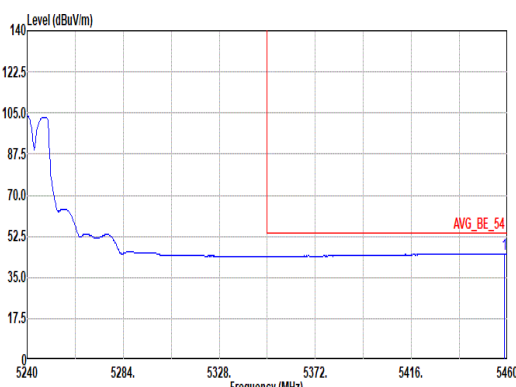


Mode	6																																																	
	Band Edge - R																																																	
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_5240MHz																																																	
ANT	D+B+C+A																																																	
Pol.	Horizontal					Fundamental																																												
Peak	 Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5436.90</td><td>54.34</td><td>74.00</td><td>-19.66</td><td>38.85</td><td>32.95</td><td>12.45</td><td>29.91</td><td>0.00</td><td>300 169 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1 5436.90	54.34	74.00	-19.66	38.85	32.95	12.45	29.91	0.00	300 169 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																												
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																									
1 5436.90	54.34	74.00	-19.66	38.85	32.95	12.45	29.91	0.00	300 169 PEAK																																									
Avg	 Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5458.46</td><td>44.95</td><td>54.00</td><td>-9.05</td><td>29.46</td><td>32.92</td><td>12.48</td><td>29.91</td><td>0.00</td><td>300 169 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1 5458.46	44.95	54.00	-9.05	29.46	32.92	12.48	29.91	0.00	300 169 AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																												
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																									
1 5458.46	44.95	54.00	-9.05	29.46	32.92	12.48	29.91	0.00	300 169 AVERAGE																																									

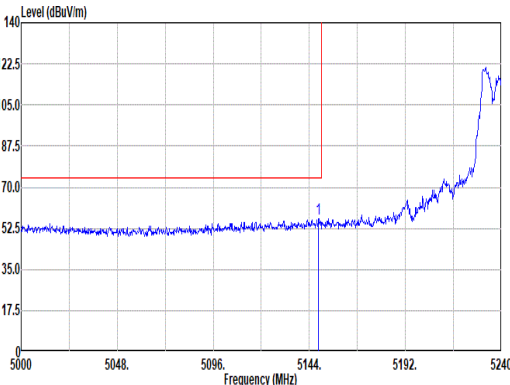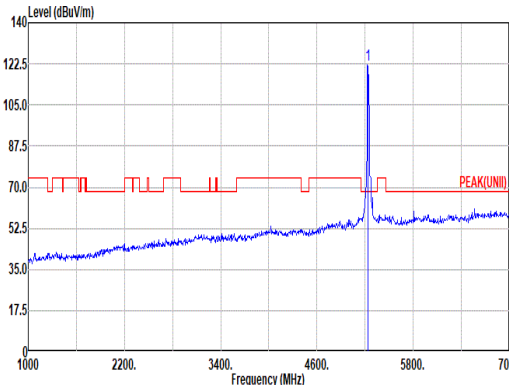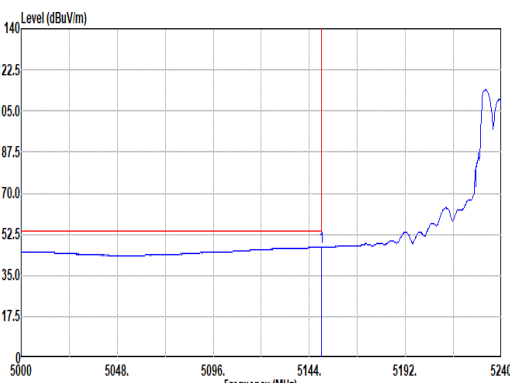
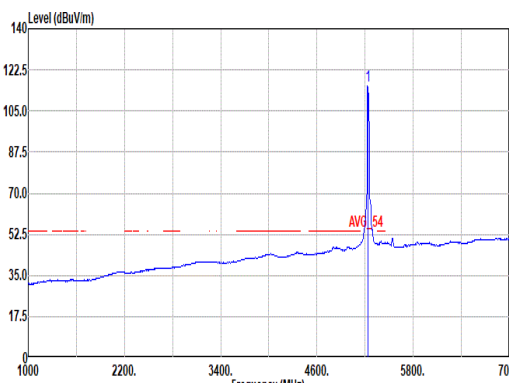


Mode	6																																																																																													
	Band Edge - L																																																																																													
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_5240MHz																																																																																													
ANT	D+B+C+A																																																																																													
Pol.	Vertical						Fundamental																																																																																							
Peak																																																																																														
	Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5140.56</td><td>56.66</td><td>74.00</td><td>-17.34</td><td>41.44</td><td>33.09</td><td>12.05</td><td>29.92</td><td>0.00</td><td>250</td><td>247</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5140.56	56.66	74.00	-17.34	41.44	33.09	12.05	29.92	0.00	250	247	PEAK	Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>121.99</td><td>-----</td><td>-----</td><td>-----</td><td>106.69</td><td>32.99</td><td>12.20</td><td>29.89</td><td>0.00</td><td>250</td><td>247</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5240.00	121.99	-----	-----	-----	106.69	32.99	12.20	29.89	0.00	250	247
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																	
1	5140.56	56.66	74.00	-17.34	41.44	33.09	12.05	29.92	0.00	250	247	PEAK																																																																																		
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																	
1	5240.00	121.99	-----	-----	-----	106.69	32.99	12.20	29.89	0.00	250	247	PEAK																																																																																	
Avg																																																																																														
	Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>46.99</td><td>54.00</td><td>-7.01</td><td>31.77</td><td>33.09</td><td>12.05</td><td>29.92</td><td>0.00</td><td>250</td><td>247</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5150.00	46.99	54.00	-7.01	31.77	33.09	12.05	29.92	0.00	250	247	AVERAGE	Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>115.44</td><td>-----</td><td>-----</td><td>-----</td><td>100.14</td><td>32.99</td><td>12.20</td><td>29.89</td><td>0.00</td><td>250</td><td>247</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5240.00	115.44	-----	-----	-----	100.14	32.99	12.20	29.89	0.00	250	247
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																	
1	5150.00	46.99	54.00	-7.01	31.77	33.09	12.05	29.92	0.00	250	247	AVERAGE																																																																																		
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																	
1	5240.00	115.44	-----	-----	-----	100.14	32.99	12.20	29.89	0.00	250	247	AVERAGE																																																																																	

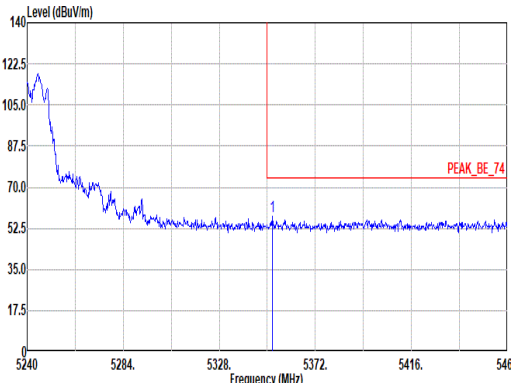
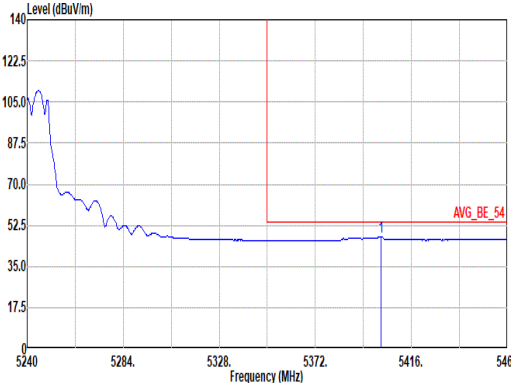


Mode	6																																																												
	Band Edge - R																																																												
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_5240MHz																																																												
ANT	D+B+C+A																																																												
Pol.	Vertical						Fundamental																																																						
Peak	 Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5352.42</td><td>57.35</td><td>74.00</td><td>-16.65</td><td>41.83</td><td>33.07</td><td>12.35</td><td>29.90</td><td>0.00</td><td>250</td><td>247</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5352.42	57.35	74.00	-16.65	41.83	33.07	12.35	29.90	0.00	250	247	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																				
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																		
1	5352.42	57.35	74.00	-16.65	41.83	33.07	12.35	29.90	0.00	250	247	PEAK																																																	
Avg	 Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5402.14</td><td>47.45</td><td>54.00</td><td>-6.55</td><td>31.91</td><td>33.04</td><td>12.41</td><td>29.91</td><td>0.00</td><td>250</td><td>247</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5402.14	47.45	54.00	-6.55	31.91	33.04	12.41	29.91	0.00	250	247	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																				
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																		
1	5402.14	47.45	54.00	-6.55	31.91	33.04	12.41	29.91	0.00	250	247	AVERAGE																																																	



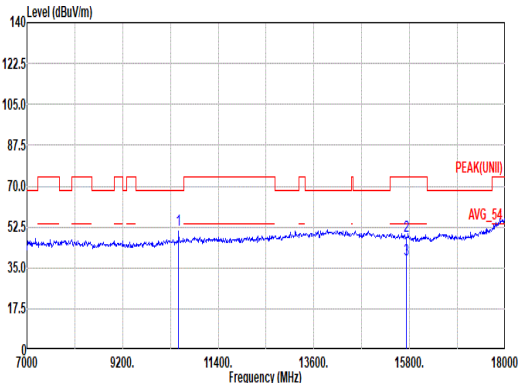
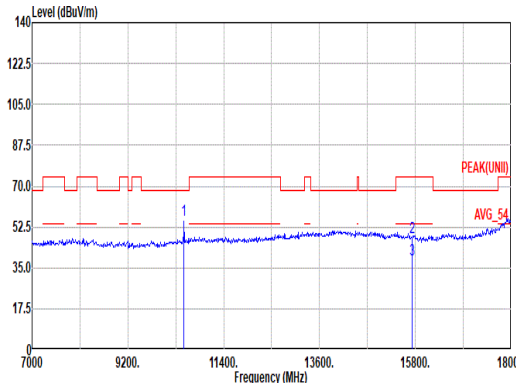


Mode	6																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_5240MHz																																																																																																																																													
ANT	D+B+C+A																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	 Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL Mode : 6 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>51.07</td><td>68.20</td><td>-17.13</td><td>62.50</td><td>38.88</td><td>17.53</td><td>68.23</td><td>0.39</td><td>301</td><td>324</td><td>PEAK</td></tr><tr><td>2</td><td>15720.00</td><td>48.34</td><td>74.00</td><td>-25.66</td><td>56.22</td><td>38.08</td><td>21.62</td><td>67.93</td><td>0.35</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>15720.00</td><td>38.58</td><td>54.00</td><td>-15.42</td><td>46.46</td><td>38.08</td><td>21.62</td><td>67.93</td><td>0.35</td><td>--</td><td>--</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	51.07	68.20	-17.13	62.50	38.88	17.53	68.23	0.39	301	324	PEAK	2	15720.00	48.34	74.00	-25.66	56.22	38.08	21.62	67.93	0.35	--	--	PEAK	3	15720.00	38.58	54.00	-15.42	46.46	38.08	21.62	67.93	0.35	--	--	Average	 Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL Mode : 6 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>55.55</td><td>68.20</td><td>-12.65</td><td>66.98</td><td>38.88</td><td>17.53</td><td>68.23</td><td>0.39</td><td>300</td><td>178</td><td>PEAK</td></tr><tr><td>2</td><td>15720.00</td><td>48.32</td><td>74.00</td><td>-25.68</td><td>56.20</td><td>38.08</td><td>21.62</td><td>67.93</td><td>0.35</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>15720.00</td><td>38.66</td><td>54.00</td><td>-15.34</td><td>46.54</td><td>38.08</td><td>21.62</td><td>67.93</td><td>0.35</td><td>--</td><td>--</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	55.55	68.20	-12.65	66.98	38.88	17.53	68.23	0.39	300	178	PEAK	2	15720.00	48.32	74.00	-25.68	56.20	38.08	21.62	67.93	0.35	--	--	PEAK	3	15720.00	38.66	54.00	-15.34	46.54	38.08	21.62	67.93	0.35	--	--	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	10480.00	51.07	68.20	-17.13	62.50	38.88	17.53	68.23	0.39	301	324	PEAK																																																																																																																																		
2	15720.00	48.34	74.00	-25.66	56.22	38.08	21.62	67.93	0.35	--	--	PEAK																																																																																																																																		
3	15720.00	38.58	54.00	-15.42	46.46	38.08	21.62	67.93	0.35	--	--	Average																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	10480.00	55.55	68.20	-12.65	66.98	38.88	17.53	68.23	0.39	300	178	PEAK																																																																																																																																		
2	15720.00	48.32	74.00	-25.68	56.20	38.08	21.62	67.93	0.35	--	--	PEAK																																																																																																																																		
3	15720.00	38.66	54.00	-15.34	46.54	38.08	21.62	67.93	0.35	--	--	Average																																																																																																																																		

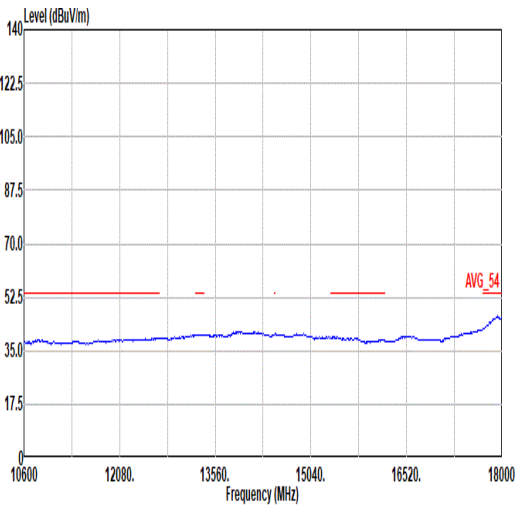
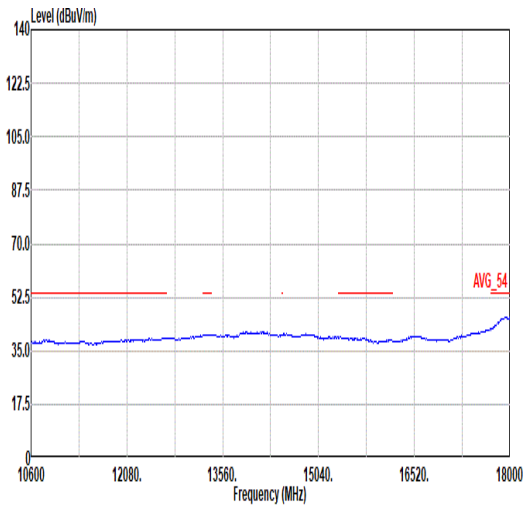


Mode	6	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_5240MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G -18G Avg	 Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL Mode : 6	 Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL Mode : 6

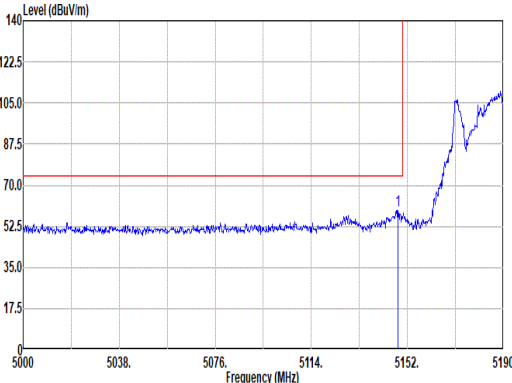
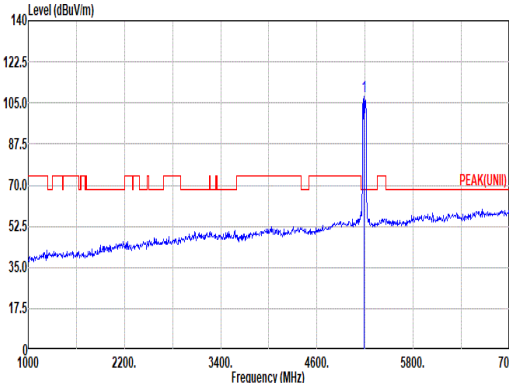
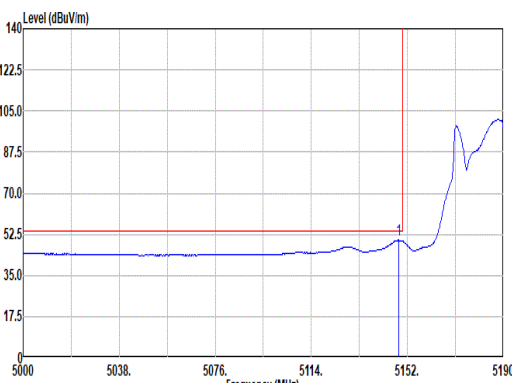
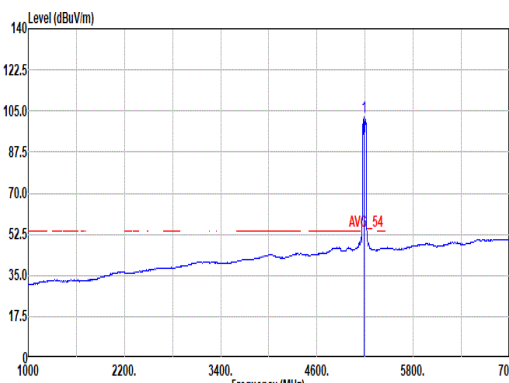


Mode	7																																																																																																			
	Band Edge - L																																																																																																			
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_5190MHz																																																																																																			
ANT	D+B+C+A																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	 Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.20</td><td>59.34</td><td>74.00</td><td>-14.66</td><td>44.12</td><td>33.09</td><td>12.05</td><td>29.92</td><td>0.00</td><td>379</td><td>168</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.20	59.34	74.00	-14.66	44.12	33.09	12.05	29.92	0.00	379	168	PEAK	 Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>100.02</td><td>-----</td><td>-----</td><td>92.75</td><td>33.04</td><td>12.13</td><td>29.90</td><td>0.00</td><td>379</td><td>168</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	100.02	-----	-----	92.75	33.04	12.13	29.90	0.00	379	168	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5148.20	59.34	74.00	-14.66	44.12	33.09	12.05	29.92	0.00	379	168	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5190.00	100.02	-----	-----	92.75	33.04	12.13	29.90	0.00	379	168	PEAK																																																																																								
Avg	 Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.58</td><td>49.95</td><td>54.00</td><td>-4.05</td><td>34.73</td><td>33.09</td><td>12.05</td><td>29.92</td><td>0.00</td><td>379</td><td>168</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.58	49.95	54.00	-4.05	34.73	33.09	12.05	29.92	0.00	379	168	AVERAGE	 Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>102.61</td><td>-----</td><td>-----</td><td>87.34</td><td>33.04</td><td>12.13</td><td>29.90</td><td>0.00</td><td>379</td><td>168</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	102.61	-----	-----	87.34	33.04	12.13	29.90	0.00	379	168	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5148.58	49.95	54.00	-4.05	34.73	33.09	12.05	29.92	0.00	379	168	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5190.00	102.61	-----	-----	87.34	33.04	12.13	29.90	0.00	379	168	AVERAGE																																																																																								

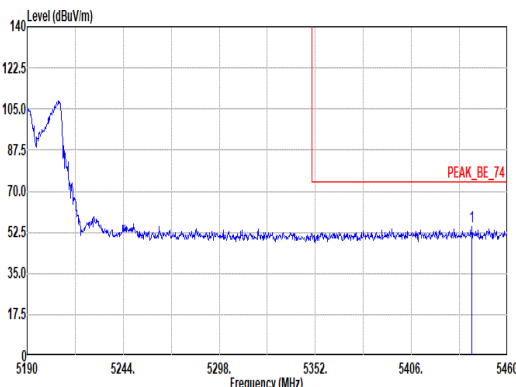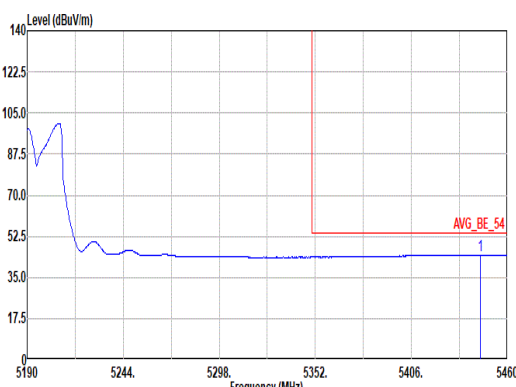

Mode	7																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_5190MHz																																																							
ANT	D+B+C+A																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	 Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5444.02</td><td>54.72</td><td>74.00</td><td>-19.28</td><td>39.23</td><td>32.94</td><td>12.46</td><td>29.91</td><td>0.00</td><td>379</td><td>168</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5444.02	54.72	74.00	-19.28	39.23	32.94	12.46	29.91	0.00	379	168	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5444.02	54.72	74.00	-19.28	39.23	32.94	12.46	29.91	0.00	379	168	PEAK																																												
Avg	 Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5444.61</td><td>44.59</td><td>54.00</td><td>-9.41</td><td>29.11</td><td>32.93</td><td>12.46</td><td>29.91</td><td>0.00</td><td>379</td><td>168</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5444.61	44.59	54.00	-9.41	29.11	32.93	12.46	29.91	0.00	379	168	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5444.61	44.59	54.00	-9.41	29.11	32.93	12.46	29.91	0.00	379	168	AVERAGE																																												

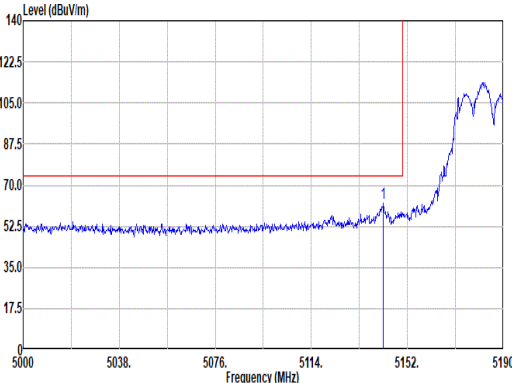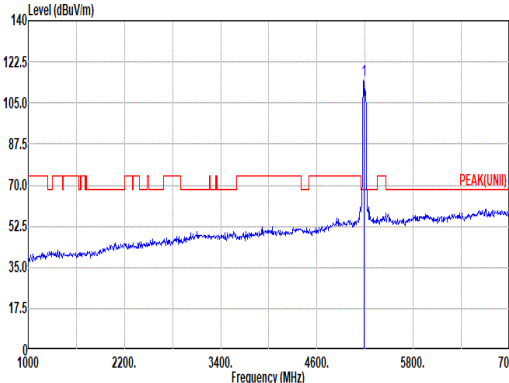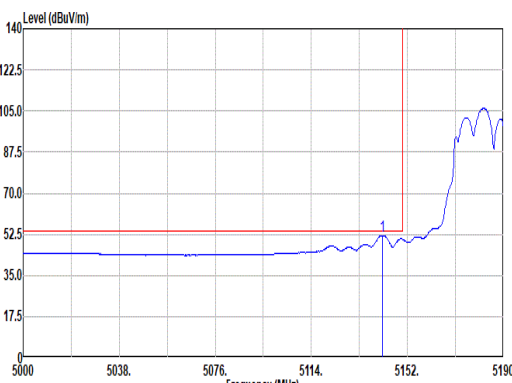
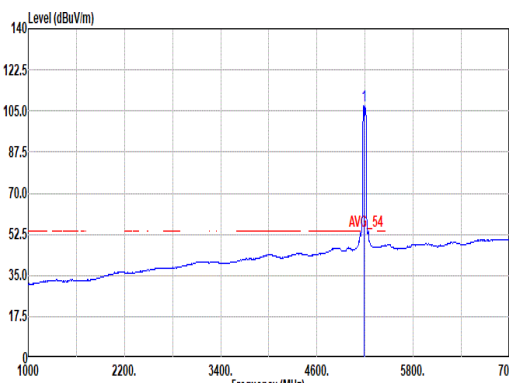


Mode	7																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_5190MHz																																																																																																		
ANT	D+B+C+A																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5142.50</td><td>62.46</td><td>74.00</td><td>-11.54</td><td>47.25</td><td>33.10</td><td>12.03</td><td>29.92</td><td>0.00</td><td>247</td><td>246</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5142.50	62.46	74.00	-11.54	47.25	33.10	12.03	29.92	0.00	247	246	PEAK	Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5190.00</td><td>114.48</td><td>-----</td><td>-----</td><td>99.22</td><td>33.05</td><td>12.12</td><td>29.91</td><td>0.00</td><td>247</td><td>246</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5190.00	114.48	-----	-----	99.22	33.05	12.12	29.91	0.00	247	246
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																									
1	5142.50	62.46	74.00	-11.54	47.25	33.10	12.03	29.92	0.00	247	246	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																									
1	5190.00	114.48	-----	-----	99.22	33.05	12.12	29.91	0.00	247	246	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5142.12</td><td>52.02</td><td>54.00</td><td>-1.98</td><td>36.81</td><td>33.10</td><td>12.03</td><td>29.92</td><td>0.00</td><td>247</td><td>246</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5142.12	52.02	54.00	-1.98	36.81	33.10	12.03	29.92	0.00	247	246	AVERAGE	Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5190.00</td><td>107.20</td><td>-----</td><td>-----</td><td>91.94</td><td>33.05</td><td>12.12</td><td>29.91</td><td>0.00</td><td>247</td><td>246</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5190.00	107.20	-----	-----	91.94	33.05	12.12	29.91	0.00	247	246
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																									
1	5142.12	52.02	54.00	-1.98	36.81	33.10	12.03	29.92	0.00	247	246	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																									
1	5190.00	107.20	-----	-----	91.94	33.05	12.12	29.91	0.00	247	246	AVERAGE																																																																																							





Mode	7																																														
	Band Edge - R																																														
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_5190MHz																																														
ANT	D+B+C+A																																														
Pol.	Vertical						Fundamental																																								
Peak	Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5370.36</td><td>55.05</td><td>74.00</td><td>-18.95</td><td>39.52</td><td>33.06</td><td>12.37</td><td>29.90</td><td>0.00</td><td>247</td><td>246</td><td>PEAK</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5370.36	55.05	74.00	-18.95	39.52	33.06	12.37	29.90	0.00	247	246	PEAK	Blank				
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																					
1 5370.36	55.05	74.00	-18.95	39.52	33.06	12.37	29.90	0.00	247	246	PEAK																																				
Avg	Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5452.98</td><td>45.64</td><td>54.00</td><td>-8.36</td><td>30.16</td><td>32.92</td><td>12.47</td><td>29.91</td><td>0.00</td><td>247</td><td>246</td><td>AVERAGE</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5452.98	45.64	54.00	-8.36	30.16	32.92	12.47	29.91	0.00	247	246	AVERAGE	Blank				
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																					
1 5452.98	45.64	54.00	-8.36	30.16	32.92	12.47	29.91	0.00	247	246	AVERAGE																																				



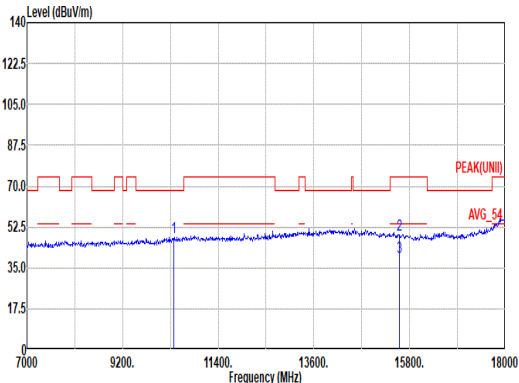
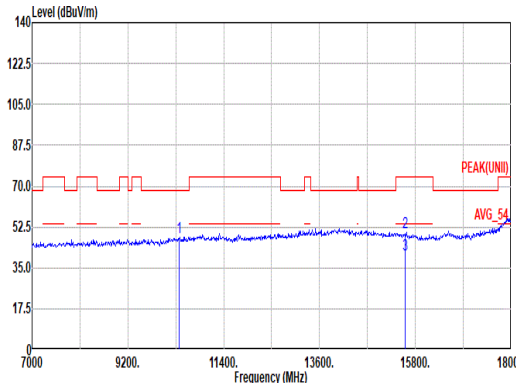


Mode	7																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_5190MHz																																																																																																																																													
ANT	D+B+C+A																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak																																																																																																																																														
Avg	Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL Mode : 7 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10380.00</td><td>47.97</td><td>68.20</td><td>-20.23</td><td>59.84</td><td>38.78</td><td>17.44</td><td>68.49</td><td>0.40</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15570.00</td><td>49.24</td><td>74.00</td><td>-24.76</td><td>56.11</td><td>38.35</td><td>21.52</td><td>67.08</td><td>0.34</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>15570.00</td><td>39.48</td><td>54.00</td><td>-14.52</td><td>46.35</td><td>38.35</td><td>21.52</td><td>67.08</td><td>0.34</td><td>--</td><td>--</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10380.00	47.97	68.20	-20.23	59.84	38.78	17.44	68.49	0.40	--	--	PEAK	2	15570.00	49.24	74.00	-24.76	56.11	38.35	21.52	67.08	0.34	--	--	PEAK	3	15570.00	39.48	54.00	-14.52	46.35	38.35	21.52	67.08	0.34	--	--	Average	Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL Mode : 7 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10380.00</td><td>48.21</td><td>68.20</td><td>-19.99</td><td>60.08</td><td>38.78</td><td>17.44</td><td>68.49</td><td>0.40</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15570.00</td><td>50.44</td><td>74.00</td><td>-23.56</td><td>57.31</td><td>38.35</td><td>21.52</td><td>67.08</td><td>0.34</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>15570.00</td><td>40.88</td><td>54.00</td><td>-13.12</td><td>47.75</td><td>38.35</td><td>21.52</td><td>67.08</td><td>0.34</td><td>--</td><td>--</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10380.00	48.21	68.20	-19.99	60.08	38.78	17.44	68.49	0.40	--	--	PEAK	2	15570.00	50.44	74.00	-23.56	57.31	38.35	21.52	67.08	0.34	--	--	PEAK	3	15570.00	40.88	54.00	-13.12	47.75	38.35	21.52	67.08	0.34	--	--	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	10380.00	47.97	68.20	-20.23	59.84	38.78	17.44	68.49	0.40	--	--	PEAK																																																																																																																																		
2	15570.00	49.24	74.00	-24.76	56.11	38.35	21.52	67.08	0.34	--	--	PEAK																																																																																																																																		
3	15570.00	39.48	54.00	-14.52	46.35	38.35	21.52	67.08	0.34	--	--	Average																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	10380.00	48.21	68.20	-19.99	60.08	38.78	17.44	68.49	0.40	--	--	PEAK																																																																																																																																		
2	15570.00	50.44	74.00	-23.56	57.31	38.35	21.52	67.08	0.34	--	--	PEAK																																																																																																																																		
3	15570.00	40.88	54.00	-13.12	47.75	38.35	21.52	67.08	0.34	--	--	Average																																																																																																																																		

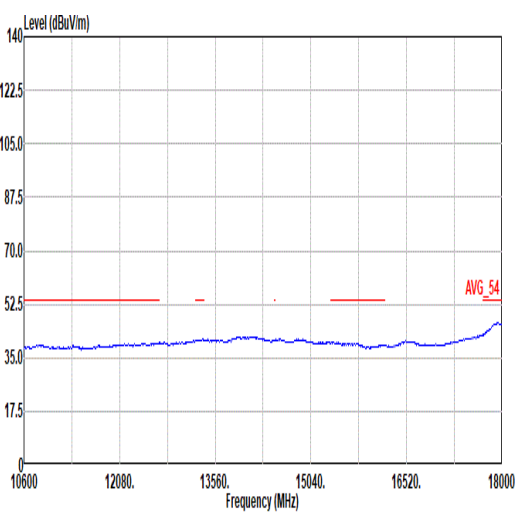
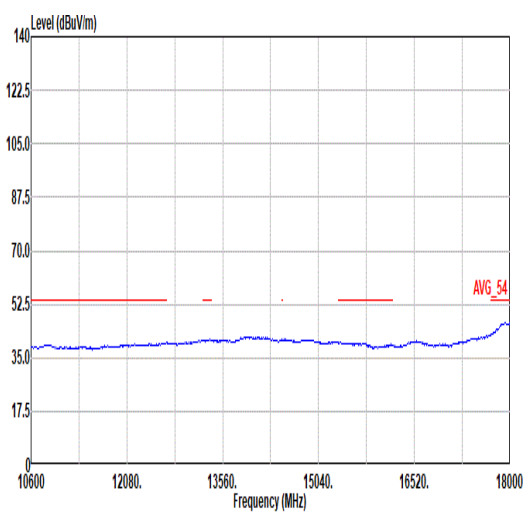


Mode	7	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_5190MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G -18G Avg	 Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL Mode : 7	 Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL Mode : 7

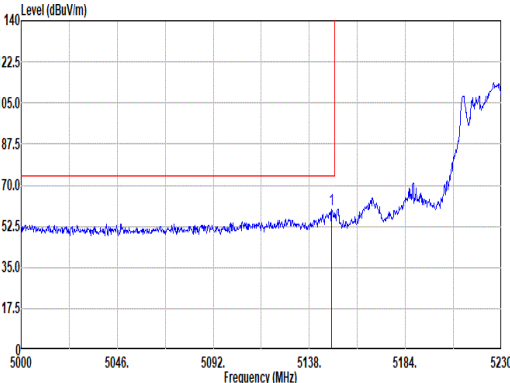
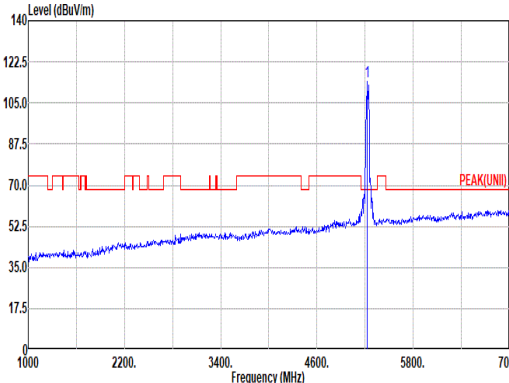
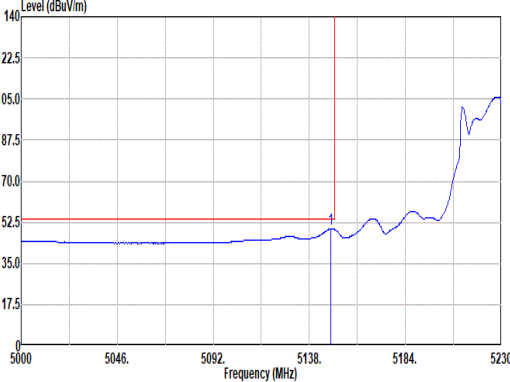
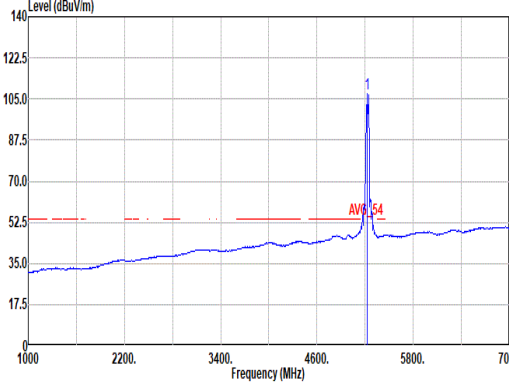


	8																																																																																														
Mode	Band Edge - L																																																																																														
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_5230MHz																																																																																														
ANT	D+B+C+A																																																																																														
Pol.	Horizontal						Fundamental																																																																																								
Peak																																																																																															
	Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5148.58</td><td>59.53</td><td>74.00</td><td>-14.47</td><td></td><td>44.31</td><td>33.09</td><td>12.05</td><td>29.92</td><td>0.00</td><td>328</td><td>166</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg		1	5148.58	59.53	74.00	-14.47		44.31	33.09	12.05	29.92	0.00	328	166	PEAK	Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5230.00</td><td>113.88</td><td>-----</td><td>-----</td><td></td><td>98.58</td><td>32.99</td><td>12.20</td><td>29.89</td><td>0.00</td><td>328</td><td>166</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg		1	5230.00	113.88	-----	-----		98.58	32.99	12.20	29.89	0.00	328	166
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	5148.58	59.53	74.00	-14.47		44.31	33.09	12.05	29.92	0.00	328	166	PEAK																																																																																		
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	5230.00	113.88	-----	-----		98.58	32.99	12.20	29.89	0.00	328	166	PEAK																																																																																		
Avg																																																																																															
	Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5148.35</td><td>49.76</td><td>54.00</td><td>-4.24</td><td></td><td>34.54</td><td>33.09</td><td>12.05</td><td>29.92</td><td>0.00</td><td>328</td><td>166</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg		1	5148.35	49.76	54.00	-4.24		34.54	33.09	12.05	29.92	0.00	328	166	AVERAGE	Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5230.00</td><td>107.32</td><td>-----</td><td>-----</td><td></td><td>92.02</td><td>32.99</td><td>12.20</td><td>29.89</td><td>0.00</td><td>328</td><td>166</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg		1	5230.00	107.32	-----	-----		92.02	32.99	12.20	29.89	0.00	328	166
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	5148.35	49.76	54.00	-4.24		34.54	33.09	12.05	29.92	0.00	328	166	AVERAGE																																																																																		
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	5230.00	107.32	-----	-----		92.02	32.99	12.20	29.89	0.00	328	166	AVERAGE																																																																																		

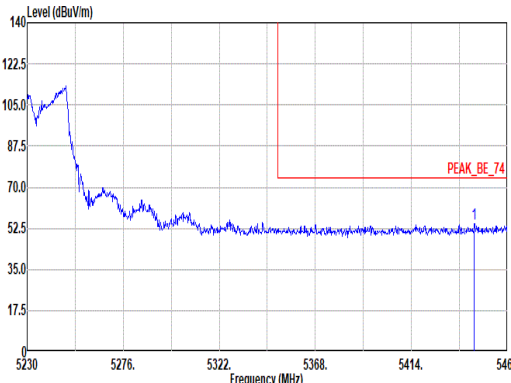
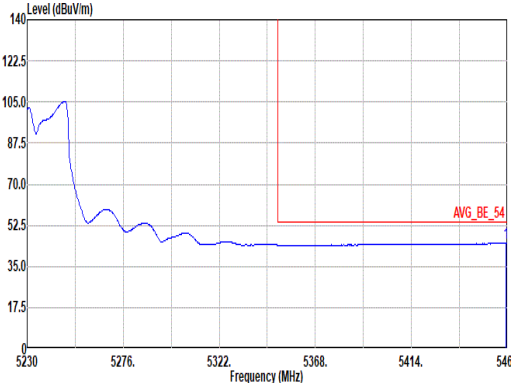


Mode	8																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_5230MHz																																																		
ANT	D+B+C+A																																																		
Pol.	Horizontal						Fundamental																																												
Peak	 Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5444.13</td><td>54.33</td><td>74.00</td><td>-19.67</td><td>38.85</td><td>32.93</td><td>12.46</td><td>29.91</td><td>0.00</td><td>328</td><td>166</td><td>PEAK</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5444.13	54.33	74.00	-19.67	38.85	32.93	12.46	29.91	0.00	328	166	PEAK	Blank					
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																								
1	5444.13	54.33	74.00	-19.67	38.85	32.93	12.46	29.91	0.00	328	166	PEAK																																							
Avg	 Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5459.31</td><td>44.93</td><td>54.00</td><td>-9.07</td><td>29.44</td><td>32.92</td><td>12.48</td><td>29.91</td><td>0.00</td><td>328</td><td>166</td><td>AVERAGE</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5459.31	44.93	54.00	-9.07	29.44	32.92	12.48	29.91	0.00	328	166	AVERAGE	Blank					
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																								
1	5459.31	44.93	54.00	-9.07	29.44	32.92	12.48	29.91	0.00	328	166	AVERAGE																																							

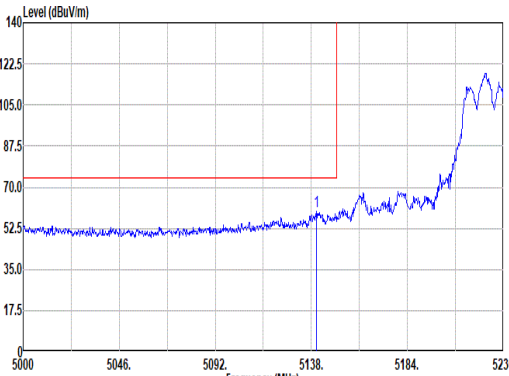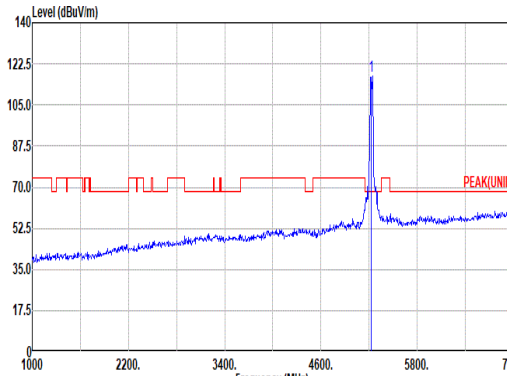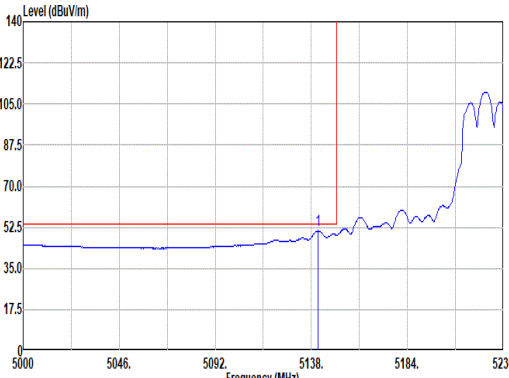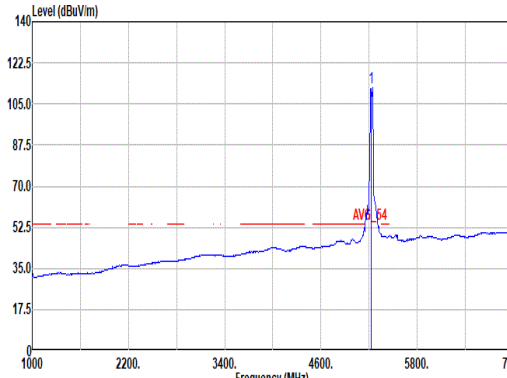



	8																																																																																																			
Mode	Band Edge - L																																																																																																			
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_5230MHz																																																																																																			
ANT	D+B+C+A																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	 Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5140.30</td><td>59.68</td><td>74.00</td><td>-14.32</td><td>44.46</td><td>33.11</td><td>12.03</td><td>29.92</td><td>0.00</td><td>300</td><td>241</td><td>PEAK</td></tr></tbody></table>  Site : 03CH02-CA Condition: PEAK(UNI) 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5230.00</td><td>117.49</td><td>-----</td><td>-----</td><td>102.19</td><td>32.97</td><td>12.21</td><td>29.88</td><td>0.00</td><td>300</td><td>241</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5140.30	59.68	74.00	-14.32	44.46	33.11	12.03	29.92	0.00	300	241	PEAK		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	117.49	-----	-----	102.19	32.97	12.21	29.88	0.00	300	241	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5140.30	59.68	74.00	-14.32	44.46	33.11	12.03	29.92	0.00	300	241	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5230.00	117.49	-----	-----	102.19	32.97	12.21	29.88	0.00	300	241	PEAK																																																																																								
Avg	 Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5141.22</td><td>50.98</td><td>54.00</td><td>-3.02</td><td>35.76</td><td>33.11</td><td>12.03</td><td>29.92</td><td>0.00</td><td>300</td><td>241</td><td>AVERAGE</td></tr></tbody></table>  Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5230.00</td><td>111.98</td><td>-----</td><td>-----</td><td>96.68</td><td>32.97</td><td>12.21</td><td>29.88</td><td>0.00</td><td>300</td><td>241</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5141.22	50.98	54.00	-3.02	35.76	33.11	12.03	29.92	0.00	300	241	AVERAGE		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	111.98	-----	-----	96.68	32.97	12.21	29.88	0.00	300	241	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5141.22	50.98	54.00	-3.02	35.76	33.11	12.03	29.92	0.00	300	241	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5230.00	111.98	-----	-----	96.68	32.97	12.21	29.88	0.00	300	241	AVERAGE																																																																																								

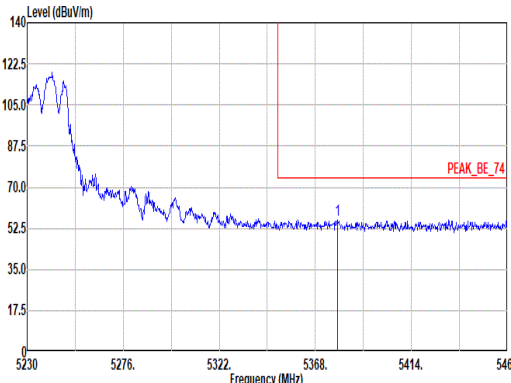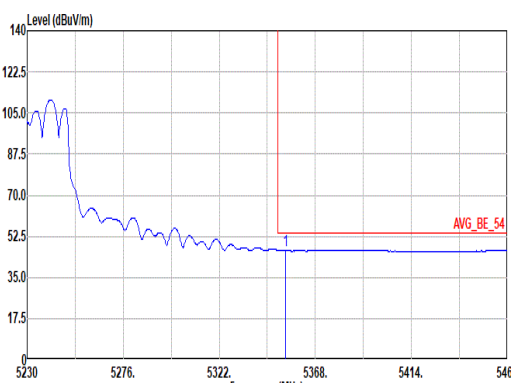



Mode	8																																																								
	Band Edge - R																																																								
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_5230MHz																																																								
ANT	D+B+C+A																																																								
Pol.	Vertical						Fundamental																																																		
Peak	 Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>5378.58</td><td>56.23</td><td>74.00</td><td>-17.77</td><td>40.70</td><td>33.06</td><td>12.38</td><td>29.91</td><td>0.00</td><td>300</td><td>241</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB			1	5378.58	56.23	74.00	-17.77	40.70	33.06	12.38	29.91	0.00	300	241	PEAK	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			cm	deg																																															
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB																																																	
1	5378.58	56.23	74.00	-17.77	40.70	33.06	12.38	29.91	0.00	300	241	PEAK																																													
Avg	 Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>5353.74</td><td>46.73</td><td>54.00</td><td>-7.27</td><td>31.21</td><td>33.07</td><td>12.35</td><td>29.90</td><td>0.00</td><td>300</td><td>241</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB			1	5353.74	46.73	54.00	-7.27	31.21	33.07	12.35	29.90	0.00	300	241	AVERAGE	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			cm	deg																																															
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB																																																	
1	5353.74	46.73	54.00	-7.27	31.21	33.07	12.35	29.90	0.00	300	241	AVERAGE																																													

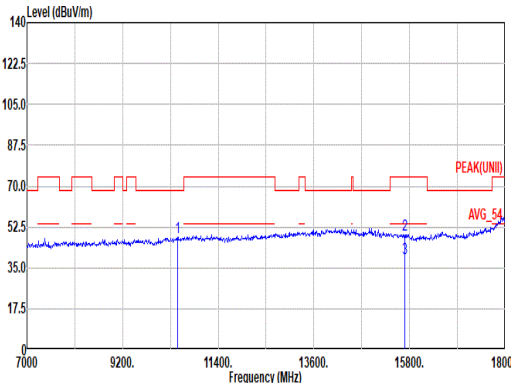





		8													
Mode		Harmonic													
		U-NII-1_5.15-5.25_802.11be EHT40_CH46_5230MHz													
ANT		D+B+C+A													
Pol.		Horizontal					Vertical								
Peak Avg															
	Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL Mode : 8														
		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		
		1 10460.00	48.31	68.20	-19.89	59.89	38.86	17.51	68.34	0.39	--	--	--	PEAK	
		2 15690.00	49.15	74.00	-24.85	56.78	38.10	21.60	67.68	0.35	--	--	--	PEAK	
		3 15690.00	38.83	54.00	-15.17	46.46	38.10	21.60	67.68	0.35	--	--	--	Average	

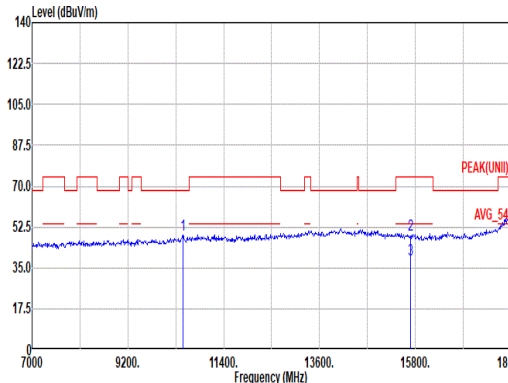Peak Avg															
	Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL Mode : 8														
		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		
		1 10460.00	48.92	68.20	-19.28	60.50	38.86	17.51	68.34	0.39	--	--	--	PEAK	
		2 15690.00	48.94	74.00	-25.06	56.57	38.10	21.60	67.68	0.35	--	--	--	PEAK	
		3 15690.00	38.59	54.00	-15.41	46.22	38.10	21.60	67.68	0.35	--	--	--	Average	

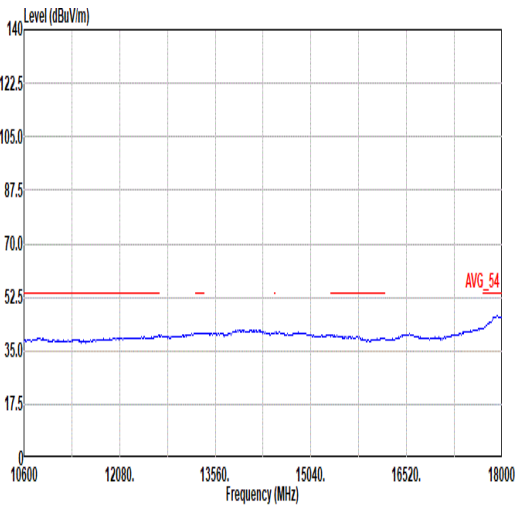
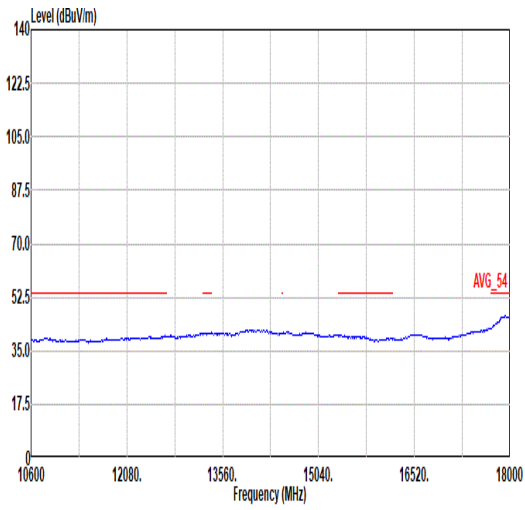


Mode	8	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_5230MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G -18G Avg	 Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL Mode : 8	 Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL Mode : 8

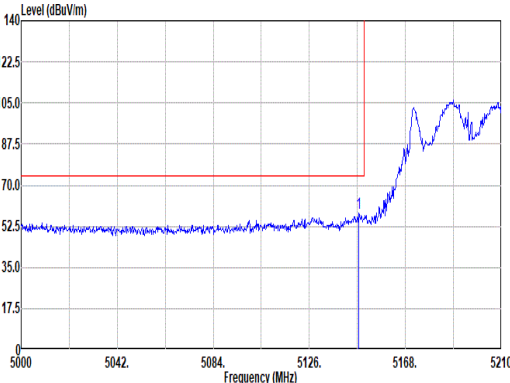
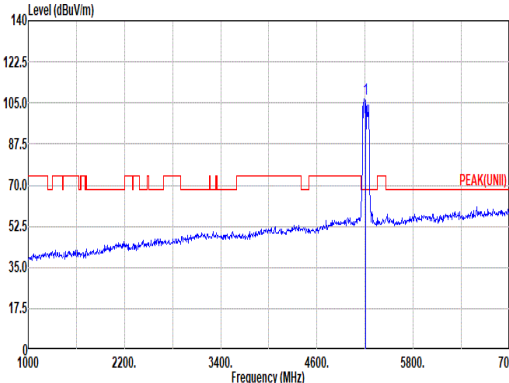
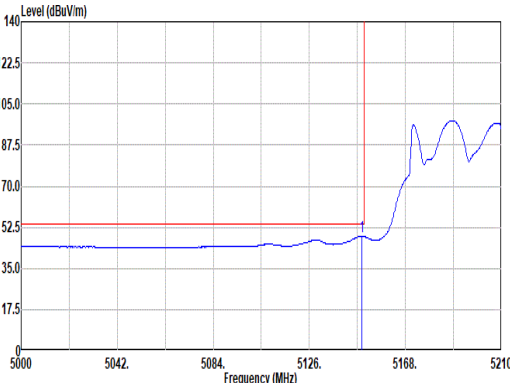
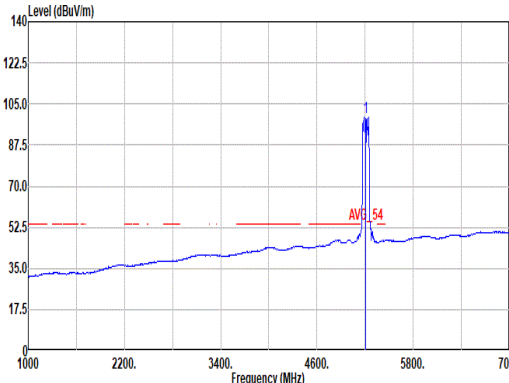


		9																																																																																																	
Mode	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11be EHT80_CH42_5210MHz																																																																																																		
ANT	D+B+C+A																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5147.63</td><td>58.12</td><td>74.00</td><td>-15.88</td><td>42.91</td><td>33.09</td><td>12.04</td><td>29.92</td><td>0.00</td><td>400</td><td>168</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.63	58.12	74.00	-15.88	42.91	33.09	12.04	29.92	0.00	400	168	PEAK	Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5210.00</td><td>106.62</td><td>-----</td><td>-----</td><td>91.35</td><td>33.04</td><td>12.13</td><td>29.90</td><td>0.00</td><td>400</td><td>168</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	106.62	-----	-----	91.35	33.04	12.13	29.90	0.00	400	168
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5147.63	58.12	74.00	-15.88	42.91	33.09	12.04	29.92	0.00	400	168	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5210.00	106.62	-----	-----	91.35	33.04	12.13	29.90	0.00	400	168	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5148.89</td><td>48.82</td><td>54.00</td><td>-5.18</td><td>33.60</td><td>33.09</td><td>12.05</td><td>29.92</td><td>0.00</td><td>400</td><td>168</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.89	48.82	54.00	-5.18	33.60	33.09	12.05	29.92	0.00	400	168	AVERAGE	Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5210.00</td><td>99.34</td><td>-----</td><td>-----</td><td>84.07</td><td>33.04</td><td>12.13</td><td>29.90</td><td>0.00</td><td>400</td><td>168</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	99.34	-----	-----	84.07	33.04	12.13	29.90	0.00	400	168
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5148.89	48.82	54.00	-5.18	33.60	33.09	12.05	29.92	0.00	400	168	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5210.00	99.34	-----	-----	84.07	33.04	12.13	29.90	0.00	400	168	AVERAGE																																																																																							

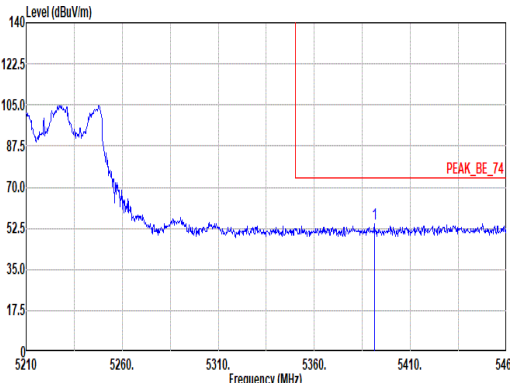
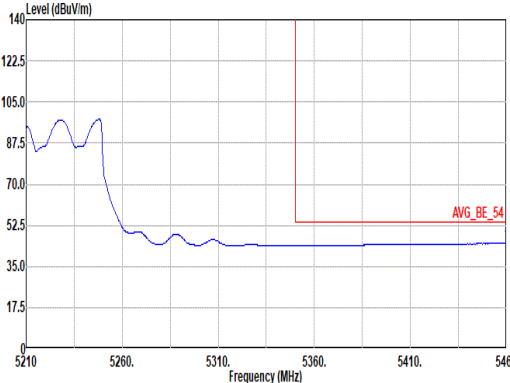


Mode	9																																													
	Band Edge - R																																													
	U-NII-1_5.15-5.25_802.11be EHT80_CH42_5210MHz																																													
ANT	D+B+C+A																																													
Pol.	Horizontal	Fundamental																																												
Peak	 Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5391.25</td><td>54.29</td><td>74.00</td><td>-19.71</td><td>38.75</td><td>33.05</td><td>12.40</td><td>29.91</td><td>0.00</td><td>400</td><td>168</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5391.25	54.29	74.00	-19.71	38.75	33.05	12.40	29.91	0.00	400	168	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5391.25	54.29	74.00	-19.71	38.75	33.05	12.40	29.91	0.00	400	168	PEAK																																		
Avg	 Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5468.00</td><td>44.75</td><td>54.00</td><td>-9.25</td><td>29.26</td><td>32.92</td><td>12.48</td><td>29.91</td><td>0.00</td><td>400</td><td>168</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5468.00	44.75	54.00	-9.25	29.26	32.92	12.48	29.91	0.00	400	168	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5468.00	44.75	54.00	-9.25	29.26	32.92	12.48	29.91	0.00	400	168	AVERAGE																																		

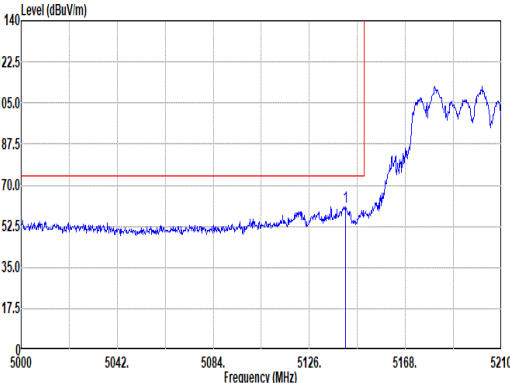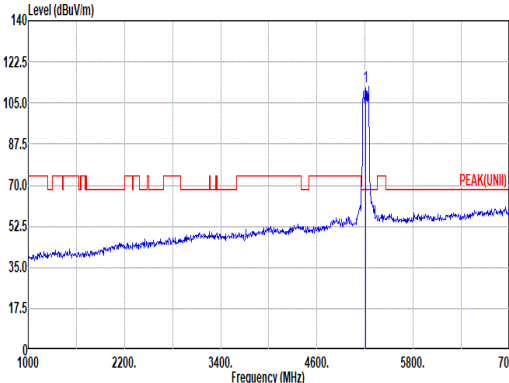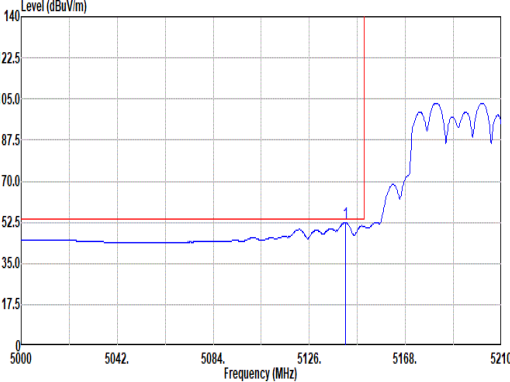
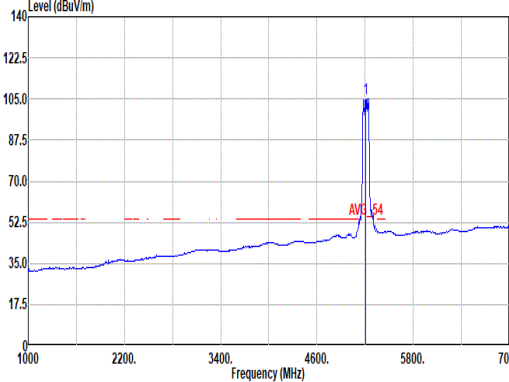


		9																																																																																													
Mode	Band Edge - L																																																																																														
	U-NII-1_5.15-5.25_802.11be EHT80_CH42_5210MHz																																																																																														
ANT	D+B+C+A																																																																																														
Pol.	Vertical						Fundamental																																																																																								
Peak																																																																																															
	Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5141.75</td><td>60.94</td><td>74.00</td><td>-13.06</td><td></td><td>45.73</td><td>33.10</td><td>12.03</td><td>29.92</td><td>0.00</td><td>305</td><td>246</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5141.75	60.94	74.00	-13.06		45.73	33.10	12.03	29.92	0.00	305	246	PEAK	Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5210.00</td><td>111.00</td><td>-----</td><td>-----</td><td></td><td>96.50</td><td>32.97</td><td>12.21</td><td>29.88</td><td>0.00</td><td>305</td><td>246</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5210.00	111.00	-----	-----		96.50	32.97	12.21	29.88	0.00	305	246
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																		
1	5141.75	60.94	74.00	-13.06		45.73	33.10	12.03	29.92	0.00	305	246	PEAK																																																																																		
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																		
1	5210.00	111.00	-----	-----		96.50	32.97	12.21	29.88	0.00	305	246	PEAK																																																																																		
Avg																																																																																															
	Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5141.75</td><td>52.34</td><td>54.00</td><td>-1.66</td><td></td><td>37.13</td><td>33.10</td><td>12.03</td><td>29.92</td><td>0.00</td><td>305</td><td>246</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5141.75	52.34	54.00	-1.66		37.13	33.10	12.03	29.92	0.00	305	246	AVERAGE	Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5210.00</td><td>105.27</td><td>-----</td><td>-----</td><td></td><td>89.97</td><td>32.97</td><td>12.21</td><td>29.88</td><td>0.00</td><td>305</td><td>246</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5210.00	105.27	-----	-----		89.97	32.97	12.21	29.88	0.00	305	246
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																		
1	5141.75	52.34	54.00	-1.66		37.13	33.10	12.03	29.92	0.00	305	246	AVERAGE																																																																																		
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																		
1	5210.00	105.27	-----	-----		89.97	32.97	12.21	29.88	0.00	305	246	AVERAGE																																																																																		

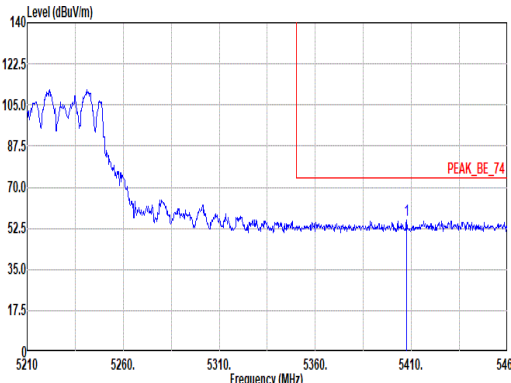
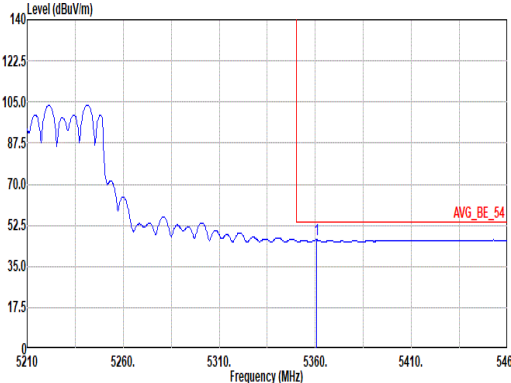


Mode	9																																																						
	Band Edge - R																																																						
	U-NII-1_5.15-5.25_802.11be EHT80_CH42_5210MHz																																																						
ANT	D+B+C+A																																																						
Pol.	Vertical						Fundamental																																																
Peak	 Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>5407.50</td><td>56.14</td><td>74.00</td><td>-17.86</td><td>40.61</td><td>33.02</td><td>12.42</td><td>29.91</td><td>0.00</td><td>305 246 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB			1	5407.50	56.14	74.00	-17.86	40.61	33.02	12.42	29.91	0.00	305 246 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			cm	deg																																													
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB																																															
1	5407.50	56.14	74.00	-17.86	40.61	33.02	12.42	29.91	0.00	305 246 PEAK																																													
Avg	 Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>5360.50</td><td>46.28</td><td>54.00</td><td>-7.72</td><td>30.75</td><td>33.07</td><td>12.36</td><td>29.90</td><td>0.00</td><td>305 246 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB			1	5360.50	46.28	54.00	-7.72	30.75	33.07	12.36	29.90	0.00	305 246 AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			cm	deg																																													
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB																																															
1	5360.50	46.28	54.00	-7.72	30.75	33.07	12.36	29.90	0.00	305 246 AVERAGE																																													



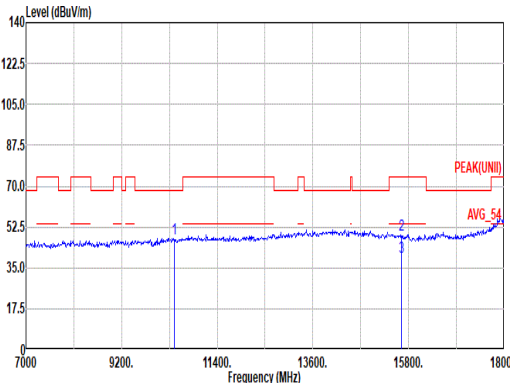
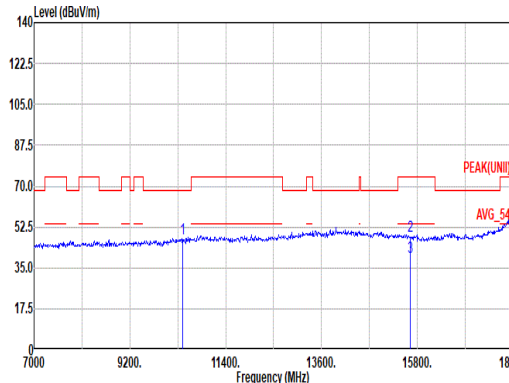


Mode	9																																																																					
	Harmonic																																																																					
	U-NII-1_5.15-5.25_802.11be EHT80_CH42_5210MHz																																																																					
ANT	D+B+C+A																																																																					
Pol.	Horizontal																																																																					
Peak Avg																																																																						
	Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 Horizontal Mode : 9 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 10420.00</td><td>47.47</td><td>68.20</td><td>-20.73</td><td>59.24</td><td>38.81</td><td>17.48</td><td>68.45</td><td>0.39</td><td>-- -- PEAK</td></tr><tr><td>2 15630.00</td><td>49.10</td><td>74.00</td><td>-24.90</td><td>56.17</td><td>38.22</td><td>21.56</td><td>67.19</td><td>0.34</td><td>-- -- PEAK</td></tr><tr><td>3 15630.00</td><td>39.45</td><td>54.00</td><td>-14.55</td><td>46.52</td><td>38.22</td><td>21.56</td><td>67.19</td><td>0.34</td><td>-- -- Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 10420.00	47.47	68.20	-20.73	59.24	38.81	17.48	68.45	0.39	-- -- PEAK	2 15630.00	49.10	74.00	-24.90	56.17	38.22	21.56	67.19	0.34	-- -- PEAK	3 15630.00	39.45	54.00	-14.55	46.52	38.22	21.56	67.19	0.34
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																													
1 10420.00	47.47	68.20	-20.73	59.24	38.81	17.48	68.45	0.39	-- -- PEAK																																																													
2 15630.00	49.10	74.00	-24.90	56.17	38.22	21.56	67.19	0.34	-- -- PEAK																																																													
3 15630.00	39.45	54.00	-14.55	46.52	38.22	21.56	67.19	0.34	-- -- Average																																																													
Peak Avg																																																																						
	Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL Mode : 9 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 10420.00</td><td>47.37</td><td>68.20</td><td>-20.83</td><td>59.14</td><td>38.81</td><td>17.48</td><td>68.45</td><td>0.39</td><td>-- -- PEAK</td></tr><tr><td>2 15630.00</td><td>48.83</td><td>74.00</td><td>-25.17</td><td>55.90</td><td>38.22</td><td>21.56</td><td>67.19</td><td>0.34</td><td>-- -- PEAK</td></tr><tr><td>3 15630.00</td><td>39.72</td><td>54.00</td><td>-14.28</td><td>46.79</td><td>38.22</td><td>21.56</td><td>67.19</td><td>0.34</td><td>-- -- Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 10420.00	47.37	68.20	-20.83	59.14	38.81	17.48	68.45	0.39	-- -- PEAK	2 15630.00	48.83	74.00	-25.17	55.90	38.22	21.56	67.19	0.34	-- -- PEAK	3 15630.00	39.72	54.00	-14.28	46.79	38.22	21.56	67.19	0.34
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																													
1 10420.00	47.37	68.20	-20.83	59.14	38.81	17.48	68.45	0.39	-- -- PEAK																																																													
2 15630.00	48.83	74.00	-25.17	55.90	38.22	21.56	67.19	0.34	-- -- PEAK																																																													
3 15630.00	39.72	54.00	-14.28	46.79	38.22	21.56	67.19	0.34	-- -- Average																																																													

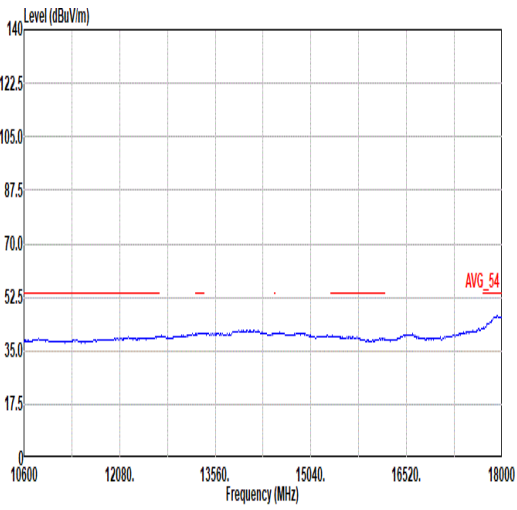
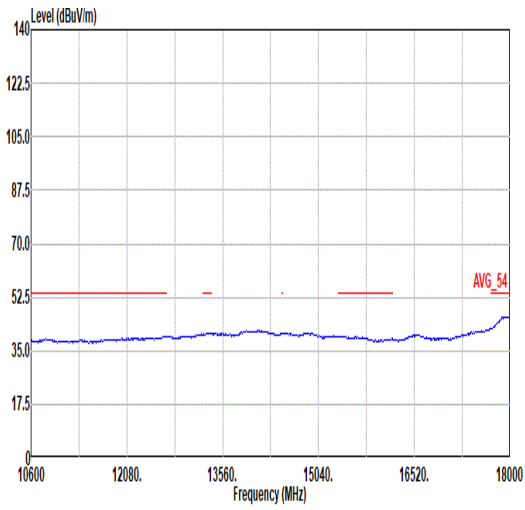


Mode	9	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT80_CH42_5210MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G -18G Avg	 Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL Mode : 9	 Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL Mode : 9

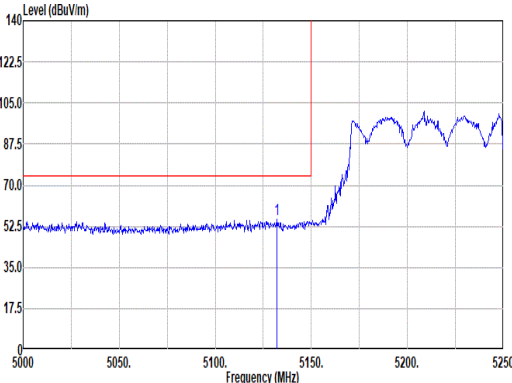
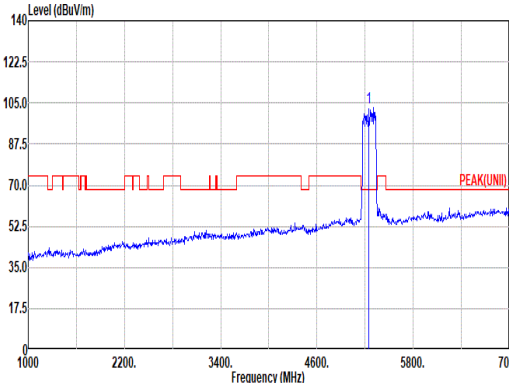
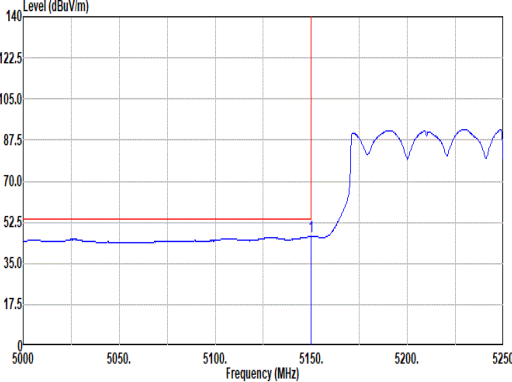
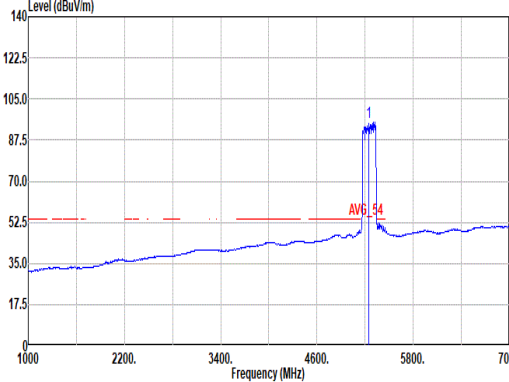


		10																																																																																																													
Mode		Band Edge - L																																																																																																													
		U-NII-1_5.15-5.25_802.11be EHT160_CH50_5250MHz																																																																																																													
ANT		D+B+C+A																																																																																																													
Pol.		Horizontal						Fundamental																																																																																																							
Peak		 Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5132.25</td><td>55.38</td><td>74.00</td><td>-18.62</td><td>40.17</td><td>33.12</td><td>12.01</td><td>29.92</td><td>0.00</td><td>340</td><td>52</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5132.25	55.38	74.00	-18.62	40.17	33.12	12.01	29.92	0.00	340	52	PEAK	 Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5250.00</td><td>102.02</td><td>-----</td><td>-----</td><td>87.40</td><td>33.02</td><td>12.30</td><td>29.90</td><td>0.00</td><td>340</td><td>52</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5250.00	102.02	-----	-----	87.40	33.02	12.30	29.90	0.00	340	52	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																																						
1	5132.25	55.38	74.00	-18.62	40.17	33.12	12.01	29.92	0.00	340	52	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																																						
1	5250.00	102.02	-----	-----	87.40	33.02	12.30	29.90	0.00	340	52	PEAK																																																																																																			
Avg		 Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5150.00</td><td>46.39</td><td>54.00</td><td>-7.61</td><td>31.17</td><td>33.09</td><td>12.05</td><td>29.92</td><td>0.00</td><td>340</td><td>52</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5150.00	46.39	54.00	-7.61	31.17	33.09	12.05	29.92	0.00	340	52	AVERAGE	 Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5250.00</td><td>95.23</td><td>-----</td><td>-----</td><td>79.77</td><td>33.04</td><td>12.32</td><td>29.90</td><td>0.00</td><td>340</td><td>52</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5250.00	95.23	-----	-----	79.77	33.04	12.32	29.90	0.00	340	52	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																																						
1	5150.00	46.39	54.00	-7.61	31.17	33.09	12.05	29.92	0.00	340	52	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																																						
1	5250.00	95.23	-----	-----	79.77	33.04	12.32	29.90	0.00	340	52	AVERAGE																																																																																																			

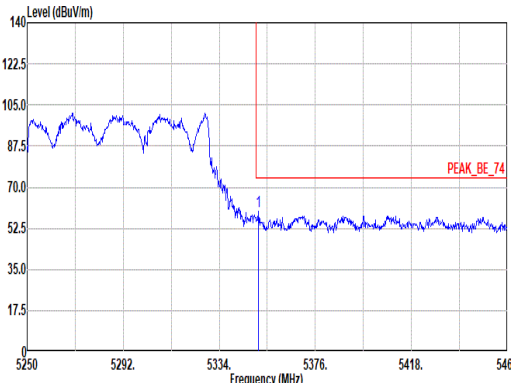
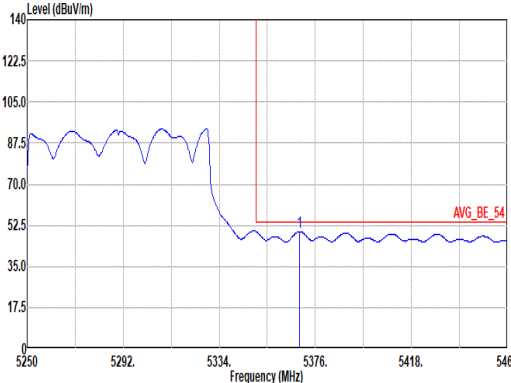


Mode	10																																																						
	Band Edge - R																																																						
	U-NII-1_5.15-5.25_802.11be EHT160_CH50_5250MHz																																																						
ANT	D+B+C+A																																																						
Pol.	Horizontal						Fundamental																																																
Peak	 Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5351.22</td><td>59.65</td><td>74.00</td><td>-14.35</td><td>44.13</td><td>33.07</td><td>12.35</td><td>29.90</td><td>0.00</td><td>340 52 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5351.22	59.65	74.00	-14.35	44.13	33.07	12.35	29.90	0.00	340 52 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5351.22	59.65	74.00	-14.35	44.13	33.07	12.35	29.90	0.00	340 52 PEAK																																													
Avg	 Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5369.07</td><td>49.78</td><td>54.00</td><td>-4.22</td><td>34.25</td><td>33.06</td><td>12.37</td><td>29.90</td><td>0.00</td><td>340 52 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5369.07	49.78	54.00	-4.22	34.25	33.06	12.37	29.90	0.00	340 52 AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5369.07	49.78	54.00	-4.22	34.25	33.06	12.37	29.90	0.00	340 52 AVERAGE																																													

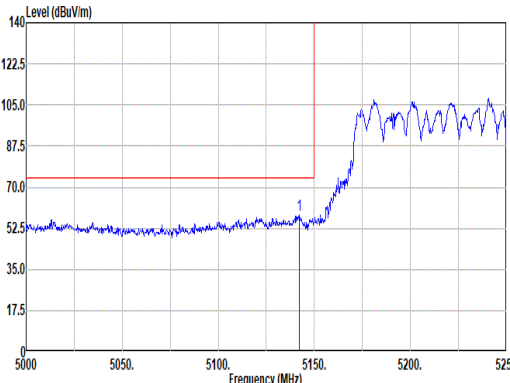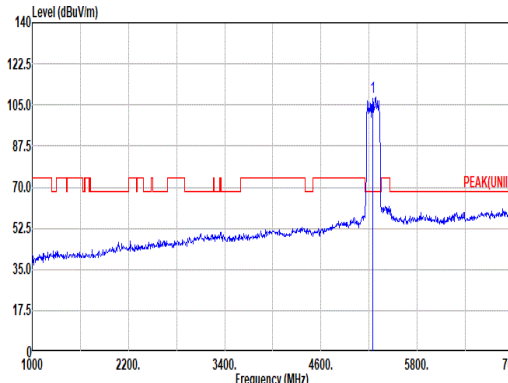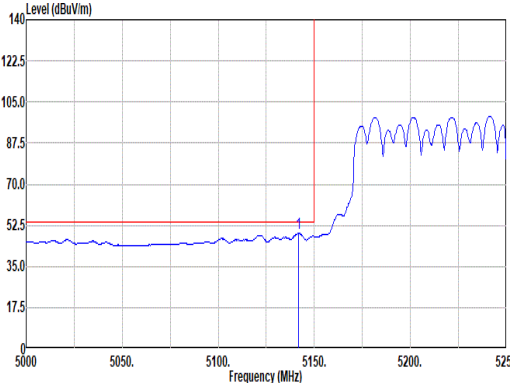
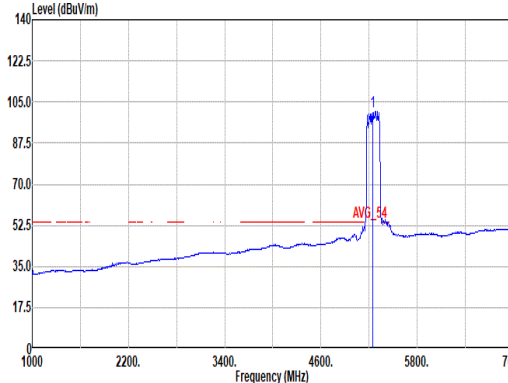


		10																																																																																							
Mode	Band Edge - L																																																																																								
	U-NII-1_5.15-5.25_802.11be EHT160_CH50_5250MHz																																																																																								
ANT	D+B+C+A																																																																																								
Pol.	Vertical						Fundamental																																																																																		
Peak																																																																																									
	Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5142.00</td><td>57.94</td><td>74.00</td><td>-16.06</td><td>42.73</td><td>33.10</td><td>12.03</td><td>29.92</td><td>0.00</td><td>300</td><td>249</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5142.00	57.94	74.00	-16.06	42.73	33.10	12.03	29.92	0.00	300	249	PEAK	Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5250.00</td><td>100.00</td><td>-----</td><td>-----</td><td>92.69</td><td>32.99</td><td>12.27</td><td>29.89</td><td>0.00</td><td>300</td><td>249</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5250.00	100.00	-----	-----	92.69	32.99	12.27	29.89	0.00	300	249
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5142.00	57.94	74.00	-16.06	42.73	33.10	12.03	29.92	0.00	300	249	PEAK																																																																													
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5250.00	100.00	-----	-----	92.69	32.99	12.27	29.89	0.00	300	249	PEAK																																																																													
Avg																																																																																									
	Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5141.75</td><td>49.15</td><td>54.00</td><td>-4.85</td><td>33.94</td><td>33.10</td><td>12.03</td><td>29.92</td><td>0.00</td><td>300</td><td>249</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5141.75	49.15	54.00	-4.85	33.94	33.10	12.03	29.92	0.00	300	249	AVERAGE	Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5250.00</td><td>101.00</td><td>-----</td><td>-----</td><td>85.72</td><td>32.99</td><td>12.26</td><td>29.89</td><td>0.00</td><td>300</td><td>249</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5250.00	101.00	-----	-----	85.72	32.99	12.26	29.89	0.00	300	249
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5141.75	49.15	54.00	-4.85	33.94	33.10	12.03	29.92	0.00	300	249	AVERAGE																																																																													
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5250.00	101.00	-----	-----	85.72	32.99	12.26	29.89	0.00	300	249	AVERAGE																																																																													

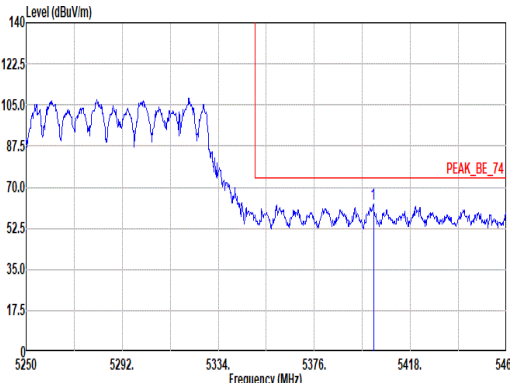
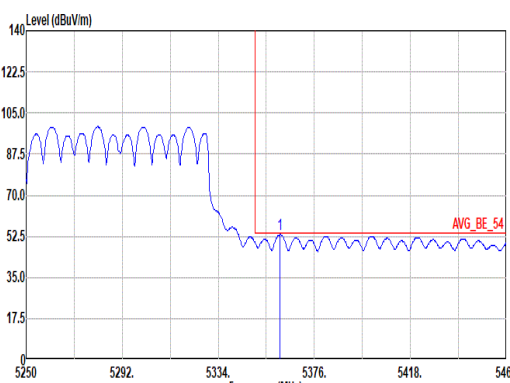


Mode	10																																													
	Band Edge - R																																													
	U-NII-1_5.15-5.25_802.11be EHT160_CH50_5250MHz																																													
ANT	D+B+C+A																																													
Pol.	Vertical	Fundamental																																												
Peak	 Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5401.03</td><td>62.61</td><td>74.00</td><td>-11.39</td><td>47.07</td><td>33.04</td><td>12.41</td><td>29.91</td><td>0.00</td><td>300</td><td>249</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5401.03	62.61	74.00	-11.39	47.07	33.04	12.41	29.91	0.00	300	249	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5401.03	62.61	74.00	-11.39	47.07	33.04	12.41	29.91	0.00	300	249	PEAK																																		
Avg	 Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5361.09</td><td>53.19</td><td>54.00</td><td>-0.81</td><td>37.66</td><td>33.07</td><td>12.36</td><td>29.90</td><td>0.00</td><td>300</td><td>249</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5361.09	53.19	54.00	-0.81	37.66	33.07	12.36	29.90	0.00	300	249	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5361.09	53.19	54.00	-0.81	37.66	33.07	12.36	29.90	0.00	300	249	AVERAGE																																		



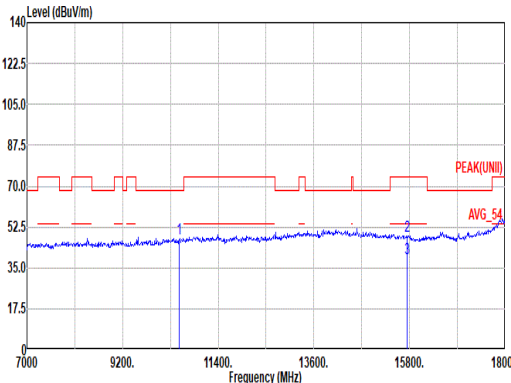
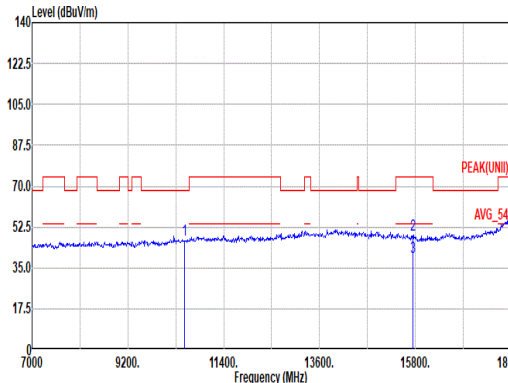


Mode	10																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-1_5.15-5.25_802.11be EHT160_CH50_5250MHz																																																																																																																									
ANT	D+B+C+A																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	 Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL Mode : 10 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 10500.00</td><td>47.60</td><td>68.20</td><td>-20.60</td><td>58.89</td><td>38.89</td><td>17.55</td><td>68.11</td><td>0.38</td><td>-- -- PEAK</td></tr><tr><td>2 15750.00</td><td>48.73</td><td>74.00</td><td>-25.27</td><td>56.86</td><td>38.06</td><td>21.64</td><td>68.18</td><td>0.35</td><td>-- -- PEAK</td></tr><tr><td>3 15750.00</td><td>39.31</td><td>54.00</td><td>-14.69</td><td>47.44</td><td>38.06</td><td>21.64</td><td>68.18</td><td>0.35</td><td>-- -- Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 10500.00	47.60	68.20	-20.60	58.89	38.89	17.55	68.11	0.38	-- -- PEAK	2 15750.00	48.73	74.00	-25.27	56.86	38.06	21.64	68.18	0.35	-- -- PEAK	3 15750.00	39.31	54.00	-14.69	47.44	38.06	21.64	68.18	0.35	-- -- Average	 Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL Mode : 10 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 10500.00</td><td>46.91</td><td>68.20</td><td>-21.29</td><td>58.20</td><td>38.89</td><td>17.55</td><td>68.11</td><td>0.38</td><td>-- -- PEAK</td></tr><tr><td>2 15750.00</td><td>48.97</td><td>74.00</td><td>-25.03</td><td>57.10</td><td>38.06</td><td>21.64</td><td>68.18</td><td>0.35</td><td>-- -- PEAK</td></tr><tr><td>3 15750.00</td><td>39.58</td><td>54.00</td><td>-14.42</td><td>47.71</td><td>38.06</td><td>21.64</td><td>68.18</td><td>0.35</td><td>-- -- Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 10500.00	46.91	68.20	-21.29	58.20	38.89	17.55	68.11	0.38	-- -- PEAK	2 15750.00	48.97	74.00	-25.03	57.10	38.06	21.64	68.18	0.35	-- -- PEAK	3 15750.00	39.58	54.00	-14.42	47.71	38.06	21.64	68.18	0.35	-- -- Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 10500.00	47.60	68.20	-20.60	58.89	38.89	17.55	68.11	0.38	-- -- PEAK																																																																																																																	
2 15750.00	48.73	74.00	-25.27	56.86	38.06	21.64	68.18	0.35	-- -- PEAK																																																																																																																	
3 15750.00	39.31	54.00	-14.69	47.44	38.06	21.64	68.18	0.35	-- -- Average																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 10500.00	46.91	68.20	-21.29	58.20	38.89	17.55	68.11	0.38	-- -- PEAK																																																																																																																	
2 15750.00	48.97	74.00	-25.03	57.10	38.06	21.64	68.18	0.35	-- -- PEAK																																																																																																																	
3 15750.00	39.58	54.00	-14.42	47.71	38.06	21.64	68.18	0.35	-- -- Average																																																																																																																	

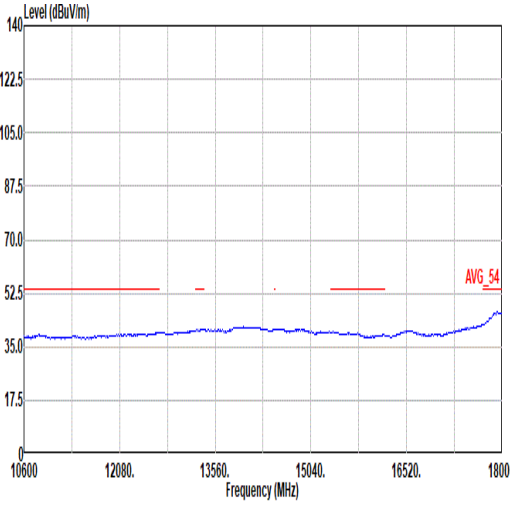
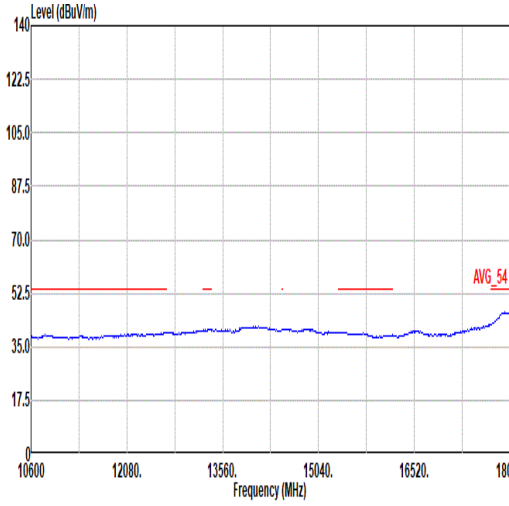


Mode	10	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT160_CH50_5250MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G -18G Avg	 Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL Mode : 10	 Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL Mode : 10

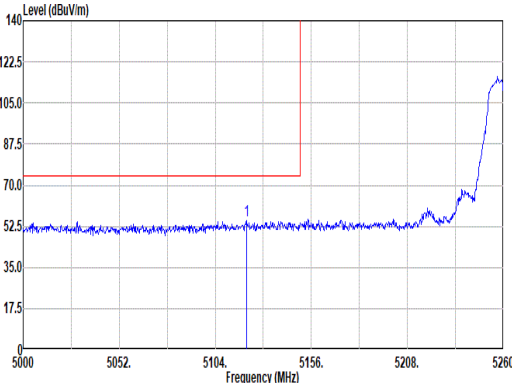
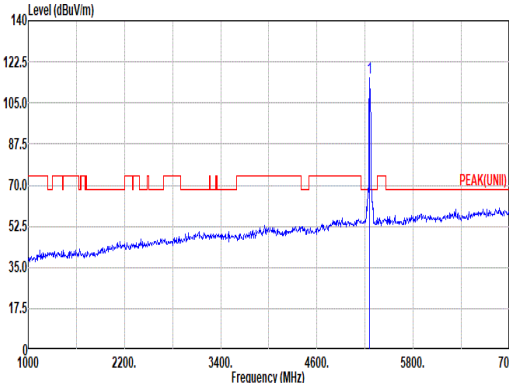
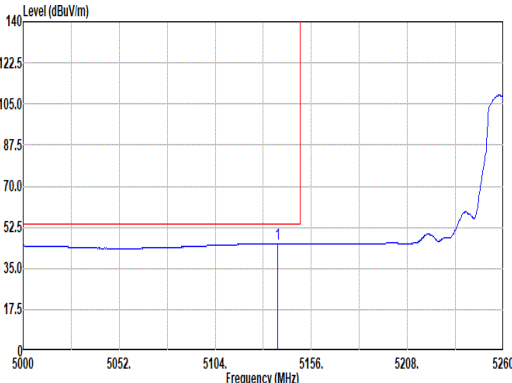
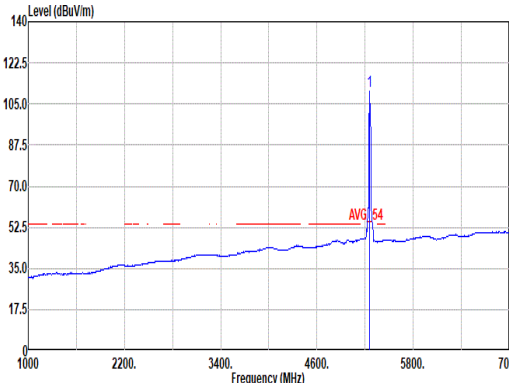


Mode	11																																																																																																					
	Band Edge - L																																																																																																					
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																																					
ANT	D+B+C+A																																																																																																					
Pol.	Horizontal						Fundamental																																																																																															
Peak	 Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5137.80</td><td>54.79</td><td>74.00</td><td>-19.21</td><td>39.57</td><td>33.14</td><td>11.99</td><td>29.91</td><td>0.00</td><td>343</td><td>165</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5137.80	54.79	74.00	-19.21	39.57	33.14	11.99	29.91	0.00	343	165	PEAK	 Site : 03CH02-CA Condition: PEAK(UNI)_3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5260.00</td><td>115.79</td><td>-----</td><td>-----</td><td>100.47</td><td>32.97</td><td>12.23</td><td>29.88</td><td>0.00</td><td>343</td><td>165</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5260.00	115.79	-----	-----	100.47	32.97	12.23	29.88	0.00	343	165	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5137.80	54.79	74.00	-19.21	39.57	33.14	11.99	29.91	0.00	343	165	PEAK																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5260.00	115.79	-----	-----	100.47	32.97	12.23	29.88	0.00	343	165	PEAK																																																																																										
Avg	 Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5137.80</td><td>45.49</td><td>54.00</td><td>-8.51</td><td>30.28</td><td>33.11</td><td>12.02</td><td>29.92</td><td>0.00</td><td>343</td><td>165</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5137.80	45.49	54.00	-8.51	30.28	33.11	12.02	29.92	0.00	343	165	AVERAGE	 Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5260.00</td><td>110.36</td><td>-----</td><td>-----</td><td>95.04</td><td>32.97</td><td>12.23</td><td>29.88</td><td>0.00</td><td>343</td><td>165</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5260.00	110.36	-----	-----	95.04	32.97	12.23	29.88	0.00	343	165	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5137.80	45.49	54.00	-8.51	30.28	33.11	12.02	29.92	0.00	343	165	AVERAGE																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5260.00	110.36	-----	-----	95.04	32.97	12.23	29.88	0.00	343	165	AVERAGE																																																																																										

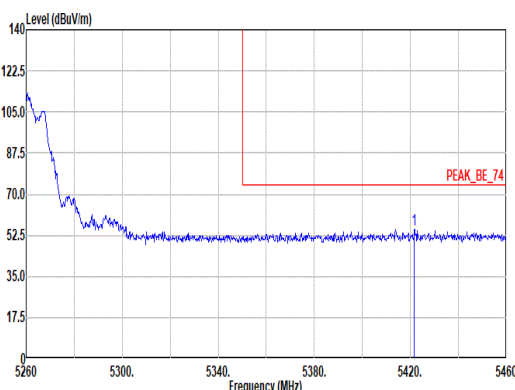
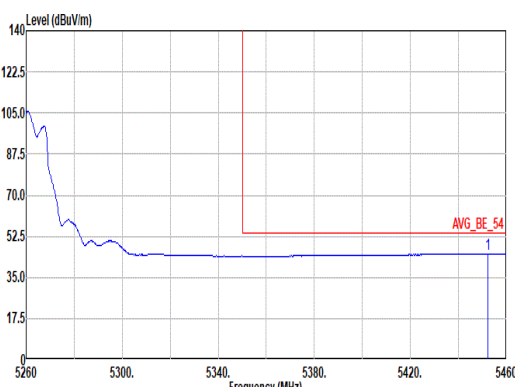


Mode	11																																													
	Band Edge - R																																													
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																													
ANT	D+B+C+A																																													
Pol.	Horizontal	Fundamental																																												
Peak	 Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5421.60</td><td>54.88</td><td>74.00</td><td>-19.12</td><td>39.37</td><td>32.99</td><td>12.43</td><td>29.91</td><td>0.00</td><td>343</td><td>165</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5421.60	54.88	74.00	-19.12	39.37	32.99	12.43	29.91	0.00	343	165	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5421.60	54.88	74.00	-19.12	39.37	32.99	12.43	29.91	0.00	343	165	PEAK																																		
Avg	 Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5452.40</td><td>44.88</td><td>54.00</td><td>-9.12</td><td>29.40</td><td>32.92</td><td>12.47</td><td>29.91</td><td>0.00</td><td>343</td><td>165</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5452.40	44.88	54.00	-9.12	29.40	32.92	12.47	29.91	0.00	343	165	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5452.40	44.88	54.00	-9.12	29.40	32.92	12.47	29.91	0.00	343	165	AVERAGE																																		

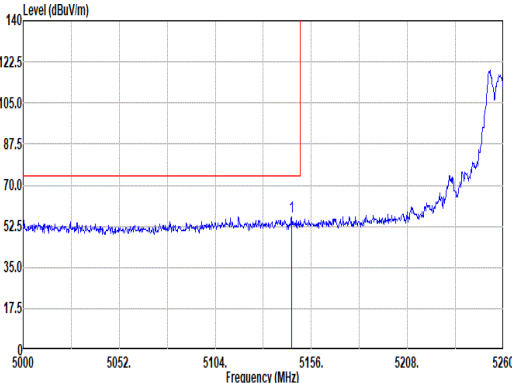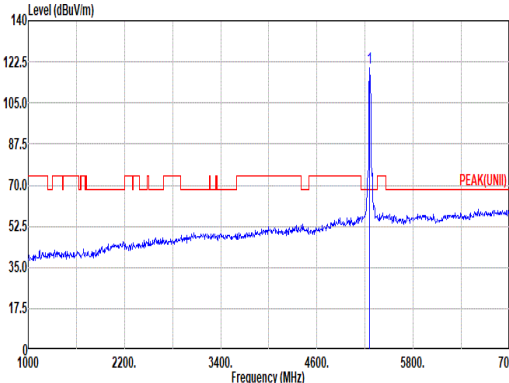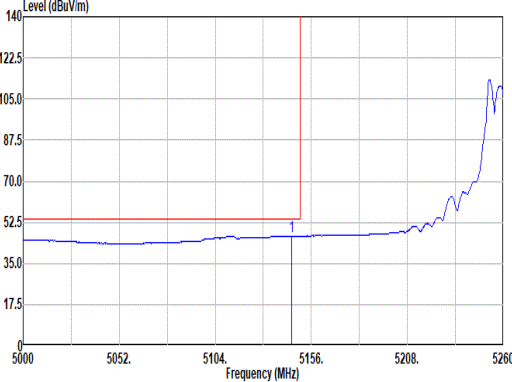
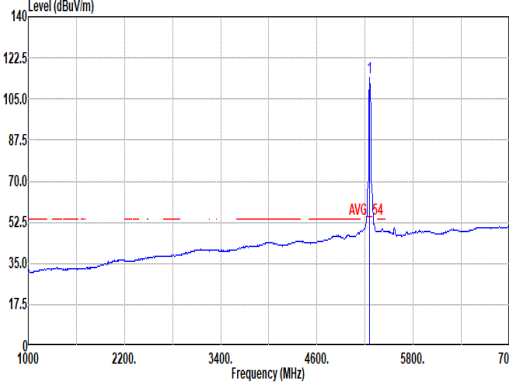


Mode	11																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																																		
ANT	D+B+C+A																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5145.34</td><td>56.68</td><td>74.00</td><td>-17.32</td><td>41.46</td><td>33.10</td><td>12.04</td><td>29.92</td><td>0.00</td><td>300</td><td>242</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5145.34	56.68	74.00	-17.32	41.46	33.10	12.04	29.92	0.00	300	242	PEAK	Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5260.00</td><td>120.16</td><td>-----</td><td>-----</td><td>104.85</td><td>32.96</td><td>12.23</td><td>29.88</td><td>0.00</td><td>300</td><td>242</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5260.00	120.16	-----	-----	104.85	32.96	12.23	29.88	0.00	300	242
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5145.34	56.68	74.00	-17.32	41.46	33.10	12.04	29.92	0.00	300	242	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5260.00	120.16	-----	-----	104.85	32.96	12.23	29.88	0.00	300	242	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5145.34</td><td>46.69</td><td>54.00</td><td>-7.31</td><td>31.47</td><td>33.10</td><td>12.04</td><td>29.92</td><td>0.00</td><td>300</td><td>242</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5145.34	46.69	54.00	-7.31	31.47	33.10	12.04	29.92	0.00	300	242	AVERAGE	Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5260.00</td><td>114.28</td><td>-----</td><td>-----</td><td>98.97</td><td>32.96</td><td>12.23</td><td>29.88</td><td>0.00</td><td>300</td><td>242</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5260.00	114.28	-----	-----	98.97	32.96	12.23	29.88	0.00	300	242
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5145.34	46.69	54.00	-7.31	31.47	33.10	12.04	29.92	0.00	300	242	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5260.00	114.28	-----	-----	98.97	32.96	12.23	29.88	0.00	300	242	AVERAGE																																																																																							

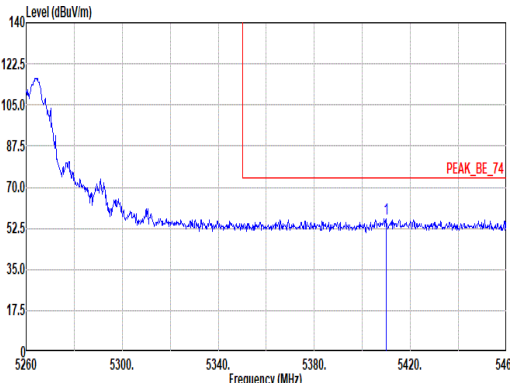
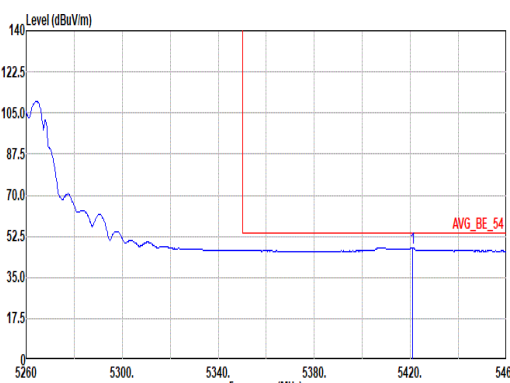


Mode	11																																													
	Band Edge - R																																													
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																													
ANT	D+B+C+A																																													
Pol.	Vertical	Fundamental																																												
Peak	 Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5409.00</td><td>56.69</td><td>74.00</td><td>-17.31</td><td>41.16</td><td>33.02</td><td>12.42</td><td>29.91</td><td>0.00</td><td>300</td><td>242</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5409.00	56.69	74.00	-17.31	41.16	33.02	12.42	29.91	0.00	300	242	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5409.00	56.69	74.00	-17.31	41.16	33.02	12.42	29.91	0.00	300	242	PEAK																																		
Avg	 Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5421.00</td><td>47.50</td><td>54.00</td><td>-6.50</td><td>31.99</td><td>32.99</td><td>12.43</td><td>29.91</td><td>0.00</td><td>300</td><td>242</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5421.00	47.50	54.00	-6.50	31.99	32.99	12.43	29.91	0.00	300	242	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5421.00	47.50	54.00	-6.50	31.99	32.99	12.43	29.91	0.00	300	242	AVERAGE																																		

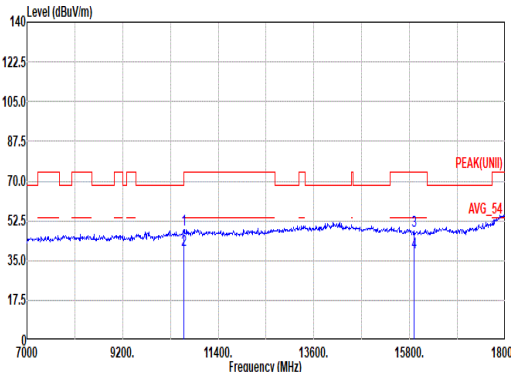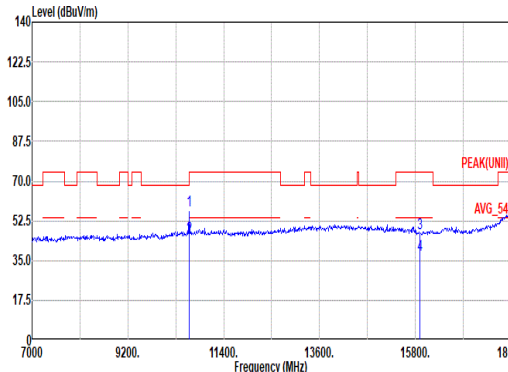

Mode	12																																																																																																																																																															
	Harmonic																																																																																																																																																															
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																																																																																															
ANT	D+B+C+A																																																																																																																																																															
Pol.	Horizontal	Vertical																																																																																																																																																														
Peak Avg	 Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10600.00</td><td>48.68</td><td>74.00</td><td>-25.32</td><td>59.44</td><td>39.04</td><td>17.64</td><td>67.81</td><td>0.37</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>10600.00</td><td>39.44</td><td>54.00</td><td>-14.56</td><td>50.20</td><td>39.04</td><td>17.64</td><td>67.81</td><td>0.37</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>15900.00</td><td>47.97</td><td>74.00</td><td>-26.03</td><td>56.03</td><td>37.89</td><td>21.74</td><td>68.05</td><td>0.36</td><td>--</td><td>PEAK</td></tr><tr><td>4</td><td>15900.00</td><td>38.55</td><td>54.00</td><td>-15.45</td><td>46.61</td><td>37.89</td><td>21.74</td><td>68.05</td><td>0.36</td><td>--</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10600.00	48.68	74.00	-25.32	59.44	39.04	17.64	67.81	0.37	--	PEAK	2	10600.00	39.44	54.00	-14.56	50.20	39.04	17.64	67.81	0.37	--	Average	3	15900.00	47.97	74.00	-26.03	56.03	37.89	21.74	68.05	0.36	--	PEAK	4	15900.00	38.55	54.00	-15.45	46.61	37.89	21.74	68.05	0.36	--	Average	 Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10600.00</td><td>57.01</td><td>74.00</td><td>-16.99</td><td>67.77</td><td>39.04</td><td>17.64</td><td>67.81</td><td>0.37</td><td>312</td><td>179 PEAK</td></tr><tr><td>2</td><td>10600.00</td><td>45.21</td><td>54.00</td><td>-8.79</td><td>55.97</td><td>39.04</td><td>17.64</td><td>67.81</td><td>0.37</td><td>312</td><td>179 Average</td></tr><tr><td>3</td><td>15900.00</td><td>47.00</td><td>74.00</td><td>-27.00</td><td>55.06</td><td>37.89</td><td>21.74</td><td>68.05</td><td>0.36</td><td>--</td><td>PEAK</td></tr><tr><td>4</td><td>15900.00</td><td>37.35</td><td>54.00</td><td>-16.65</td><td>45.41</td><td>37.89</td><td>21.74</td><td>68.05</td><td>0.36</td><td>--</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10600.00	57.01	74.00	-16.99	67.77	39.04	17.64	67.81	0.37	312	179 PEAK	2	10600.00	45.21	54.00	-8.79	55.97	39.04	17.64	67.81	0.37	312	179 Average	3	15900.00	47.00	74.00	-27.00	55.06	37.89	21.74	68.05	0.36	--	PEAK	4	15900.00	37.35	54.00	-16.65	45.41	37.89	21.74	68.05	0.36	--	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																						
1	10600.00	48.68	74.00	-25.32	59.44	39.04	17.64	67.81	0.37	--	PEAK																																																																																																																																																					
2	10600.00	39.44	54.00	-14.56	50.20	39.04	17.64	67.81	0.37	--	Average																																																																																																																																																					
3	15900.00	47.97	74.00	-26.03	56.03	37.89	21.74	68.05	0.36	--	PEAK																																																																																																																																																					
4	15900.00	38.55	54.00	-15.45	46.61	37.89	21.74	68.05	0.36	--	Average																																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																						
1	10600.00	57.01	74.00	-16.99	67.77	39.04	17.64	67.81	0.37	312	179 PEAK																																																																																																																																																					
2	10600.00	45.21	54.00	-8.79	55.97	39.04	17.64	67.81	0.37	312	179 Average																																																																																																																																																					
3	15900.00	47.00	74.00	-27.00	55.06	37.89	21.74	68.05	0.36	--	PEAK																																																																																																																																																					
4	15900.00	37.35	54.00	-16.65	45.41	37.89	21.74	68.05	0.36	--	Average																																																																																																																																																					



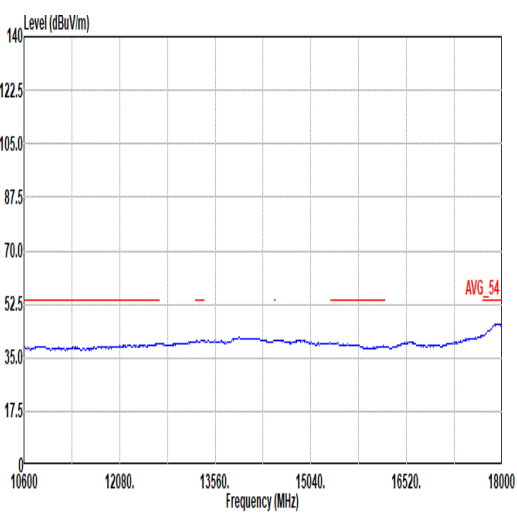
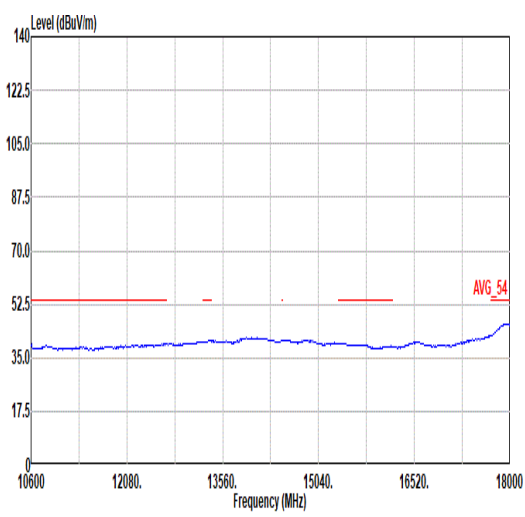


Mode	12	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G -18G Avg	 Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL	 Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL







Mode	13																																																																																					
	Band Edge																																																																																					
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																					
ANT	D+B+C+A																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.30</td><td>57.71</td><td>74.00</td><td>-16.29</td><td></td><td>42.19</td><td>33.07</td><td>12.35</td><td>29.90</td><td>0.00</td><td>272</td><td>0</td><td>PEAK</td></tr></tbody></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5350.30	57.71	74.00	-16.29		42.19	33.07	12.35	29.90	0.00	272	0	PEAK	Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>111.76</td><td>111.76</td><td>0.00</td><td></td><td>96.33</td><td>33.03</td><td>12.30</td><td>29.90</td><td>0.00</td><td>272</td><td>0</td><td>PEAK</td></tr></tbody></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5320.00	111.76	111.76	0.00		96.33	33.03	12.30	29.90	0.00	272	0	PEAK
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																									
1	5350.30	57.71	74.00	-16.29		42.19	33.07	12.35	29.90	0.00	272	0	PEAK																																																																									
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																									
1	5320.00	111.76	111.76	0.00		96.33	33.03	12.30	29.90	0.00	272	0	PEAK																																																																									
Avg	Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.10</td><td>48.74</td><td>54.00</td><td>-5.26</td><td></td><td>33.22</td><td>33.07</td><td>12.35</td><td>29.90</td><td>0.00</td><td>272</td><td>0</td><td>AVERAGE</td></tr></tbody></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5350.10	48.74	54.00	-5.26		33.22	33.07	12.35	29.90	0.00	272	0	AVERAGE	Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>105.57</td><td>105.57</td><td>0.00</td><td></td><td>90.14</td><td>33.03</td><td>12.30</td><td>29.90</td><td>0.00</td><td>272</td><td>0</td><td>AVERAGE</td></tr></tbody></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5320.00	105.57	105.57	0.00		90.14	33.03	12.30	29.90	0.00	272	0	AVERAGE
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																									
1	5350.10	48.74	54.00	-5.26		33.22	33.07	12.35	29.90	0.00	272	0	AVERAGE																																																																									
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																									
1	5320.00	105.57	105.57	0.00		90.14	33.03	12.30	29.90	0.00	272	0	AVERAGE																																																																									

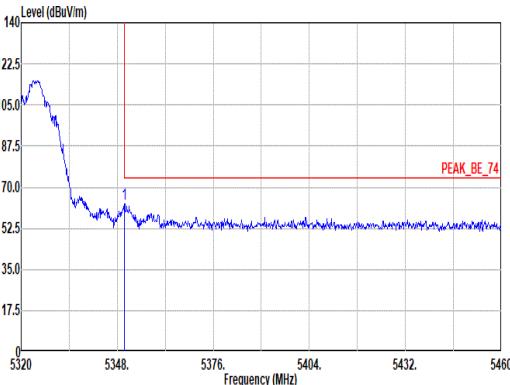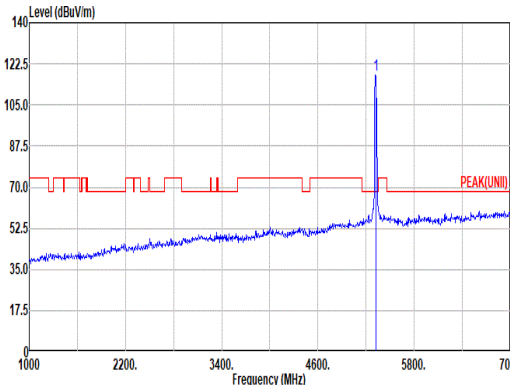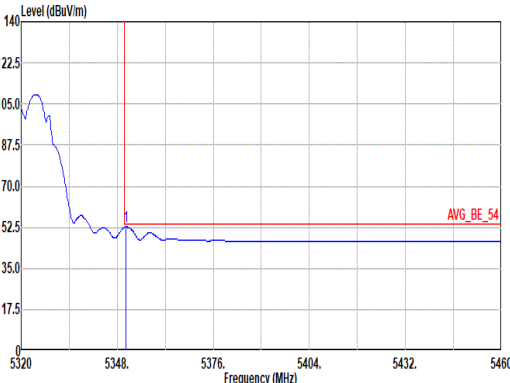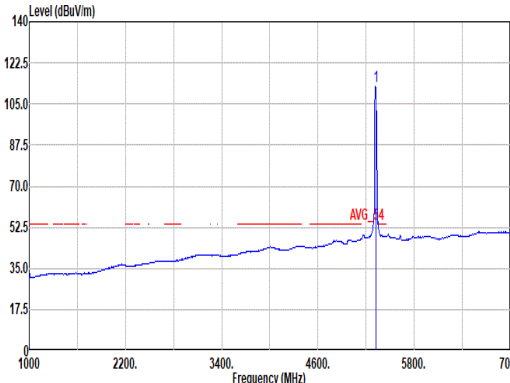

Mode	13																																																																																														
	Band Edge																																																																																														
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																														
ANT	D+B+C+A																																																																																														
Pol.	Vertical						Fundamental																																																																																								
Peak																																																																																															
	Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.10</td><td>62.69</td><td>74.00</td><td>-11.31</td><td></td><td>47.17</td><td>33.07</td><td>12.35</td><td>29.90</td><td>0.00</td><td>300</td><td>248</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5350.10	62.69	74.00	-11.31		47.17	33.07	12.35	29.90	0.00	300	248	PEAK	Site : 03CH02-CA Condition: PEAK(UNI) 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>118.03</td><td>-----</td><td>-----</td><td></td><td>102.60</td><td>33.03</td><td>12.30</td><td>29.90</td><td>0.00</td><td>300</td><td>248</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5320.00	118.03	-----	-----		102.60	33.03	12.30	29.90	0.00	300	248
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																		
1	5350.10	62.69	74.00	-11.31		47.17	33.07	12.35	29.90	0.00	300	248	PEAK																																																																																		
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																		
1	5320.00	118.03	-----	-----		102.60	33.03	12.30	29.90	0.00	300	248	PEAK																																																																																		
Avg																																																																																															
	Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.52</td><td>52.69</td><td>54.00</td><td>-1.31</td><td></td><td>37.17</td><td>33.07</td><td>12.35</td><td>29.90</td><td>0.00</td><td>300</td><td>248</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5350.52	52.69	54.00	-1.31		37.17	33.07	12.35	29.90	0.00	300	248	AVERAGE	Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>112.33</td><td>-----</td><td>-----</td><td></td><td>96.90</td><td>33.03</td><td>12.30</td><td>29.90</td><td>0.00</td><td>300</td><td>248</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5320.00	112.33	-----	-----		96.90	33.03	12.30	29.90	0.00	300	248
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																		
1	5350.52	52.69	54.00	-1.31		37.17	33.07	12.35	29.90	0.00	300	248	AVERAGE																																																																																		
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																		
1	5320.00	112.33	-----	-----		96.90	33.03	12.30	29.90	0.00	300	248	AVERAGE																																																																																		

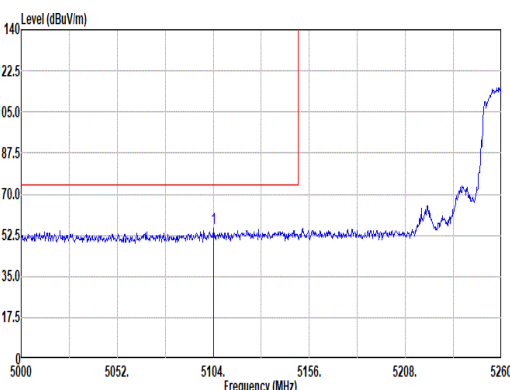
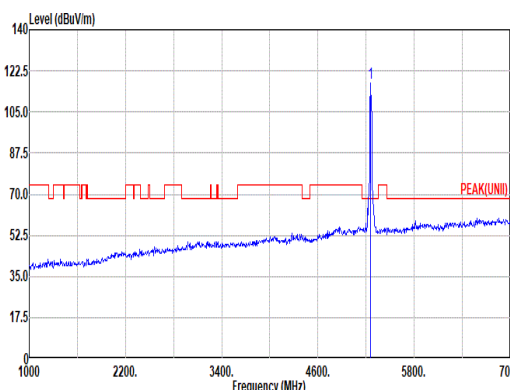
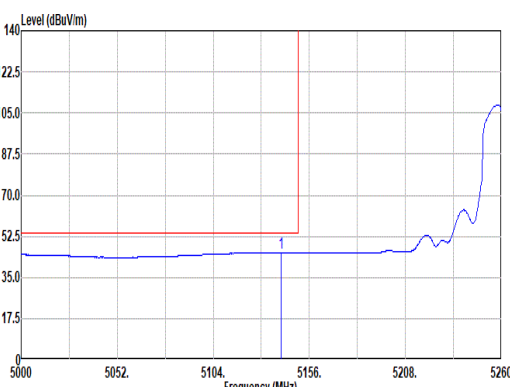
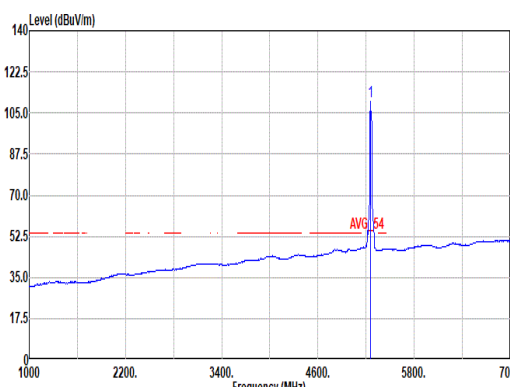


		14																																																																																							
Mode		Band Edge - L																																																																																							
		U-NII-2A_5.25-5.35_802.11be EHT20_CH52_5260MHz																																																																																							
ANT		D+B+C+A																																																																																							
Pol.		Horizontal					Fundamental																																																																																		
Peak																																																																																									
	Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5104.00</td><td>55.26</td><td>74.00 -18.74</td><td>40.05</td><td>33.17</td><td>11.95</td><td>29.91</td><td>0.00</td><td>344</td><td>166 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5104.00	55.26	74.00 -18.74	40.05	33.17	11.95	29.91	0.00	344	166 PEAK	Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5260.00</td><td>117.17</td><td>-----</td><td>101.05</td><td>32.97</td><td>12.23</td><td>29.88</td><td>0.00</td><td>344</td><td>166 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5260.00	117.17	-----	101.05	32.97	12.23	29.88	0.00	344
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1 5104.00	55.26	74.00 -18.74	40.05	33.17	11.95	29.91	0.00	344	166 PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1 5260.00	117.17	-----	101.05	32.97	12.23	29.88	0.00	344	166 PEAK																																																																																
Avg																																																																																									
	Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5140.66</td><td>45.59</td><td>54.00 -8.41</td><td>30.37</td><td>33.11</td><td>12.03</td><td>29.92</td><td>0.00</td><td>344</td><td>166 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5140.66	45.59	54.00 -8.41	30.37	33.11	12.03	29.92	0.00	344	166 AVERAGE	Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5260.00</td><td>110.04</td><td>-----</td><td>94.72</td><td>32.97</td><td>12.23</td><td>29.88</td><td>0.00</td><td>344</td><td>166 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5260.00	110.04	-----	94.72	32.97	12.23	29.88	0.00	344
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1 5140.66	45.59	54.00 -8.41	30.37	33.11	12.03	29.92	0.00	344	166 AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1 5260.00	110.04	-----	94.72	32.97	12.23	29.88	0.00	344	166 AVERAGE																																																																																





Mode	14																																					
	Band Edge - R																																					
	U-NII-2A_5.25-5.35_802.11be EHT20_CH52_5260MHz																																					
ANT	D+B+C+A																																					
Pol.	Horizontal	Fundamental																																				
Peak	Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5455.00</td><td>54.54</td><td>74.00</td><td>-19.46</td><td>39.06</td><td>32.92</td><td>12.47</td><td>29.91</td><td>0.00</td><td>344</td><td>166</td><td>PEAK</td></tr></table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5455.00	54.54	74.00	-19.46	39.06	32.92	12.47	29.91	0.00	344	166	PEAK	Blank
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																												
1 5455.00	54.54	74.00	-19.46	39.06	32.92	12.47	29.91	0.00	344	166	PEAK																											
Avg	Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5458.00</td><td>44.94</td><td>54.00</td><td>-9.06</td><td>29.45</td><td>32.92</td><td>12.48</td><td>29.91</td><td>0.00</td><td>344</td><td>166</td><td>AVERAGE</td></tr></table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5458.00	44.94	54.00	-9.06	29.45	32.92	12.48	29.91	0.00	344	166	AVERAGE	Blank
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																												
1 5458.00	44.94	54.00	-9.06	29.45	32.92	12.48	29.91	0.00	344	166	AVERAGE																											

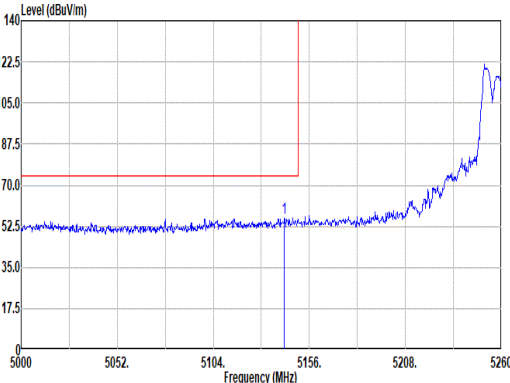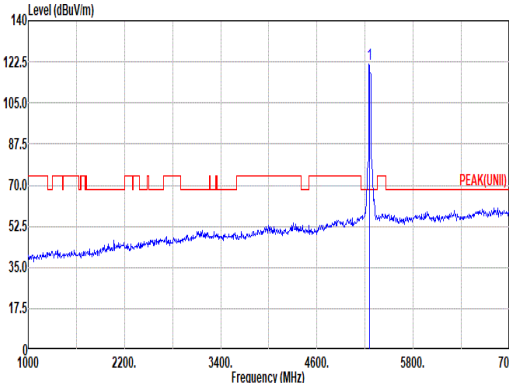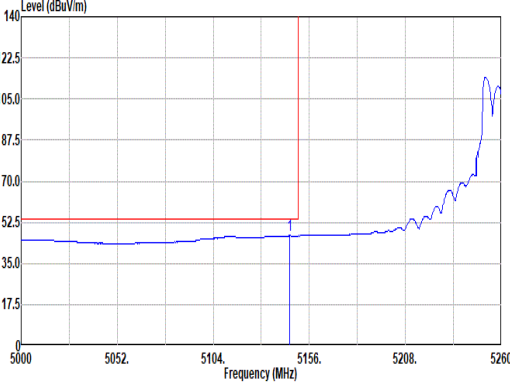
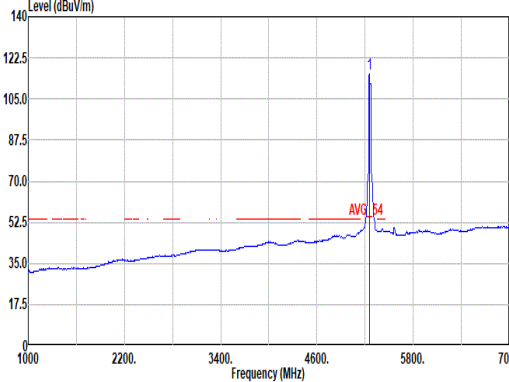


		14																																																																																												
Mode	Band Edge - L																																																																																													
	U-NII-2A_5.25-5.35_802.11be EHT20_CH52_5260MHz																																																																																													
ANT	D+B+C+A																																																																																													
Pol.	Vertical						Fundamental																																																																																							
Peak																																																																																														
	Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5142.48</td><td>55.89</td><td>74.00</td><td>-18.11</td><td></td><td>40.68</td><td>33.10</td><td>12.03</td><td>29.92</td><td>0.00</td><td>300</td><td>243</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5142.48	55.89	74.00	-18.11		40.68	33.10	12.03	29.92	0.00	300	243	PEAK	Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5260.00</td><td>121.40</td><td>-----</td><td>-----</td><td></td><td>106.10</td><td>32.96</td><td>12.22</td><td>29.88</td><td>0.00</td><td>300</td><td>243</td><td>PEAK</td></tr></tbody></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5260.00	121.40	-----	-----		106.10	32.96	12.22	29.88	0.00	300	243
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																	
1	5142.48	55.89	74.00	-18.11		40.68	33.10	12.03	29.92	0.00	300	243	PEAK																																																																																	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																	
1	5260.00	121.40	-----	-----		106.10	32.96	12.22	29.88	0.00	300	243	PEAK																																																																																	
Avg																																																																																														
	Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5145.34</td><td>46.80</td><td>54.00</td><td>-7.20</td><td></td><td>31.58</td><td>33.10</td><td>12.04</td><td>29.92</td><td>0.00</td><td>300</td><td>243</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5145.34	46.80	54.00	-7.20		31.58	33.10	12.04	29.92	0.00	300	243	AVERAGE	Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5260.00</td><td>115.82</td><td>-----</td><td>-----</td><td></td><td>100.51</td><td>32.96</td><td>12.23</td><td>29.88</td><td>0.00</td><td>300</td><td>243</td><td>AVERAGE</td></tr></tbody></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5260.00	115.82	-----	-----		100.51	32.96	12.23	29.88	0.00	300	243
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																	
1	5145.34	46.80	54.00	-7.20		31.58	33.10	12.04	29.92	0.00	300	243	AVERAGE																																																																																	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																	
1	5260.00	115.82	-----	-----		100.51	32.96	12.23	29.88	0.00	300	243	AVERAGE																																																																																	

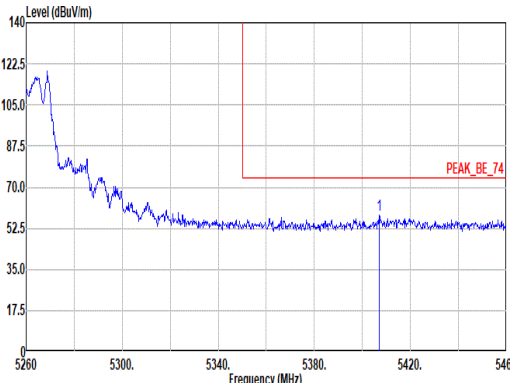
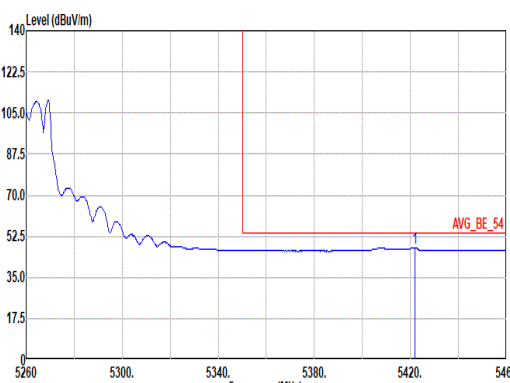


Mode	14																																													
	Band Edge - R																																													
	U-NII-2A_5.25-5.35_802.11be EHT20_CH52_5260MHz																																													
ANT	D+B+C+A																																													
Pol.	Vertical	Fundamental																																												
Peak	 Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5407.00</td><td>57.93</td><td>74.00</td><td>-16.07</td><td>42.39</td><td>33.03</td><td>12.42</td><td>29.91</td><td>0.00</td><td>300</td><td>243</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5407.00	57.93	74.00	-16.07	42.39	33.03	12.42	29.91	0.00	300	243	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5407.00	57.93	74.00	-16.07	42.39	33.03	12.42	29.91	0.00	300	243	PEAK																																		
Avg	 Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5422.00</td><td>47.51</td><td>54.00</td><td>-6.49</td><td>31.99</td><td>32.99</td><td>12.44</td><td>29.91</td><td>0.00</td><td>300</td><td>243</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5422.00	47.51	54.00	-6.49	31.99	32.99	12.44	29.91	0.00	300	243	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5422.00	47.51	54.00	-6.49	31.99	32.99	12.44	29.91	0.00	300	243	AVERAGE																																		



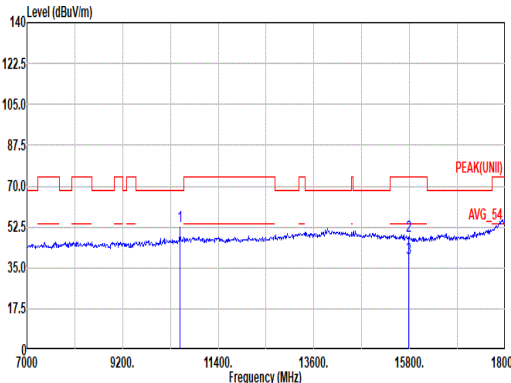
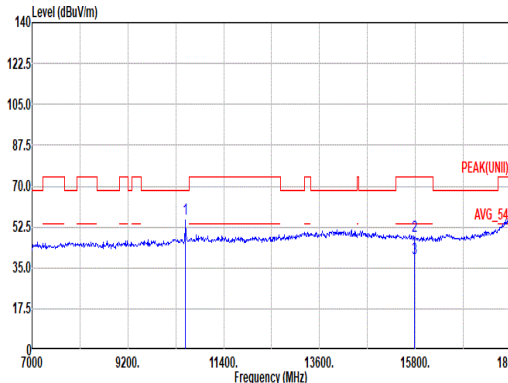


Mode	14																																																																																																																																																						
	Harmonic																																																																																																																																																						
	U-NII-2A_5.25-5.35_802.11be EHT20_CH52_5260MHz																																																																																																																																																						
ANT	D+B+C+A																																																																																																																																																						
Pol.	Horizontal						Vertical																																																																																																																																																
Peak Avg																																																																																																																																																							
	Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL Mode : 14 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10520.00</td><td>53.03</td><td>68.20</td><td>-15.17</td><td>64.14</td><td>38.93</td><td>17.57</td><td>67.99</td><td>0.38</td><td>400</td><td>104</td><td>PEAK</td></tr><tr><td>2</td><td>15780.00</td><td>48.35</td><td>74.00</td><td>-25.65</td><td>56.75</td><td>38.02</td><td>21.66</td><td>68.43</td><td>0.35</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>15780.00</td><td>39.15</td><td>54.00</td><td>-14.85</td><td>47.55</td><td>38.02</td><td>21.66</td><td>68.43</td><td>0.35</td><td>--</td><td>--</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10520.00	53.03	68.20	-15.17	64.14	38.93	17.57	67.99	0.38	400	104	PEAK	2	15780.00	48.35	74.00	-25.65	56.75	38.02	21.66	68.43	0.35	--	--	PEAK	3	15780.00	39.15	54.00	-14.85	47.55	38.02	21.66	68.43	0.35	--	--	Average	Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL Mode : 14 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10520.00</td><td>56.00</td><td>68.20</td><td>-12.20</td><td>67.11</td><td>38.93</td><td>17.57</td><td>67.99</td><td>0.38</td><td>300</td><td>177</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>48.58</td><td>74.00</td><td>-25.42</td><td>56.98</td><td>38.02</td><td>21.66</td><td>68.43</td><td>0.35</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>15780.00</td><td>39.02</td><td>54.00</td><td>-14.98</td><td>47.42</td><td>38.02</td><td>21.66</td><td>68.43</td><td>0.35</td><td>--</td><td>--</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10520.00	56.00	68.20	-12.20	67.11	38.93	17.57	67.99	0.38	300	177	Peak	2	15780.00	48.58	74.00	-25.42	56.98	38.02	21.66	68.43	0.35	--	--	PEAK	3	15780.00	39.02	54.00	-14.98	47.42	38.02	21.66	68.43	0.35	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																													
1	10520.00	53.03	68.20	-15.17	64.14	38.93	17.57	67.99	0.38	400	104	PEAK																																																																																																																																											
2	15780.00	48.35	74.00	-25.65	56.75	38.02	21.66	68.43	0.35	--	--	PEAK																																																																																																																																											
3	15780.00	39.15	54.00	-14.85	47.55	38.02	21.66	68.43	0.35	--	--	Average																																																																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																													
1	10520.00	56.00	68.20	-12.20	67.11	38.93	17.57	67.99	0.38	300	177	Peak																																																																																																																																											
2	15780.00	48.58	74.00	-25.42	56.98	38.02	21.66	68.43	0.35	--	--	PEAK																																																																																																																																											
3	15780.00	39.02	54.00	-14.98	47.42	38.02	21.66	68.43	0.35	--	--	Average																																																																																																																																											

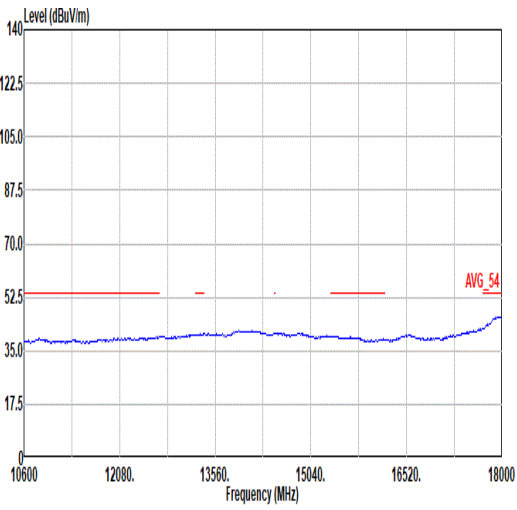
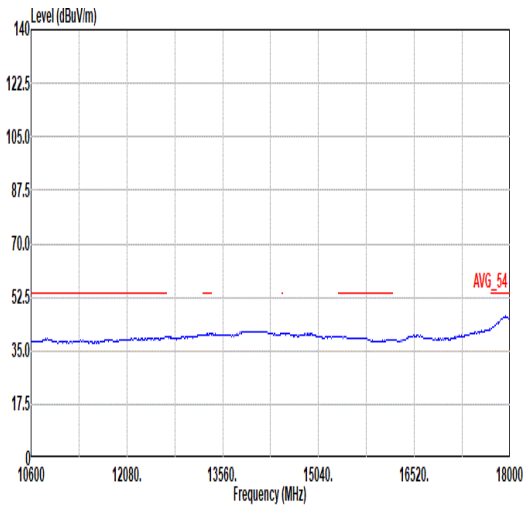


Mode	14	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11be EHT20_CH52_5260MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G -18G Avg	 Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL Mode : 14	 Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL Mode : 14

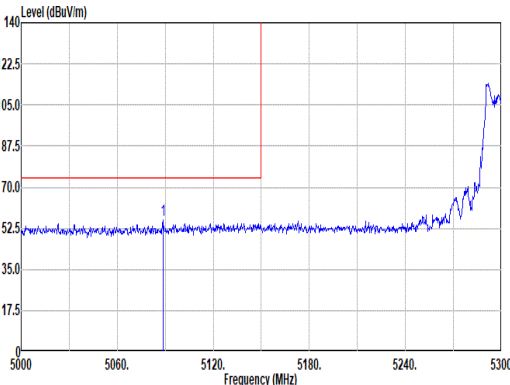
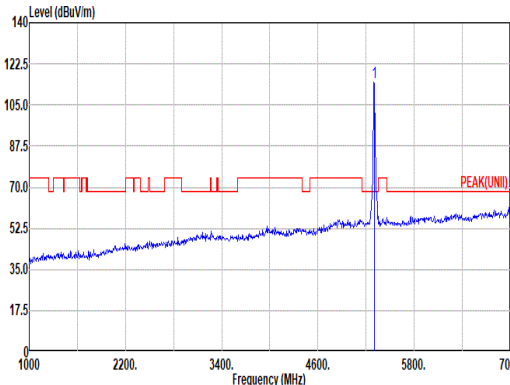
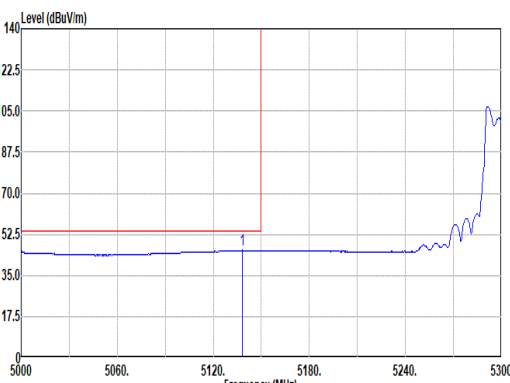
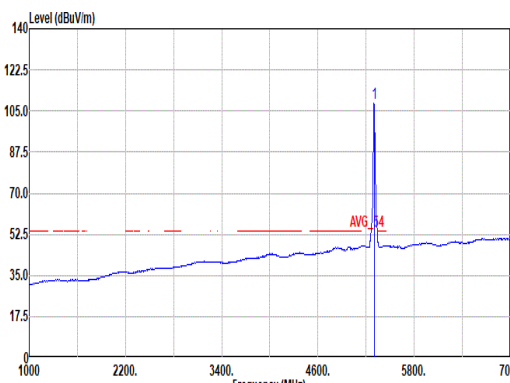


Mode	15																																																																																												
	Band Edge - L																																																																																												
	U-NII-2A_5.25-5.35_802.11be EHT20_CH60_5300MHz																																																																																												
ANT	D+B+C+A																																																																																												
Pol.	Horizontal					Fundamental																																																																																							
Peak																																																																																													
	Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5000.50</td><td>55.76</td><td>74.00 -18.24</td><td>40.59</td><td>33.17</td><td>11.91</td><td>29.91</td><td>0.00</td><td>269</td><td>360</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5000.50	55.76	74.00 -18.24	40.59	33.17	11.91	29.91	0.00	269	360	PEAK	Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5300.00</td><td>114.67</td><td>-----</td><td>99.30</td><td>33.00</td><td>12.27</td><td>29.90</td><td>0.00</td><td>269</td><td>360</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5300.00	114.67	-----	99.30	33.00	12.27	29.90	0.00	269	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1 5000.50	55.76	74.00 -18.24	40.59	33.17	11.91	29.91	0.00	269	360	PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1 5300.00	114.67	-----	99.30	33.00	12.27	29.90	0.00	269	360	PEAK																																																																																			
Avg																																																																																													
	Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5130.00</td><td>45.72</td><td>54.00 -8.28</td><td>30.51</td><td>33.11</td><td>12.02</td><td>29.92</td><td>0.00</td><td>269</td><td>360</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5130.00	45.72	54.00 -8.28	30.51	33.11	12.02	29.92	0.00	269	360	AVERAGE	Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5300.00</td><td>108.38</td><td>-----</td><td>93.01</td><td>33.00</td><td>12.27</td><td>29.90</td><td>0.00</td><td>269</td><td>360</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5300.00	108.38	-----	93.01	33.00	12.27	29.90	0.00	269	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1 5130.00	45.72	54.00 -8.28	30.51	33.11	12.02	29.92	0.00	269	360	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1 5300.00	108.38	-----	93.01	33.00	12.27	29.90	0.00	269	360	AVERAGE																																																																																			

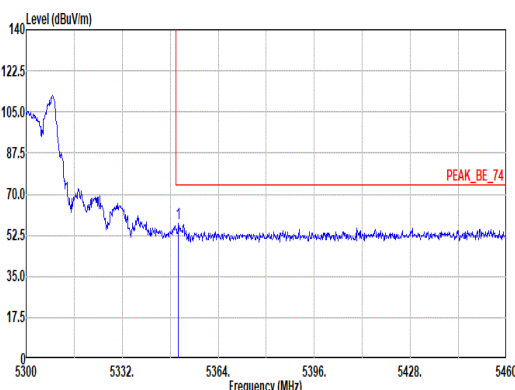
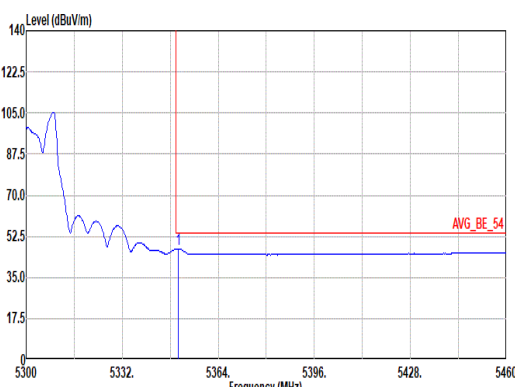


Mode	15																																					
	Band Edge - R																																					
	U-NII-2A_5.25-5.35_802.11be EHT20_CH60_5300MHz																																					
ANT	D+B+C+A																																					
Pol.	Horizontal	Fundamental																																				
Peak	 Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5350.72</td><td>57.63</td><td>74.00</td><td>-16.37</td><td>42.11</td><td>33.07</td><td>12.35</td><td>29.90</td><td>0.00</td><td>269</td><td>360</td><td>PEAK</td></tr></table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5350.72	57.63	74.00	-16.37	42.11	33.07	12.35	29.90	0.00	269	360	PEAK	Blank
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																												
1 5350.72	57.63	74.00	-16.37	42.11	33.07	12.35	29.90	0.00	269	360	PEAK																											
Avg	 Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5350.56</td><td>47.22</td><td>54.00</td><td>-6.78</td><td>31.70</td><td>33.07</td><td>12.35</td><td>29.90</td><td>0.00</td><td>269</td><td>360</td><td>AVERAGE</td></tr></table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5350.56	47.22	54.00	-6.78	31.70	33.07	12.35	29.90	0.00	269	360	AVERAGE	Blank
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																												
1 5350.56	47.22	54.00	-6.78	31.70	33.07	12.35	29.90	0.00	269	360	AVERAGE																											

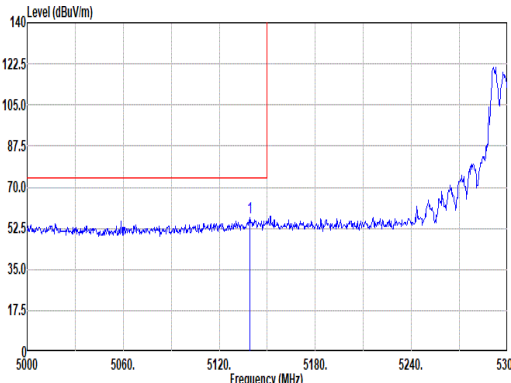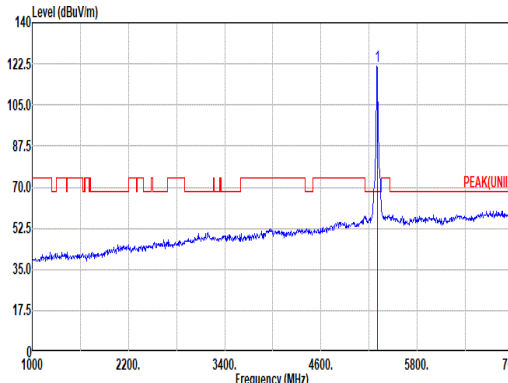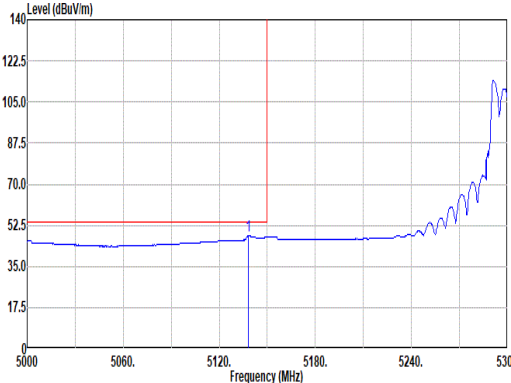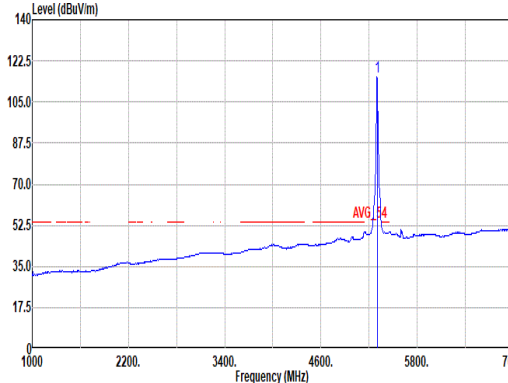

		15																																																																																											
Mode	Band Edge - L																																																																																												
	U-NII-2A_5.25-5.35_802.11be EHT20_CH60_5300MHz																																																																																												
ANT	D+B+C+A																																																																																												
Pol.	Vertical						Fundamental																																																																																						
Peak																																																																																													
	Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5139.20</td><td>56.91</td><td>74.00</td><td>-17.09</td><td>41.69</td><td>33.11</td><td>12.03</td><td>29.92</td><td>0.00</td><td>302</td><td>248</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5139.20	56.91	74.00	-17.09	41.69	33.11	12.03	29.92	0.00	302	248	PEAK	Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5300.00</td><td>121.73</td><td>-----</td><td>-----</td><td>106.36</td><td>33.00</td><td>12.27</td><td>29.90</td><td>0.00</td><td>302</td><td>248</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5300.00	121.73	-----	-----	106.36	33.00	12.27	29.90	0.00	302	248
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																
1	5139.20	56.91	74.00	-17.09	41.69	33.11	12.03	29.92	0.00	302	248	PEAK																																																																																	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																
1	5300.00	121.73	-----	-----	106.36	33.00	12.27	29.90	0.00	302	248	PEAK																																																																																	
Avg																																																																																													
	Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5138.30</td><td>47.88</td><td>54.00</td><td>-6.12</td><td>32.67</td><td>33.11</td><td>12.02</td><td>29.92</td><td>0.00</td><td>302</td><td>248</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5138.30	47.88	54.00	-6.12	32.67	33.11	12.02	29.92	0.00	302	248	AVERAGE	Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5300.00</td><td>115.55</td><td>-----</td><td>-----</td><td>100.18</td><td>33.00</td><td>12.27</td><td>29.90</td><td>0.00</td><td>302</td><td>248</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5300.00	115.55	-----	-----	100.18	33.00	12.27	29.90	0.00	302	248
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																
1	5138.30	47.88	54.00	-6.12	32.67	33.11	12.02	29.92	0.00	302	248	AVERAGE																																																																																	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																
1	5300.00	115.55	-----	-----	100.18	33.00	12.27	29.90	0.00	302	248	AVERAGE																																																																																	

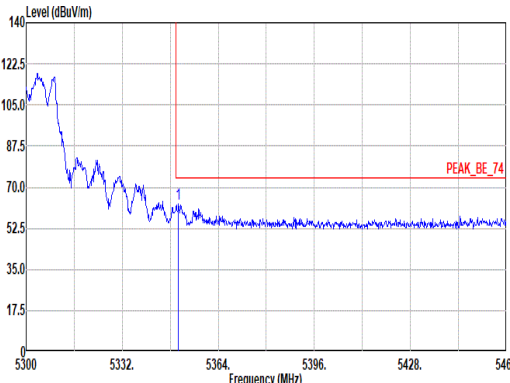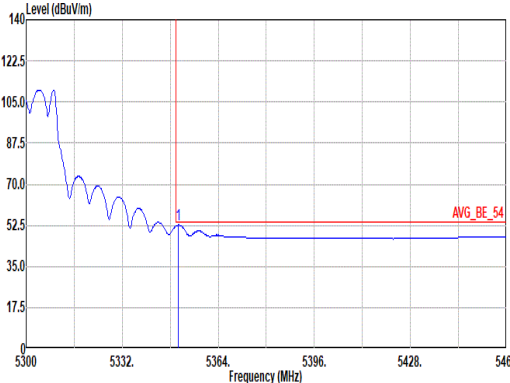

Mode	15																																																						
	Band Edge - R																																																						
	U-NII-2A_5.25-5.35_802.11be EHT20_CH60_5300MHz																																																						
ANT	D+B+C+A																																																						
Pol.	Vertical						Fundamental																																																
Peak	 Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5338.72</td><td>62.94</td><td>74.00</td><td>-11.06</td><td>47.42</td><td>33.07</td><td>12.35</td><td>29.90</td><td>0.00</td><td>302</td><td>248</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5338.72	62.94	74.00	-11.06	47.42	33.07	12.35	29.90	0.00	302	248	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5338.72	62.94	74.00	-11.06	47.42	33.07	12.35	29.90	0.00	302	248	PEAK																																											
Avg	 Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5338.72</td><td>52.65</td><td>54.00</td><td>-1.35</td><td>37.13</td><td>33.07</td><td>12.35</td><td>29.90</td><td>0.00</td><td>302</td><td>248</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5338.72	52.65	54.00	-1.35	37.13	33.07	12.35	29.90	0.00	302	248	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5338.72	52.65	54.00	-1.35	37.13	33.07	12.35	29.90	0.00	302	248	AVERAGE																																											