



Mode	15																																																																																																																																																													
	Harmonic																																																																																																																																																													
	U-NII-2A_5.25-5.35_802.11be EHT20_CH60_5300MHz																																																																																																																																																													
ANT	D+B+C+A																																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																																												
Peak Avg	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL Mode : 15</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>53.34</td> <td>74.00</td> <td>-20.66</td> <td>64.10</td> <td>39.04</td> <td>17.64</td> <td>67.81</td> <td>0.37</td> <td>300</td> <td>150</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>10600.00</td> <td>42.82</td> <td>54.00</td> <td>-11.18</td> <td>53.58</td> <td>39.04</td> <td>17.64</td> <td>67.81</td> <td>0.37</td> <td>300</td> <td>150</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15900.00</td> <td>47.25</td> <td>74.00</td> <td>-26.75</td> <td>55.31</td> <td>37.89</td> <td>21.74</td> <td>68.05</td> <td>0.36</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>15900.00</td> <td>37.60</td> <td>54.00</td> <td>-16.40</td> <td>45.66</td> <td>37.89</td> <td>21.74</td> <td>68.05</td> <td>0.36</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	10600.00	53.34	74.00	-20.66	64.10	39.04	17.64	67.81	0.37	300	150	PEAK	2	10600.00	42.82	54.00	-11.18	53.58	39.04	17.64	67.81	0.37	300	150	Average	3	15900.00	47.25	74.00	-26.75	55.31	37.89	21.74	68.05	0.36	--	--	PEAK	4	15900.00	37.60	54.00	-16.40	45.66	37.89	21.74	68.05	0.36	--	--	Average	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL Mode : 15</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>52.60</td> <td>74.00</td> <td>-21.40</td> <td>63.36</td> <td>39.04</td> <td>17.64</td> <td>67.81</td> <td>0.37</td> <td>315</td> <td>179</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>10600.00</td> <td>41.99</td> <td>54.00</td> <td>-12.01</td> <td>52.75</td> <td>39.04</td> <td>17.64</td> <td>67.81</td> <td>0.37</td> <td>315</td> <td>179</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15900.00</td> <td>48.33</td> <td>74.00</td> <td>-25.67</td> <td>56.39</td> <td>37.89</td> <td>21.74</td> <td>68.05</td> <td>0.36</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>15900.00</td> <td>38.99</td> <td>54.00</td> <td>-15.01</td> <td>47.05</td> <td>37.89</td> <td>21.74</td> <td>68.05</td> <td>0.36</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	10600.00	52.60	74.00	-21.40	63.36	39.04	17.64	67.81	0.37	315	179	PEAK	2	10600.00	41.99	54.00	-12.01	52.75	39.04	17.64	67.81	0.37	315	179	Average	3	15900.00	48.33	74.00	-25.67	56.39	37.89	21.74	68.05	0.36	--	--	PEAK	4	15900.00	38.99	54.00	-15.01	47.05	37.89	21.74	68.05	0.36	--	--	Average
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																																																		
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	10600.00	53.34	74.00	-20.66	64.10	39.04	17.64	67.81	0.37	300	150	PEAK																																																																																																																																																		
2	10600.00	42.82	54.00	-11.18	53.58	39.04	17.64	67.81	0.37	300	150	Average																																																																																																																																																		
3	15900.00	47.25	74.00	-26.75	55.31	37.89	21.74	68.05	0.36	--	--	PEAK																																																																																																																																																		
4	15900.00	37.60	54.00	-16.40	45.66	37.89	21.74	68.05	0.36	--	--	Average																																																																																																																																																		
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																																																		
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	10600.00	52.60	74.00	-21.40	63.36	39.04	17.64	67.81	0.37	315	179	PEAK																																																																																																																																																		
2	10600.00	41.99	54.00	-12.01	52.75	39.04	17.64	67.81	0.37	315	179	Average																																																																																																																																																		
3	15900.00	48.33	74.00	-25.67	56.39	37.89	21.74	68.05	0.36	--	--	PEAK																																																																																																																																																		
4	15900.00	38.99	54.00	-15.01	47.05	37.89	21.74	68.05	0.36	--	--	Average																																																																																																																																																		



Mode	15	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11be EHT20_CH60_5300MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL Mode : 15</p>	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL Mode : 15</p>



Mode	16																																																																									
	Band Edge																																																																									
	U-NII-2A_5.25-5.35_802.11be EHT20_CH64_5320MHz																																																																									
ANT	D+B+C+A																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5350.66 50.51 74.00 -15.49</td> <td>42.99 33.07</td> <td>12.35</td> <td>29.90</td> <td>0.00</td> <td>251</td> <td>0</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor		MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	dB	cm deg		1 5350.66 50.51 74.00 -15.49	42.99 33.07	12.35	29.90	0.00	251	0	0	PEAK	<p>Site : 03CH02-CA Condition: PEAK(UNI)I 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5320.00 113.95 -----</td> <td>98.52 33.03</td> <td>12.30</td> <td>29.90</td> <td>0.00</td> <td>251</td> <td>0</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor		MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	dB	cm deg		1 5320.00 113.95 -----	98.52 33.03	12.30	29.90	0.00	251	0	0	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
Freq Level Line Margin	Level Factor	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor																																																																			
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	dB	cm deg																																																																			
1 5350.66 50.51 74.00 -15.49	42.99 33.07	12.35	29.90	0.00	251	0	0	PEAK																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor																																																																			
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	dB	cm deg																																																																			
1 5320.00 113.95 -----	98.52 33.03	12.30	29.90	0.00	251	0	0	PEAK																																																																		
Avg	<p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5350.38 49.15 54.00 -4.85</td> <td>33.63 33.07</td> <td>12.35</td> <td>29.90</td> <td>0.00</td> <td>251</td> <td>0</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor		MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	dB	cm deg		1 5350.38 49.15 54.00 -4.85	33.63 33.07	12.35	29.90	0.00	251	0	0	AVERAGE	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5320.00 106.29 -----</td> <td>98.86 33.03</td> <td>12.30</td> <td>29.90</td> <td>0.00</td> <td>251</td> <td>0</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor		MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	dB	cm deg		1 5320.00 106.29 -----	98.86 33.03	12.30	29.90	0.00	251	0	0	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
Freq Level Line Margin	Level Factor	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor																																																																			
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	dB	cm deg																																																																			
1 5350.38 49.15 54.00 -4.85	33.63 33.07	12.35	29.90	0.00	251	0	0	AVERAGE																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor																																																																			
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	dB	cm deg																																																																			
1 5320.00 106.29 -----	98.86 33.03	12.30	29.90	0.00	251	0	0	AVERAGE																																																																		



Mode	16																																																																									
	Band Edge																																																																									
	U-NII-2A_5.25-5.35_802.11be EHT20_CH64_5320MHz																																																																									
ANT	D+B+C+A																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.36</td> <td>62.55</td> <td>74.00</td> <td>-11.45</td> <td>47.03</td> <td>33.07</td> <td>12.35</td> <td>29.90</td> <td>0.00</td> <td>300</td> <td>256 PEAK</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5351.36	62.55	74.00	-11.45	47.03	33.07	12.35	29.90	0.00	300	256 PEAK	<p>Site : 03CH02-CA Condition: PEAK(UNI)I 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>118.90</td> <td>-----</td> <td>103.47</td> <td>33.03</td> <td>12.30</td> <td>29.90</td> <td>0.00</td> <td>300</td> <td>256</td> <td>PEAK</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5320.00	118.90	-----	103.47	33.03	12.30	29.90	0.00	300	256	PEAK
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																
1	5351.36	62.55	74.00	-11.45	47.03	33.07	12.35	29.90	0.00	300	256 PEAK																																																															
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																
1	5320.00	118.90	-----	103.47	33.03	12.30	29.90	0.00	300	256	PEAK																																																															
Avg	<p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.22</td> <td>53.38</td> <td>54.00</td> <td>-0.62</td> <td>37.06</td> <td>33.07</td> <td>12.35</td> <td>29.90</td> <td>0.00</td> <td>300</td> <td>256 AVERAGE</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5351.22	53.38	54.00	-0.62	37.06	33.07	12.35	29.90	0.00	300	256 AVERAGE	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>112.79</td> <td>-----</td> <td>97.36</td> <td>33.03</td> <td>12.30</td> <td>29.90</td> <td>0.00</td> <td>300</td> <td>256</td> <td>AVERAGE</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5320.00	112.79	-----	97.36	33.03	12.30	29.90	0.00	300	256	AVERAGE
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																
1	5351.22	53.38	54.00	-0.62	37.06	33.07	12.35	29.90	0.00	300	256 AVERAGE																																																															
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																
1	5320.00	112.79	-----	97.36	33.03	12.30	29.90	0.00	300	256	AVERAGE																																																															







Mode	16																																																																																																																																			
	Harmonic																																																																																																																																			
	U-NII-2A_5.25-5.35_802.11be EHT20_CH64_5320MHz																																																																																																																																			
ANT	D+B+C+A																																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																																		
Peak Avg	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL Mode : 16</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>46.66</td> <td>74.00</td> <td>-27.34</td> <td>57.40</td> <td>39.16</td> <td>17.68</td> <td>67.95</td> <td>0.37</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>46.56</td> <td>74.00</td> <td>-27.44</td> <td>54.21</td> <td>37.85</td> <td>21.78</td> <td>67.65</td> <td>0.37</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>36.93</td> <td>54.00</td> <td>-17.07</td> <td>44.58</td> <td>37.85</td> <td>21.78</td> <td>67.65</td> <td>0.37</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	10640.00	46.66	74.00	-27.34	57.40	39.16	17.68	67.95	0.37	--	--	PEAK	2	15960.00	46.56	74.00	-27.44	54.21	37.85	21.78	67.65	0.37	--	--	PEAK	3	15960.00	36.93	54.00	-17.07	44.58	37.85	21.78	67.65	0.37	--	--	Average	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL Mode : 16</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>47.38</td> <td>74.00</td> <td>-26.62</td> <td>58.12</td> <td>39.16</td> <td>17.68</td> <td>67.95</td> <td>0.37</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>47.65</td> <td>74.00</td> <td>-26.35</td> <td>55.30</td> <td>37.85</td> <td>21.78</td> <td>67.65</td> <td>0.37</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>38.11</td> <td>54.00</td> <td>-15.89</td> <td>45.76</td> <td>37.85</td> <td>21.78</td> <td>67.65</td> <td>0.37</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	10640.00	47.38	74.00	-26.62	58.12	39.16	17.68	67.95	0.37	--	--	PEAK	2	15960.00	47.65	74.00	-26.35	55.30	37.85	21.78	67.65	0.37	--	--	PEAK	3	15960.00	38.11	54.00	-15.89	45.76	37.85	21.78	67.65	0.37	--	--	Average
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																									
1	10640.00	46.66	74.00	-27.34	57.40	39.16	17.68	67.95	0.37	--	--	PEAK																																																																																																																								
2	15960.00	46.56	74.00	-27.44	54.21	37.85	21.78	67.65	0.37	--	--	PEAK																																																																																																																								
3	15960.00	36.93	54.00	-17.07	44.58	37.85	21.78	67.65	0.37	--	--	Average																																																																																																																								
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																									
1	10640.00	47.38	74.00	-26.62	58.12	39.16	17.68	67.95	0.37	--	--	PEAK																																																																																																																								
2	15960.00	47.65	74.00	-26.35	55.30	37.85	21.78	67.65	0.37	--	--	PEAK																																																																																																																								
3	15960.00	38.11	54.00	-15.89	45.76	37.85	21.78	67.65	0.37	--	--	Average																																																																																																																								



Mode	16	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11be EHT20_CH64_5320MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL Mode : 16</p>	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL Mode : 16</p>

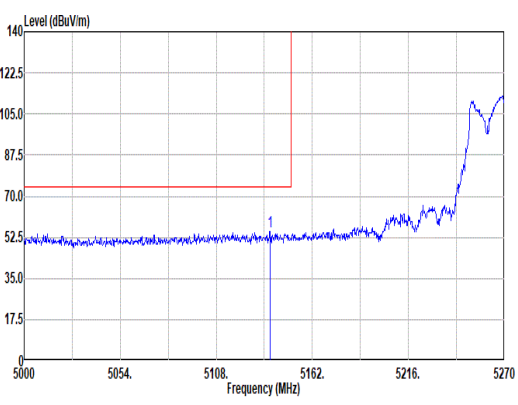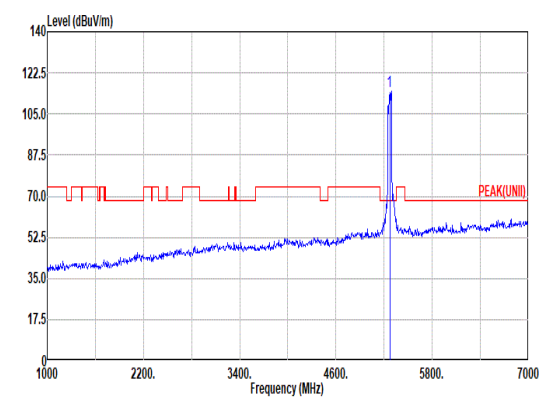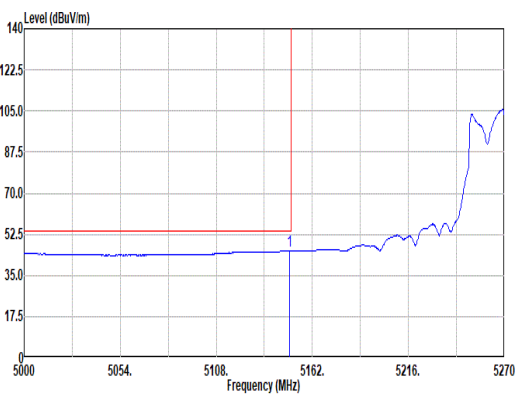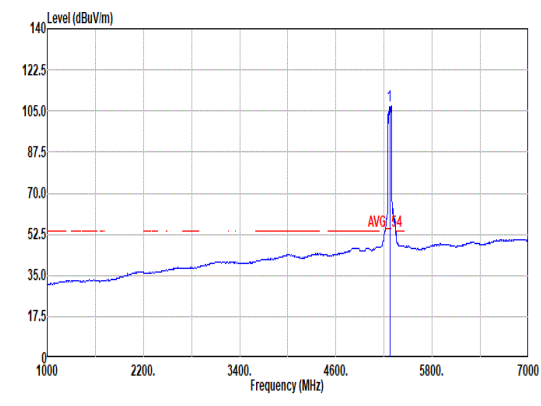

Mode	17																																																																															
	Band Edge - L																																																																															
	U-NII-2A_5.25-5.35_802.11be EHT40_CH54_5270MHz																																																																															
ANT	D+B+C+A																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	 <p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5138.24</td> <td>54.89</td> <td>74.00</td> <td>-19.11</td> <td>39.68</td> <td>33.11</td> <td>12.02</td> <td>29.92</td> <td>0.00</td> <td>328</td> <td>55</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5138.24	54.89	74.00	-19.11	39.68	33.11	12.02	29.92	0.00	328	55	PEAK	 <p>Site : 03CH02-CA Condition: PEAK(UNI) 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>114.89</td> <td>-----</td> <td>-----</td> <td>99.52</td> <td>33.00</td> <td>12.27</td> <td>29.90</td> <td>0.00</td> <td>328</td> <td>55</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5270.00	114.89	-----	-----	99.52	33.00	12.27	29.90	0.00	328	55	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5138.24	54.89	74.00	-19.11	39.68	33.11	12.02	29.92	0.00	328	55	PEAK																																																																				
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5270.00	114.89	-----	-----	99.52	33.00	12.27	29.90	0.00	328	55	PEAK																																																																				
Avg	 <p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.31</td> <td>45.33</td> <td>54.00</td> <td>-8.67</td> <td>30.11</td> <td>33.09</td> <td>12.05</td> <td>29.92</td> <td>0.00</td> <td>328</td> <td>55</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5149.31	45.33	54.00	-8.67	30.11	33.09	12.05	29.92	0.00	328	55	AVERAGE	 <p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>107.45</td> <td>-----</td> <td>-----</td> <td>92.08</td> <td>33.00</td> <td>12.27</td> <td>29.90</td> <td>0.00</td> <td>328</td> <td>55</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5270.00	107.45	-----	-----	92.08	33.00	12.27	29.90	0.00	328	55	AVERAGE
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5149.31	45.33	54.00	-8.67	30.11	33.09	12.05	29.92	0.00	328	55	AVERAGE																																																																				
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5270.00	107.45	-----	-----	92.08	33.00	12.27	29.90	0.00	328	55	AVERAGE																																																																				





Mode	17																																					
	Band Edge - R																																					
	U-NII-2A_5.25-5.35_802.11be EHT40_CH54_5270MHz																																					
ANT	D+B+C+A																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5350.75</td> <td>58.43</td> <td>74.00</td> <td>-15.57</td> <td>42.91</td> <td>33.07</td> <td>12.35</td> <td>29.90</td> <td>0.00</td> <td>328</td> <td>55</td> <td>PEAK</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5350.75	58.43	74.00	-15.57	42.91	33.07	12.35	29.90	0.00	328	55	PEAK	Blank
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																												
1 5350.75	58.43	74.00	-15.57	42.91	33.07	12.35	29.90	0.00	328	55	PEAK																											
Avg	<p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5350.18</td> <td>50.40</td> <td>54.00</td> <td>-3.60</td> <td>34.88</td> <td>33.07</td> <td>12.35</td> <td>29.90</td> <td>0.00</td> <td>328</td> <td>55</td> <td>AVERAGE</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5350.18	50.40	54.00	-3.60	34.88	33.07	12.35	29.90	0.00	328	55	AVERAGE	Blank
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																												
1 5350.18	50.40	54.00	-3.60	34.88	33.07	12.35	29.90	0.00	328	55	AVERAGE																											



Mode	17																																																																															
	Band Edge - L																																																																															
	U-NII-2A_5.25-5.35_802.11be EHT40_CH54_5270MHz																																																																															
ANT	D+B+C+A																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.04</td> <td>56.68</td> <td>74.00</td> <td>-17.32</td> <td>41.46</td> <td>33.09</td> <td>12.05</td> <td>29.92</td> <td>0.00</td> <td>300</td> <td>247</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5149.04	56.68	74.00	-17.32	41.46	33.09	12.05	29.92	0.00	300	247	PEAK	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>118.73</td> <td>-----</td> <td>-----</td> <td>103.41</td> <td>32.97</td> <td>12.23</td> <td>29.88</td> <td>0.00</td> <td>300</td> <td>247</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5270.00	118.73	-----	-----	103.41	32.97	12.23	29.88	0.00	300	247	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5149.04	56.68	74.00	-17.32	41.46	33.09	12.05	29.92	0.00	300	247	PEAK																																																																				
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5270.00	118.73	-----	-----	103.41	32.97	12.23	29.88	0.00	300	247	PEAK																																																																				
Avg	<p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.77</td> <td>47.75</td> <td>54.00</td> <td>-6.25</td> <td>32.53</td> <td>33.09</td> <td>12.05</td> <td>29.92</td> <td>0.00</td> <td>300</td> <td>247</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5148.77	47.75	54.00	-6.25	32.53	33.09	12.05	29.92	0.00	300	247	AVERAGE	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>112.67</td> <td>-----</td> <td>-----</td> <td>97.30</td> <td>32.99</td> <td>12.27</td> <td>29.89</td> <td>0.00</td> <td>300</td> <td>247</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5270.00	112.67	-----	-----	97.30	32.99	12.27	29.89	0.00	300	247	AVERAGE
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5148.77	47.75	54.00	-6.25	32.53	33.09	12.05	29.92	0.00	300	247	AVERAGE																																																																				
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5270.00	112.67	-----	-----	97.30	32.99	12.27	29.89	0.00	300	247	AVERAGE																																																																				

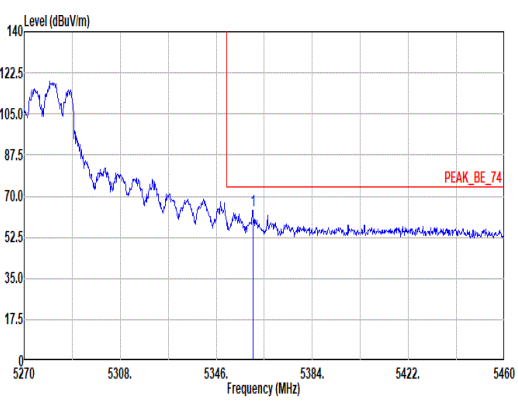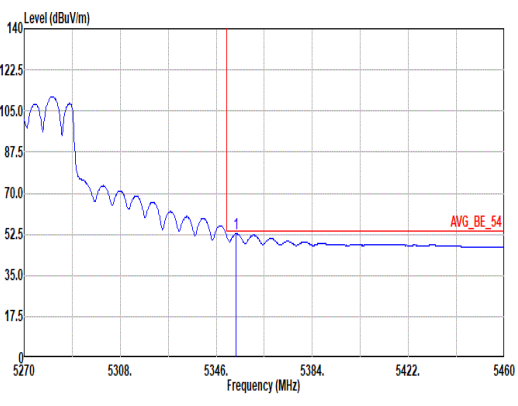

Mode	17																																									
	Band Edge - R																																									
	U-NII-2A_5.25-5.35_802.11be EHT40_CH54_5270MHz																																									
ANT	D+B+C+A																																									
Pol.	Vertical	Fundamental																																								
Peak	 <p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5360.44</td> <td>64.00</td> <td>74.00</td> <td>-9.92</td> <td>48.55</td> <td>33.07</td> <td>12.36</td> <td>29.90</td> <td>0.00</td> <td>300</td> <td>247</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5360.44	64.00	74.00	-9.92	48.55	33.07	12.36	29.90	0.00	300	247	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																		
1	5360.44	64.00	74.00	-9.92	48.55	33.07	12.36	29.90	0.00	300	247	PEAK																														
Avg	 <p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.79</td> <td>52.76</td> <td>54.00</td> <td>-1.24</td> <td>37.24</td> <td>33.07</td> <td>12.35</td> <td>29.90</td> <td>0.00</td> <td>300</td> <td>247</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5353.79	52.76	54.00	-1.24	37.24	33.07	12.35	29.90	0.00	300	247	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																		
1	5353.79	52.76	54.00	-1.24	37.24	33.07	12.35	29.90	0.00	300	247	AVERAGE																														



Mode	17																																																																																																																																					
	Harmonic																																																																																																																																					
	U-NII-2A_5.25-5.35_802.11be EHT40_CH54_5270MHz																																																																																																																																					
ANT	D+B+C+A																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak Avg	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL Mode : 17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10540.00</td> <td>47.50</td> <td>68.20</td> <td>-20.70</td> <td>58.44</td> <td>38.97</td> <td>17.59</td> <td>67.88</td> <td>0.38</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15810.00</td> <td>48.18</td> <td>74.00</td> <td>-25.82</td> <td>56.72</td> <td>37.98</td> <td>21.68</td> <td>68.56</td> <td>0.36</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15810.00</td> <td>38.64</td> <td>54.00</td> <td>-15.36</td> <td>47.18</td> <td>37.98</td> <td>21.68</td> <td>68.56</td> <td>0.36</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	10540.00	47.50	68.20	-20.70	58.44	38.97	17.59	67.88	0.38	--	--	PEAK	2	15810.00	48.18	74.00	-25.82	56.72	37.98	21.68	68.56	0.36	--	--	PEAK	3	15810.00	38.64	54.00	-15.36	47.18	37.98	21.68	68.56	0.36	--	--	Average	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL Mode : 17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10540.00</td> <td>47.04</td> <td>68.20</td> <td>-21.16</td> <td>57.98</td> <td>38.97</td> <td>17.59</td> <td>67.88</td> <td>0.38</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15810.00</td> <td>48.57</td> <td>74.00</td> <td>-25.43</td> <td>57.11</td> <td>37.98</td> <td>21.68</td> <td>68.56</td> <td>0.36</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15810.00</td> <td>39.36</td> <td>54.00</td> <td>-14.64</td> <td>47.90</td> <td>37.98</td> <td>21.68</td> <td>68.56</td> <td>0.36</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	10540.00	47.04	68.20	-21.16	57.98	38.97	17.59	67.88	0.38	--	--	PEAK	2	15810.00	48.57	74.00	-25.43	57.11	37.98	21.68	68.56	0.36	--	--	PEAK	3	15810.00	39.36	54.00	-14.64	47.90	37.98	21.68	68.56	0.36	--	--	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	10540.00	47.50	68.20	-20.70	58.44	38.97	17.59	67.88	0.38	--	--	PEAK																																																																																																																										
2	15810.00	48.18	74.00	-25.82	56.72	37.98	21.68	68.56	0.36	--	--	PEAK																																																																																																																										
3	15810.00	38.64	54.00	-15.36	47.18	37.98	21.68	68.56	0.36	--	--	Average																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	10540.00	47.04	68.20	-21.16	57.98	38.97	17.59	67.88	0.38	--	--	PEAK																																																																																																																										
2	15810.00	48.57	74.00	-25.43	57.11	37.98	21.68	68.56	0.36	--	--	PEAK																																																																																																																										
3	15810.00	39.36	54.00	-14.64	47.90	37.98	21.68	68.56	0.36	--	--	Average																																																																																																																										





Mode	17	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11be EHT40_CH54_5270MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL Mode : 17</p>	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL Mode : 17</p>



Mode	18																																																																															
	Band Edge - L																																																																															
	U-NII-2A_5.25-5.35_802.11be EHT40_CH62_5310MHz																																																																															
ANT	D+B+C+A																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5139.19</td> <td>54.75</td> <td>74.00</td> <td>-19.25</td> <td>39.53</td> <td>33.11</td> <td>12.03</td> <td>29.92</td> <td>0.00</td> <td>317</td> <td>52</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5139.19	54.75	74.00	-19.25	39.53	33.11	12.03	29.92	0.00	317	52	PEAK	<p>Site : 03CH02-CA Condition: PEAK(UNI) 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>110.61</td> <td>-----</td> <td>-----</td> <td>95.19</td> <td>33.02</td> <td>12.30</td> <td>29.90</td> <td>0.00</td> <td>317</td> <td>52</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5310.00	110.61	-----	-----	95.19	33.02	12.30	29.90	0.00	317	52	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5139.19	54.75	74.00	-19.25	39.53	33.11	12.03	29.92	0.00	317	52	PEAK																																																																				
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5310.00	110.61	-----	-----	95.19	33.02	12.30	29.90	0.00	317	52	PEAK																																																																				
Avg	<p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.73</td> <td>45.01</td> <td>54.00</td> <td>-8.99</td> <td>29.79</td> <td>33.09</td> <td>12.05</td> <td>29.92</td> <td>0.00</td> <td>317</td> <td>52</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5149.73	45.01	54.00	-8.99	29.79	33.09	12.05	29.92	0.00	317	52	AVERAGE	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>103.59</td> <td>-----</td> <td>-----</td> <td>88.13</td> <td>33.04</td> <td>12.32</td> <td>29.90</td> <td>0.00</td> <td>317</td> <td>52</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5310.00	103.59	-----	-----	88.13	33.04	12.32	29.90	0.00	317	52	AVERAGE
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5149.73	45.01	54.00	-8.99	29.79	33.09	12.05	29.92	0.00	317	52	AVERAGE																																																																				
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5310.00	103.59	-----	-----	88.13	33.04	12.32	29.90	0.00	317	52	AVERAGE																																																																				

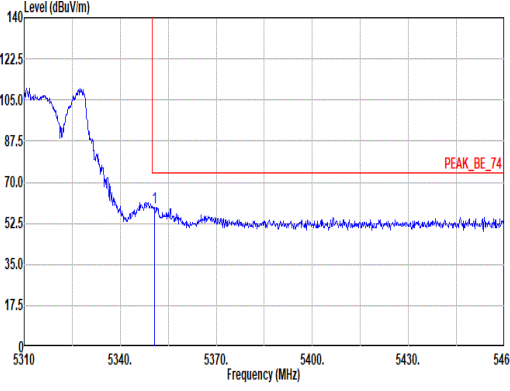
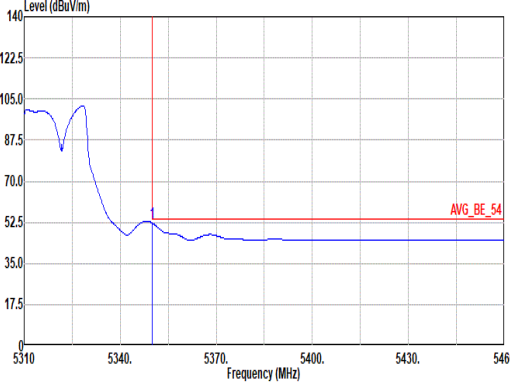


Mode	18																																								
	Band Edge - R																																								
	U-NII-2A_5.25-5.35_802.11be EHT40_CH62_5310MHz																																								
ANT	D+B+C+A																																								
Pol.	Horizontal	Fundamental																																							
Peak	 <p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1" data-bbox="279 1086 790 1187"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5350.00</td> <td>59.40</td> <td>74.00</td> <td>-14.60</td> <td>43.88</td> <td>33.07</td> <td>12.35</td> <td>29.90</td> <td>0.00</td> <td>317</td> <td>52 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5350.00	59.40	74.00	-14.60	43.88	33.07	12.35	29.90	0.00	317	52 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5350.00	59.40	74.00	-14.60	43.88	33.07	12.35	29.90	0.00	317	52 PEAK																															
Avg	 <p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1" data-bbox="279 1758 790 1859"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5350.05</td> <td>52.14</td> <td>54.00</td> <td>-1.86</td> <td>36.62</td> <td>33.07</td> <td>12.35</td> <td>29.90</td> <td>0.00</td> <td>317</td> <td>52 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5350.05	52.14	54.00	-1.86	36.62	33.07	12.35	29.90	0.00	317	52 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5350.05	52.14	54.00	-1.86	36.62	33.07	12.35	29.90	0.00	317	52 AVERAGE																															



Mode	18																																																																															
	Band Edge - L																																																																															
	U-NII-2A_5.25-5.35_802.11be EHT40_CH62_5310MHz																																																																															
ANT	D+B+C+A																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5135.70</td> <td>55.41</td> <td>74.00</td> <td>-18.59</td> <td>40.19</td> <td>33.12</td> <td>12.02</td> <td>29.92</td> <td>0.00</td> <td>300</td> <td>291</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5135.70	55.41	74.00	-18.59	40.19	33.12	12.02	29.92	0.00	300	291	PEAK	<p>Site : 03CH02-CA Condition: PEAK(UNI) 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>111.94</td> <td>-----</td> <td>-----</td> <td>96.52</td> <td>33.02</td> <td>12.30</td> <td>29.90</td> <td>0.00</td> <td>300</td> <td>291</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5310.00	111.94	-----	-----	96.52	33.02	12.30	29.90	0.00	300	291	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5135.70	55.41	74.00	-18.59	40.19	33.12	12.02	29.92	0.00	300	291	PEAK																																																																				
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5310.00	111.94	-----	-----	96.52	33.02	12.30	29.90	0.00	300	291	PEAK																																																																				
Avg	<p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.73</td> <td>45.38</td> <td>54.00</td> <td>-8.62</td> <td>30.16</td> <td>33.09</td> <td>12.05</td> <td>29.92</td> <td>0.00</td> <td>300</td> <td>291</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5149.73	45.38	54.00	-8.62	30.16	33.09	12.05	29.92	0.00	300	291	AVERAGE	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>105.94</td> <td>-----</td> <td>-----</td> <td>90.52</td> <td>33.02</td> <td>12.30</td> <td>29.90</td> <td>0.00</td> <td>300</td> <td>291</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5310.00	105.94	-----	-----	90.52	33.02	12.30	29.90	0.00	300	291	AVERAGE
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5149.73	45.38	54.00	-8.62	30.16	33.09	12.05	29.92	0.00	300	291	AVERAGE																																																																				
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5310.00	105.94	-----	-----	90.52	33.02	12.30	29.90	0.00	300	291	AVERAGE																																																																				

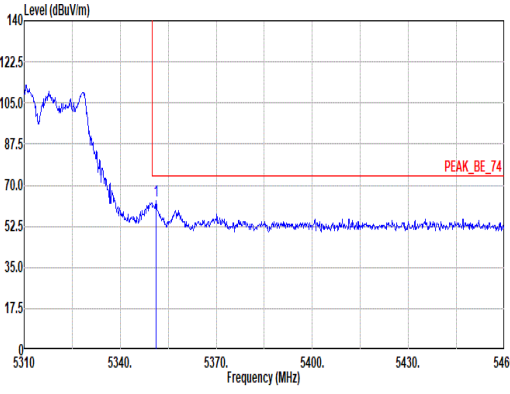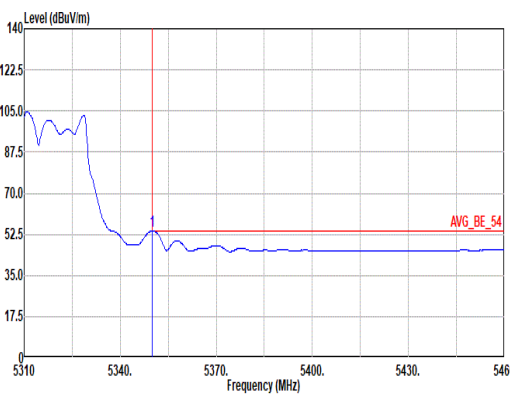

Mode	18																																					
	Band Edge - R																																					
	U-NII-2A_5.25-5.35_802.11be EHT40_CH62_5310MHz																																					
ANT	D+B+C+A																																					
Pol.	Vertical	Fundamental																																				
Peak	 <p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1" data-bbox="279 1086 790 1187"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5351.10</td> <td>63.58</td> <td>74.00</td> <td>-10.42</td> <td>48.06</td> <td>33.07</td> <td>12.35</td> <td>29.90</td> <td>0.00</td> <td>300</td> <td>291</td> <td>PEAK</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5351.10	63.58	74.00	-10.42	48.06	33.07	12.35	29.90	0.00	300	291	PEAK	Blank
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																												
1 5351.10	63.58	74.00	-10.42	48.06	33.07	12.35	29.90	0.00	300	291	PEAK																											
Avg	 <p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1" data-bbox="279 1758 790 1859"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5350.05</td> <td>53.97</td> <td>54.00</td> <td>-0.03</td> <td>38.45</td> <td>33.07</td> <td>12.35</td> <td>29.90</td> <td>0.00</td> <td>300</td> <td>291</td> <td>AVERAGE</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5350.05	53.97	54.00	-0.03	38.45	33.07	12.35	29.90	0.00	300	291	AVERAGE	Blank
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																												
1 5350.05	53.97	54.00	-0.03	38.45	33.07	12.35	29.90	0.00	300	291	AVERAGE																											







Mode	18																																																																																																																					
	Harmonic																																																																																																																					
	U-NII-2A_5.25-5.35_802.11be EHT40_CH62_5310MHz																																																																																																																					
ANT	D+B+C+A																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																				
Peak Avg	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL Mode : 18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10620.00</td> <td>47.88</td> <td>74.00</td> <td>-26.12</td> <td>58.63</td> <td>39.10</td> <td>17.66</td> <td>67.88</td> <td>0.37</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15930.00</td> <td>47.54</td> <td>74.00</td> <td>-26.46</td> <td>55.39</td> <td>37.87</td> <td>21.76</td> <td>67.85</td> <td>0.37</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10620.00	47.88	74.00	-26.12	58.63	39.10	17.66	67.88	0.37	--	PEAK	2	15930.00	47.54	74.00	-26.46	55.39	37.87	21.76	67.85	0.37	--	PEAK	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL Mode : 18</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10620.00</td> <td>48.70</td> <td>74.00</td> <td>-25.30</td> <td>59.45</td> <td>39.10</td> <td>17.66</td> <td>67.88</td> <td>0.37</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>10620.00</td> <td>38.92</td> <td>54.00</td> <td>-15.08</td> <td>49.67</td> <td>39.10</td> <td>17.66</td> <td>67.88</td> <td>0.37</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15930.00</td> <td>47.79</td> <td>74.00</td> <td>-26.21</td> <td>55.64</td> <td>37.87</td> <td>21.76</td> <td>67.85</td> <td>0.37</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10620.00	48.70	74.00	-25.30	59.45	39.10	17.66	67.88	0.37	--	PEAK	2	10620.00	38.92	54.00	-15.08	49.67	39.10	17.66	67.88	0.37	--	Average	3	15930.00	47.79	74.00	-26.21	55.64	37.87	21.76	67.85	0.37	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	10620.00	47.88	74.00	-26.12	58.63	39.10	17.66	67.88	0.37	--	PEAK																																																																																																											
2	15930.00	47.54	74.00	-26.46	55.39	37.87	21.76	67.85	0.37	--	PEAK																																																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	10620.00	48.70	74.00	-25.30	59.45	39.10	17.66	67.88	0.37	--	PEAK																																																																																																											
2	10620.00	38.92	54.00	-15.08	49.67	39.10	17.66	67.88	0.37	--	Average																																																																																																											
3	15930.00	47.79	74.00	-26.21	55.64	37.87	21.76	67.85	0.37	--	PEAK																																																																																																											





Mode	18	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11be EHT40_CH62_5310MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL Mode : 18</p>	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL Mode : 18</p>

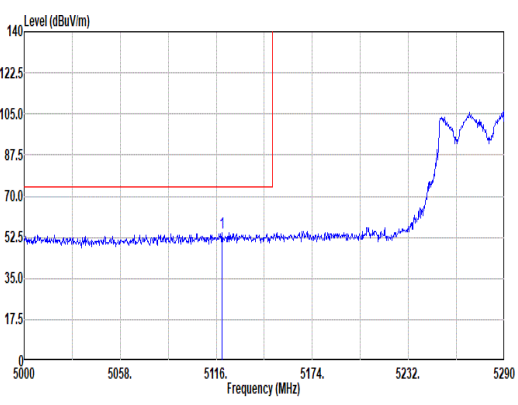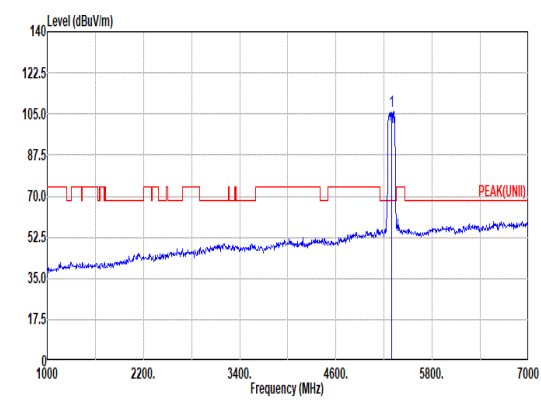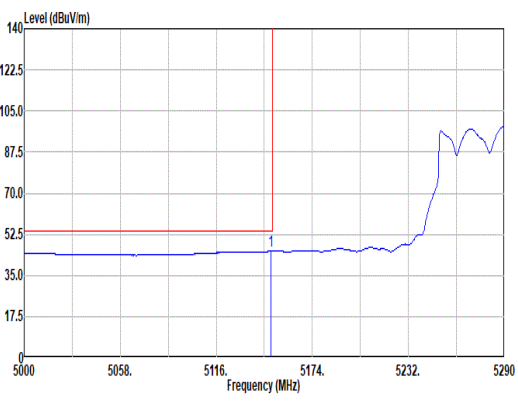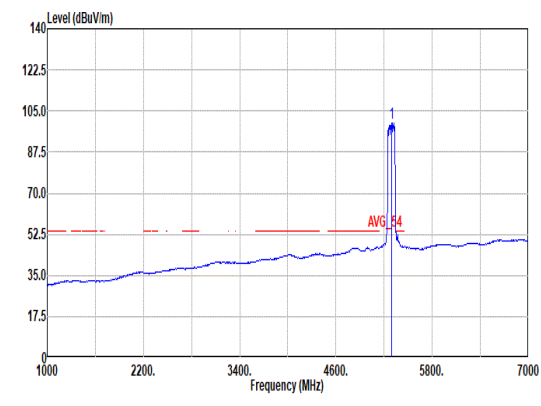

Mode	19																																																																															
	Band Edge - L																																																																															
	U-NII-2A_5.25-5.35_802.11be EHT80_CH58_5290MHz																																																																															
ANT	D+B+C+A																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	 <p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5119.40</td> <td>54.53</td> <td>74.00</td> <td>-19.47</td> <td>39.32</td> <td>33.14</td> <td>11.98</td> <td>29.91</td> <td>0.00</td> <td>339</td> <td>52</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5119.40	54.53	74.00	-19.47	39.32	33.14	11.98	29.91	0.00	339	52	PEAK	 <p>Site : 03CH02-CA Condition: PEAK(UNI) 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>106.06</td> <td>-----</td> <td>-----</td> <td>90.60</td> <td>33.04</td> <td>12.32</td> <td>29.90</td> <td>0.00</td> <td>339</td> <td>52</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5290.00	106.06	-----	-----	90.60	33.04	12.32	29.90	0.00	339	52	PEAK
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5119.40	54.53	74.00	-19.47	39.32	33.14	11.98	29.91	0.00	339	52	PEAK																																																																				
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5290.00	106.06	-----	-----	90.60	33.04	12.32	29.90	0.00	339	52	PEAK																																																																				
Avg	 <p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.06</td> <td>45.31</td> <td>54.00</td> <td>-8.69</td> <td>30.09</td> <td>33.09</td> <td>12.05</td> <td>29.92</td> <td>0.00</td> <td>339</td> <td>52</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5149.06	45.31	54.00	-8.69	30.09	33.09	12.05	29.92	0.00	339	52	AVERAGE	 <p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>99.88</td> <td>-----</td> <td>-----</td> <td>84.42</td> <td>33.04</td> <td>12.32</td> <td>29.90</td> <td>0.00</td> <td>339</td> <td>52</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5290.00	99.88	-----	-----	84.42	33.04	12.32	29.90	0.00	339	52	AVERAGE
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5149.06	45.31	54.00	-8.69	30.09	33.09	12.05	29.92	0.00	339	52	AVERAGE																																																																				
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5290.00	99.88	-----	-----	84.42	33.04	12.32	29.90	0.00	339	52	AVERAGE																																																																				

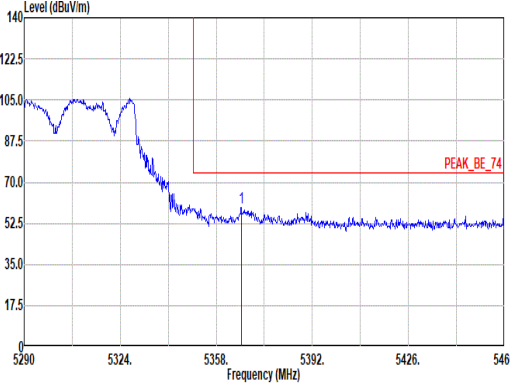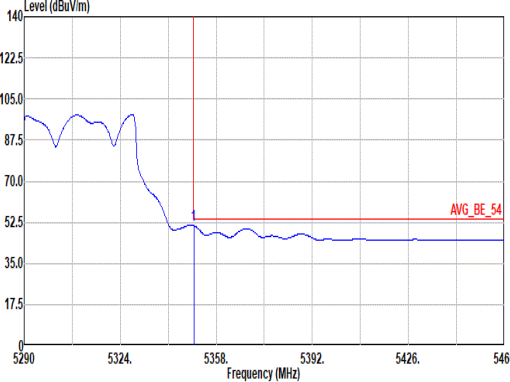

Mode	19																																								
	Band Edge - R																																								
	U-NII-2A_5.25-5.35_802.11be EHT80_CH58_5290MHz																																								
ANT	D+B+C+A																																								
Pol.	Horizontal	Fundamental																																							
Peak	 <p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1" data-bbox="279 1086 790 1187"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5366.84</td> <td>59.02</td> <td>74.00</td> <td>-14.98</td> <td>43.49</td> <td>33.06</td> <td>12.37</td> <td>29.90</td> <td>0.00</td> <td>339</td> <td>52 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5366.84	59.02	74.00	-14.98	43.49	33.06	12.37	29.90	0.00	339	52 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5366.84	59.02	74.00	-14.98	43.49	33.06	12.37	29.90	0.00	339	52 PEAK																															
Avg	 <p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1" data-bbox="279 1758 790 1859"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5350.01</td> <td>51.06</td> <td>54.00</td> <td>-2.94</td> <td>35.54</td> <td>33.07</td> <td>12.35</td> <td>29.90</td> <td>0.00</td> <td>339</td> <td>52 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5350.01	51.06	54.00	-2.94	35.54	33.07	12.35	29.90	0.00	339	52 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5350.01	51.06	54.00	-2.94	35.54	33.07	12.35	29.90	0.00	339	52 AVERAGE																															



Mode	19																																																																									
	Band Edge - L																																																																									
	U-NII-2A_5.25-5.35_802.11be EHT80_CH58_5290MHz																																																																									
ANT	D+B+C+A																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5131.37 55.14 74.00 -18.86</td> <td>39.93 33.12</td> <td>12.01</td> <td>29.92</td> <td>0.00</td> <td>300</td> <td>286</td> <td>PEAK</td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor		MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg		1 5131.37 55.14 74.00 -18.86	39.93 33.12	12.01	29.92	0.00	300	286	PEAK		<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5290.00 110.20 -----</td> <td>94.83 33.00</td> <td>12.27</td> <td>29.90</td> <td>0.00</td> <td>300</td> <td>286</td> <td>PEAK</td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor		MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg		1 5290.00 110.20 -----	94.83 33.00	12.27	29.90	0.00	300	286	PEAK	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor																																																																			
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																																			
1 5131.37 55.14 74.00 -18.86	39.93 33.12	12.01	29.92	0.00	300	286	PEAK																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor																																																																			
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																																			
1 5290.00 110.20 -----	94.83 33.00	12.27	29.90	0.00	300	286	PEAK																																																																			
Avg	<p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5149.93 46.00 54.00 -8.00</td> <td>30.78 33.09</td> <td>12.05</td> <td>29.92</td> <td>0.00</td> <td>300</td> <td>286</td> <td>AVERAGE</td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor		MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg		1 5149.93 46.00 54.00 -8.00	30.78 33.09	12.05	29.92	0.00	300	286	AVERAGE		<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5290.00 103.34 -----</td> <td>87.91 33.03</td> <td>12.30</td> <td>29.90</td> <td>0.00</td> <td>300</td> <td>286</td> <td>AVERAGE</td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor		MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg		1 5290.00 103.34 -----	87.91 33.03	12.30	29.90	0.00	300	286	AVERAGE	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor																																																																			
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																																			
1 5149.93 46.00 54.00 -8.00	30.78 33.09	12.05	29.92	0.00	300	286	AVERAGE																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor																																																																			
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	cm	deg																																																																			
1 5290.00 103.34 -----	87.91 33.03	12.30	29.90	0.00	300	286	AVERAGE																																																																			



Mode	19																																					
	Band Edge - R																																					
	U-NII-2A_5.25-5.35_802.11be EHT80_CH58_5290MHz																																					
ANT	D+B+C+A																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE_74 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5351.03</td> <td>63.41</td> <td>74.00</td> <td>-10.59</td> <td>47.89</td> <td>33.07</td> <td>12.35</td> <td>29.90</td> <td>0.00 300 286 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5351.03	63.41	74.00	-10.59	47.89	33.07	12.35	29.90	0.00 300 286 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																														
1 5351.03	63.41	74.00	-10.59	47.89	33.07	12.35	29.90	0.00 300 286 PEAK																														
Avg	<p>Site : 03CH02-CA Condition: AVG_BE_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5351.20</td> <td>53.60</td> <td>54.00</td> <td>-0.40</td> <td>38.00</td> <td>33.07</td> <td>12.35</td> <td>29.90</td> <td>0.00 300 286 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5351.20	53.60	54.00	-0.40	38.00	33.07	12.35	29.90	0.00 300 286 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																														
1 5351.20	53.60	54.00	-0.40	38.00	33.07	12.35	29.90	0.00 300 286 AVERAGE																														



Mode	19																																																																																																																																			
	Harmonic																																																																																																																																			
	U-NII-2A_5.25-5.35_802.11be EHT80_CH58_5290MHz																																																																																																																																			
ANT	D+B+C+A																																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																																		
Peak Avg	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL Mode : 19</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10580.00</td> <td>47.68</td> <td>68.20</td> <td>-20.52</td> <td>58.47</td> <td>39.02</td> <td>17.62</td> <td>67.81</td> <td>0.36</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15870.00</td> <td>48.31</td> <td>74.00</td> <td>-25.69</td> <td>56.56</td> <td>37.92</td> <td>21.72</td> <td>68.25</td> <td>0.36</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15870.00</td> <td>38.99</td> <td>54.00</td> <td>-15.01</td> <td>47.24</td> <td>37.92</td> <td>21.72</td> <td>68.25</td> <td>0.36</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	10580.00	47.68	68.20	-20.52	58.47	39.02	17.62	67.81	0.36	--	--	PEAK	2	15870.00	48.31	74.00	-25.69	56.56	37.92	21.72	68.25	0.36	--	--	PEAK	3	15870.00	38.99	54.00	-15.01	47.24	37.92	21.72	68.25	0.36	--	--	Average	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL Mode : 19</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10580.00</td> <td>48.37</td> <td>68.20</td> <td>-19.83</td> <td>59.16</td> <td>39.02</td> <td>17.62</td> <td>67.81</td> <td>0.36</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15870.00</td> <td>48.49</td> <td>74.00</td> <td>-25.51</td> <td>56.74</td> <td>37.92</td> <td>21.72</td> <td>68.25</td> <td>0.36</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15870.00</td> <td>38.88</td> <td>54.00</td> <td>-15.12</td> <td>47.13</td> <td>37.92</td> <td>21.72</td> <td>68.25</td> <td>0.36</td> <td>--</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	10580.00	48.37	68.20	-19.83	59.16	39.02	17.62	67.81	0.36	--	--	PEAK	2	15870.00	48.49	74.00	-25.51	56.74	37.92	21.72	68.25	0.36	--	--	PEAK	3	15870.00	38.88	54.00	-15.12	47.13	37.92	21.72	68.25	0.36	--	--	Average
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																								
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																									
1	10580.00	47.68	68.20	-20.52	58.47	39.02	17.62	67.81	0.36	--	--	PEAK																																																																																																																								
2	15870.00	48.31	74.00	-25.69	56.56	37.92	21.72	68.25	0.36	--	--	PEAK																																																																																																																								
3	15870.00	38.99	54.00	-15.01	47.24	37.92	21.72	68.25	0.36	--	--	Average																																																																																																																								
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																								
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																									
1	10580.00	48.37	68.20	-19.83	59.16	39.02	17.62	67.81	0.36	--	--	PEAK																																																																																																																								
2	15870.00	48.49	74.00	-25.51	56.74	37.92	21.72	68.25	0.36	--	--	PEAK																																																																																																																								
3	15870.00	38.88	54.00	-15.12	47.13	37.92	21.72	68.25	0.36	--	--	Average																																																																																																																								



Mode	19	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11be EHT80_CH58_5290MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL Mode : 19</p>	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL Mode : 19</p>



Mode	20																																																																		
	Band Edge																																																																		
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																		
ANT	D+B+C+A																																																																		
Pol.	Horizontal	Fundamental																																																																	
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBI:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.50</td> <td>57.40</td> <td>74.00</td> <td>-16.60</td> <td>41.91</td> <td>32.92</td> <td>12.48</td> <td>29.91</td> <td>0.00</td> <td>242</td> <td>43</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5467.00</td> <td>59.85</td> <td>68.20</td> <td>-8.35</td> <td>44.35</td> <td>32.92</td> <td>12.49</td> <td>29.91</td> <td>0.00</td> <td>242</td> <td>43</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	5459.50	57.40	74.00	-16.60	41.91	32.92	12.48	29.91	0.00	242	43	PEAK	2	5467.00	59.85	68.20	-8.35	44.35	32.92	12.49	29.91	0.00	242	43	PEAK	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBI:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>115.05</td> <td>-----</td> <td>-----</td> <td>99.52</td> <td>32.92</td> <td>12.53</td> <td>29.92</td> <td>0.00</td> <td>242</td> <td>43</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	5500.00	115.05	-----	-----	99.52	32.92	12.53	29.92	0.00	242	43	PEAK
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																							
1	5459.50	57.40	74.00	-16.60	41.91	32.92	12.48	29.91	0.00	242	43	PEAK																																																							
2	5467.00	59.85	68.20	-8.35	44.35	32.92	12.49	29.91	0.00	242	43	PEAK																																																							
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																							
1	5500.00	115.05	-----	-----	99.52	32.92	12.53	29.92	0.00	242	43	PEAK																																																							
Avg	<p>Site : 03CH02-CA Condition: AVG_BE(UNII)_B3 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBI:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.60</td> <td>47.20</td> <td>54.00</td> <td>-6.80</td> <td>31.71</td> <td>32.92</td> <td>12.48</td> <td>29.91</td> <td>0.00</td> <td>242</td> <td>43</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	5458.60	47.20	54.00	-6.80	31.71	32.92	12.48	29.91	0.00	242	43	AVERAGE	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBI:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>109.58</td> <td>-----</td> <td>-----</td> <td>94.05</td> <td>32.92</td> <td>12.53</td> <td>29.92</td> <td>0.00</td> <td>242</td> <td>43</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	5500.00	109.58	-----	-----	94.05	32.92	12.53	29.92	0.00	242	43	AVERAGE													
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																							
1	5458.60	47.20	54.00	-6.80	31.71	32.92	12.48	29.91	0.00	242	43	AVERAGE																																																							
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																							
1	5500.00	109.58	-----	-----	94.05	32.92	12.53	29.92	0.00	242	43	AVERAGE																																																							



20																																																																																												
Mode																																																																																												
Band Edge																																																																																												
U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																												
ANT																																																																																												
D+B+C+A																																																																																												
Pol.																																																																																												
Vertical	Fundamental																																																																																											
Peak	Fundamental																																																																																											
<p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBI:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.55</td> <td>60.84</td> <td>74.00</td> <td>-13.16</td> <td>45.35</td> <td>32.92</td> <td>12.48</td> <td>29.91</td> <td>0.00</td> <td>312</td> <td>250</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.85</td> <td>64.41</td> <td>68.20</td> <td>-3.79</td> <td>48.91</td> <td>32.92</td> <td>12.49</td> <td>29.91</td> <td>0.00</td> <td>312</td> <td>250</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5457.55	60.84	74.00	-13.16	45.35	32.92	12.48	29.91	0.00	312	250	PEAK	2	5469.85	64.41	68.20	-3.79	48.91	32.92	12.49	29.91	0.00	312	250	PEAK	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBI:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>120.92</td> <td>-----</td> <td>-----</td> <td>105.41</td> <td>32.91</td> <td>12.52</td> <td>29.92</td> <td>0.00</td> <td>312</td> <td>250</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5500.00	120.92	-----	-----	105.41	32.91	12.52	29.92	0.00	312	250	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	5457.55	60.84	74.00	-13.16	45.35	32.92	12.48	29.91	0.00	312	250	PEAK																																																																																
2	5469.85	64.41	68.20	-3.79	48.91	32.92	12.49	29.91	0.00	312	250	PEAK																																																																																
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	5500.00	120.92	-----	-----	105.41	32.91	12.52	29.92	0.00	312	250	PEAK																																																																																
Avg	Avg																																																																																											
<p>Site : 03CH02-CA Condition: AVG_BE(UNII)_B3 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBI:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.85</td> <td>50.66</td> <td>54.00</td> <td>-3.34</td> <td>35.17</td> <td>32.92</td> <td>12.48</td> <td>29.91</td> <td>0.00</td> <td>312</td> <td>250</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5457.85	50.66	54.00	-3.34	35.17	32.92	12.48	29.91	0.00	312	250	AVERAGE	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBI:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>114.02</td> <td>-----</td> <td>-----</td> <td>98.51</td> <td>32.91</td> <td>12.52</td> <td>29.92</td> <td>0.00</td> <td>312</td> <td>250</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5500.00	114.02	-----	-----	98.51	32.91	12.52	29.92	0.00	312	250	AVERAGE													
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	5457.85	50.66	54.00	-3.34	35.17	32.92	12.48	29.91	0.00	312	250	AVERAGE																																																																																
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	5500.00	114.02	-----	-----	98.51	32.91	12.52	29.92	0.00	312	250	AVERAGE																																																																																






Mode	21																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																																																																							
ANT	D+B+C+A																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>53.60</td> <td>74.00</td> <td>-20.40</td> <td>63.78</td> <td>39.07</td> <td>18.14</td> <td>67.70</td> <td>0.31</td> <td>290</td> <td>184</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11160.00</td> <td>43.63</td> <td>54.00</td> <td>-10.37</td> <td>53.01</td> <td>39.07</td> <td>18.14</td> <td>67.70</td> <td>0.31</td> <td>290</td> <td>184</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16740.00</td> <td>48.48</td> <td>68.20</td> <td>-19.72</td> <td>55.30</td> <td>38.06</td> <td>22.53</td> <td>67.75</td> <td>0.34</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11160.00	53.60	74.00	-20.40	63.78	39.07	18.14	67.70	0.31	290	184	Peak	2	11160.00	43.63	54.00	-10.37	53.01	39.07	18.14	67.70	0.31	290	184	Average	3	16740.00	48.48	68.20	-19.72	55.30	38.06	22.53	67.75	0.34	--	--	PEAK	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>53.15</td> <td>74.00</td> <td>-20.85</td> <td>63.33</td> <td>39.07</td> <td>18.14</td> <td>67.70</td> <td>0.31</td> <td>392</td> <td>235</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11160.00</td> <td>43.79</td> <td>54.00</td> <td>-10.21</td> <td>53.97</td> <td>39.07</td> <td>18.14</td> <td>67.70</td> <td>0.31</td> <td>392</td> <td>235</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16740.00</td> <td>48.03</td> <td>68.20</td> <td>-20.17</td> <td>54.85</td> <td>38.06</td> <td>22.53</td> <td>67.75</td> <td>0.34</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11160.00	53.15	74.00	-20.85	63.33	39.07	18.14	67.70	0.31	392	235	Peak	2	11160.00	43.79	54.00	-10.21	53.97	39.07	18.14	67.70	0.31	392	235	Average	3	16740.00	48.03	68.20	-20.17	54.85	38.06	22.53	67.75	0.34	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11160.00	53.60	74.00	-20.40	63.78	39.07	18.14	67.70	0.31	290	184	Peak																																																																																																																												
2	11160.00	43.63	54.00	-10.37	53.01	39.07	18.14	67.70	0.31	290	184	Average																																																																																																																												
3	16740.00	48.48	68.20	-19.72	55.30	38.06	22.53	67.75	0.34	--	--	PEAK																																																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11160.00	53.15	74.00	-20.85	63.33	39.07	18.14	67.70	0.31	392	235	Peak																																																																																																																												
2	11160.00	43.79	54.00	-10.21	53.97	39.07	18.14	67.70	0.31	392	235	Average																																																																																																																												
3	16740.00	48.03	68.20	-20.17	54.85	38.06	22.53	67.75	0.34	--	--	Peak																																																																																																																												






Mode	21	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL</p>	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL</p>

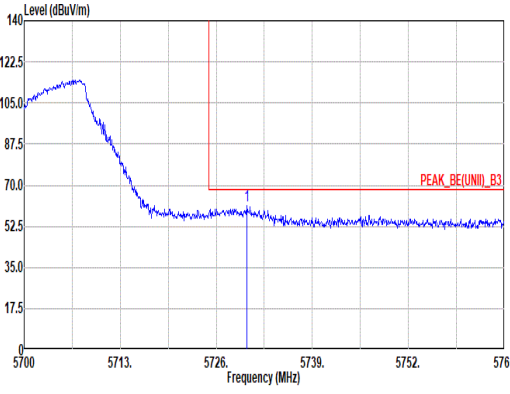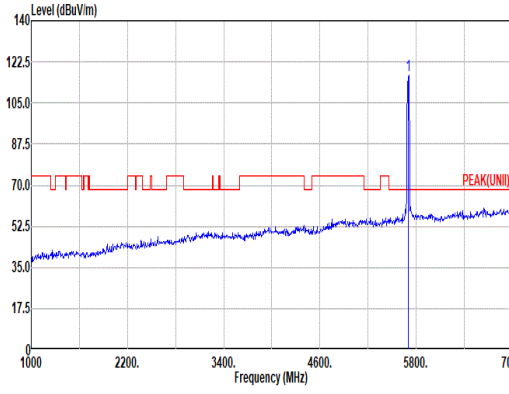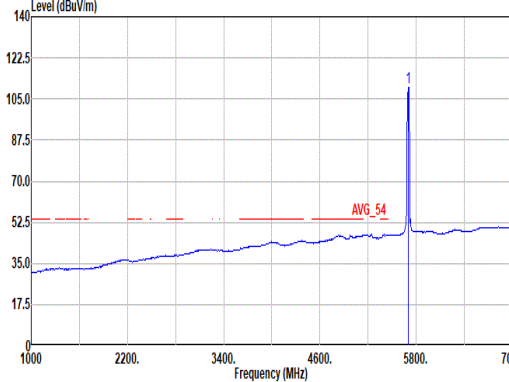

Mode	22																																																																									
	Band Edge																																																																									
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																									
ANT	D+B+C+A																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	 <p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5730.10 61.22 68.20</td> <td>-6.98</td> <td>44.88</td> <td>33.50</td> <td>12.80</td> <td>29.96</td> <td>0.00</td> <td>250</td> <td>125 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level	Factor	Loss	Factor	Factor				MHz dBuV/m dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5730.10 61.22 68.20	-6.98	44.88	33.50	12.80	29.96	0.00	250	125 PEAK	 <p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00 116.93</td> <td>-----</td> <td>100.72</td> <td>33.38</td> <td>12.78</td> <td>29.95</td> <td>0.00</td> <td>250</td> <td>125 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level	Factor	Loss	Factor	Factor				MHz dBuV/m dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5700.00 116.93	-----	100.72	33.38	12.78	29.95	0.00	250	125 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level	Factor	Loss	Factor	Factor																																																																					
MHz dBuV/m dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																		
1 5730.10 61.22 68.20	-6.98	44.88	33.50	12.80	29.96	0.00	250	125 PEAK																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level	Factor	Loss	Factor	Factor																																																																					
MHz dBuV/m dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																		
1 5700.00 116.93	-----	100.72	33.38	12.78	29.95	0.00	250	125 PEAK																																																																		
Avg	Blank																																																																									
		 <p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00 109.92</td> <td>-----</td> <td>93.71</td> <td>33.38</td> <td>12.78</td> <td>29.95</td> <td>0.00</td> <td>250</td> <td>125 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level	Factor	Loss	Factor	Factor				MHz dBuV/m dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5700.00 109.92	-----	93.71	33.38	12.78	29.95	0.00	250	125 AVERAGE																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level	Factor	Loss	Factor	Factor																																																																					
MHz dBuV/m dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																		
1 5700.00 109.92	-----	93.71	33.38	12.78	29.95	0.00	250	125 AVERAGE																																																																		

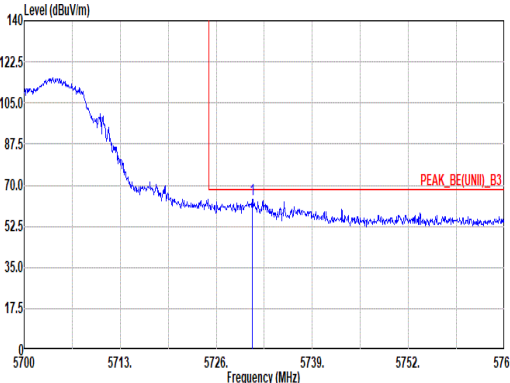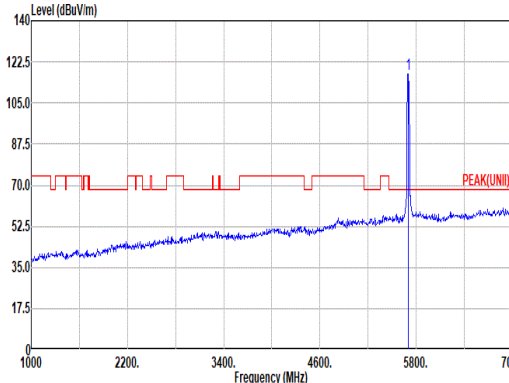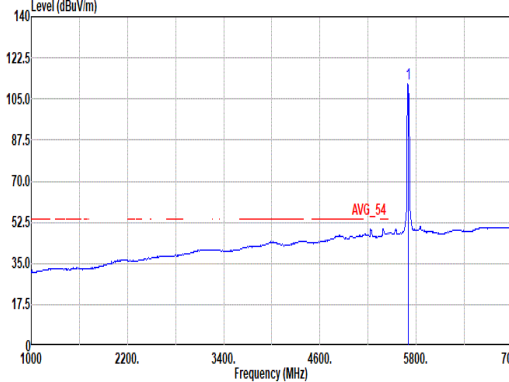

Mode	22																																																																									
	Band Edge																																																																									
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																									
ANT	D+B+C+A																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	 <p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5730.80 64.10 68.20 -4.10</td> <td>47.75 33.51</td> <td>12.80</td> <td>29.96</td> <td>0.00</td> <td>300</td> <td>244</td> <td>PEAK</td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	dB	cm deg		1 5730.80 64.10 68.20 -4.10	47.75 33.51	12.80	29.96	0.00	300	244	PEAK		 <p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5700.00 117.53</td> <td>101.36</td> <td>33.35</td> <td>12.77</td> <td>29.95</td> <td>0.00</td> <td>300</td> <td>244</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	dB	cm deg		1 5700.00 117.53	101.36	33.35	12.77	29.95	0.00	300	244	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																			
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	dB	cm deg																																																																			
1 5730.80 64.10 68.20 -4.10	47.75 33.51	12.80	29.96	0.00	300	244	PEAK																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																			
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	dB	cm deg																																																																			
1 5700.00 117.53	101.36	33.35	12.77	29.95	0.00	300	244	PEAK																																																																		
Avg	Blank	 <p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5700.00 111.44</td> <td>95.34</td> <td>33.29</td> <td>12.76</td> <td>29.95</td> <td>0.00</td> <td>300</td> <td>244</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	dB	cm deg		1 5700.00 111.44	95.34	33.29	12.76	29.95	0.00	300	244	AVERAGE																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																			
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	dB	cm deg																																																																			
1 5700.00 111.44	95.34	33.29	12.76	29.95	0.00	300	244	AVERAGE																																																																		



Mode	23																																																																																																					
	Harmonic																																																																																																					
	U-NII-2C_5.47-5.725_802.11a_CH144_5720MHz																																																																																																					
ANT	D+B+C+A																																																																																																					
Pol.	Horizontal	Vertical																																																																																																				
Peak Avg	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11440.00</td> <td>47.75</td> <td>74.00</td> <td>-26.25</td> <td>57.35</td> <td>39.32</td> <td>18.40</td> <td>67.60</td> <td>0.28</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2 17160.00</td> <td>48.90</td> <td>68.20</td> <td>-19.30</td> <td>55.22</td> <td>38.18</td> <td>22.94</td> <td>67.77</td> <td>0.33</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11440.00	47.75	74.00	-26.25	57.35	39.32	18.40	67.60	0.28	--	PEAK	2 17160.00	48.90	68.20	-19.30	55.22	38.18	22.94	67.77	0.33	--	PEAK	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11440.00</td> <td>47.62</td> <td>74.00</td> <td>-26.38</td> <td>57.22</td> <td>39.32</td> <td>18.40</td> <td>67.60</td> <td>0.28</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2 17160.00</td> <td>48.19</td> <td>68.20</td> <td>-20.01</td> <td>54.51</td> <td>38.18</td> <td>22.94</td> <td>67.77</td> <td>0.33</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11440.00	47.62	74.00	-26.38	57.22	39.32	18.40	67.60	0.28	--	PEAK	2 17160.00	48.19	68.20	-20.01	54.51	38.18	22.94	67.77	0.33	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1 11440.00	47.75	74.00	-26.25	57.35	39.32	18.40	67.60	0.28	--	PEAK																																																																																												
2 17160.00	48.90	68.20	-19.30	55.22	38.18	22.94	67.77	0.33	--	PEAK																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1 11440.00	47.62	74.00	-26.38	57.22	39.32	18.40	67.60	0.28	--	PEAK																																																																																												
2 17160.00	48.19	68.20	-20.01	54.51	38.18	22.94	67.77	0.33	--	PEAK																																																																																												







Mode	23	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11a_CH144_5720MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL</p>	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL</p>



24																																																					
Mode	Band Edge																																																				
U-NII-2C_5.47-5.725_802.11be EHT20_CH100_5500MHz																																																					
ANT	D+B+C+A																																																				
Pol.	Horizontal																																																				
Peak	Fundamental																																																				
<p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5447.65</td> <td>60.42</td> <td>74.00</td> <td>-13.58</td> <td>44.95</td> <td>32.92</td> <td>12.46</td> <td>29.91</td> <td>0.00</td> <td>250</td> <td>43</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5465.95</td> <td>62.85</td> <td>68.20</td> <td>-5.35</td> <td>47.35</td> <td>32.92</td> <td>12.49</td> <td>29.91</td> <td>0.00</td> <td>250</td> <td>43</td> <td>PEAK</td> </tr> </tbody> </table>		Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5447.65	60.42	74.00	-13.58	44.95	32.92	12.46	29.91	0.00	250	43	PEAK	2	5465.95	62.85	68.20	-5.35	47.35	32.92	12.49	29.91	0.00	250	43	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5447.65	60.42	74.00	-13.58	44.95	32.92	12.46	29.91	0.00	250	43	PEAK																																									
2	5465.95	62.85	68.20	-5.35	47.35	32.92	12.49	29.91	0.00	250	43	PEAK																																									
<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>115.89</td> <td>-----</td> <td>-----</td> <td>100.36</td> <td>32.92</td> <td>12.53</td> <td>29.92</td> <td>0.00</td> <td>250</td> <td>43</td> <td>PEAK</td> </tr> </tbody> </table>		Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5500.00	115.89	-----	-----	100.36	32.92	12.53	29.92	0.00	250	43	PEAK													
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5500.00	115.89	-----	-----	100.36	32.92	12.53	29.92	0.00	250	43	PEAK																																									
<p>Site : 03CH02-CA Condition: AVG_BE(UNII)_B3 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.70</td> <td>48.65</td> <td>54.00</td> <td>-5.35</td> <td>33.16</td> <td>32.92</td> <td>12.48</td> <td>29.91</td> <td>0.00</td> <td>250</td> <td>43</td> <td>AVERAGE</td> </tr> </tbody> </table>		Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5457.70	48.65	54.00	-5.35	33.16	32.92	12.48	29.91	0.00	250	43	AVERAGE													
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5457.70	48.65	54.00	-5.35	33.16	32.92	12.48	29.91	0.00	250	43	AVERAGE																																									
<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>109.35</td> <td>-----</td> <td>-----</td> <td>93.82</td> <td>32.92</td> <td>12.53</td> <td>29.92</td> <td>0.00</td> <td>250</td> <td>43</td> <td>AVERAGE</td> </tr> </tbody> </table>		Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5500.00	109.35	-----	-----	93.82	32.92	12.53	29.92	0.00	250	43	AVERAGE													
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5500.00	109.35	-----	-----	93.82	32.92	12.53	29.92	0.00	250	43	AVERAGE																																									

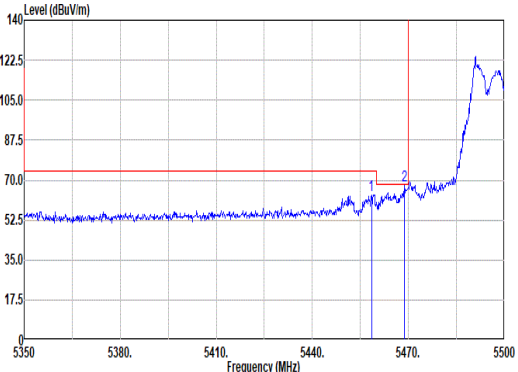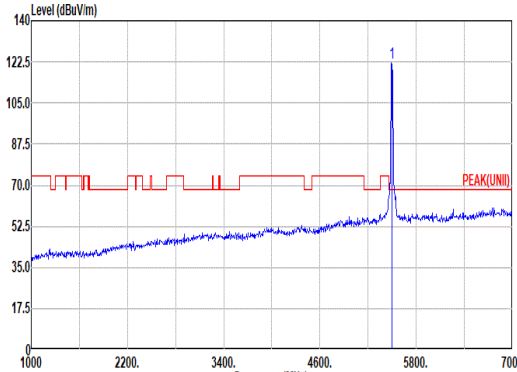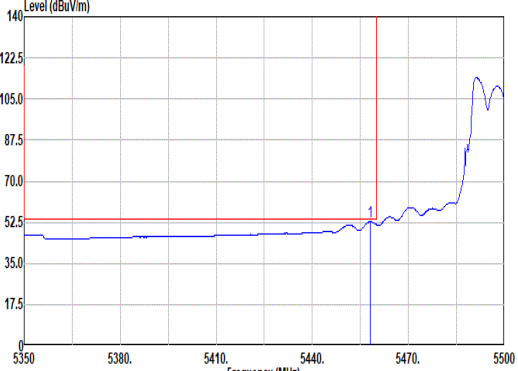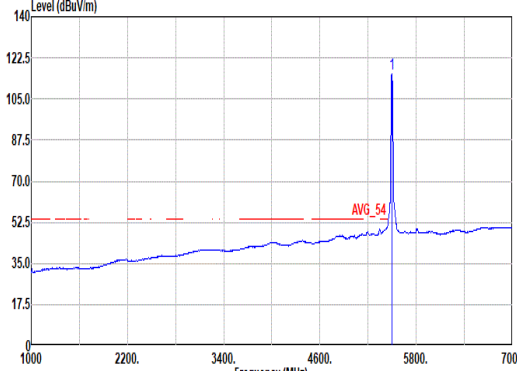

Mode	24																																																																																												
	Band Edge																																																																																												
	U-NII-2C_5.47-5.725_802.11be EHT20_CH100_5500MHz																																																																																												
ANT	D+B+C+A																																																																																												
Pol.	Vertical	Fundamental																																																																																											
Peak	 <p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5450.45</td> <td>63.55</td> <td>74.00</td> <td>-10.45</td> <td>48.06</td> <td>32.92</td> <td>12.48</td> <td>29.91</td> <td>0.00</td> <td>314</td> <td>253</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.80</td> <td>67.46</td> <td>68.20</td> <td>-0.74</td> <td>51.96</td> <td>32.92</td> <td>12.49</td> <td>29.91</td> <td>0.00</td> <td>314</td> <td>253</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5450.45	63.55	74.00	-10.45	48.06	32.92	12.48	29.91	0.00	314	253	PEAK	2	5468.80	67.46	68.20	-0.74	51.96	32.92	12.49	29.91	0.00	314	253	PEAK	 <p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>122.25</td> <td>-----</td> <td>-----</td> <td>106.75</td> <td>32.91</td> <td>12.51</td> <td>29.92</td> <td>0.00</td> <td>314</td> <td>253</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5500.00	122.25	-----	-----	106.75	32.91	12.51	29.92	0.00	314	253	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5450.45	63.55	74.00	-10.45	48.06	32.92	12.48	29.91	0.00	314	253	PEAK																																																																																	
2	5468.80	67.46	68.20	-0.74	51.96	32.92	12.49	29.91	0.00	314	253	PEAK																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5500.00	122.25	-----	-----	106.75	32.91	12.51	29.92	0.00	314	253	PEAK																																																																																	
Avg	 <p>Site : 03CH02-CA Condition: AVG_BE(UNII)_B3 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5450.00</td> <td>52.64</td> <td>54.00</td> <td>-1.36</td> <td>37.15</td> <td>32.92</td> <td>12.48</td> <td>29.91</td> <td>0.00</td> <td>314</td> <td>253</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5450.00	52.64	54.00	-1.36	37.15	32.92	12.48	29.91	0.00	314	253	AVERAGE	 <p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>115.50</td> <td>-----</td> <td>-----</td> <td>99.99</td> <td>32.91</td> <td>12.52</td> <td>29.92</td> <td>0.00</td> <td>314</td> <td>253</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5500.00	115.50	-----	-----	99.99	32.91	12.52	29.92	0.00	314	253	AVERAGE													
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5450.00	52.64	54.00	-1.36	37.15	32.92	12.48	29.91	0.00	314	253	AVERAGE																																																																																	
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5500.00	115.50	-----	-----	99.99	32.91	12.52	29.92	0.00	314	253	AVERAGE																																																																																	



Mode	24																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2C_5.47-5.725_802.11be EHT20_CH100_5500MHz																																																																																																																			
ANT	D+B+C+A																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																		
Peak Avg	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL Mode : 24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>47.34</td> <td>74.00</td> <td>-26.66</td> <td>57.58</td> <td>38.97</td> <td>18.00</td> <td>67.54</td> <td>0.33</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>48.68</td> <td>68.20</td> <td>-19.52</td> <td>55.14</td> <td>38.29</td> <td>22.30</td> <td>67.40</td> <td>0.35</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11000.00	47.34	74.00	-26.66	57.58	38.97	18.00	67.54	0.33	--	PEAK	2	16500.00	48.68	68.20	-19.52	55.14	38.29	22.30	67.40	0.35	--	PEAK	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL Mode : 24</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>48.55</td> <td>74.00</td> <td>-25.45</td> <td>58.79</td> <td>38.97</td> <td>18.00</td> <td>67.54</td> <td>0.33</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11000.00</td> <td>39.01</td> <td>54.00</td> <td>-14.99</td> <td>49.25</td> <td>38.97</td> <td>18.00</td> <td>67.54</td> <td>0.33</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16500.00</td> <td>48.83</td> <td>68.20</td> <td>-19.37</td> <td>55.29</td> <td>38.29</td> <td>22.30</td> <td>67.40</td> <td>0.35</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11000.00	48.55	74.00	-25.45	58.79	38.97	18.00	67.54	0.33	--	PEAK	2	11000.00	39.01	54.00	-14.99	49.25	38.97	18.00	67.54	0.33	--	Average	3	16500.00	48.83	68.20	-19.37	55.29	38.29	22.30	67.40	0.35	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																												
1	11000.00	47.34	74.00	-26.66	57.58	38.97	18.00	67.54	0.33	--	PEAK																																																																																																									
2	16500.00	48.68	68.20	-19.52	55.14	38.29	22.30	67.40	0.35	--	PEAK																																																																																																									
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																												
1	11000.00	48.55	74.00	-25.45	58.79	38.97	18.00	67.54	0.33	--	PEAK																																																																																																									
2	11000.00	39.01	54.00	-14.99	49.25	38.97	18.00	67.54	0.33	--	Average																																																																																																									
3	16500.00	48.83	68.20	-19.37	55.29	38.29	22.30	67.40	0.35	--	PEAK																																																																																																									



Mode	24	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11be EHT20_CH100_5500MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL Mode : 24</p>	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL Mode : 24</p>







25																																								
Mode	Band Edge - L																																							
U-NII-2C_5.47-5.725_802.11be EHT20_CH116_5580MHz																																								
ANT	D+B+C+A																																							
Pol.	Horizontal																																							
Peak	Fundamental																																							
<p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5430.96</td> <td>54.41</td> <td>74.00</td> <td>-19.59</td> <td>38.90</td> <td>32.97</td> <td>12.45</td> <td>29.91</td> <td>0.00</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5463.39</td> <td>54.66</td> <td>68.20</td> <td>-13.54</td> <td>39.17</td> <td>32.92</td> <td>12.48</td> <td>29.91</td> <td>0.00</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> </tbody> </table>		Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5430.96	54.41	74.00	-19.59	38.90	32.97	12.45	29.91	0.00	100	110	PEAK	2	5463.39	54.66	68.20	-13.54	39.17	32.92	12.48	29.91	0.00	100	110	PEAK
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																												
1	5430.96	54.41	74.00	-19.59	38.90	32.97	12.45	29.91	0.00	100	110	PEAK																												
2	5463.39	54.66	68.20	-13.54	39.17	32.92	12.48	29.91	0.00	100	110	PEAK																												
<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>116.36</td> <td>-----</td> <td>-----</td> <td>100.63</td> <td>33.04</td> <td>12.62</td> <td>29.93</td> <td>0.00</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> </tbody> </table>		Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5580.00	116.36	-----	-----	100.63	33.04	12.62	29.93	0.00	100	110	PEAK													
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																												
1	5580.00	116.36	-----	-----	100.63	33.04	12.62	29.93	0.00	100	110	PEAK																												
Avg	Horizontal																																							
<p>Site : 03CH02-CA Condition: AVG_BE(UNII)_B3 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.79</td> <td>45.01</td> <td>54.00</td> <td>-8.99</td> <td>29.52</td> <td>32.92</td> <td>12.48</td> <td>29.91</td> <td>0.00</td> <td>100</td> <td>110</td> <td>AVERAGE</td> </tr> </tbody> </table>		Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5458.79	45.01	54.00	-8.99	29.52	32.92	12.48	29.91	0.00	100	110	AVERAGE													
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																												
1	5458.79	45.01	54.00	-8.99	29.52	32.92	12.48	29.91	0.00	100	110	AVERAGE																												
<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>109.66</td> <td>-----</td> <td>-----</td> <td>93.93</td> <td>33.04</td> <td>12.62</td> <td>29.93</td> <td>0.00</td> <td>100</td> <td>110</td> <td>AVERAGE</td> </tr> </tbody> </table>		Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5580.00	109.66	-----	-----	93.93	33.04	12.62	29.93	0.00	100	110	AVERAGE													
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																												
1	5580.00	109.66	-----	-----	93.93	33.04	12.62	29.93	0.00	100	110	AVERAGE																												



Mode	25																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11be EHT20_CH116_5580MHz																																									
ANT	D+B+C+A																																									
Pol.	Horizontal	Fundamental																																								
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5750.57</td> <td>55.79</td> <td>68.20</td> <td>-12.41</td> <td>39.30</td> <td>33.62</td> <td>12.83</td> <td>29.96</td> <td>0.00</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5750.57	55.79	68.20	-12.41	39.30	33.62	12.83	29.96	0.00	100	110	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5750.57	55.79	68.20	-12.41	39.30	33.62	12.83	29.96	0.00	100	110	PEAK																															

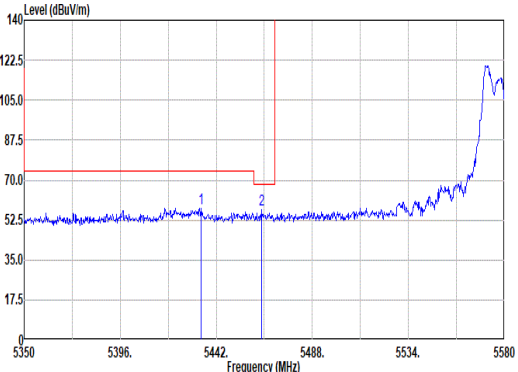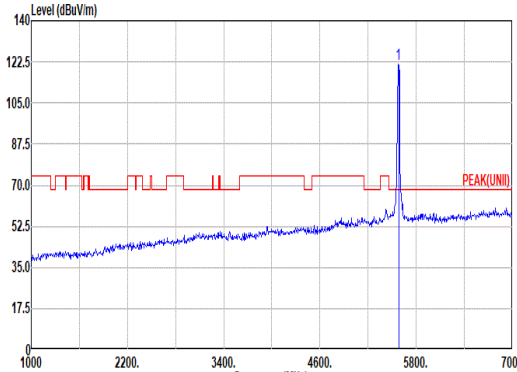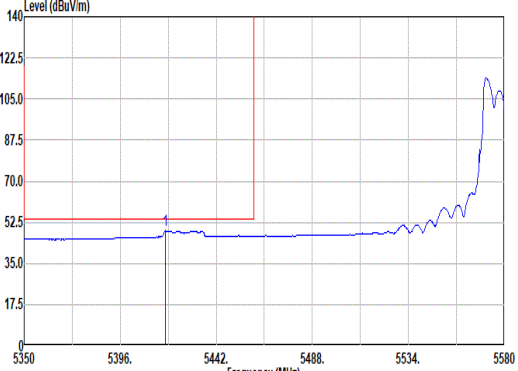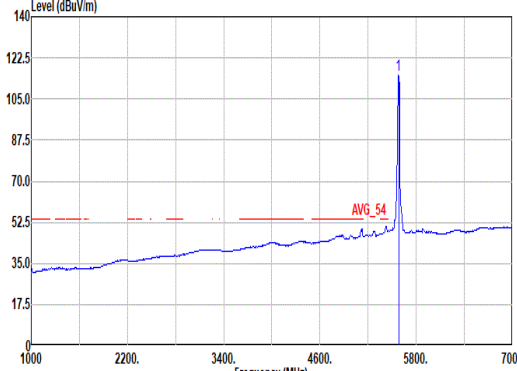

25																																								
Mode	Band Edge - L																																							
U-NII-2C_5.47-5.725_802.11be EHT20_CH116_5580MHz																																								
ANT	D+B+C+A																																							
Pol.	Vertical																																							
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing two peaks at 5434.87 MHz and 5463.62 MHz. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 5350 to 5580 MHz.</p> <p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5434.87</td> <td>57.70</td> <td>74.00</td> <td>-16.30</td> <td>42.20</td> <td>32.96</td> <td>12.45</td> <td>29.91</td> <td>0.00</td> <td>300</td> <td>253</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5463.62</td> <td>57.13</td> <td>68.20</td> <td>-11.07</td> <td>41.64</td> <td>32.92</td> <td>12.48</td> <td>29.91</td> <td>0.00</td> <td>300</td> <td>253</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5434.87	57.70	74.00	-16.30	42.20	32.96	12.45	29.91	0.00	300	253	PEAK	2	5463.62	57.13	68.20	-11.07	41.64	32.92	12.48	29.91	0.00	300	253	PEAK
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																												
1	5434.87	57.70	74.00	-16.30	42.20	32.96	12.45	29.91	0.00	300	253	PEAK																												
2	5463.62	57.13	68.20	-11.07	41.64	32.92	12.48	29.91	0.00	300	253	PEAK																												
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a single peak at 5580.00 MHz. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz.</p> <p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>121.33</td> <td>-----</td> <td>-----</td> <td>105.63</td> <td>33.01</td> <td>12.61</td> <td>29.92</td> <td>0.00</td> <td>300</td> <td>253</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5580.00	121.33	-----	-----	105.63	33.01	12.61	29.92	0.00	300	253	PEAK													
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																												
1	5580.00	121.33	-----	-----	105.63	33.01	12.61	29.92	0.00	300	253	PEAK																												
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing an average level of 48.88 dBuV/m at 5417.62 MHz. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 5350 to 5580 MHz.</p> <p>Site : 03CH02-CA Condition: AVG_BE(UNII)_B3 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5417.62</td> <td>48.88</td> <td>54.00</td> <td>-5.12</td> <td>33.36</td> <td>33.00</td> <td>12.43</td> <td>29.91</td> <td>0.00</td> <td>300</td> <td>253</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5417.62	48.88	54.00	-5.12	33.36	33.00	12.43	29.91	0.00	300	253	AVERAGE													
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																												
1	5417.62	48.88	54.00	-5.12	33.36	33.00	12.43	29.91	0.00	300	253	AVERAGE																												
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing an average level of 115.24 dBuV/m at 5580.00 MHz. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz.</p> <p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>115.24</td> <td>-----</td> <td>-----</td> <td>99.54</td> <td>33.01</td> <td>12.61</td> <td>29.92</td> <td>0.00</td> <td>300</td> <td>253</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5580.00	115.24	-----	-----	99.54	33.01	12.61	29.92	0.00	300	253	AVERAGE													
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																												
1	5580.00	115.24	-----	-----	99.54	33.01	12.61	29.92	0.00	300	253	AVERAGE																												



Mode	25																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11be EHT20_CH116_5580MHz																																									
ANT	D+B+C+A																																									
Pol.	Vertical	Fundamental																																								
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE(U-NII)_B3 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5732.26</td> <td>56.55</td> <td>68.20</td> <td>-11.65</td> <td>40.19</td> <td>33.51</td> <td>12.81</td> <td>29.96</td> <td>0.00</td> <td>300</td> <td>253</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5732.26	56.55	68.20	-11.65	40.19	33.51	12.81	29.96	0.00	300	253	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5732.26	56.55	68.20	-11.65	40.19	33.51	12.81	29.96	0.00	300	253	PEAK																															



Mode	25																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-2C_5.47-5.725_802.11be EHT20_CH116_5580MHz																																																																																																																																							
ANT	D+B+C+A																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL Mode : 25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>52.75</td> <td>74.00</td> <td>-21.25</td> <td>62.93</td> <td>39.07</td> <td>18.14</td> <td>67.70</td> <td>0.31</td> <td>253</td> <td>186</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11160.00</td> <td>42.55</td> <td>54.00</td> <td>-11.45</td> <td>52.73</td> <td>39.07</td> <td>18.14</td> <td>67.70</td> <td>0.31</td> <td>253</td> <td>186</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16740.00</td> <td>49.16</td> <td>68.20</td> <td>-19.04</td> <td>55.98</td> <td>38.06</td> <td>22.53</td> <td>67.75</td> <td>0.34</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11160.00	52.75	74.00	-21.25	62.93	39.07	18.14	67.70	0.31	253	186	Peak	2	11160.00	42.55	54.00	-11.45	52.73	39.07	18.14	67.70	0.31	253	186	Average	3	16740.00	49.16	68.20	-19.04	55.98	38.06	22.53	67.75	0.34	--	--	PEAK	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL Mode : 25</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>53.12</td> <td>74.00</td> <td>-20.88</td> <td>63.30</td> <td>39.07</td> <td>18.14</td> <td>67.70</td> <td>0.31</td> <td>400</td> <td>236</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11160.00</td> <td>43.22</td> <td>54.00</td> <td>-10.78</td> <td>53.40</td> <td>39.07</td> <td>18.14</td> <td>67.70</td> <td>0.31</td> <td>400</td> <td>236</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16740.00</td> <td>47.72</td> <td>68.20</td> <td>-20.48</td> <td>54.54</td> <td>38.06</td> <td>22.53</td> <td>67.75</td> <td>0.34</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11160.00	53.12	74.00	-20.88	63.30	39.07	18.14	67.70	0.31	400	236	Peak	2	11160.00	43.22	54.00	-10.78	53.40	39.07	18.14	67.70	0.31	400	236	Average	3	16740.00	47.72	68.20	-20.48	54.54	38.06	22.53	67.75	0.34	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11160.00	52.75	74.00	-21.25	62.93	39.07	18.14	67.70	0.31	253	186	Peak																																																																																																																												
2	11160.00	42.55	54.00	-11.45	52.73	39.07	18.14	67.70	0.31	253	186	Average																																																																																																																												
3	16740.00	49.16	68.20	-19.04	55.98	38.06	22.53	67.75	0.34	--	--	PEAK																																																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	11160.00	53.12	74.00	-20.88	63.30	39.07	18.14	67.70	0.31	400	236	Peak																																																																																																																												
2	11160.00	43.22	54.00	-10.78	53.40	39.07	18.14	67.70	0.31	400	236	Average																																																																																																																												
3	16740.00	47.72	68.20	-20.48	54.54	38.06	22.53	67.75	0.34	--	--	PEAK																																																																																																																												






Mode	25	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11be EHT20_CH116_5580MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL Mode : 25</p>	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL Mode : 25</p>



Mode	26																																																																																											
	Band Edge																																																																																											
	U-NII-2C_5.47-5.725_802.11be EHT20_CH140_5700MHz																																																																																											
ANT	D+B+C+A																																																																																											
Pol.	Horizontal	Fundamental																																																																																										
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5725.48</td> <td>61.77</td> <td>68.20</td> <td>-6.43</td> <td>45.46</td> <td>33.47</td> <td>12.80</td> <td>29.96</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>104 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5725.48	61.77	68.20	-6.43	45.46	33.47	12.80	29.96	0.00									104 PEAK	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>113.45</td> <td>-----</td> <td>97.24</td> <td>33.38</td> <td>12.78</td> <td>29.95</td> <td>0.00</td> <td>200</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>104 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5700.00	113.45	-----	97.24	33.38	12.78	29.95	0.00	200									104 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																				
1 5725.48	61.77	68.20	-6.43	45.46	33.47	12.80	29.96	0.00																																																																																				
								104 PEAK																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																				
1 5700.00	113.45	-----	97.24	33.38	12.78	29.95	0.00	200																																																																																				
								104 PEAK																																																																																				
Avg	Blank	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>106.24</td> <td>-----</td> <td>90.03</td> <td>33.38</td> <td>12.78</td> <td>29.95</td> <td>0.00</td> <td>200</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>104 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5700.00	106.24	-----	90.03	33.38	12.78	29.95	0.00	200									104 AVERAGE																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																				
1 5700.00	106.24	-----	90.03	33.38	12.78	29.95	0.00	200																																																																																				
								104 AVERAGE																																																																																				

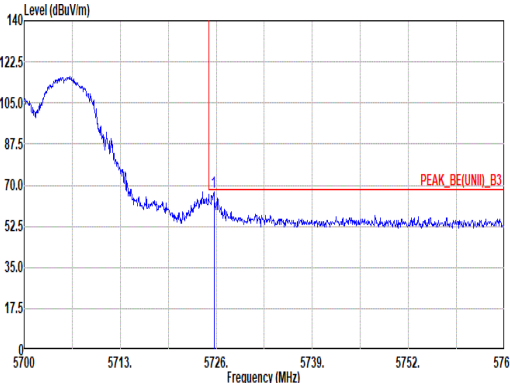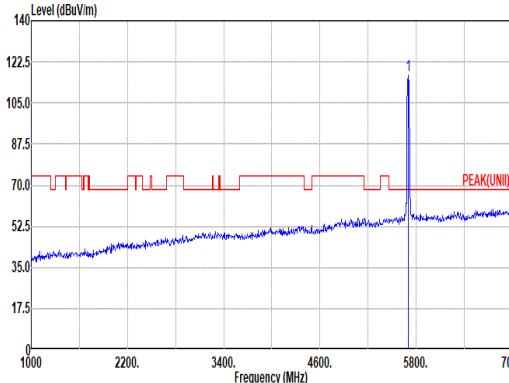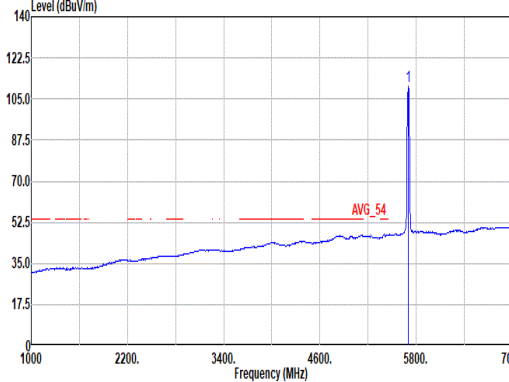

Mode	26																																																																									
	Band Edge																																																																									
	U-NII-2C_5.47-5.725_802.11be EHT20_CH140_5700MHz																																																																									
ANT	D+B+C+A																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	 <p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5725.60 67.01 68.20 -1.19</td> <td>50.69 33.40</td> <td>12.00</td> <td>29.96</td> <td>0.00</td> <td>300</td> <td>115</td> <td>PEAK</td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor		MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	dB	cm deg		1 5725.60 67.01 68.20 -1.19	50.69 33.40	12.00	29.96	0.00	300	115	PEAK		 <p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5700.00 116.78</td> <td>100.61 33.35</td> <td>12.77</td> <td>29.95</td> <td>0.00</td> <td>300</td> <td>115</td> <td>PEAK</td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor		MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	dB	cm deg		1 5700.00 116.78	100.61 33.35	12.77	29.95	0.00	300	115	PEAK	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor																																																																			
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	dB	cm deg																																																																			
1 5725.60 67.01 68.20 -1.19	50.69 33.40	12.00	29.96	0.00	300	115	PEAK																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor																																																																			
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	dB	cm deg																																																																			
1 5700.00 116.78	100.61 33.35	12.77	29.95	0.00	300	115	PEAK																																																																			
Avg	Blank	 <p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5700.00 110.16</td> <td>93.99 33.35</td> <td>12.77</td> <td>29.95</td> <td>0.00</td> <td>300</td> <td>115</td> <td>AVERAGE</td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor		MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	dB	cm deg		1 5700.00 110.16	93.99 33.35	12.77	29.95	0.00	300	115	AVERAGE																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor																																																																			
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	dB	dB	dB	dB	cm deg																																																																			
1 5700.00 110.16	93.99 33.35	12.77	29.95	0.00	300	115	AVERAGE																																																																			



Mode	26																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2C_5.47-5.725_802.11be EHT20_CH140_5700MHz																																																																																																																																	
ANT	D+B+C+A																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																
Peak Avg	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL Mode : 26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>48.11</td> <td>74.00</td> <td>-25.89</td> <td>57.85</td> <td>39.35</td> <td>18.36</td> <td>67.74</td> <td>0.29</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11400.00</td> <td>38.01</td> <td>54.00</td> <td>-15.99</td> <td>47.75</td> <td>39.35</td> <td>18.36</td> <td>67.74</td> <td>0.29</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17100.00</td> <td>49.56</td> <td>68.20</td> <td>-18.64</td> <td>56.11</td> <td>37.99</td> <td>22.88</td> <td>67.75</td> <td>0.33</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11400.00	48.11	74.00	-25.89	57.85	39.35	18.36	67.74	0.29	--	PEAK	2	11400.00	38.01	54.00	-15.99	47.75	39.35	18.36	67.74	0.29	--	Average	3	17100.00	49.56	68.20	-18.64	56.11	37.99	22.88	67.75	0.33	--	PEAK	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL Mode : 26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>48.59</td> <td>74.00</td> <td>-25.41</td> <td>58.33</td> <td>39.35</td> <td>18.36</td> <td>67.74</td> <td>0.29</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11400.00</td> <td>38.09</td> <td>54.00</td> <td>-15.91</td> <td>47.83</td> <td>39.35</td> <td>18.36</td> <td>67.74</td> <td>0.29</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17100.00</td> <td>48.99</td> <td>68.20</td> <td>-19.21</td> <td>55.54</td> <td>37.99</td> <td>22.88</td> <td>67.75</td> <td>0.33</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11400.00	48.59	74.00	-25.41	58.33	39.35	18.36	67.74	0.29	--	PEAK	2	11400.00	38.09	54.00	-15.91	47.83	39.35	18.36	67.74	0.29	--	Average	3	17100.00	48.99	68.20	-19.21	55.54	37.99	22.88	67.75	0.33	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11400.00	48.11	74.00	-25.89	57.85	39.35	18.36	67.74	0.29	--	PEAK																																																																																																																							
2	11400.00	38.01	54.00	-15.99	47.75	39.35	18.36	67.74	0.29	--	Average																																																																																																																							
3	17100.00	49.56	68.20	-18.64	56.11	37.99	22.88	67.75	0.33	--	PEAK																																																																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11400.00	48.59	74.00	-25.41	58.33	39.35	18.36	67.74	0.29	--	PEAK																																																																																																																							
2	11400.00	38.09	54.00	-15.91	47.83	39.35	18.36	67.74	0.29	--	Average																																																																																																																							
3	17100.00	48.99	68.20	-19.21	55.54	37.99	22.88	67.75	0.33	--	PEAK																																																																																																																							



Mode	26	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11be EHT20_CH140_5700MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL Mode : 26</p>	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL Mode : 26</p>







Mode	27																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2C_5.47-5.725_802.11be EHT20_CH144_5720MHz																																																																																																																																	
ANT	D+B+C+A																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																
Peak Avg	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL Mode : 27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>48.47</td> <td>74.00</td> <td>-25.53</td> <td>58.07</td> <td>39.32</td> <td>18.40</td> <td>67.60</td> <td>0.28</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11440.00</td> <td>38.07</td> <td>54.00</td> <td>-15.93</td> <td>47.67</td> <td>39.32</td> <td>18.40</td> <td>67.60</td> <td>0.28</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17160.00</td> <td>49.36</td> <td>68.20</td> <td>-18.84</td> <td>55.68</td> <td>38.18</td> <td>22.94</td> <td>67.77</td> <td>0.33</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11440.00	48.47	74.00	-25.53	58.07	39.32	18.40	67.60	0.28	--	PEAK	2	11440.00	38.07	54.00	-15.93	47.67	39.32	18.40	67.60	0.28	--	Average	3	17160.00	49.36	68.20	-18.84	55.68	38.18	22.94	67.77	0.33	--	PEAK	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL Mode : 27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>48.34</td> <td>74.00</td> <td>-25.66</td> <td>57.94</td> <td>39.32</td> <td>18.40</td> <td>67.60</td> <td>0.28</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11440.00</td> <td>37.94</td> <td>54.00</td> <td>-16.06</td> <td>47.54</td> <td>39.32</td> <td>18.40</td> <td>67.60</td> <td>0.28</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17160.00</td> <td>49.15</td> <td>68.20</td> <td>-19.05</td> <td>55.47</td> <td>38.18</td> <td>22.94</td> <td>67.77</td> <td>0.33</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11440.00	48.34	74.00	-25.66	57.94	39.32	18.40	67.60	0.28	--	PEAK	2	11440.00	37.94	54.00	-16.06	47.54	39.32	18.40	67.60	0.28	--	Average	3	17160.00	49.15	68.20	-19.05	55.47	38.18	22.94	67.77	0.33	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11440.00	48.47	74.00	-25.53	58.07	39.32	18.40	67.60	0.28	--	PEAK																																																																																																																							
2	11440.00	38.07	54.00	-15.93	47.67	39.32	18.40	67.60	0.28	--	Average																																																																																																																							
3	17160.00	49.36	68.20	-18.84	55.68	38.18	22.94	67.77	0.33	--	PEAK																																																																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11440.00	48.34	74.00	-25.66	57.94	39.32	18.40	67.60	0.28	--	PEAK																																																																																																																							
2	11440.00	37.94	54.00	-16.06	47.54	39.32	18.40	67.60	0.28	--	Average																																																																																																																							
3	17160.00	49.15	68.20	-19.05	55.47	38.18	22.94	67.77	0.33	--	PEAK																																																																																																																							



Mode	27	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11be EHT20_CH144_5720MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL Mode : 27</p>	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL Mode : 27</p>

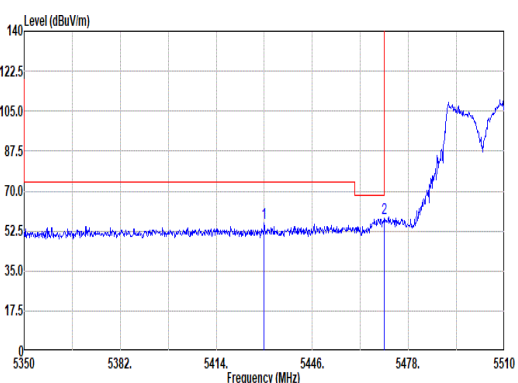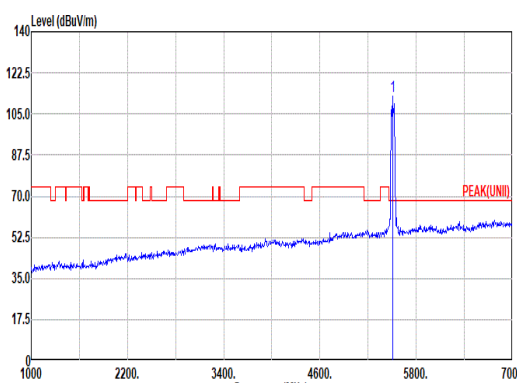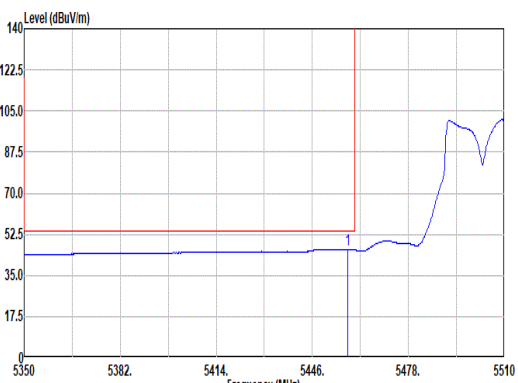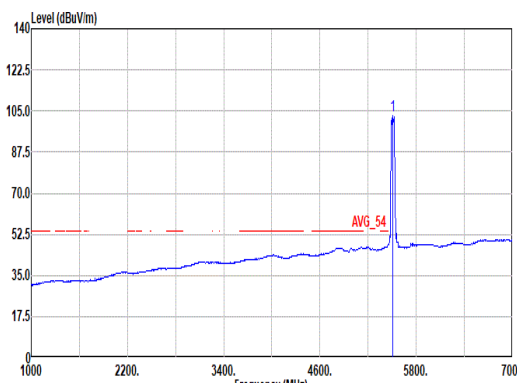

		28																																																																	
Mode	Band Edge - L																																																																		
	U-NII-2C_5.47-5.725_802.11be EHT40_CH102_5510MHz																																																																		
ANT	D+B+C+A																																																																		
Pol.	Horizontal	Fundamental																																																																	
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBI:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5430.00</td> <td>56.17</td> <td>74.00</td> <td>-17.83</td> <td>40.67</td> <td>32.97</td> <td>12.44</td> <td>29.91</td> <td>0.00</td> <td>254</td> <td>135</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.84</td> <td>58.14</td> <td>68.20</td> <td>-10.06</td> <td>42.64</td> <td>32.92</td> <td>12.49</td> <td>29.91</td> <td>0.00</td> <td>254</td> <td>135</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5430.00	56.17	74.00	-17.83	40.67	32.97	12.44	29.91	0.00	254	135	PEAK	2	5469.84	58.14	68.20	-10.06	42.64	32.92	12.49	29.91	0.00	254	135	PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBI:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>112.48</td> <td>-----</td> <td>-----</td> <td>96.95</td> <td>32.92</td> <td>12.53</td> <td>29.92</td> <td>0.00</td> <td>254</td> <td>135</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5510.00	112.48	-----	-----	96.95	32.92	12.53	29.92	0.00	254	135	PEAK
	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																																																						
1	5430.00	56.17	74.00	-17.83	40.67	32.97	12.44	29.91	0.00	254	135	PEAK																																																							
2	5469.84	58.14	68.20	-10.06	42.64	32.92	12.49	29.91	0.00	254	135	PEAK																																																							
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																																																							
1	5510.00	112.48	-----	-----	96.95	32.92	12.53	29.92	0.00	254	135	PEAK																																																							
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH02-CA Condition: AVG_BE(UNII)_B3 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBI:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.84</td> <td>46.22</td> <td>54.00</td> <td>-7.78</td> <td>30.73</td> <td>32.92</td> <td>12.48</td> <td>29.91</td> <td>0.00</td> <td>254</td> <td>135</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5457.84	46.22	54.00	-7.78	30.73	32.92	12.48	29.91	0.00	254	135	AVERAGE	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBI:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>103.18</td> <td>-----</td> <td>-----</td> <td>87.63</td> <td>32.93</td> <td>12.54</td> <td>29.92</td> <td>0.00</td> <td>254</td> <td>135</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5510.00	103.18	-----	-----	87.63	32.93	12.54	29.92	0.00	254	135	AVERAGE													
	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																																																						
1	5457.84	46.22	54.00	-7.78	30.73	32.92	12.48	29.91	0.00	254	135	AVERAGE																																																							
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																																																							
1	5510.00	103.18	-----	-----	87.63	32.93	12.54	29.92	0.00	254	135	AVERAGE																																																							



Mode	28																																										
	Band Edge - R																																										
	U-NII-2C_5.47-5.725_802.11be EHT40_CH102_5510MHz																																										
ANT	D+B+C+A																																										
Pol.	Horizontal	Fundamental																																									
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5731.85</td> <td>55.60</td> <td>68.20</td> <td>-12.60</td> <td>39.25</td> <td>33.51</td> <td>12.00</td> <td>29.96</td> <td>0.00</td> <td>254</td> <td>135</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5731.85	55.60	68.20	-12.60	39.25	33.51	12.00	29.96	0.00	254	135	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																			
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																		
1	5731.85	55.60	68.20	-12.60	39.25	33.51	12.00	29.96	0.00	254	135	PEAK																															



	28																																																																		
Mode	Band Edge - L																																																																		
	U-NII-2C_5.47-5.725_802.11be EHT40_CH102_5510MHz																																																																		
ANT	D+B+C+A																																																																		
Pol.	Vertical	Fundamental																																																																	
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>Aux Factor</th> <th>APos (dB)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.76</td> <td>59.93</td> <td>74.00</td> <td>-14.07</td> <td>44.44</td> <td>32.92</td> <td>12.48</td> <td>29.91</td> <td>0.00</td> <td>305</td> <td>254</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5461.84</td> <td>62.26</td> <td>68.20</td> <td>-5.94</td> <td>46.77</td> <td>32.92</td> <td>12.48</td> <td>29.91</td> <td>0.00</td> <td>305</td> <td>254</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor	APos (dB)	TPos (deg)	Remark	1	5459.76	59.93	74.00	-14.07	44.44	32.92	12.48	29.91	0.00	305	254	PEAK	2	5461.84	62.26	68.20	-5.94	46.77	32.92	12.48	29.91	0.00	305	254	PEAK	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>Aux Factor</th> <th>APos (dB)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>117.00</td> <td>-----</td> <td>-----</td> <td>101.52</td> <td>32.93</td> <td>12.55</td> <td>29.92</td> <td>0.00</td> <td>305</td> <td>254</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor	APos (dB)	TPos (deg)	Remark	1	5510.00	117.00	-----	-----	101.52	32.93	12.55	29.92	0.00	305	254	PEAK
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor	APos (dB)	TPos (deg)	Remark																																																							
1	5459.76	59.93	74.00	-14.07	44.44	32.92	12.48	29.91	0.00	305	254	PEAK																																																							
2	5461.84	62.26	68.20	-5.94	46.77	32.92	12.48	29.91	0.00	305	254	PEAK																																																							
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor	APos (dB)	TPos (deg)	Remark																																																							
1	5510.00	117.00	-----	-----	101.52	32.93	12.55	29.92	0.00	305	254	PEAK																																																							
Avg	<p>Site : 03CH02-CA Condition: AVG_BE(UNII)_B3 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>Aux Factor</th> <th>APos (dB)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.92</td> <td>51.78</td> <td>54.00</td> <td>-2.22</td> <td>36.29</td> <td>32.92</td> <td>12.48</td> <td>29.91</td> <td>0.00</td> <td>305</td> <td>254</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor	APos (dB)	TPos (deg)	Remark	1	5459.92	51.78	54.00	-2.22	36.29	32.92	12.48	29.91	0.00	305	254	AVERAGE	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>Aux Factor</th> <th>APos (dB)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>109.58</td> <td>-----</td> <td>-----</td> <td>94.01</td> <td>32.94</td> <td>12.55</td> <td>29.92</td> <td>0.00</td> <td>305</td> <td>254</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor	APos (dB)	TPos (deg)	Remark	1	5510.00	109.58	-----	-----	94.01	32.94	12.55	29.92	0.00	305	254	AVERAGE													
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor	APos (dB)	TPos (deg)	Remark																																																							
1	5459.92	51.78	54.00	-2.22	36.29	32.92	12.48	29.91	0.00	305	254	AVERAGE																																																							
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read (dBuV)	Ant (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	Aux Factor	APos (dB)	TPos (deg)	Remark																																																							
1	5510.00	109.58	-----	-----	94.01	32.94	12.55	29.92	0.00	305	254	AVERAGE																																																							



Mode	28																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11be EHT40_CH102_5510MHz																																									
ANT	D+B+C+A																																									
Pol.	Vertical	Fundamental																																								
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE(U-NII)_B3 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5760.16</td> <td>54.85</td> <td>68.20</td> <td>-13.35</td> <td>38.28</td> <td>33.69</td> <td>12.84</td> <td>29.96</td> <td>0.00</td> <td>305</td> <td>254</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5760.16	54.85	68.20	-13.35	38.28	33.69	12.84	29.96	0.00	305	254	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5760.16	54.85	68.20	-13.35	38.28	33.69	12.84	29.96	0.00	305	254	PEAK																															



Mode	28																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2C_5.47-5.725_802.11be EHT40_CH102_5510MHz																																																																																																																																	
ANT	D+B+C+A																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																
Peak Avg	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL Mode : 28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11020.00</td> <td>47.65</td> <td>74.00</td> <td>-26.35</td> <td>57.87</td> <td>38.97</td> <td>18.02</td> <td>67.54</td> <td>0.33</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11020.00</td> <td>37.76</td> <td>54.00</td> <td>-16.24</td> <td>47.98</td> <td>38.97</td> <td>18.02</td> <td>67.54</td> <td>0.33</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16530.00</td> <td>50.79</td> <td>68.20</td> <td>-17.41</td> <td>57.29</td> <td>38.29</td> <td>22.33</td> <td>67.47</td> <td>0.35</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11020.00	47.65	74.00	-26.35	57.87	38.97	18.02	67.54	0.33	--	PEAK	2	11020.00	37.76	54.00	-16.24	47.98	38.97	18.02	67.54	0.33	--	Average	3	16530.00	50.79	68.20	-17.41	57.29	38.29	22.33	67.47	0.35	--	PEAK	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL Mode : 28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11020.00</td> <td>49.05</td> <td>74.00</td> <td>-24.95</td> <td>59.27</td> <td>38.97</td> <td>18.02</td> <td>67.54</td> <td>0.33</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11020.00</td> <td>38.65</td> <td>54.00</td> <td>-15.35</td> <td>48.87</td> <td>38.97</td> <td>18.02</td> <td>67.54</td> <td>0.33</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16530.00</td> <td>48.91</td> <td>68.20</td> <td>-19.29</td> <td>55.41</td> <td>38.29</td> <td>22.33</td> <td>67.47</td> <td>0.35</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11020.00	49.05	74.00	-24.95	59.27	38.97	18.02	67.54	0.33	--	PEAK	2	11020.00	38.65	54.00	-15.35	48.87	38.97	18.02	67.54	0.33	--	Average	3	16530.00	48.91	68.20	-19.29	55.41	38.29	22.33	67.47	0.35	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11020.00	47.65	74.00	-26.35	57.87	38.97	18.02	67.54	0.33	--	PEAK																																																																																																																							
2	11020.00	37.76	54.00	-16.24	47.98	38.97	18.02	67.54	0.33	--	Average																																																																																																																							
3	16530.00	50.79	68.20	-17.41	57.29	38.29	22.33	67.47	0.35	--	PEAK																																																																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11020.00	49.05	74.00	-24.95	59.27	38.97	18.02	67.54	0.33	--	PEAK																																																																																																																							
2	11020.00	38.65	54.00	-15.35	48.87	38.97	18.02	67.54	0.33	--	Average																																																																																																																							
3	16530.00	48.91	68.20	-19.29	55.41	38.29	22.33	67.47	0.35	--	PEAK																																																																																																																							



Mode	28	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11be EHT40_CH102_5510MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL Mode : 28</p>	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL Mode : 28</p>



29																																																					
Mode	Band Edge - L																																																				
U-NII-2C_5.47-5.725_802.11be EHT40_CH110_5550MHz																																																					
ANT	D+B+C+A																																																				
Pol.	Horizontal																																																				
Peak	Fundamental																																																				
<p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBI:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5451.00</td> <td>55.42</td> <td>74.00</td> <td>-18.58</td> <td>39.94</td> <td>32.92</td> <td>12.47</td> <td>29.91</td> <td>0.00</td> <td>300</td> <td></td> <td>58 PEAK</td> </tr> <tr> <td>2</td> <td>5468.00</td> <td>57.07</td> <td>68.20</td> <td>-11.13</td> <td>41.57</td> <td>32.92</td> <td>12.49</td> <td>29.91</td> <td>0.00</td> <td>300</td> <td></td> <td>58 PEAK</td> </tr> </tbody> </table>		Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5451.00	55.42	74.00	-18.58	39.94	32.92	12.47	29.91	0.00	300		58 PEAK	2	5468.00	57.07	68.20	-11.13	41.57	32.92	12.49	29.91	0.00	300		58 PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5451.00	55.42	74.00	-18.58	39.94	32.92	12.47	29.91	0.00	300		58 PEAK																																									
2	5468.00	57.07	68.20	-11.13	41.57	32.92	12.49	29.91	0.00	300		58 PEAK																																									
<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBI:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>110.35</td> <td>-----</td> <td>-----</td> <td>94.72</td> <td>32.97</td> <td>12.58</td> <td>29.92</td> <td>0.00</td> <td>300</td> <td></td> <td>58 PEAK</td> </tr> </tbody> </table>		Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5550.00	110.35	-----	-----	94.72	32.97	12.58	29.92	0.00	300		58 PEAK													
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5550.00	110.35	-----	-----	94.72	32.97	12.58	29.92	0.00	300		58 PEAK																																									
Avg	Horizontal																																																				
<p>Site : 03CH02-CA Condition: AVG_BE(UNII)_B3 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBI:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5446.00</td> <td>46.28</td> <td>54.00</td> <td>-7.72</td> <td>30.00</td> <td>32.93</td> <td>12.46</td> <td>29.91</td> <td>0.00</td> <td>300</td> <td></td> <td>58 AVERAGE</td> </tr> </tbody> </table>		Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5446.00	46.28	54.00	-7.72	30.00	32.93	12.46	29.91	0.00	300		58 AVERAGE													
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5446.00	46.28	54.00	-7.72	30.00	32.93	12.46	29.91	0.00	300		58 AVERAGE																																									
<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBI:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>103.54</td> <td>-----</td> <td>-----</td> <td>87.91</td> <td>32.97</td> <td>12.58</td> <td>29.92</td> <td>0.00</td> <td>300</td> <td></td> <td>58 AVERAGE</td> </tr> </tbody> </table>		Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5550.00	103.54	-----	-----	87.91	32.97	12.58	29.92	0.00	300		58 AVERAGE													
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5550.00	103.54	-----	-----	87.91	32.97	12.58	29.92	0.00	300		58 AVERAGE																																									



Mode	29																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11be EHT40_CH110_5550MHz																																								
ANT	D+B+C+A																																								
Pol.	Horizontal	Fundamental																																							
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5750.60</td> <td>54.92</td> <td>68.20</td> <td>-13.28</td> <td>38.43</td> <td>33.62</td> <td>12.83</td> <td>29.96</td> <td>0.00</td> <td>300</td> <td>50 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5750.60	54.92	68.20	-13.28	38.43	33.62	12.83	29.96	0.00	300	50 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1 5750.60	54.92	68.20	-13.28	38.43	33.62	12.83	29.96	0.00	300	50 PEAK																															



29																																																					
Mode	Band Edge - L																																																				
U-NII-2C_5.47-5.725_802.11be EHT40_CH110_5550MHz																																																					
ANT	D+B+C+A																																																				
Pol.	Vertical																																																				
Peak	Fundamental																																																				
<p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.40</td> <td>58.60</td> <td>74.00</td> <td>-15.40</td> <td>43.11</td> <td>32.92</td> <td>12.48</td> <td>29.91</td> <td>0.00</td> <td>300</td> <td>249</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.20</td> <td>62.26</td> <td>68.20</td> <td>-5.94</td> <td>46.76</td> <td>32.92</td> <td>12.49</td> <td>29.91</td> <td>0.00</td> <td>300</td> <td>249</td> <td>PEAK</td> </tr> </tbody> </table>		Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5459.40	58.60	74.00	-15.40	43.11	32.92	12.48	29.91	0.00	300	249	PEAK	2	5469.20	62.26	68.20	-5.94	46.76	32.92	12.49	29.91	0.00	300	249	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5459.40	58.60	74.00	-15.40	43.11	32.92	12.48	29.91	0.00	300	249	PEAK																																									
2	5469.20	62.26	68.20	-5.94	46.76	32.92	12.49	29.91	0.00	300	249	PEAK																																									
<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>118.69</td> <td>-----</td> <td>-----</td> <td>103.00</td> <td>32.96</td> <td>12.57</td> <td>29.92</td> <td>0.00</td> <td>300</td> <td>249</td> <td>PEAK</td> </tr> </tbody> </table>		Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5550.00	118.69	-----	-----	103.00	32.96	12.57	29.92	0.00	300	249	PEAK													
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5550.00	118.69	-----	-----	103.00	32.96	12.57	29.92	0.00	300	249	PEAK																																									
<p>Site : 03CH02-CA Condition: AVG_BE(UNII)_B3 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5460.00</td> <td>50.50</td> <td>54.00</td> <td>-3.50</td> <td>35.01</td> <td>32.92</td> <td>12.48</td> <td>29.91</td> <td>0.00</td> <td>300</td> <td>249</td> <td>AVERAGE</td> </tr> </tbody> </table>		Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5460.00	50.50	54.00	-3.50	35.01	32.92	12.48	29.91	0.00	300	249	AVERAGE													
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5460.00	50.50	54.00	-3.50	35.01	32.92	12.48	29.91	0.00	300	249	AVERAGE																																									
<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>112.12</td> <td>-----</td> <td>-----</td> <td>96.51</td> <td>32.96</td> <td>12.57</td> <td>29.92</td> <td>0.00</td> <td>300</td> <td>249</td> <td>AVERAGE</td> </tr> </tbody> </table>		Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5550.00	112.12	-----	-----	96.51	32.96	12.57	29.92	0.00	300	249	AVERAGE													
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5550.00	112.12	-----	-----	96.51	32.96	12.57	29.92	0.00	300	249	AVERAGE																																									



Mode	29																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11be EHT40_CH110_5550MHz																																									
ANT	D+B+C+A																																									
Pol.	Vertical	Fundamental																																								
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5742.86</td> <td>56.74</td> <td>68.20</td> <td>-11.46</td> <td>40.30</td> <td>33.50</td> <td>12.82</td> <td>29.96</td> <td>0.00</td> <td>300</td> <td>249</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5742.86	56.74	68.20	-11.46	40.30	33.50	12.82	29.96	0.00	300	249	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5742.86	56.74	68.20	-11.46	40.30	33.50	12.82	29.96	0.00	300	249	PEAK																															



Mode	29																																																																																									
	Harmonic																																																																																									
	U-NII-2C_5.47-5.725_802.11be EHT40_CH110_5550MHz																																																																																									
ANT	D+B+C+A																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak Avg	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL Mode : 29</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 11100.00</td> <td>47.12</td> <td>74.00</td> <td>-26.88</td> <td>57.24</td> <td>39.03</td> <td>18.09</td> <td>67.56</td> <td>0.32</td> <td>--</td> <td>-- PEAK</td> </tr> <tr> <td>2 16650.00</td> <td>48.76</td> <td>68.20</td> <td>-19.44</td> <td>55.48</td> <td>38.23</td> <td>22.44</td> <td>67.74</td> <td>0.35</td> <td>--</td> <td>-- PEAK</td> </tr> </tbody> </table>	Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 11100.00	47.12	74.00	-26.88	57.24	39.03	18.09	67.56	0.32	--	-- PEAK	2 16650.00	48.76	68.20	-19.44	55.48	38.23	22.44	67.74	0.35	--	-- PEAK	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL Mode : 29</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 11100.00</td> <td>47.32</td> <td>74.00</td> <td>-26.68</td> <td>57.44</td> <td>39.03</td> <td>18.09</td> <td>67.56</td> <td>0.32</td> <td>--</td> <td>-- PEAK</td> </tr> <tr> <td>2 16650.00</td> <td>49.06</td> <td>68.20</td> <td>-19.14</td> <td>55.78</td> <td>38.23</td> <td>22.44</td> <td>67.74</td> <td>0.35</td> <td>--</td> <td>-- PEAK</td> </tr> </tbody> </table>	Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 11100.00	47.32	74.00	-26.68	57.44	39.03	18.09	67.56	0.32	--	-- PEAK	2 16650.00	49.06	68.20	-19.14	55.78	38.23	22.44	67.74	0.35	--	-- PEAK
Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 11100.00	47.12	74.00	-26.88	57.24	39.03	18.09	67.56	0.32	--	-- PEAK																																																																																
2 16650.00	48.76	68.20	-19.44	55.48	38.23	22.44	67.74	0.35	--	-- PEAK																																																																																
Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 11100.00	47.32	74.00	-26.68	57.44	39.03	18.09	67.56	0.32	--	-- PEAK																																																																																
2 16650.00	49.06	68.20	-19.14	55.78	38.23	22.44	67.74	0.35	--	-- PEAK																																																																																



Mode	29	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11be EHT40_CH110_5550MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL Mode : 29</p>	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL Mode : 29</p>



		30																																																																	
Mode	Band Edge - L																																																																		
	U-NII-2C_5.47-5.725_802.11be EHT40_CH134_5670MHz																																																																		
ANT	D+B+C+A																																																																		
Pol.	Horizontal	Fundamental																																																																	
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5431.28</td> <td>54.76</td> <td>74.00</td> <td>-19.24</td> <td>39.26</td> <td>32.96</td> <td>12.45</td> <td>29.91</td> <td>0.00</td> <td>300</td> <td>138</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5462.96</td> <td>54.55</td> <td>68.20</td> <td>-13.65</td> <td>39.06</td> <td>32.92</td> <td>12.48</td> <td>29.91</td> <td>0.00</td> <td>300</td> <td>138</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5431.28	54.76	74.00	-19.24	39.26	32.96	12.45	29.91	0.00	300	138	PEAK	2	5462.96	54.55	68.20	-13.65	39.06	32.92	12.48	29.91	0.00	300	138	PEAK	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>113.03</td> <td>-----</td> <td>-----</td> <td>97.04</td> <td>33.21</td> <td>12.73</td> <td>29.95</td> <td>0.00</td> <td>300</td> <td>138</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5670.00	113.03	-----	-----	97.04	33.21	12.73	29.95	0.00	300	138	PEAK
	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																																																						
1	5431.28	54.76	74.00	-19.24	39.26	32.96	12.45	29.91	0.00	300	138	PEAK																																																							
2	5462.96	54.55	68.20	-13.65	39.06	32.92	12.48	29.91	0.00	300	138	PEAK																																																							
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																																																							
1	5670.00	113.03	-----	-----	97.04	33.21	12.73	29.95	0.00	300	138	PEAK																																																							
Avg	<p>Site : 03CH02-CA Condition: AVG_BE(UNII)_B3 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5445.36</td> <td>44.88</td> <td>54.00</td> <td>-9.12</td> <td>29.40</td> <td>32.93</td> <td>12.46</td> <td>29.91</td> <td>0.00</td> <td>300</td> <td>138</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5445.36	44.88	54.00	-9.12	29.40	32.93	12.46	29.91	0.00	300	138	AVERAGE	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>105.93</td> <td>-----</td> <td>-----</td> <td>89.92</td> <td>33.23</td> <td>12.73</td> <td>29.95</td> <td>0.00</td> <td>300</td> <td>138</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5670.00	105.93	-----	-----	89.92	33.23	12.73	29.95	0.00	300	138	AVERAGE													
	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																																																						
1	5445.36	44.88	54.00	-9.12	29.40	32.93	12.46	29.91	0.00	300	138	AVERAGE																																																							
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																																																							
1	5670.00	105.93	-----	-----	89.92	33.23	12.73	29.95	0.00	300	138	AVERAGE																																																							



Mode	30																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11be EHT40_CH134_5670MHz																																									
ANT	D+B+C+A																																									
Pol.	Horizontal	Fundamental																																								
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5729.38</td> <td>58.53</td> <td>68.20</td> <td>-9.67</td> <td>42.19</td> <td>33.50</td> <td>12.00</td> <td>29.96</td> <td>0.00</td> <td>300</td> <td>138</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5729.38	58.53	68.20	-9.67	42.19	33.50	12.00	29.96	0.00	300	138	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5729.38	58.53	68.20	-9.67	42.19	33.50	12.00	29.96	0.00	300	138	PEAK																															



Mode	30																																																																		
	Band Edge - L																																																																		
	U-NII-2C_5.47-5.725_802.11be EHT40_CH134_5670MHz																																																																		
ANT	D+B+C+A																																																																		
Pol.	Vertical	Fundamental																																																																	
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5377.20</td> <td>55.15</td> <td>74.00</td> <td>-18.85</td> <td>39.62</td> <td>33.06</td> <td>12.38</td> <td>29.91</td> <td>0.00</td> <td>300</td> <td>289</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5462.32</td> <td>55.57</td> <td>68.20</td> <td>-12.63</td> <td>40.08</td> <td>32.92</td> <td>12.48</td> <td>29.91</td> <td>0.00</td> <td>300</td> <td>289</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5377.20	55.15	74.00	-18.85	39.62	33.06	12.38	29.91	0.00	300	289	PEAK	2	5462.32	55.57	68.20	-12.63	40.08	32.92	12.48	29.91	0.00	300	289	PEAK	<p>Site : 03CH02-CA Condition: PEAK(UNI) 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>117.18</td> <td>-----</td> <td>-----</td> <td>101.17</td> <td>33.23</td> <td>12.73</td> <td>29.95</td> <td>0.00</td> <td>300</td> <td>289</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5670.00	117.18	-----	-----	101.17	33.23	12.73	29.95	0.00	300	289	PEAK
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																																																							
1	5377.20	55.15	74.00	-18.85	39.62	33.06	12.38	29.91	0.00	300	289	PEAK																																																							
2	5462.32	55.57	68.20	-12.63	40.08	32.92	12.48	29.91	0.00	300	289	PEAK																																																							
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																																																							
1	5670.00	117.18	-----	-----	101.17	33.23	12.73	29.95	0.00	300	289	PEAK																																																							
Avg	<p>Site : 03CH02-CA Condition: AVG_BE(UNII)_B3 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5377.20</td> <td>45.92</td> <td>54.00</td> <td>-8.08</td> <td>30.39</td> <td>33.06</td> <td>12.38</td> <td>29.91</td> <td>0.00</td> <td>300</td> <td>289</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5377.20	45.92	54.00	-8.08	30.39	33.06	12.38	29.91	0.00	300	289	AVERAGE	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>109.31</td> <td>-----</td> <td>-----</td> <td>93.30</td> <td>33.23</td> <td>12.73</td> <td>29.95</td> <td>0.00</td> <td>300</td> <td>289</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5670.00	109.31	-----	-----	93.30	33.23	12.73	29.95	0.00	300	289	AVERAGE													
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																																																							
1	5377.20	45.92	54.00	-8.08	30.39	33.06	12.38	29.91	0.00	300	289	AVERAGE																																																							
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																																																							
1	5670.00	109.31	-----	-----	93.30	33.23	12.73	29.95	0.00	300	289	AVERAGE																																																							



Mode	30																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11be EHT40_CH134_5670MHz																																									
ANT	D+B+C+A																																									
Pol.	Vertical	Fundamental																																								
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5729.28</td> <td>64.88</td> <td>68.20</td> <td>-3.32</td> <td>48.54</td> <td>33.50</td> <td>12.00</td> <td>29.96</td> <td>0.00</td> <td>300</td> <td>289</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5729.28	64.88	68.20	-3.32	48.54	33.50	12.00	29.96	0.00	300	289	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5729.28	64.88	68.20	-3.32	48.54	33.50	12.00	29.96	0.00	300	289	PEAK																															



Mode	30																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2C_5.47-5.725_802.11be EHT40_CH134_5670MHz																																																																																																																																	
ANT	D+B+C+A																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																
Peak Avg	<p>Site : 03CH02-CA Condition: PEAK(UNI) 3m HORN_02140_240129 HORIZONTAL Mode : 30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11340.00</td> <td>48.96</td> <td>74.00</td> <td>-25.04</td> <td>59.07</td> <td>39.31</td> <td>18.31</td> <td>68.02</td> <td>0.29</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11340.00</td> <td>38.53</td> <td>54.00</td> <td>-15.47</td> <td>48.64</td> <td>39.31</td> <td>18.31</td> <td>68.02</td> <td>0.29</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17010.00</td> <td>48.59</td> <td>68.20</td> <td>-19.61</td> <td>55.37</td> <td>37.85</td> <td>22.79</td> <td>67.75</td> <td>0.33</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11340.00	48.96	74.00	-25.04	59.07	39.31	18.31	68.02	0.29	--	PEAK	2	11340.00	38.53	54.00	-15.47	48.64	39.31	18.31	68.02	0.29	--	Average	3	17010.00	48.59	68.20	-19.61	55.37	37.85	22.79	67.75	0.33	--	PEAK	<p>Site : 03CH02-CA Condition: PEAK(UNI) 3m HORN_02140_240129 VERTICAL Mode : 30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11340.00</td> <td>48.20</td> <td>74.00</td> <td>-25.80</td> <td>58.31</td> <td>39.31</td> <td>18.31</td> <td>68.02</td> <td>0.29</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11340.00</td> <td>37.68</td> <td>54.00</td> <td>-16.32</td> <td>47.79</td> <td>39.31</td> <td>18.31</td> <td>68.02</td> <td>0.29</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17010.00</td> <td>48.39</td> <td>68.20</td> <td>-19.81</td> <td>55.17</td> <td>37.85</td> <td>22.79</td> <td>67.75</td> <td>0.33</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11340.00	48.20	74.00	-25.80	58.31	39.31	18.31	68.02	0.29	--	PEAK	2	11340.00	37.68	54.00	-16.32	47.79	39.31	18.31	68.02	0.29	--	Average	3	17010.00	48.39	68.20	-19.81	55.17	37.85	22.79	67.75	0.33	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11340.00	48.96	74.00	-25.04	59.07	39.31	18.31	68.02	0.29	--	PEAK																																																																																																																							
2	11340.00	38.53	54.00	-15.47	48.64	39.31	18.31	68.02	0.29	--	Average																																																																																																																							
3	17010.00	48.59	68.20	-19.61	55.37	37.85	22.79	67.75	0.33	--	PEAK																																																																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11340.00	48.20	74.00	-25.80	58.31	39.31	18.31	68.02	0.29	--	PEAK																																																																																																																							
2	11340.00	37.68	54.00	-16.32	47.79	39.31	18.31	68.02	0.29	--	Average																																																																																																																							
3	17010.00	48.39	68.20	-19.81	55.17	37.85	22.79	67.75	0.33	--	PEAK																																																																																																																							



Mode	30	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11be EHT40_CH134_5670MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL Mode : 30</p>	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL Mode : 30</p>







Mode	31																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2C_5.47-5.725_802.11be EHT40_CH142_5710MHz																																																																																																																																	
ANT	D+B+C+A																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																
Peak Avg	<p>Site : 03CH02-CA Condition: PEAK(UNI) 3m HORN_02140_240129 HORIZONTAL Mode : 31</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11420.00</td> <td>48.32</td> <td>74.00</td> <td>-25.68</td> <td>57.99</td> <td>39.34</td> <td>18.38</td> <td>67.67</td> <td>0.28</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11420.00</td> <td>37.78</td> <td>54.00</td> <td>-16.22</td> <td>47.45</td> <td>39.34</td> <td>18.38</td> <td>67.67</td> <td>0.28</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17130.00</td> <td>49.03</td> <td>68.20</td> <td>-19.17</td> <td>55.47</td> <td>38.08</td> <td>22.91</td> <td>67.76</td> <td>0.33</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11420.00	48.32	74.00	-25.68	57.99	39.34	18.38	67.67	0.28	--	PEAK	2	11420.00	37.78	54.00	-16.22	47.45	39.34	18.38	67.67	0.28	--	Average	3	17130.00	49.03	68.20	-19.17	55.47	38.08	22.91	67.76	0.33	--	PEAK	<p>Site : 03CH02-CA Condition: PEAK(UNI) 3m HORN_02140_240129 VERTICAL Mode : 31</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11420.00</td> <td>48.71</td> <td>74.00</td> <td>-25.29</td> <td>58.38</td> <td>39.34</td> <td>18.38</td> <td>67.67</td> <td>0.28</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11420.00</td> <td>38.40</td> <td>54.00</td> <td>-15.52</td> <td>48.15</td> <td>39.34</td> <td>18.38</td> <td>67.67</td> <td>0.28</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17130.00</td> <td>48.53</td> <td>68.20</td> <td>-19.67</td> <td>54.97</td> <td>38.08</td> <td>22.91</td> <td>67.76</td> <td>0.33</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11420.00	48.71	74.00	-25.29	58.38	39.34	18.38	67.67	0.28	--	PEAK	2	11420.00	38.40	54.00	-15.52	48.15	39.34	18.38	67.67	0.28	--	Average	3	17130.00	48.53	68.20	-19.67	54.97	38.08	22.91	67.76	0.33	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11420.00	48.32	74.00	-25.68	57.99	39.34	18.38	67.67	0.28	--	PEAK																																																																																																																							
2	11420.00	37.78	54.00	-16.22	47.45	39.34	18.38	67.67	0.28	--	Average																																																																																																																							
3	17130.00	49.03	68.20	-19.17	55.47	38.08	22.91	67.76	0.33	--	PEAK																																																																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11420.00	48.71	74.00	-25.29	58.38	39.34	18.38	67.67	0.28	--	PEAK																																																																																																																							
2	11420.00	38.40	54.00	-15.52	48.15	39.34	18.38	67.67	0.28	--	Average																																																																																																																							
3	17130.00	48.53	68.20	-19.67	54.97	38.08	22.91	67.76	0.33	--	PEAK																																																																																																																							



Mode	31	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11be EHT40_CH142_5710MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL Mode : 31</p>	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL Mode : 31</p>

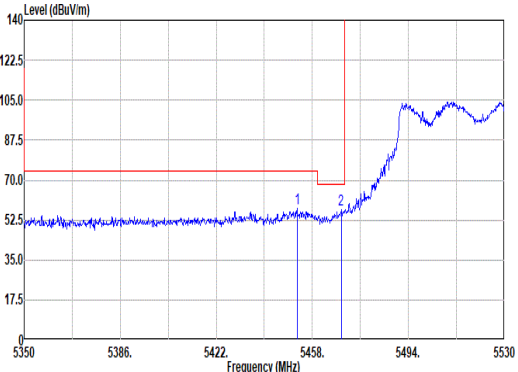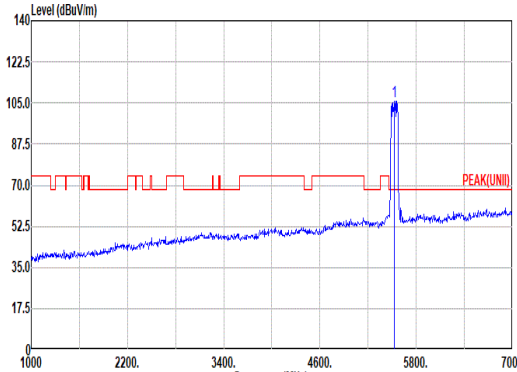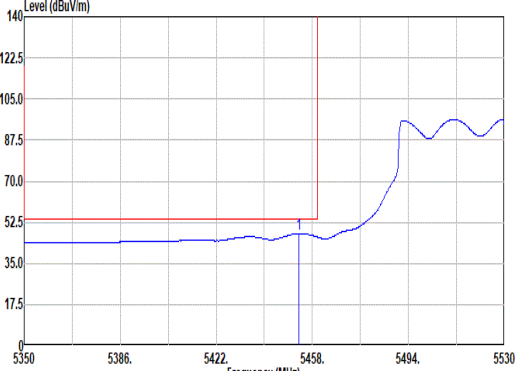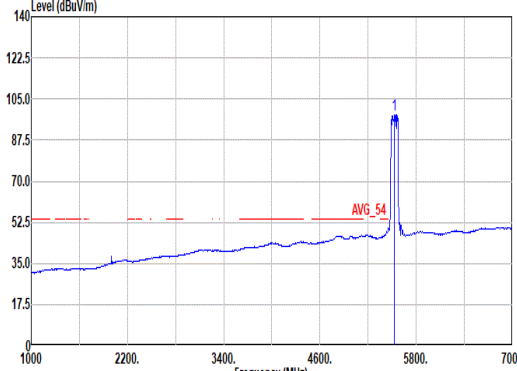

32																																																					
Mode	Band Edge - L																																																				
	U-NII-2C_5.47-5.725_802.11be EHT80_CH106_5530MHz																																																				
ANT	D+B+C+A																																																				
Pol.	Horizontal																																																				
Peak	 <p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBI:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5452.24</td> <td>57.54</td> <td>74.00</td> <td>-16.46</td> <td>42.06</td> <td>32.92</td> <td>12.47</td> <td>29.91</td> <td>0.00</td> <td>240</td> <td>85</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.80</td> <td>57.10</td> <td>68.20</td> <td>-11.10</td> <td>41.60</td> <td>32.92</td> <td>12.49</td> <td>29.91</td> <td>0.00</td> <td>240</td> <td>85</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5452.24	57.54	74.00	-16.46	42.06	32.92	12.47	29.91	0.00	240	85	PEAK	2	5468.80	57.10	68.20	-11.10	41.60	32.92	12.49	29.91	0.00	240	85	PEAK
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																								
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5452.24	57.54	74.00	-16.46	42.06	32.92	12.47	29.91	0.00	240	85	PEAK																																									
2	5468.80	57.10	68.20	-11.10	41.60	32.92	12.49	29.91	0.00	240	85	PEAK																																									
Fundamental	 <p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBI:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>105.72</td> <td>-----</td> <td>-----</td> <td>90.09</td> <td>32.97</td> <td>12.58</td> <td>29.92</td> <td>0.00</td> <td>240</td> <td>85</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5530.00	105.72	-----	-----	90.09	32.97	12.58	29.92	0.00	240	85	PEAK													
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																									
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5530.00	105.72	-----	-----	90.09	32.97	12.58	29.92	0.00	240	85	PEAK																																									
Avg	 <p>Site : 03CH02-CA Condition: AVG_BE(UNII)_B3 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBI:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5452.96</td> <td>47.74</td> <td>54.00</td> <td>-6.26</td> <td>32.26</td> <td>32.92</td> <td>12.47</td> <td>29.91</td> <td>0.00</td> <td>240</td> <td>85</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5452.96	47.74	54.00	-6.26	32.26	32.92	12.47	29.91	0.00	240	85	AVERAGE													
	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																								
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5452.96	47.74	54.00	-6.26	32.26	32.92	12.47	29.91	0.00	240	85	AVERAGE																																									
Avg 54	 <p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBI:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>98.47</td> <td>-----</td> <td>-----</td> <td>82.84</td> <td>32.97</td> <td>12.58</td> <td>29.92</td> <td>0.00</td> <td>240</td> <td>85</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5530.00	98.47	-----	-----	82.84	32.97	12.58	29.92	0.00	240	85	AVERAGE													
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																									
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5530.00	98.47	-----	-----	82.84	32.97	12.58	29.92	0.00	240	85	AVERAGE																																									



Mode	32																																							
	Band Edge - R																																							
	U-NII-2C_5.47-5.725_802.11be EHT80_CH106_5530MHz																																							
ANT	D+B+C+A																																							
Pol.	Horizontal	Fundamental																																						
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5736.10</td> <td>56.70</td> <td>68.20</td> <td>-11.50</td> <td>40.31</td> <td>33.54</td> <td>12.81</td> <td>29.96</td> <td>0.00</td> <td>240 85 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5736.10	56.70	68.20	-11.50	40.31	33.54	12.81	29.96	0.00	240 85 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 5736.10	56.70	68.20	-11.50	40.31	33.54	12.81	29.96	0.00	240 85 PEAK																															



32																																																					
Mode	Band Edge - L																																																				
U-NII-2C_5.47-5.725_802.11be EHT80_CH106_5530MHz																																																					
ANT	D+B+C+A																																																				
Pol.	Vertical																																																				
Peak	Fundamental																																																				
<p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.00</td> <td>61.69</td> <td>74.00</td> <td>-12.31</td> <td>46.20</td> <td>32.92</td> <td>12.48</td> <td>29.91</td> <td>0.00</td> <td>300</td> <td>250</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.52</td> <td>62.65</td> <td>68.20</td> <td>-5.55</td> <td>47.16</td> <td>32.92</td> <td>12.48</td> <td>29.91</td> <td>0.00</td> <td>300</td> <td>250</td> <td>PEAK</td> </tr> </tbody> </table>		Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5459.00	61.69	74.00	-12.31	46.20	32.92	12.48	29.91	0.00	300	250	PEAK	2	5468.52	62.65	68.20	-5.55	47.16	32.92	12.48	29.91	0.00	300	250	PEAK
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5459.00	61.69	74.00	-12.31	46.20	32.92	12.48	29.91	0.00	300	250	PEAK																																									
2	5468.52	62.65	68.20	-5.55	47.16	32.92	12.48	29.91	0.00	300	250	PEAK																																									
<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>113.86</td> <td>-----</td> <td>-----</td> <td>98.20</td> <td>32.99</td> <td>12.59</td> <td>29.92</td> <td>0.00</td> <td>300</td> <td>250</td> <td>PEAK</td> </tr> </tbody> </table>		Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5530.00	113.86	-----	-----	98.20	32.99	12.59	29.92	0.00	300	250	PEAK													
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5530.00	113.86	-----	-----	98.20	32.99	12.59	29.92	0.00	300	250	PEAK																																									
<p>Site : 03CH02-CA Condition: AVG_BE(UNII)_B3 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.98</td> <td>53.06</td> <td>54.00</td> <td>-0.94</td> <td>37.57</td> <td>32.92</td> <td>12.48</td> <td>29.91</td> <td>0.00</td> <td>300</td> <td>250</td> <td>AVERAGE</td> </tr> </tbody> </table>		Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5459.98	53.06	54.00	-0.94	37.57	32.92	12.48	29.91	0.00	300	250	AVERAGE													
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5459.98	53.06	54.00	-0.94	37.57	32.92	12.48	29.91	0.00	300	250	AVERAGE																																									
<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>105.33</td> <td>-----</td> <td>-----</td> <td>89.72</td> <td>32.96</td> <td>12.57</td> <td>29.92</td> <td>0.00</td> <td>300</td> <td>250</td> <td>AVERAGE</td> </tr> </tbody> </table>		Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5530.00	105.33	-----	-----	89.72	32.96	12.57	29.92	0.00	300	250	AVERAGE													
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5530.00	105.33	-----	-----	89.72	32.96	12.57	29.92	0.00	300	250	AVERAGE																																									



Mode	32																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11be EHT80_CH106_5530MHz																																									
ANT	D+B+C+A																																									
Pol.	Vertical	Fundamental																																								
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5740.33</td> <td>54.85</td> <td>68.20</td> <td>-13.35</td> <td>38.43</td> <td>33.56</td> <td>12.82</td> <td>29.96</td> <td>0.00</td> <td>300</td> <td>250</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5740.33	54.85	68.20	-13.35	38.43	33.56	12.82	29.96	0.00	300	250	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5740.33	54.85	68.20	-13.35	38.43	33.56	12.82	29.96	0.00	300	250	PEAK																															







Mode	32																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2C_5.47-5.725_802.11be EHT80_CH106_5530MHz																																																																																																																																	
ANT	D+B+C+A																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																
Peak Avg	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL Mode : 32</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11060.00</td> <td>47.78</td> <td>74.00</td> <td>-26.22</td> <td>57.99</td> <td>38.97</td> <td>18.05</td> <td>67.55</td> <td>0.32</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11060.00</td> <td>37.36</td> <td>54.00</td> <td>-16.64</td> <td>47.57</td> <td>38.97</td> <td>18.05</td> <td>67.55</td> <td>0.32</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16590.00</td> <td>48.95</td> <td>68.20</td> <td>-19.25</td> <td>55.52</td> <td>38.29</td> <td>22.39</td> <td>67.60</td> <td>0.35</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11060.00	47.78	74.00	-26.22	57.99	38.97	18.05	67.55	0.32	--	PEAK	2	11060.00	37.36	54.00	-16.64	47.57	38.97	18.05	67.55	0.32	--	Average	3	16590.00	48.95	68.20	-19.25	55.52	38.29	22.39	67.60	0.35	--	PEAK	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL Mode : 32</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11060.00</td> <td>48.33</td> <td>74.00</td> <td>-25.67</td> <td>58.54</td> <td>38.97</td> <td>18.05</td> <td>67.55</td> <td>0.32</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11060.00</td> <td>37.88</td> <td>54.00</td> <td>-16.12</td> <td>48.09</td> <td>38.97</td> <td>18.05</td> <td>67.55</td> <td>0.32</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16590.00</td> <td>49.03</td> <td>68.20</td> <td>-19.17</td> <td>55.60</td> <td>38.29</td> <td>22.39</td> <td>67.60</td> <td>0.35</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11060.00	48.33	74.00	-25.67	58.54	38.97	18.05	67.55	0.32	--	PEAK	2	11060.00	37.88	54.00	-16.12	48.09	38.97	18.05	67.55	0.32	--	Average	3	16590.00	49.03	68.20	-19.17	55.60	38.29	22.39	67.60	0.35	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11060.00	47.78	74.00	-26.22	57.99	38.97	18.05	67.55	0.32	--	PEAK																																																																																																																							
2	11060.00	37.36	54.00	-16.64	47.57	38.97	18.05	67.55	0.32	--	Average																																																																																																																							
3	16590.00	48.95	68.20	-19.25	55.52	38.29	22.39	67.60	0.35	--	PEAK																																																																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11060.00	48.33	74.00	-25.67	58.54	38.97	18.05	67.55	0.32	--	PEAK																																																																																																																							
2	11060.00	37.88	54.00	-16.12	48.09	38.97	18.05	67.55	0.32	--	Average																																																																																																																							
3	16590.00	49.03	68.20	-19.17	55.60	38.29	22.39	67.60	0.35	--	PEAK																																																																																																																							



Mode	32	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11be EHT80_CH106_5530MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL Mode : 32</p>	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL Mode : 32</p>

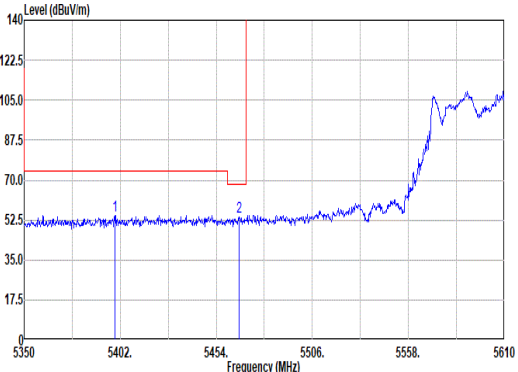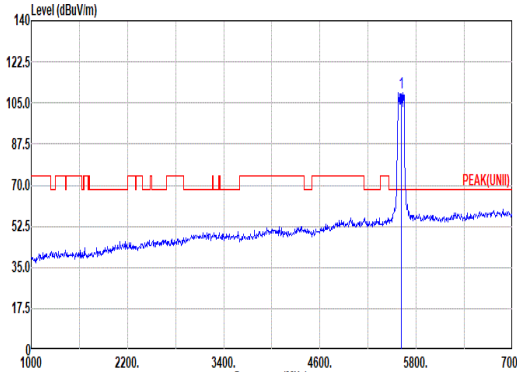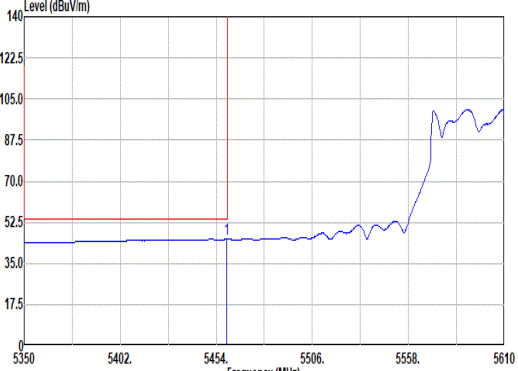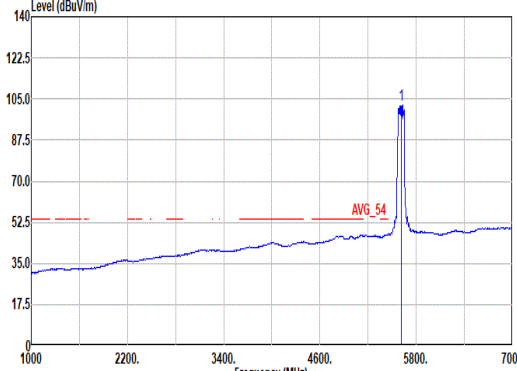

33																																								
Mode	Band Edge - L																																							
U-NII-2C_5.47-5.725_802.11be EHT80_CH122_5610MHz																																								
ANT	D+B+C+A																																							
Pol.	Horizontal																																							
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing two peaks at 5399.14 MHz and 5466.22 MHz. A red limit line is at 74.00 dBuV/m.</p> <p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBI:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5399.14</td> <td>54.57</td> <td>74.00</td> <td>-19.43</td> <td>39.03</td> <td>33.04</td> <td>12.41</td> <td>29.91</td> <td>0.00</td> <td>300</td> <td>146</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5466.22</td> <td>54.10</td> <td>68.20</td> <td>-14.10</td> <td>38.60</td> <td>32.92</td> <td>12.49</td> <td>29.91</td> <td>0.00</td> <td>300</td> <td>146</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5399.14	54.57	74.00	-19.43	39.03	33.04	12.41	29.91	0.00	300	146	PEAK	2	5466.22	54.10	68.20	-14.10	38.60	32.92	12.49	29.91	0.00	300	146	PEAK
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																												
1	5399.14	54.57	74.00	-19.43	39.03	33.04	12.41	29.91	0.00	300	146	PEAK																												
2	5466.22	54.10	68.20	-14.10	38.60	32.92	12.49	29.91	0.00	300	146	PEAK																												
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at 5610.00 MHz. A red limit line is at 109.44 dBuV/m.</p> <p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBI:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>109.44</td> <td>109.44</td> <td>0.00</td> <td>93.74</td> <td>33.01</td> <td>12.61</td> <td>29.92</td> <td>0.00</td> <td>300</td> <td>146</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5610.00	109.44	109.44	0.00	93.74	33.01	12.61	29.92	0.00	300	146	PEAK													
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																												
1	5610.00	109.44	109.44	0.00	93.74	33.01	12.61	29.92	0.00	300	146	PEAK																												
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing an average level at 5459.72 MHz. A red limit line is at 54.00 dBuV/m.</p> <p>Site : 03CH02-CA Condition: AVG_BE(UNII)_B3 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBI:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.72</td> <td>45.29</td> <td>54.00</td> <td>-8.71</td> <td>29.00</td> <td>32.92</td> <td>12.48</td> <td>29.91</td> <td>0.00</td> <td>300</td> <td>146</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5459.72	45.29	54.00	-8.71	29.00	32.92	12.48	29.91	0.00	300	146	AVERAGE													
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																												
1	5459.72	45.29	54.00	-8.71	29.00	32.92	12.48	29.91	0.00	300	146	AVERAGE																												
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing an average level at 5610.00 MHz. A red limit line is at 102.29 dBuV/m.</p> <p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBI:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>102.29</td> <td>102.29</td> <td>0.00</td> <td>86.43</td> <td>33.12</td> <td>12.68</td> <td>29.94</td> <td>0.00</td> <td>300</td> <td>146</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5610.00	102.29	102.29	0.00	86.43	33.12	12.68	29.94	0.00	300	146	AVERAGE													
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																												
1	5610.00	102.29	102.29	0.00	86.43	33.12	12.68	29.94	0.00	300	146	AVERAGE																												



Mode	33																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11be EHT80_CH122_5610MHz																																									
ANT	D+B+C+A																																									
Pol.	Horizontal	Fundamental																																								
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5748.11</td> <td>57.24</td> <td>68.20</td> <td>-10.96</td> <td>40.76</td> <td>33.61</td> <td>12.83</td> <td>29.96</td> <td>0.00</td> <td>300</td> <td>146</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5748.11	57.24	68.20	-10.96	40.76	33.61	12.83	29.96	0.00	300	146	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5748.11	57.24	68.20	-10.96	40.76	33.61	12.83	29.96	0.00	300	146	PEAK																															



33																																																					
Mode	Band Edge - L																																																				
U-NII-2C_5.47-5.725_802.11be EHT80_CH122_5610MHz																																																					
ANT	D+B+C+A																																																				
Pol.	Vertical																																																				
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5438.40</td> <td>57.62</td> <td>74.00</td> <td>-16.38</td> <td>42.13</td> <td>32.95</td> <td>12.45</td> <td>29.91</td> <td>0.00</td> <td>351</td> <td>249</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.58</td> <td>59.44</td> <td>68.20</td> <td>-8.76</td> <td>43.95</td> <td>32.92</td> <td>12.48</td> <td>29.91</td> <td>0.00</td> <td>351</td> <td>249</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5438.40	57.62	74.00	-16.38	42.13	32.95	12.45	29.91	0.00	351	249	PEAK	2	5468.58	59.44	68.20	-8.76	43.95	32.92	12.48	29.91	0.00	351	249	PEAK
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5438.40	57.62	74.00	-16.38	42.13	32.95	12.45	29.91	0.00	351	249	PEAK																																									
2	5468.58	59.44	68.20	-8.76	43.95	32.92	12.48	29.91	0.00	351	249	PEAK																																									
Peak	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>115.53</td> <td>70.00</td> <td>45.53</td> <td>99.71</td> <td>33.10</td> <td>12.66</td> <td>29.94</td> <td>0.00</td> <td>351</td> <td>249</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5610.00	115.53	70.00	45.53	99.71	33.10	12.66	29.94	0.00	351	249	PEAK													
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5610.00	115.53	70.00	45.53	99.71	33.10	12.66	29.94	0.00	351	249	PEAK																																									
Avg	<p>Site : 03CH02-CA Condition: AVG_BE(UNII)_B3 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.98</td> <td>49.46</td> <td>54.00</td> <td>-4.54</td> <td>33.97</td> <td>32.92</td> <td>12.48</td> <td>29.91</td> <td>0.00</td> <td>351</td> <td>249</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5459.98	49.46	54.00	-4.54	33.97	32.92	12.48	29.91	0.00	351	249	AVERAGE													
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5459.98	49.46	54.00	-4.54	33.97	32.92	12.48	29.91	0.00	351	249	AVERAGE																																									
Avg	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>107.93</td> <td>54.00</td> <td>53.93</td> <td>92.23</td> <td>33.02</td> <td>12.61</td> <td>29.93</td> <td>0.00</td> <td>351</td> <td>249</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5610.00	107.93	54.00	53.93	92.23	33.02	12.61	29.93	0.00	351	249	AVERAGE													
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5610.00	107.93	54.00	53.93	92.23	33.02	12.61	29.93	0.00	351	249	AVERAGE																																									



Mode	33																																							
	Band Edge - R																																							
	U-NII-2C_5.47-5.725_802.11be EHT80_CH122_5610MHz																																							
ANT	D+B+C+A																																							
Pol.	Vertical	Fundamental																																						
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5739.43</td> <td>57.85</td> <td>68.20</td> <td>-10.35</td> <td>41.44</td> <td>33.56</td> <td>12.81</td> <td>29.96</td> <td>0.00</td> <td>351 249 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5739.43	57.85	68.20	-10.35	41.44	33.56	12.81	29.96	0.00	351 249 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 5739.43	57.85	68.20	-10.35	41.44	33.56	12.81	29.96	0.00	351 249 PEAK																															



Mode	33																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2C_5.47-5.725_802.11be EHT80_CH122_5610MHz																																																																																																																																	
ANT	D+B+C+A																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																
Peak Avg	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL Mode : 33</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11220.00</td> <td>48.48</td> <td>74.00</td> <td>-25.52</td> <td>58.83</td> <td>39.15</td> <td>18.20</td> <td>68.01</td> <td>0.31</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11220.00</td> <td>37.85</td> <td>54.00</td> <td>-16.15</td> <td>48.20</td> <td>39.15</td> <td>18.20</td> <td>68.01</td> <td>0.31</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16830.00</td> <td>48.26</td> <td>68.20</td> <td>-19.94</td> <td>55.18</td> <td>37.89</td> <td>22.62</td> <td>67.77</td> <td>0.34</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11220.00	48.48	74.00	-25.52	58.83	39.15	18.20	68.01	0.31	--	PEAK	2	11220.00	37.85	54.00	-16.15	48.20	39.15	18.20	68.01	0.31	--	Average	3	16830.00	48.26	68.20	-19.94	55.18	37.89	22.62	67.77	0.34	--	PEAK	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL Mode : 33</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11220.00</td> <td>48.04</td> <td>74.00</td> <td>-25.96</td> <td>58.39</td> <td>39.15</td> <td>18.20</td> <td>68.01</td> <td>0.31</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11220.00</td> <td>37.47</td> <td>54.00</td> <td>-16.53</td> <td>47.82</td> <td>39.15</td> <td>18.20</td> <td>68.01</td> <td>0.31</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16830.00</td> <td>48.59</td> <td>68.20</td> <td>-19.61</td> <td>55.51</td> <td>37.89</td> <td>22.62</td> <td>67.77</td> <td>0.34</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11220.00	48.04	74.00	-25.96	58.39	39.15	18.20	68.01	0.31	--	PEAK	2	11220.00	37.47	54.00	-16.53	47.82	39.15	18.20	68.01	0.31	--	Average	3	16830.00	48.59	68.20	-19.61	55.51	37.89	22.62	67.77	0.34	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11220.00	48.48	74.00	-25.52	58.83	39.15	18.20	68.01	0.31	--	PEAK																																																																																																																							
2	11220.00	37.85	54.00	-16.15	48.20	39.15	18.20	68.01	0.31	--	Average																																																																																																																							
3	16830.00	48.26	68.20	-19.94	55.18	37.89	22.62	67.77	0.34	--	PEAK																																																																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11220.00	48.04	74.00	-25.96	58.39	39.15	18.20	68.01	0.31	--	PEAK																																																																																																																							
2	11220.00	37.47	54.00	-16.53	47.82	39.15	18.20	68.01	0.31	--	Average																																																																																																																							
3	16830.00	48.59	68.20	-19.61	55.51	37.89	22.62	67.77	0.34	--	PEAK																																																																																																																							



Mode	33	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11be EHT80_CH122_5610MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL Mode : 33</p>	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL Mode : 33</p>







Mode	34																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2C_5.47-5.725_802.11be EHT80_CH138_5690MHz																																																																																																																																	
ANT	D+B+C+A																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																
Peak Avg	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL Mode : 34</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11380.00</td> <td>48.64</td> <td>74.00</td> <td>-25.36</td> <td>58.50</td> <td>39.34</td> <td>18.34</td> <td>67.83</td> <td>0.29</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11380.00</td> <td>38.03</td> <td>54.00</td> <td>-15.97</td> <td>47.09</td> <td>39.34</td> <td>18.34</td> <td>67.83</td> <td>0.29</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17070.00</td> <td>47.90</td> <td>68.20</td> <td>-20.30</td> <td>54.54</td> <td>37.93</td> <td>22.85</td> <td>67.75</td> <td>0.33</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11380.00	48.64	74.00	-25.36	58.50	39.34	18.34	67.83	0.29	--	PEAK	2	11380.00	38.03	54.00	-15.97	47.09	39.34	18.34	67.83	0.29	--	Average	3	17070.00	47.90	68.20	-20.30	54.54	37.93	22.85	67.75	0.33	--	PEAK	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL Mode : 34</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11380.00</td> <td>49.03</td> <td>74.00</td> <td>-24.97</td> <td>58.89</td> <td>39.34</td> <td>18.34</td> <td>67.83</td> <td>0.29</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11380.00</td> <td>38.71</td> <td>54.00</td> <td>-15.29</td> <td>48.57</td> <td>39.34</td> <td>18.34</td> <td>67.83</td> <td>0.29</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17070.00</td> <td>49.42</td> <td>68.20</td> <td>-18.78</td> <td>56.06</td> <td>37.93</td> <td>22.85</td> <td>67.75</td> <td>0.33</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11380.00	49.03	74.00	-24.97	58.89	39.34	18.34	67.83	0.29	--	PEAK	2	11380.00	38.71	54.00	-15.29	48.57	39.34	18.34	67.83	0.29	--	Average	3	17070.00	49.42	68.20	-18.78	56.06	37.93	22.85	67.75	0.33	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11380.00	48.64	74.00	-25.36	58.50	39.34	18.34	67.83	0.29	--	PEAK																																																																																																																							
2	11380.00	38.03	54.00	-15.97	47.09	39.34	18.34	67.83	0.29	--	Average																																																																																																																							
3	17070.00	47.90	68.20	-20.30	54.54	37.93	22.85	67.75	0.33	--	PEAK																																																																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11380.00	49.03	74.00	-24.97	58.89	39.34	18.34	67.83	0.29	--	PEAK																																																																																																																							
2	11380.00	38.71	54.00	-15.29	48.57	39.34	18.34	67.83	0.29	--	Average																																																																																																																							
3	17070.00	49.42	68.20	-18.78	56.06	37.93	22.85	67.75	0.33	--	PEAK																																																																																																																							



Mode	34	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11be EHT80_CH138_5690MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL Mode : 34</p>	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL Mode : 34</p>

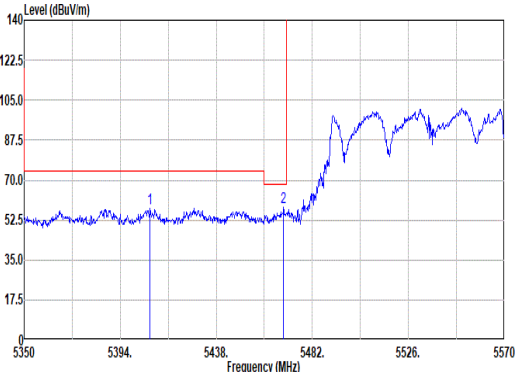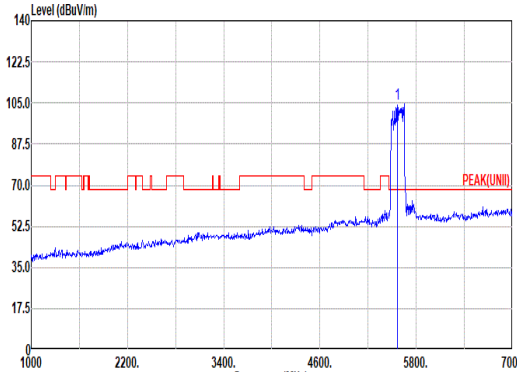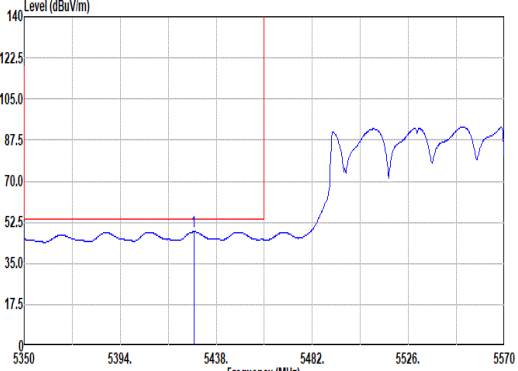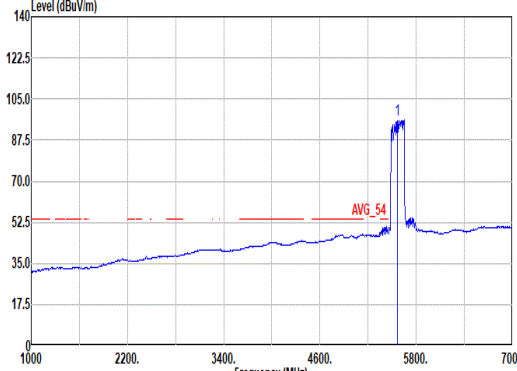

		35																																																																	
Mode	Band Edge - L																																																																		
	U-NII-2C_5.47-5.725_802.11be EHT160_CH114_5570MHz																																																																		
ANT	D+B+C+A																																																																		
Pol.	Horizontal	Fundamental																																																																	
Peak	 <p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBI:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5407.64</td> <td>57.74</td> <td>74.00</td> <td>-16.26</td> <td>42.21</td> <td>33.02</td> <td>12.42</td> <td>29.91</td> <td>0.00</td> <td>256</td> <td>113</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.80</td> <td>58.22</td> <td>68.20</td> <td>-9.98</td> <td>42.72</td> <td>32.92</td> <td>12.49</td> <td>29.91</td> <td>0.00</td> <td>256</td> <td>113</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5407.64	57.74	74.00	-16.26	42.21	33.02	12.42	29.91	0.00	256	113	PEAK	2	5468.80	58.22	68.20	-9.98	42.72	32.92	12.49	29.91	0.00	256	113	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBI:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5570.00</td> <td>104.51</td> <td>70.00</td> <td>34.51</td> <td>88.61</td> <td>33.15</td> <td>12.70</td> <td>29.95</td> <td>0.00</td> <td>256</td> <td>113</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5570.00	104.51	70.00	34.51	88.61	33.15	12.70	29.95	0.00	256	113	PEAK
	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																																																						
1	5407.64	57.74	74.00	-16.26	42.21	33.02	12.42	29.91	0.00	256	113	PEAK																																																							
2	5468.80	58.22	68.20	-9.98	42.72	32.92	12.49	29.91	0.00	256	113	PEAK																																																							
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																																																							
1	5570.00	104.51	70.00	34.51	88.61	33.15	12.70	29.95	0.00	256	113	PEAK																																																							
Avg	 <p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Site : 03CH02-CA Condition: AVG_BE(UNII)_B3 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBI:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5427.66</td> <td>48.46</td> <td>54.00</td> <td>-5.54</td> <td>32.96</td> <td>32.97</td> <td>12.44</td> <td>29.91</td> <td>0.00</td> <td>256</td> <td>113</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5427.66	48.46	54.00	-5.54	32.96	32.97	12.44	29.91	0.00	256	113	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBI:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5570.00</td> <td>95.95</td> <td>52.50</td> <td>43.45</td> <td>80.05</td> <td>33.15</td> <td>12.70</td> <td>29.95</td> <td>0.00</td> <td>256</td> <td>113</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark	1	5570.00	95.95	52.50	43.45	80.05	33.15	12.70	29.95	0.00	256	113	AVERAGE													
	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																																																						
1	5427.66	48.46	54.00	-5.54	32.96	32.97	12.44	29.91	0.00	256	113	AVERAGE																																																							
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (dB)	TPos (cm)	Remark																																																							
1	5570.00	95.95	52.50	43.45	80.05	33.15	12.70	29.95	0.00	256	113	AVERAGE																																																							



Mode	35																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11be EHT160_CH114_5570MHz																																									
ANT	D+B+C+A																																									
Pol.	Horizontal	Fundamental																																								
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5725.03</td> <td>63.15</td> <td>68.20</td> <td>-5.05</td> <td>46.04</td> <td>33.47</td> <td>12.00</td> <td>29.96</td> <td>0.00</td> <td>256</td> <td>113</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5725.03	63.15	68.20	-5.05	46.04	33.47	12.00	29.96	0.00	256	113	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5725.03	63.15	68.20	-5.05	46.04	33.47	12.00	29.96	0.00	256	113	PEAK																															



35																																																																																																						
Mode	Band Edge - L																																																																																																					
U-NII-2C_5.47-5.725_802.11be EHT160_CH114_5570MHz																																																																																																						
ANT	D+B+C+A																																																																																																					
Pol.	Vertical																																																																																																					
Peak	<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p>Site : 03CH02-CA Condition: PEAK_BE(UNII)_B3 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBI:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5433.60</td> <td>62.41</td> <td>74.00</td> <td>-11.59</td> <td>46.91</td> <td>32.96</td> <td>12.45</td> <td>29.91</td> <td>0.00</td> <td>300</td> <td>254</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5462.20</td> <td>61.36</td> <td>68.20</td> <td>-6.84</td> <td>45.87</td> <td>32.92</td> <td>12.48</td> <td>29.91</td> <td>0.00</td> <td>300</td> <td>254</td> <td>PEAK</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBI:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5570.00</td> <td>100.93</td> <td>-----</td> <td>-----</td> <td>93.42</td> <td>32.91</td> <td>12.52</td> <td>29.92</td> <td>0.00</td> <td>300</td> <td>254</td> <td>PEAK</td> </tr> </tbody> </table> </div> </div>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5433.60	62.41	74.00	-11.59	46.91	32.96	12.45	29.91	0.00	300	254	PEAK	2	5462.20	61.36	68.20	-6.84	45.87	32.92	12.48	29.91	0.00	300	254	PEAK		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5570.00	100.93	-----	-----	93.42	32.91	12.52	29.92	0.00	300	254	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5433.60	62.41	74.00	-11.59	46.91	32.96	12.45	29.91	0.00	300	254	PEAK																																																																																										
2	5462.20	61.36	68.20	-6.84	45.87	32.92	12.48	29.91	0.00	300	254	PEAK																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5570.00	100.93	-----	-----	93.42	32.91	12.52	29.92	0.00	300	254	PEAK																																																																																										
Avg	<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p>Site : 03CH02-CA Condition: AVG_BE(UNII)_B3 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBI:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5441.30</td> <td>53.54</td> <td>54.00</td> <td>-0.46</td> <td>38.05</td> <td>32.94</td> <td>12.46</td> <td>29.91</td> <td>0.00</td> <td>300</td> <td>254</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBI:0.010kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5570.00</td> <td>101.34</td> <td>-----</td> <td>-----</td> <td>85.78</td> <td>32.93</td> <td>12.55</td> <td>29.92</td> <td>0.00</td> <td>300</td> <td>254</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> </div>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5441.30	53.54	54.00	-0.46	38.05	32.94	12.46	29.91	0.00	300	254	AVERAGE		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5570.00	101.34	-----	-----	85.78	32.93	12.55	29.92	0.00	300	254	AVERAGE													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5441.30	53.54	54.00	-0.46	38.05	32.94	12.46	29.91	0.00	300	254	AVERAGE																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5570.00	101.34	-----	-----	85.78	32.93	12.55	29.92	0.00	300	254	AVERAGE																																																																																										



Mode	35																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11be EHT160_CH114_5570MHz																																									
ANT	D+B+C+A																																									
Pol.	Vertical	Fundamental																																								
Peak	<p>Site : 03CH02-CA Condition: PEAK_BE(U-NII)_B3 3m HORN_02140_240129 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5740.04</td> <td>62.16</td> <td>68.20</td> <td>-6.04</td> <td>45.74</td> <td>33.56</td> <td>12.82</td> <td>29.96</td> <td>0.00</td> <td>300</td> <td>254</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5740.04	62.16	68.20	-6.04	45.74	33.56	12.82	29.96	0.00	300	254	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5740.04	62.16	68.20	-6.04	45.74	33.56	12.82	29.96	0.00	300	254	PEAK																															



Mode	35																																																																																																																					
	Harmonic																																																																																																																					
	U-NII-2C_5.47-5.725_802.11be EHT160_CH114_5570MHz																																																																																																																					
ANT	D+B+C+A																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																				
Peak Avg	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 HORIZONTAL Mode : 35</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11140.00</td> <td>49.06</td> <td>74.00</td> <td>-24.94</td> <td>59.20</td> <td>39.05</td> <td>18.13</td> <td>67.63</td> <td>0.31</td> <td>-- PEAK</td> </tr> <tr> <td>2 11140.00</td> <td>38.54</td> <td>54.00</td> <td>-15.46</td> <td>48.68</td> <td>39.05</td> <td>18.13</td> <td>67.63</td> <td>0.31</td> <td>-- Average</td> </tr> <tr> <td>3 16710.00</td> <td>48.65</td> <td>68.20</td> <td>-19.55</td> <td>55.44</td> <td>38.11</td> <td>22.50</td> <td>67.75</td> <td>0.35</td> <td>-- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11140.00	49.06	74.00	-24.94	59.20	39.05	18.13	67.63	0.31	-- PEAK	2 11140.00	38.54	54.00	-15.46	48.68	39.05	18.13	67.63	0.31	-- Average	3 16710.00	48.65	68.20	-19.55	55.44	38.11	22.50	67.75	0.35	-- PEAK	<p>Site : 03CH02-CA Condition: PEAK(UNII) 3m HORN_02140_240129 VERTICAL Mode : 35</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11140.00</td> <td>48.19</td> <td>74.00</td> <td>-25.81</td> <td>58.33</td> <td>39.05</td> <td>18.13</td> <td>67.63</td> <td>0.31</td> <td>-- PEAK</td> </tr> <tr> <td>2 11140.00</td> <td>37.65</td> <td>54.00</td> <td>-16.35</td> <td>47.79</td> <td>39.05</td> <td>18.13</td> <td>67.63</td> <td>0.31</td> <td>-- Average</td> </tr> <tr> <td>3 16710.00</td> <td>49.56</td> <td>68.20</td> <td>-18.64</td> <td>56.35</td> <td>38.11</td> <td>22.50</td> <td>67.75</td> <td>0.35</td> <td>-- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11140.00	48.19	74.00	-25.81	58.33	39.05	18.13	67.63	0.31	-- PEAK	2 11140.00	37.65	54.00	-16.35	47.79	39.05	18.13	67.63	0.31	-- Average	3 16710.00	49.56	68.20	-18.64	56.35	38.11	22.50	67.75	0.35	-- PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1 11140.00	49.06	74.00	-24.94	59.20	39.05	18.13	67.63	0.31	-- PEAK																																																																																																													
2 11140.00	38.54	54.00	-15.46	48.68	39.05	18.13	67.63	0.31	-- Average																																																																																																													
3 16710.00	48.65	68.20	-19.55	55.44	38.11	22.50	67.75	0.35	-- PEAK																																																																																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1 11140.00	48.19	74.00	-25.81	58.33	39.05	18.13	67.63	0.31	-- PEAK																																																																																																													
2 11140.00	37.65	54.00	-16.35	47.79	39.05	18.13	67.63	0.31	-- Average																																																																																																													
3 16710.00	49.56	68.20	-18.64	56.35	38.11	22.50	67.75	0.35	-- PEAK																																																																																																													



Mode	35	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11be EHT160_CH114_5570MHz	
ANT	D+B+C+A	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 HORIZONTAL Mode : 35</p>	<p>Site : 03CH02-CA Condition: AVG_54 3m HORN_02140_240129 VERTICAL Mode : 35</p>



Mode	36																																																																																																																																																																																							
	LF																																																																																																																																																																																							
	U-NII-2A_5.25-5.35_802.11be EHT40_CH62_5310MHz																																																																																																																																																																																							
ANT	D+B+C+A																																																																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																																																																						
QP/ Peak	<p>Site : 03CH02-CA Condition: QP 3m LF_HORN_50392_240813 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>31.94</td><td>26.32</td><td>40.00</td><td>-13.68</td><td>34.06</td><td>23.69</td><td>0.95</td><td>32.46</td><td>0.08</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>167.74</td><td>30.86</td><td>43.50</td><td>-12.64</td><td>45.24</td><td>15.84</td><td>2.15</td><td>32.44</td><td>0.07</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>224.97</td><td>28.49</td><td>46.00</td><td>-17.51</td><td>42.57</td><td>15.76</td><td>2.48</td><td>32.43</td><td>0.11</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>498.51</td><td>32.54</td><td>46.00</td><td>-13.46</td><td>37.40</td><td>23.83</td><td>3.73</td><td>32.60</td><td>0.18</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>752.65</td><td>31.86</td><td>46.00</td><td>-14.14</td><td>31.44</td><td>28.09</td><td>4.54</td><td>32.43</td><td>0.22</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>927.25</td><td>32.81</td><td>46.00</td><td>-13.19</td><td>29.33</td><td>29.50</td><td>5.04</td><td>31.42</td><td>0.36</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	31.94	26.32	40.00	-13.68	34.06	23.69	0.95	32.46	0.08	--	--	Peak	2	167.74	30.86	43.50	-12.64	45.24	15.84	2.15	32.44	0.07	--	--	Peak	3	224.97	28.49	46.00	-17.51	42.57	15.76	2.48	32.43	0.11	--	--	Peak	4	498.51	32.54	46.00	-13.46	37.40	23.83	3.73	32.60	0.18	--	--	Peak	5	752.65	31.86	46.00	-14.14	31.44	28.09	4.54	32.43	0.22	--	--	Peak	6	927.25	32.81	46.00	-13.19	29.33	29.50	5.04	31.42	0.36	--	--	Peak	<p>Site : 03CH02-CA Condition: QP 3m LF_HORN_50392_240813 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>46.49</td><td>30.02</td><td>40.00</td><td>-9.98</td><td>45.26</td><td>16.03</td><td>1.12</td><td>32.46</td><td>0.07</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>163.86</td><td>30.19</td><td>43.50</td><td>-13.31</td><td>44.31</td><td>16.13</td><td>2.13</td><td>32.45</td><td>0.07</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>217.21</td><td>25.02</td><td>46.00</td><td>-20.98</td><td>39.97</td><td>14.93</td><td>2.44</td><td>32.43</td><td>0.11</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>495.60</td><td>30.00</td><td>46.00</td><td>-16.00</td><td>34.88</td><td>23.81</td><td>3.72</td><td>32.60</td><td>0.19</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>749.74</td><td>32.25</td><td>46.00</td><td>-13.75</td><td>31.90</td><td>28.04</td><td>4.53</td><td>32.44</td><td>0.22</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>959.26</td><td>33.35</td><td>46.00</td><td>-12.65</td><td>28.20</td><td>30.82</td><td>5.14</td><td>31.18</td><td>0.37</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	46.49	30.02	40.00	-9.98	45.26	16.03	1.12	32.46	0.07	--	--	Peak	2	163.86	30.19	43.50	-13.31	44.31	16.13	2.13	32.45	0.07	--	--	Peak	3	217.21	25.02	46.00	-20.98	39.97	14.93	2.44	32.43	0.11	--	--	Peak	4	495.60	30.00	46.00	-16.00	34.88	23.81	3.72	32.60	0.19	--	--	Peak	5	749.74	32.25	46.00	-13.75	31.90	28.04	4.53	32.44	0.22	--	--	Peak	6	959.26	33.35	46.00	-12.65	28.20	30.82	5.14	31.18	0.37	--	--	Peak
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																																												
1	31.94	26.32	40.00	-13.68	34.06	23.69	0.95	32.46	0.08	--	--	Peak																																																																																																																																																																												
2	167.74	30.86	43.50	-12.64	45.24	15.84	2.15	32.44	0.07	--	--	Peak																																																																																																																																																																												
3	224.97	28.49	46.00	-17.51	42.57	15.76	2.48	32.43	0.11	--	--	Peak																																																																																																																																																																												
4	498.51	32.54	46.00	-13.46	37.40	23.83	3.73	32.60	0.18	--	--	Peak																																																																																																																																																																												
5	752.65	31.86	46.00	-14.14	31.44	28.09	4.54	32.43	0.22	--	--	Peak																																																																																																																																																																												
6	927.25	32.81	46.00	-13.19	29.33	29.50	5.04	31.42	0.36	--	--	Peak																																																																																																																																																																												
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																																												
1	46.49	30.02	40.00	-9.98	45.26	16.03	1.12	32.46	0.07	--	--	Peak																																																																																																																																																																												
2	163.86	30.19	43.50	-13.31	44.31	16.13	2.13	32.45	0.07	--	--	Peak																																																																																																																																																																												
3	217.21	25.02	46.00	-20.98	39.97	14.93	2.44	32.43	0.11	--	--	Peak																																																																																																																																																																												
4	495.60	30.00	46.00	-16.00	34.88	23.81	3.72	32.60	0.19	--	--	Peak																																																																																																																																																																												
5	749.74	32.25	46.00	-13.75	31.90	28.04	4.53	32.44	0.22	--	--	Peak																																																																																																																																																																												
6	959.26	33.35	46.00	-12.65	28.20	30.82	5.14	31.18	0.37	--	--	Peak																																																																																																																																																																												




Mode	37																																																																																																									
	SHF																																																																																																									
	U-NII-2A_5.25-5.35_802.11be EHT40_CH62_5310MHz																																																																																																									
ANT	D+B+C+A																																																																																																									
Pol.	Horizontal	Vertical																																																																																																								
Peak	<p>Site : 03CH02-CA Condition: PEAK_74 1m SHF_HORN_00841_240807 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>25832.00</td> <td>41.47</td> <td>74.00</td> <td>-32.53</td> <td>35.06</td> <td>38.81</td> <td>29.21</td> <td>52.87</td> <td>-9.54</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>39758.00</td> <td>53.89</td> <td>74.00</td> <td>-20.11</td> <td>36.53</td> <td>43.86</td> <td>36.81</td> <td>53.77</td> <td>-9.54</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	25832.00	41.47	74.00	-32.53	35.06	38.81	29.21	52.87	-9.54	--	--	Peak	2	39758.00	53.89	74.00	-20.11	36.53	43.86	36.81	53.77	-9.54	--	--	Peak	<p>Site : 03CH02-CA Condition: PEAK_74 1m SHF_HORN_00841_240807 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>25942.00</td> <td>40.84</td> <td>74.00</td> <td>-33.16</td> <td>35.16</td> <td>38.83</td> <td>29.32</td> <td>52.93</td> <td>-9.54</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>39274.00</td> <td>54.44</td> <td>74.00</td> <td>-19.56</td> <td>36.29</td> <td>45.17</td> <td>36.28</td> <td>53.76</td> <td>-9.54</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	25942.00	40.84	74.00	-33.16	35.16	38.83	29.32	52.93	-9.54	--	--	Peak	2	39274.00	54.44	74.00	-19.56	36.29	45.17	36.28	53.76	-9.54	--	--	Peak
	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																															
1	25832.00	41.47	74.00	-32.53	35.06	38.81	29.21	52.87	-9.54	--	--	Peak																																																																																														
2	39758.00	53.89	74.00	-20.11	36.53	43.86	36.81	53.77	-9.54	--	--	Peak																																																																																														
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																															
1	25942.00	40.84	74.00	-33.16	35.16	38.83	29.32	52.93	-9.54	--	--	Peak																																																																																														
2	39274.00	54.44	74.00	-19.56	36.29	45.17	36.28	53.76	-9.54	--	--	Peak																																																																																														



Appendix C. Duty Cycle Plots


Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
4Tx	802.11a	98.50	1970	0.51	10Hz
4Tx	5GHz 802.11be EHT20	99.63	5450	0.18	10Hz
4Tx	5GHz 802.11be EHT40	99.73	5450	0.18	10Hz
4Tx	5GHz 802.11be EHT80	99.54	5445	0.18	10Hz
4Tx	5GHz 802.11be EHT160	99.63	5450	0.18	10Hz

MIMO <Ant. 4Tx>

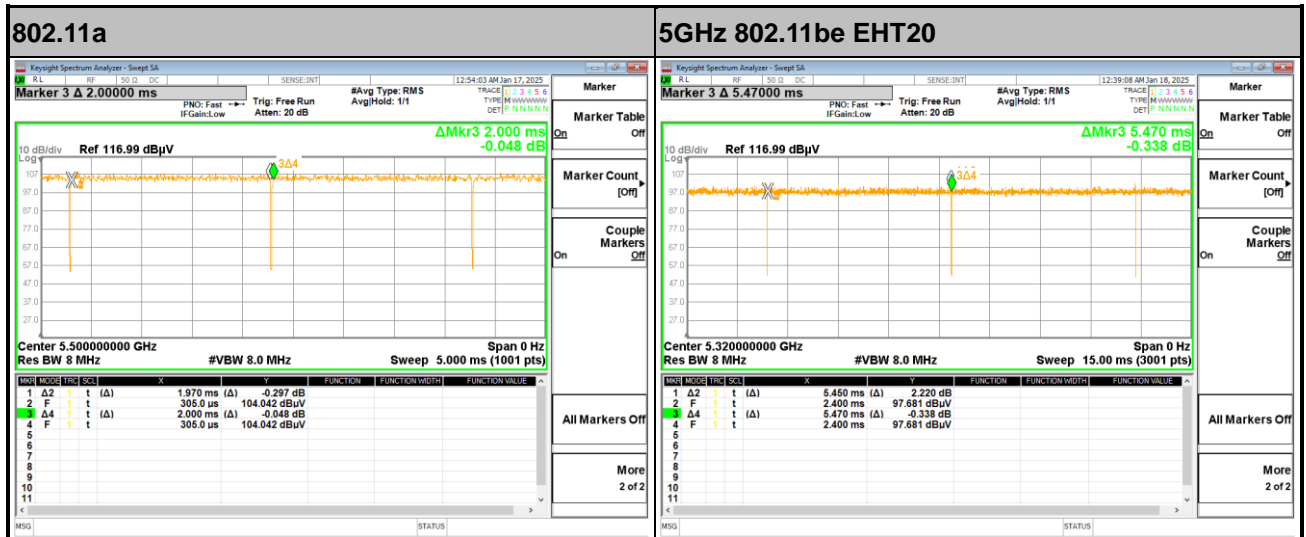




5GHz 802.11be EHT40

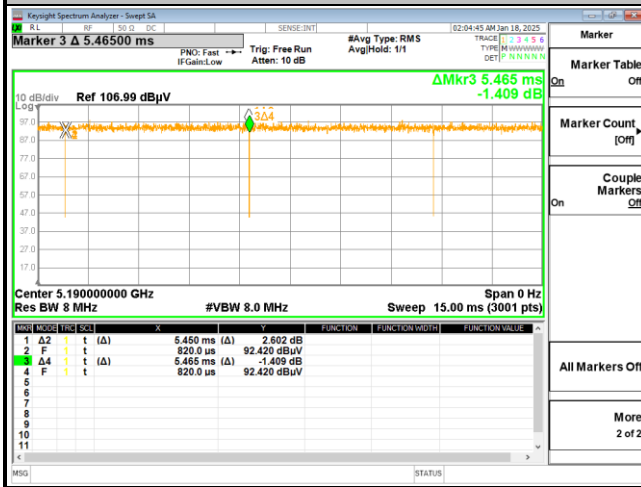

5GHz 802.11be EHT80

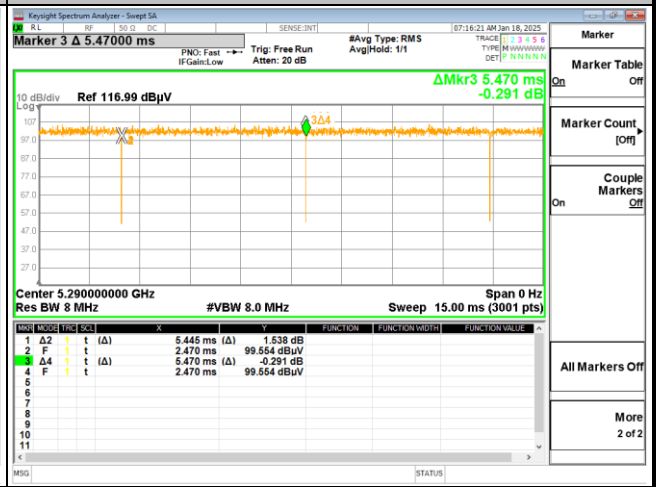

5GHz 802.11be EHT160

