



FCC RADIO TEST REPORT

FCC ID : S9GT670SN
Equipment : T670sn Access Point
Brand Name : RUCKUS
Model Name : T670sn
Applicant : Ruckus Wireless, LLC
350 W. Java Dr., Sunnyvale CA 94089 USA
Manufacturer : Ruckus Wireless, LLC
350 W. Java Dr., Sunnyvale CA 94089 USA
Standard : FCC Part 15 Subpart E §15.407

The product was received on Jun. 12, 2024 and testing was performed from Aug. 01, 2024 to Feb. 27, 2025. We, Sporton International (USA) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International (USA) Inc., the test report shall not be reproduced except in full.

Approved by: Neil Kao

Sporton International (USA) Inc.
1175 Montague Expressway, Milpitas, CA 95035



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	11
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	12
3 Test Result	13
3.1 26dB & 99% Occupied Bandwidth Measurement	13
3.2 Fundamental Maximum EIRP Measurement	14
3.3 Fundamental Power Spectral Density Measurement	15
3.4 In-Band Emissions (Channel Mask)	17
3.5 Unwanted Emissions Measurement.....	19
3.6 AC Conducted Emission Measurement.....	24
3.7 Antenna Requirements.....	26
4 List of Measuring Equipment.....	27
5 Measurement Uncertainty	28
Appendix A. Conducted Test Results.....	30
Appendix B. AC Conducted Emission Test Result.....	73
Appendix C. Radiated Spurious Emission.....	76
Appendix D. Radiated Spurious Emission Plots.....	129
Appendix E. Duty Cycle Plots.....	232
Appendix F. Setup Photographs.....	234



History of this test report

Report No.	Version	Description	Issue Date
FR240524001D	01	Initial issue of report	Mar. 21, 2025
FR240524001D	02	Revise Summary of Test Result This report is an updated version, replacing the report issued on Mar. 21, 2025.	Mar. 26, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.407(a)(10)	26dB Emission Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.407(a)(4)	Fundamental Maximum EIRP	Pass	-
3.3	15.407(a)(4)	Fundamental Power Spectral Density	Pass	-
3.4	15.407(b)(6)	In-Band Emissions (Channel Mask)	Pass	-
-	15.407(d)(6)	Contention Based Protocol	Not Required	Not applicable for Standard Access Points
3.5	15.407(b)	Unwanted Emissions	Pass	-
3.6	15.207	AC Conducted Emission	Pass	-
3.7	15.203 15.407(a)	Antenna Requirement	Pass	-
Note: Not required means after assessing, test items are not necessary to carry out.				

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs	Wi-Fi 2.4GHz 802.11b/g/n/ac/ax/be, Wi-Fi 5GHz 802.11a/n/ac/ax/be, Wi-Fi 6GHz 802.11a/n/ac/ax/be and GNSS.
Antenna Type	
WLAN:	
<Ant. V6S >:	Sector Antenna
<Ant. H6S >:	Sector Antenna

Antenna information (Sector Mode)			
5925 MHz ~ 6425 MHz	Peak Gain (dBi)	Vertical	<Ant. V6S>: 8.35
		Horizontal	<Ant. H6S>: 8.89
6525 MHz ~ 6875 MHz	Peak Gain (dBi)	Vertical	<Ant. V6S>: 7.24
		Horizontal	<Ant. H6S>: 8.17

Antenna information (Sector Mode), 30 degrees above horizon			
5925 MHz ~ 6425 MHz	Peak Gain (dBi)	Vertical	<Ant. V6S>: -5.27
		Horizontal	<Ant. H6S>: -2.81
6525 MHz ~ 6875 MHz	Peak Gain (dBi)	Vertical	<Ant. V6S>: -6.92
		Horizontal	<Ant. H6S>: -2.52

Remark:

1. The device is a special case of MIMO system with two outputs driving a cross-polarized pair of linearly polarized antennas which are vertically/horizontally mounted on the PCB board as indicated in equipment photo exhibits.
2. Horizontal and vertical antennas are cross-polarized antennas and the transmitting outputs are a 90-degree phase-shifted replica against the other and the phase centers of the two antennas' orientation are co-located.
3. Directional gain of EHT320 is determined by maximum gain of each occupied frequency band.
4. The EUT information mentioned or listed above is declared by the manufacturer.

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

Test Site	Sporton International (USA) Inc.
Test Site Location	1175 Montague Expressway, Milpitas, CA 95035 TEL : 408 9043300
Test Site No.	Sporton Site No.
	TH01-CA, 03CH01-CA, CO01-CA

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: US1250

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark: All the test items were validated and recorded in accordance with the standards without any modification during the testing.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

BW 20M	Channel	1	5	9	13	17	21	25	29
	Freq. (MHz)	5955	5975	5995	6015	6035	6055	6075	6095
BW 40M	Channel	3		11		19		27	
	Freq. (MHz)	5965		6005		6045		6085	
BW 80M	Channel	7				23			
	Freq. (MHz)	5985				6065			
BW 160M	Channel	15							
	Freq. (MHz)	6025							
BW 320M	Channel	31							
	Freq. (MHz)	6105							

BW 20M	Channel	33	37	41	45	49	53	57	61
	Freq. (MHz)	6115	6135	6155	6175	6195	6215	6235	6255
BW 40M	Channel	35		43		51		59	
	Freq. (MHz)	6125		6165		6205		6245	
BW 80M	Channel	39				55			
	Freq. (MHz)	6145				6225			
BW 160M	Channel	47							
	Freq. (MHz)	6185							
BW 320M	Channel	63							
	Freq. (MHz)	6265							



BW 20M	Channel	65	69	73	77	81	85	89	93
	Freq. (MHz)	6275	6295	6315	6335	6355	6375	6395	6415
BW 40M	Channel	67		75		83		91	
	Freq. (MHz)	6285		6325		6365		6405	
BW 80M	Channel	71				87			
	Freq. (MHz)	6305				6385			
BW 160M	Channel	79							
	Freq. (MHz)	6345							

BW 20M	Channel	117	121	125
	Freq. (MHz)	6535	6555	6575
BW 40M	Channel	-		123
	Freq. (MHz)	-		6565

BW 20M	Channel	129	133	137	141	145	149	153	157
	Freq. (MHz)	6595	6615	6635	6655	6675	6695	6715	6735
BW 40M	Channel	131		139		147		155	
	Freq. (MHz)	6605		6645		6685		6725	
BW 80M	Channel	135				151			
	Freq. (MHz)	6625				6705			
BW 160M	Channel	143							
	Freq. (MHz)	6665							

BW 20M	Channel	161	165	169	173	177	181
	Freq. (MHz)	6755	6775	6795	6815	6835	6855
BW 40M	Channel	163		171		179	
	Freq. (MHz)	6765		6805		6845	
BW 80M	Channel	167			-		
	Freq. (MHz)	6785			-		

2.2 Test Mode

The final test modes include the worst data rates for each modulation shown in the table below.

MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20 (Covered by EHT20)	MCS0
802.11n HT40 (Covered by EHT40)	MCS0
802.11ac VHT20 (Covered by EHT20)	MCS0
802.11ac VHT40 (Covered by EHT40)	MCS0
802.11ac VHT80 (Covered by EHT80)	MCS0
802.11ac VHT160 (Covered by EHT160)	MCS0
802.11ax HE20 (Covered by EHT20)	MCS0
802.11ax HE40 (Covered by EHT40)	MCS0
802.11ax HE80 (Covered by EHT80)	MCS0
802.11ax HE160 (Covered by EHT160)	MCS0
802.11be EHT20	MCS0
802.11be EHT40	MCS0
802.11be EHT80	MCS0
802.11be EHT160	MCS0
802.11be EHT320	MCS0

Remark:

- 1 Based on the manufacturer's declaration, 802.11be covers the 802.11n, 11ac and 11ax due to the same modulation family scheme. For 802.11be, only full resource unit assignment mode is tested since the EUT does not support partial resource unit assignment mode.
- 2 Based on the manufacturer's declaration, RF power on each chain in MIMO mode is parameterized to be greater than the power in SISO mode, giving the condition that the SISO Mode is covered by MIMO Mode which is deemed the worst case selected for testing.
- 3 The EUT information mentioned or listed above is declared by the manufacturer.

Test Cases	
AC Conducted Emission	Mode 1 : WLAN (6GHz) Link + Lan port 1 + Lan port 2 + PoE Adapter

Ch. #		UNII-5 (5925-6425 MHz)	UNII-7 (6525-6875 MHz)
		802.11a	802.11a
L	Low	001	117
M	Middle	049	149
H	High	093	181


Ch. #		UNII-5 (5925-6425 MHz)			
		802.11be EHT20	802.11be EHT40	802.11be EHT80	802.11be EHT160
L	Low	001	003	007	015
M	Middle	049	051	055	047
H	High	093	091	087	079

Ch. #		UNII-7 (6525-6875 MHz)			
		802.11be EHT20	802.11be EHT40	802.11be EHT80	802.11be EHT160
L	Low	117	123	135	143
M	Middle	149	147	151	
H	High	181	179	167	

Ch. #		UNII-5 (5925-6425 MHz)
		802.11be EHT320
L	Low	31
M	Middle	63
H	High	-

Remark: Based on ANSI C63.10 clause 5.6.2.2, b) Spurious emissions, measure the mode with the highest output power and the mode with highest output power spectral density for each modulation family.

2.3 Connection Diagram of Test System

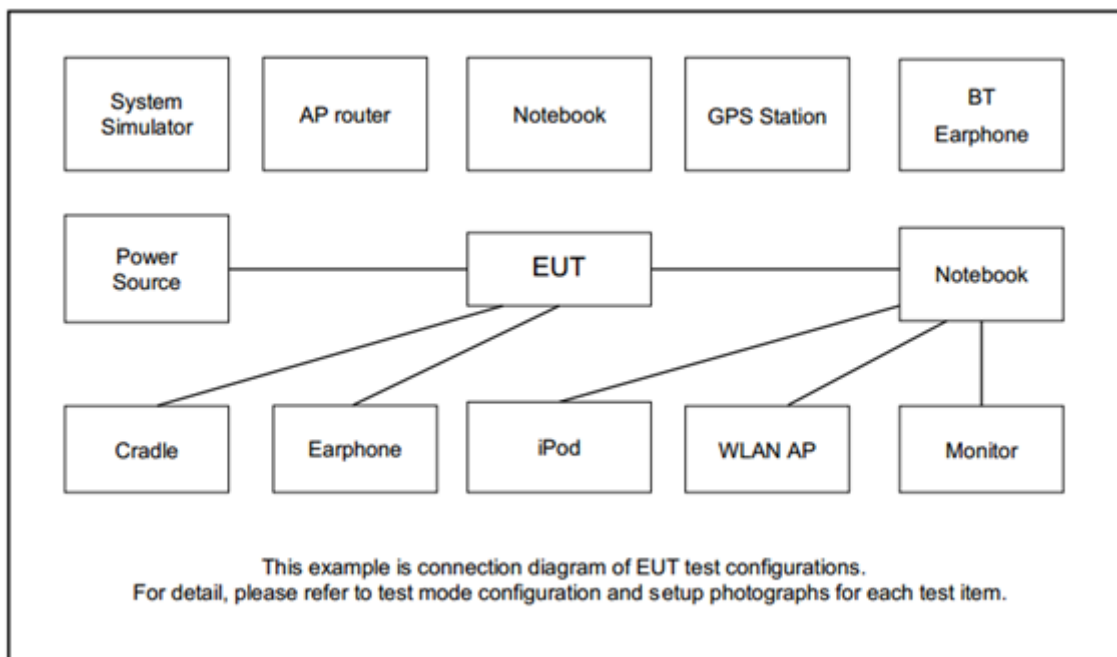

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Dell	Latitude 5410	N/A	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
2.	Notebook	Dell	Latitude E7470	N/A	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	PoE Adapter	RUCKUS	740-64310-001	N/A	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “Tera Term Version 4.95” and “QSPR Version 6.00.00143.1” were installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Limit of 26dB & 99% Occupied Bandwidth

<FCC 14-30 CFR 15.407>

(a)(10) The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

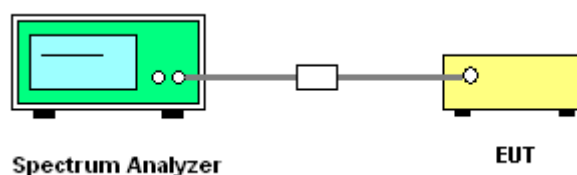

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Fundamental Maximum EIRP Measurement

3.2.1 Limit of Fundamental Maximum EIRP

<FCC 14-30 CFR 15.407>

(a)(4) For a standard power access point and fixed client device operating in the 5.925–6.425 GHz and 6.525–6.875 GHz bands, the maximum power spectral density must not exceed 23 dBm e.i.r.p in any 1-megahertz band. In addition, the maximum e.i.r.p. over the frequency band of operation must not exceed 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

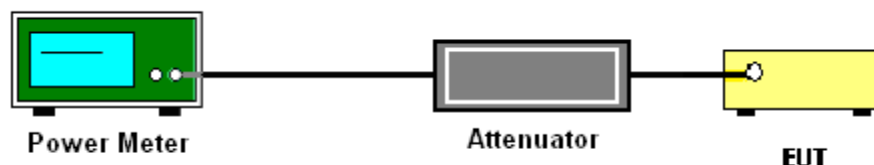

3.2.5 Test Result of Fundamental Maximum EIRP

Please refer to Appendix A.

3.3 Fundamental Power Spectral Density Measurement

3.3.1 Limit of Fundamental Power Spectral Density

<FCC 14-30 CFR 15.407>

(a)(4) For a standard power access point and fixed client device operating in the 5.925–6.425 GHz and 6.525–6.875 GHz bands, the maximum power spectral density must not exceed 23 dBm e.i.r.p in any 1-megahertz band.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.

Method SA-1


(trace averaging with the EUT transmitting at full power throughout each sweep).

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - The EUT transmits continuously (duty cycle $\geq$ 98%).
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points; the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

3.3.4 Test Setup

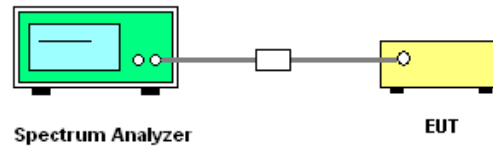

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



3.4 In-Band Emissions (Channel Mask)

3.4.1 Limit of Unwanted Emissions

<FCC 14-30 CFR 15.407>

(a)(6) For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.4.3 Test Procedures

The testing follows FCC KDB 987594 D02 U-NII 6GHz EMC Measurement v03.

Section J) In-Band Emissions.

1. Take nominal bandwidth as reference channel bandwidth provided that 26 dB emission bandwidth is always larger than nominal bandwidth
2. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
3. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a. Suppressed by 20 dB at 1 MHz outside of the channel edge.
 - b. Suppressed by 28 dB at one channel bandwidth from the channel center.
 - c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
4. Adjust the span to encompass the entire mask as necessary.
5. Clear trace.
6. Trace average at least 100 traces in power averaging (rms) mode.
7. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

3.4.4 Test Setup

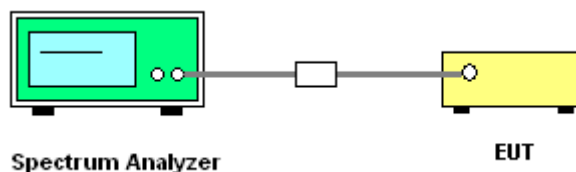

3.4.5 Test Result

Please refer to Appendix A

3.5 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.5.1 Limit of Unwanted Emissions

- (1) For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27 (RMS)	68.3
- 7 (Peak)	88.3

According 987594 D02 U-NII 6GHz EMC Measurement v03 section G:

Unwanted emissions outside of restricted bands are measured with a RMS detector.

In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.5.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
(1) Procedure for Unwanted Emissions Measurements Below 1000 MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.


7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.

3.5.4 Test Setup


For radiated emissions below 30MHz

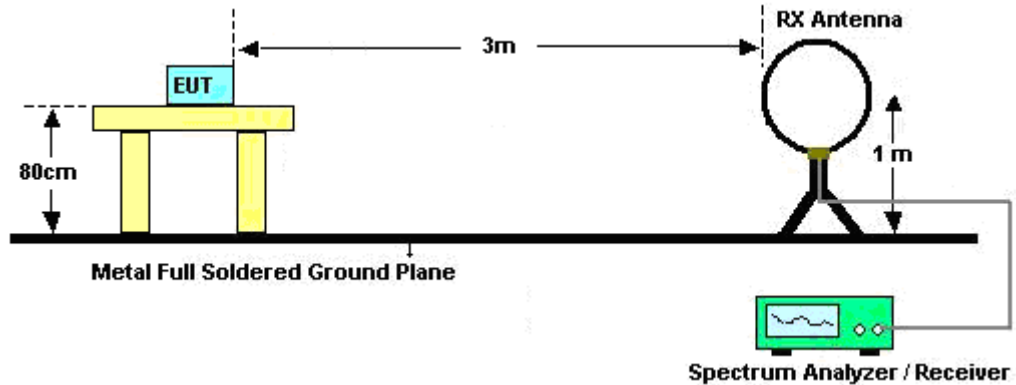


For radiated emissions from 30MHz to 1GHz

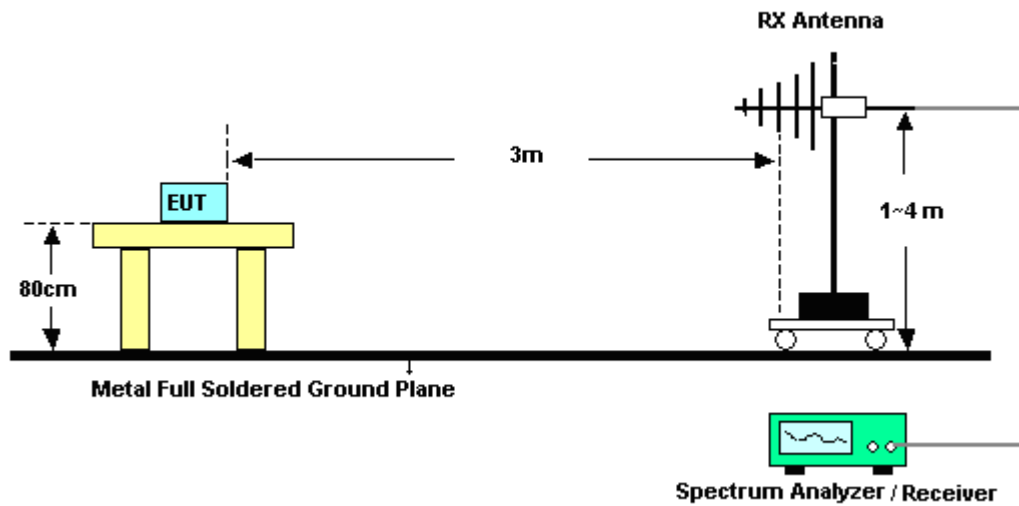

For radiated test from 1GHz to 18GHz

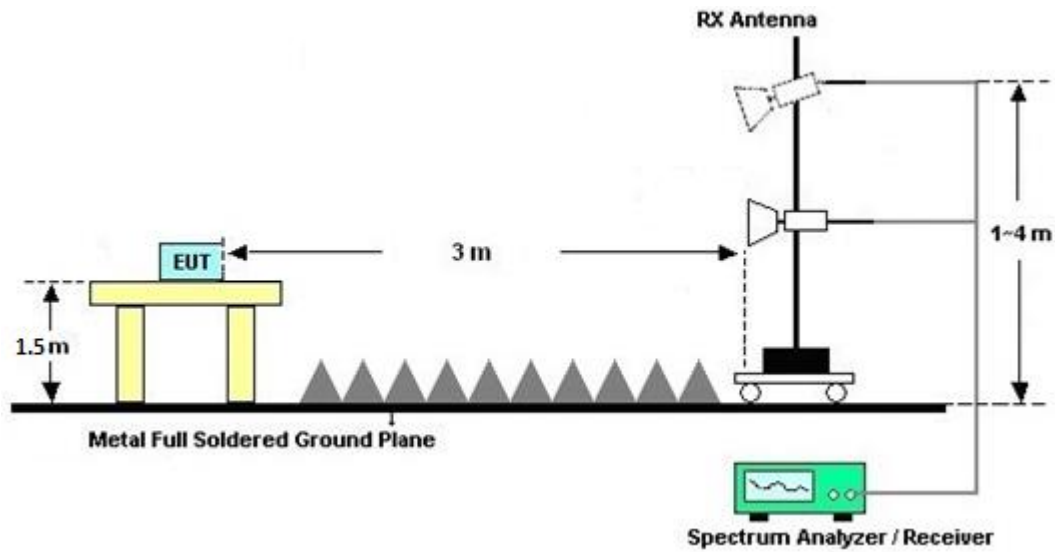

For radiated test above 18GHz

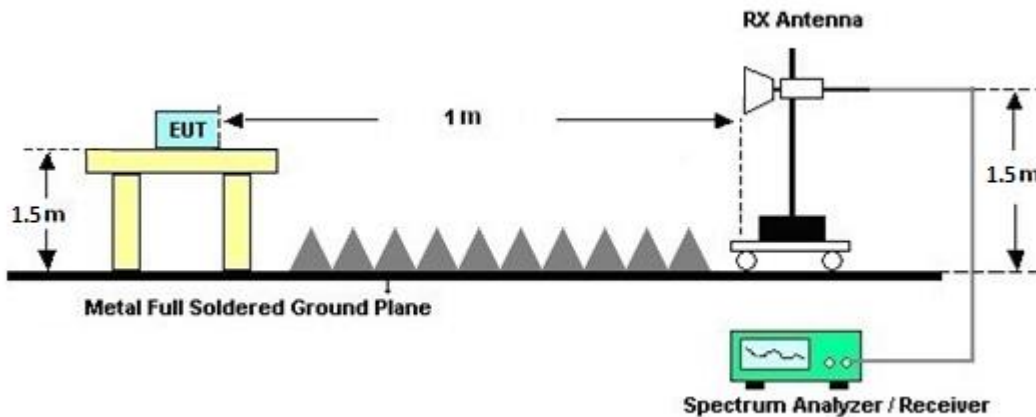

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.6.4 Test Setup

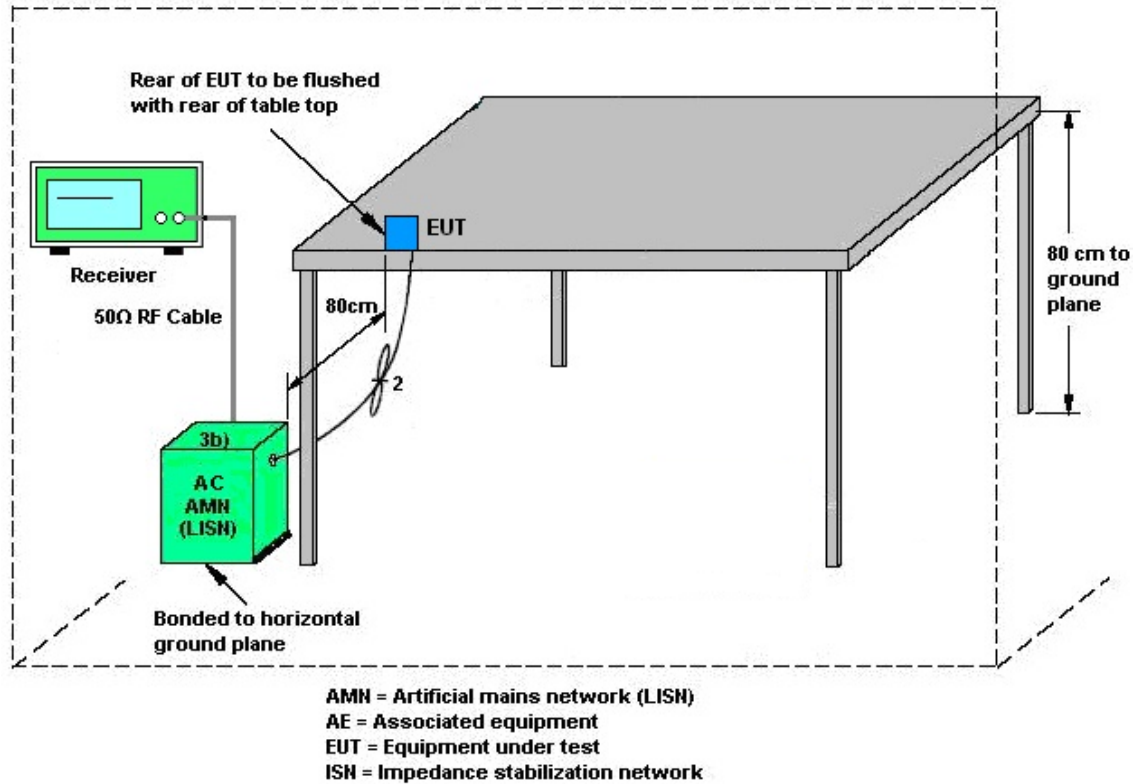

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H1	45142559	N/A	Aug. 14, 2024	Aug. 15, 2024~ Dec.09, 2024	Aug. 13, 2025	Conducted (TH01-CA)
Hygrometer	Testo	608-H1	45142559	N/A	Aug. 30, 2023	Aug. 12, 2024~ Aug.15, 2024	Aug. 29, 2024	Conducted (TH01-CA)
Power Sensor	DARE!!	RPR3006W	RPR8W-2301 002	10MHz-8GHz	Apr. 25, 2024	Aug. 12, 2024~ Dec.09, 2024	Apr. 24, 2025	Conducted (TH01-CA)
Switch Box	EM Electronics	EMSW18	SW1070901	N/A	Apr. 25, 2024	Aug. 12, 2024~ Dec.09, 2024	Apr. 24, 2025	Conducted (TH01-CA)
Spectrum Analyzer	Rohde & Schwarz	FSW43	104042	2Hz~43GHz	Dec. 22, 2023	Aug. 12, 2024~ Dec. 09, 2024	Dec. 21, 2024	Conducted (TH01-CA)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101545	10Hz-40GHz	Apr. 25, 2024	Aug. 12, 2024~ Dec. 09, 2024	Apr. 24, 2025	Conducted (TH01-CA)
LISN	TESEQ	NNB51	47415	N/A	Aug. 14, 2024	Feb. 27, 2025	Aug. 13, 2025	Conduction (CO01-CA)
LISN	TESEQ	NNB51	47407	N/A	Apr. 23, 2024	Feb. 27, 2025	Apr. 22, 2025	Conduction (CO01-CA)
EMI Test Receiver	R&S	ESR7	102177	9kHz~7GHz	Apr. 23, 2024	Feb. 27, 2025	Apr. 22, 2025	Conduction (CO01-CA)
Pulse limiter with 10dB attenuation	R&S	VTSD 9561-F N	9561-F- N00412	N/A	Jun. 04, 2024	Feb. 27, 2025	Jun. 03, 2025	Conduction (CO01-CA)
LISN Cable	HUBER+SUHNER	RG-214/U	LISN cable -01	N/A	Jun. 04, 2024	Feb. 27, 2025	Jun. 03, 2025	Conduction (CO01-CA)
Test Software	R&S	EMC32 V10.30.0	N/A	N/A	N/A	Feb. 27, 2025	N/A	Conduction (CO01-CA)
Bilog Antenna	TESEQ	6111D	50392	30MHz~1GHz	Aug.13, 2024	Nov. 27, 2024	Aug. 12, 2025	Radiation (03CH01-CA)
Loop Antenna	R&S	HFH2-Z2E	100840	9kHz~30MHz	May 02, 2024	Aug. 01, 2024~ Nov. 30, 2024	May 01, 2025	Radiation (03CH01-CA)
Horn Antenna	SCHWARZBECK	BBHA 9120D	02113	1GHz~18GHz	Apr. 26, 2024	Aug. 01, 2024~ Nov. 30, 2024	Apr. 25, 2025	Radiation (03CH01-CA)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00841	18GHz~40GHz	Aug. 07, 2024	Aug. 01, 2024~ Nov. 30, 2024	Aug. 06, 2025	Radiation (03CH01-CA)
Preamplifier	SONOMA	310N	372241	9kHz~1GHz	Apr. 24, 2024	Nov. 27, 2024	Apr. 23, 2025	Radiation (03CH01-CA)
Preamplifier	E-instrument	ERA-100M-18 G-56-01-A70	EC1900252	1GHz~18GHz	Apr. 25, 2024	Aug. 01, 2024~ Nov. 30, 2024	Apr. 24, 2025	Radiation (03CH01-CA)
Preamplifier	Keysight	83017A	MY53270321	1GHz~26.5GHz	Apr. 25, 2024	Aug. 01, 2024~ Nov. 30, 2024	Apr. 24, 2025	Radiation (03CH01-CA)
Preamplifier	EMEC	EMC18G40G	060726	18G-40G	Apr. 04, 2024	Aug. 01, 2024~ Nov. 30, 2024	Apr. 03, 2025	Radiation (03CH01-CA)
Filter	Wainwright	WLK12-1200-1 272-11000-40 SS	SN1	1.2GHz Low Pass Filter	Jun. 04, 2024	Aug. 01, 2024~ Nov. 30, 2024	Jun. 03, 2025	Radiation (03CH01-CA)
Filter	Warison	WFIL-H8000-2 5000F-01	WR32BNW2B 2	8GHz High Pass Filter	Jun. 04, 2024	Aug. 01, 2024~ Nov. 30, 2024	Jun. 03, 2025	Radiation (03CH01-CA)
Spectrum Analyzer	Keysight	N9010B	MY63440343	MY63440343	Jan. 16, 2024	Aug. 01, 2024~ Nov. 30, 2024	Jan. 15, 2025	Radiation (03CH01-CA)
RF Cable	HUBER+SUHNER	SUCOFLEX 102	8015932/2,80 15762/2, 804938/2	NA	Mar. 05, 2024	Aug. 01, 2024~ Nov. 30, 2024	Mar. 04, 2025	Radiation (03CH01-CA)
Hygrometer	TESTO	608-H1	45142559	NA	Aug. 30, 2023	Aug. 01, 2024~ Aug. 13, 2024	Aug. 29, 2024	Radiation (03CH01-CA)
Hygrometer	TESTO	608-H1	45142559	NA	Aug. 14, 2024	Aug. 14, 2024~ Nov. 30, 2024	Aug. 13, 2025	Radiation (03CH01-CA)
Controller	Chaintek	EM-1000	060881	Control Turn Table & Antenna Mast	N/A	Aug. 01, 2024~ Nov. 30, 2024	N/A	Radiation (03CH01-CA)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Aug. 01, 2024~ Nov. 30, 2024	N/A	Radiation (03CH01-CA)
Test Software	Audix E3	E6.2009-8-24d	PK-002093	N/A	N/A	Aug. 01, 2024~ Nov. 30, 2024	N/A	Radiation (03CH01-CA)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.2 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
--	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Sharon Chen,Ju Chang	Temperature:	18.9-25.2	°C
Test Date:	2024/08/12~2024/12/09	Relative Humidity:	29-57.7	%

TEST RESULTS DATA
26dB and 99% OBW

U-NII-5 MIMO antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
					Ant 2	Ant 4	Ant 2	Ant 4		
11a	6Mbps	2	001	5955	17.08	17.03	23.176	23.024	320.00	Pass
11a	6Mbps	2	049	6195	17.07	16.99	23.144	23.032	320.00	Pass
11a	6Mbps	2	093	6415	17.08	16.99	22.512	22.464	320.00	Pass

TEST RESULTS DATA
EIRP Power Table

U-NII-5 MIMO antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
					Ant 2	Ant 4	SUM	Ant 2	Ant 4	Ant 2	Ant 4		
11a	6Mbps	2	001	5955	22.14	22.10		8.35	8.89	30.49	30.99	36.00	Pass
11a	6Mbps	2	049	6195	21.12	22.12		8.35	8.89	29.47	31.01	36.00	Pass
11a	6Mbps	2	093	6415	21.58	22.26		8.35	8.89	29.93	31.15	36.00	Pass
HT20	MCS0	2	001	5955	20.64	20.76		8.35	8.89	28.99	29.65	36.00	Pass
HT20	MCS0	2	049	6195	20.99	20.52		8.35	8.89	29.34	29.41	36.00	Pass
HT20	MCS0	2	093	6415	20.84	21.82		8.35	8.89	29.19	30.71	36.00	Pass
HT40	MCS0	2	003	5965	20.19	20.34		8.35	8.89	28.54	29.23	36.00	Pass
HT40	MCS0	2	043	6165	20.73	21.54		8.35	8.89	29.08	30.43	36.00	Pass
HT40	MCS0	2	091	6405	21.12	22.11		8.35	8.89	29.47	31.00	36.00	Pass
VHT20	MCS0	2	001	5955	20.66	20.77		8.35	8.89	29.01	29.66	36.00	Pass
VHT20	MCS0	2	049	6195	21.03	20.61		8.35	8.89	29.38	29.50	36.00	Pass
VHT20	MCS0	2	093	6415	20.90	22.13		8.35	8.89	29.25	31.02	36.00	Pass
VHT40	MCS0	2	003	5965	20.24	20.39		8.35	8.89	28.59	29.28	36.00	Pass
VHT40	MCS0	2	043	6165	20.78	21.59		8.35	8.89	29.13	30.48	36.00	Pass
VHT40	MCS0	2	091	6405	21.17	22.16		8.35	8.89	29.52	31.05	36.00	Pass
VHT80	MCS0	2	007	5985	20.05	20.29		8.35	8.89	28.40	29.18	36.00	Pass
VHT80	MCS0	2	039	6145	20.88	21.44		8.35	8.89	29.23	30.33	36.00	Pass
VHT80	MCS0	2	087	6385	21.14	22.10		8.35	8.89	29.49	30.99	36.00	Pass
VHT160	MCS0	2	015	6025	20.17	20.75		8.35	8.89	28.52	29.64	36.00	Pass
VHT160	MCS0	2	047	6185	21.10	21.11		8.35	8.89	29.45	30.00	36.00	Pass
VHT160	MCS0	2	079	6345	21.43	22.22		8.35	8.89	29.78	31.11	36.00	Pass

Note 1: The device has 2 antennas, each of which has one of two polarizations that are orthogonal to one another.

Each polarization has 1 antenna

Note 2: One of the polarization is a 90-degree phase-shifted replica of the other.

EIRP of each polarization must individually be below the limit

FCC U-NII-5 MIMO - EIRP Limit at any elevation angle above 30 degrees													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	V-polarization				H-polarization				Pass /Fail
					Conducted Power (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Conducted Power (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	
11a	6Mbps	2	001	5955	22.14	-5.27	16.87	21.00	22.10	-2.81	19.29	21.00	Pass
11a	6Mbps	2	049	6195	21.12	-5.27	15.85	21.00	22.12	-2.81	19.31	21.00	Pass
11a	6Mbps	2	093	6415	21.58	-5.27	16.31	21.00	22.26	-2.81	19.45	21.00	Pass
HT20	MCS0	2	001	5955	20.64	-5.27	15.37	21.00	20.76	-2.81	17.95	21.00	Pass
HT20	MCS0	2	049	6195	20.99	-5.27	15.72	21.00	20.52	-2.81	17.71	21.00	Pass
HT20	MCS0	2	093	6415	20.84	-5.27	15.57	21.00	21.82	-2.81	19.01	21.00	Pass
HT40	MCS0	2	003	5965	20.19	-5.27	14.92	21.00	20.34	-2.81	17.53	21.00	Pass
HT40	MCS0	2	043	6165	20.73	-5.27	15.46	21.00	21.54	-2.81	18.73	21.00	Pass
HT40	MCS0	2	091	6405	21.12	-5.27	15.85	21.00	22.11	-2.81	19.30	21.00	Pass
VHT20	MCS0	2	001	5955	20.66	-5.27	15.39	21.00	20.77	-2.81	17.96	21.00	Pass
VHT20	MCS0	2	049	6195	21.03	-5.27	15.76	21.00	20.61	-2.81	17.80	21.00	Pass
VHT20	MCS0	2	093	6415	20.90	-5.27	15.63	21.00	22.13	-2.81	19.32	21.00	Pass
VHT40	MCS0	2	003	5965	20.24	-5.27	14.97	21.00	20.39	-2.81	17.58	21.00	Pass
VHT40	MCS0	2	043	6165	20.78	-5.27	15.51	21.00	21.59	-2.81	18.78	21.00	Pass
VHT40	MCS0	2	091	6405	21.17	-5.27	15.90	21.00	22.16	-2.81	19.35	21.00	Pass
VHT80	MCS0	2	007	5985	20.05	-5.27	14.78	21.00	20.29	-2.81	17.48	21.00	Pass
VHT80	MCS0	2	039	6145	20.88	-5.27	15.61	21.00	21.44	-2.81	18.63	21.00	Pass
VHT80	MCS0	2	087	6385	21.14	-5.27	15.87	21.00	22.10	-2.81	19.29	21.00	Pass
VHT160	MCS0	2	015	6025	20.17	-5.27	14.90	21.00	20.75	-2.81	17.94	21.00	Pass
VHT160	MCS0	2	047	6185	21.10	-5.27	15.83	21.00	21.11	-2.81	18.30	21.00	Pass
VHT160	MCS0	2	079	6345	21.43	-5.27	16.16	21.00	22.22	-2.81	19.41	21.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-5 MIMO antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Conducted Power Density (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)		EIRP Power Density Limit (dBm/MHz)	Pass /Fail
					Ant 2	Ant 4	SUM	Ant 2	Ant 4	Ant 2	Ant 4		
11a	6Mbps	2	001	5955	9.83	9.90		8.35	8.89	18.18	18.79	23.00	Pass
11a	6Mbps	2	049	6195	8.61	9.49		8.35	8.89	16.96	18.38	23.00	Pass
11a	6Mbps	2	093	6415	9.01	9.78		8.35	8.89	17.36	18.67	23.00	Pass

Note 1: The device has 2 antennas, each of which has one of two polarizations that are orthogonal to one another.
Each polarization has 1 antenna

Note 2: One of the polarization is a 90-degree phase-shifted replica of the other.
EIRP of each polarization must individually be below the limit

TEST RESULTS DATA
26dB and 99% OBW

U-NII-7 MIMO antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
					Ant 2	Ant 4	Ant 2	Ant 4		
11a	6Mbps	2	117	6535	17.05	17.00	22.57	22.33	320.00	Pass
11a	6Mbps	2	149	6695	17.07	17.09	22.55	22.72	320.00	Pass
11a	6Mbps	2	181	6855	17.08	17.10	22.82	22.77	320.00	Pass

TEST RESULTS DATA
EIRP Power Table

U-NII-7 MIMO antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
					Ant 2	Ant 4	SUM	Ant 2	Ant 4	Ant 2	Ant 4		
11a	6Mbps	2	117	6535	21.49	22.49		7.24	8.17	28.73	30.66	36.00	Pass
11a	6Mbps	2	149	6695	21.47	22.54		7.24	8.17	28.71	30.71	36.00	Pass
11a	6Mbps	2	181	6855	21.47	22.39		7.24	8.17	28.71	30.56	36.00	Pass
HT20	MCS0	2	117	6535	21.22	22.06		7.24	8.17	28.46	30.23	36.00	Pass
HT20	MCS0	2	149	6695	21.02	21.46		7.24	8.17	28.26	29.63	36.00	Pass
HT20	MCS0	2	181	6855	21.03	21.68		7.24	8.17	28.27	29.85	36.00	Pass
HT40	MCS0	2	123	6565	20.83	22.06		7.24	8.17	28.07	30.23	36.00	Pass
HT40	MCS0	2	147	6685	21.20	22.48		7.24	8.17	28.44	30.65	36.00	Pass
HT40	MCS0	2	179	6845	21.35	22.37		7.24	8.17	28.59	30.54	36.00	Pass
VHT20	MCS0	2	117	6535	21.35	22.09		7.24	8.17	28.59	30.26	36.00	Pass
VHT20	MCS0	2	149	6695	21.06	21.49		7.24	8.17	28.30	29.66	36.00	Pass
VHT20	MCS0	2	181	6855	21.17	21.91		7.24	8.17	28.41	30.08	36.00	Pass
VHT40	MCS0	2	123	6565	20.88	22.11		7.24	8.17	28.12	30.28	36.00	Pass
VHT40	MCS0	2	147	6685	21.25	22.53		7.24	8.17	28.49	30.70	36.00	Pass
VHT40	MCS0	2	179	6845	21.40	22.42		7.24	8.17	28.64	30.59	36.00	Pass
VHT80	MCS0	2	135	6625	21.06	21.87		7.24	8.17	28.30	30.04	36.00	Pass
VHT80	MCS0	2	151	6705	21.17	22.31		7.24	8.17	28.41	30.48	36.00	Pass
VHT80	MCS0	2	167	6785	20.97	22.12		7.24	8.17	28.21	30.29	36.00	Pass
VHT160	MCS0	2	143	6665	21.69	22.41		7.24	8.17	28.93	30.58	36.00	Pass

Note 1: The device has 2 antennas, each of which has one of two polarizations that are orthogonal to one another.

Each polarization has 1 antenna

Note 2: One of the polarization is a 90-degree phase-shifted replica of the other.

EIRP of each polarization must individually be below the limit

FCC U-NII-7 MIMO - EIRP Limit at any elevation angle above 30 degrees													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	V-polarization				H-polarization				Pass /Fail
					Conducted Power (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Conducted Power (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	
					Ant 2				Ant 4				
11a	6Mbps	2	117	6535	21.49	-6.92	14.57	21.00	22.49	-2.52	19.97	21.00	Pass
11a	6Mbps	2	149	6695	21.47	-6.92	14.55	21.00	22.54	-2.52	20.02	21.00	Pass
11a	6Mbps	2	181	6855	21.47	-6.92	14.55	21.00	22.39	-2.52	19.87	21.00	Pass
HT20	MCS0	2	117	6535	21.22	-6.92	14.30	21.00	22.06	-2.52	19.54	21.00	Pass
HT20	MCS0	2	149	6695	21.02	-6.92	14.10	21.00	21.46	-2.52	18.94	21.00	Pass
HT20	MCS0	2	181	6855	21.03	-6.92	14.11	21.00	21.68	-2.52	19.16	21.00	Pass
HT40	MCS0	2	123	6565	20.83	-6.92	13.91	21.00	22.06	-2.52	19.54	21.00	Pass
HT40	MCS0	2	147	6685	21.20	-6.92	14.28	21.00	22.48	-2.52	19.96	21.00	Pass
HT40	MCS0	2	179	6845	21.35	-6.92	14.43	21.00	22.37	-2.52	19.85	21.00	Pass
VHT20	MCS0	2	117	6535	21.35	-6.92	14.43	21.00	22.09	-2.52	19.57	21.00	Pass
VHT20	MCS0	2	149	6695	21.06	-6.92	14.14	21.00	21.49	-2.52	18.97	21.00	Pass
VHT20	MCS0	2	181	6855	21.17	-6.92	14.25	21.00	21.91	-2.52	19.39	21.00	Pass
VHT40	MCS0	2	123	6565	20.88	-6.92	13.96	21.00	22.11	-2.52	19.59	21.00	Pass
VHT40	MCS0	2	147	6685	21.25	-6.92	14.33	21.00	22.53	-2.52	20.01	21.00	Pass
VHT40	MCS0	2	179	6845	21.40	-6.92	14.48	21.00	22.42	-2.52	19.90	21.00	Pass
VHT80	MCS0	2	135	6625	21.06	-6.92	14.14	21.00	21.87	-2.52	19.35	21.00	Pass
VHT80	MCS0	2	151	6705	21.17	-6.92	14.25	21.00	22.31	-2.52	19.79	21.00	Pass
VHT80	MCS0	2	167	6785	20.97	-6.92	14.05	21.00	22.12	-2.52	19.60	21.00	Pass
VHT160	MCS0	2	143	6665	21.69	-6.92	14.77	21.00	22.41	-2.52	19.89	21.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-7 MIMO antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Conducted Power Density (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)		EIRP Power Density Limit (dBm/MHz)	Pass /Fail
					Ant 2	Ant 4	SUM	Ant 2	Ant 4	Ant 2	Ant 4		
11a	6Mbps	2	117	6535	9.21	10.20		7.24	8.17	16.45	18.37	23.00	Pass
11a	6Mbps	2	149	6695	8.93	10.02		7.24	8.17	16.17	18.19	23.00	Pass
11a	6Mbps	2	181	6855	9.20	10.12		7.24	8.17	16.44	18.29	23.00	Pass

Note 1: The device has 2 antennas, each of which has one of two polarizations that are orthogonal to one another.
Each polarization has 1 antenna

Note 2: One of the polarization is a 90-degree phase-shifted replica of the other.
EIRP of each polarization must individually be below the limit

TEST RESULTS DATA
EIRP Power Table

U-NII-5 MIMO antenna														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant 2	Ant 4	SUM	Ant 2	Ant 4	Ant 2	Ant 4		
HE20	MCS0	2	001	5955	Full	20.68	20.92		8.35	8.89	29.03	29.81	36.00	Pass
HE20	MCS0	2	049	6195	Full	21.04	21.82		8.35	8.89	29.39	30.71	36.00	Pass
HE20	MCS0	2	093	6415	Full	21.45	22.23		8.35	8.89	29.80	31.12	36.00	Pass
HE40	MCS0	2	003	5965	Full	20.29	20.44		8.35	8.89	28.64	29.33	36.00	Pass
HE40	MCS0	2	043	6165	Full	20.83	21.64		8.35	8.89	29.18	30.53	36.00	Pass
HE40	MCS0	2	091	6405	Full	21.22	22.21		8.35	8.89	29.57	31.10	36.00	Pass
HE80	MCS0	2	007	5985	Full	20.10	20.34		8.35	8.89	28.45	29.23	36.00	Pass
HE80	MCS0	2	039	6145	Full	20.93	21.49		8.35	8.89	29.28	30.38	36.00	Pass
HE80	MCS0	2	087	6385	Full	21.19	22.15		8.35	8.89	29.54	31.04	36.00	Pass
HE160	MCS0	2	015	6025	Full	20.22	20.80		8.35	8.89	28.57	29.69	36.00	Pass
HE160	MCS0	2	047	6185	Full	21.15	21.16		8.35	8.89	29.50	30.05	36.00	Pass
HE160	MCS0	2	079	6345	Full	21.48	22.27		8.35	8.89	29.83	31.16	36.00	Pass

Note 1: The device has 2 antennas, each of which has one of two polarizations that are orthogonal to one another.

Each polarization has 1 antenna

Note 2: One of the polarization is a 90-degree phase-shifted replica of the other.

EIRP of each polarization must individually be below the limit

FCC U-NII-5 MIMO - EIRP Limit at any elevation angle above 30 degrees														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	V-polarization				H-polarization				Pass /Fail
						Conducted Power (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Conducted Power (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	
HE20	MCS0	2	001	5955	Full	20.68	-5.27	15.41	21.00	20.92	-2.81	18.11	21.00	Pass
HE20	MCS0	2	049	6195	Full	21.04	-5.27	15.77	21.00	21.82	-2.81	19.01	21.00	Pass
HE20	MCS0	2	093	6415	Full	21.45	-5.27	16.18	21.00	22.23	-2.81	19.42	21.00	Pass
HE40	MCS0	2	003	5965	Full	20.29	-5.27	15.02	21.00	20.44	-2.81	17.63	21.00	Pass
HE40	MCS0	2	043	6165	Full	20.83	-5.27	15.56	21.00	21.64	-2.81	18.83	21.00	Pass
HE40	MCS0	2	091	6405	Full	21.22	-5.27	15.95	21.00	22.21	-2.81	19.40	21.00	Pass
HE80	MCS0	2	007	5985	Full	20.10	-5.27	14.83	21.00	20.34	-2.81	17.53	21.00	Pass
HE80	MCS0	2	039	6145	Full	20.93	-5.27	15.66	21.00	21.49	-2.81	18.68	21.00	Pass
HE80	MCS0	2	087	6385	Full	21.19	-5.27	15.92	21.00	22.15	-2.81	19.34	21.00	Pass
HE160	MCS0	2	015	6025	Full	20.22	-5.27	14.95	21.00	20.80	-2.81	17.99	21.00	Pass
HE160	MCS0	2	047	6185	Full	21.15	-5.27	15.88	21.00	21.16	-2.81	18.35	21.00	Pass
HE160	MCS0	2	079	6345	Full	21.48	-5.27	16.21	21.00	22.27	-2.81	19.46	21.00	Pass

TEST RESULTS DATA
EIRP Power Table

U-NII-7 MIMO antenna														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant 2	Ant 4	SUM	Ant 2	Ant 4	Ant 2	Ant 4		
HE20	MCS0	2	117	6535	Full	21.47	22.53		7.24	8.17	28.71	30.70	36.00	Pass
HE20	MCS0	2	149	6695	Full	21.41	22.50		7.24	8.17	28.65	30.67	36.00	Pass
HE20	MCS0	2	181	6855	Full	21.34	22.26		7.24	8.17	28.58	30.43	36.00	Pass
HE40	MCS0	2	123	6565	Full	20.93	22.16		7.24	8.17	28.17	30.33	36.00	Pass
HE40	MCS0	2	147	6685	Full	21.30	22.58		7.24	8.17	28.54	30.75	36.00	Pass
HE40	MCS0	2	179	6845	Full	21.45	22.47		7.24	8.17	28.69	30.64	36.00	Pass
HE80	MCS0	2	135	6625	Full	21.11	21.92		7.24	8.17	28.35	30.09	36.00	Pass
HE80	MCS0	2	151	6705	Full	21.22	22.36		7.24	8.17	28.46	30.53	36.00	Pass
HE80	MCS0	2	167	6785	Full	21.02	22.17		7.24	8.17	28.26	30.34	36.00	Pass
HE160	MCS0	2	143	6665	Full	21.74	22.46		7.24	8.17	28.98	30.63	36.00	Pass

Note 1: The device has 2 antennas, each of which has one of two polarizations that are orthogonal to one another.

Each polarization has 1 antenna

Note 2: One of the polarization is a 90-degree phase-shifted replica of the other.

EIRP of each polarization must individually be below the limit

FCC U-NII-7 MIMO - EIRP Limit at any elevation angle above 30 degrees														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	V-polarization				H-polarization				Pass /Fail
						Conducted Power (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Conducted Power (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	
						Ant 2				Ant 4				
HE20	MCS0	2	117	6535	Full	21.47	-6.92	14.55	21.00	22.53	-2.52	20.01	21.00	Pass
HE20	MCS0	2	149	6695	Full	21.41	-6.92	14.49	21.00	22.50	-2.52	19.98	21.00	Pass
HE20	MCS0	2	181	6855	Full	21.34	-6.92	14.42	21.00	22.26	-2.52	19.74	21.00	Pass
HE40	MCS0	2	123	6565	Full	20.93	-6.92	14.01	21.00	22.16	-2.52	19.64	21.00	Pass
HE40	MCS0	2	147	6685	Full	21.30	-6.92	14.38	21.00	22.58	-2.52	20.06	21.00	Pass
HE40	MCS0	2	179	6845	Full	21.45	-6.92	14.53	21.00	22.47	-2.52	19.95	21.00	Pass
HE80	MCS0	2	135	6625	Full	21.11	-6.92	14.19	21.00	21.92	-2.52	19.40	21.00	Pass
HE80	MCS0	2	151	6705	Full	21.22	-6.92	14.30	21.00	22.36	-2.52	19.84	21.00	Pass
HE80	MCS0	2	167	6785	Full	21.02	-6.92	14.10	21.00	22.17	-2.52	19.65	21.00	Pass
HE160	MCS0	2	143	6665	Full	21.74	-6.92	14.82	21.00	22.46	-2.52	19.94	21.00	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-5 MIMO antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
						ANT 2	ANT 4	ANT 2	ANT 4		
EHT20	MCS0	2	001	5955	Full	19.148	19.168	23.400	23.848	320.00	Pass
EHT20	MCS0	2	049	6195	Full	19.153	19.178	23.160	23.872	320.00	Pass
EHT20	MCS0	2	093	6415	Full	19.148	19.198	23.192	23.832	320.00	Pass
EHT40	MCS0	2	003	5965	Full	38.536	38.516	45.984	46.032	320.00	Pass
EHT40	MCS0	2	051	6205	Full	38.526	38.516	46.272	45.696	320.00	Pass
EHT40	MCS0	2	091	6405	Full	38.566	38.546	45.584	45.776	320.00	Pass
EHT80	MCS0	2	007	5985	Full	77.908	77.812	88.576	90.144	320.00	Pass
EHT80	MCS0	2	055	6225	Full	77.908	77.836	90.336	89.056	320.00	Pass
EHT80	MCS0	2	087	6385	Full	77.872	77.848	91.392	88.736	320.00	Pass
EHT160	MCS0	2	015	6025	Full	157.664	157.472	174.672	172.320	320.00	Pass
EHT160	MCS0	2	047	6185	Full	157.880	157.616	174.528	172.992	320.00	Pass
EHT160	MCS0	2	079	6345	Full	157.880	157.616	175.824	172.416	320.00	Pass

Note: 26dB BW of EHT20/EHT40/EHT80/EHT160 should be less than 320MHz

TEST RESULTS DATA
EIRP Power Table

U-NII-5 MIMO antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						ANT 2	ANT 4	ANT 2	ANT 4	ANT 2	ANT 4		
EHT20	MCS0	2	001	5955	Full	20.73	20.97	8.35	8.89	29.08	29.86	36.00	Pass
EHT20	MCS0	2	049	6195	Full	21.09	21.87	8.35	8.89	29.44	30.76	36.00	Pass
EHT20	MCS0	2	093	6415	Full	21.49	22.28	8.35	8.89	29.84	31.17	36.00	Pass
EHT40	MCS0	2	003	5965	Full	20.34	20.49	8.35	8.89	28.69	29.38	36.00	Pass
EHT40	MCS0	2	051	6205	Full	20.88	21.69	8.35	8.89	29.23	30.58	36.00	Pass
EHT40	MCS0	2	091	6405	Full	21.27	22.26	8.35	8.89	29.62	31.15	36.00	Pass
EHT80	MCS0	2	007	5985	Full	20.15	20.39	8.35	8.89	28.50	29.28	36.00	Pass
EHT80	MCS0	2	055	6225	Full	20.98	21.54	8.35	8.89	29.33	30.43	36.00	Pass
EHT80	MCS0	2	087	6385	Full	21.24	22.20	8.35	8.89	29.59	31.09	36.00	Pass
EHT160	MCS0	2	015	6025	Full	20.27	20.85	8.35	8.89	28.62	29.74	36.00	Pass
EHT160	MCS0	2	047	6185	Full	21.20	21.21	8.35	8.89	29.55	30.10	36.00	Pass
EHT160	MCS0	2	079	6345	Full	21.53	22.32	8.35	8.89	29.88	31.21	36.00	Pass

Note 1: The device has 2 antennas, each of which has one of two polarizations that are orthogonal to one another.

Each polarization has 1 antenna

Note 2: One of the polarization is a 90-degree phase-shifted replica of the other.

EIRP of each polarization must individually be below the limit

FCC U-NII-5 MIMO - EIRP Limit at any elevation angle above 30 degrees														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	V-polarization				H-polarization				Pass /Fail
						Conducted Power (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Conducted Power (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	
						ANT 2				ANT 4				
EHT20	MCS0	2	001	5955	Full	20.73	-5.27	15.46	21.00	20.97	-2.81	18.16	21.00	Pass
EHT20	MCS0	2	49	6195	Full	21.09	-5.27	15.82	21.00	21.87	-2.81	19.06	21.00	Pass
EHT20	MCS0	2	093	6415	Full	21.49	-5.27	16.22	21.00	22.28	-2.81	19.47	21.00	Pass
EHT40	MCS0	2	003	5965	Full	20.34	-5.27	15.07	21.00	20.49	-2.81	17.68	21.00	Pass
EHT40	MCS0	2	043	6165	Full	20.88	-5.27	15.61	21.00	21.69	-2.81	18.88	21.00	Pass
EHT40	MCS0	2	091	6405	Full	21.27	-5.27	16.00	21.00	22.26	-2.81	19.45	21.00	Pass
EHT80	MCS0	2	007	5985	Full	20.15	-5.27	14.88	21.00	20.39	-2.81	17.58	21.00	Pass
EHT80	MCS0	2	039	6145	Full	20.98	-5.27	15.71	21.00	21.54	-2.81	18.73	21.00	Pass
EHT80	MCS0	2	087	6385	Full	21.24	-5.27	15.97	21.00	22.20	-2.81	19.39	21.00	Pass
EHT160	MCS0	2	015	6025	Full	20.27	-5.27	15.00	21.00	20.85	-2.81	18.04	21.00	Pass
EHT160	MCS0	2	047	6185	Full	21.20	-5.27	15.93	21.00	21.21	-2.81	18.40	21.00	Pass
EHT160	MCS0	2	079	6345	Full	21.53	-5.27	16.26	21.00	22.32	-2.81	19.51	21.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-5 MIMO antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power Density (dBm/MHz)		DG (dBi)		EIRP Power Density (dBm/MHz)		EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						ANT 2	ANT 4	ANT 2	ANT 4	ANT 2	ANT 4		
EHT20	MCS0	2	001	5955	Full	7.59	7.79	8.35	8.89	15.94	16.68	23.00	Pass
EHT20	MCS0	2	049	6195	Full	7.66	8.58	8.35	8.89	16.01	17.47	23.00	Pass
EHT20	MCS0	2	093	6415	Full	7.86	8.67	8.35	8.89	16.21	17.56	23.00	Pass
EHT40	MCS0	2	003	5965	Full	4.23	4.40	8.35	8.89	12.58	13.29	23.00	Pass
EHT40	MCS0	2	051	6205	Full	4.85	5.44	8.35	8.89	13.20	14.33	23.00	Pass
EHT40	MCS0	2	091	6405	Full	4.94	5.67	8.35	8.89	13.29	14.56	23.00	Pass
EHT80	MCS0	2	007	5985	Full	1.27	1.52	8.35	8.89	9.62	10.41	23.00	Pass
EHT80	MCS0	2	055	6225	Full	1.62	2.42	8.35	8.89	9.97	11.31	23.00	Pass
EHT80	MCS0	2	087	6385	Full	1.84	2.72	8.35	8.89	10.19	11.61	23.00	Pass
EHT160	MCS0	2	015	6025	Full	-1.50	-0.90	8.35	8.89	6.85	7.99	23.00	Pass
EHT160	MCS0	2	047	6185	Full	-0.69	-0.78	8.35	8.89	7.66	8.11	23.00	Pass
EHT160	MCS0	2	079	6345	Full	-0.63	0.19	8.35	8.89	7.72	9.08	23.00	Pass

Note 1: The device has 2 antennas, each of which has one of two polarizations that are orthogonal to one another.

Each polarization has 1 antenna

Note 2: One of the polarization is a 90-degree phase-shifted replica of the other.

EIRP of each polarization must individually be below the limit

TEST RESULTS DATA
26dB and 99% OBW

U-NII-7 MIMO antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
						ANT 2	ANT 4	ANT 2	ANT 4		
EHT20	MCS0	2	117	6535	Full	19.148	19.208	23.128	24.072	320.00	Pass
EHT20	MCS0	2	149	6695	Full	19.153	19.208	23.192	23.896	320.00	Pass
EHT20	MCS0	2	181	6855	Full	19.148	19.213	23.296	24.400	320.00	Pass
EHT40	MCS0	2	123	6565	Full	38.566	38.536	46.016	46.128	320.00	Pass
EHT40	MCS0	2	147	6685	Full	38.586	38.596	45.328	45.664	320.00	Pass
EHT40	MCS0	2	179	6845	Full	38.606	38.616	46.496	45.520	320.00	Pass
EHT80	MCS0	2	135	6625	Full	77.884	77.848	89.888	90.080	320.00	Pass
EHT80	MCS0	2	151	6705	Full	77.837	77.896	89.312	91.968	320.00	Pass
EHT80	MCS0	2	167	6785	Full	77.944	77.932	89.120	91.456	320.00	Pass
EHT160	MCS0	2	143	6665	Full	157.856	157.784	176.592	174.096	320.00	Pass

Note: 26dB BW of EHT20/EHT40/EHT80/EHT160 should be less than 320MHz

TEST RESULTS DATA
EIRP Power Table

U-NII-7 MIMO antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						ANT 2	ANT 4	ANT 2	ANT 4	ANT 2	ANT 4		
EHT20	MCS0	2	117	6535	Full	21.52	22.58	7.24	8.17	28.76	30.75	36.00	Pass
EHT20	MCS0	2	149	6695	Full	21.48	22.57	7.24	8.17	28.72	30.74	36.00	Pass
EHT20	MCS0	2	181	6855	Full	21.39	22.31	7.24	8.17	28.63	30.48	36.00	Pass
EHT40	MCS0	2	123	6565	Full	20.98	22.21	7.24	8.17	28.22	30.38	36.00	Pass
EHT40	MCS0	2	147	6685	Full	21.37	22.65	7.24	8.17	28.61	30.82	36.00	Pass
EHT40	MCS0	2	179	6845	Full	21.50	22.53	7.24	8.17	28.74	30.70	36.00	Pass
EHT80	MCS0	2	135	6625	Full	21.16	22.03	7.24	8.17	28.40	30.20	36.00	Pass
EHT80	MCS0	2	151	6705	Full	21.29	22.43	7.24	8.17	28.53	30.60	36.00	Pass
EHT80	MCS0	2	167	6785	Full	21.07	22.22	7.24	8.17	28.31	30.39	36.00	Pass
EHT160	MCS0	2	143	6665	Full	21.81	22.53	7.24	8.17	29.05	30.70	36.00	Pass

Note 1: The device has 2 antennas, each of which has one of two polarizations that are orthogonal to one another.

Each polarization has 1 antenna

Note 2: One of the polarization is a 90-degree phase-shifted replica of the other.

EIRP of each polarization must individually be below the limit

FCC U-NII-7 MIMO - EIRP Limit at any elevation angle above 30 degrees														
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	RU Config.	V-polarization				H-polarization				Pass /Fail
						Conducted Power (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Conducted Power (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	
EHT20	MCS0	1	117	6535	Full	21.52	-6.92	14.60	21.00	22.58	-2.52	20.06	21.00	Pass
EHT20	MCS0	1	149	6695	Full	21.48	-6.92	14.56	21.00	22.57	-2.52	20.05	21.00	Pass
EHT20	MCS0	1	181	6855	Full	21.39	-6.92	14.47	21.00	22.31	-2.52	19.79	21.00	Pass
EHT40	MCS0	1	123	6565	Full	20.98	-6.92	14.06	21.00	22.21	-2.52	19.69	21.00	Pass
EHT40	MCS0	1	147	6685	Full	21.37	-6.92	14.45	21.00	22.65	-2.52	20.13	21.00	Pass
EHT40	MCS0	1	179	6845	Full	21.50	-6.92	14.58	21.00	22.53	-2.52	20.01	21.00	Pass
EHT80	MCS0	1	135	6625	Full	21.16	-6.92	14.24	21.00	22.03	-2.52	19.51	21.00	Pass
EHT80	MCS0	1	151	6705	Full	21.29	-6.92	14.37	21.00	22.43	-2.52	19.91	21.00	Pass
EHT80	MCS0	1	167	6785	Full	21.07	-6.92	14.15	21.00	22.22	-2.52	19.70	21.00	Pass
EHT160	MCS0	1	143	6665	Full	21.81	-6.92	14.89	21.00	22.53	-2.52	20.01	21.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-7 MIMO antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power Density (dBm/MHz)		DG (dBi)		EIRP Power Density (dBm/MHz)		EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						ANT 2	ANT 4	ANT 2	ANT 4	ANT 2	ANT 4		
EHT20	MCS0	2	117	6535	Full	8.17	9.18	7.24	8.17	15.41	17.35	23.00	Pass
EHT20	MCS0	2	149	6695	Full	7.94	8.95	7.24	8.17	15.18	17.12	23.00	Pass
EHT20	MCS0	2	181	6855	Full	8.10	8.97	7.24	8.17	15.34	17.14	23.00	Pass
EHT40	MCS0	2	123	6565	Full	4.69	5.83	7.24	8.17	11.93	14.00	23.00	Pass
EHT40	MCS0	2	147	6685	Full	4.91	6.17	7.24	8.17	12.15	14.34	23.00	Pass
EHT40	MCS0	2	179	6845	Full	5.52	6.16	7.24	8.17	12.76	14.33	23.00	Pass
EHT80	MCS0	2	135	6625	Full	1.69	2.31	7.24	8.17	8.93	10.48	23.00	Pass
EHT80	MCS0	2	151	6705	Full	1.78	2.86	7.24	8.17	9.02	11.03	23.00	Pass
EHT80	MCS0	2	167	6785	Full	2.06	2.92	7.24	8.17	9.30	11.09	23.00	Pass
EHT160	MCS0	2	143	6665	Full	-0.36	0.19	7.24	8.17	6.88	8.36	23.00	Pass

Note 1: The device has 2 antennas, each of which has one of two polarizations that are orthogonal to one another.

Each polarization has 1 antenna

Note 2: One of the polarization is a 90-degree phase-shifted replica of the other.

EIRP of each polarization must individually be below the limit

TEST RESULTS DATA
26dB EBW and 99% OBW

U-NII-5 MIMO antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
						ANT 2	ANT 4	ANT 2	ANT 4		
EHT320	MCS0	2	031	6105	Full	316.097	315.916	345.024	490.944	320.00	Pass
EHT320	MCS0	2	063	6265	Full	316.712	316.294	344.928	341.088	320.00	Pass

Note: 99% OBW of EHT320 should be less than 320MHz

TEST RESULTS DATA
EIRP Power Table

U-NII-5 MIMO antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						ANT 2	ANT 4	ANT 2	ANT 4	ANT 2	ANT 4		
EHT320	MCS0	2	031	6105	Full	20.42	21.52	8.35	8.89	28.77	30.41	36.00	Pass
EHT320	MCS0	2	063	6265	Full	21.48	22.34	8.35	8.89	29.83	31.23	36.00	Pass

Note 1: The device has 2 antennas, each of which has one of two polarizations that are orthogonal to one another.

Each polarization has 1 antenna

Note 2: One of the polarization is a 90-degree phase-shifted replica of the other.

EIRP of each polarization must individually be below the limit

FCC U-NII-5 MIMO - EIRP Limit at any elevation angle above 30 degrees														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	V-polarization				H-polarization				Pass /Fail
						Conducted Power (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Conducted Power (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	
						ANT 2				ANT 4				
EHT320	MCS0	2	031	6105	Full	20.42	-5.27	15.15	21.00	21.52	-2.81	18.71	21.00	Pass
EHT320	MCS0	2	063	6265	Full	21.48	-5.27	16.21	21.00	22.34	-2.81	19.53	21.00	Pass


TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-5 MIMO antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power Density (dBm/MHz)		DG (dBi)		EIRP Power Density (dBm/MHz)		EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						ANT 2	ANT 4	ANT 2	ANT 4	ANT 2	ANT 4		
EHT320	MCS0	2	031	6105	Full	-4.37	-3.31	8.35	8.89	3.98	5.58	23.00	Pass
EHT320	MCS0	2	063	6265	Full	-3.52	-2.58	8.35	8.89	4.83	6.31	23.00	Pass

**Test Result of 26dB & 99% Occupied Bandwidth**


MIMO <Ant. 2+4>

<802.11a>

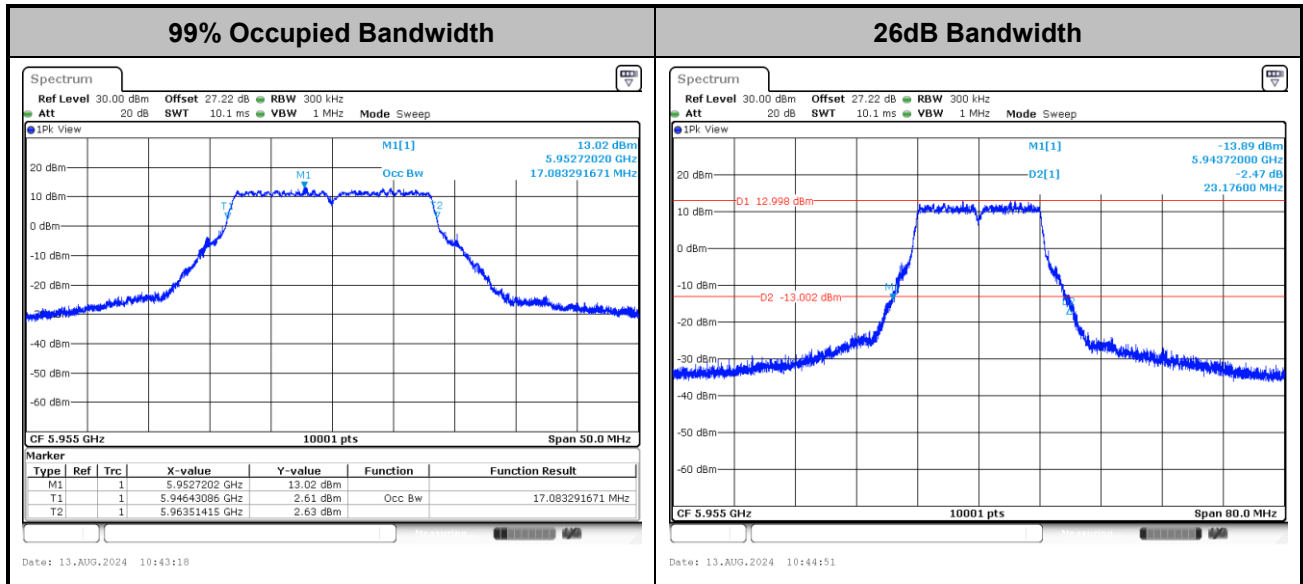


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11be EHT20>

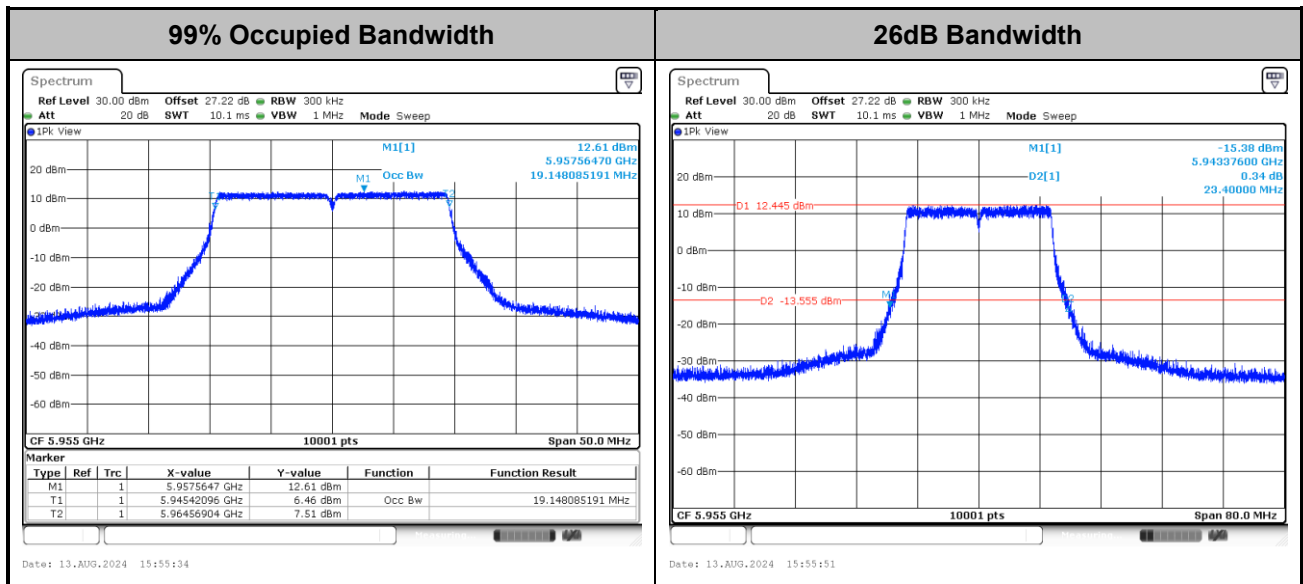

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.
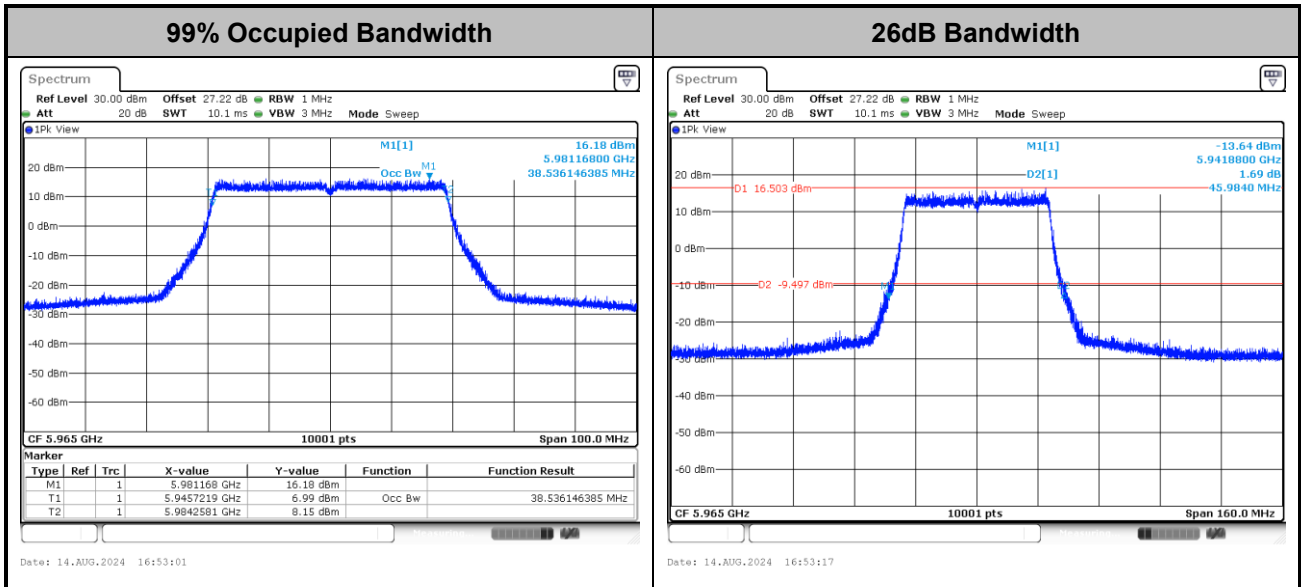
<802.11be EHT40>


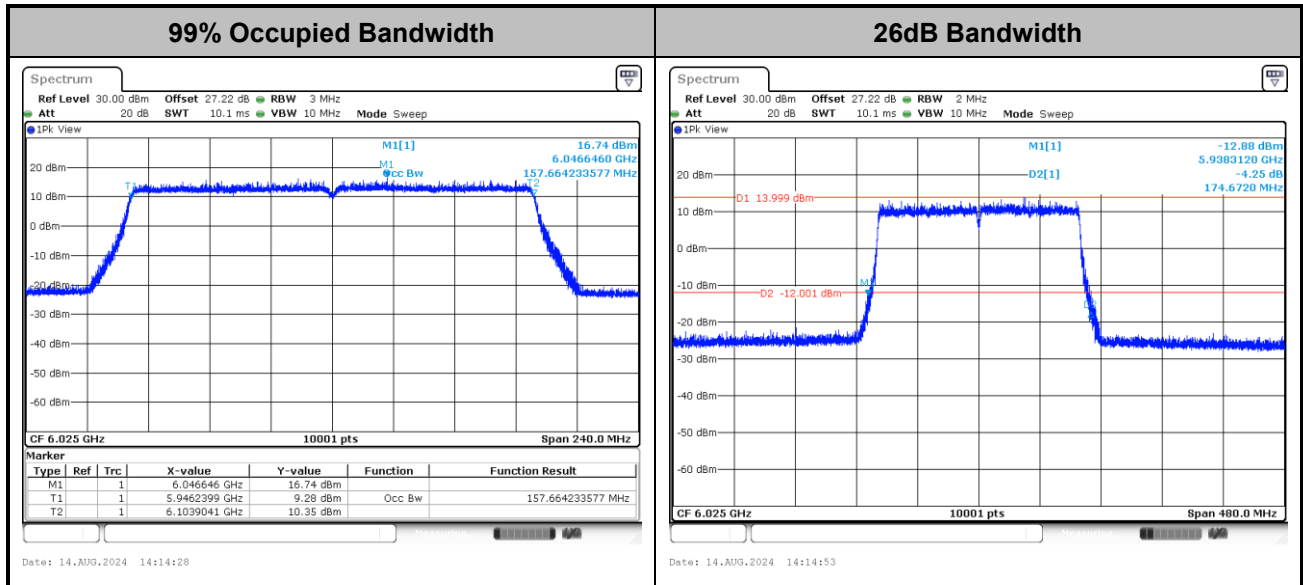
Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.
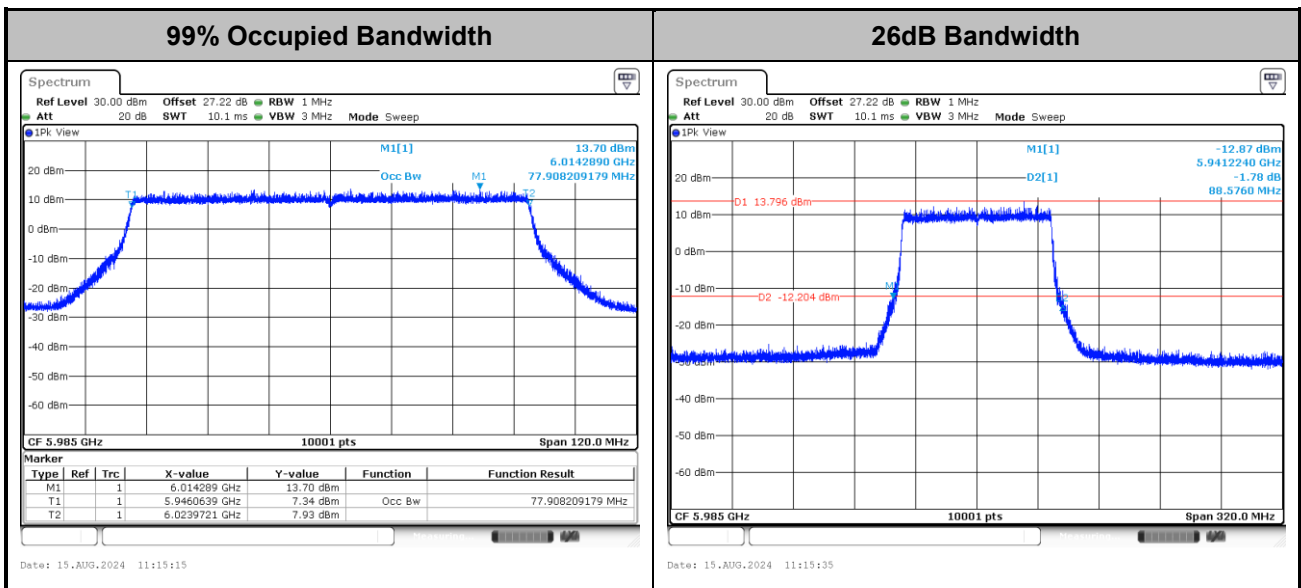
<802.11be EHT80>


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11be EHT160>



Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<802.11be EHT320>

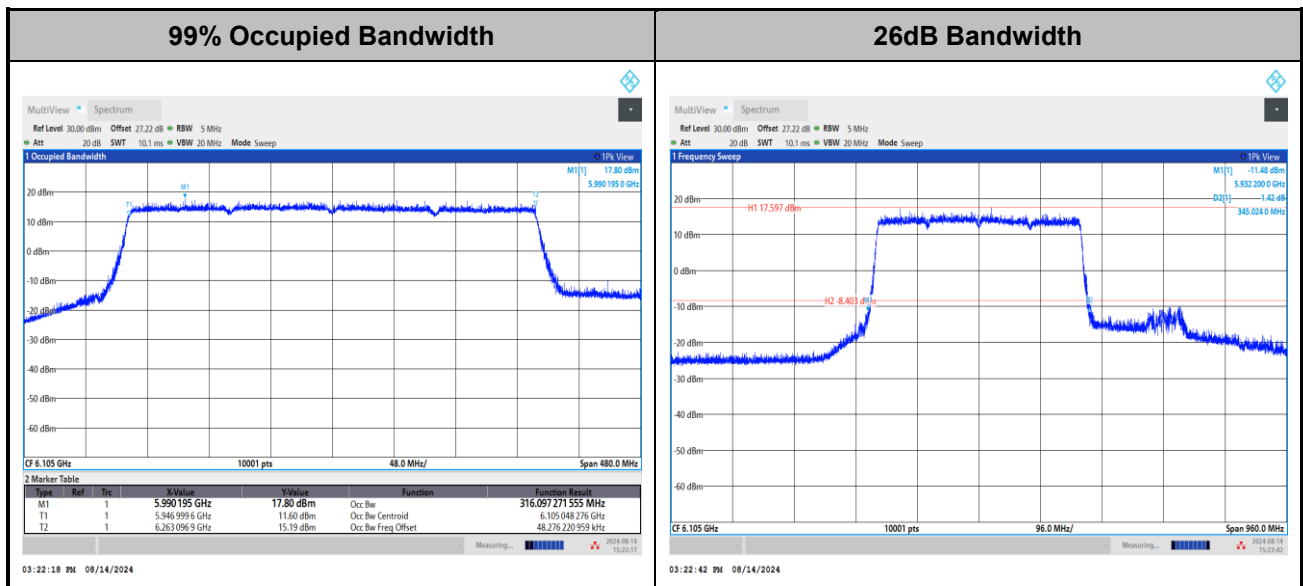



Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

**Test Result of Power Spectral Density**

<802.11a>

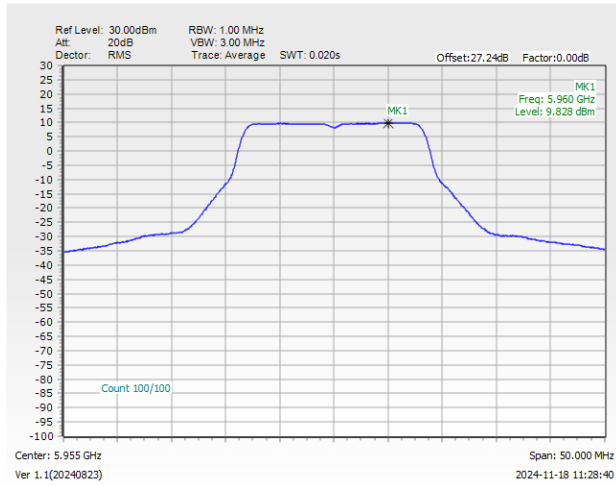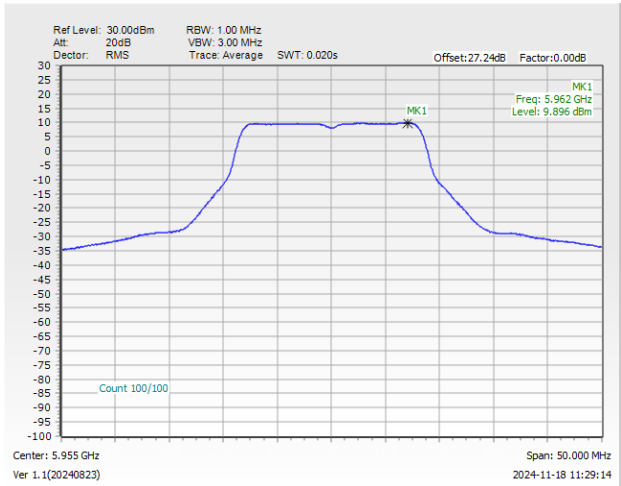Maximum Power Density Plot Trace 1 (Ant 2)**Maximum Power Density Plot Trace 2 (Ant 4)**


<802.11be EHT20>

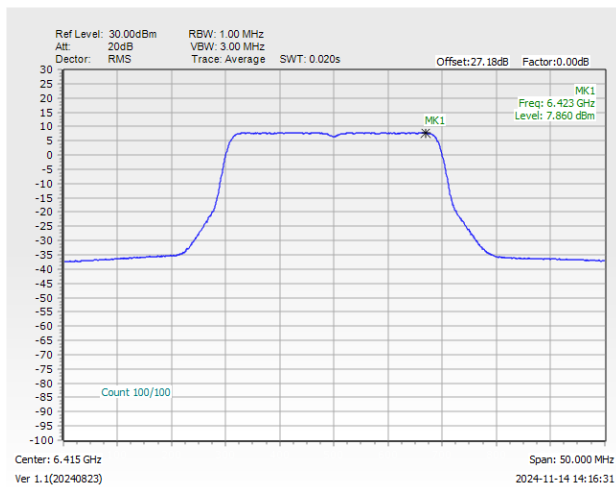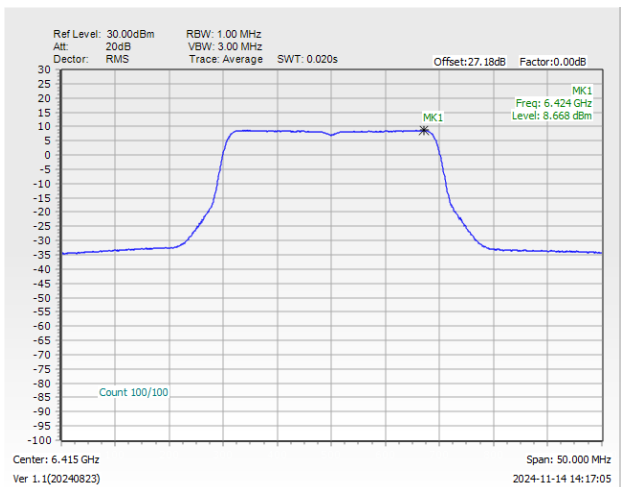Maximum Power Density Plot Trace 1 (Ant 2)**Maximum Power Density Plot Trace 2 (Ant 4)**




<802.11be EHT40>

Maximum Power Density Plot Trace 1 (Ant 2)

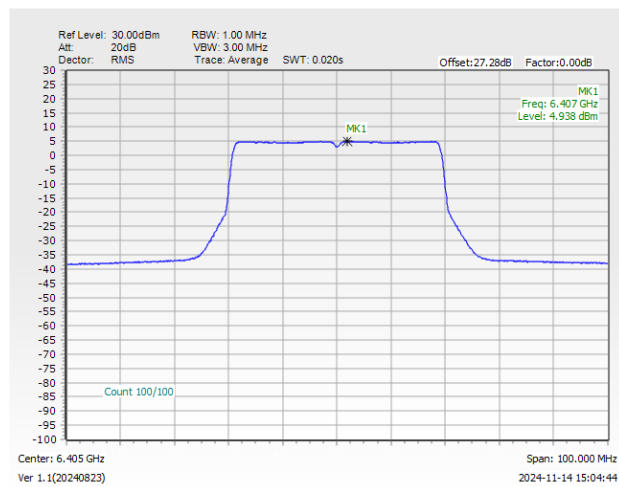


Maximum Power Density Plot Trace 2 (Ant 4)

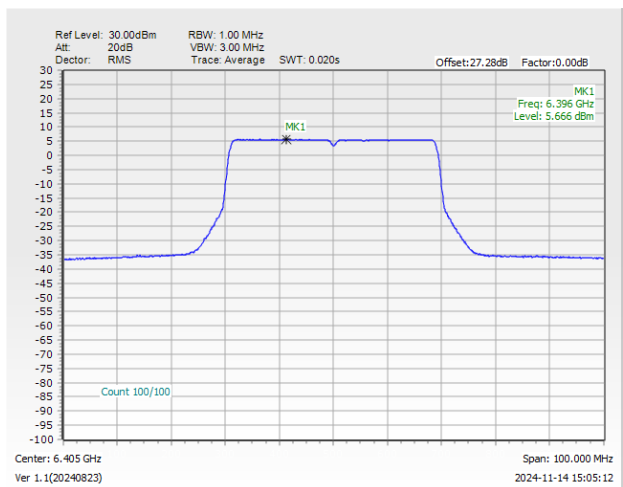


<802.11be EHT80>

Maximum Power Density Plot Trace 1 (Ant 2)

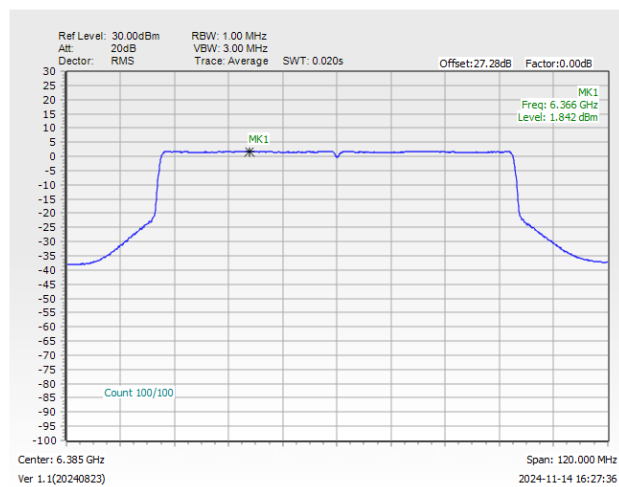


Maximum Power Density Plot Trace 2 (Ant 4)

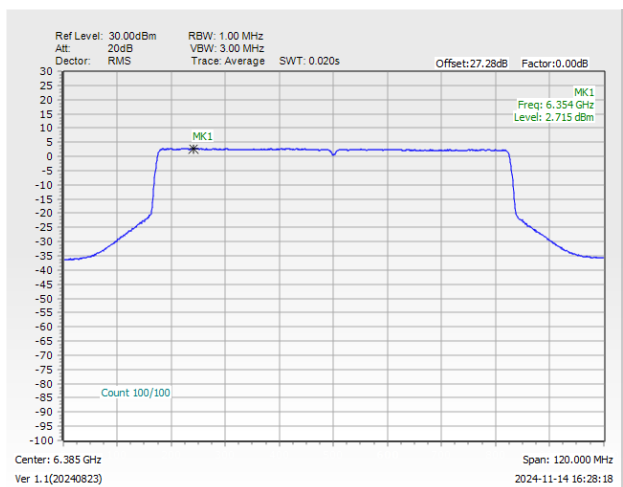


<802.11be EHT160>

Maximum Power Density Plot Trace 1 (Ant 2)

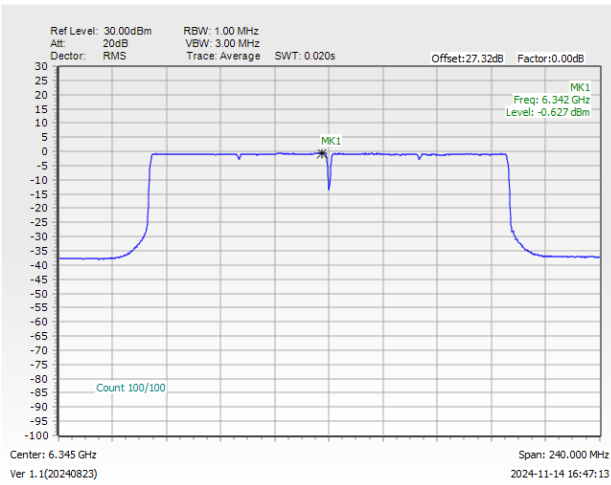


Maximum Power Density Plot Trace 2 (Ant 4)

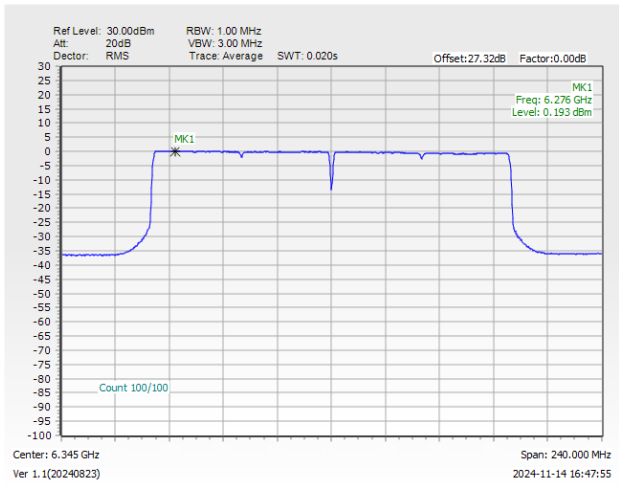


<802.11be EHT320>

Maximum Power Density Plot Trace 1 (Ant 2)

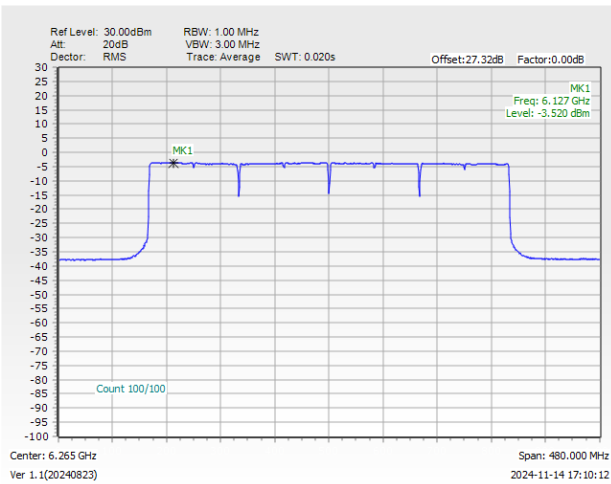

Maximum Power Density Plot Trace 2 (Ant 4)

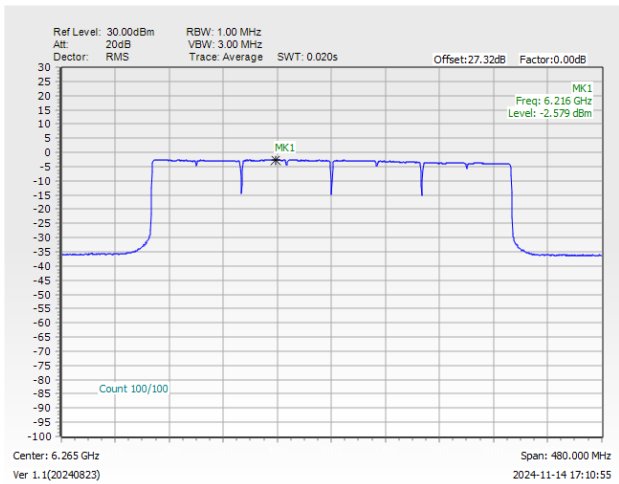




In-Band Emissions (Channel Mask)

MIMO <Ant. 2+4(2)>

EUT Mode


802.11a

Plot on Channel 5955 MHz

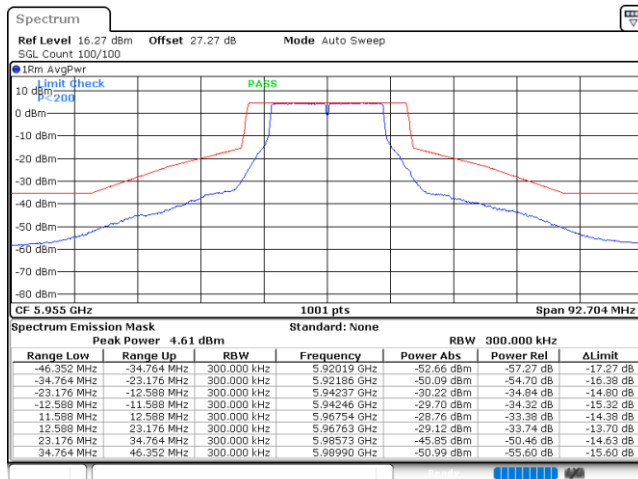


Date: 13.AUG.2024 10:45:15

Plot on Channel 6195 MHz

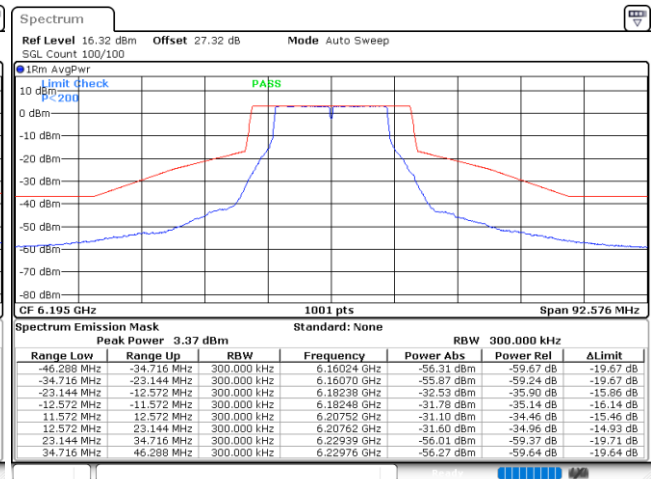


Date: 9.DEC.2024 09:22:02

Plot on Channel 6415 MHz

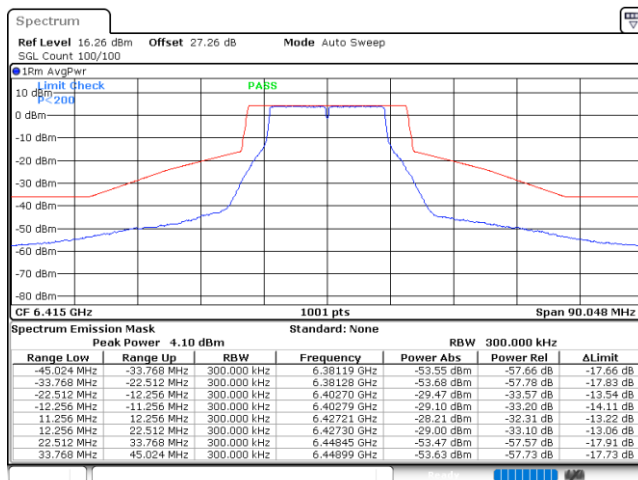

Date: 13.AUG.2024 13:53:41


Plot on Channel 6535 MHz

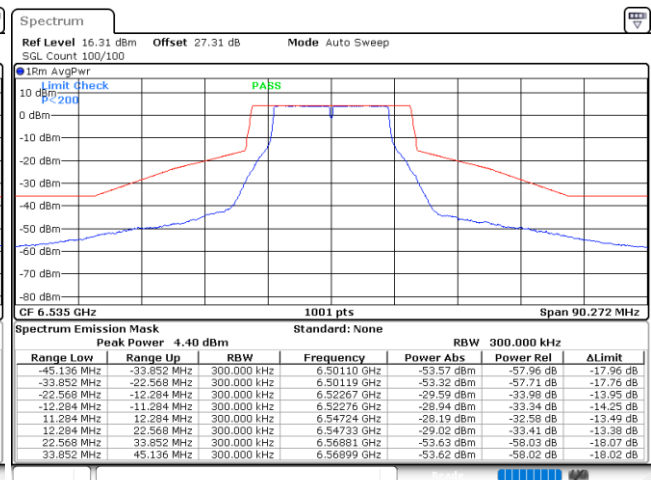

Date: 13.AUG.2024 14:38:15




Plot on Channel 6695 MHz

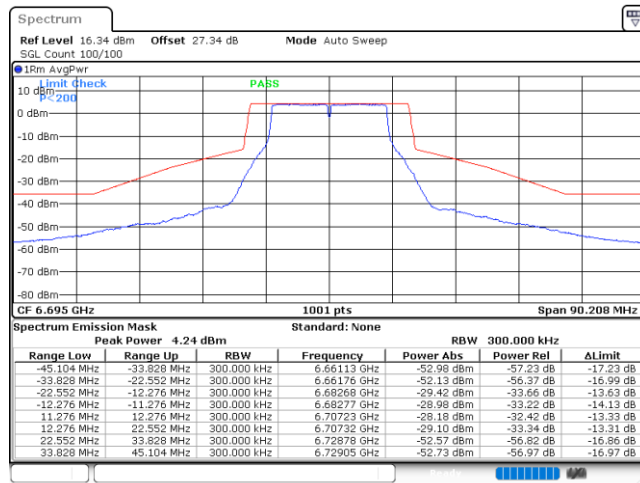

Date: 13.AUG.2024 14:43:55

Plot on Channel 6855 MHz

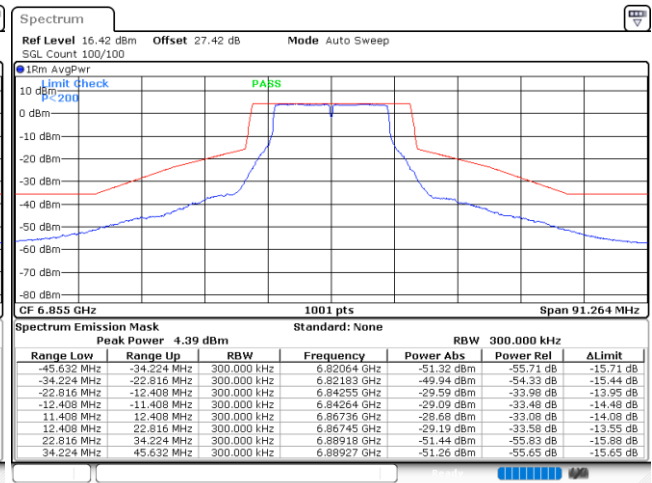

Date: 13.AUG.2024 14:54:19




MIMO <Ant. 2+4(4)>

EUT Mode


802.11a

Plot on Channel 5955 MHz

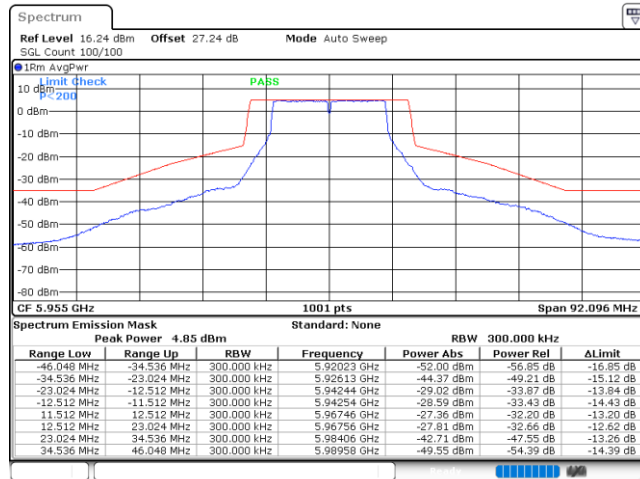


Date: 18.NOV.2024 12:51:04

Plot on Channel 6195 MHz

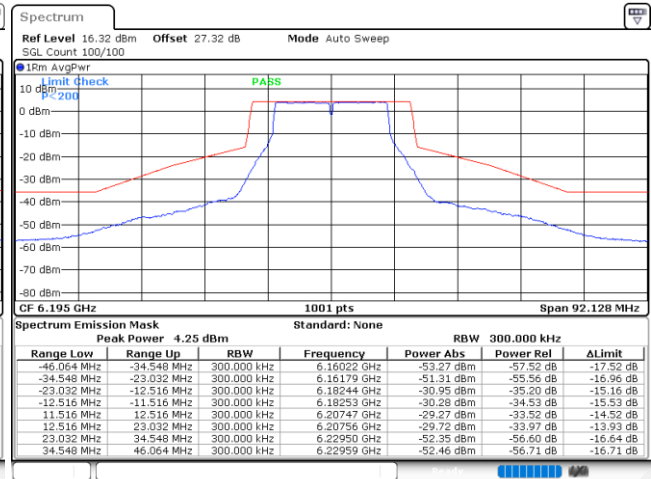


Date: 9.DEC.2024 09:21:01

Plot on Channel 6415 MHz

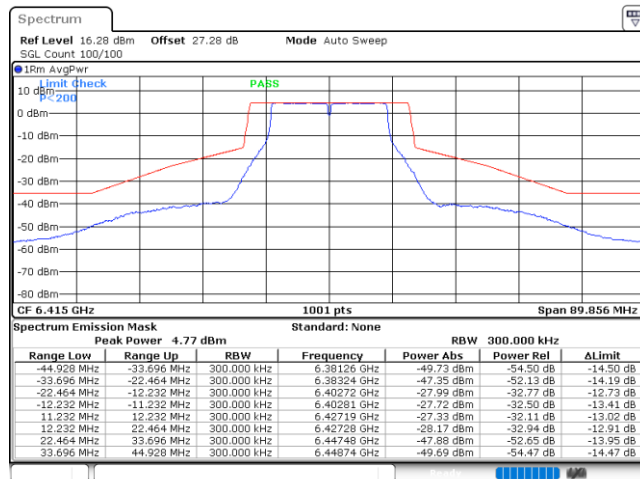

Date: 18.NOV.2024 12:54:08


Plot on Channel 6535 MHz

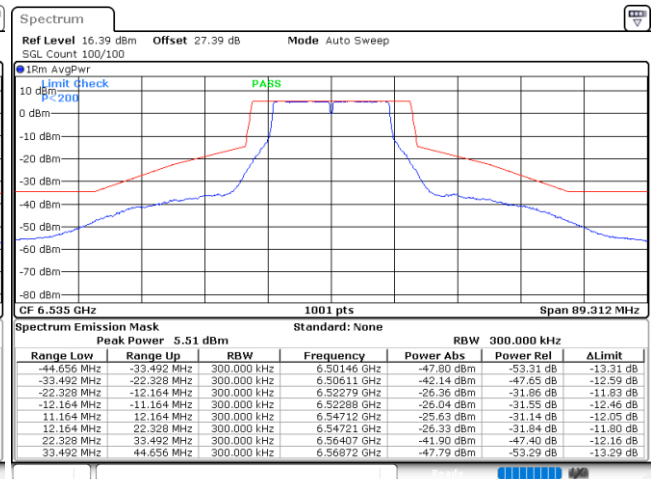

Date: 13.AUG.2024 14:39:28




Plot on Channel 6695 MHz

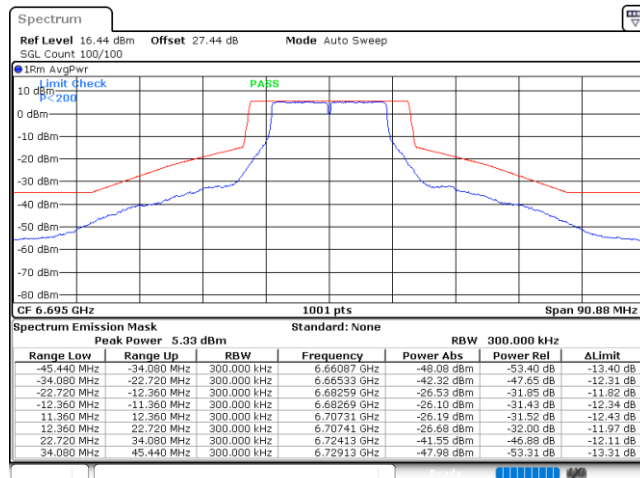

Date: 13.AUG.2024 14:45:46

Plot on Channel 6855 MHz

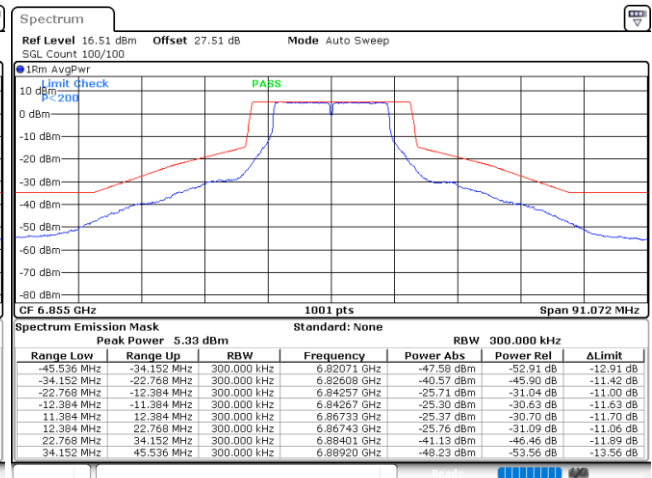

Date: 13.AUG.2024 15:01:21




MIMO <Ant. 2+4(2)>

EUT Mode


802.11be EHT20 FullIRU

Plot on Channel 5955 MHz

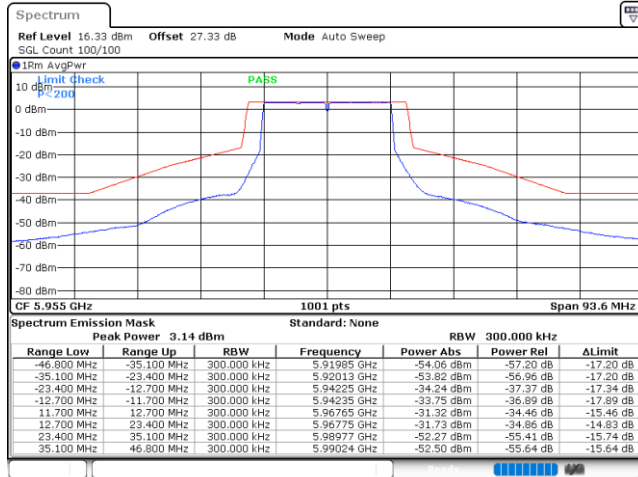


Date: 13.AUG.2024 15:56:12

Plot on Channel 6195 MHz

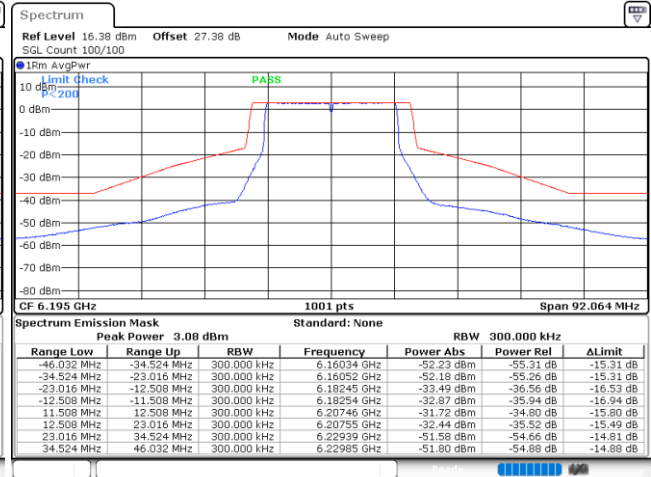


Date: 19.AUG.2024 14:57:20

Plot on Channel 6415 MHz

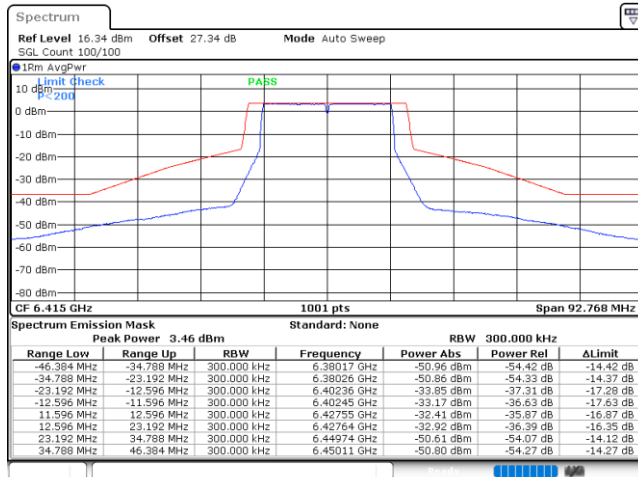

Date: 13.AUG.2024 16:22:32


Plot on Channel 6535 MHz

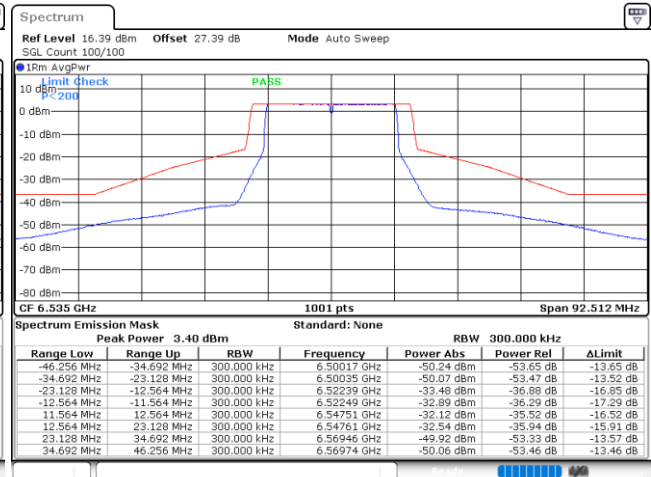

Date: 14.AUG.2024 10:27:47




Plot on Channel 6695 MHz

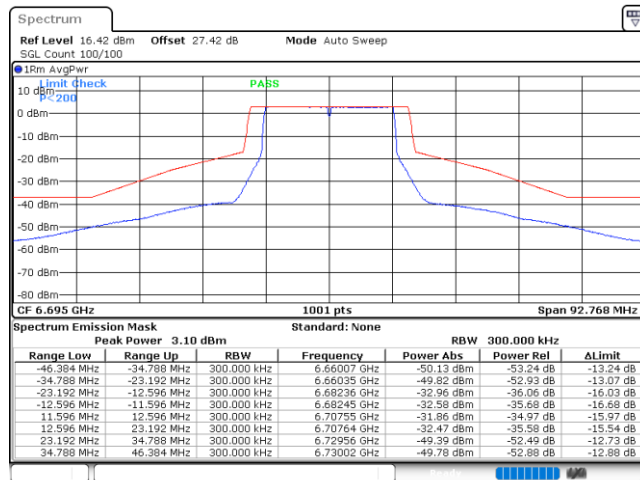

Date: 14.AUG.2024 10:48:23

Plot on Channel 6855 MHz

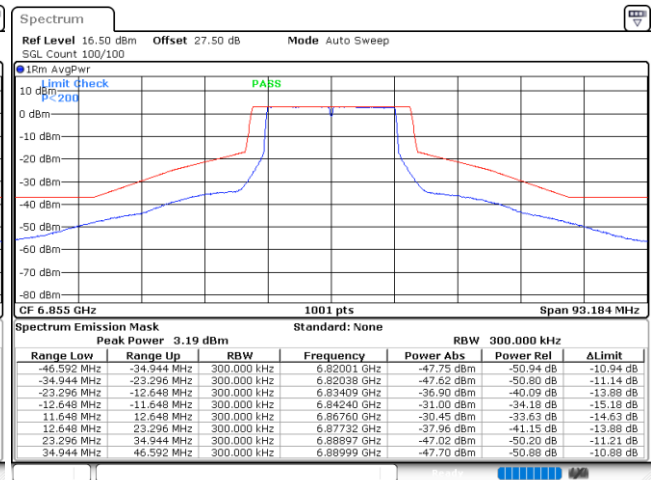

Date: 14.AUG.2024 10:54:32




MIMO <Ant. 2+4(4)>

EUT Mode


802.11be EHT20 FullIRU

Plot on Channel 5955 MHz

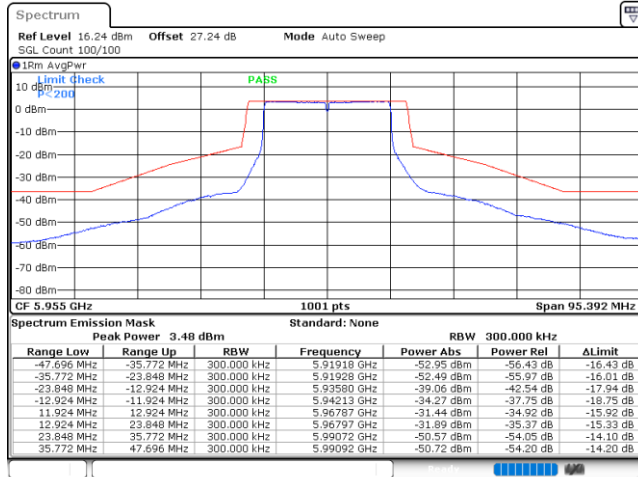


Date: 13.AUG.2024 15:57:11

Plot on Channel 6195 MHz

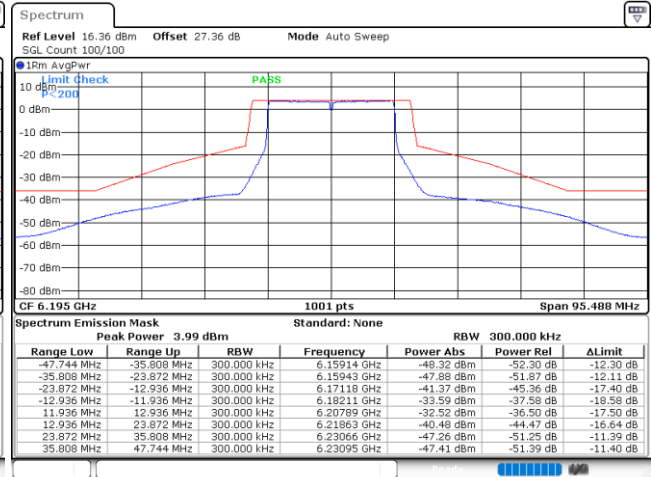


Date: 19.AUG.2024 14:56:31

Plot on Channel 6415 MHz

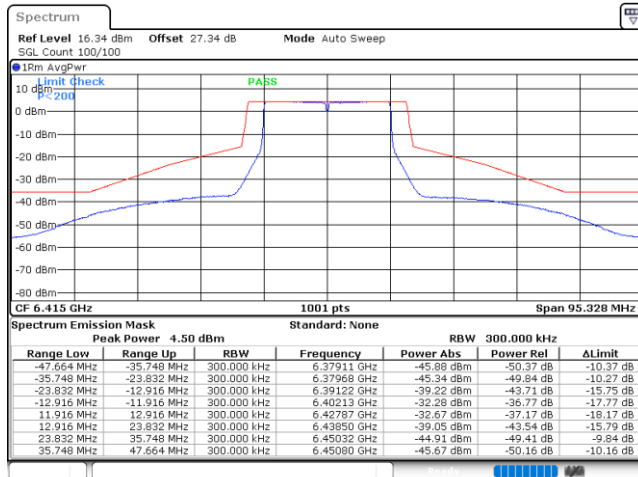

Date: 13.AUG.2024 16:23:45


Plot on Channel 6535 MHz

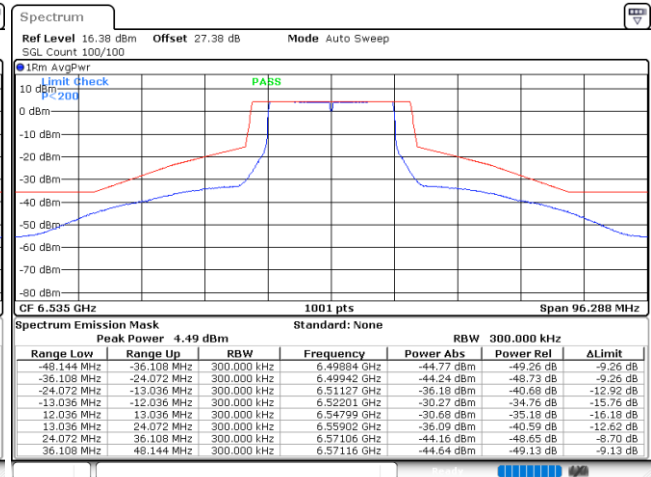

Date: 14.AUG.2024 10:30:47




Plot on Channel 6695 MHz

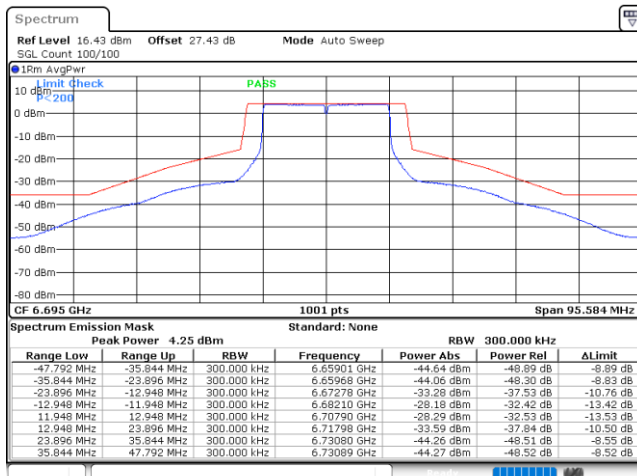

Date: 14.AUG.2024 10:49:36

Plot on Channel 6855 MHz

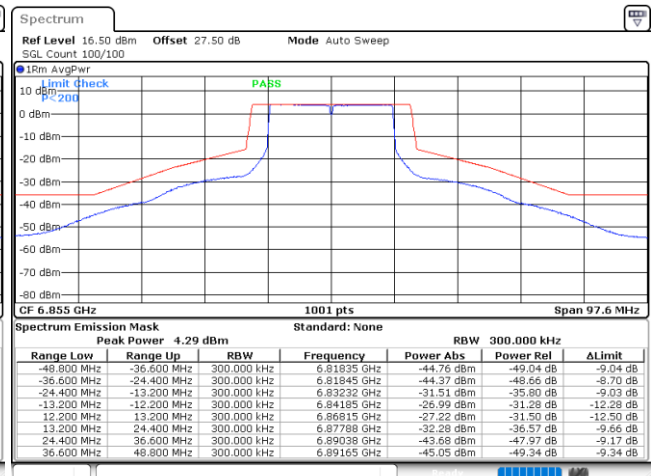

Date: 14.AUG.2024 10:55:41




MIMO <Ant. 2+4(2)>

EUT Mode


802.11be EHT40 FullRU

Plot on Channel 5965 MHz

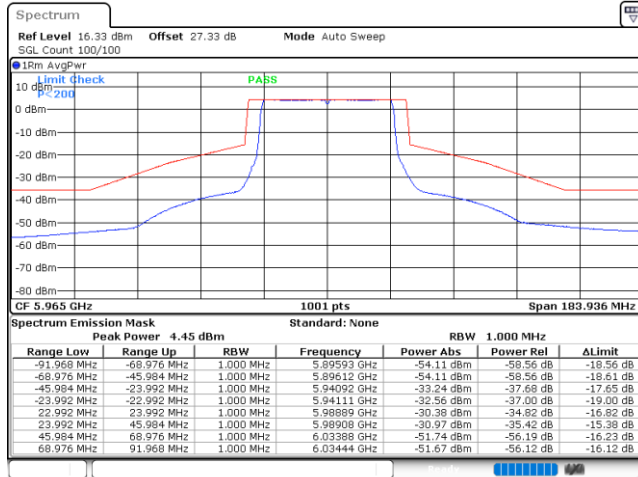


Date: 14.AUG.2024 16:53:37

Plot on Channel 6205 MHz

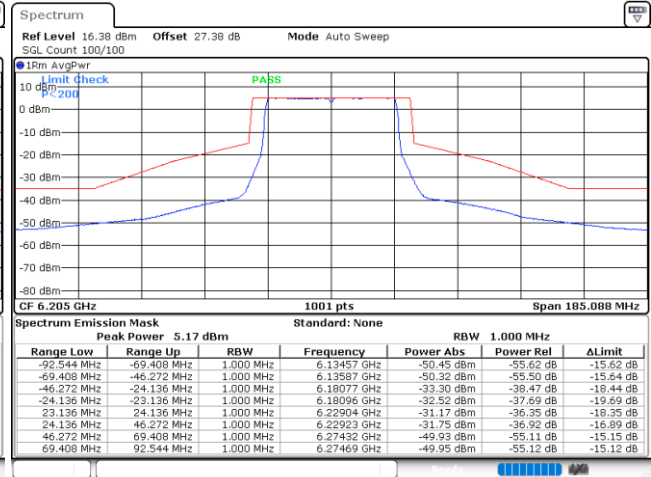


Date: 19.AUG.2024 15:05:51

Plot on Channel 6405 MHz

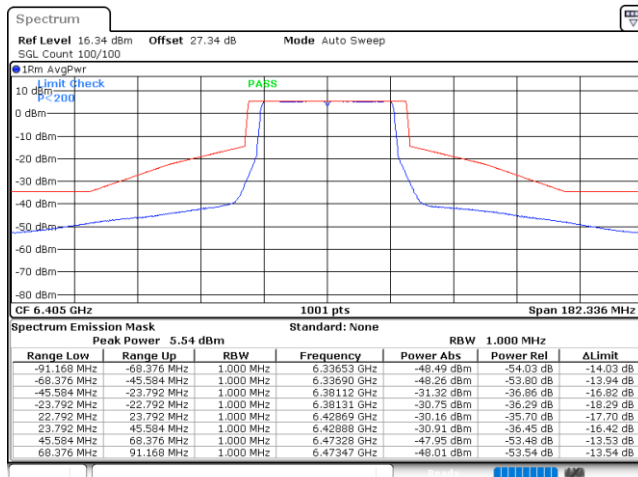

Date: 14.AUG.2024 11:21:11


Plot on Channel 6565 MHz

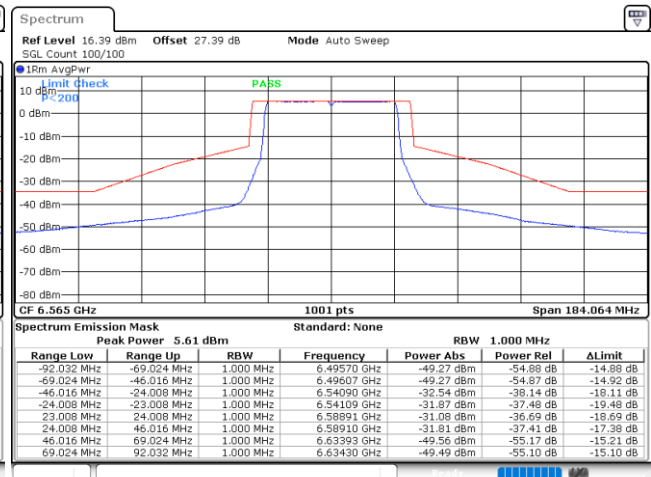


Date: 14.AUG.2024 12:55:55



Plot on Channel 6685 MHz

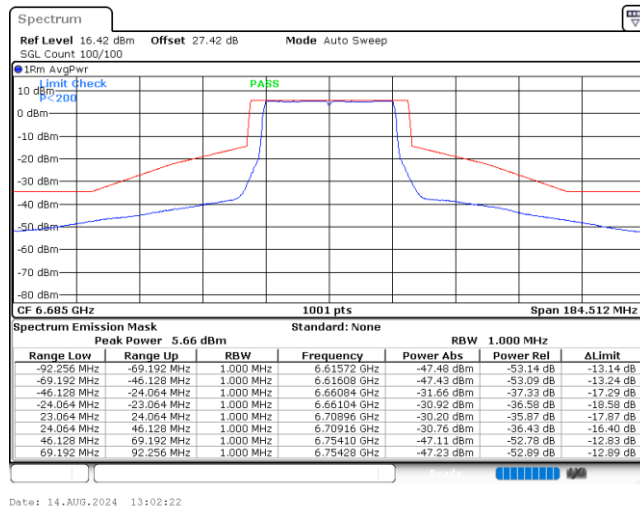

Plot on Channel 6845 MHz

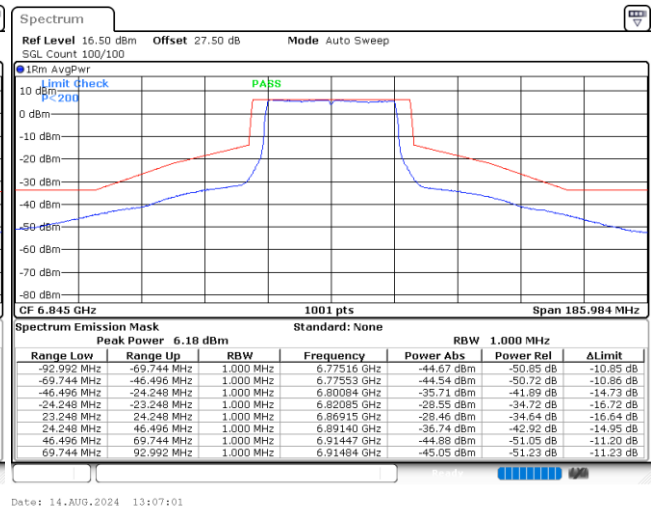




MIMO <Ant. 2+4(4)>

EUT Mode


802.11be EHT40 FullIRU

Plot on Channel 5965 MHz

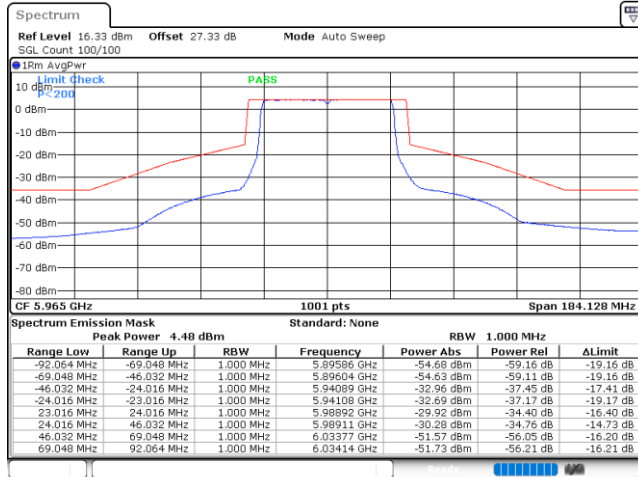


Date: 14.AUG.2024 16:55:02

Plot on Channel 6205 MHz

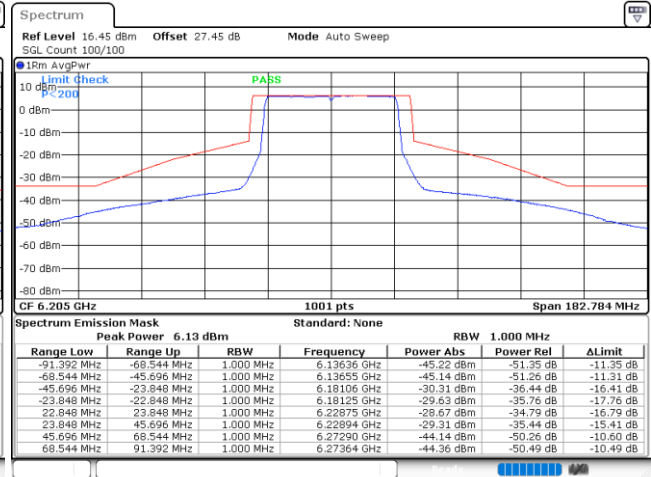


Date: 19.AUG.2024 15:07:45

Plot on Channel 6405 MHz

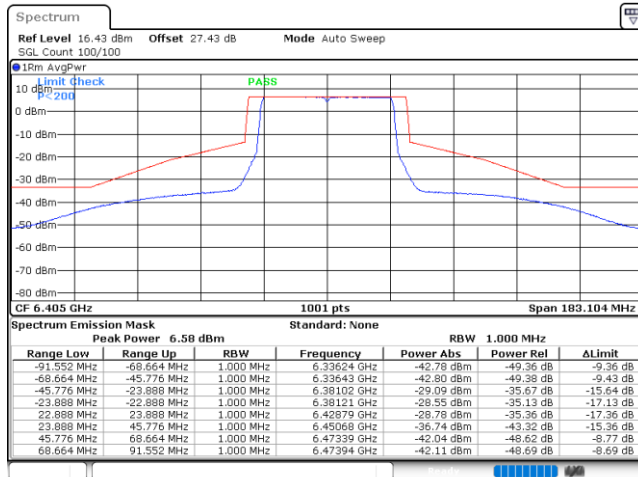

Date: 14.AUG.2024 11:22:24


Plot on Channel 6565 MHz

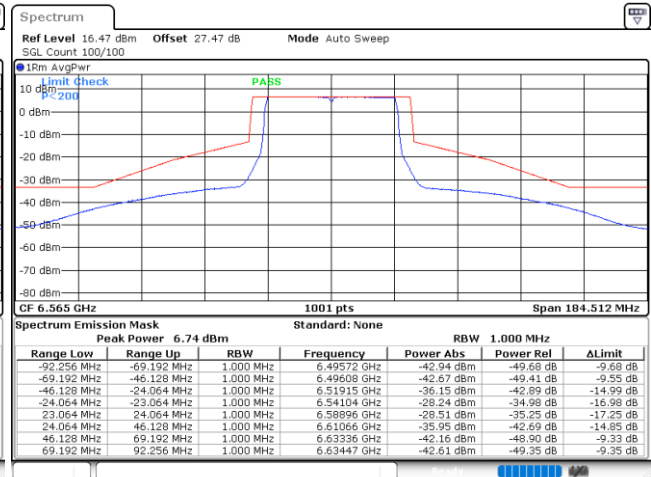

Date: 14.AUG.2024 12:57:02




Plot on Channel 6685 MHz

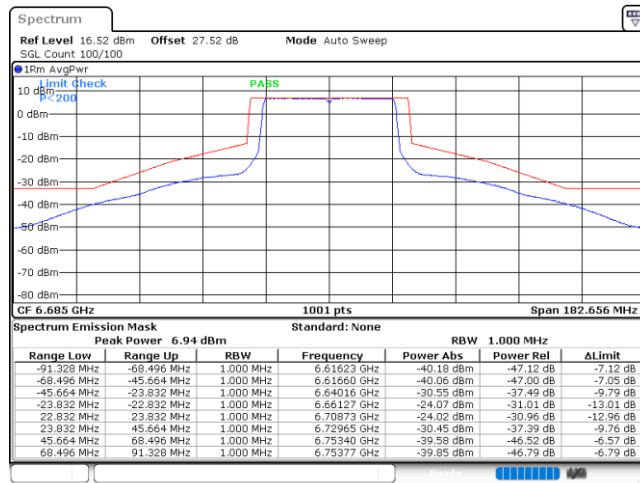

Date: 14.AUG.2024 13:03:49

Plot on Channel 6845 MHz

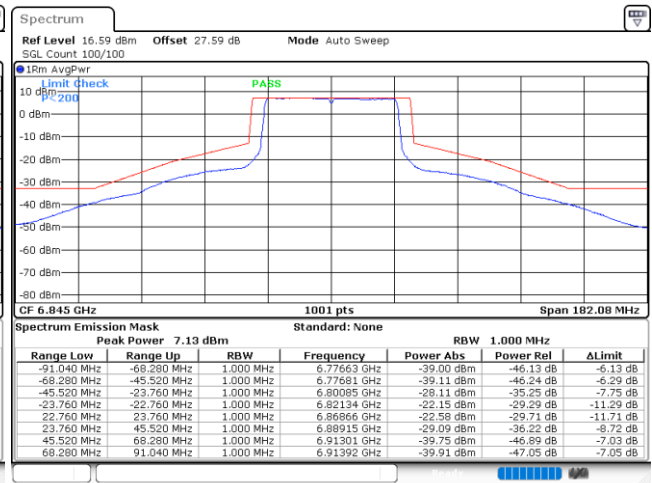

Date: 14.AUG.2024 13:07:57




MIMO <Ant. 2+4(2)>

EUT Mode


802.11be EHT80 FullIRU

Plot on Channel 5985 MHz

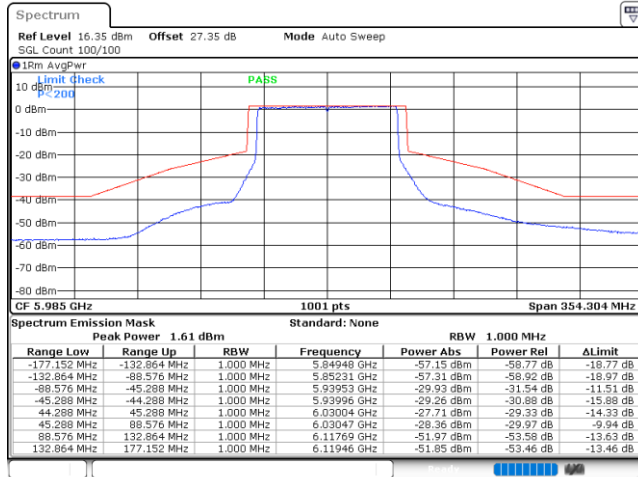


Date: 15.AUG.2024 11:15:48

Plot on Channel 6225 MHz

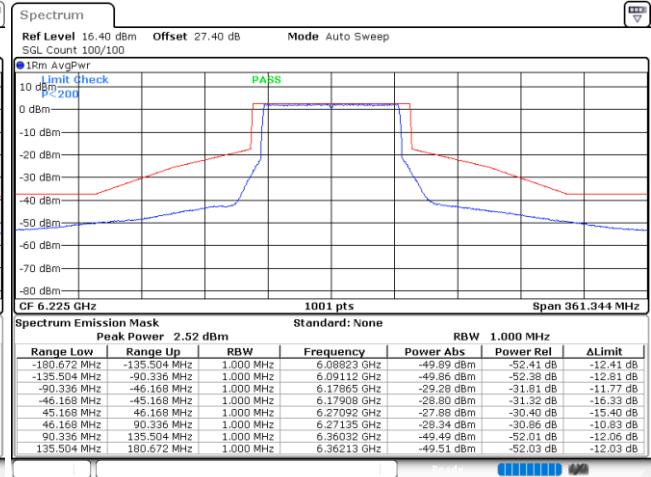


Date: 19.AUG.2024 15:10:00

Plot on Channel 6385 MHz

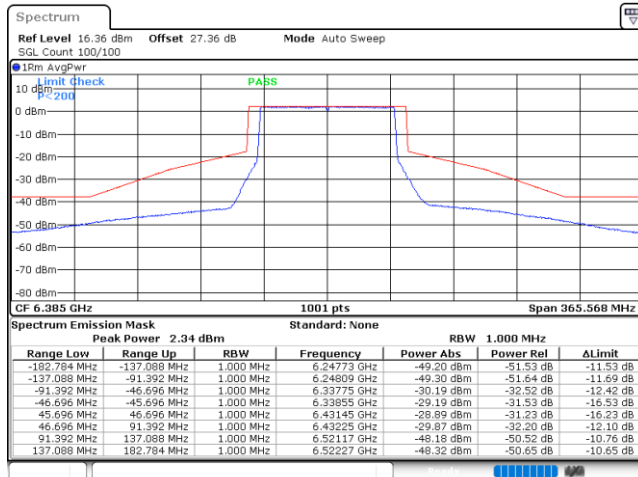

Date: 14.AUG.2024 13:37:36


Plot on Channel 6625 MHz

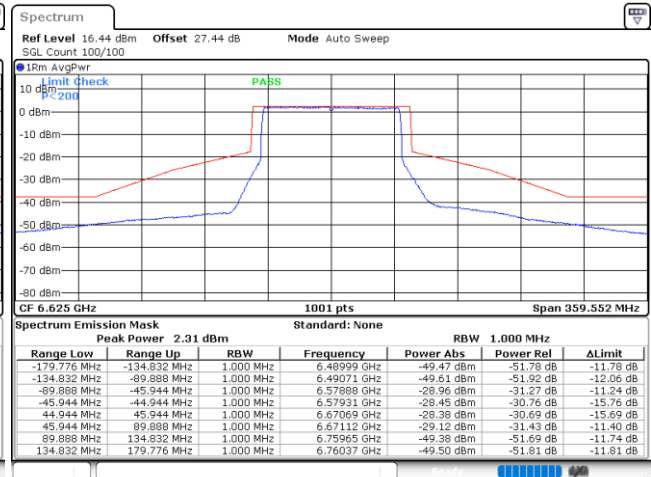

Date: 14.AUG.2024 14:00:49




Plot on Channel 6705 MHz

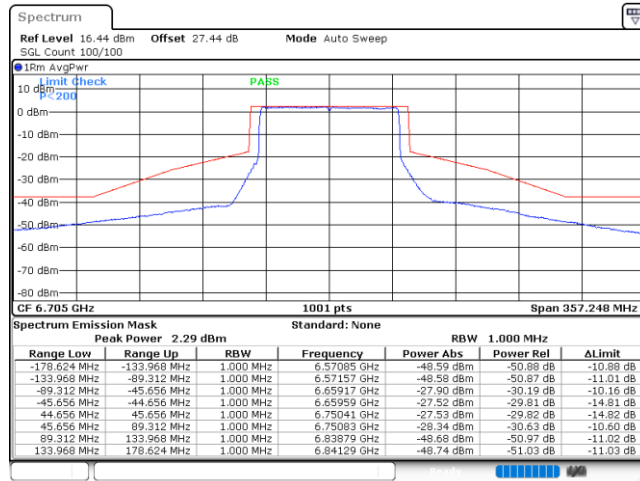

Date: 14.AUG.2024 14:04:52

Plot on Channel 6785 MHz

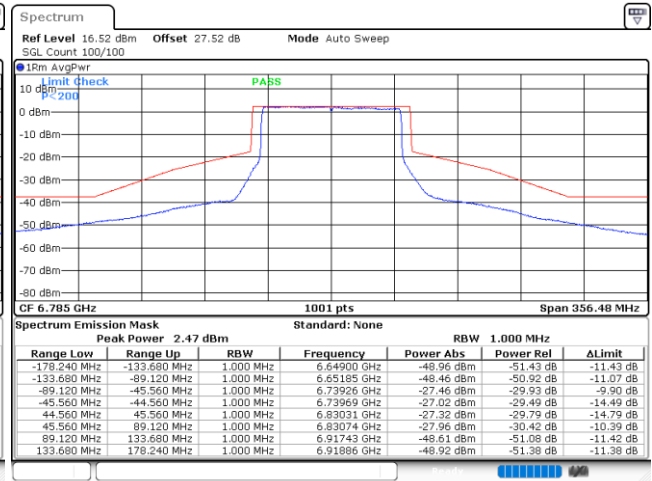

Date: 14.AUG.2024 14:09:07




MIMO <Ant. 2+4(4)>

EUT Mode


802.11be EHT80 FullIRU

Plot on Channel 5985 MHz

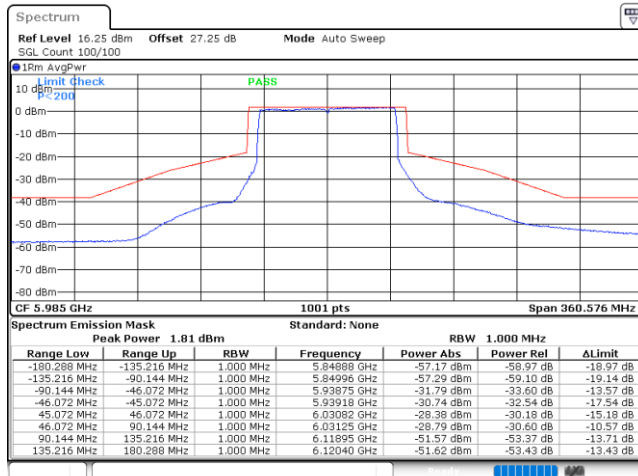


Date: 15.AUG.2024 11:16:40

Plot on Channel 6225 MHz

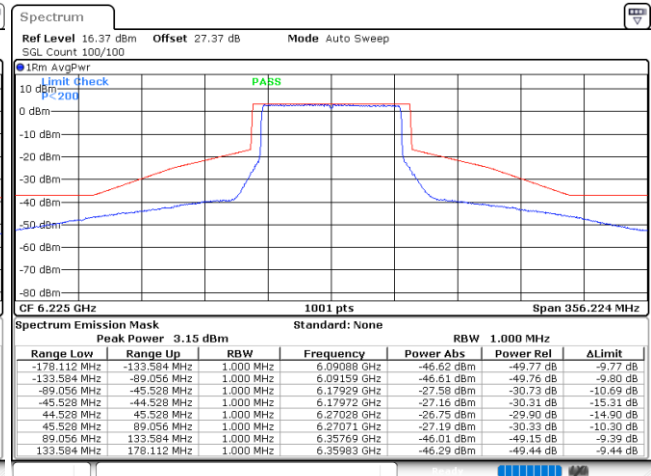


Date: 19.AUG.2024 15:11:21

Plot on Channel 6385 MHz

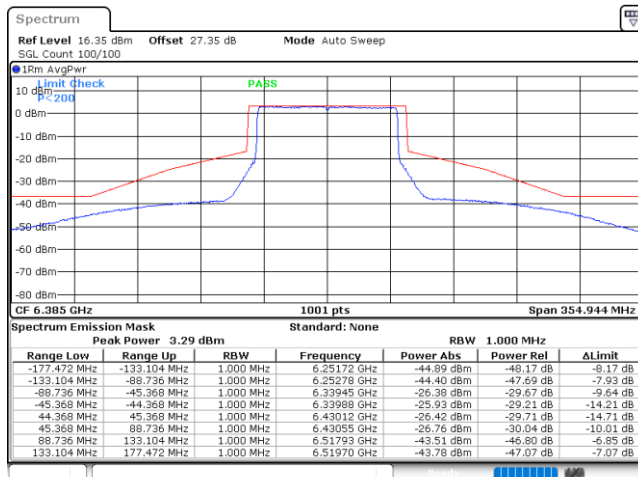

Date: 14.AUG.2024 13:39:18


Plot on Channel 6625 MHz

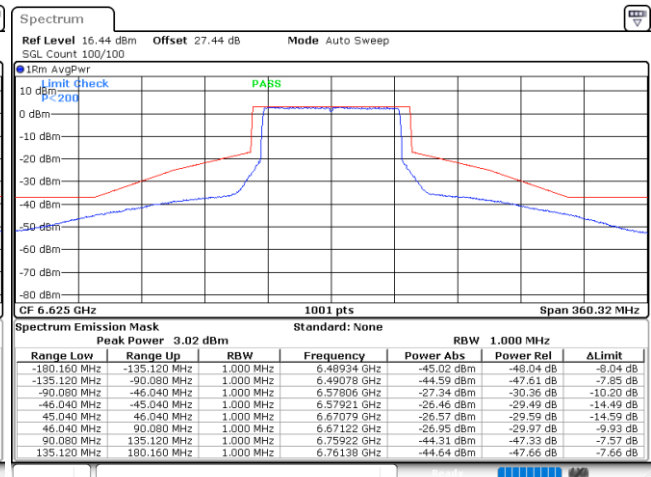

Date: 14.AUG.2024 14:01:43




Plot on Channel 6705 MHz

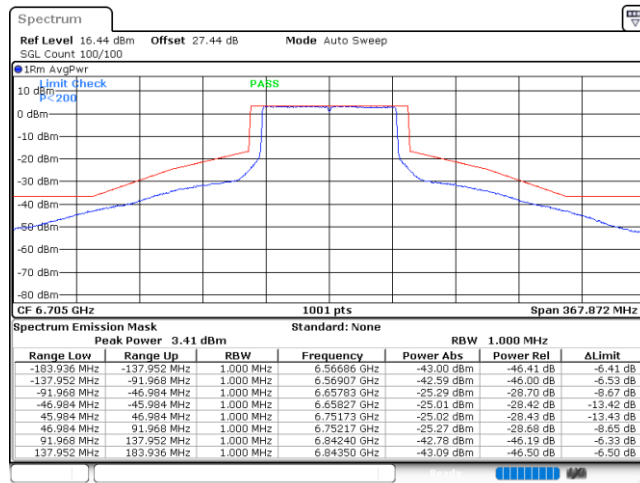

Date: 14.AUG.2024 14:05:48

Plot on Channel 6785 MHz

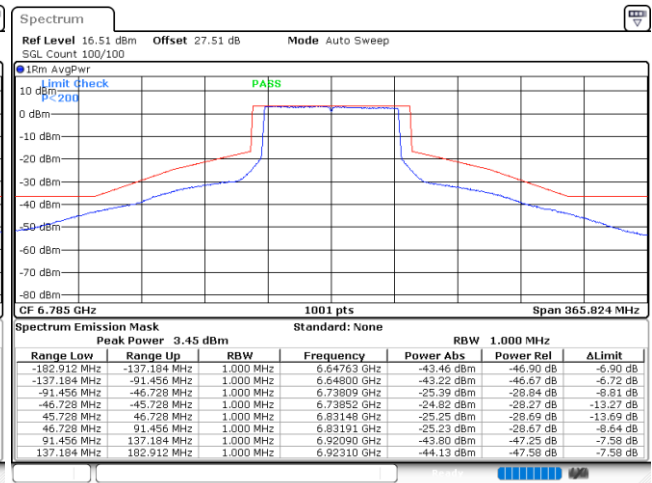

Date: 14.AUG.2024 14:09:54