

FCC RF Test Report

APPLICANT : AcousticSheep, LLC
EQUIPMENT : AcousticSheep Bluetooth Version 1.0
BRAND NAME : AcousticSheep, LLC
MODEL NAME : Bluetooth® Wireless Headphones
FCC ID : S9HZJRNFY03
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on Feb. 21, 2013 and completely tested on Mar. 19, 2013. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Testing Site	6
1.6 Applied Standards	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Descriptions of Test Mode	7
2.2 Test Mode	8
2.3 Connection Diagram of Test System	9
2.4 Support Unit used in test configuration and system	10
2.5 Description of RF Function Operation Test Setup	10
2.6 Measurement Results Explanation Example	11
3 TEST RESULT	12
3.1 Number of Channel Measurement	12
3.2 Hopping Channel Separation Measurement	14
3.3 Dwell Time Measurement	21
3.4 20dB and 99% Bandwidth Measurement	24
3.5 Peak Output Power Measurement	31
3.6 Conducted Band Edges Measurement	33
3.7 Conducted Spurious Emission Measurement	40
3.8 Radiated Band Edges and Spurious Emission Measurement	50
3.9 AC Conducted Emission Measurement	63
3.10 Antenna Requirements	67
4 LIST OF MEASURING EQUIPMENT	68
5 UNCERTAINTY OF EVALUATION	69
APPENDIX A. PHOTOGRAPHS OF EUT	
APPENDIX B. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR322107	Rev. 01	Initial issue of report	Mar. 20, 2013
FR322107	Rev. 02	Update report for revising typo of the worst mode data rate 3 Mbps to 2 Mbps for radiated test cases.	Mar. 21, 2013

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	RSS-210 A8.4(2)	Number of Channels	$\geq 15\text{Chs}$	Pass	-
3.2	15.247(a)(1)	RSS-210 A8.1(b)	Hopping Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.3	15.247(a)(1)	RSS-210 A8.1(d)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass	-
3.4	15.247(a)(1)	RSS-210 A8.1(a)	20dB Bandwidth	NA	Pass	-
3.5	15.247(b)(1)	RSS-210 A8.1(b)	Peak Output Power	$\leq 1\text{ W}$ for 1Mbps $\leq 125\text{ mW}$ for 2, 3Mbps	Pass	-
3.6	15.247(d)	RSS-210 A8.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.247(d)	RSS-210 A8.5	Conducted Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.8	15.247(d)	RSS-210 A8.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 4.45 dB at 4962.000 MHz
3.9	15.207	RSS-Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 8.50 dB at 0.190 MHz
3.10	15.203 & 15.247(b)	RSS-210 A8.4	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

AcousticSheep, LLC

179 Jefferson Circle Bellefonte, PA 16823

1.2 Manufacturer

MAX WAY ELECTRONICS CO., LTD.

8F-16 No.121, Sec. 1, Chongqing S. Rd., Zhongzheng Dist., Taipei City 100

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	AcousticSheep Bluetooth Version 1.0
Brand Name	AcousticSheep, LLC
Model Name	Bluetooth® Wireless Headphones
FCC ID	S9HZJRNFY03
EUT supports Radios application	Bluetooth 2.1
HW Version	ASL03_D0
SW Version	VER 6
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth (1Mbps) : 7.81 dBm (0.0060 W) Bluetooth EDR (2Mbps) : 7.83 dBm (0.0061 W) Bluetooth EDR (3Mbps) : 7.81 dBm (0.0060 W)
Antenna Type	PCB Antenna type with gain 2.00 dBi
Type of Modulation	Bluetooth 2.1 BDR (1Mbps) : GFSK Bluetooth 2.1 EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth 2.1 EDR (3Mbps) : 8-DPSK

1.5 Testing Site

Test Site	SPORTON INTERNATIONAL INC.			
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978			
Test Site No.	Sporton Site No.			FCC/IC Registration No.
	TH02-HY	CO05-HY	03CH05-HY	722060/4086B-1

The test site complies with ANSI C63.4 2003 requirement.

1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.10-2009

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

Preliminary tests were performed in different data rates and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	6.25 dBm	7.30 dBm	7.43 dBm
Ch39	2441MHz	6.51 dBm	7.61 dBm	7.55 dBm
Ch78	2480MHz	7.81 dBm	7.83 dBm	7.81 dBm

Remark:

1. All the test data for each data rate were verified, but only the worst case was reported.
 2. The data rate was set in 2Mbps for all the test items due to the highest RF output power.
- a. The EUT has been associated with peripherals pursuant to ANSI C63.10-2009 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 KHz to 30 MHz), radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).
 - b. AC power line Conducted Emission was tested under maximum output power.


2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK		
	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz		
AC Conducted Emission	Mode 1 :EUT + Earphone 1 + USB Cable (Charging from Notebook) Mode 2 :EUT + Earphone 2 + USB Cable (Charging from Notebook)		
Remark:			
1. For radiated test cases, the worst mode data rate 2Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and the conducted spurious emissions and conducted band edge measurement for each data rate are no worse than 2Mbps, and no other significantly frequencies found in conducted spurious emission .			
2. The worst case of conducted emission is mode 2; only the test data of it was reported.			

2.3 Connection Diagram of Test System


<Bluetooth Tx Mode>

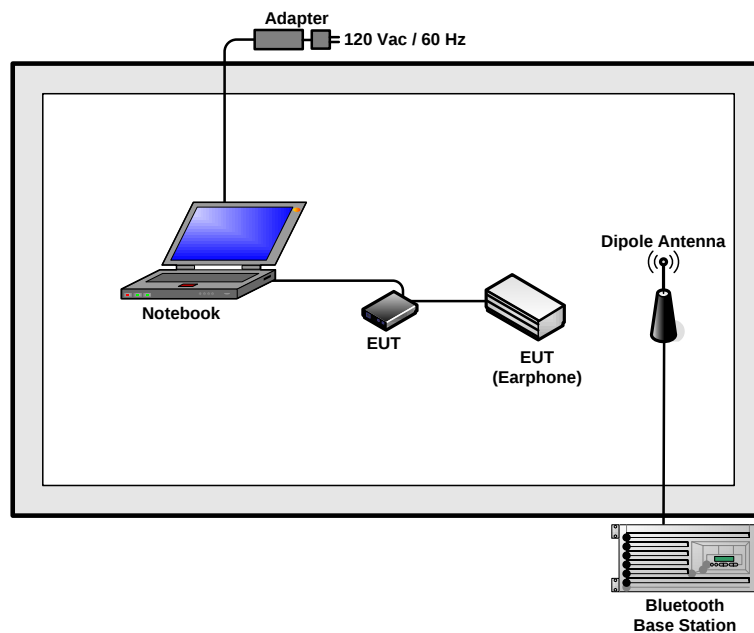

<AC Conducted Emission Mode with Earphone 1>

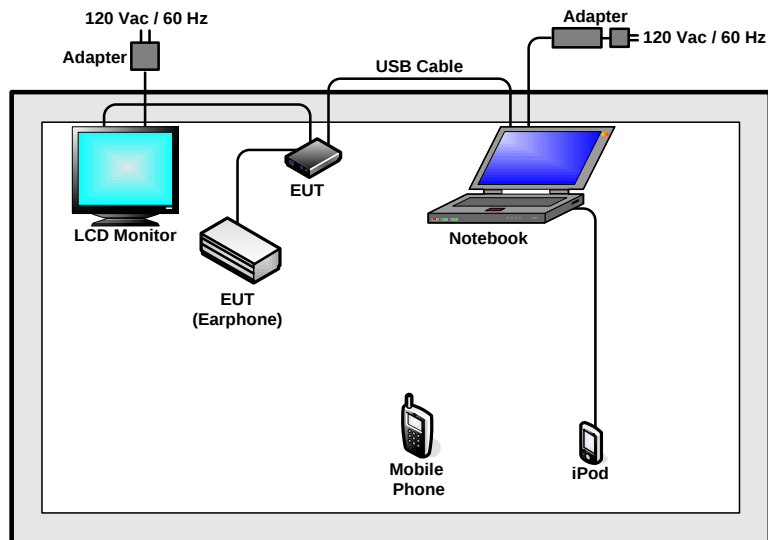

<AC Conducted Emission Mode with Earphone 2>

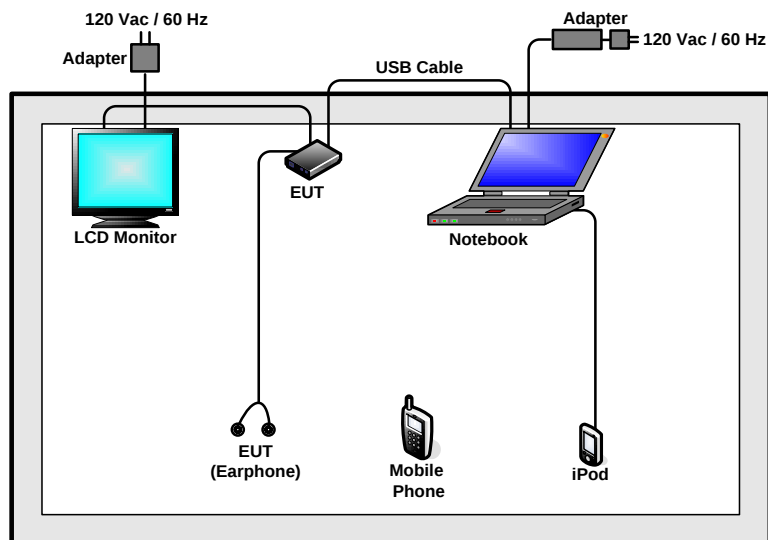

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	Latitude E6320	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
2.	Notebook	Acer	PEW71	MCLBCM92046	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	LCD Monitor	Dell	U2410	FCC DoC	Shielded, 1.6 m	Unshielded, 1.8 m
4.	Mobile Phone	SAMSUNG	GT-N7000	N/A	N/A	N/A
5.	SC Card	SanDisk	MicroSD HC	N/A	N/A	N/A
6.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0 m	N/A

2.5 Description of RF Function Operation Test Setup

For Bluetooth function, programmed RF utility, execute "Broadcom BlueTool" make the EUT provides functions like channel selection and power level for continuous transmitting and receiving signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

For radiated band edges and spurious emission test :

Per part 15.35(c), the EUT Bluetooth average emission level could be determined by the peak emission level applying duty cycle correction factor, to represent averaging over the whole pulse train.

The average level is derived from the peak level corrected with "Duty cycle correction factor".

$$\text{Average Emission Level(dB}\mu\text{V/m)} = \text{Peak Emission Level(dB}\mu\text{V/m)} + \text{Duty cycle correction factor(dB)}$$

$$\text{Duty cycle correction factor(dB)} = 20 * \log(\text{Duty cycle}).$$

Duty cycle = On time / 100 milliseconds

On time = worst case dwell time * hopping number in 100 ms

For example : bluetooth with worst case dwell time 2.9ms and 2 hops in 100 ms, then

$$\text{Duty cycle correction factor(dB)} = 20 * \log((2.9 * 2) / 100) = -24.73 \text{ dB}$$

Following shows an average computation example with duty cycle correction factor = -24.73dB, and the peak emission level is 45.61 dB μ V/m.

Example :

$$\begin{aligned}\text{Average Emission Level(dB}\mu\text{V/m)} &= \text{Peak Emission Level(dB}\mu\text{V/m)} + \text{duty cycle correction factor(dB)} \\ &= 45.61 + (-24.73) = 20.88 \text{ (dB}\mu\text{V/m)}\end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW $\geq$ 1% of the span; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.


3.1.4 Test Setup

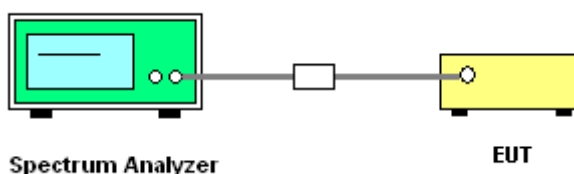


3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Reece Li	Relative Humidity :	48~51%
Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass

Number of Hopping Channel Plot on Channel 00 - 78

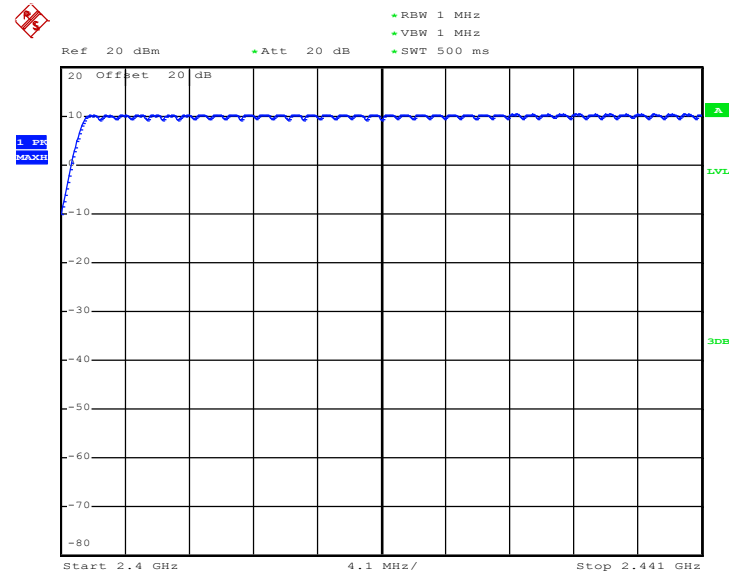

Date: 15.MAR.2013 22:59:53

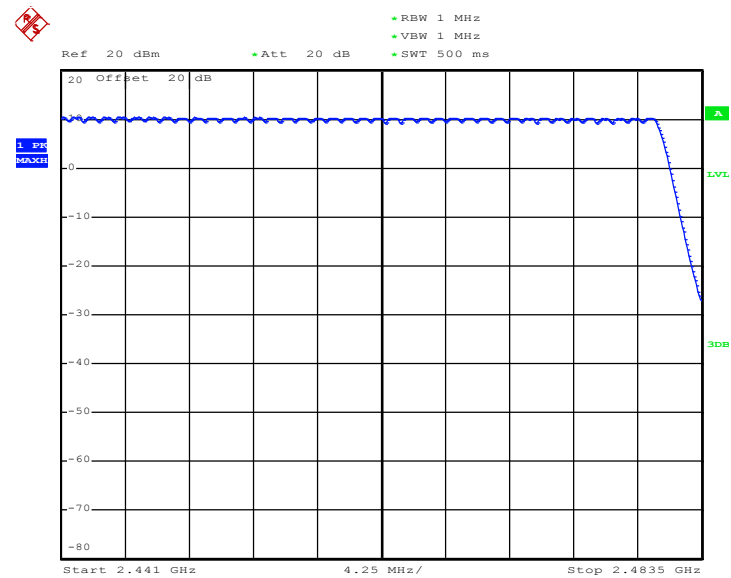

Date: 15.MAR.2013 23:07:34

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels; $RBW \geq 1\%$ of the span;
 $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

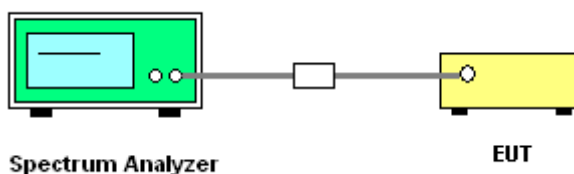


3.2.5 Test Result of Hopping Channel Separation

Test Mode :	1Mbps	Temperature :	24~26℃
Test Engineer :	Reece Li	Relative Humidity :	48~51%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.008	0.6000	Pass
39	2441	1.002	0.6000	Pass
78	2480	1.002	0.6080	Pass


Channel Separation Plot on Channel 00 - 01

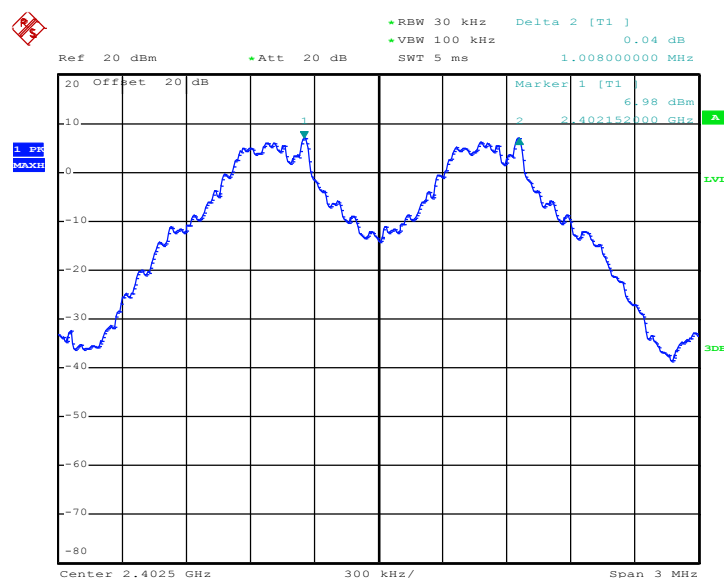

Date: 15.MAR.2013 20:47:14




Channel Separation Plot on Channel 39 - 40

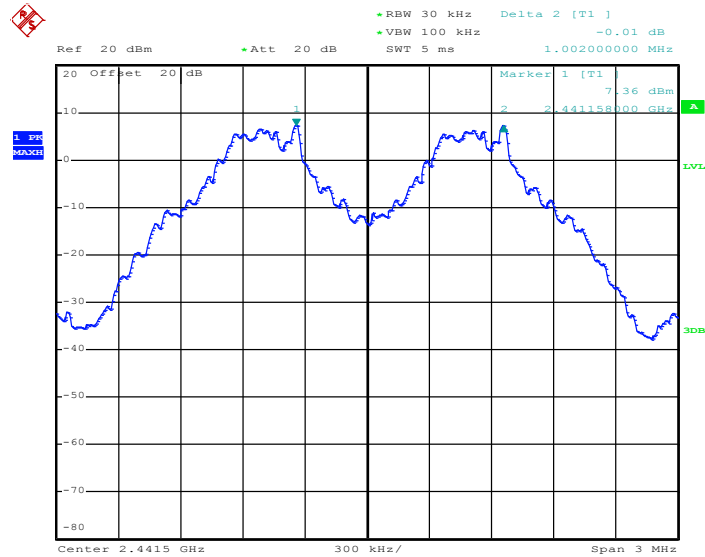

Date: 15.MAR.2013 20:56:13

Channel Separation Plot on Channel 77 - 78

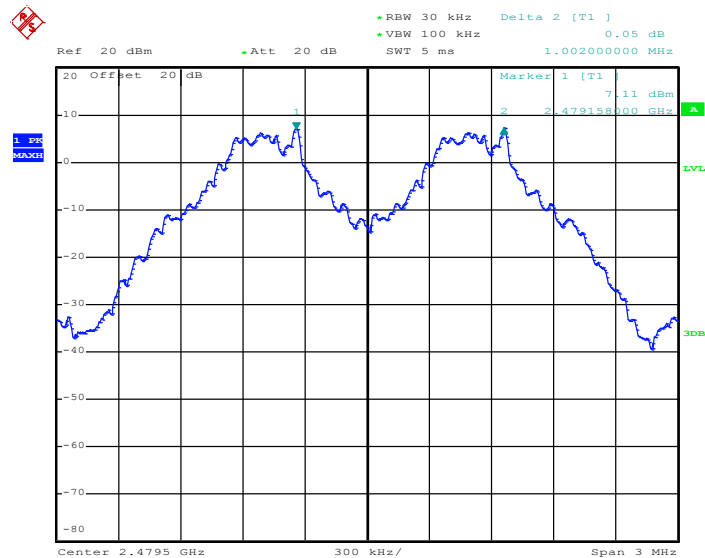


Date: 15.MAR.2013 21:01:39



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Reece Li	Relative Humidity :	48~51%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8800	Pass
39	2441	1.002	0.8800	Pass
78	2480	1.008	0.8640	Pass


Channel Separation Plot on Channel 00 - 01

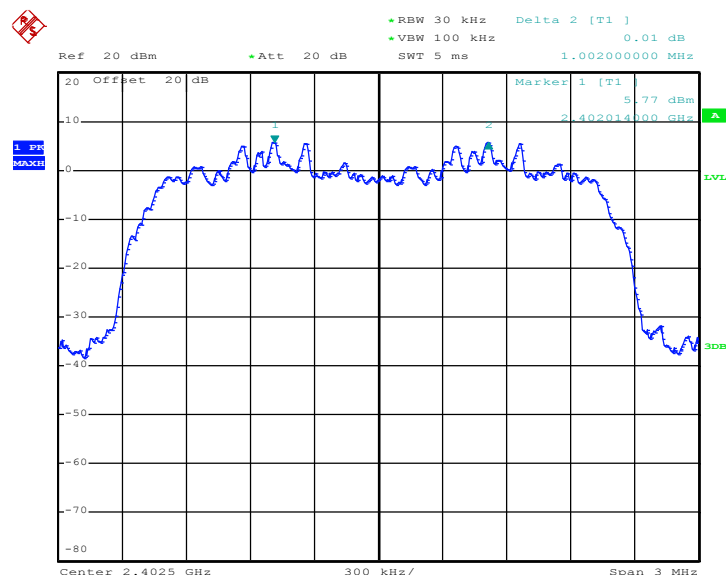

Date: 15.MAR.2013 22:42:18




Channel Separation Plot on Channel 39 - 40

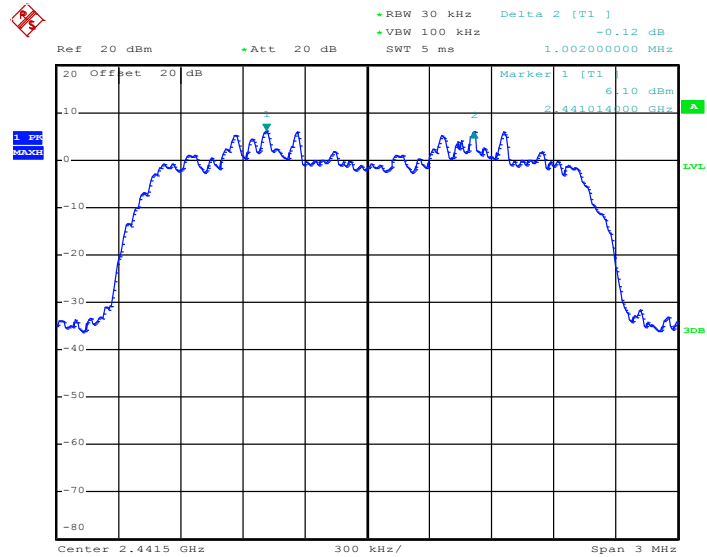

Date: 15.MAR.2013 22:35:40


Channel Separation Plot on Channel 77 - 78

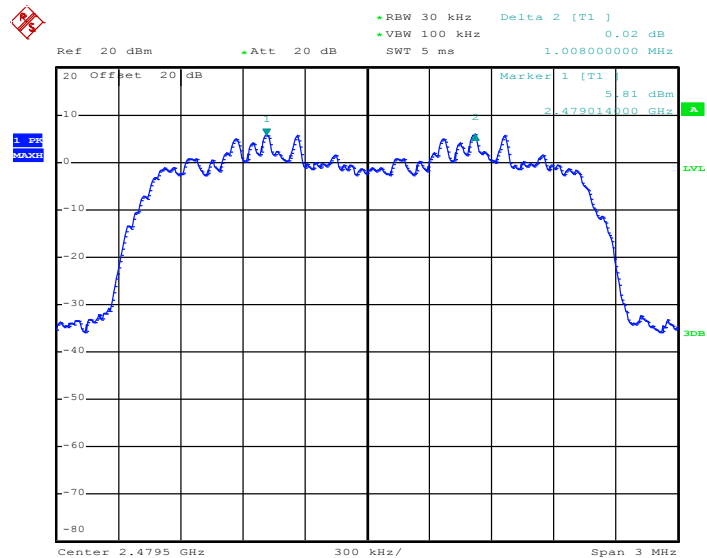

Date: 15.MAR.2013 22:28:00




Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.008	0.8680	Pass
39	2441	1.008	0.8680	Pass
78	2480	1.002	0.8680	Pass

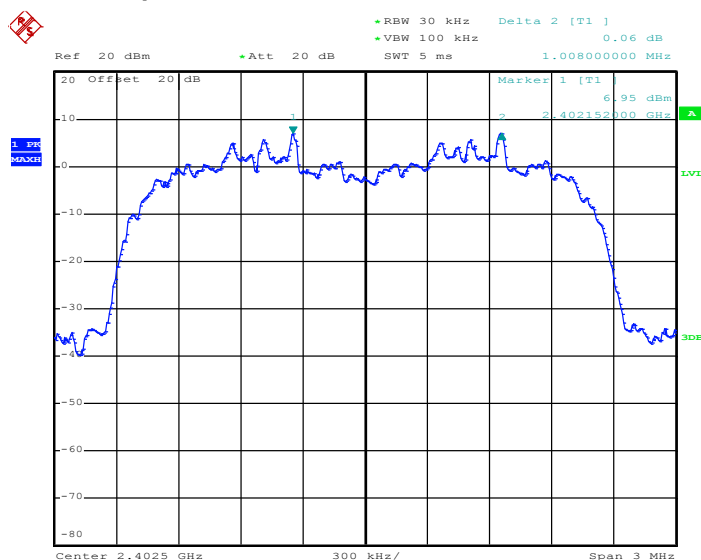

Date: 15.MAR.2013 21:30:08




Channel Separation Plot on Channel 39 - 40

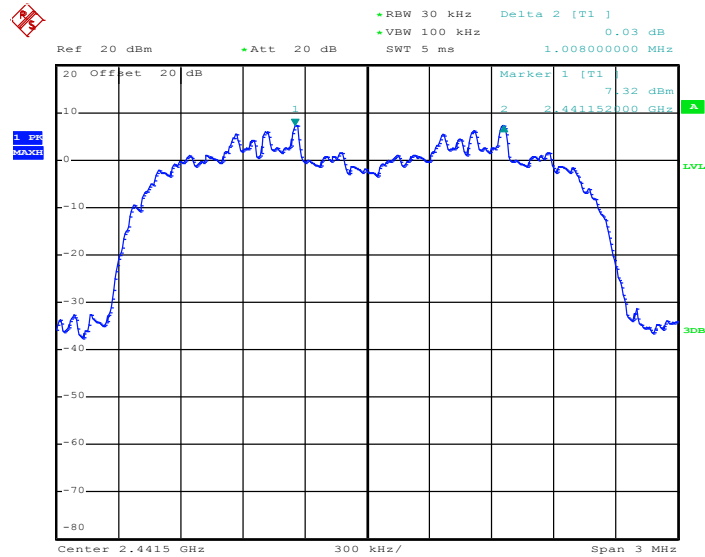

Date: 15.MAR.2013 21:54:21

Channel Separation Plot on Channel 77 - 78

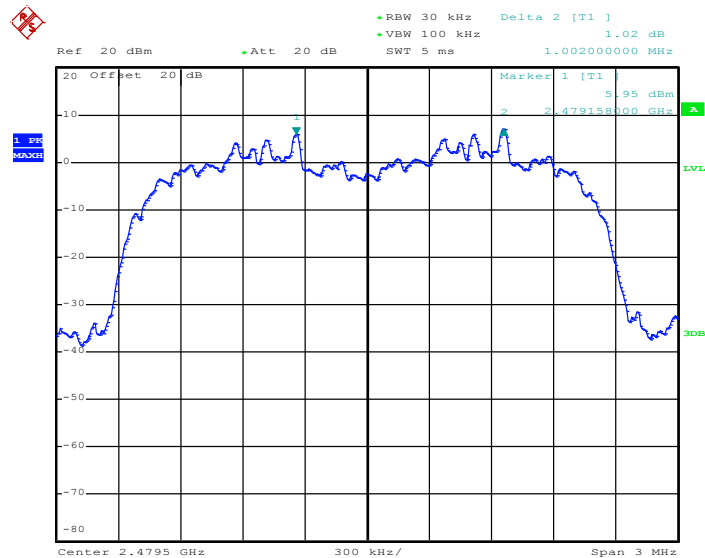

Date: 15.MAR.2013 22:02:01

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

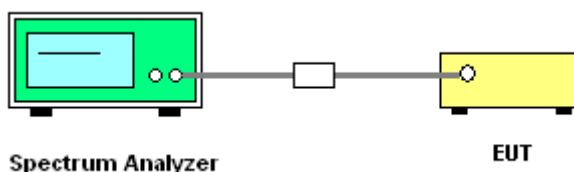

3.3.5 Test Result of Dwell Time

Test Mode :	DH5	Temperature :	24~26℃
Test Engineer :	Reece Li	Relative Humidity :	48~51%


Mode	Hopping Channel Number	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	79	106.67	2.96	0.32	0.4	Pass
AFH	20	53.33	2.96	0.16	0.4	Pass

Remark:

- In normal mode, hopping rate is 1600hops/s with 6 slots in 79 hopping channels.
With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),
Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
- In AFH mode, hopping rate is 800hops/s with 6 slots in 20 hopping channels.
With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s),
Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
- Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time



Package Transfer Time Plot

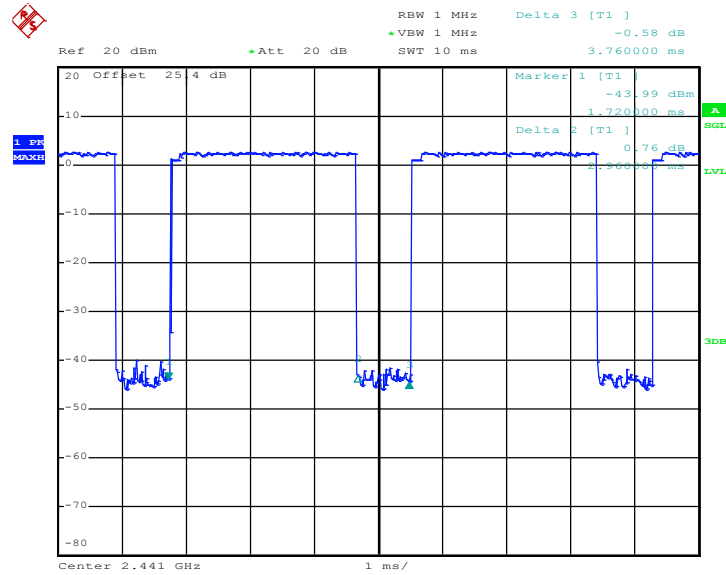

Date: 28.FEB.2013 10:17:58

3.4 20dB Bandwidth Measurement

3.4.1 Limit of 20dB Bandwidth

Reporting only


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW $\geq$ 1% of the 20 dB bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Measure and record the results in the test report.

3.4.4 Test Setup

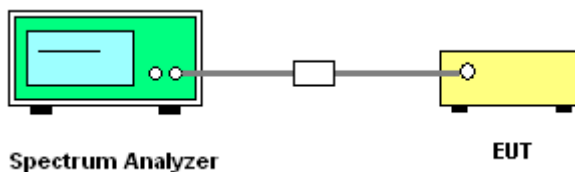


3.4.5 Test Result of 20dB Bandwidth

Test Mode :	1Mbps	Temperature :	24~26℃
Test Engineer :	Reece Li	Relative Humidity :	48~51%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.900
39	2441	0.900
78	2480	0.912


20 dB Bandwidth Plot on Channel 00

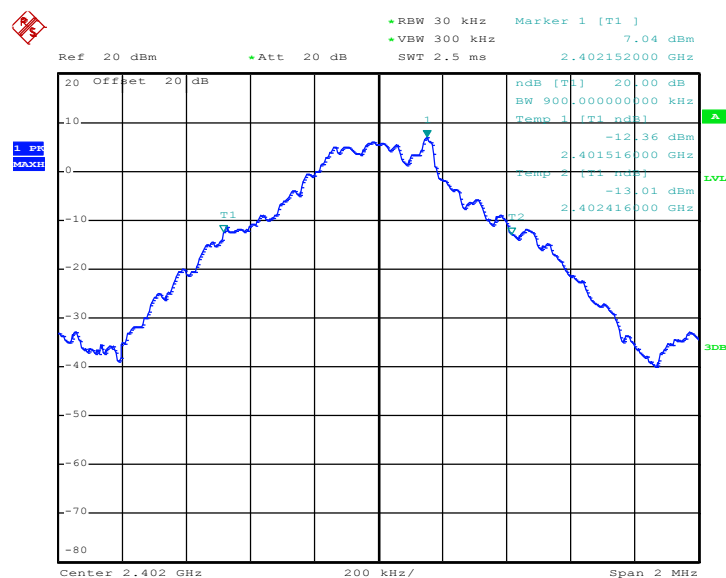

Date: 15.MAR.2013 20:42:02




20 dB Bandwidth Plot on Channel 39

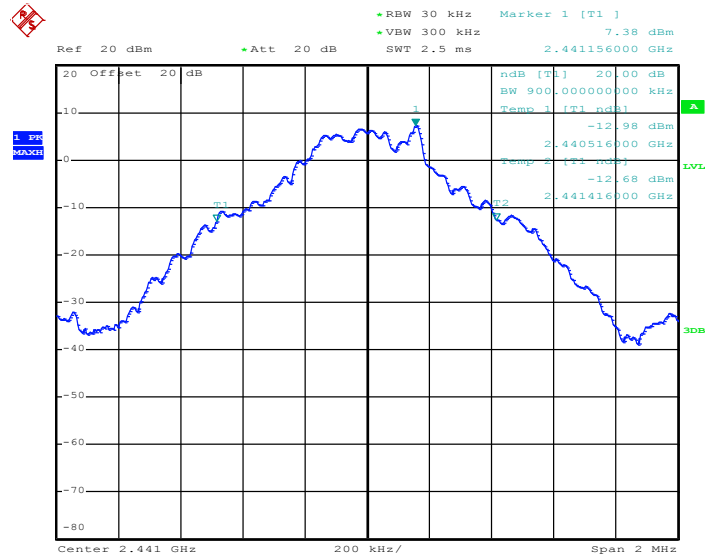

Date: 15.MAR.2013 20:48:32

20 dB Bandwidth Plot on Channel 78

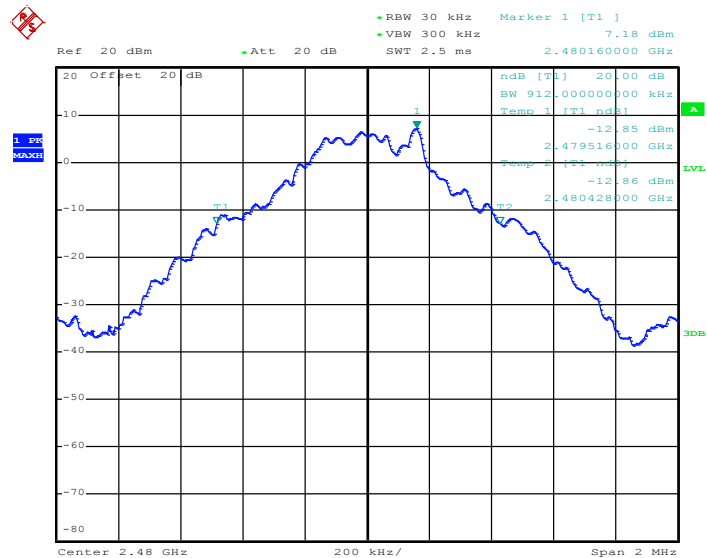


Date: 15.MAR.2013 20:57:00




Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Reece Li	Relative Humidity :	48~51%


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.320
39	2441	1.320
78	2480	1.296

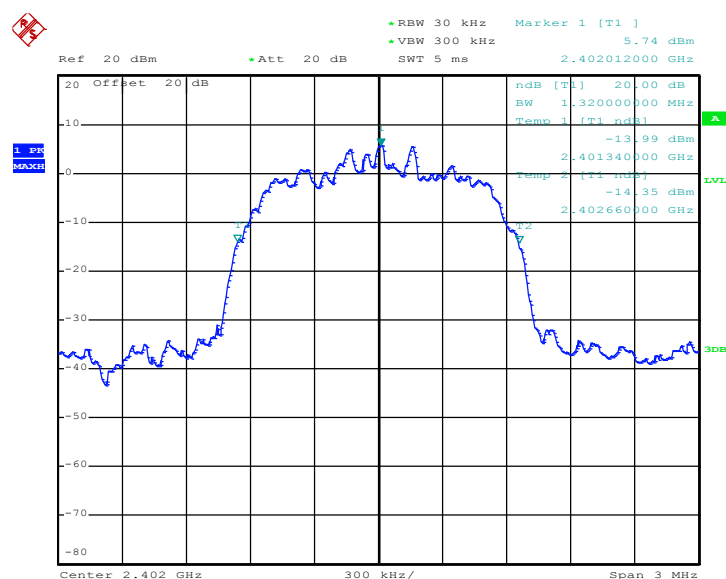20 dB Bandwidth Plot on Channel 00

Date: 15.MAR.2013 22:36:16

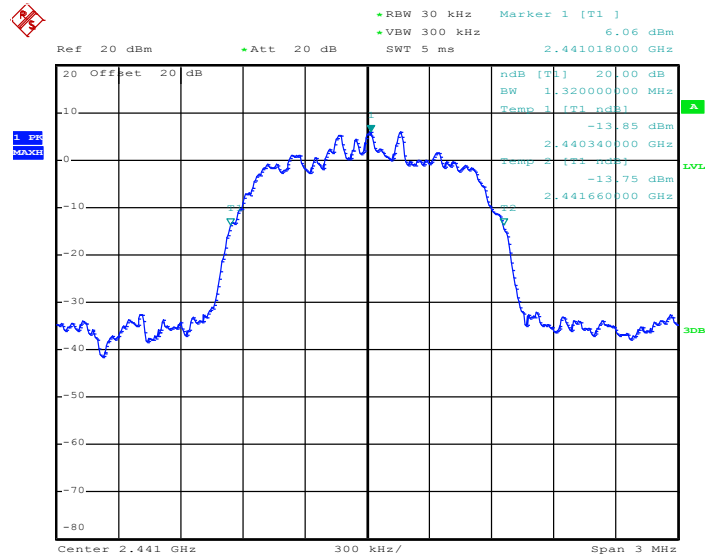20 dB Bandwidth Plot on Channel 39


Date: 15.MAR.2013 22:28:49

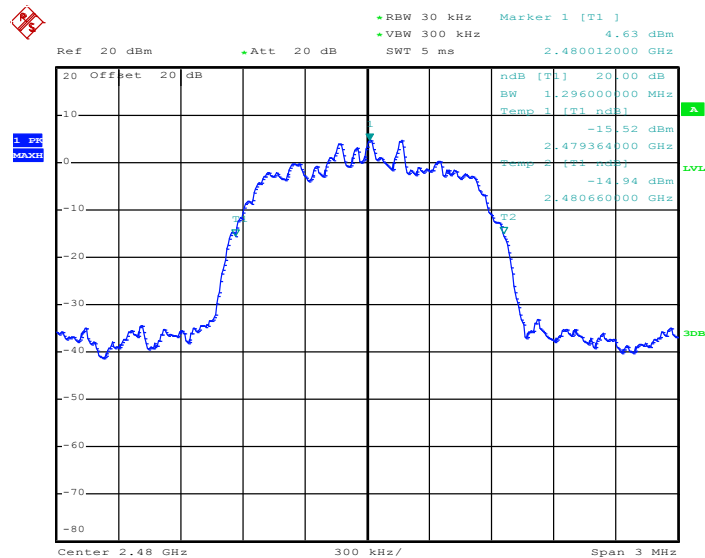20 dB Bandwidth Plot on Channel 78


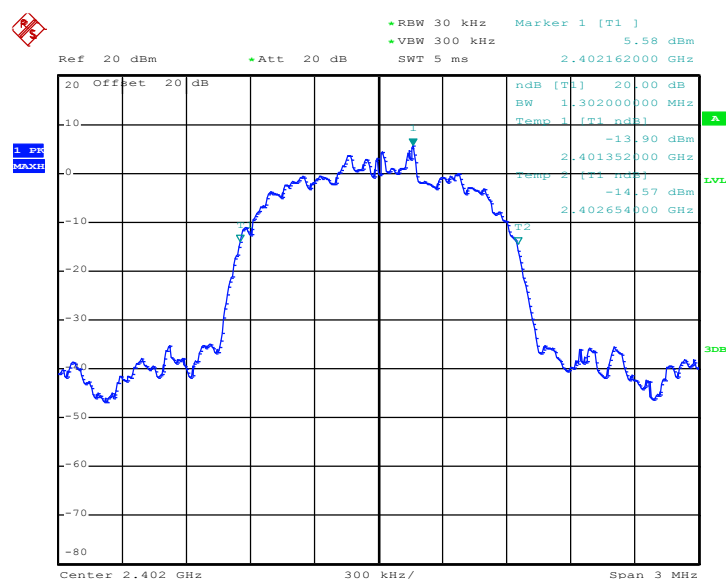
Date: 15.MAR.2013 22:21:34



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	Reece Li	Relative Humidity :	48~51%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.302
39	2441	1.302
78	2480	1.302


20 dB Bandwidth Plot on Channel 00



Date: 15.MAR.2013 21:02:35




20 dB Bandwidth Plot on Channel 39

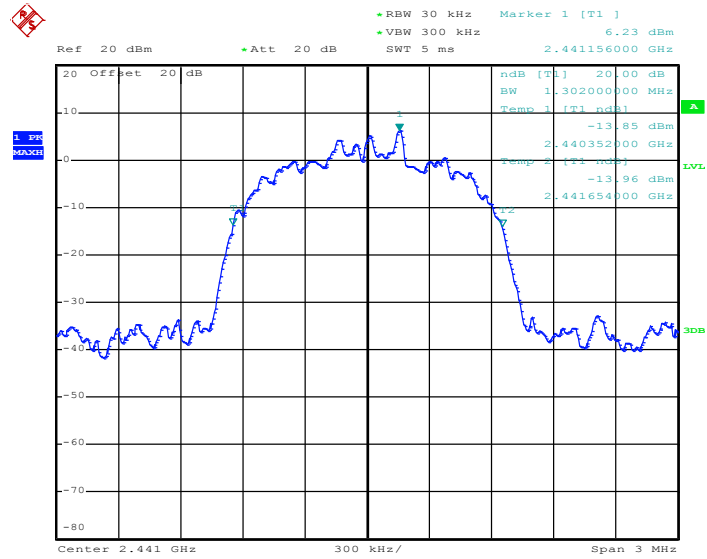

Date: 15.MAR.2013 21:51:43

20 dB Bandwidth Plot on Channel 78

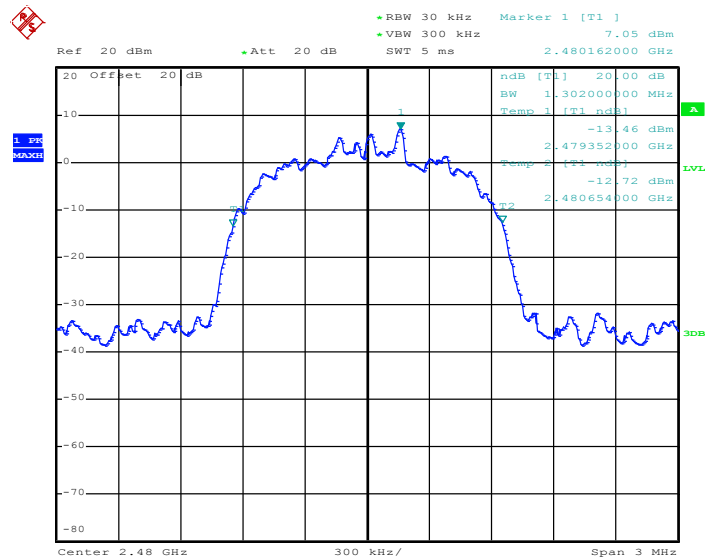

Date: 15.MAR.2013 21:56:32

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps is 1watt, and for 2Mbps, 3Mbps and AFH are 0.125 watts.


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

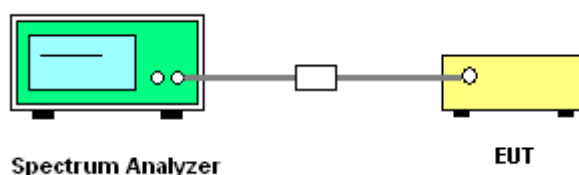

3.5.5 Test Result of Peak Output Power

Test Mode :	1Mbps	Temperature :	24~26℃
Test Engineer :	Reece Li	Relative Humidity :	48~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	6.25	20.97	Pass
39	2441	6.51	20.97	Pass
78	2480	7.81	20.97	Pass

Note: For AFH mode using 20 hopping channels, the maximum output power limit is 20.97dBm.

Test Mode :	2Mbps	Temperature :	24~26℃
Test Engineer :	Reece Li	Relative Humidity :	48~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	7.30	20.97	Pass
39	2441	7.61	20.97	Pass
78	2480	7.83	20.97	Pass

Test Mode :	3Mbps	Temperature :	24~26℃
Test Engineer :	Reece Li	Relative Humidity :	48~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	7.43	20.97	Pass
39	2441	7.55	20.97	Pass
78	2480	7.81	20.97	Pass

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 KHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures

1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 300KHz ($\geq 1\%$ span=30MHz), VBW = 300KHz ($\geq$ RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300KHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.


3.6.4 Test Setup

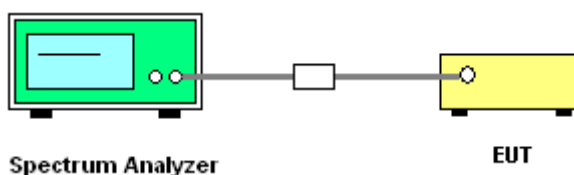

3.6.6 Test Result of Conducted Band Edges


Test Mode :	1Mbps	Temperature :	24~26℃
Test Channel :	00 and 78	Relative Humidity :	48~51%
		Test Engineer :	Reece Li

Low Band Edge Plot on Channel 00

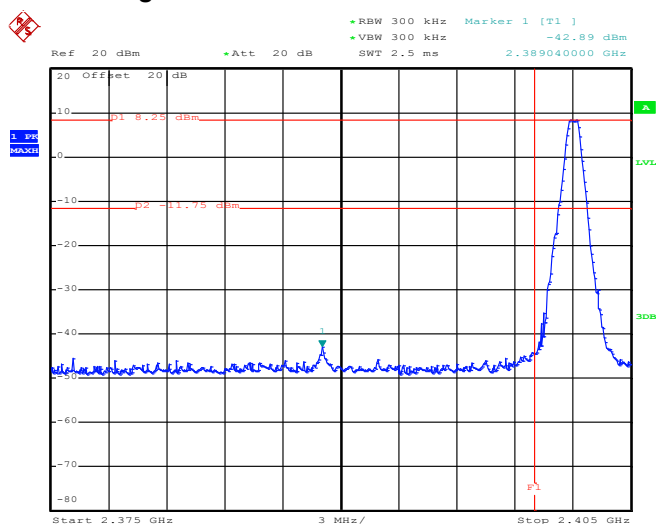

Date: 15.MAR.2013 20:43:03

High Band Edge Plot on Channel 78

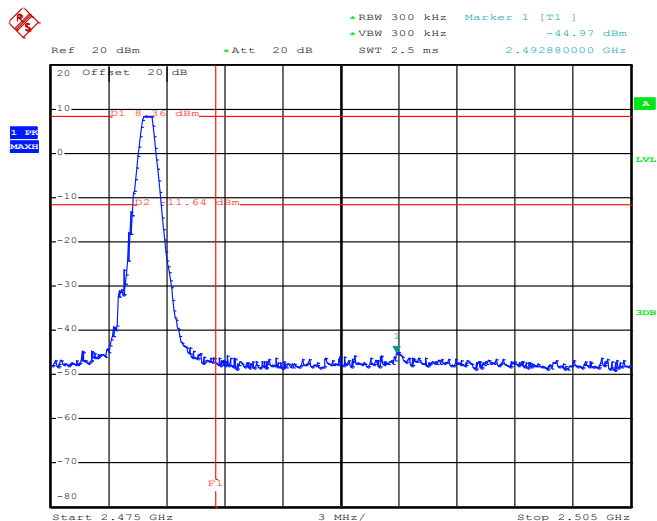

Date: 15.MAR.2013 20:57:20



Low Band Edge Plot on Channel 00

[illegible]

Date: 15.MAR.2013 22:22:47



Low Band Edge Plot on Channel 00




Date: 15.MAR.2013 21:56:57

3.6.7 Test Result of Conducted Hopping Mode Band Edges


Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	Reece Li	Relative Humidity :	48~51%

1Mbps Hopping Mode Low Band Edge Plot

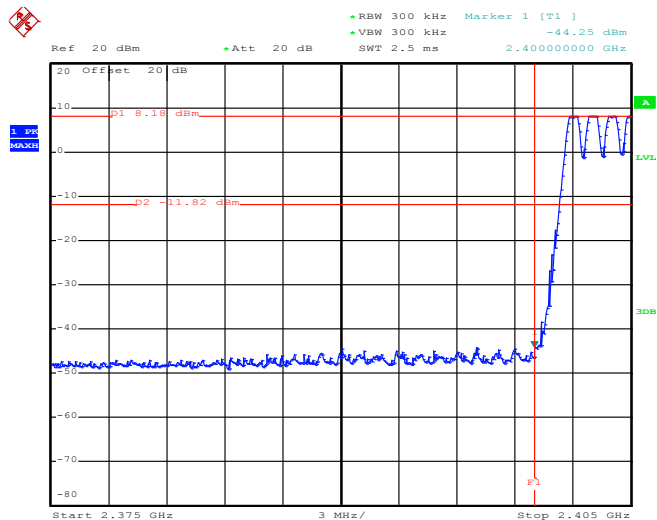

Date: 15.MAR.2013 22:51:43

1Mbps Hopping Mode High Band Edge Plot

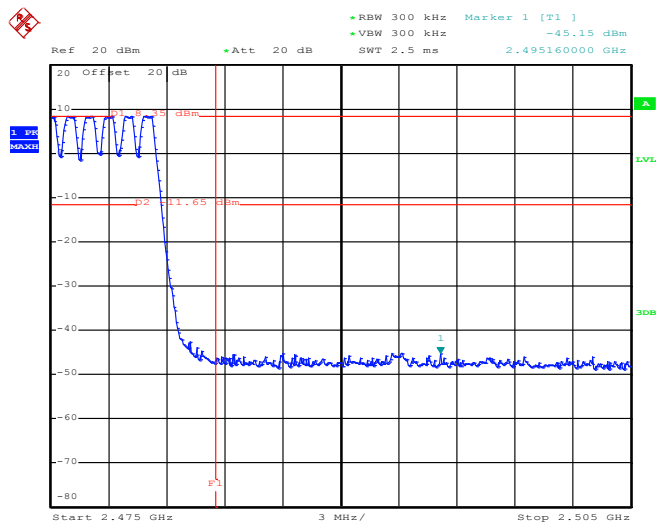


Date: 15.MAR.2013 20:58:21




Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	Reece Li	Relative Humidity :	48~51%

2Mbps Hopping Mode Low Band Edge Plot

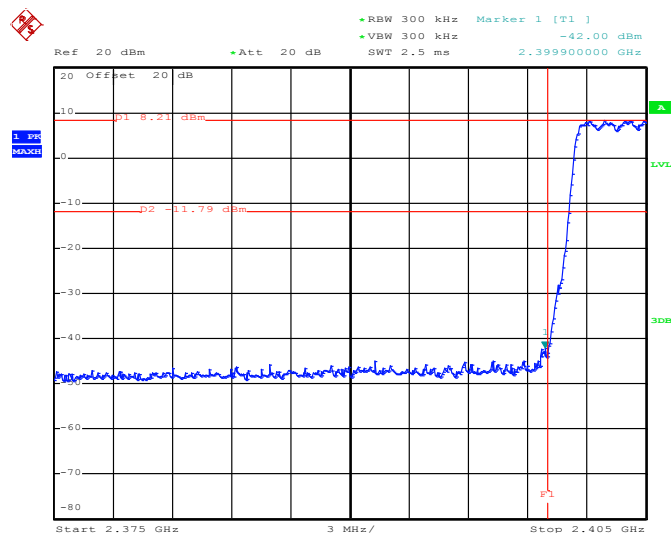

Date: 15.MAR.2013 22:48:29

2Mbps Hopping Mode High Band Edge Plot

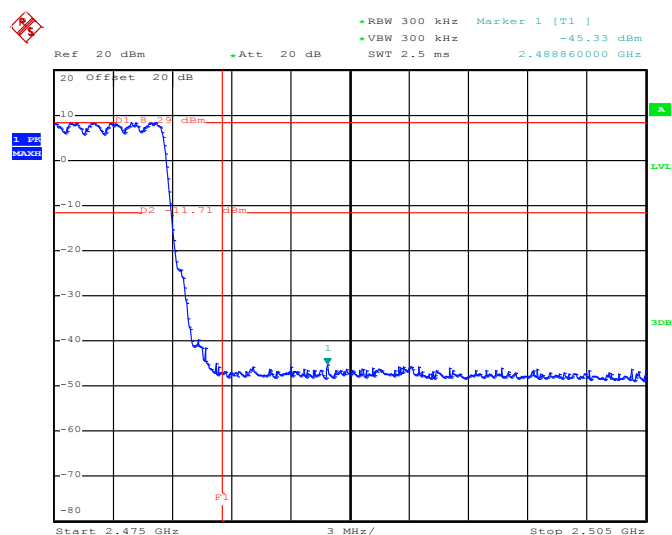

Date: 15.MAR.2013 22:25:24



Report No. : FR322107

3Mbps Hopping Mode Low Band Edge Plot



3Mbps Hopping Mode High Band Edge Plot



3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 KHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

3.7.3 Test Procedure

1. The testing follows the guidelines in Spurious RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 KHz, VBW = 300KHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 KHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.7.4 Test Setup

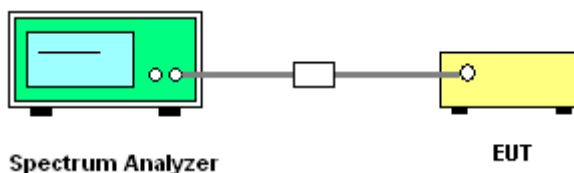

3.7.5 Test Result of Conducted Spurious Emission


Test Mode :	1Mbps	Temperature :	24~26℃
Test Channel :	00	Relative Humidity :	48~51%
		Test Engineer :	Reece Li

1Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

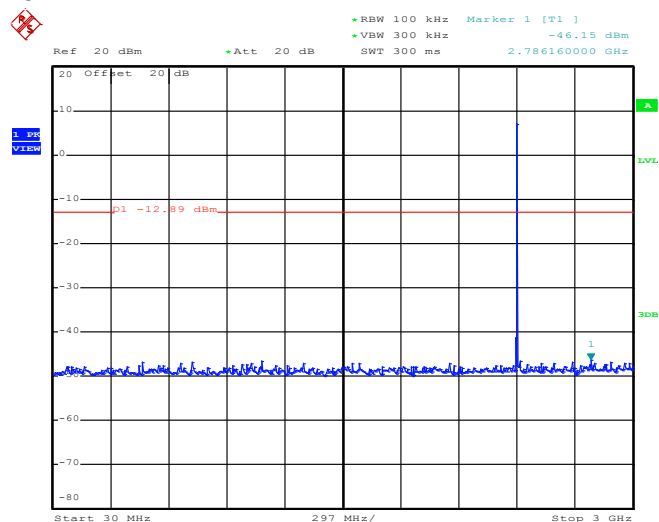


Date: 15.MAR.2013 22:11:32

1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

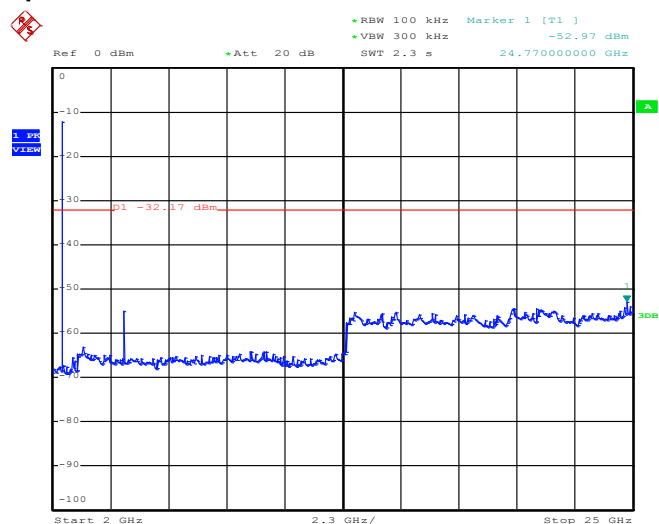


Date: 15.MAR.2013 22:11:54

Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	48~51%
		Test Engineer :	Reece Li

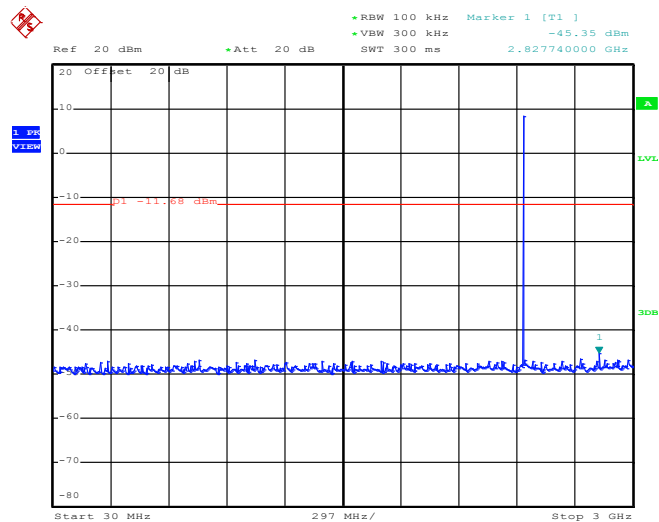1Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz


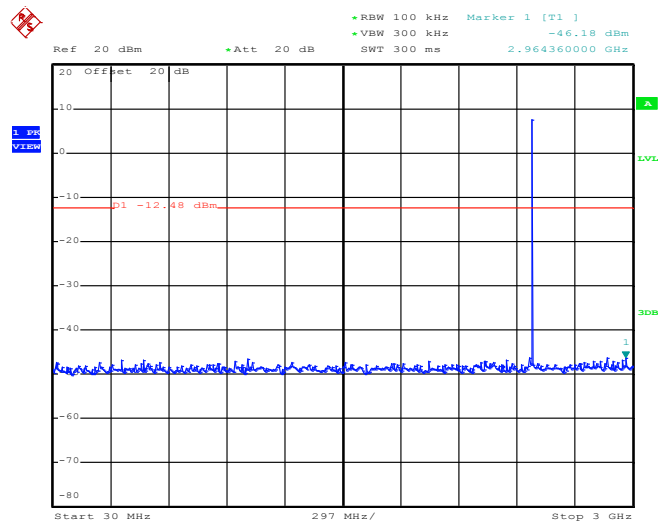
Date: 15.MAR.2013 22:15:35

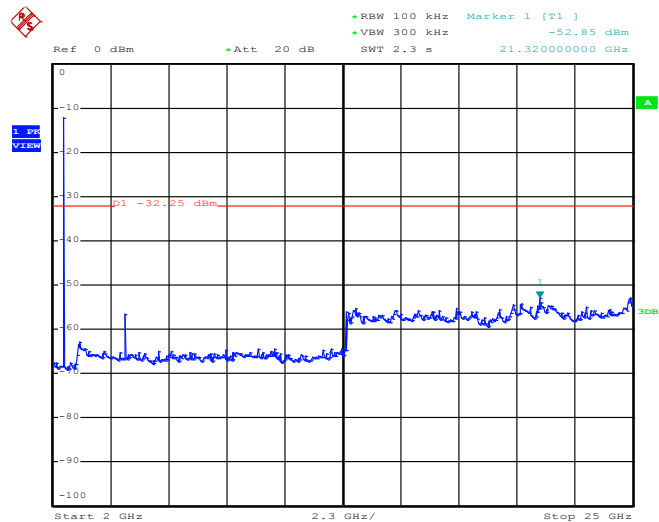1Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz


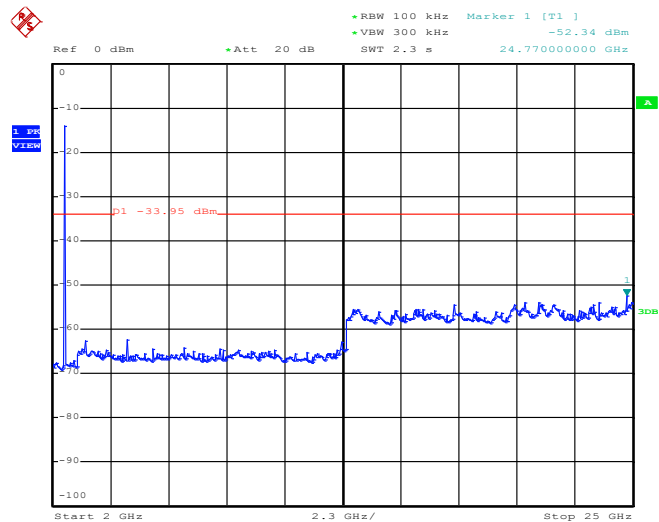
Date: 15.MAR.2013 22:15:57



Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	48~51%
		Test Engineer :	Reece Li


1Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

Date: 15.MAR.2013 22:18:45


1Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

Date: 15.MAR.2013 22:19:06

Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	48~51%
		Test Engineer :	Reece Li

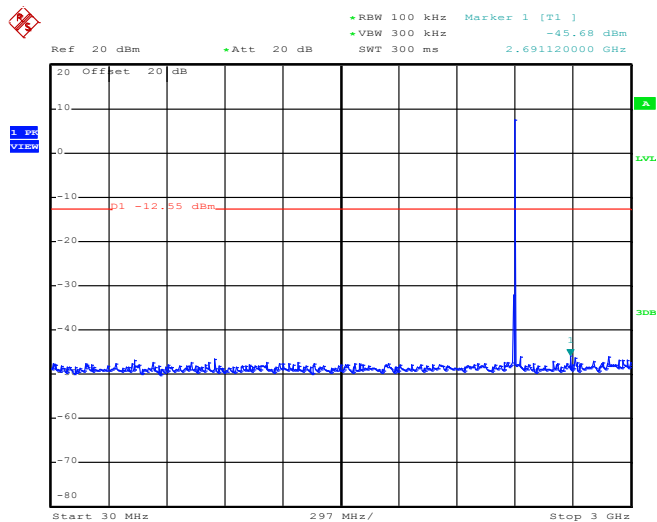2Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz


Date: 15.MAR.2013 22:36:40

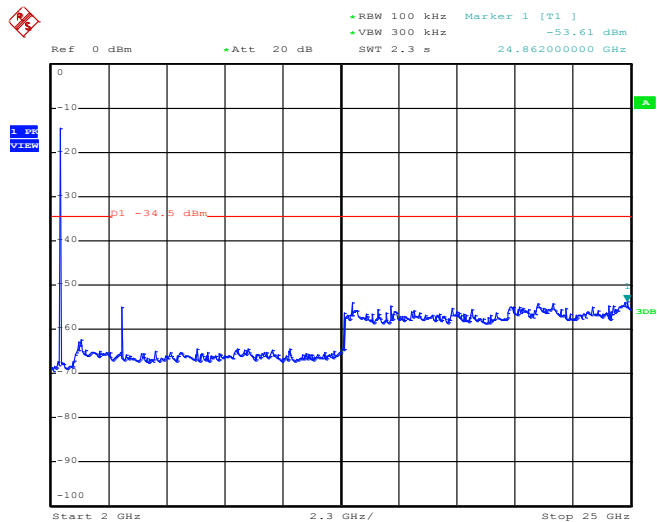
2Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz


Date: 15.MAR.2013 22:37:01




Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	48~51%
		Test Engineer :	Reece Li

2Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

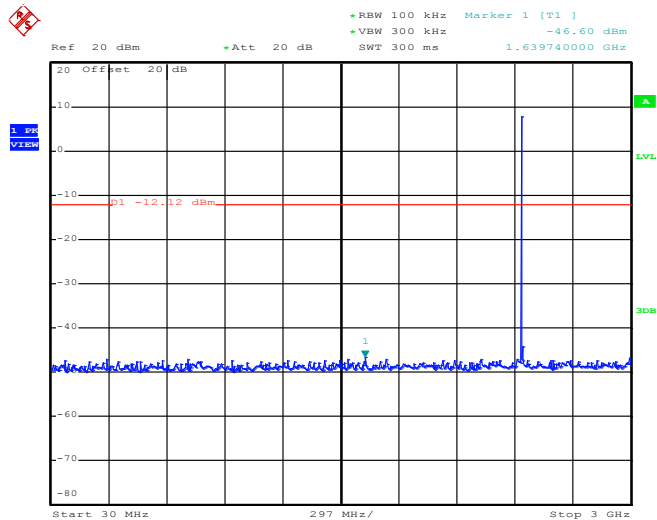

Date: 15.MAR.2013 22:29:41

2Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

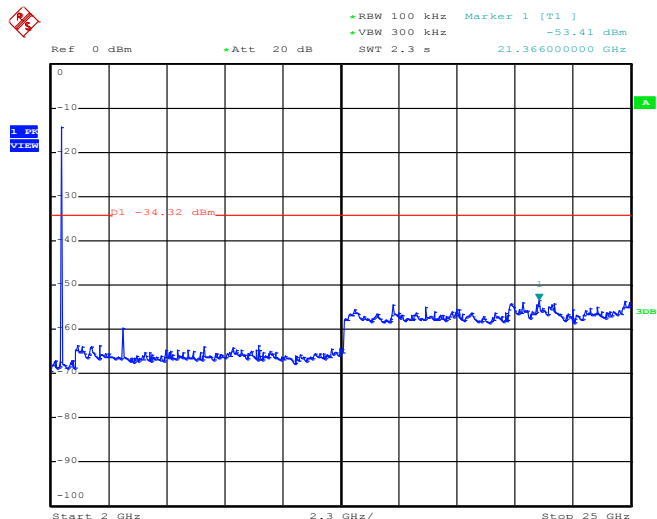


Date: 15.MAR.2013 22:30:03




Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	48~51%
		Test Engineer :	Reece Li

2Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

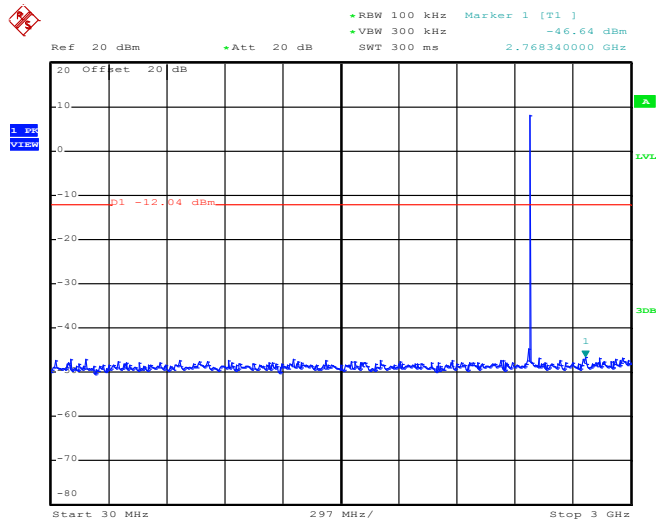

Date: 15.MAR.2013 22:22:02


2Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

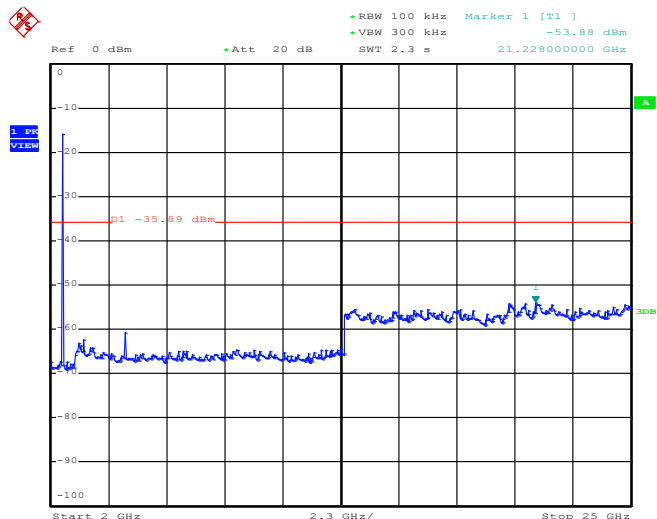


Date: 15.MAR.2013 22:22:23



Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	48~51%
		Test Engineer :	Reece Li

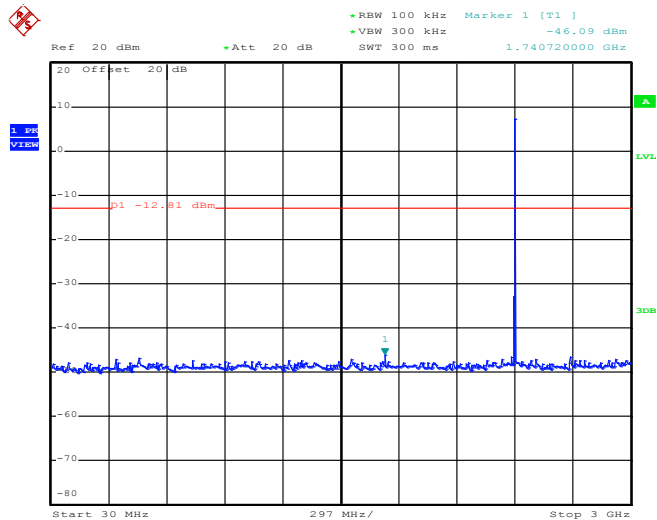3Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

Date: 15.MAR.2013 21:28:47

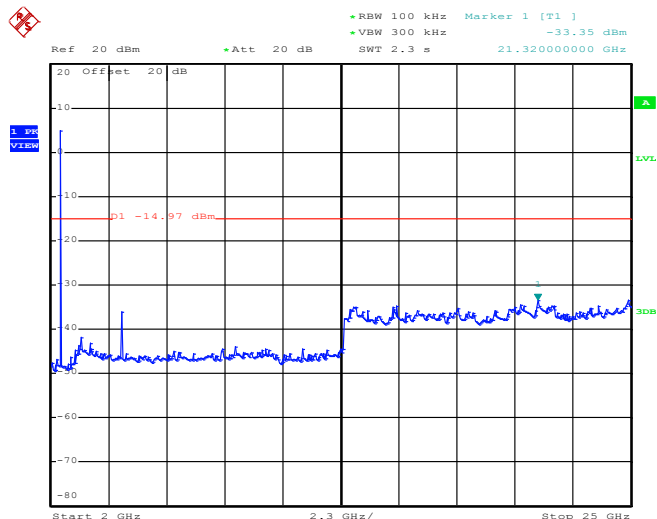
3Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

Date: 15.MAR.2013 21:29:09




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	48~51%
		Test Engineer :	Reece Li

3Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

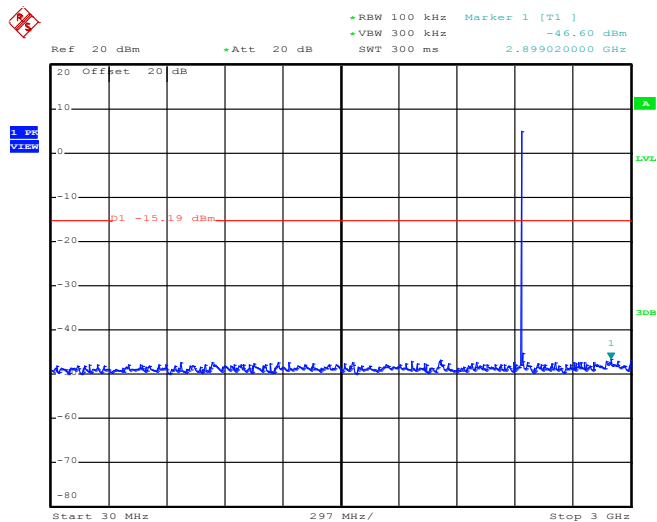

Date: 15.MAR.2013 21:52:19


3Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

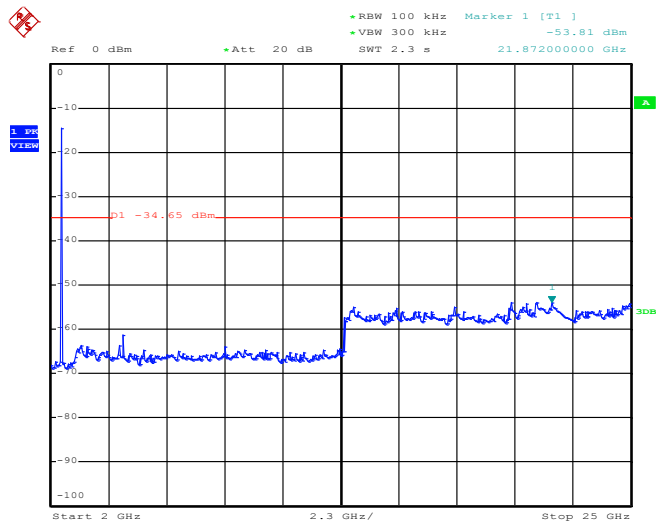


Date: 15.MAR.2013 21:52:41



Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	48~51%
		Test Engineer :	Reece Li

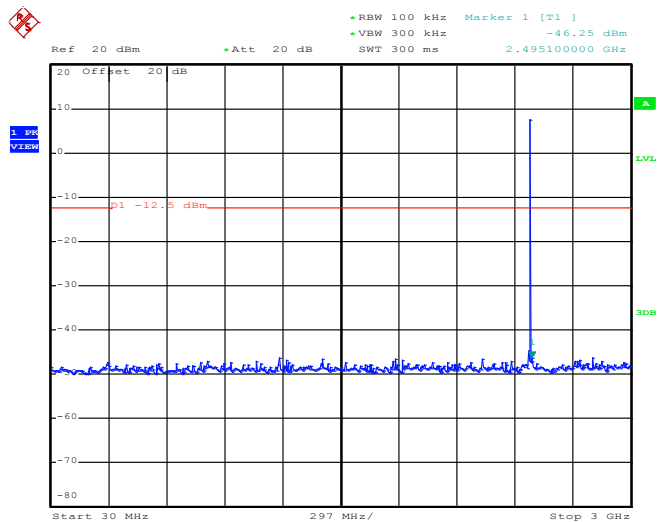3Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

Date: 15.MAR.2013 21:57:50

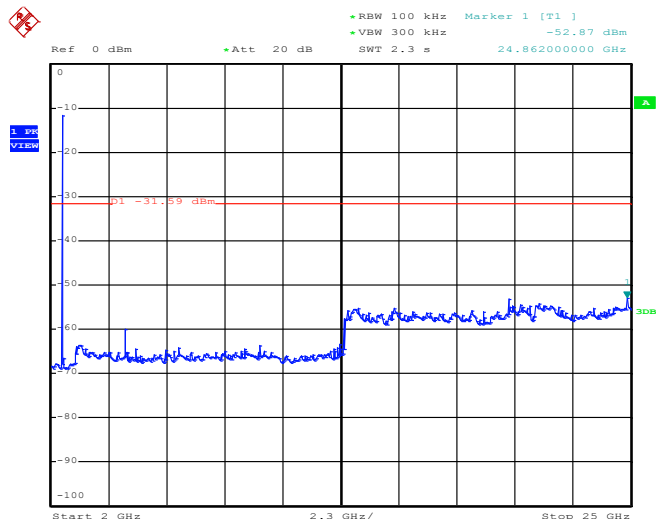3Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

Date: 15.MAR.2013 21:58:12

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

See list of measuring instruments of this test report.


3.8.3 Test Procedures

1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines and the guidelines in ANSI C63.10-2009.
2. The EUT was placed on a turntable with 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 KHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
7. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.75dB) derived from $20 \log(\text{dwell time}/100\text{ms})$.

3.8.4 Test Setup


For radiated emissions below 30MHz

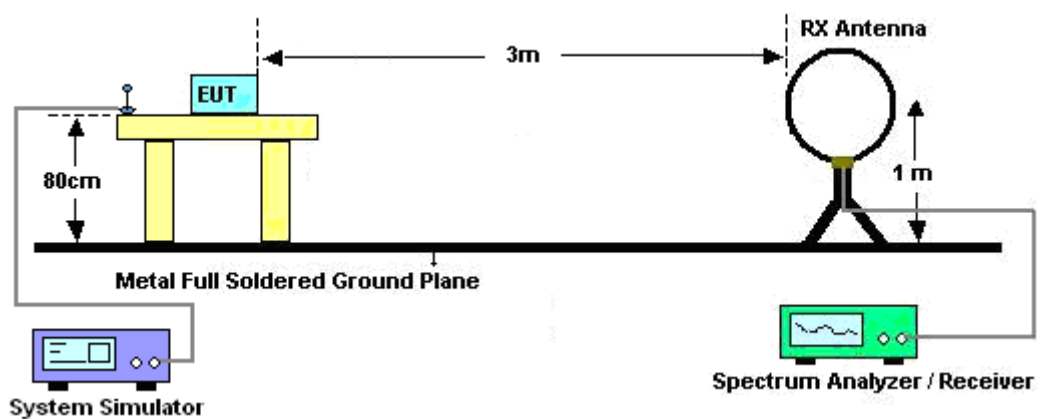

For radiated emissions from 30MHz to 1GHz

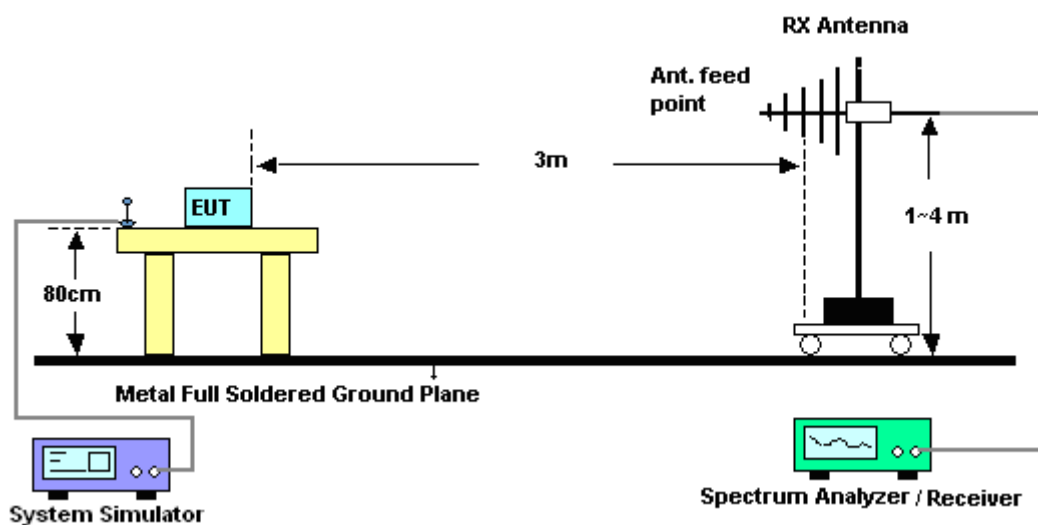

For radiated emissions above 1GHz

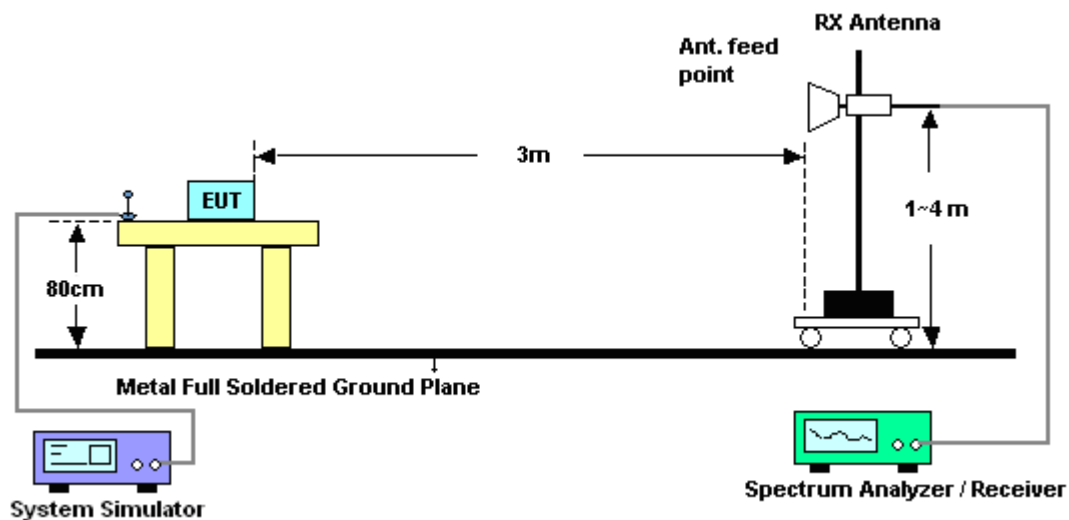


3.8.5 Test Results of Radiated Emissions (9 KHz ~ 30 MHz)


The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.8.6 Duty cycle correction factor for average measurement

2DH5 on time (One Pulse) Plot on Channel 39

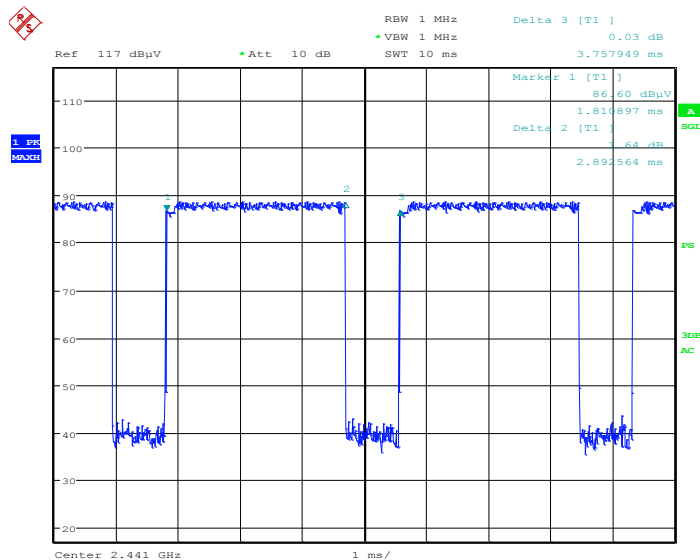

2DH5 on time/100ms (Count Pulses) Plot on Channel 39

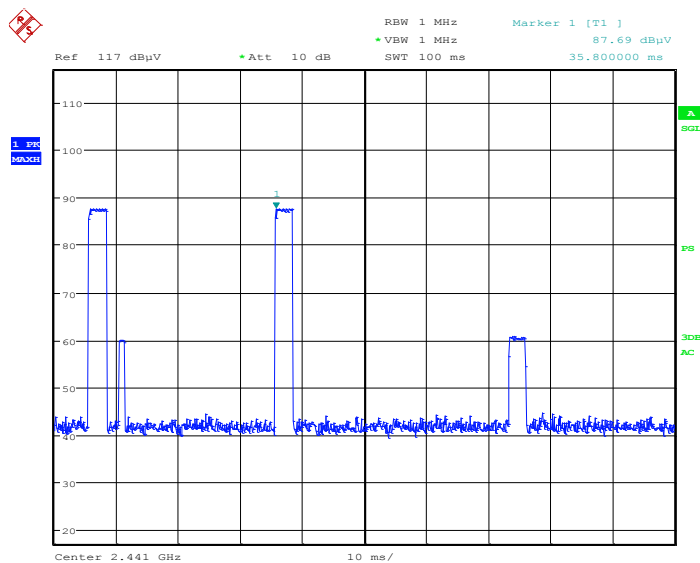

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.892564 / 100 = 5.79 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.75 \text{ dB}$
3. 2DH5 has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.892564 \text{ ms} \times 20 \text{ channels} = 57.9\text{ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100\text{ms} / 57.6\text{ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.892564 \text{ ms} \times 2 = 5.79\text{ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.79\text{ms}/100\text{ms}) = -24.75 \text{ dB}$$

3.8.7 Test Result of Radiated Band Edges

Test Mode :	2Mbps	Temperature :	24~25°C
Test Channel :	00	Relative Humidity :	57~59%
		Test Engineer :	David Yang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.57	50.28	-23.72	74	49.44	32.18	4.58	35.92	113	345	Peak
2388.57	25.53	-28.47	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.2	47.79	-26.21	74	46.95	32.18	4.58	35.92	138	115	Peak
2389.2	23.04	-30.96	54	-	-	-	-	-	-	Average

Test Mode :	2Mbps	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	57~59%
		Test Engineer :	David Yang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	58.34	-15.66	74	57.25	32.28	4.64	35.83	113	354	Peak
2483.5	33.59	-20.41	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	53.55	-20.45	74	52.46	32.28	4.64	35.83	200	117	Peak
2483.5	28.8	-25.2	54	-	-	-	-	-	-	Average

3.8.8 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

Test Mode :	2Mbps	Temperature :	24~25°C
Test Channel :	00	Relative Humidity :	57~59%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. 3201 MHz and 7206 are not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 100.46 dBμV/m - 20dB = 80.46 dBμV/m.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2402	100.46	-	-	99.6	32.18	4.58	35.9	113	345	Peak
2402	75.71	-	-	-	-	-	-	-	-	Average
3201	45.95	-34.51	80.46	66.22	32.76	5.56	58.59	100	0	Peak
4806	66.69	-7.31	74	84.98	34.26	6.51	59.06	100	312	Peak
4806	41.94	-12.06	54	-	-	-	-	-	-	Average
7206	44.62	-35.84	80.46	58.12	36.06	8.25	57.81	100	0	Peak

Note: Other harmonics are lower than background noise.

Test Mode :	2Mbps	Temperature :	24~25°C
Test Channel :	00	Relative Humidity :	57~59%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. 7206 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2402	96.76	-	-	95.9	32.18	4.58	35.9	138	115	Peak
2402	72.01	-	-	-	-	-	-	-	-	Average
4806	64.51	-9.49	74	82.8	34.26	6.51	59.06	112	115	Peak
4806	39.76	-14.24	54	-	-	-	-	-	-	Average
7206	44.89	-31.87	76.76	58.39	36.06	8.25	57.81	100	0	Peak

Note: Other harmonics are lower than background noise.

Test Mode :	2Mbps	Temperature :	24~25°C
Test Channel :	39	Relative Humidity :	57~59%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	1. 2442 MHz is fundamental signal which can be ignored. 2. 3252 MHz is not within a restricted band and its limit line is 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2442	101.67	-	-	100.67	32.24	4.61	35.85	112	338	Peak
2442	76.92	-	-	-	-	-	-	-	-	Average
3252	46.11	-35.56	81.67	66.43	32.75	5.58	58.65	100	0	Peak
4881	67.28	-6.72	74	85.34	34.28	6.54	58.88	102	335	Peak
4881	42.53	-11.47	54	-	-	-	-	-	-	Average
7323	43.81	-30.19	74	57.37	36.03	8.42	58.01	100	0	Peak
7323	19.06	-34.94	54	-	-	-	-	-	-	Average

Note: Other harmonics are lower than background noise.

Test Mode :	2Mbps	Temperature :	24~25°C
Test Channel :	39	Relative Humidity :	57~59%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	1. 2442 MHz is fundamental signal which can be ignored. 2. 3252 MHz is not within a restricted band and its limit line is 20dB below the highest emission level.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2442	96.52	-	-	95.52	32.24	4.61	35.85	172	120	Peak
2442	71.77	-	-	-	-	-	-	-	-	Average
3252	43.27	-33.25	76.52	63.59	32.75	5.58	58.65	100	0	Peak
4884	65.18	-8.82	74	83.24	34.28	6.54	58.88	109	131	Peak
4884	40.43	-13.57	54	-	-	-	-	-	-	Average
7323	43.21	-30.79	74	56.77	36.03	8.42	58.01	100	0	Peak
7323	18.46	-35.54	54	-	-	-	-	-	-	Average

Note: Other harmonics are lower than background noise.

Test Mode :	2Mbps	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	57~59%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. 3306 MHz is not within a restricted band and its limit line is 20dB below the highest emission level. 3. “*” are from extender card which is provided by Applicant, declared to ignore those signal due to not from EUT.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30.81	20.53	-19.47	40	33.3	18.16	0.71	31.64	-	-	Peak
47.82	29.35	*	40	50.24	9.8	0.79	31.48	-	-	Peak
71.85	33.62	*	40	57.6	6.56	0.93	31.47	-	-	Peak
83.73	30.12	*	40	52.73	7.74	1.02	31.37	-	-	Peak
95.88	51.06	*	43.5	72.01	9.4	1.08	31.43	-	-	Peak
119.91	29.82	*	43.5	48.57	11.4	1.21	31.36	-	-	Peak
153.39	23.77	-19.73	43.5	42.6	11.12	1.29	31.24	-	-	Peak
191.46	27.92	*	43.5	48.89	8.7	1.44	31.11	-	-	Peak
221.7	24.61	-21.39	46	44.56	9.44	1.55	30.94	-	-	Peak
239.79	44.7	*	46	62.83	11.2	1.62	30.95	-	-	Peak
251.67	27.29	*	46	43.84	12.7	1.66	30.91	-	-	Peak
263.82	30.61	*	46	46.49	13.46	1.69	31.03	-	-	Peak
287.85	32.11	*	46	48.46	13.04	1.75	31.14	-	-	Peak
311.9	33.92	*	46	49.71	13.32	1.81	30.92	-	-	Peak
335.7	37.87	*	46	53.27	13.82	1.87	31.09	-	-	Peak
358.8	28.75	*	46	43.41	14.49	1.92	31.07	-	-	Peak
383.3	37.18	*	46	50.98	15.26	1.97	31.03	-	-	Peak
396.6	25.79	*	46	39.35	15.61	2	31.17	-	-	Peak
407.1	32.76	*	46	45.9	15.99	2.03	31.16	-	-	Peak
419.7	24.66	*	46	37.16	16.5	2.06	31.06	-	-	Peak
431.6	33.86	*	46	46.04	16.74	2.09	31.01	-	-	Peak
456.8	29.07	*	46	40.68	17.24	2.15	31	-	-	Peak
479.2	29.66	*	46	40.59	17.59	2.19	30.71	-	-	Peak

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
504.4	24.68	*	46	35.03	18.04	2.24	30.63	-	-	Peak
550.6	20.1	-25.9	46	29.16	19.66	2.33	31.05	-	-	Peak
649.3	28.37	*	46	35.59	20.31	2.59	30.12	-	-	Peak
671.7	32.12	*	46	39.33	20.32	2.62	30.15	-	-	Peak
718.6	29.17	*	46	35.33	21.35	2.69	30.2	-	-	Peak
767.6	30.91	*	46	36.09	22.1	2.78	30.06	-	-	Peak
815.2	34.24	*	46	38.9	22.25	2.86	29.77	-	-	Peak
885.9	32.03	*	46	35.86	23.1	2.98	29.91	-	-	Peak
909	31.65	*	46	35.17	23.48	3.02	30.02	-	-	Peak
933.5	26.96	-19.04	46	29.67	24.32	3.04	30.07	121	275	Peak
982.5	26.4	-27.6	54	28.34	24.8	3.18	29.92	-	-	Peak
2480	101.4	-	-	100.31	32.28	4.64	35.83	113	354	Peak
2480	76.65	-	-	-	-	-	-	-	-	Average
3306	45.23	-36.17	81.4	65.62	32.74	5.6	58.73	100	0	Peak
4962	69.55	-4.45	74	87.34	34.29	6.57	58.65	100	322	Peak
4962	44.8	-9.2	54	-	-	-	-	-	-	Average
7440	41.57	-32.43	74	55.14	36.01	8.63	58.21	100	0	Peak
7440	16.82	-37.18	54	-	-	-	-	-	-	Average

Note: Other harmonics are lower than background noise.

Test Mode :	2Mbps	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	57~59%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. 3306 MHz is not within a restricted band and its limit line is 20dB below the highest emission level. 3. “*” are from extender card which is provided by Applicant, declared to ignore those signal due to not from Bluetooth module.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
32.97	32	-8	40	45.83	17.08	0.72	31.63	100	326	Peak
42.42	27.07	*	40	45.85	12.02	0.76	31.56	-	-	Peak
47.82	42.22	*	40	63.11	9.8	0.79	31.48	-	-	Peak
53.22	29.31	*	40	52.62	7.36	0.82	31.49	-	-	Peak
71.85	37.07	*	40	61.05	6.56	0.93	31.47	-	-	Peak
83.73	30.29	*	40	52.9	7.74	1.02	31.37	-	-	Peak
95.61	49.13	*	43.5	70.08	9.4	1.08	31.43	-	-	Peak
145.56	26.23	-17.27	43.5	44.72	11.5	1.27	31.26	-	-	Peak
159.87	29.23	-14.27	43.5	48.5	10.6	1.35	31.22	-	-	Peak
233.31	24.45	*	46	43.31	10.48	1.59	30.93	-	-	Peak
240.06	35.75	*	46	53.77	11.31	1.62	30.95	-	-	Peak
263.82	21.32	*	46	37.2	13.46	1.69	31.03	-	-	Peak
288.66	22.46	*	46	38.78	13.07	1.75	31.14	-	-	Peak
307.7	22.42	-23.58	46	38.24	13.3	1.8	30.92	-	-	Peak
335	22.33	*	46	37.77	13.78	1.86	31.08	-	-	Peak
366.5	21.96	*	46	36.37	14.69	1.94	31.04	-	-	Peak
383.3	23.48	*	46	37.28	15.26	1.97	31.03	-	-	Peak
407.8	22.02	*	46	35.15	15.99	2.03	31.15	-	-	Peak
430.9	25.86	*	46	38.06	16.72	2.09	31.01	-	-	Peak
455.4	24.68	*	46	36.3	17.22	2.15	30.99	-	-	Peak
479.9	24.4	*	46	35.31	17.6	2.19	30.7	-	-	Peak
551.3	24.6	*	46	33.64	19.66	2.33	31.03	-	-	Peak
575.1	28.56	*	46	37.11	19.8	2.38	30.73	-	-	Peak



Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
672.4	25.3	*	46	32.52	20.32	2.62	30.16	-	-	Peak
899.2	25.14	-20.86	46	28.85	23.28	3.01	30	-	-	Peak
984.6	27.14	-26.86	54	29.06	24.8	3.19	29.91	-	-	Peak
2480	96.21	-	-	95.12	32.28	4.64	35.83	200	117	Peak
2480	71.46	-	-	-	-	-	-	-	-	Average
3306	42.29	-33.92	76.21	62.68	32.74	5.6	58.73	100	0	Peak
4962	62.39	-11.61	74	80.18	34.29	6.57	58.65	109	183	Peak
4962	37.64	-16.36	54	-	-	-	-	-	-	Average
7440	42.02	-31.98	74	55.59	36.01	8.63	58.21	100	0	Peak
7440	17.27	-36.73	54	-	-	-	-	-	-	Average

Note: Other harmonics are lower than background noise.

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

See list of measuring instruments of this test report.

3.9.3 Test Procedures


1. The test follows the guidelines in ANSI C63.10-2009 test site requirement.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 KHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.9.4 Test Setup

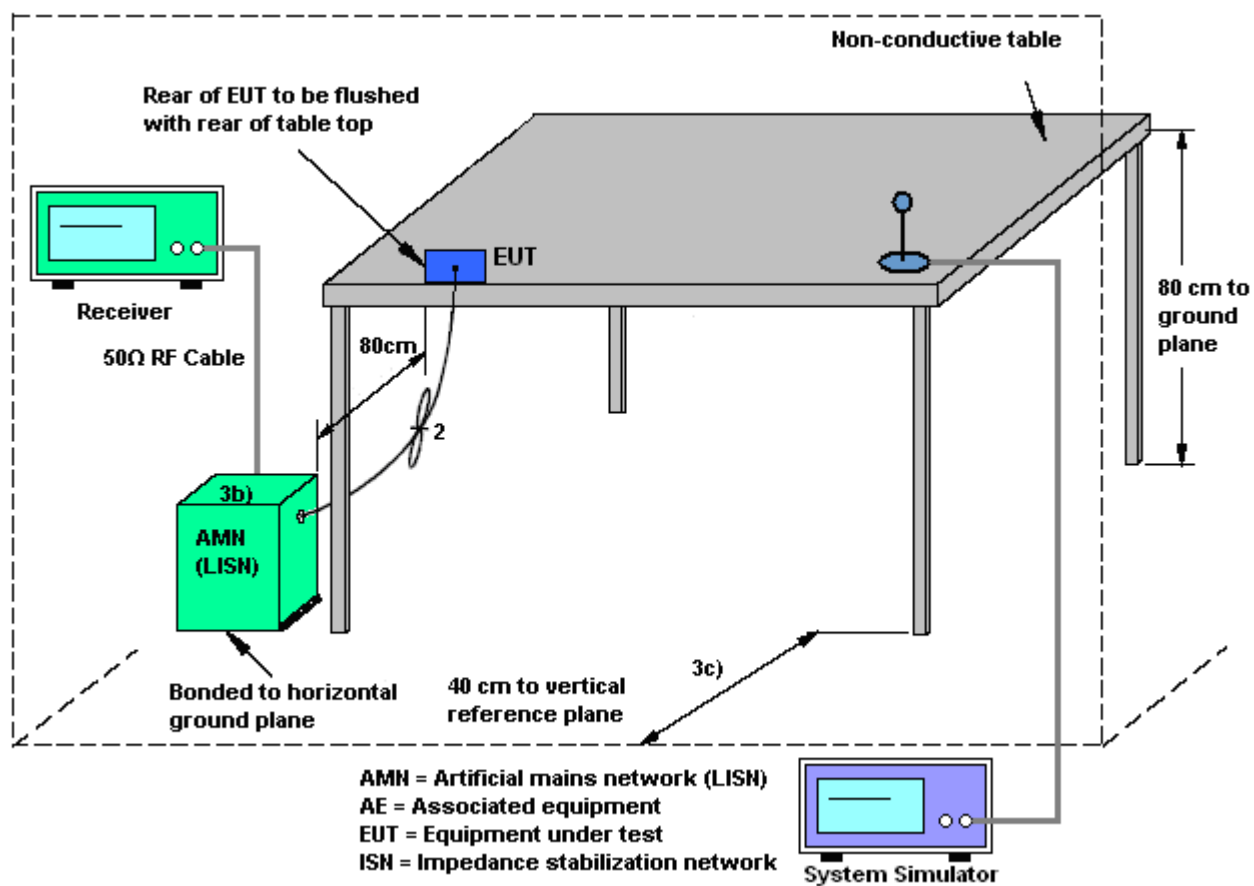

3.9.5 Test Result of AC Conducted Emission

Test Mode :	Mode 2	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	EUT + Earphone 2 + USB Cable (Charging from Notebook)		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

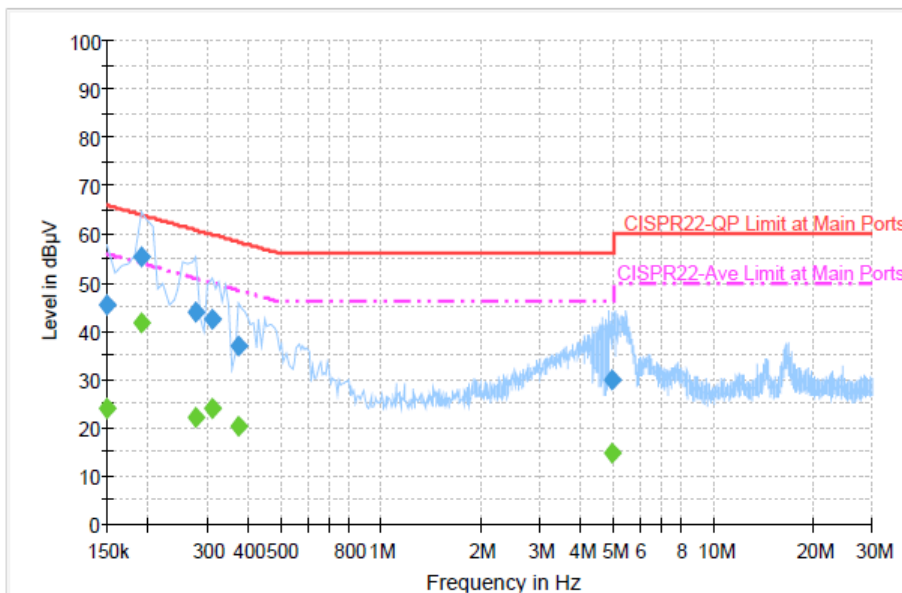


Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	45.5	Off	L1	19.4	20.5	66.0
0.190000	55.5	Off	L1	19.4	8.5	64.0
0.278000	44.0	Off	L1	19.3	16.9	60.9
0.310000	42.3	Off	L1	19.4	17.7	60.0
0.374000	37.0	Off	L1	19.4	21.4	58.4
4.950000	29.7	Off	L1	19.6	26.3	56.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	23.9	Off	L1	19.4	32.1	56.0
0.190000	41.7	Off	L1	19.4	12.3	54.0
0.278000	22.3	Off	L1	19.3	28.6	50.9
0.310000	24.2	Off	L1	19.4	25.8	50.0
0.374000	20.2	Off	L1	19.4	28.2	48.4
4.950000	14.9	Off	L1	19.6	31.1	46.0

Test Mode :	Mode 2	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	EUT + Earphone 2 + USB Cable (Charging from Notebook)		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

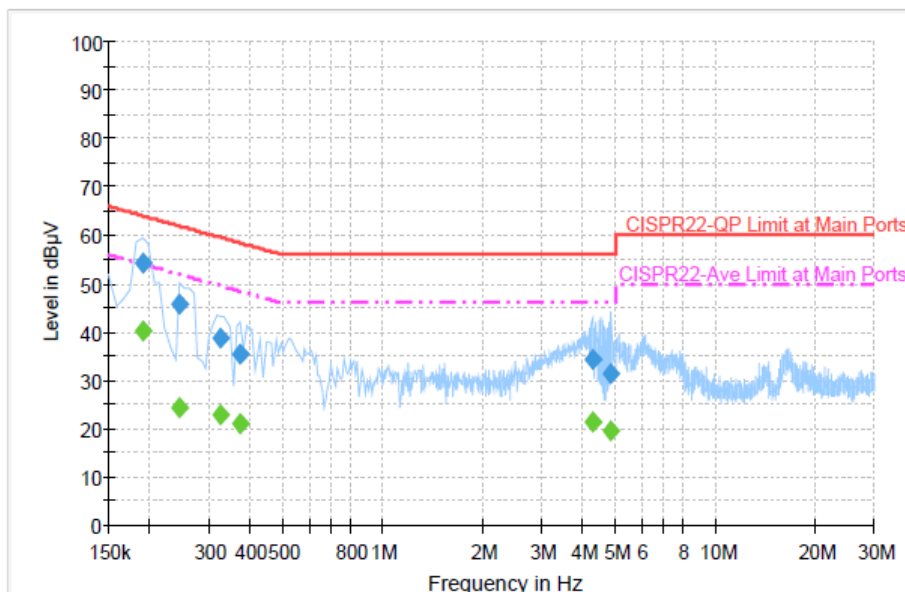
Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.190000	54.3	Off	N	19.4	9.7	64.0
0.246000	45.7	Off	N	19.4	16.2	61.9
0.326000	38.8	Off	N	19.3	20.8	59.6
0.374000	35.5	Off	N	19.4	22.9	58.4
4.254000	34.2	Off	N	19.7	21.8	56.0
4.870000	31.3	Off	N	19.7	24.7	56.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.190000	40.1	Off	N	19.4	13.9	54.0
0.246000	24.5	Off	N	19.4	27.4	51.9
0.326000	22.9	Off	N	19.3	26.7	49.6
0.374000	21.2	Off	N	19.4	27.2	48.4
4.254000	21.6	Off	N	19.7	24.4	46.0
4.870000	19.6	Off	N	19.7	26.4	46.0



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.10.2 Antenna Connected Construction

Non-standard connector used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 06, 2012	Feb. 28, 2013 ~ Mar. 15, 2013	Jun. 05, 2013	Conducted (TH02-HY)
Bluetooth Base Station	R&S	CBT32	100519	N/A	Jun. 05, 2012	Feb. 28, 2013 ~ Mar. 15, 2013	Jun. 04, 2013	Conducted (TH02-HY)
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100356	9KHz ~ 2.75GHz	Nov. 13, 2012	Mar. 05, 2013 ~ Mar. 19, 2013	Nov. 12, 2013	Conduction (CO05-HY)
Two-LISN	Rohde & Schwarz	ENV216	100081	9KHz ~ 30MHz	Dec. 12, 2012	Mar. 05, 2013 ~ Mar. 19, 2013	Dec. 11, 2013	Conduction (CO05-HY)
Two-LISN	Rohde & Schwarz	ENV216	100080	9KHz ~ 30MHz	Dec. 06, 2012	Mar. 05, 2013 ~ Mar. 19, 2013	Dec. 05, 2013	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	Mar. 05, 2013 ~ Mar. 19, 2013	N/A	Conduction (CO05-HY)
Spectrum Analyzer	R&S	ESU26	100390	20Hz~26.5GHz	Dec. 14, 2012	Mar. 02, 2013	Dec. 13, 2013	Radiation (03CH05-HY)
Bilog Antenna	Schaffner	CBL6111C	2725	30MHz~2GHz	Oct. 06, 2012	Mar. 02, 2013	Oct. 05, 2013	Radiation (03CH05-HY)
Turn Table	HD	Deis HD 2000	420/611	0 ~ 360 degree	N/A	Mar. 02, 2013	N/A	Radiation (03CH05-HY)
Antenna Mast	HD	MA 240	240/666	1 m ~ 4 m	N/A	Mar. 02, 2013	N/A	Radiation (03CH05-HY)
Horn Antenna	ESCO	3117	66584	1GHz~18GHz	Aug. 10, 2012	Mar. 02, 2013	Aug. 09, 2013	Radiation (03CH05-HY)
Pre Amplifier	Agilent	8449B	3008A02665	1GHz~26.5GHz	Aug. 28, 2012	Mar. 02, 2013	Aug. 27, 2013	Radiation (03CH05-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz ~ 40GHz	Sep. 28, 2012	Mar. 02, 2013	Sep. 27, 2013	Radiation (03CH05-HY)
Preamplifier	COM-POWER	PA-103	161075	10Hz~1000MHz Gain:32dB	Feb. 26, 2013	Mar. 02, 2013	Feb. 25, 2014	Radiation (03CH05-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9KHz ~ 30MHz	Jul. 03, 2012	Mar. 02, 2013	Jul. 02, 2013	Radiation (03CH05-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.54
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.72
---	------



Appendix A. Photographs of EUT

Please refer to Sporton report number EP322107 as below.