

TEST REPORT

Test report no.: 1-8725/19-01-03

BNetzA-CAB-02/21-102

Testing laboratory

CTC advanced GmbH

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <http://www.ctcadvanced.com>

e-mail: mail@ctcadvanced.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-03

Applicant

ZF – Autocruise SAS

Avenue du Technopôle - Secteur de la Pointe du Diable

29280 Plouzané / FRANCE

Phone: +33 02 98 454368

Fax:

Contact: Sylvain Germaine

e-mail: Sylvain.Germaine@TRW.COM

Phone: +33 298 489 828

Manufacturer

ZF – Autocruise SAS

Avenue du Technopôle - Secteur de la Pointe du Diable

29280 Plouzané / FRANCE

Test standard/s

CFR 47 Part 95,
Subpart M

The 76-81 GHz Band Radar Service

CFR 47 Part 2,
Subpart J

Frequency allocations and radio treaty matters; general rules and regulations

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: 76 GHz Automotiv Radar

Model name: AC1000T

FCC ID: S9I-AC1000T

Frequency: 76.0 – 77.0 GHz

Antenna: Integrated patch antenna

Power supply: 9.0 V to 36.0 V DC by external power supply

Temperature range: -40°C to +85°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:

Karsten Gerdaldy
Lab Manager
Radio Communications & EMC

Test performed:

Meheza Walla
Lab Manager
Radio Communications & EMC

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details.....	3
2.3	Test laboratories sub-contracted	3
3	Test standard/s, references and accreditations.....	4
4	Test environment.....	4
5	Test item.....	5
5.1	General description.....	5
5.2	Additional information	5
6	Description of the test setup.....	6
6.1	Shielded semi anechoic chamber.....	7
6.2	Shielded fully anechoic chamber	9
6.3	Radiated measurements > 18 GHz.....	10
6.4	Radiated measurements > 50/85 GHz.....	10
7	Sequence of testing	12
7.1	Sequence of testing radiated spurious 9 kHz to 30 MHz.....	12
7.2	Sequence of testing radiated spurious 30 MHz to 1 GHz.....	13
7.3	Sequence of testing radiated spurious 1 GHz to 18 GHz	14
7.4	Sequence of testing radiated spurious above 18 GHz	15
7.5	Sequence of testing radiated spurious above 50/85 GHz with external mixers	16
8	Measurement uncertainty	17
9	Summary of measurement results	18
10	Measurement results.....	19
10.1	Radiated power	19
10.2	Modulation characteristics	29
10.3	Occupied bandwidth.....	32
10.4	Field strength of spurious emissions and band edge (radiated spurious)	33
10.5	Frequency stability	48
11	Glossary.....	55
12	Document history	56
13	Accreditation Certificate – D-PL-12076-01-05	56

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH. In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2019-08-05
Date of receipt of test item:	2019-08-05
Start of test:	2019-08-05
End of test:	2019-08-14
Person(s) present during the test:	Mr. Sylvain Germaine

2.3 Test laboratories sub-contracted

None

3 Test standard/s, references and accreditations

Test standard	Date	Description
CFR 47 Part 95, Subpart M	-/-	The 76-81 GHz Band Radar Service
CFR 47 Part 2, Subpart J	-/-	Frequency allocations and radio treaty matters; general rules and regulations

Guidance	Version	Description
ANSI C63.4-2014	-/-	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10-2013	-/-	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ANSI C63.26-2015	-/-	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
KDB 653005 D01	v01r01 2019-04	Equipment Authorization Guidance for 76-81 GHz Radar Devices

Accreditation	Description	
D-PL-12076-01-05	Telecommunication FCC requirements https://www.dakks.de/as/ast/d/D-PL-12076-01-05.pdf	 

4 Test environment

Temperature	:	T_{nom} +22 °C during room temperature tests T_{max} +85 °C during high temperature tests T_{min} -40 °C during low temperature tests
Relative humidity content	:	55 %
Barometric pressure	:	1021 hpa
Power supply	:	V_{nom} 24.0 V DC by external power supply V_{max} 36.0 V V_{min} 9.0 V

6 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).


In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

Agenda: Kind of Calibration

k	calibration / calibrated		EK	limited calibration
ne	not required (k, ev, izw, zw not required)		zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification		izw	internal cyclical maintenance
Ve	long-term stability recognized		g	blocked for accredited testing
vkl!	Attention: extended calibration interval			
NK!	Attention: not calibrated		*)	next calibration ordered / currently in progress

6.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

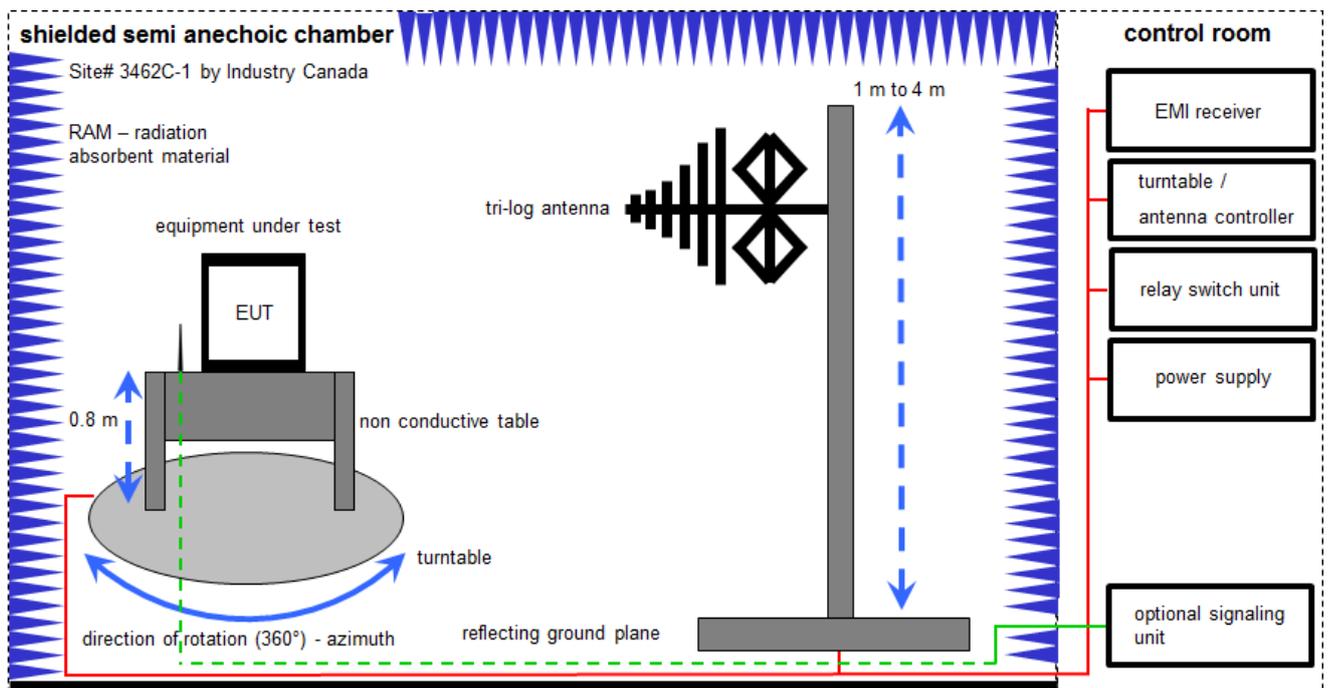

Measurement distance: tri-log antenna 10 meter
 EMC32 software version: 10.30.0

$FS = UR + CL + AF$
 (FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

$FS [dB\mu V/m] = 12.35 [dB\mu V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB\mu V/m] (35.69 \mu V/m)$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	n. a.	Switch-Unit	3488A	HP	2719A14505	300000368	ev	-/-	-/-
2	n. a.	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP	2920A04466	300000580	ne	-/-	-/-
3	n. a.	Meßkabine 1	HF-Absorberhalle	MWB AG 300023		300000551	ne	-/-	-/-
4	n. a.	EMI Test Receiver	ESCI 3	R&S	100083	300003312	k	12.12.2018	11.12.2019
5	n. a.	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	vKI!	15.01.2018	14.01.2020
6	n. a.	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw	-/-	-/-
7	n. a.	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw	-/-	-/-
8	n. a.	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw	-/-	-/-
9	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck Mess - Elektronik	371	300003854	vKI!	24.11.2017	23.11.2020
10	n. a.	Spectrum-Analyzer	FSU26	R&S	200809	300003874	k	17.12.2018	16.12.2019

6.2 Shielded fully anechoic chamber

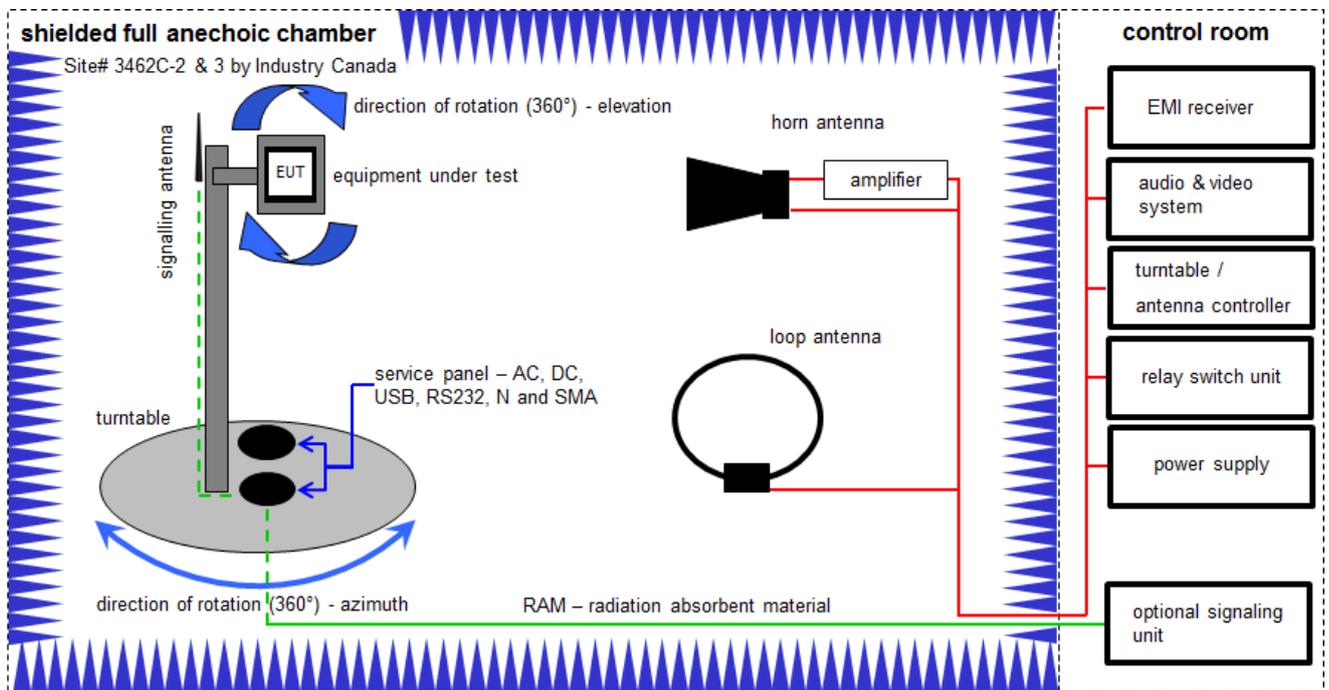

Measurement distance: horn antenna 3 meter; loop antenna 3 meter / 1 meter

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)


Example calculation:

$$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dB\mu V/m] (71.61 \mu V/m)$$


Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	9107-3697	300001605	vKI!	27.02.2019	26.02.2021
1	n. a.	Active Loop Antenna 9 kHz to 30 MHz	6502	EMCO	2210	300001015	vKI!	13.06.2019	12.06.2021
3	n. a.	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP	2920A04590	300001041	vKI!	14.12.2017	13.12.2020
4	n. a.	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789	ne	-/-	-/-
5	n. a.	Broadband Amplifier 0.5-18 GHz	CBLU5184540	CERNEX	22051	300004483	ev	-/-	-/-
6	n. a.	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000032	300004510	ne	-/-	-/-
7	n. a.	Computer	Intel Core i3 3220/3,3 GHz, Prozessor		2V2403033A54 21	300004591	ne	-/-	-/-
8	n. a.	NEXIO EMV-Software	BAT EMC V3.16.0.49	EMCO		300004682	ne	-/-	-/-
9	n. a.	Anechoic chamber		TDK		300003726	ne	-/-	-/-
10	n. a.	EMI Test Receiver 9kHz-26,5GHz	ESR26	R&S	101376	300005063	k	19.12.2018	18.12.2019
11	n. a.	RF Amplifier	AFS4-00100800-28-20P-4-R	MITEQ	2008992	300005204	ne	-/-	-/-
12	n. a.	RF-Amplifier	AMF-6F06001800-30-10P-R	NARDA-MITEQ Inc	2011571	300005240	ev	-/-	-/-

6.3 Radiated measurements > 18 GHz

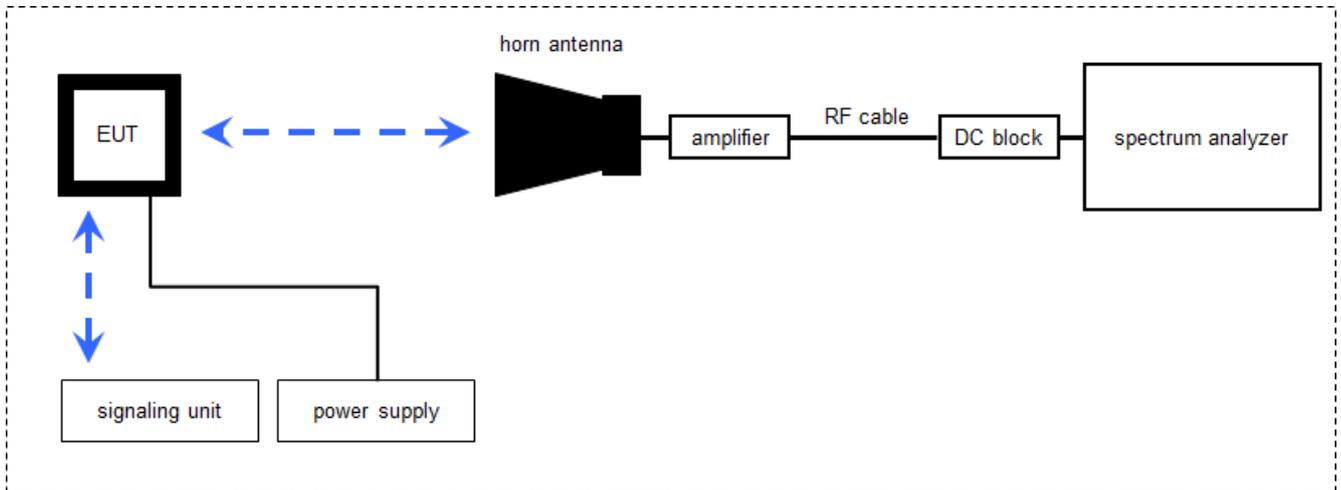

6.4 Radiated measurements > 50/85 GHz

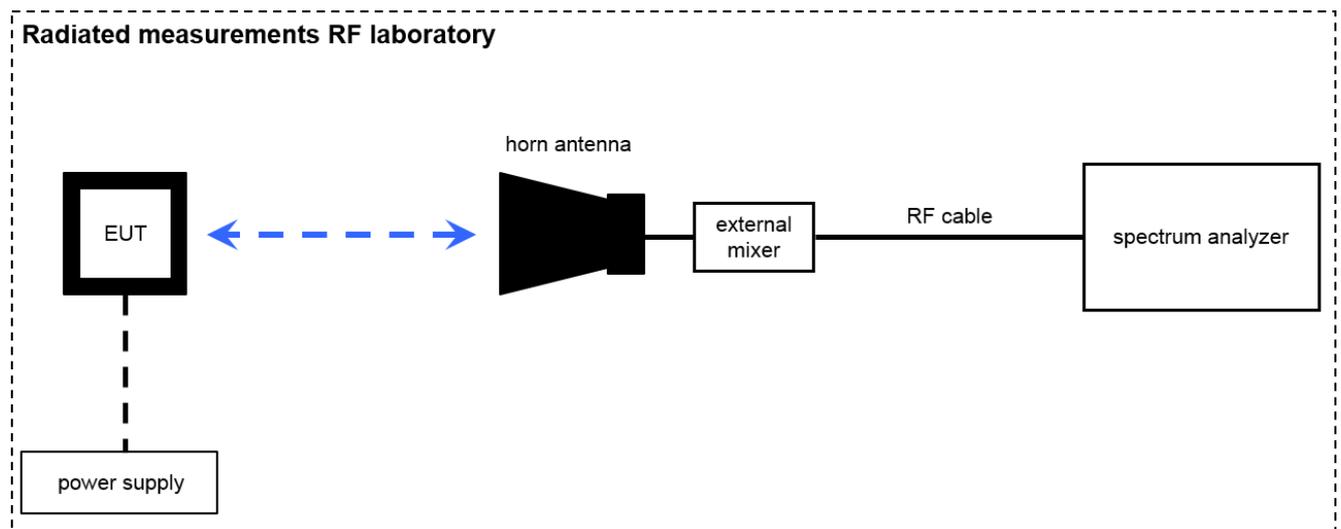

$$OP = AV + D - G$$

(OP-rad. output power; AV-analyzer value; D-free field attenuation of measurement distance; G-antenna gain)

Example calculation:

$$OP \text{ [dBm]} = -54.0 \text{ [dBm]} + 64.0 \text{ [dB]} - 20.0 \text{ [dBi]} = -10 \text{ [dBm]} \text{ (100 } \mu\text{W)}$$

Note: conversion loss of mixer is already included in analyzer value.

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	n. a.	Std. Gain Horn Antenna 18.0-26.5 GHz	638	Narda		300000486	vKI!	13.12.2017	12.12.2019
2	n. a.	Std. Gain Horn Antenna 26.5-40.0 GHz	V637	Narda	7911	300001751	ne	-/-	-/-
3	n. a.	Std. Gain Horn Antenna 39.3-59.7 GHz	2424-20	Flann	75	300001979	ne	-/-	-/-
4	n. a.	Std. Gain Horn Antenna 49.9-75.8 GHz	2524-20	Flann	*	300001983	ne	-/-	-/-
5	n. a.	Std. Gain Horn Antenna 60-90 GHz	COR 60_90	Thomson CSF		300000814	ev	-/-	-/-
6	n. a.	Std. Gain Horn Antenna 73.8-112 GHz	2724-20	Flann	*	300001988	ne	-/-	-/-
7	n. a.	Std. Gain Horn Antenna 114-173 GHz	2924-20	Flann	*	300001999	ne	-/-	-/-
8	n. a.	Std. Gain Horn Antenna 145-220 GHz	3024-20	Flann	*	300002000	ne	-/-	-/-
9	n. a.	Std. Gain Horn Antenna 217-330 GHz	32240-20	Flann	233278	300004960	ne	-/-	-/-
10	n. a.	Broadband LNA 18-50 GHz	CBL18503070PN	CERNEX	25240	300004948	ev	-/-	-/-
11	n. a.	Harmonic Mixer 2-Port, 50-75 GHz	FS-Z75	R&S	100099	300003949	k	05.09.2018	04.09.2019
12	n. a.	Harmonic Mixer 3-Port, 75-110 GHz	FS-Z110	R&S	101411	300004959	k	08.05.2019	07.05.2020
13	n. a.	Harmonic Mixer 3-Port, 110-170 GHz	FS-Z170	Radiometer Physics GmbH	100014	300004156	k	09.05.2019	08.05.2020
14	n. a.	Harmonic Mixer 3-Port, 140-220 GHz	SAM-220	Radiometer Physics GmbH	200001	300004157	k	10.07.2019	09.07.2020
15	n. a.	Harmonic Mixer 3-Port, 220-325 GHz	SAM-325	Radiometer Physics GmbH	100002	300004158	k	10.07.2019	09.07.2020
16	n. a.	Harmonic Mixer 3-Port, 60-90 GHz	FS-Z90	R&S	101555	300004691	k	09.07.2019	08.07.2020
17	n. a.	Spectrum Analyzer 20 Hz - 50 GHz	FSU50	R&S	200012	300003443	k	03.01.2019	02.01.2021

7 Sequence of testing

7.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

*)Note: The sequence will be repeated three times with different EUT orientations.

7.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position $\pm 45^\circ$ and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

7.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

7.4 Sequence of testing radiated spurious above 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 0.5 m).
- The EUT is set into operation.

Premeasurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.

7.5 Sequence of testing radiated spurious above 50/85 GHz with external mixers

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate for far field (e.g. 0.25 m).
- The EUT is set into operation.

Premeasurement

- The test antenna with external mixer is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.
- Caution is taken to reduce the possible overloading of the external mixer.

Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- As external mixers may generate false images care is taken to ensure that any emission measured by the spectrum analyzer does indeed originate in the EUT. Signal identification feature of spectrum analyzer is used to eliminate false mixer images (i.e., it is not the fundamental emission or a harmonic falling precisely at the measured frequency).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.

8 Measurement uncertainty

Test case	Uncertainty
Equivalent isotropically radiated power (e.i.r.p.)	Conducted value ± 1 dB Radiated value ± 3 dB
Permitted range of operating frequencies	± 100 kHz
Conducted unwanted emissions in the spurious domain (up to 40 GHz)	± 1 dB
Radiated unwanted emissions in the spurious domain (up to 40 GHz)	± 3 dB
Conducted unwanted emissions in the spurious domain (40 to 50 GHz)	± 4 dB
Radiated unwanted emissions in the spurious domain (40 to 50 GHz)	± 4 dB
Conducted unwanted emissions in the spurious domain (50 to 300 GHz)	± 5 dB
Radiated unwanted emissions in the spurious domain (50 to 300 GHz)	± 5 dB
DC and low frequency voltages	± 3 %
Temperature	± 1 °C
Humidity	± 3 %

9 Summary of measurement results

<input checked="" type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	47 CFR Part 95 Subpart M	see below	2019-09-23	-/-

Test specification clause	Test case	Temperature conditions	Power source voltages	C	NC	NA	NP	Results (max.)
§2.1046 §95.3367 (a) (b)	Radiated power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
§2.1047	Modulation characteristics	-/-	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
§2.1049	Occupied bandwidth (99% bandwidth)	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
§2.1051	Spurious emissions at antenna terminals	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	see note
§2.1053 §95.3379 (a)(1) §95.3379 (a)(2) §95.3379 (a)(3)	Field strength of emissions (radiated spurious)	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
§2.1055 §95.3379 (b)	Frequency stability	Nominal and Extreme	Nominal and Extreme	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Note: C = Compliant; NC = Not Compliant; NA = Not Applicable; NP = Not Performed

See FCC's Millimeter Wave Test Procedures:

I. A radiated method of measurements in order to demonstrate compliance with the various regulatory requirements has been chosen in consideration of test equipment availability and the limitations of many external harmonic mixers. A conducted method of measurement could be employed if EUT and mixer waveguides both are accessible and of the same type (WG number) and if waveguide sections and transitions can be found. Another potential problem is that the peak power output of devices operating under Sections 15.253 and 15.255 may exceed the +20 dBm input power limit of many commercially available mixers. For these reasons a radiated method is preferred.

10 Measurement results

10.1 Radiated power

Description:

The fundamental radiated emission limits within the 76-81 GHz band are expressed in terms of Equivalent Isotropically Radiated Power (EIRP) and are as shown below.

Measurement:

Parameters	
Detector:	RMS / Pos-Peak
Sweep time:	100 s
Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Trace-Mode:	Max Hold
Measurement distance:	2.0 m

Limits:

FCC §95.3367 (a) (b)

Frequency	Measurement distance	Power Density → EIRP
76.0 - 81.0 GHz	3.0 m	88 μW/cm ² → 50 dBm (Average) 279 μW/cm ² → 55 dBm (PEAK)


Measurement results:

Test conditions (Mode 3 – AEB3 mode)	Radiated peak power (eirp) [dBm]	Radiated power spectral density [dBm]	Radiated mean power (eirp) / Channel power [dBm]
T _{nom} / V _{min} -V _{max}	26.73	10.16	22.97
T _{min} / V _{min} -V _{max}	27.05	11.70	24.11
T _{max} / V _{min} -V _{max}	24.77	08.03	20.92


Test conditions (Mode 2 – AEB2 mode)	Radiated peak power (eirp) [dBm]	Radiated power spectral density [dBm]	Radiated mean power (eirp) / Channel power [dBm]
T _{nom} / V _{min} -V _{max}	32.43	15.59	29.12
T _{min} / V _{min} -V _{max}	33.19	16.94	29.86
T _{max} / V _{min} -V _{max}	30.49	14.22	27.39

Test conditions (Mode 0 – ACC mode)	Radiated peak power (eirp) [dBm]	Radiated power spectral density [dBm]	Radiated mean power (eirp) / Channel power [dBm]
T _{nom} / V _{min} -V _{max}	32.27	25.12	29.53
T _{min} / V _{min} -V _{max}	33.18	21.70	30.46
T _{max} / V _{min} -V _{max}	30.36	18.52	26.75


Plot 1: Mode 3, OBW, Radiated peak power, $T_{nom} / V_{min}-V_{max}$

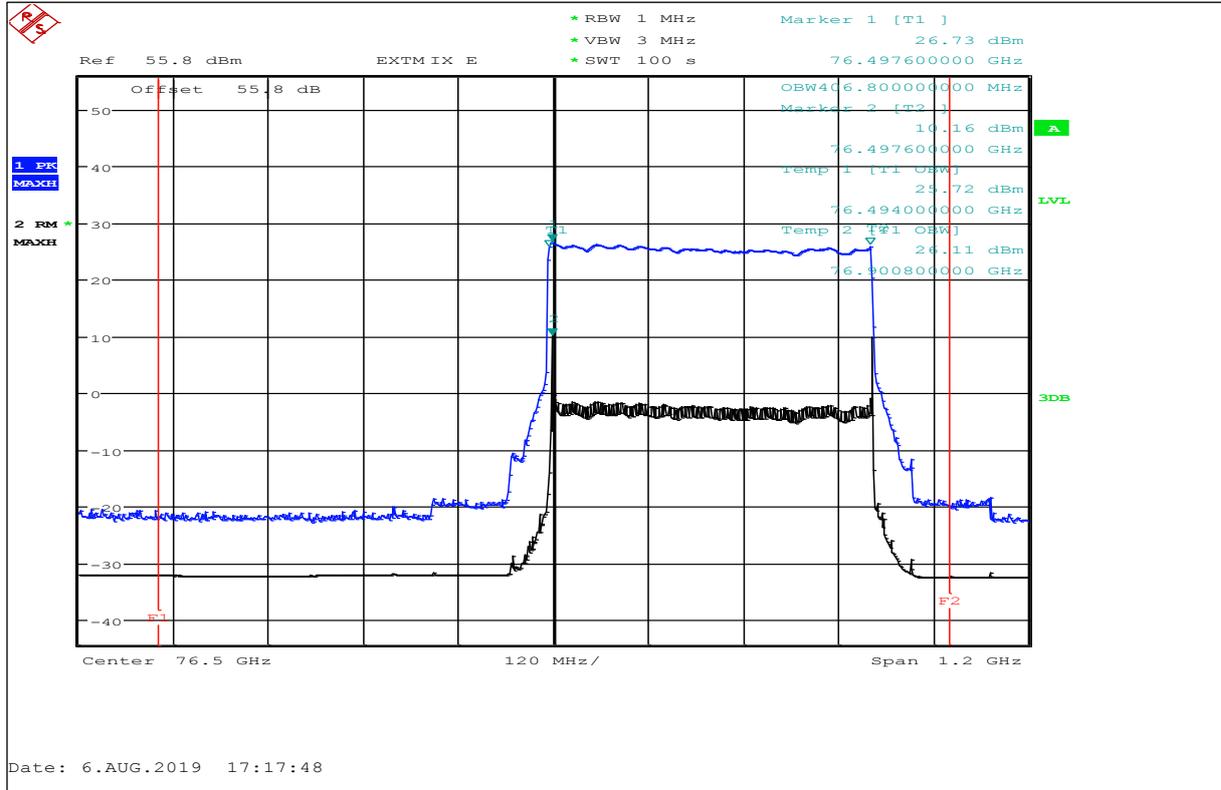


Plot 2: Mode 3, Radiated mean power, $T_{nom} / V_{min}-V_{max}$

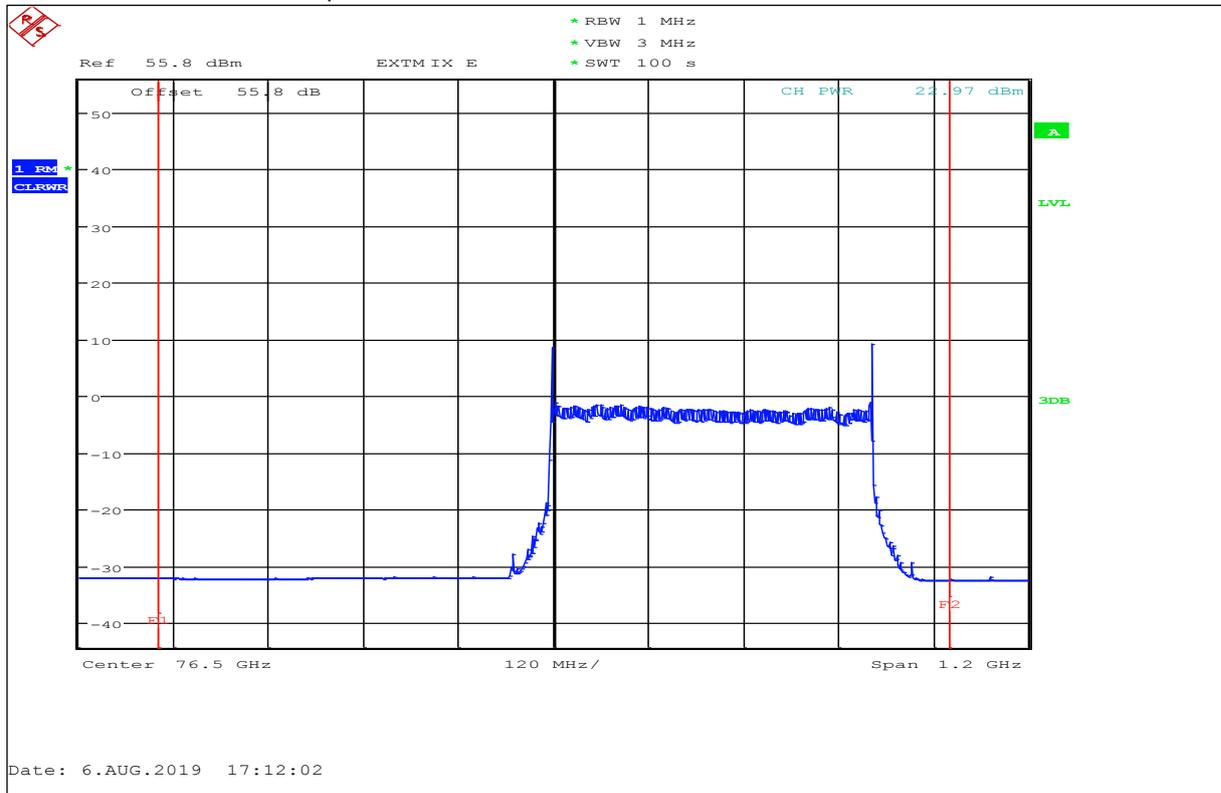


Plot 3: Mode 3, OBW, Radiated peak power, $T_{min} / V_{min}-V_{max}$

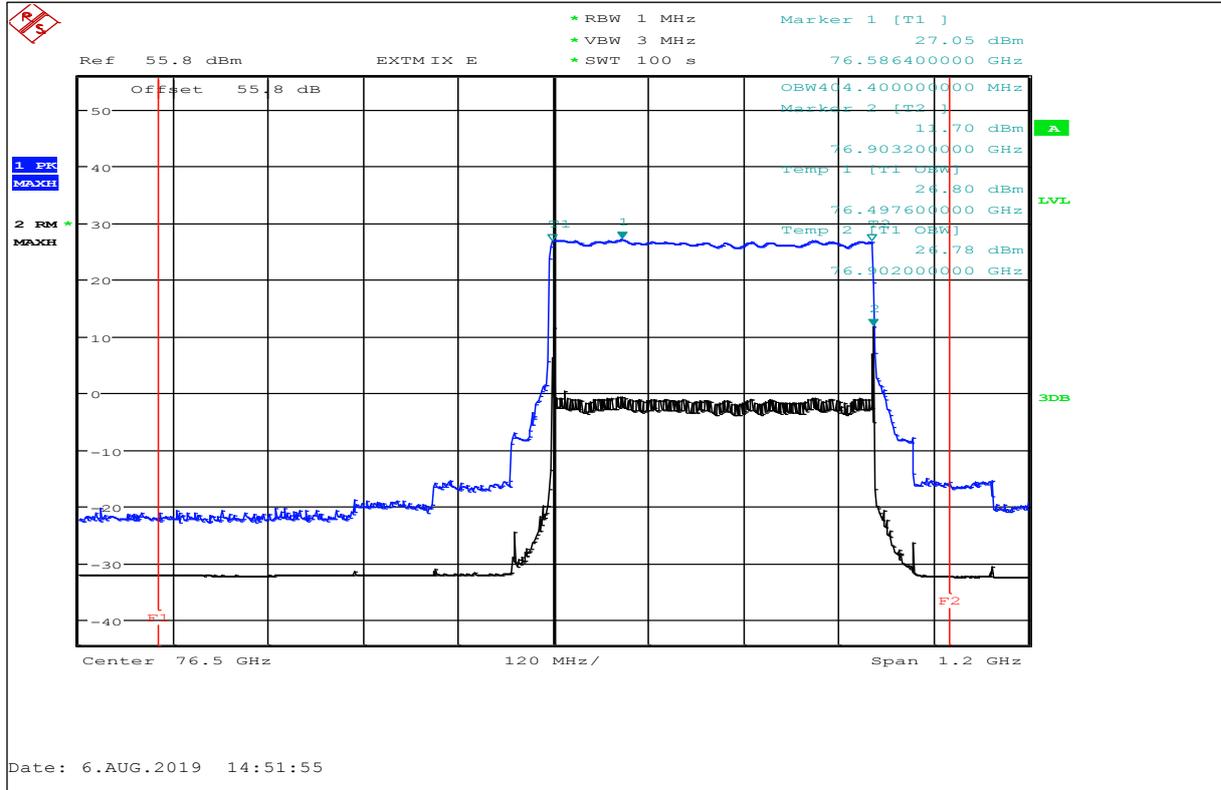


Plot 4: Mode 3, Radiated mean power, $T_{min} / V_{min}-V_{max}$

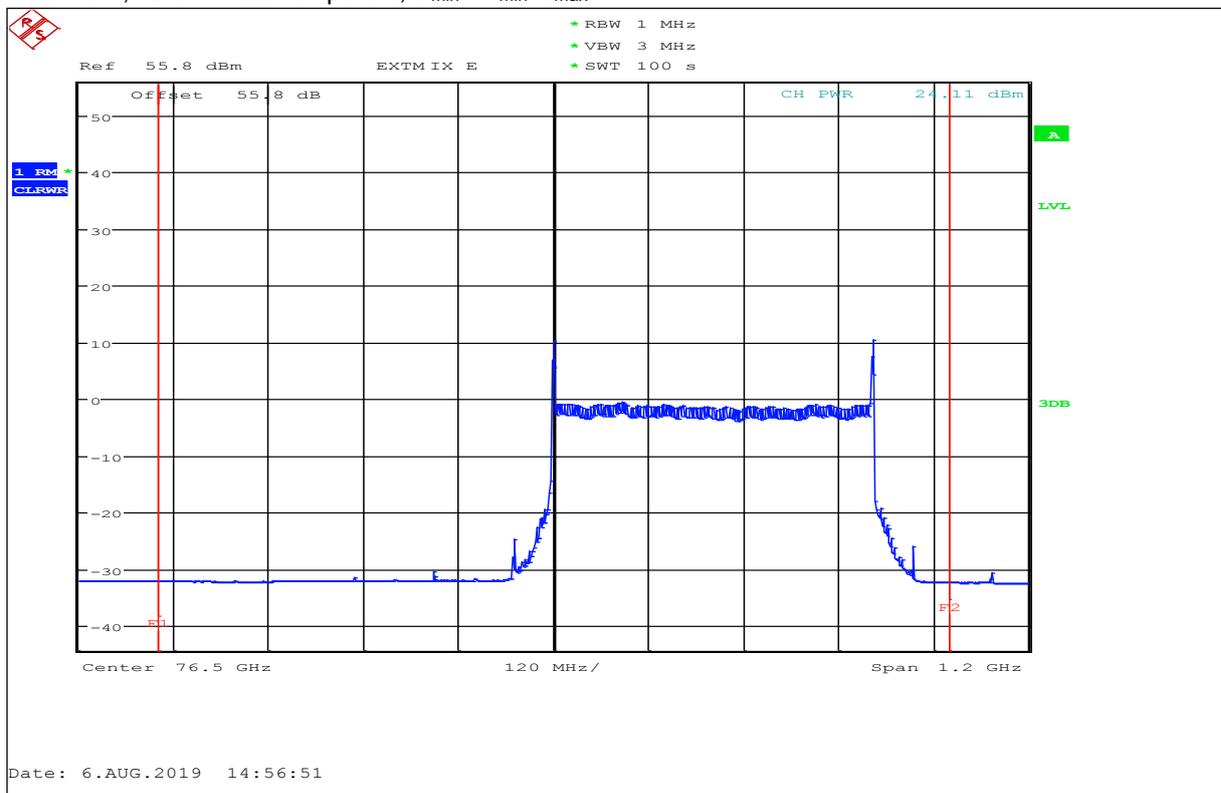


Plot 5: Mode 3, OBW, Radiated peak power, $T_{max} / V_{min}-V_{max}$

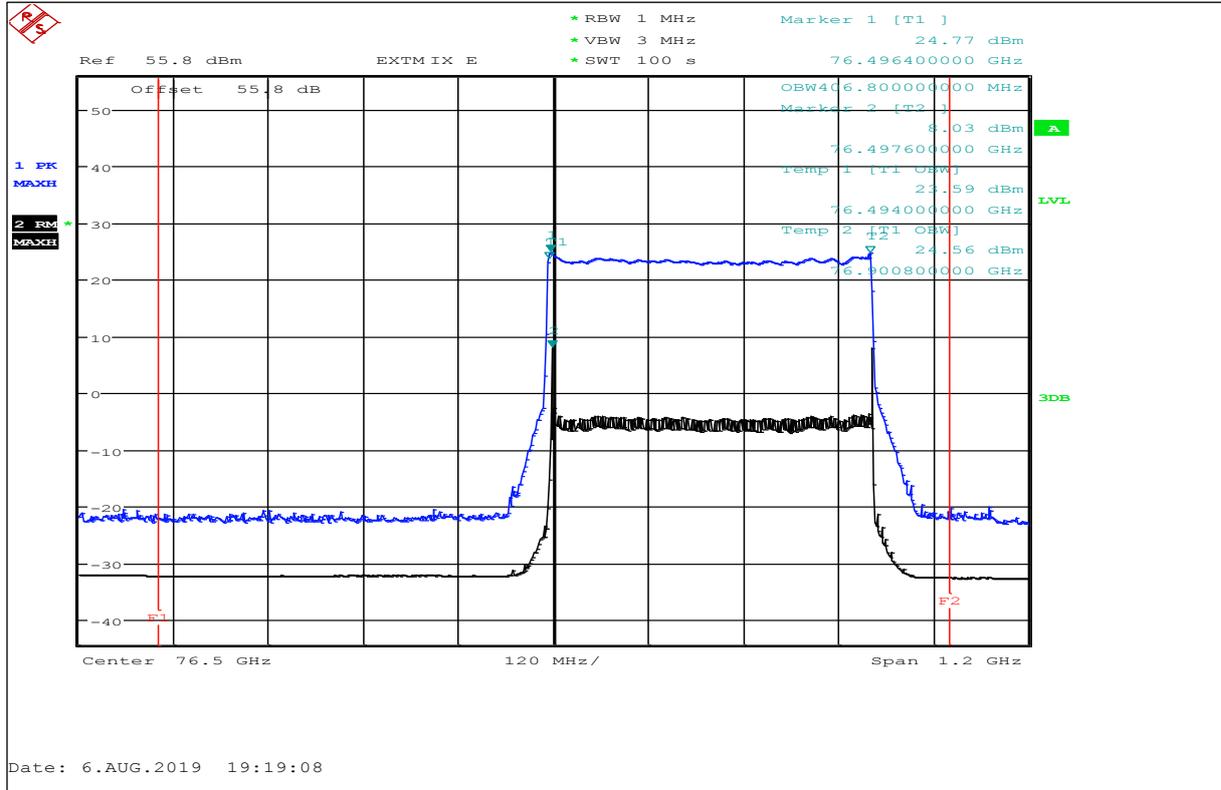


Plot 6: Mode 3, Radiated mean power, $T_{max} / V_{min}-V_{max}$

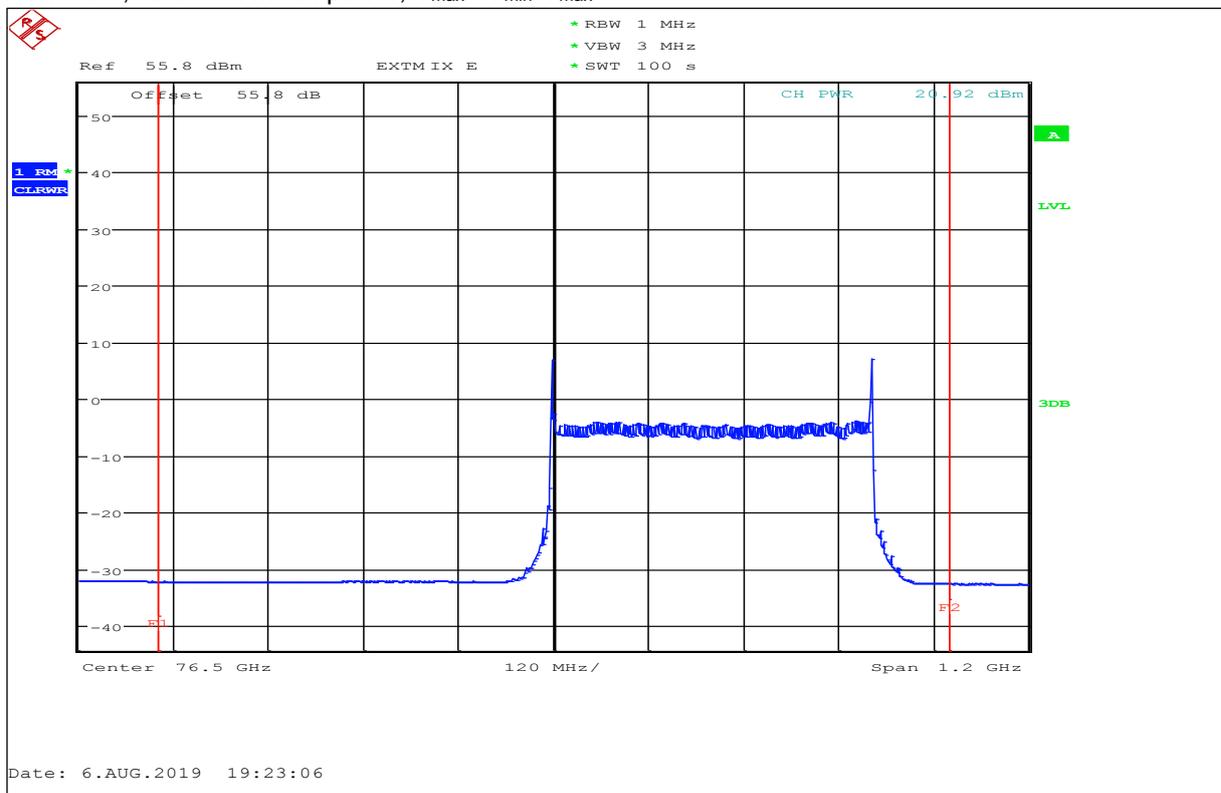


Plot 7: Mode 2, OBW, Radiated peak power, $T_{nom} / V_{min}-V_{max}$

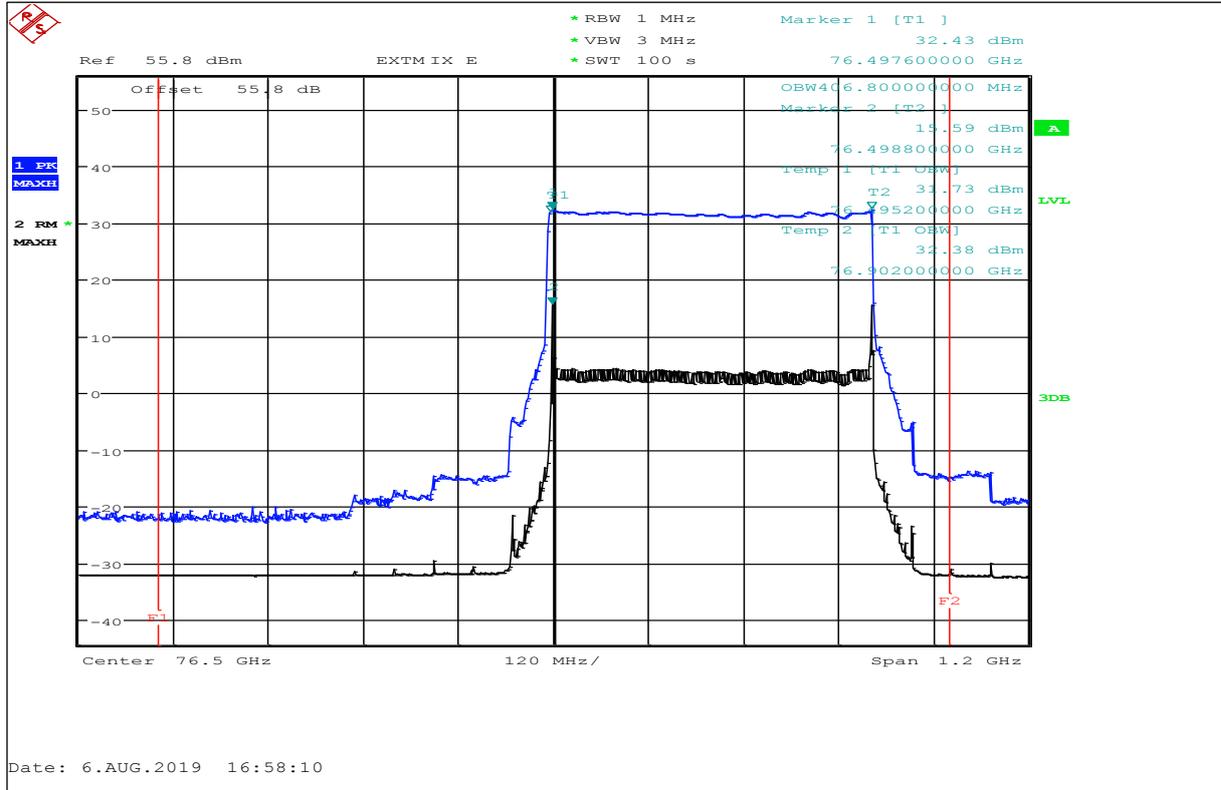


Plot 8: Mode 2, Radiated mean power, $T_{nom} / V_{min}-V_{max}$

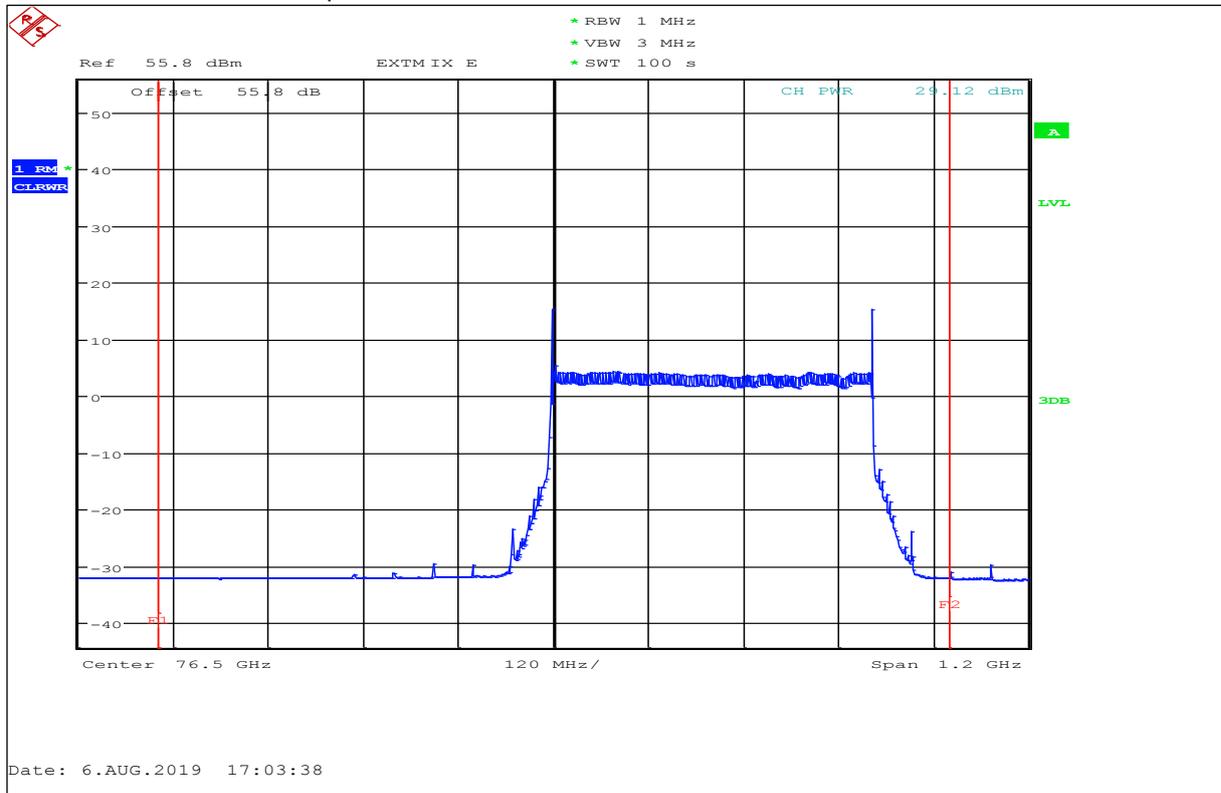


Plot 9: Mode 2, OBW, Radiated peak power, $T_{min} / V_{min}-V_{max}$

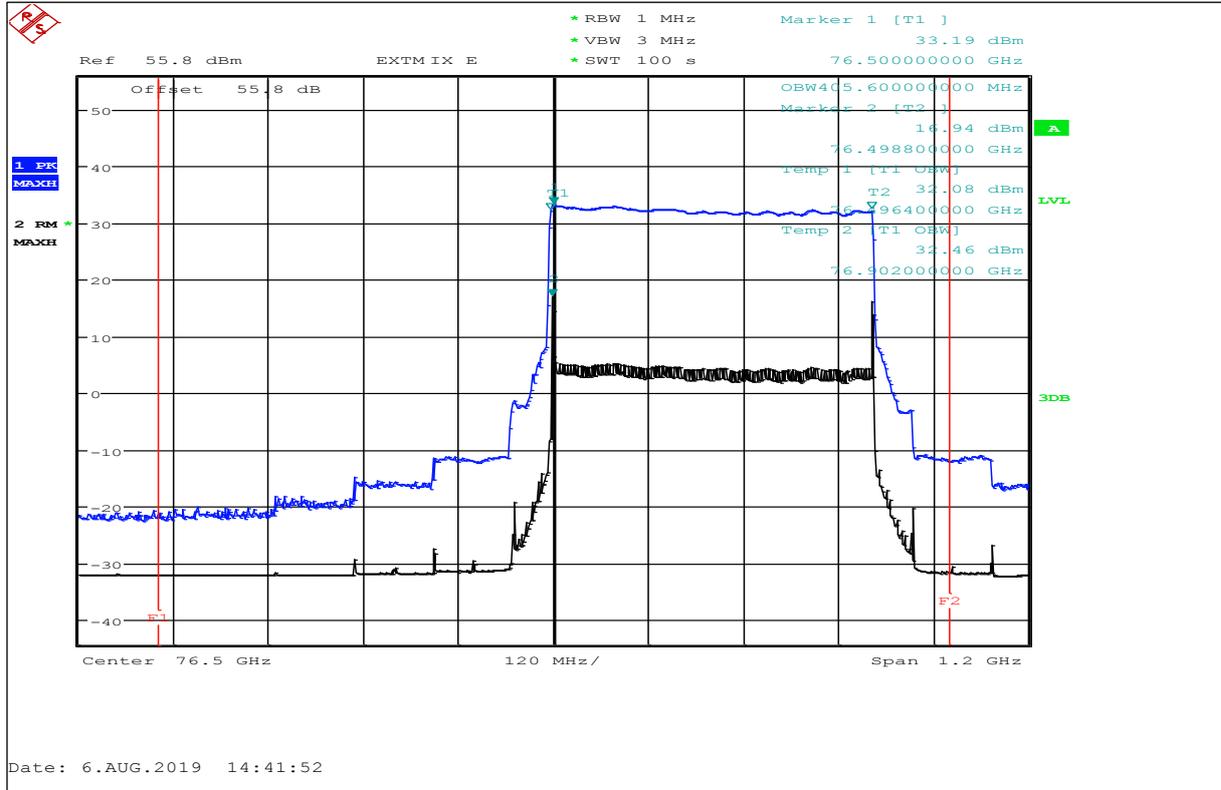


Plot 10: Mode 2, Radiated mean power, $T_{min} / V_{min}-V_{max}$

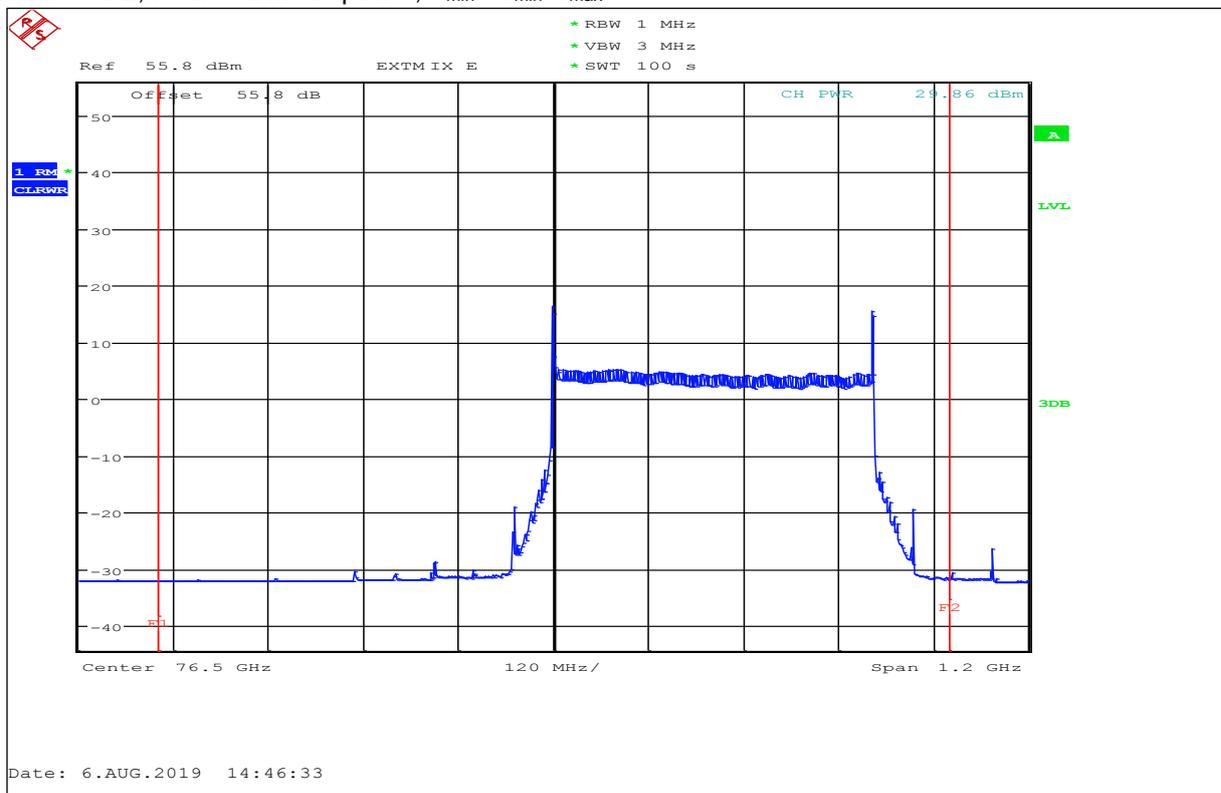


Plot 11: Mode 2, OBW, Radiated peak power, $T_{max} / V_{min}-V_{max}$

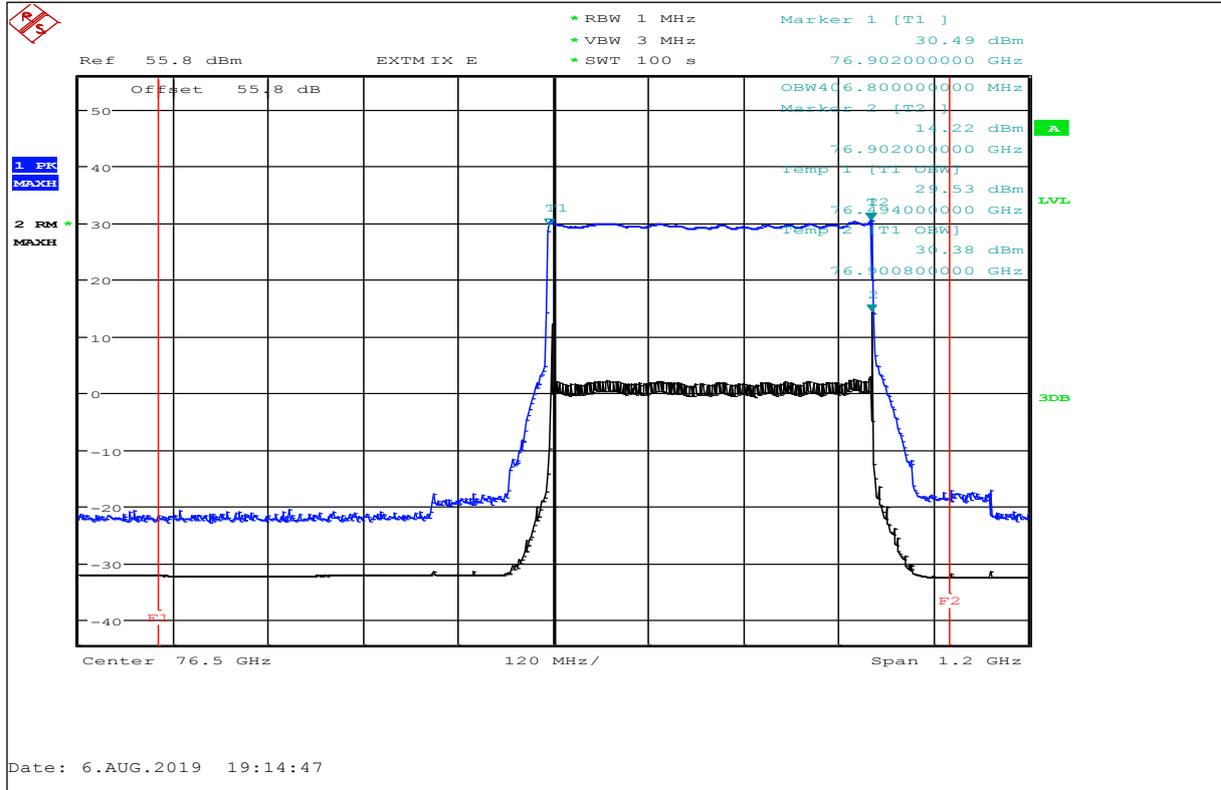


Plot 12: Mode 2, Radiated mean power, $T_{max} / V_{min}-V_{max}$

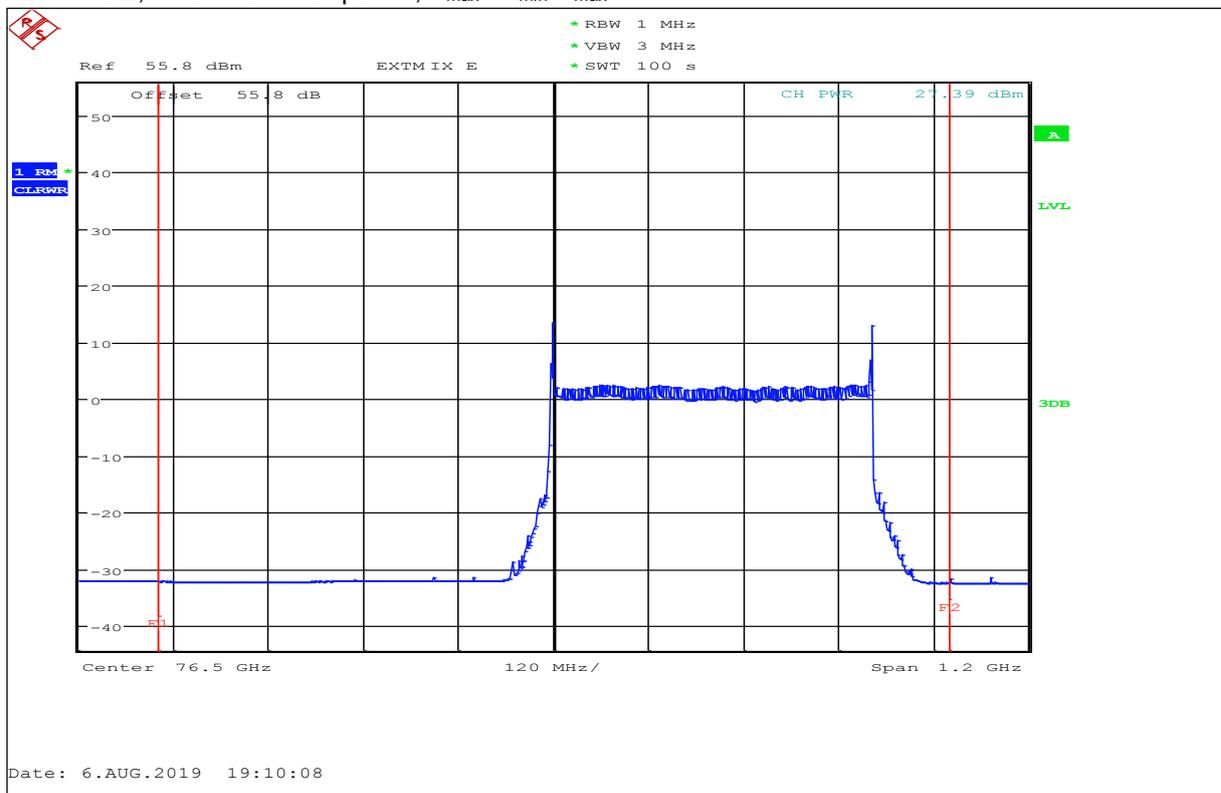


Plot 13: Mode 0, OBW, Radiated peak power, $T_{nom} / V_{min}-V_{max}$

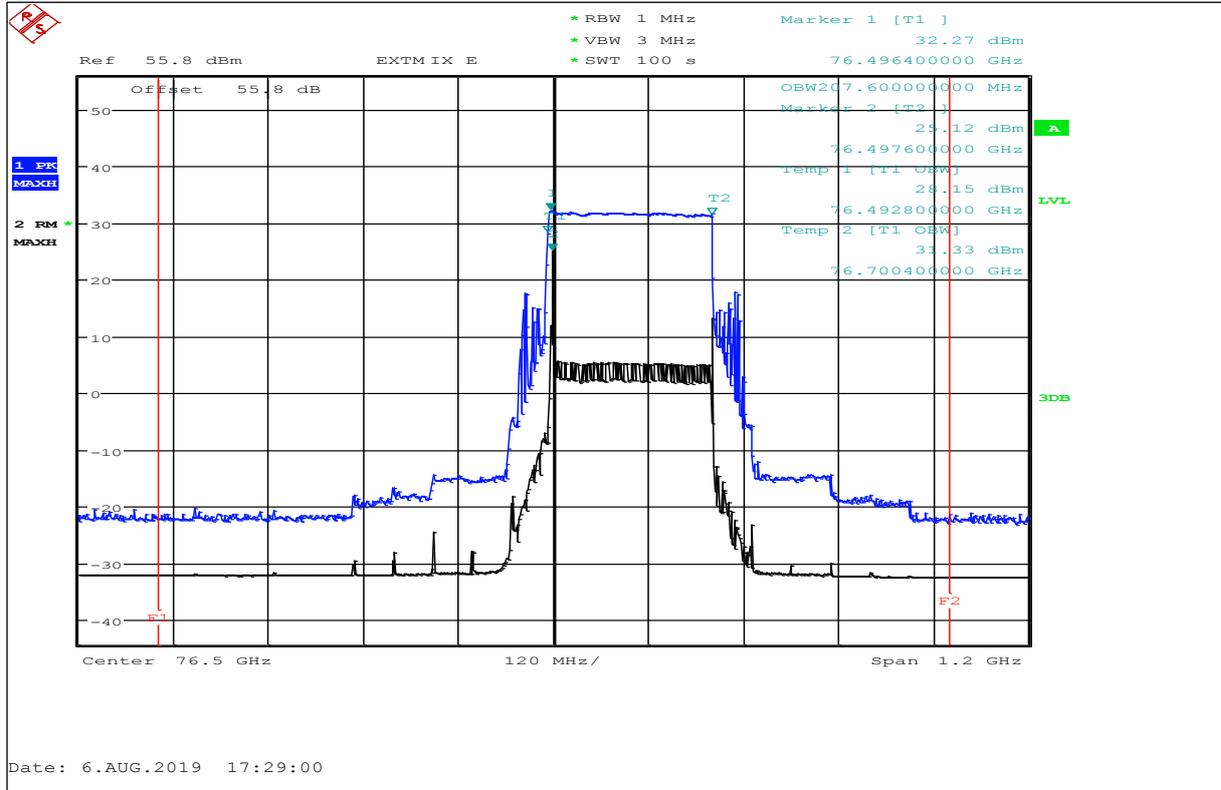


Plot 14: Mode 0, Radiated mean power, $T_{nom} / V_{min}-V_{max}$

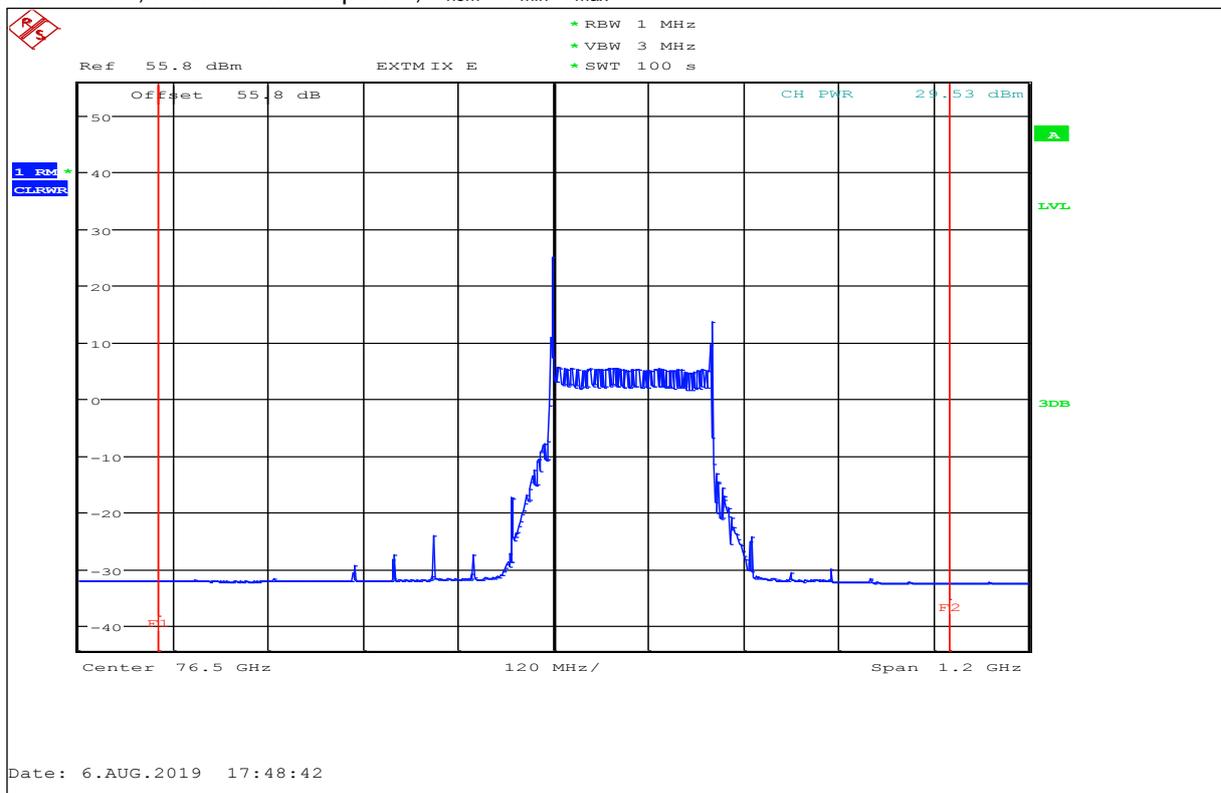

Plot 17: Mode 0, OBW, Radiated peak power, $T_{max} / V_{min}-V_{max}$

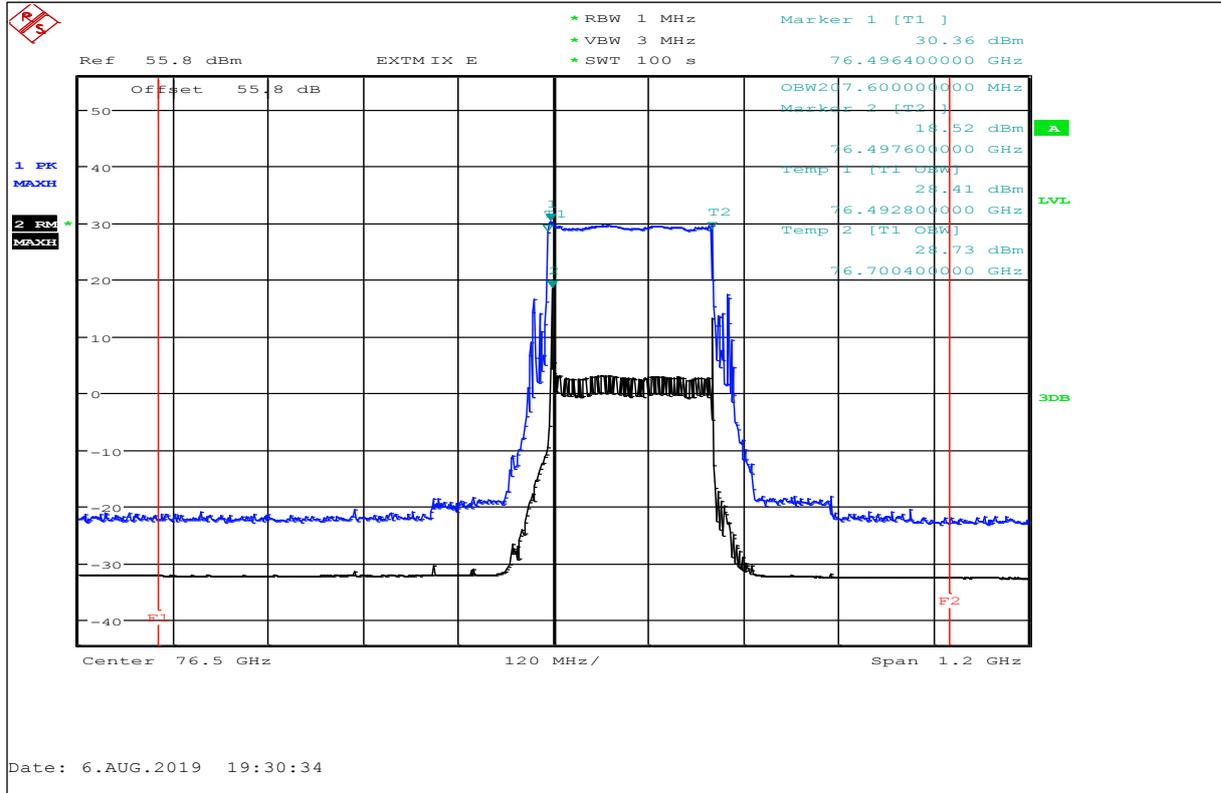

Plot 18: Mode 0, Radiated mean power, $T_{max} / V_{min}-V_{max}$

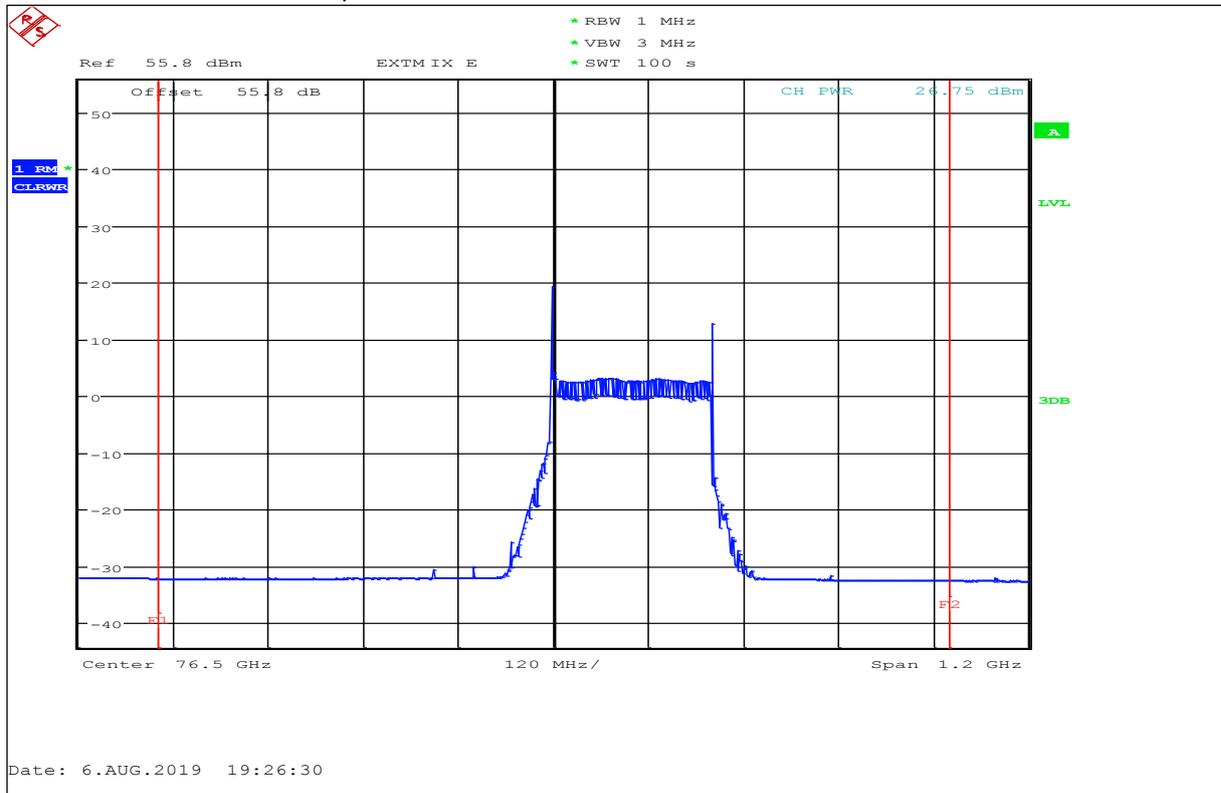


10.2 Modulation characteristics

Description:

§2.1047 (d) *Other types of equipment.* A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

Comments from manufacturer on modulation characteristics:

Information: Frequency over time

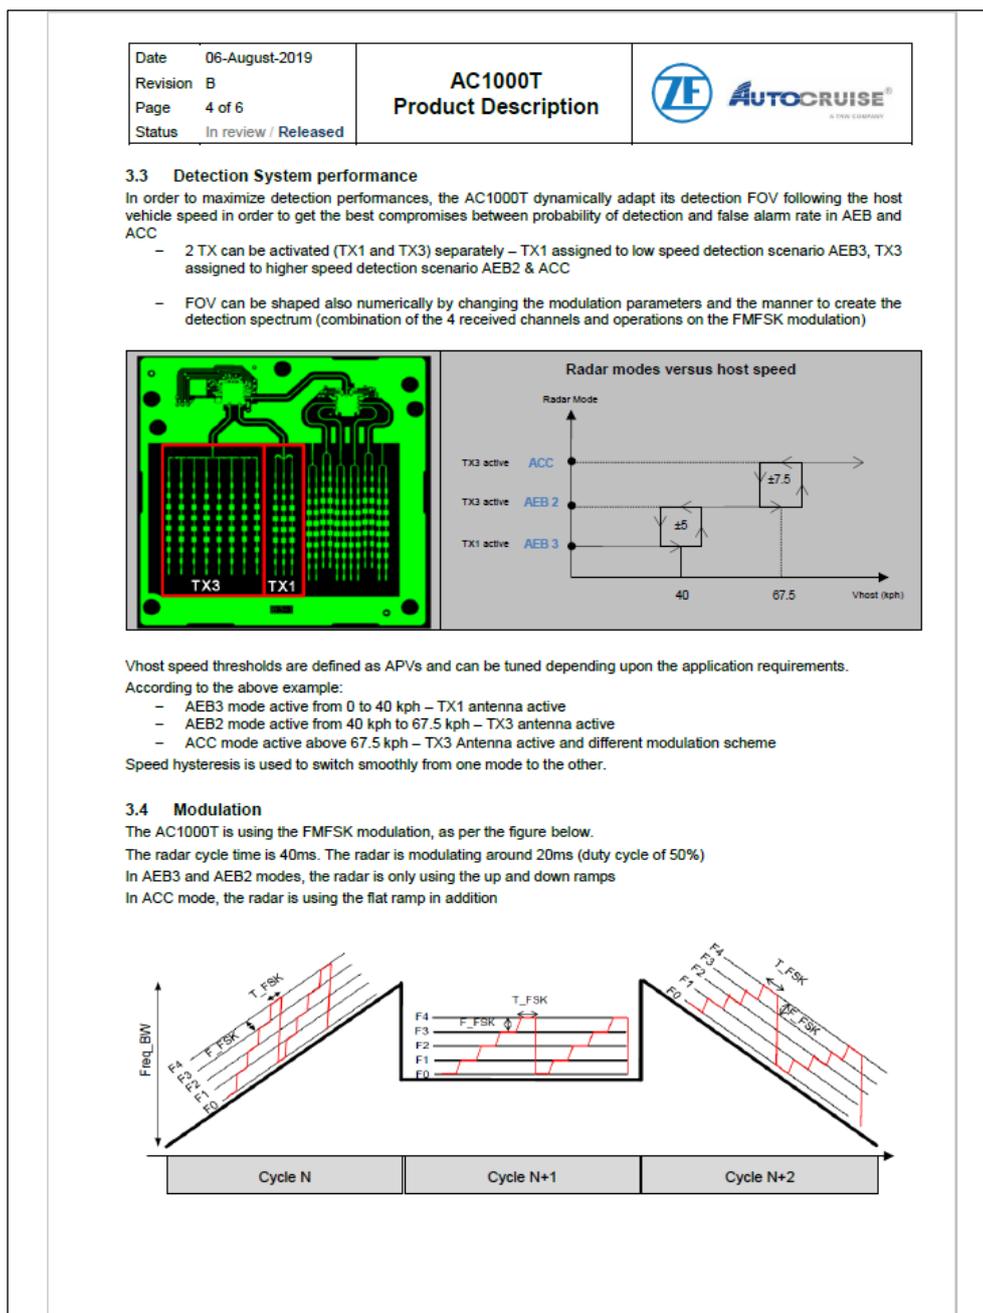

Information: Duty Cycle = 50 %

PROPERTY NOTICE: This copyrighted document is the property of ZF and is disclosed in confidence. It may not be copied, disclosed to others, or used for manufacturing, without the prior written consent of ZF. 2019

Date 29.08.2019
Revision 1.0
Page 1 of 2



ZF Group
Autocruise SAS
760 avenue du Technopôle
29280 PLOUZANE
Tél. 02 98 45 43 68

29 of August, 2019


AC1000T – Modulation Characteristics

The AC1000T radar is a 76-77GHz radar used for automotive front functions such as ACC or AEB. It has three operating modes, named AEB3, AEB2 and ACC, which are host vehicle speed dependent. Modulation used is FMFSK (combination of a main FMCW and small FSK steps). The radar cycle time is 40ms, where roughly 20ms is used for modulating and transmitting and 20ms for signal processing (the radar stops transmitting)

ACC Mode

For vehicle speed > 67.5kph
Bandwidth: 200MHz
FSK step: 160kHz

Modulation is comprised of three cycles with an up-ramp, a flat ramp and a down ramp, which are then repeated, as in the Figure below.

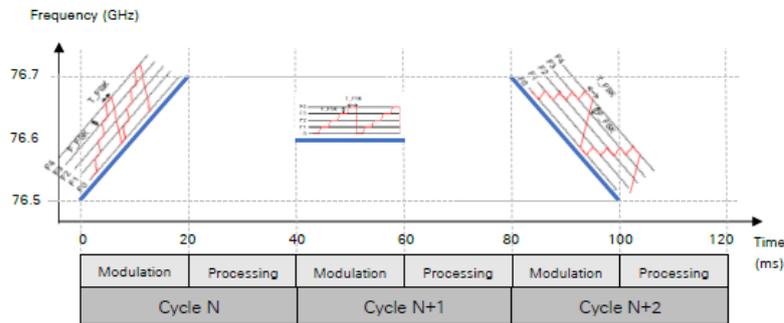

AUTOCRUISE S.A.S. • S.A.S. au capital de 1 000 000€ • Siège social : 760 Avenue du Technopôle • 29280 PLOUZANE • France
SIRET 280 295 451 000 47 • Code APE 2651 A • Tél : +33 (0) 2.98.45.43.68 • www.autocruise.com
Filiale de ZF • ZF Headquarters: Friedrichshafen – Trade register of the municipal court of Ulm HRB 630206 • www.zf.com

PROPERTY NOTICE: This copyrighted document is the property of ZF and is disclosed in confidence. It may not be copied, disclosed to others, or used for manufacturing, without the prior written consent of ZF. 2019

Date 29.08.2019
Revision 1.0
Page 2 of 2



AEB Mode


AEB3 mode is for vehicle speed < 40kph

AEB2 mode is for vehicle speed comprised between 40kph and 67.5kph

Bandwidth: 400MHz

FSK step: 320kHz

Modulation is comprised of two cycles with an up-ramp and a down ramp, which are then repeated, as in the Figure below.

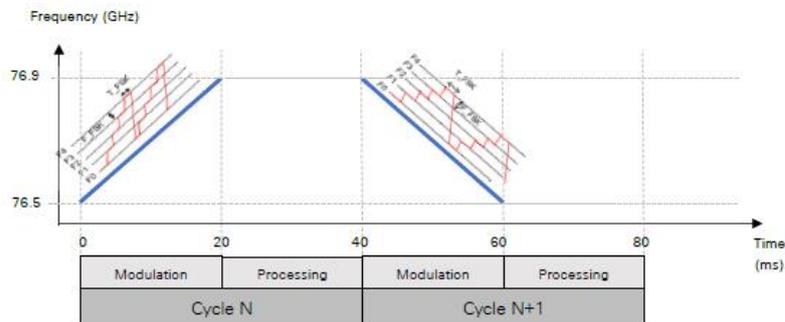

GERMAINE Sylvain

RF Application and Homologation Team Lead
Radar development department
Email: sylvain.germaine@zf.com
Tel: +33 (0)2 98 48 98 28

[Handwritten Signature]
Digitally signed by Sylvain GERMAINE
DN: cn=Sylvain GERMAINE, o=ZF, ou=Radars Engineering, email=sylvain.germaine@zf.com, c=FR
Date: 2019.08.30 14:58:27 +02'00'



AUTOCRUISE S.A.S. • S.A.S. au capital de 1 000 000€ • Siège social : 760 Avenue du Technopôle • 29280 PLOUZANE • France
SIRET 280 295 451 000 47 • Code APE 2651 A • Tél : +33 (0) 2.98.45.43.68 • www.autocrui.se
Filiale de ZF • ZF Headquarters: Friedrichshafen – Trade register of the municipal court of Ulm HRB 630206 • www.zf.com

10.3 Occupied bandwidth

Description:

§2.1049 The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Measurement:

Parameters	
Detector:	Pos-Peak
Sweep time:	100 s
Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Trace-Mode:	Max Hold
Measurement distance:	2.0 m
Measurement uncertainty	Span/1000

Limits:

FCC §95.3379 (b)

Frequency range	f(lowest) > 76.0 GHz	f(highest) < 81.0 GHz
-----------------	----------------------	-----------------------

Measurement results:

Test conditions (Mode 3 – AEB3 mode)	Operating Frequency Range		Occupied Bandwidth [MHz]
	f _L [GHz]	f _H [GHz]	
T _{nom} / V _{min} -V _{max}	76.494 000	76.900 800	406.8
T _{min} / V _{min} -V _{max}	76.497 600	76.902 000	404.4
T _{max} / V _{min} -V _{max}	76.494 000	76.900 800	406.8

Test conditions (Mode 2 – AEB2 mode)	Operating Frequency Range		Occupied Bandwidth [MHz]
	f _L [GHz]	f _H [GHz]	
T _{nom} / V _{min} -V _{max}	76.495 200	76.902 000	406.8
T _{min} / V _{min} -V _{max}	76.496 400	76.902 000	405.6
T _{max} / V _{min} -V _{max}	76.494 000	76.900 800	406.8

Test conditions (Mode 0 – ACC mode)	Operating Frequency Range		Occupied Bandwidth [MHz]
	f _L [GHz]	f _H [GHz]	
T _{nom} / V _{min} -V _{max}	76.492 800	76.700 400	207.6
T _{min} / V _{min} -V _{max}	76.495 200	76.701 600	206.4
T _{max} / V _{min} -V _{max}	76.492 800	76.700 400	207.6

10.4 Field strength of spurious emissions and band edge (radiated spurious)

Description:

The power density of any emissions outside the 76-81 GHz band shall consist solely of spurious emissions and shall not exceed the following:

Measurement:

Parameters	
Detector:	F < 1 GHz: Quasi-Peak F > 1 GHz: Pos-Peak / AVERAGE
Sweep time:	See Plots
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Video bandwidth:	F < 1 GHz: 300 kHz F > 1 GHz: 3 MHz
Trace-Mode:	Max Hold
Measurement distance:	Adapted to specific frequencies to reduce analyser noise

Limits:

FCC §95.3379

FCC		
CFR Part 95.3379 (a) (1) / CFR Part 95.3379 (a) (3)		
Radiated Spurious Emissions		
Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.		
Frequency [MHz]	Field Strength [dBµV/m]	Measurement distance
0.009 – 0.490	2400/F[kHz]	300
0.490 – 1.705	24000/F[kHz]	30
1.705 – 30.0	30.0	30
30 – 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
960 – 40 000	54.0	3

Limits:

FCC §95.3379 (a) (2) (i) + (ii)

Frequency Range [GHz]	Measurement distance	Power Density
40 – 200	3.0 m	600 pW/cm ² → -1.7 dBm
200 – 243	3.0 m	1000 pW/cm ² → +0.5 dBm

Limits:


FCC §95.3379 (b)

Frequency range	f(lowest) > 76.0 GHz	f(highest) < 81.0 GHz
-----------------	----------------------	-----------------------


Measurement results:

Frequency in [GHz]	Detector	Bandwidth [MHz]	Level [dB μ V]	Distance [m]	Limit [dB μ V]	Margin [dB]
Mode 3 - 38.45	Peak	1	68.9	0.5	74	5.1
Mode 3 - 38.45	AVG	1	45.8	0.5	54	8.2
Mode 2 - 38.45	Peak	1	68.6	0.5	74	5.4
Mode 2 - 38.45	AVG	1	45.7	0.5	54	8.3
Mode 0 - 38.35	Peak	1	67.8	0.5	74	6.2
Mode 0 - 38.25	AVG	1	53.9	0.5	54	0.1


Plot 19: 9 kHz to 30 MHz, Mode 3, horizontal / vertical polarization

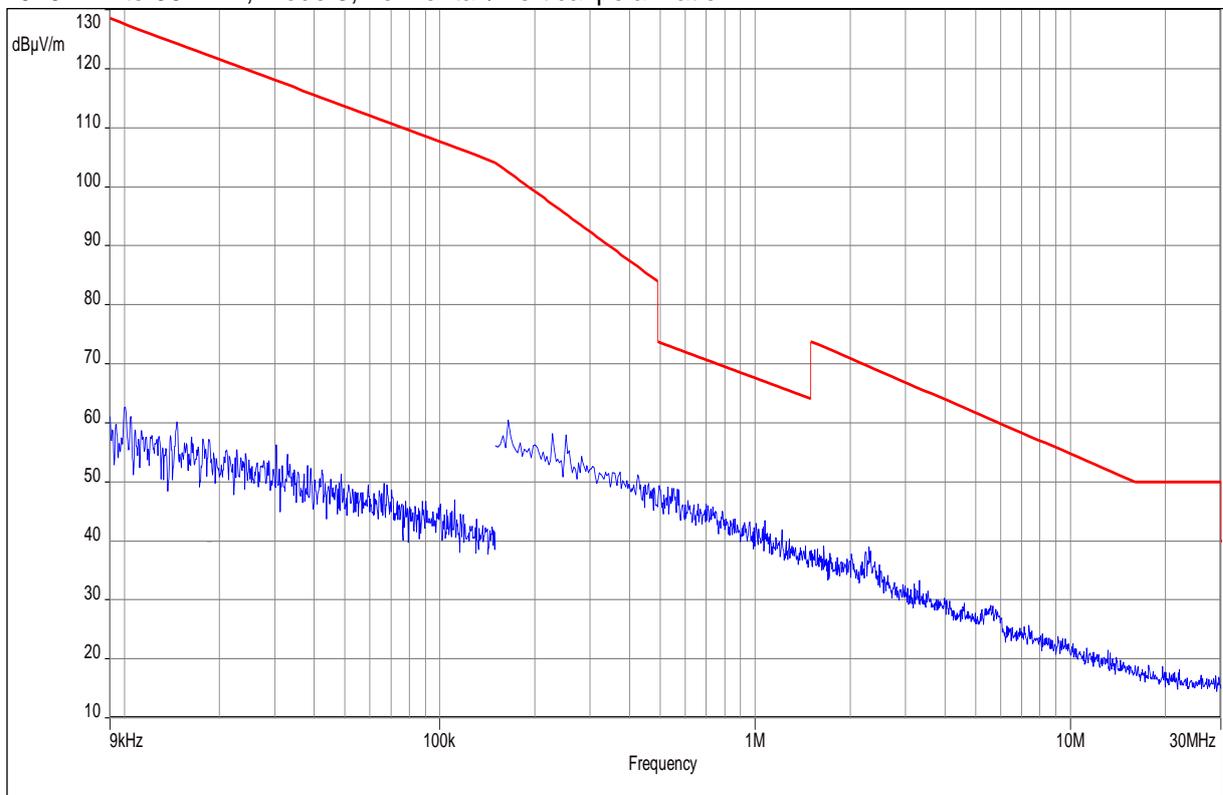

Plot 20: 9 kHz to 30 MHz, Mode 2, horizontal / vertical polarization

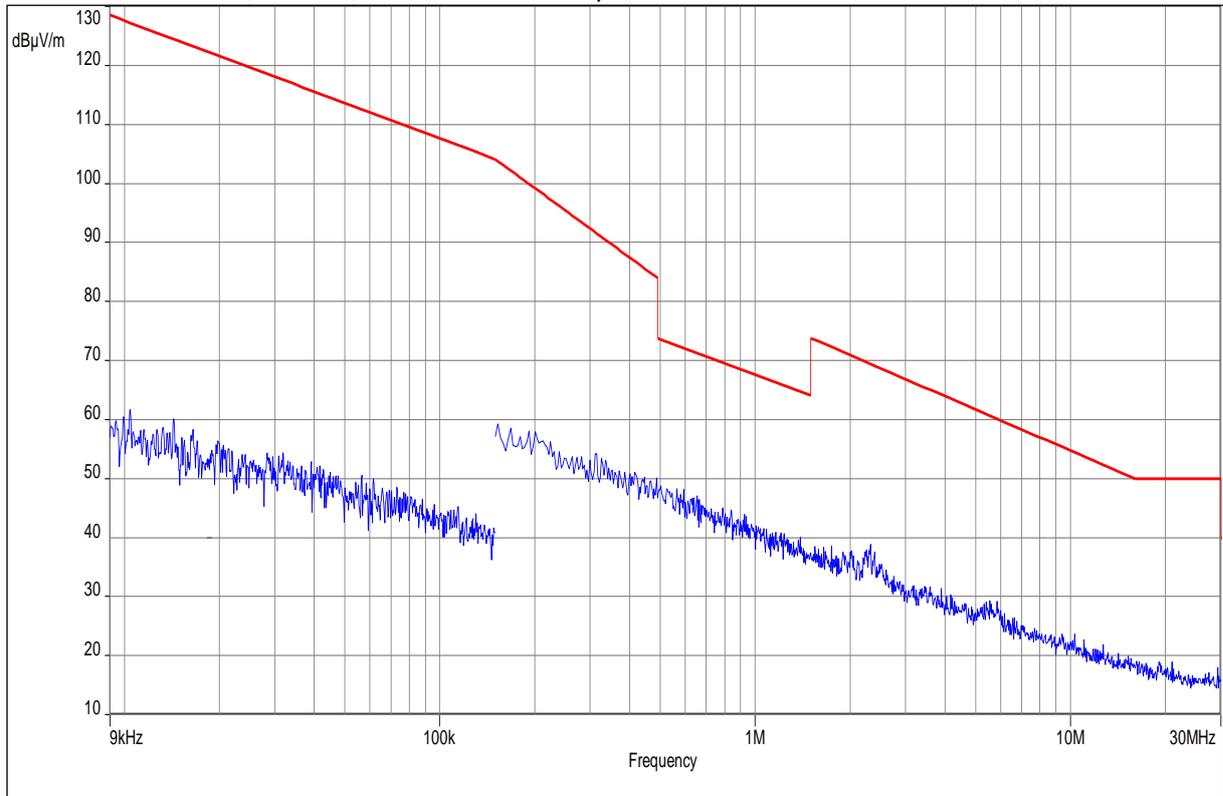


Plot 21: 9 kHz to 30 MHz, Mode 0, horizontal / vertical polarization

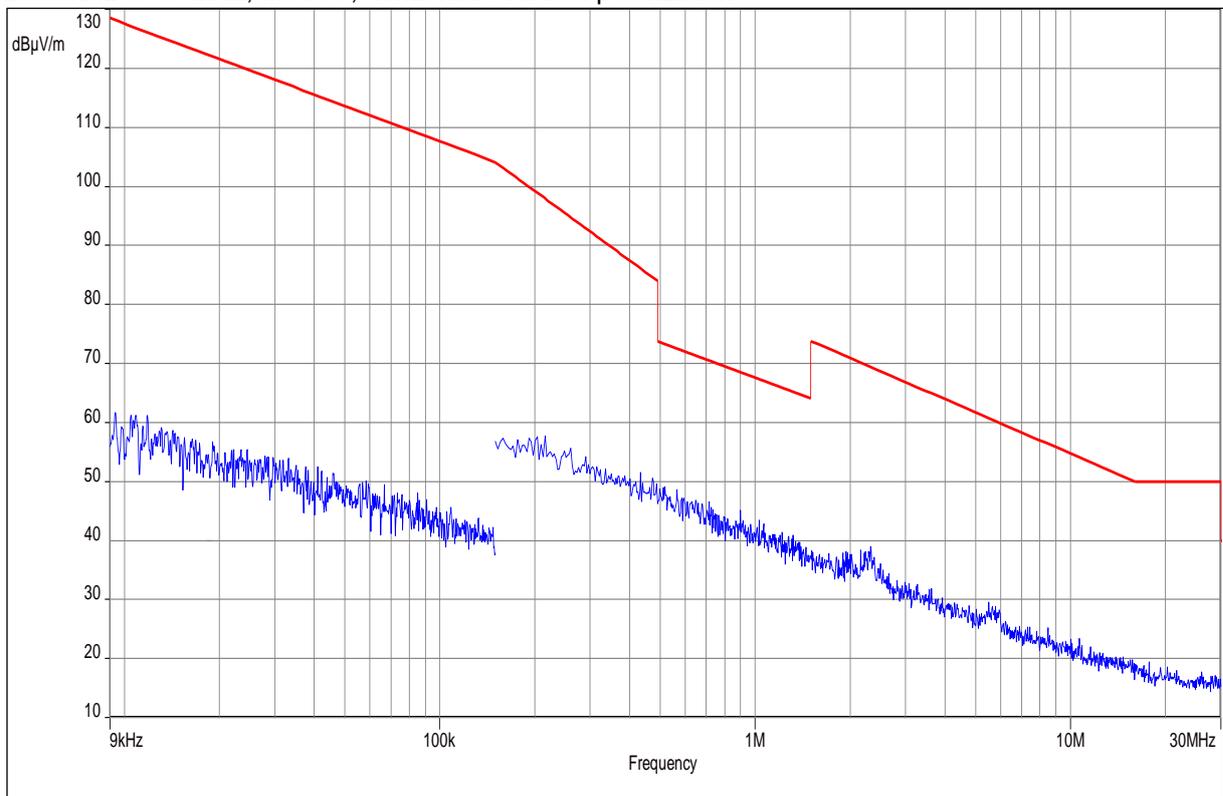

Plot 22: 30 MHz to 1 GHz, Mode 0, horizontal / vertical polarization


EUT:	AC 1000T
Serial number:	19234010
Test description:	FCC part 15 class B
Operating condition:	Mode 0
Operator name:	Kraus
Comment:	DC 24 V

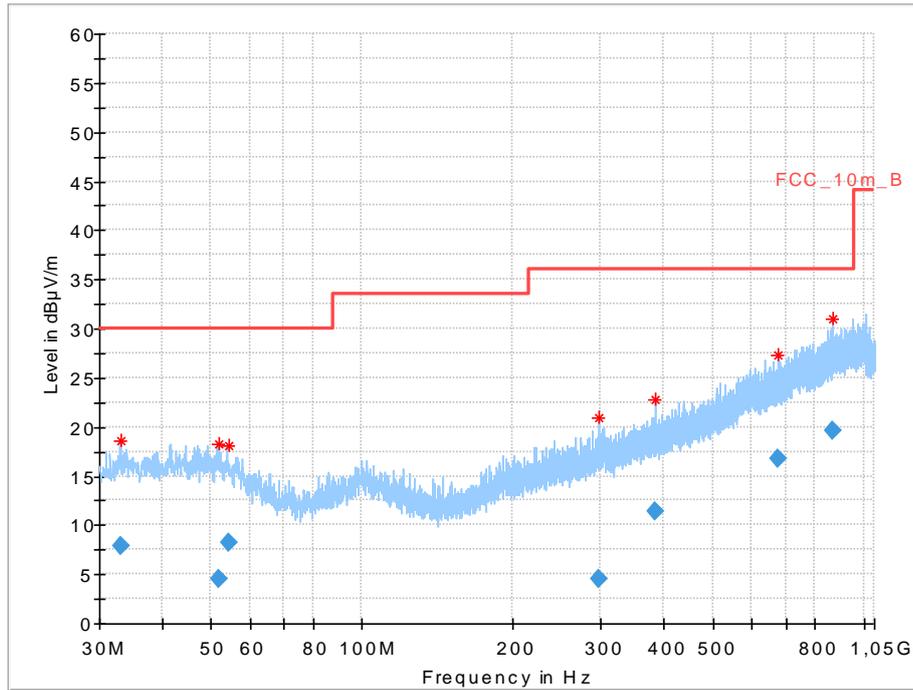

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
33.007	7.87	30.0	22.13	1000	120	144.0	V	106.0	13
51.857	4.59	30.0	25.41	1000	120	202.0	H	140.0	15
54.259	8.25	30.0	21.75	1000	120	400.0	V	286.0	14
296.784	4.59	36.0	31.41	1000	120	203.0	H	18.0	14
382.923	11.37	36.0	24.63	1000	120	200.0	V	184.0	16
676.415	16.84	36.0	19.16	1000	120	293.0	H	286.0	21
865.276	19.58	36.0	16.42	1000	120	100.0	H	298.0	23

Plot 23: 30 MHz to 1 GHz, Mode 2, horizontal / vertical polarization


EUT:	AC 1000T
Serial number:	19234010
Test description:	FCC part 15 class B
Operating condition:	Mode 2
Operator name:	Kraus
Comment:	DC 24 V

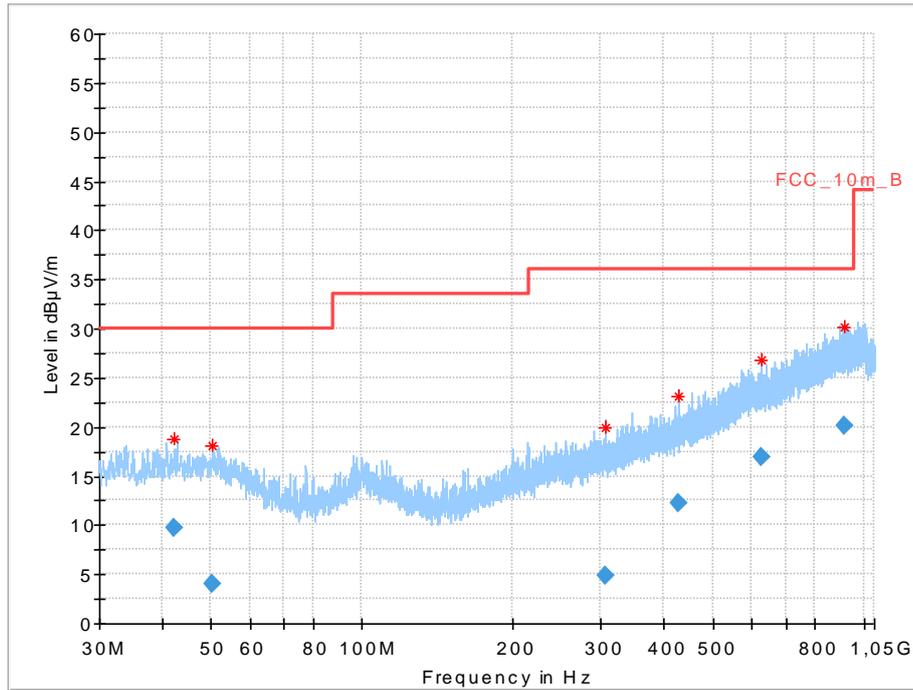

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
42.400	9.68	30.0	20.32	1000	120	200.0	V	94.0	15
50.325	4.00	30.0	26.00	1000	120	203.0	H	180.0	15
305.967	4.86	36.0	31.14	1000	120	343.0	H	263.0	15
427.481	12.31	36.0	23.69	1000	120	400.0	V	-45.0	17
625.754	16.97	36.0	19.03	1000	120	246.0	V	147.0	21
916.008	20.03	36.0	15.97	1000	120	100.0	V	254.0	24


Plot 24: 30 MHz to 1 GHz, Mode 3, horizontal / vertical polarization

EUT:	AC 1000T
Serial number:	19234010
Test description:	FCC part 15 class B
Operating condition:	Mode 3
Operator name:	Kraus
Comment:	DC 24 V

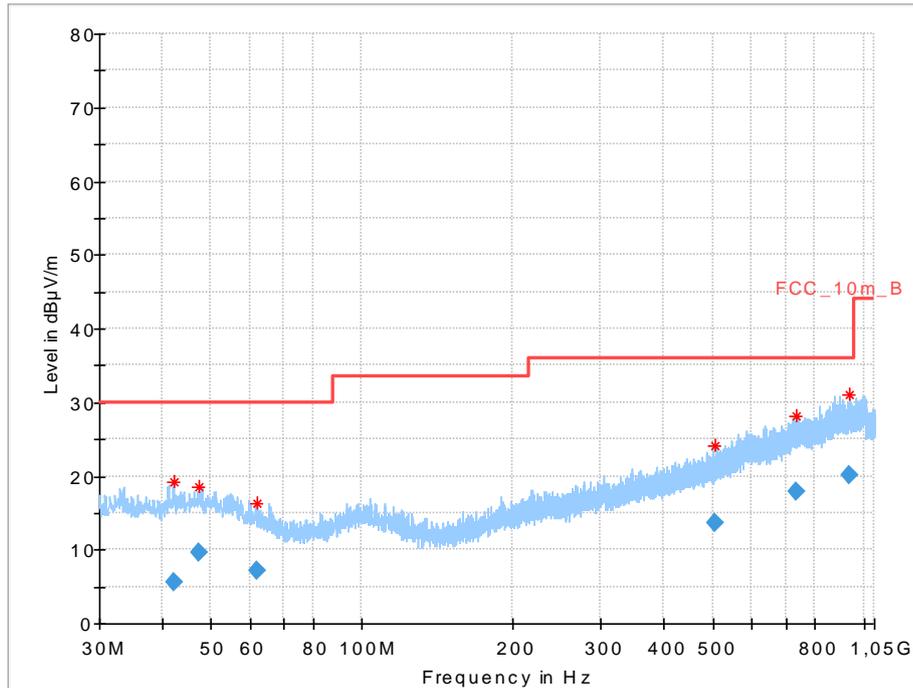


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
42.191	5.53	30.0	24.47	1000	120	170.0	V	349.0	15
47.548	9.56	30.0	20.44	1000	120	170.0	V	148.0	15
61.743	7.12	30.0	22.88	1000	120	170.0	H	349.0	13
503.657	13.73	36.0	22.27	1000	120	170.0	H	10.0	18
732.790	17.85	36.0	18.15	1000	120	170.0	H	329.0	22
935.285	20.15	36.0	15.85	1000	120	98.0	V	11.0	24


Plot 25: 1 GHz to 18 GHz, Mode 3, horizontal / vertical polarization

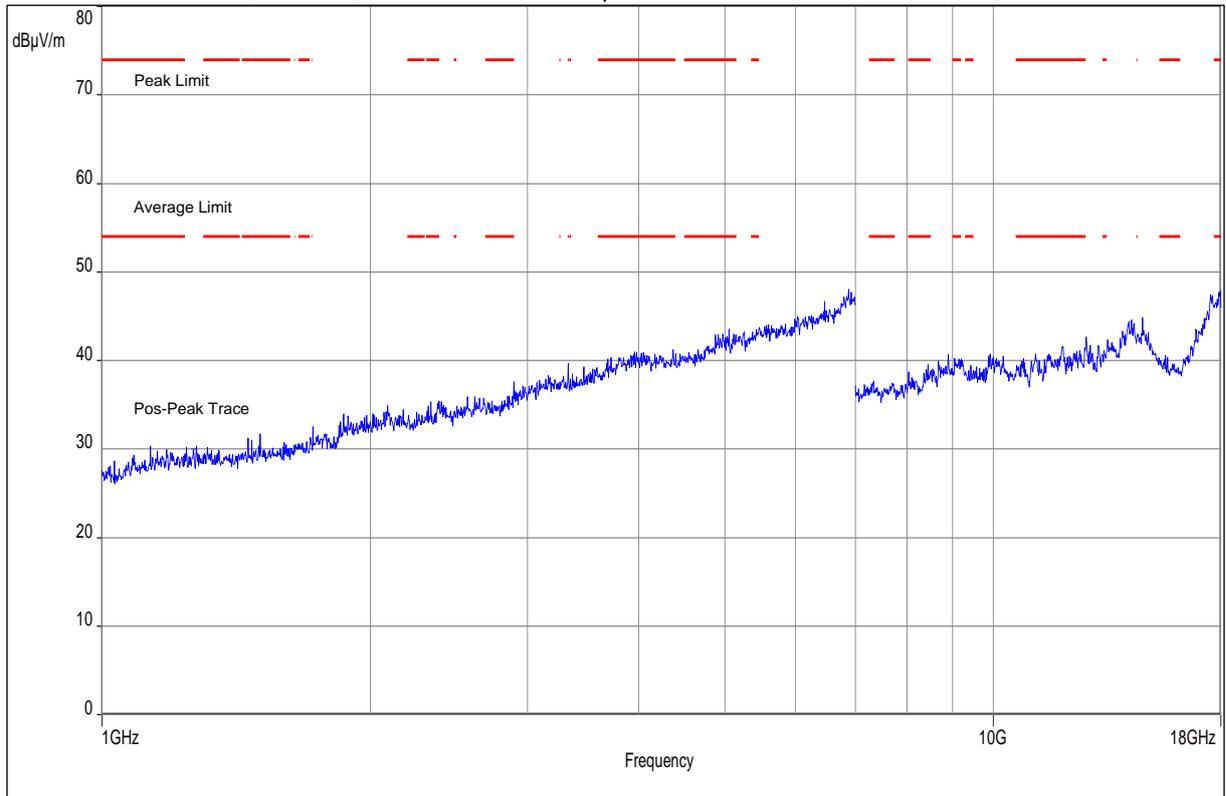


Plot 26: 1 GHz to 18 GHz, Mode 2, horizontal / vertical polarization

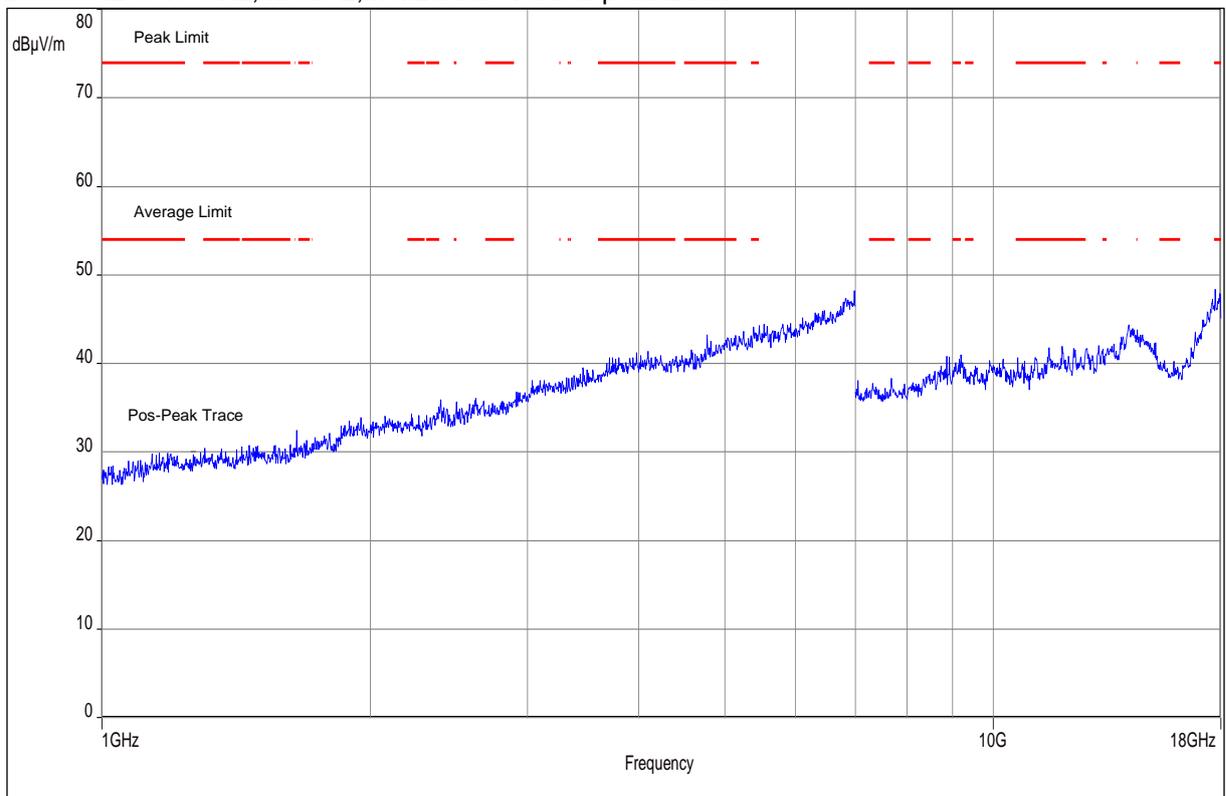


Plot 27: 1 GHz to 18 GHz, Mode 0, horizontal / vertical polarization

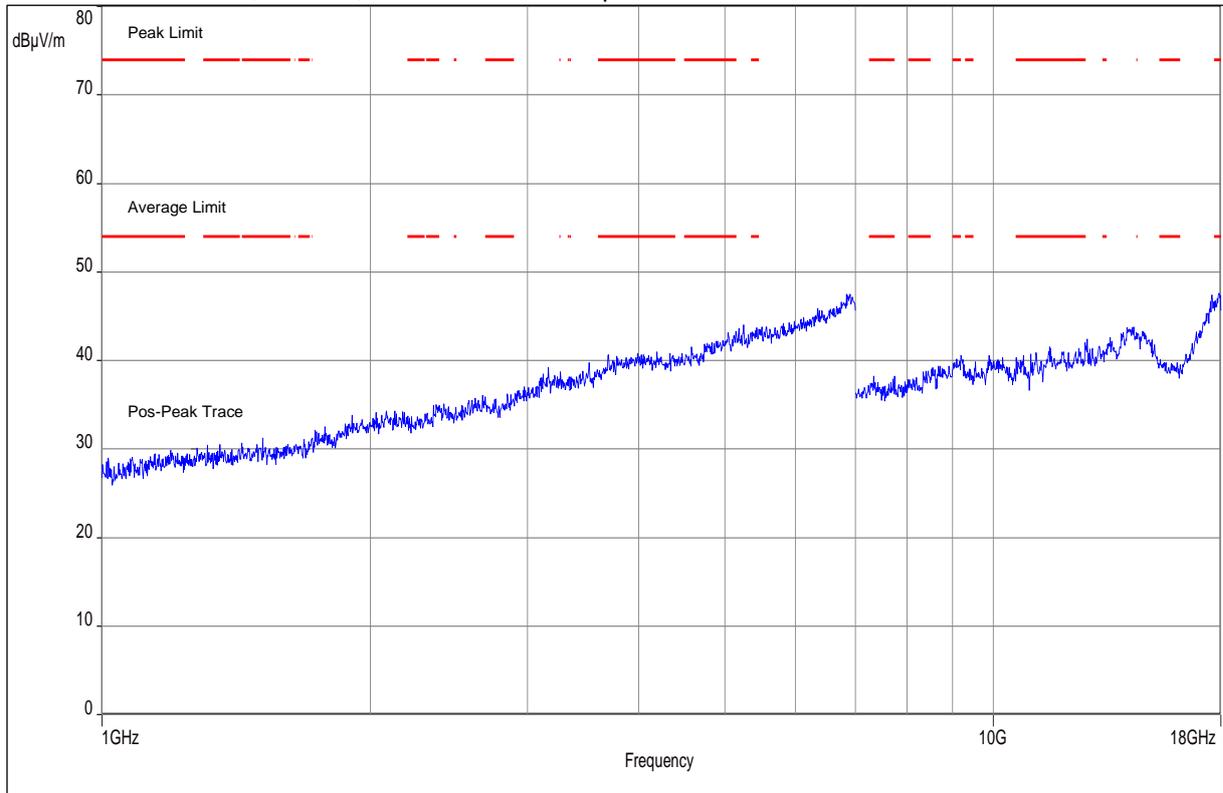

Plot 28: 18 GHz to 26.5 GHz, Valid for all Mode, horizontal / vertical polarization

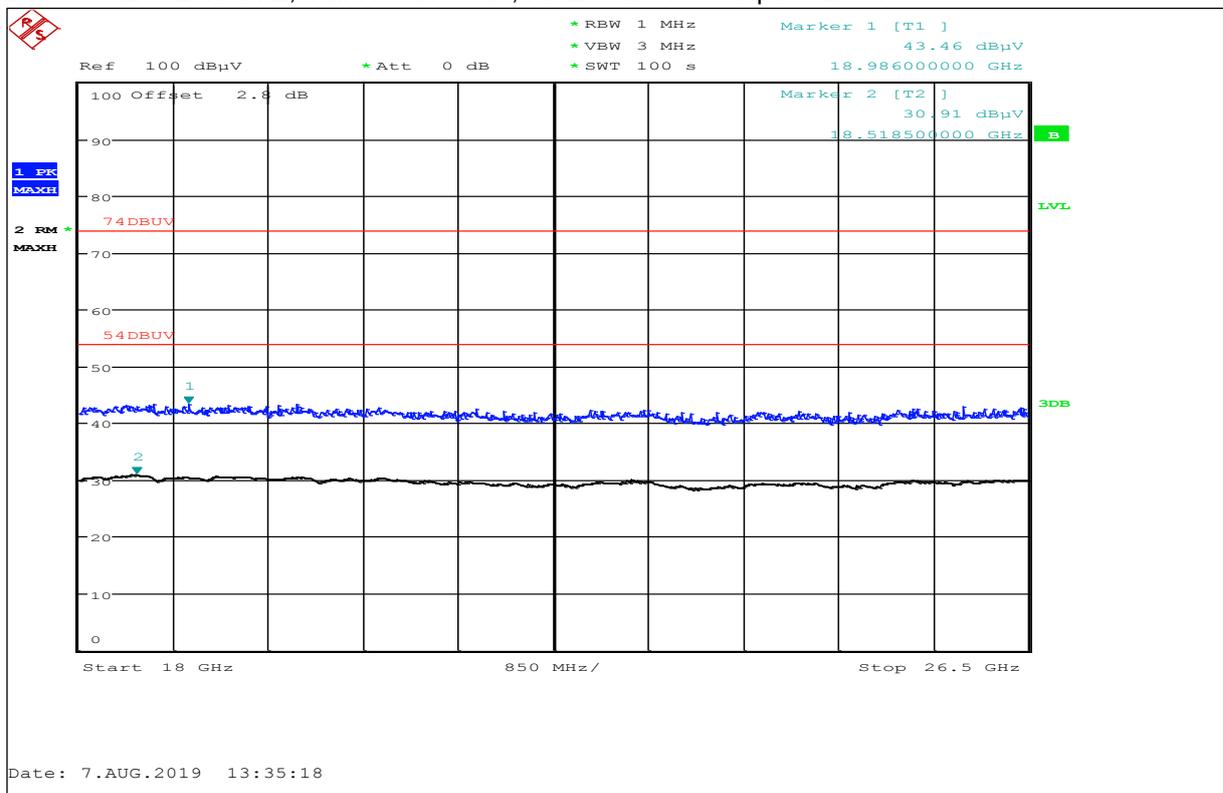


Plot 29: 26.5 GHz to 40 GHz, Valid for all Mode, horizontal / vertical polarization

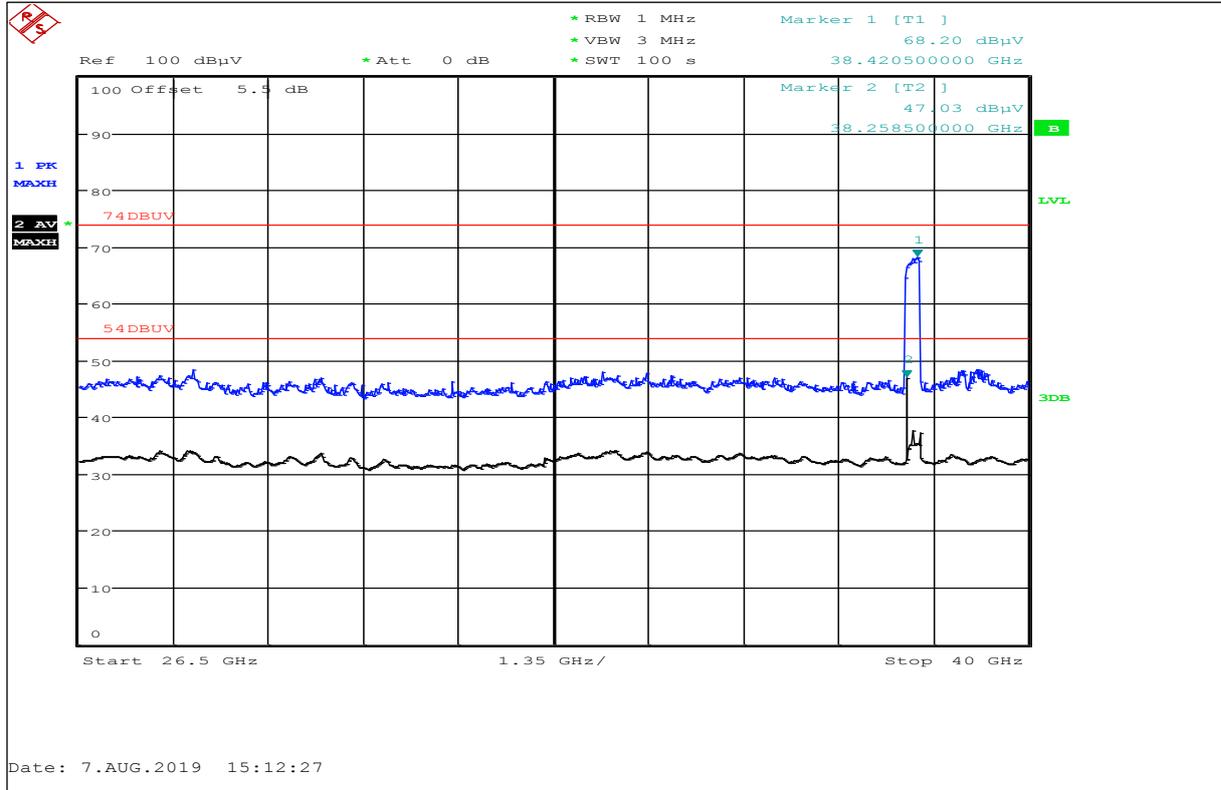


See next plots: plot 30, plot 31 and plot 32

Plot 30: 38 GHz, Mode 3, horizontal / vertical polarization

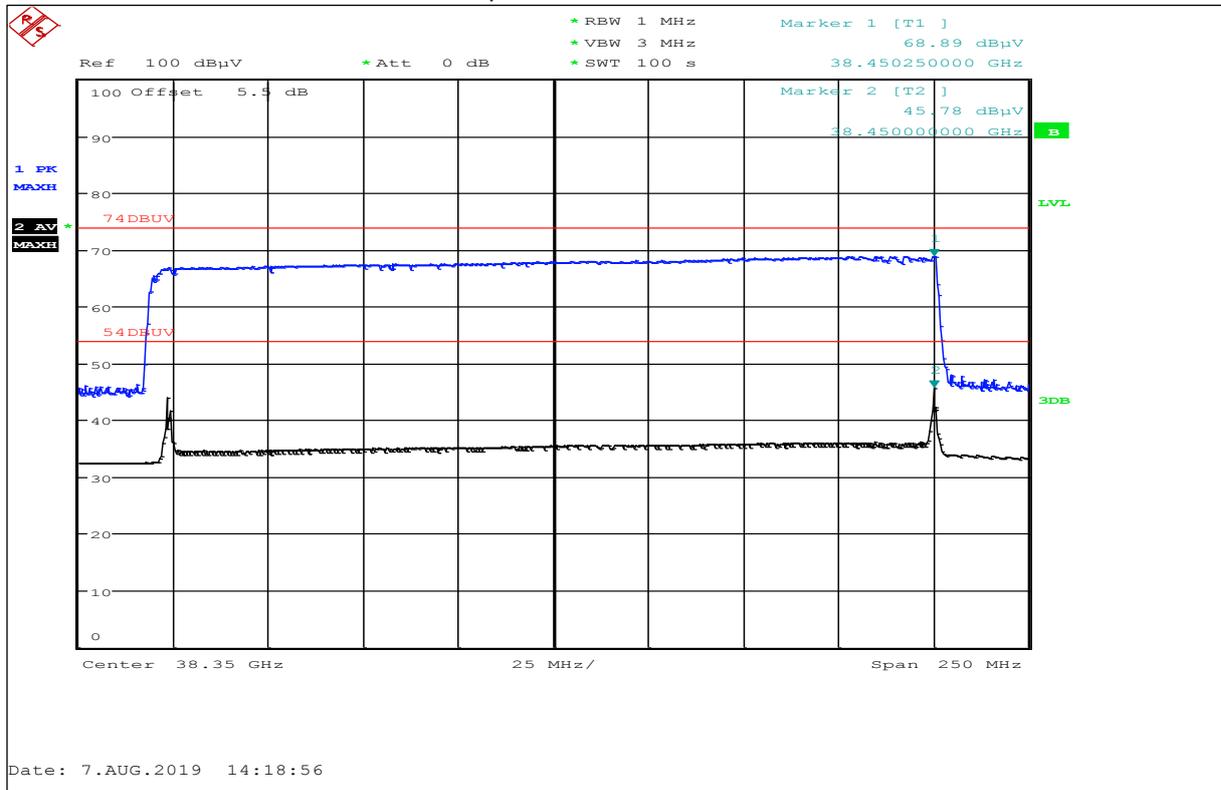


Peak Value: 68.89 dBµV/m (Limit 74 dBµV/m) / Average 45.78 dBµV/m (Limit 54 dBµV/m)

Plot 31: 38 GHz, Mode 2, horizontal / vertical polarization

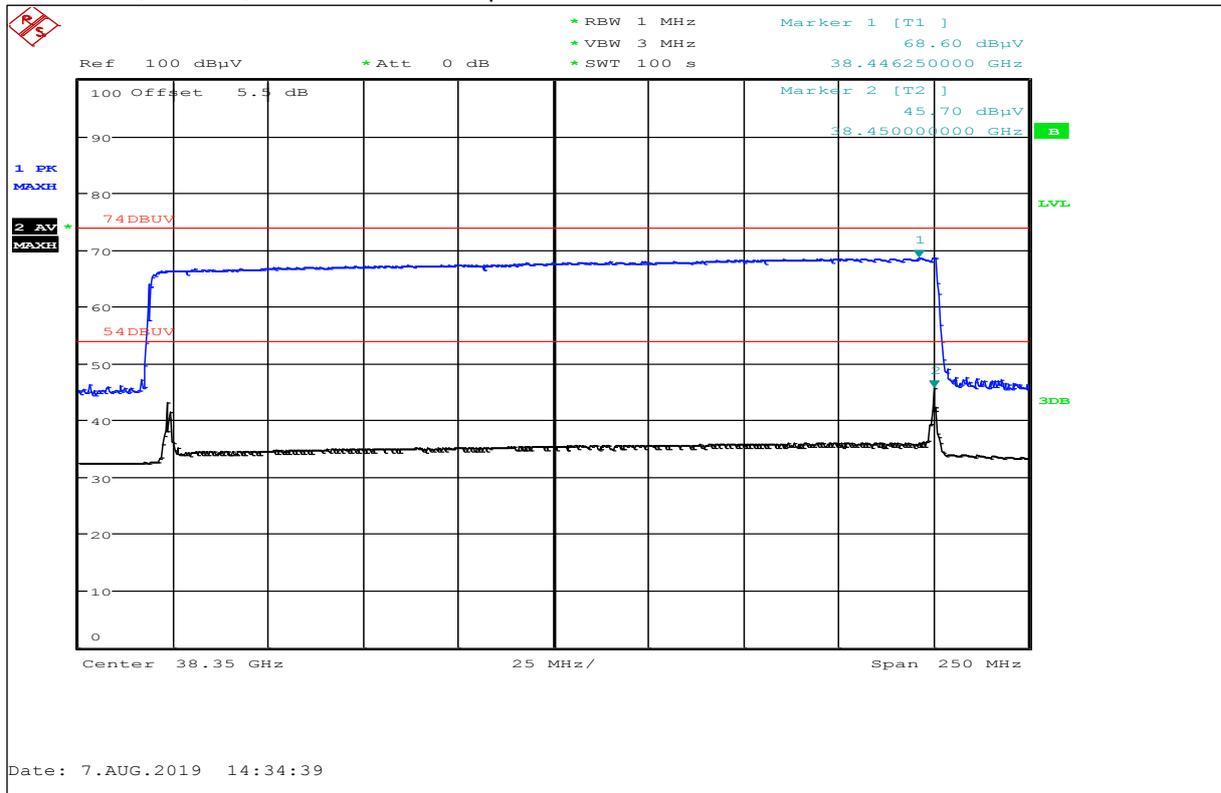


Peak Value: 68.60 dBµV/m (Limit 74 dBµV/m) / Average 45.70 dBµV/m (Limit 54 dBµV/m)

Plot 32: 38 GHz, Mode 0, horizontal / vertical polarization

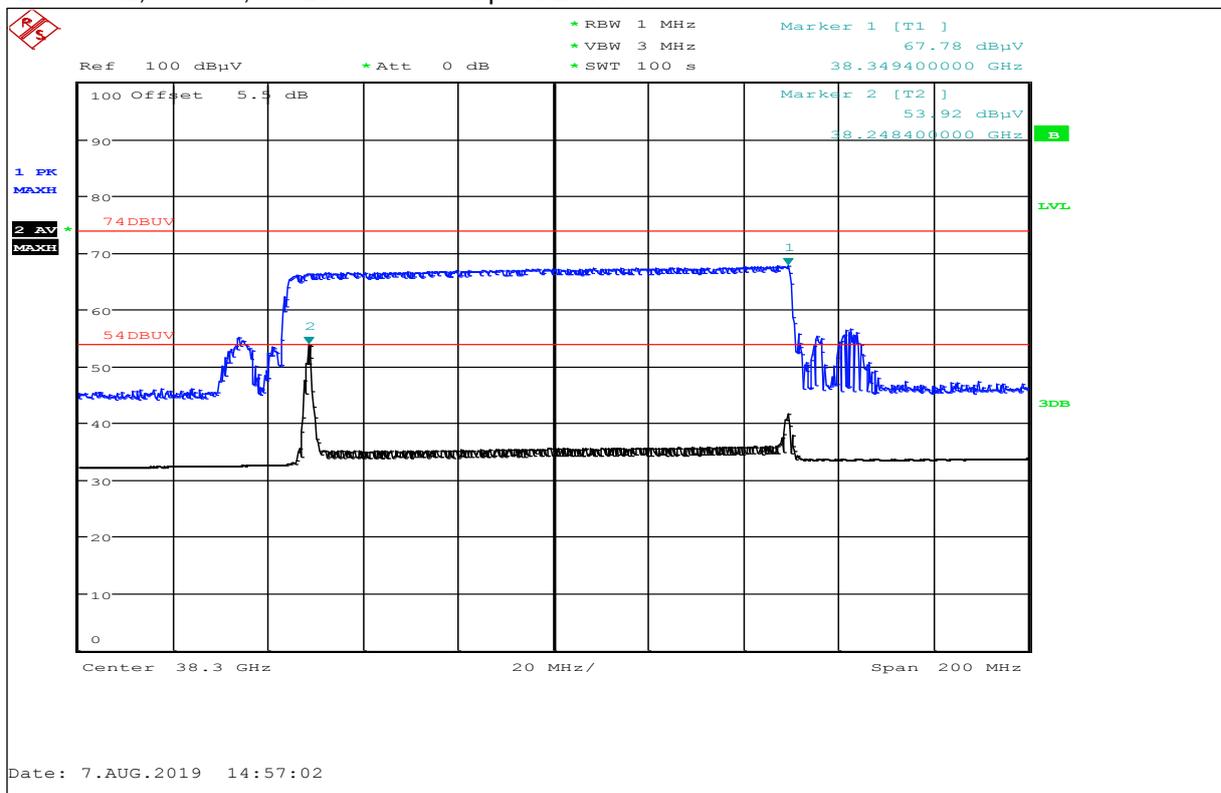


Peak Value: 67.78 dBµV/m (Limit 74 dBµV/m) / Average 53.92 dBµV/m (Limit 54 dBµV/m)

Plot 33: 40 GHz to 50 GHz, Valid for all Mode, horizontal / vertical polarization

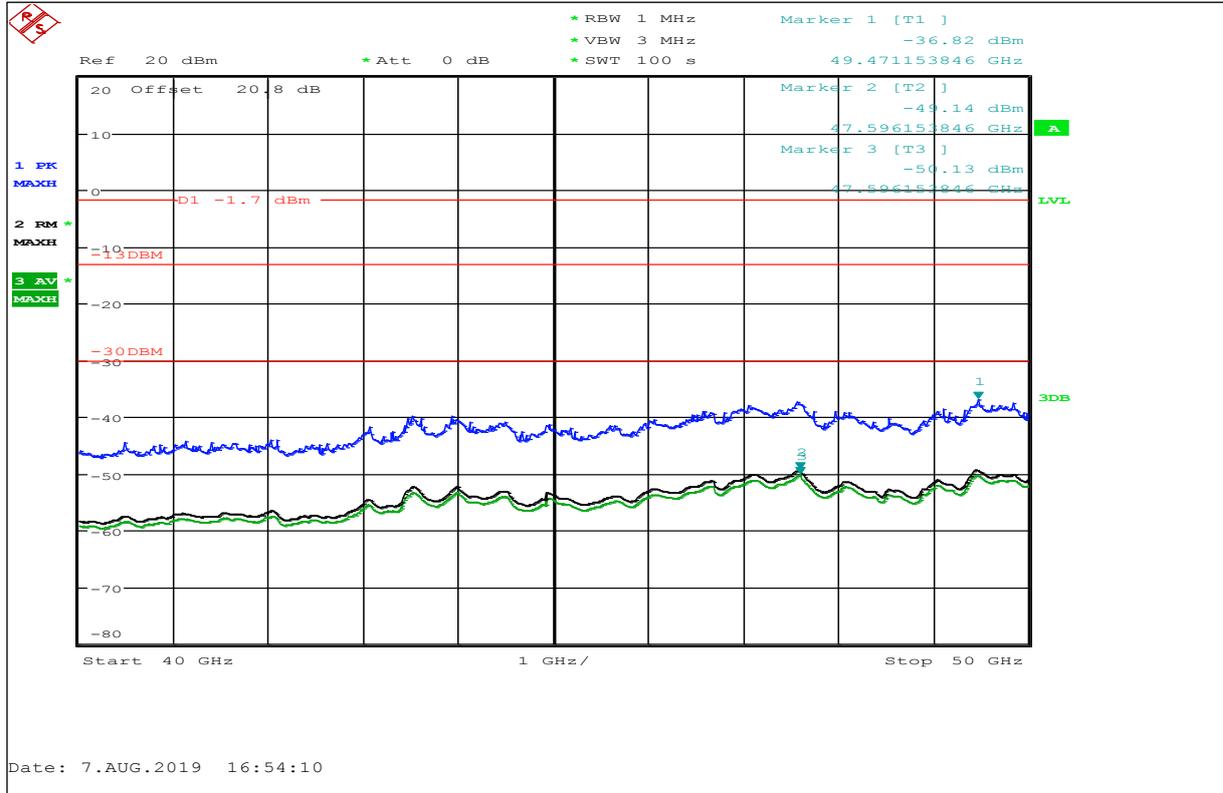


Average Value: -49.14 dBm (Limit -1.7 dBm) / Peak Value is just for information

Plot 34: 50 GHz to 75 GHz, Valid for all Mode, horizontal / vertical polarization

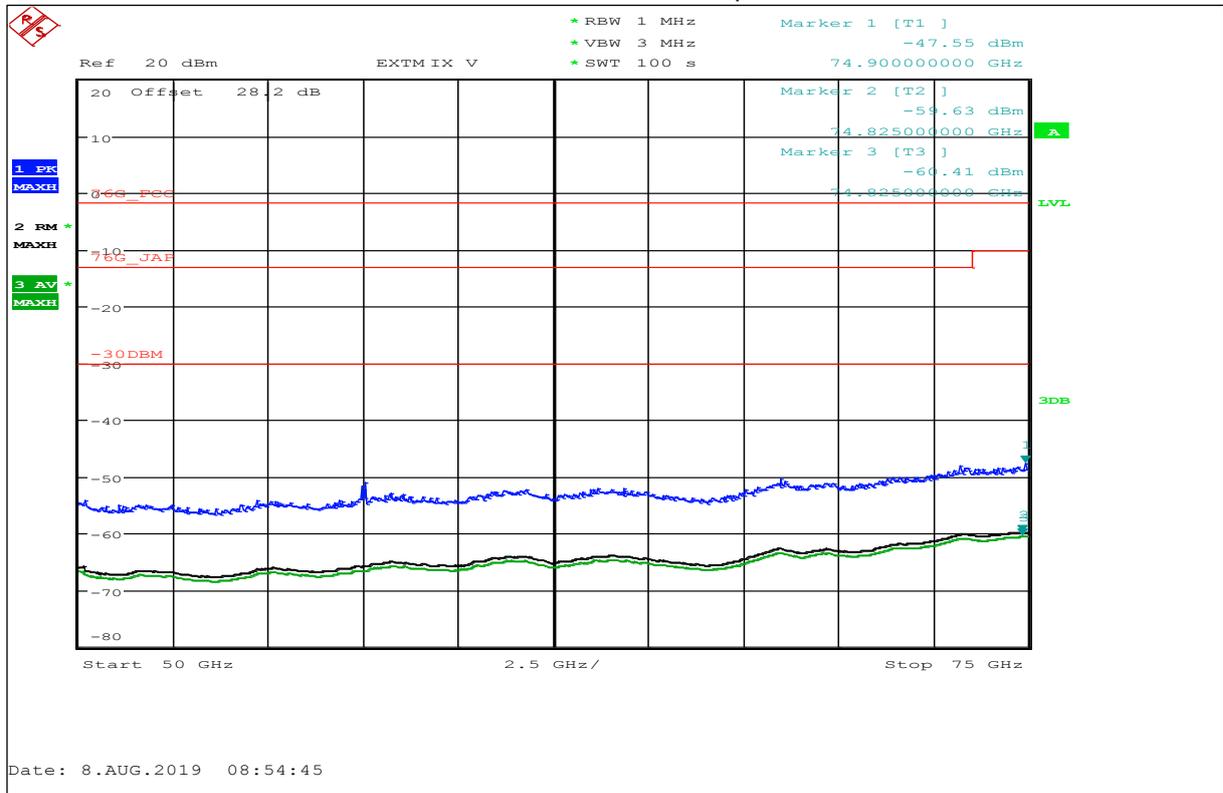


Average Value: -60.41 dBm (Limit -1.7 dBm) / Peak Value is just for information

Plot 35: 76 GHz to 77 GHz, Valid for all Mode, horizontal / vertical polarization

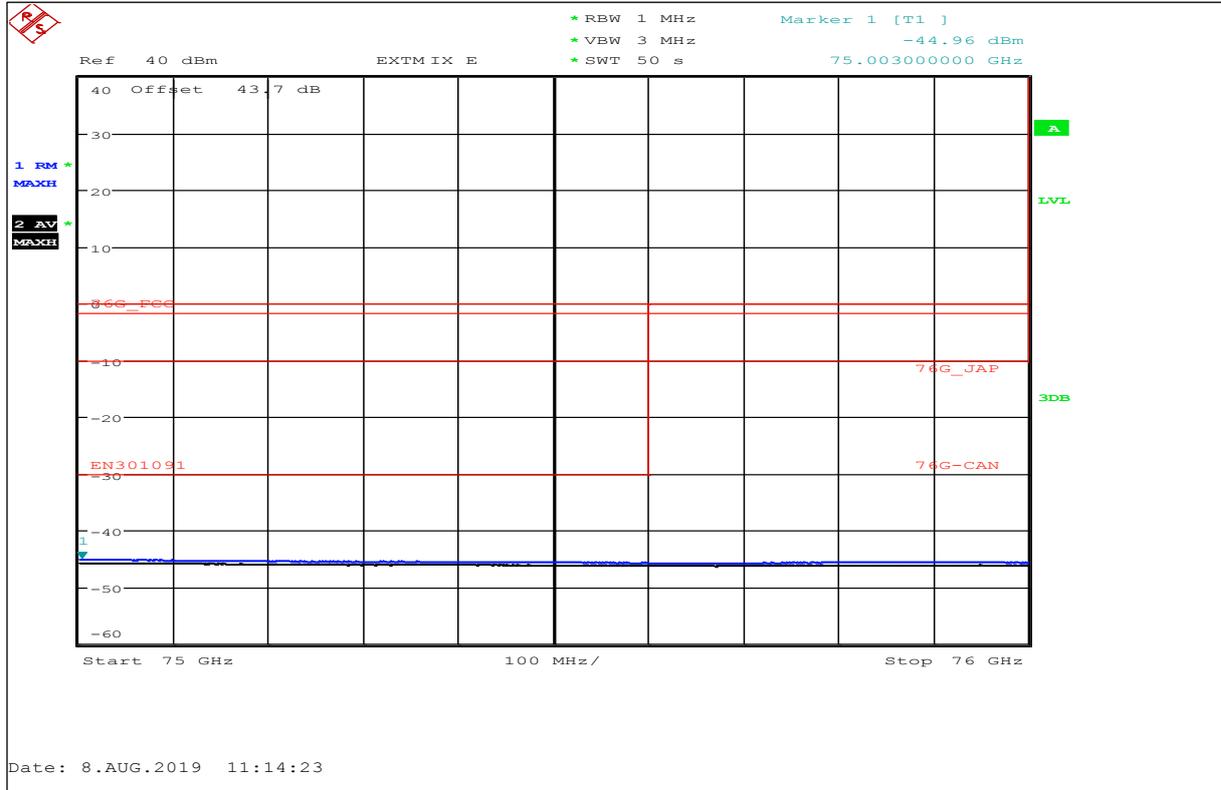


Average Value: -44.96 dBm (Limit -1.7 dBm)


Plot 36: OOB – Band edge, Mode 3, horizontal / vertical polarization

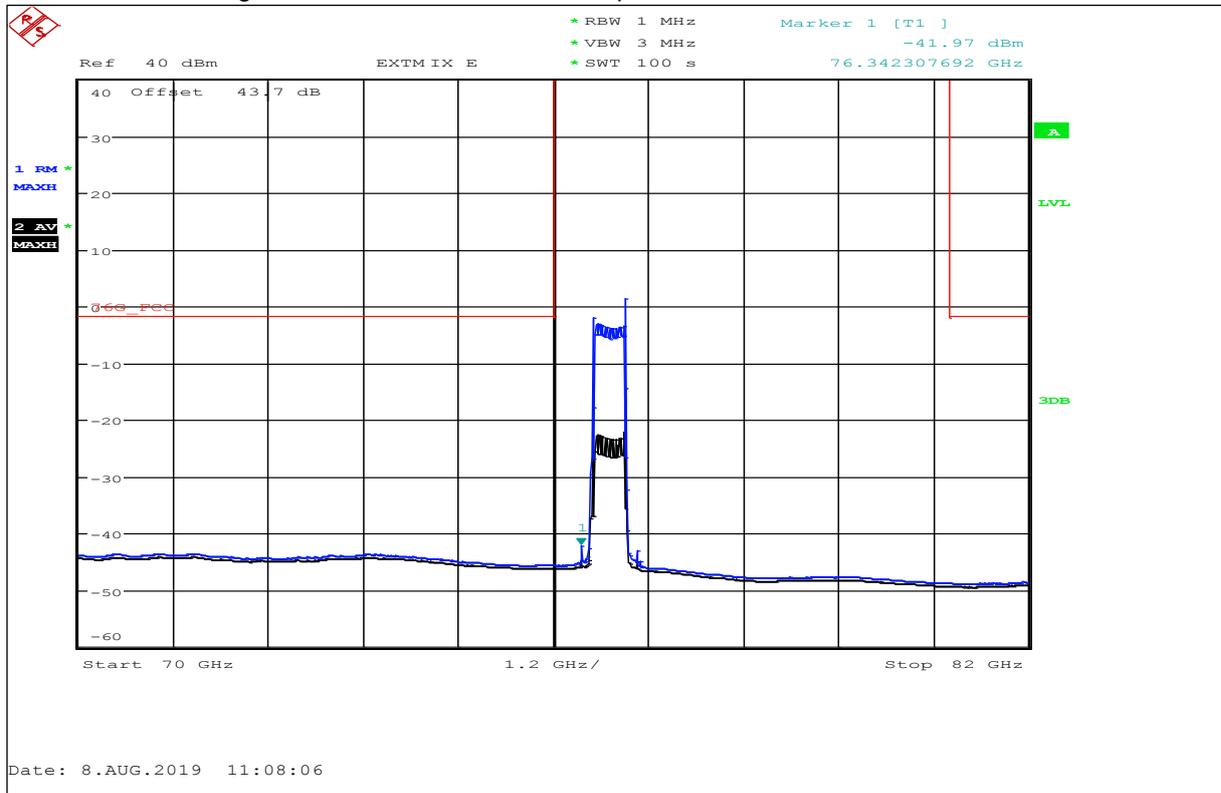


Plot 37: OOB – Band edge, horizontal / vertical polarization

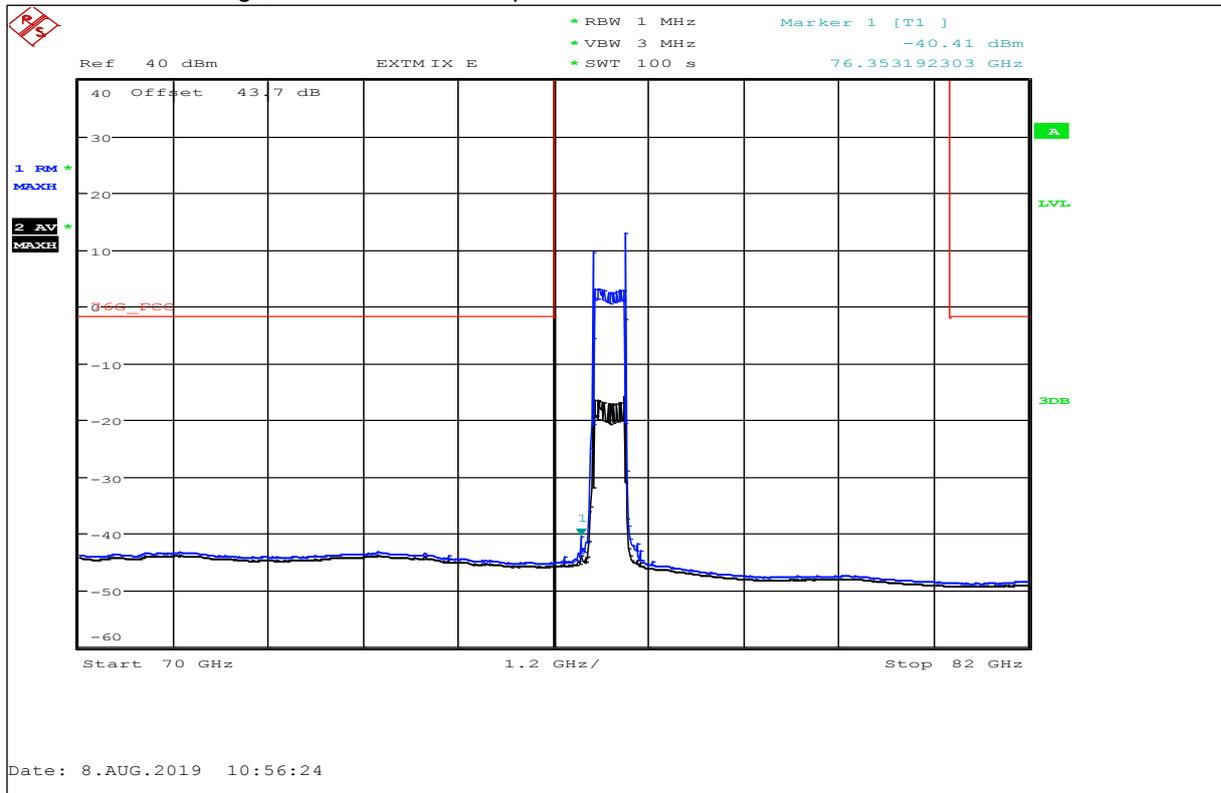

Plot 38: OOB – Band edge, Mode 0, horizontal / vertical polarization

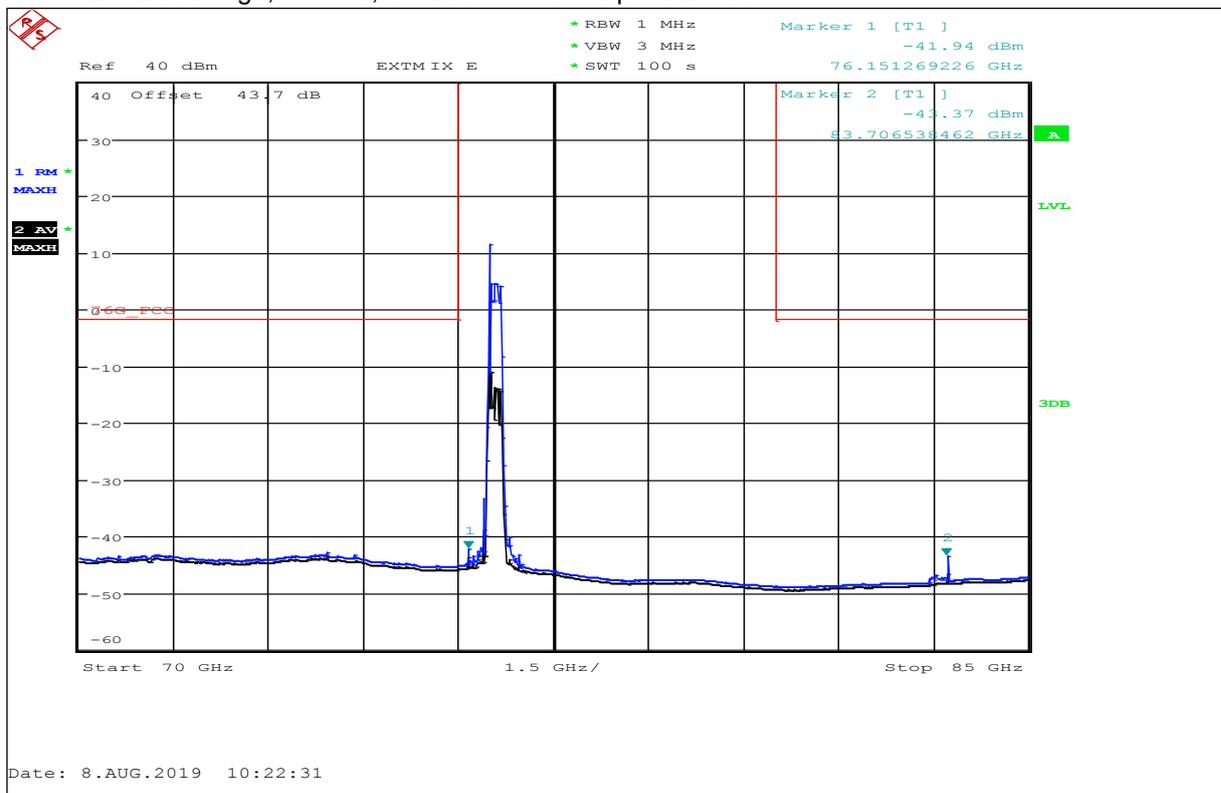


Plot 39: 77 GHz to 110 GHz, Valid for all Mode, horizontal / vertical polarization

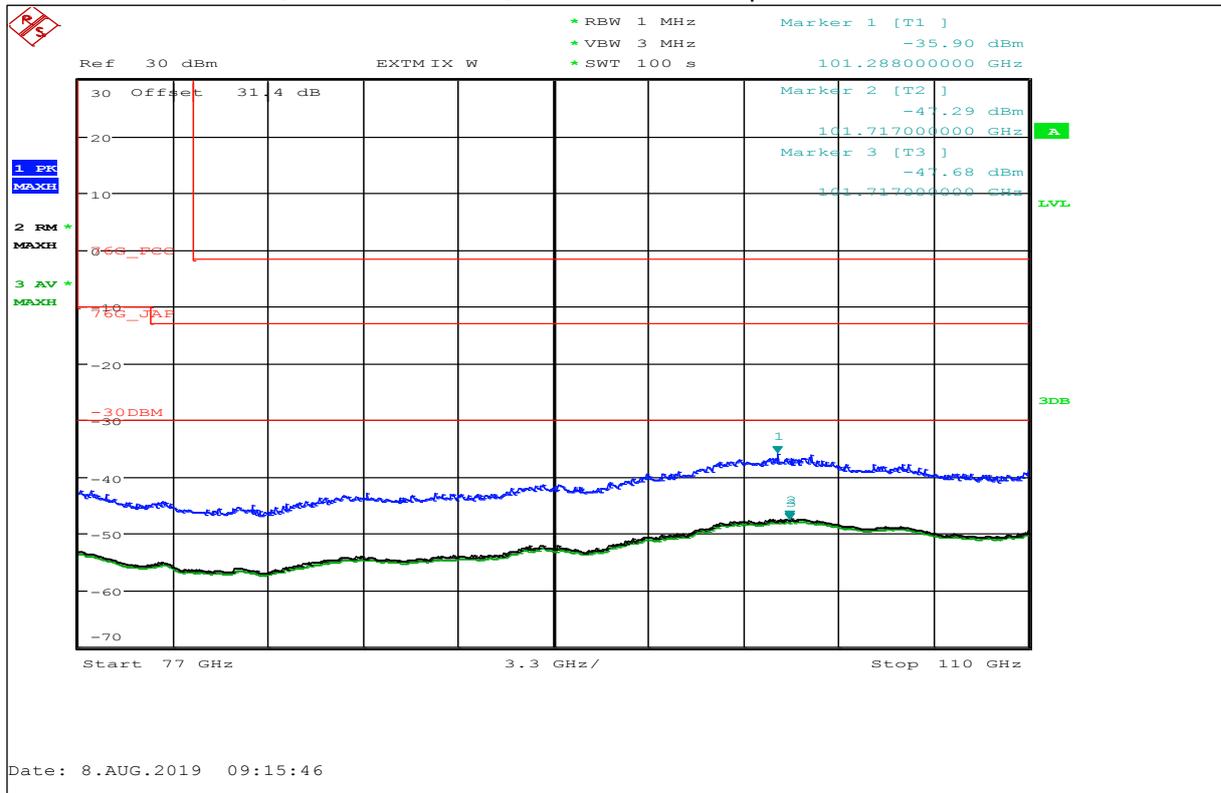


Average Value: -47.68 dBm (Limit -1.7 dBm) / Peak Value is just for information

Plot 40: 110 GHz to 170 GHz, Valid for all Mode, horizontal / vertical polarization

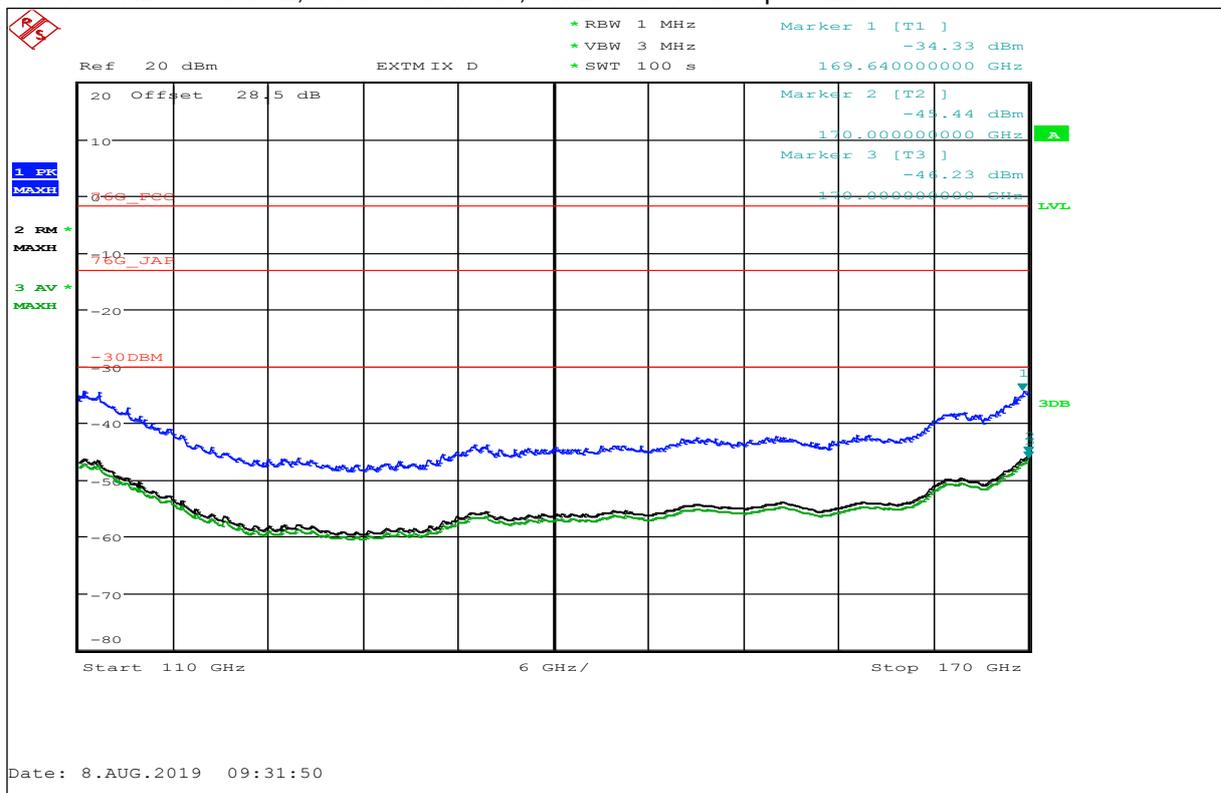


Average Value: -46.23 dBm (Limit -1.7 dBm) / Peak Value is just for information

Plot 41: 170 GHz to 220 GHz, Valid for all Mode, horizontal / vertical polarization

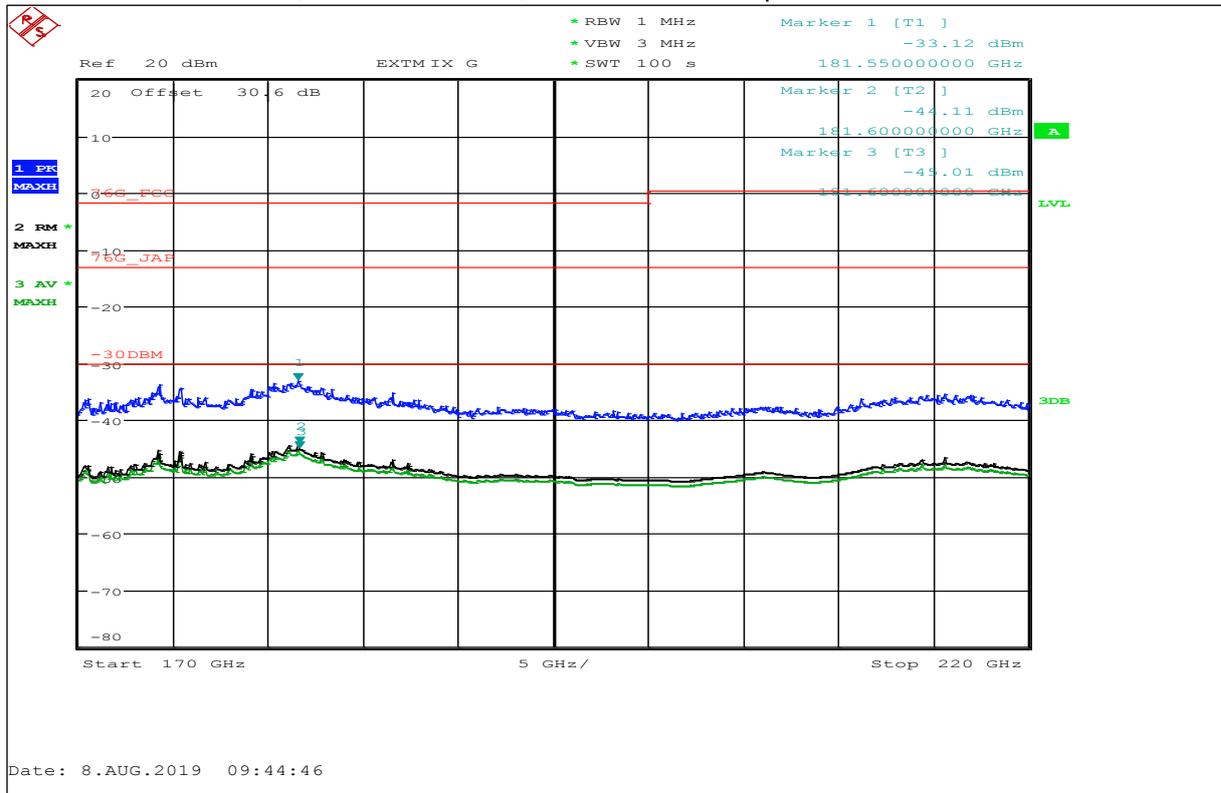

Average Value: -45.01 dBm (Limit -1.7 dBm / +0.5 dBm) / Peak Value is just for information

Plot 42: 220 GHz to 330 GHz, Valid for all Mode, horizontal / vertical polarization

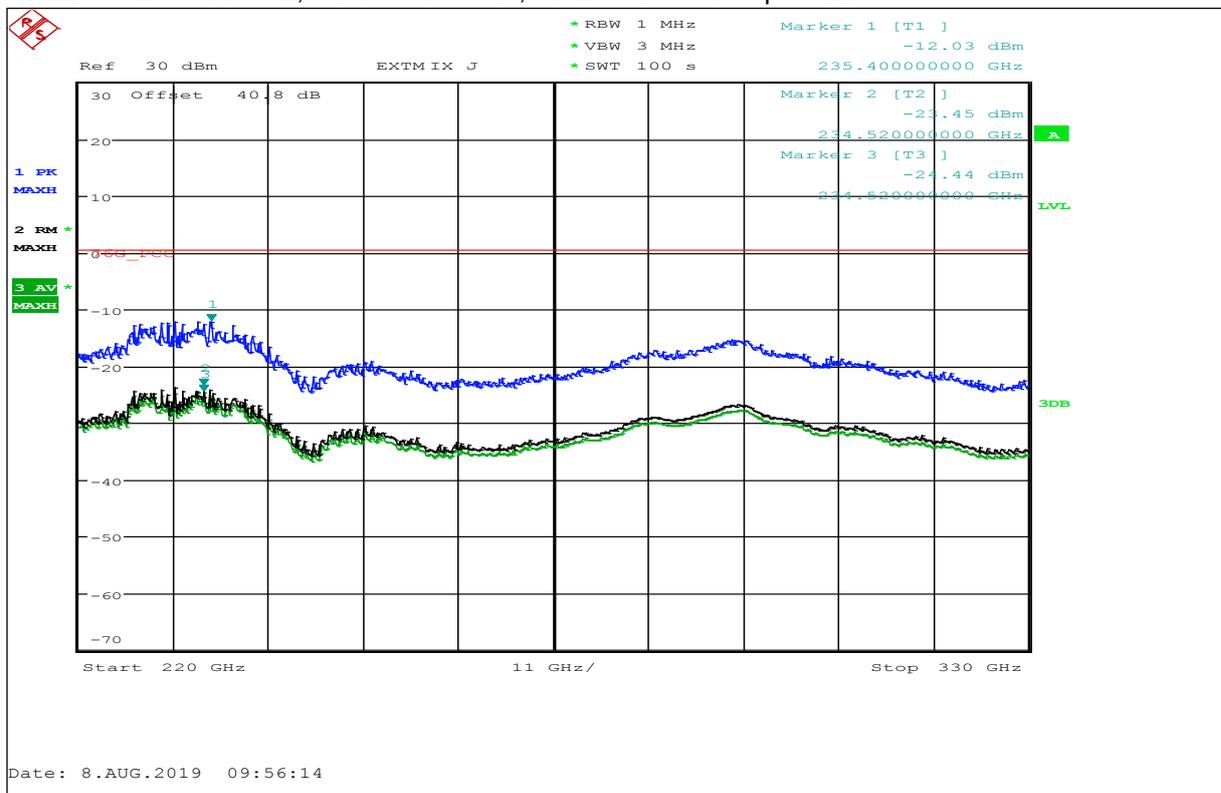

Average Value: -24.44 dBm (Limit +0.5 dBm) / Peak Value is just for information

10.5 Frequency stability

Description:

§95.3379 (b) Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range -20 to +50 degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.

Limits:

FCC §95.3379 (b) / §2.1055

Frequency range	f(lowest) > 76.0 GHz	f(highest) < 81.0 GHz
-----------------	----------------------	-----------------------

Measurement results:


Temperature variation

Mode	Temperature in °C	f _L in GHz	f _H in GHz
Worst case operation mode	-40	76.496 400	76.902 000
	-30	76.496 400	76.902 000
	-20	76.496 400	76.903 200
	-10	76.496 400	76.902 000
	0	76.495 200	76.902 000
	10	76.495 200	76.902 000
	20	76.495 200	76.902 000
	30	76.494 000	76.900 800
	40	76.494 000	76.900 800
	50	76.494 000	76.900 800
	85	76.494 000	76.900 800


Voltage variation

Voltage variation of rated input voltage	f _L in GHz	f _H in GHz
< 85 % of U	Voltage variation does not affect the radiated signal	
> 115 % of U		


Plot 43: OBW, -40 °C / V_{nom}

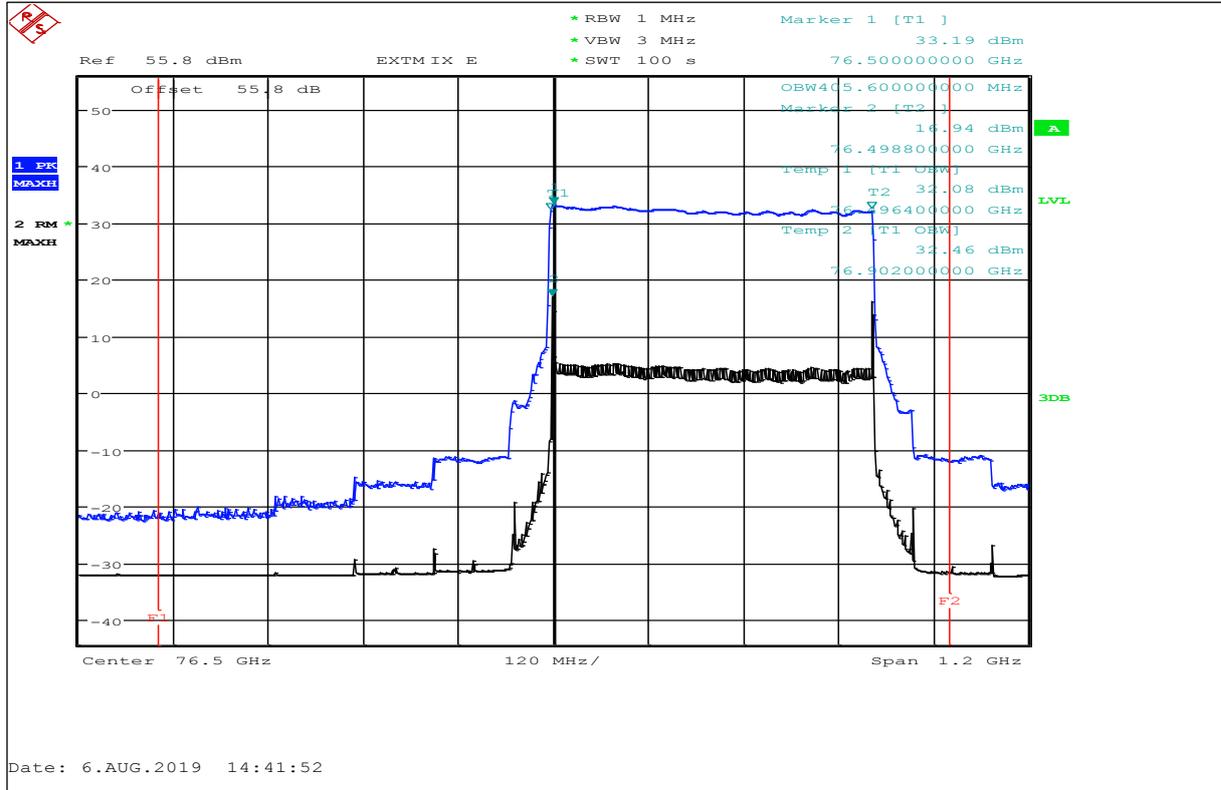


Plot 44: OBW, -30 °C / V_{nom}

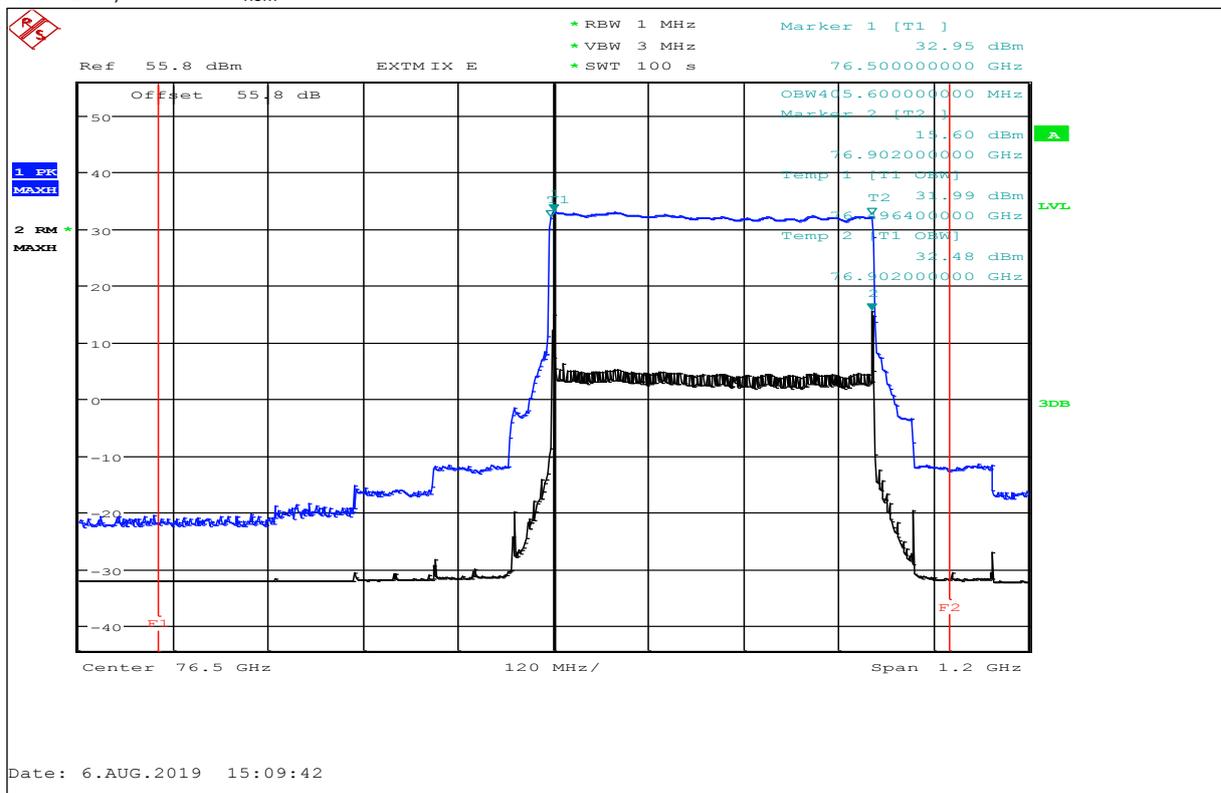


Plot 45: OBW, -20 °C / V_{nom}

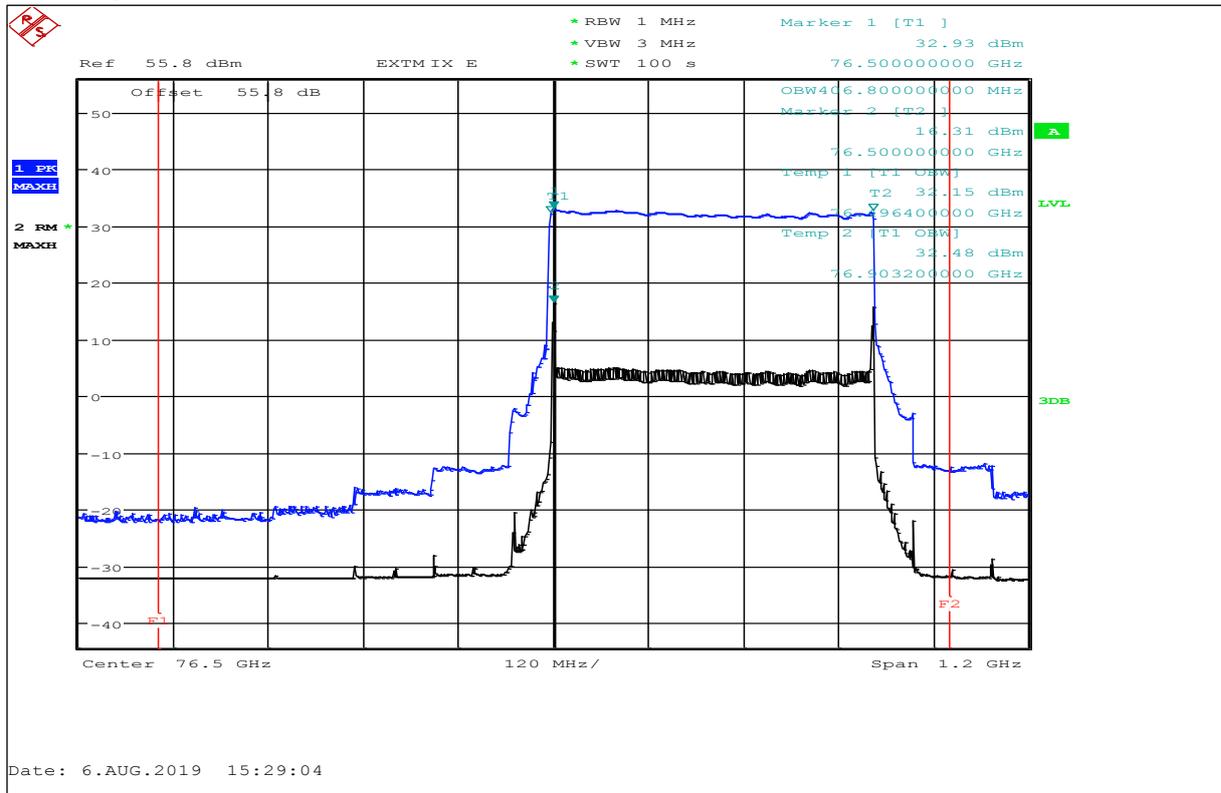


Plot 46: OBW, -10 °C / V_{nom}

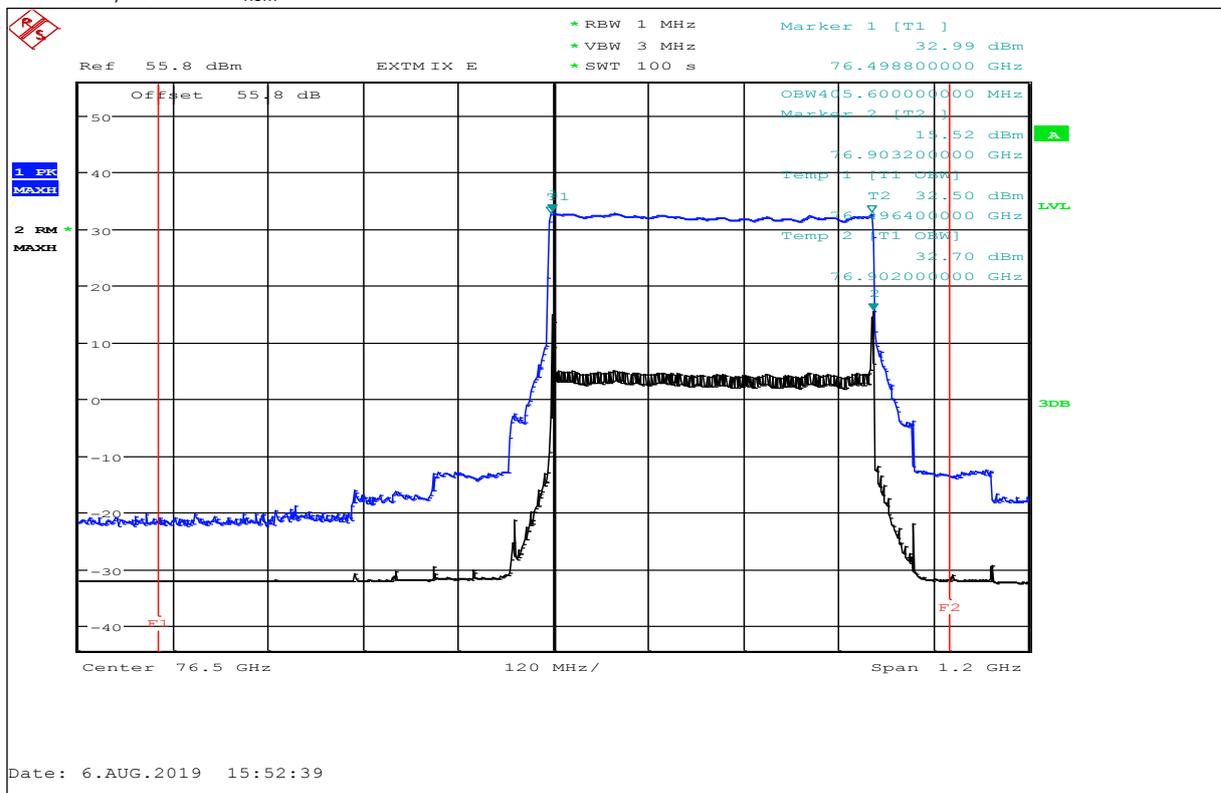


Plot 47: OBW, 0 °C / V_{nom}

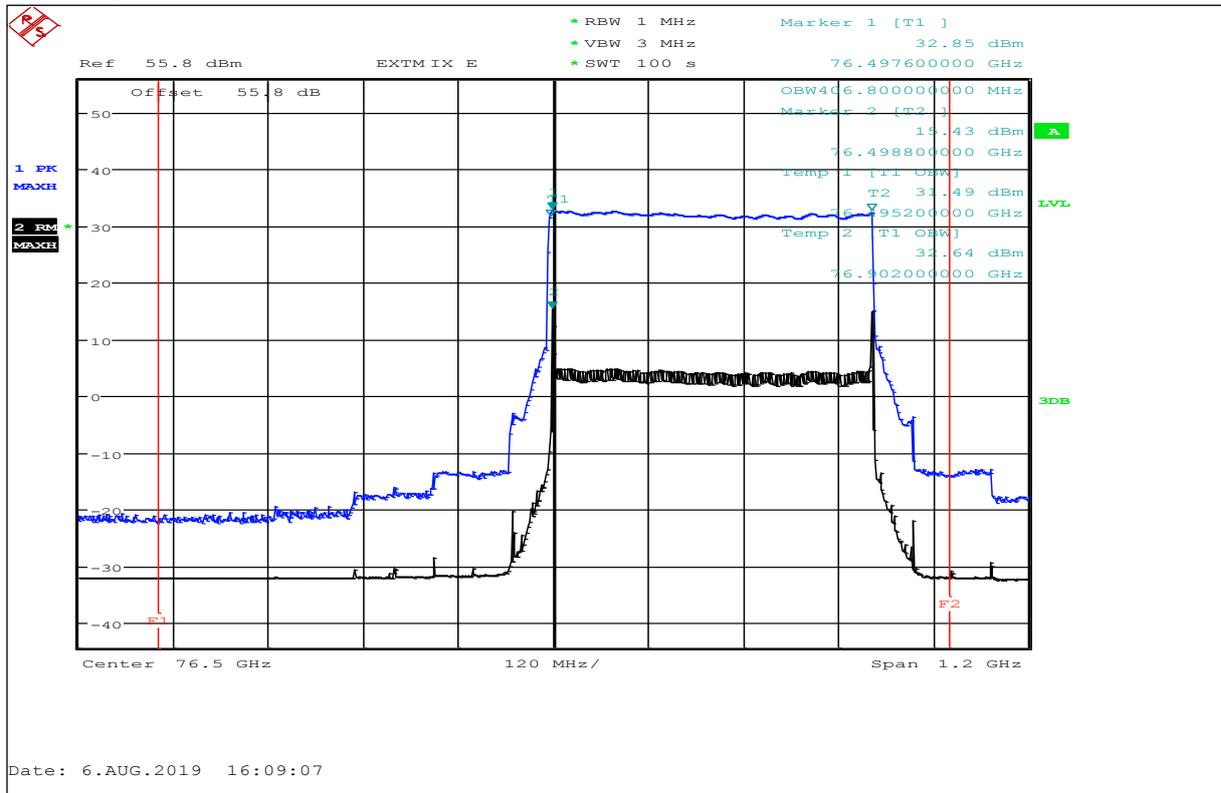


Plot 48: OBW, 10 °C / V_{nom}

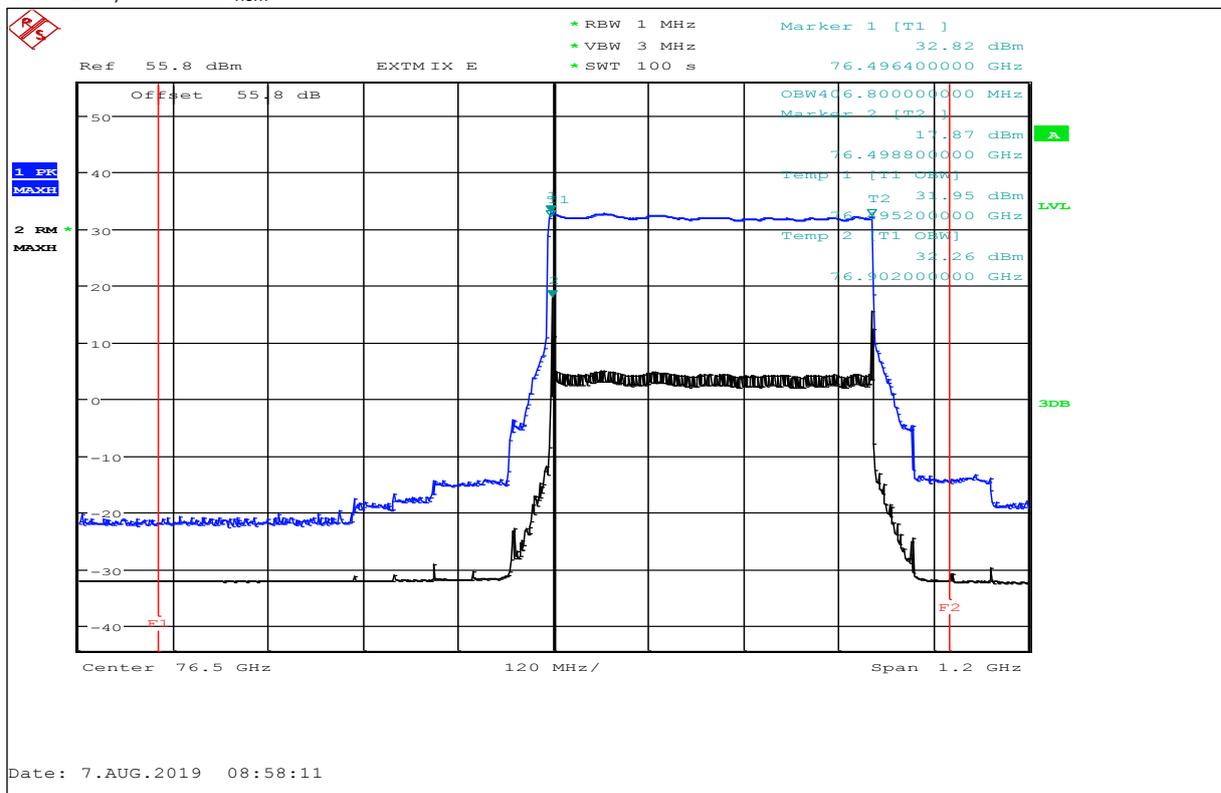


Plot 49: OBW, 20 °C / $V_{min-max}$

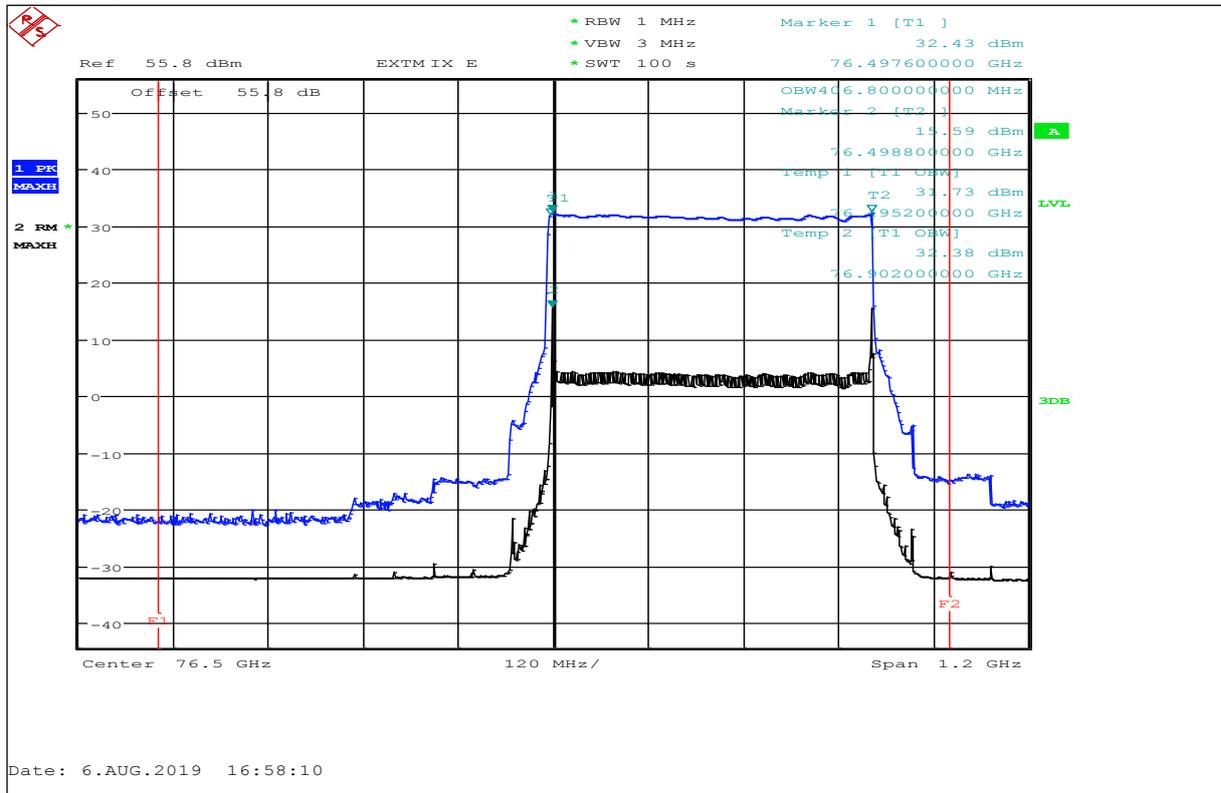


Plot 50: OBW, 30 °C / V_{nom}

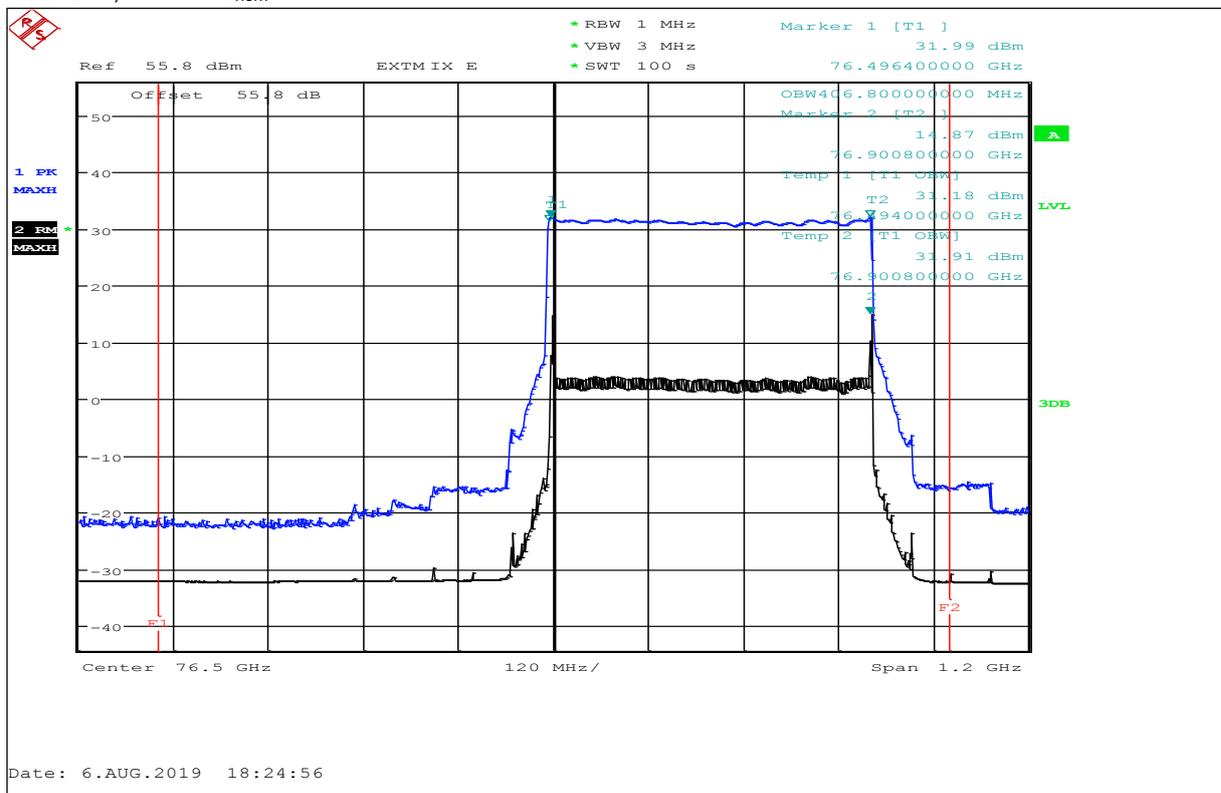


Plot 51: OBW, 40 °C / V_{nom}

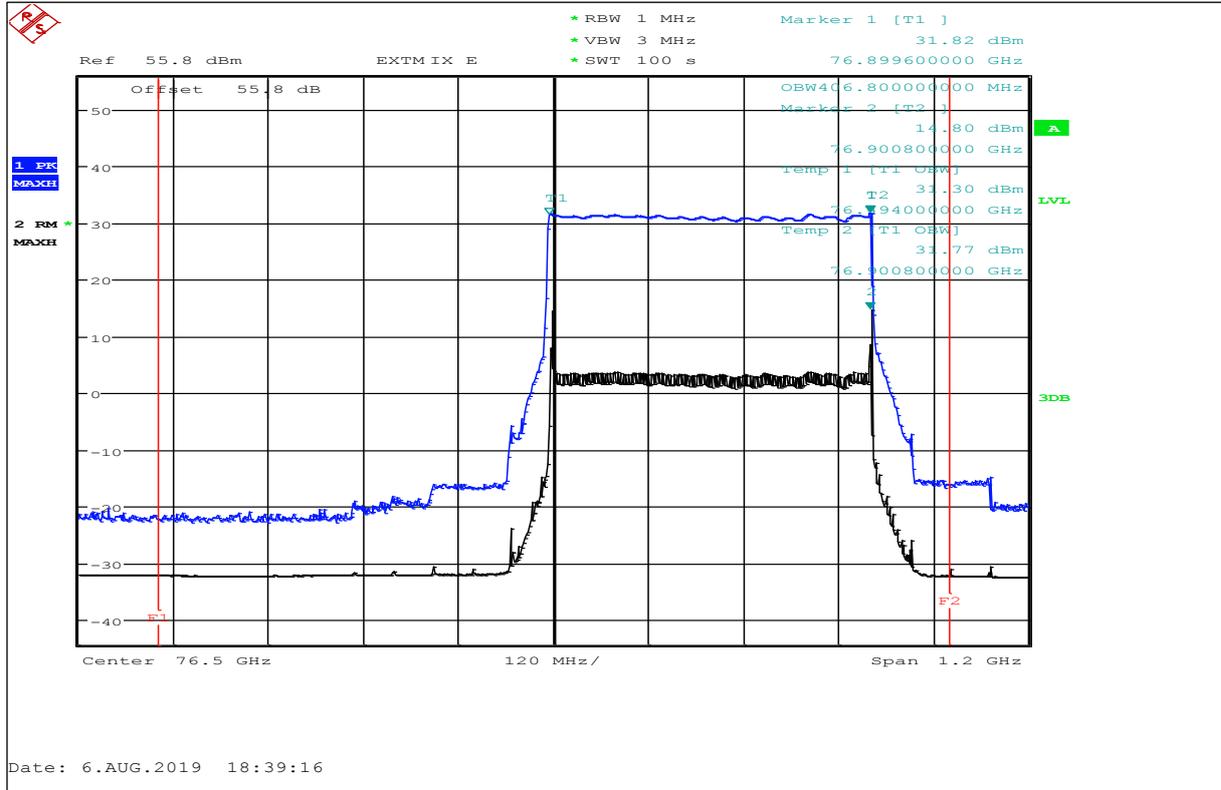

Plot 52: OBW, 50 °C / V_{nom}

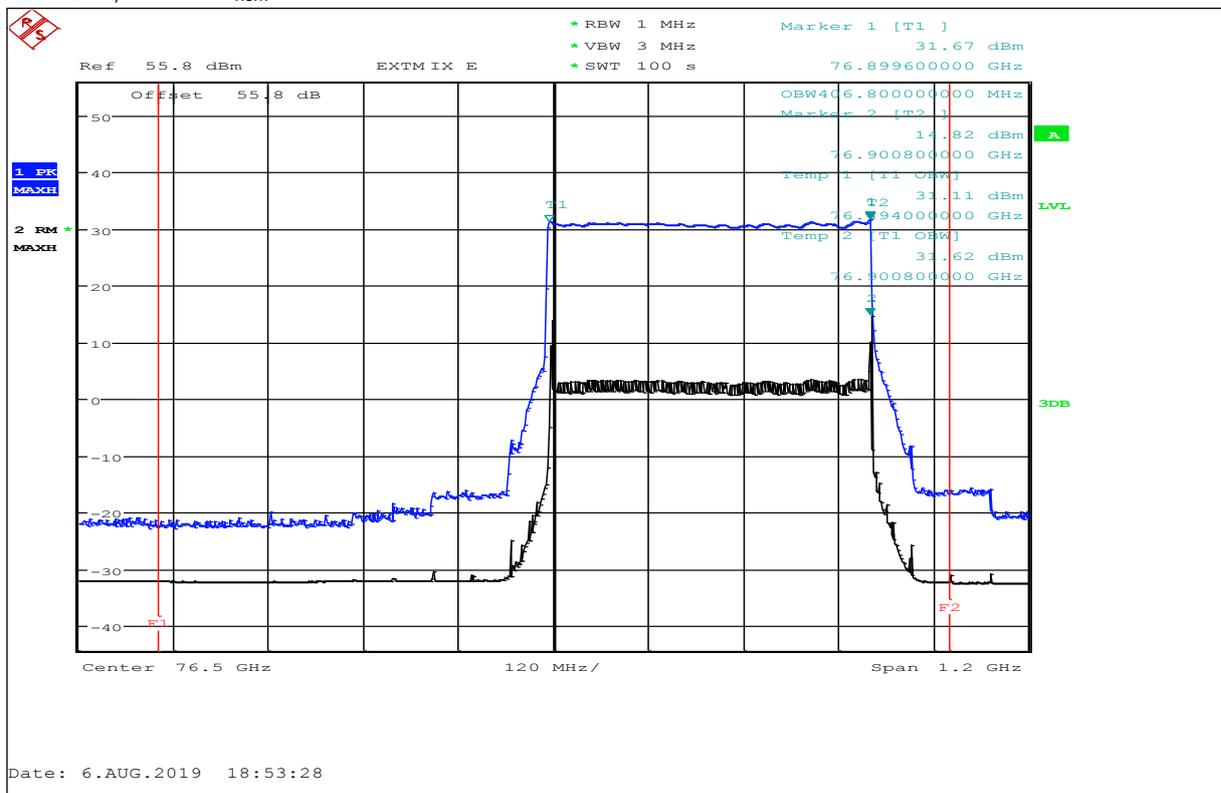

Plot 53: OBW, 85 °C / V_{nom}

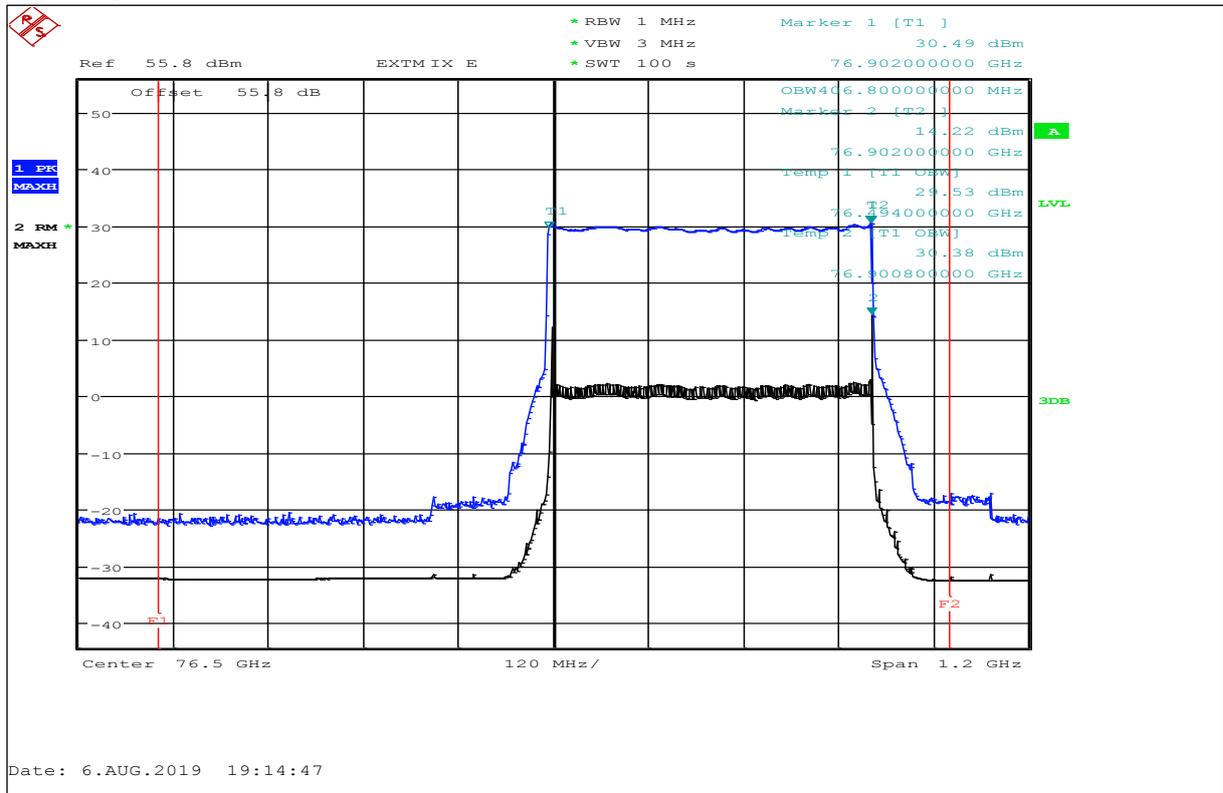

11 Glossary

EUT	Equipment under test
DUT	Device under test
UUT	Unit under test
GUE	GNSS User Equipment
ETSI	European Telecommunications Standards Institute
EN	European Standard
FCC	Federal Communications Commission
FCC ID	Company Identifier at FCC
IC	Industry Canada
PMN	Product marketing name
HMN	Host marketing name
HVIN	Hardware version identification number
FVIN	Firmware version identification number
EMC	Electromagnetic Compatibility
HW	Hardware
SW	Software
Inv. No.	Inventory number
S/N or SN	Serial number
C	Compliant
NC	Not compliant
NA	Not applicable
NP	Not performed
PP	Positive peak
QP	Quasi peak
AVG	Average
OC	Operating channel
OCW	Operating channel bandwidth
OBW	Occupied bandwidth
OOB	Out of band
DFS	Dynamic frequency selection
CAC	Channel availability check
OP	Occupancy period
NOP	Non occupancy period
DC	Duty cycle
PER	Packet error rate
CW	Clean wave
MC	Modulated carrier
WLAN	Wireless local area network
RLAN	Radio local area network
DSSS	Dynamic sequence spread spectrum
OFDM	Orthogonal frequency division multiplexing
FHSS	Frequency hopping spread spectrum
GNSS	Global Navigation Satellite System
C/N₀	Carrier to noise-density ratio, expressed in dB-Hz

12 Document history

Version	Applied changes	Date of release
-/-	Initial release - DRAFT	2019-09-03
-/-	Editorial changes based on applicant's remarks	2019-09-23

13 Accreditation Certificate – D-PL-12076-01-05

first page	last page
 <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition</p> <p>Accreditation </p> <p>The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory CTC advanced GmbH Untertürkheimer Straße 6-10, 66117 Saarbrücken is competent under the terms of DIN EN ISO/IEC 17025:2005 to carry out tests in the following fields: Telecommunication (FCC Requirements)</p> <p>The accreditation certificate shall only apply in connection with the notice of accreditation of 11.01.2019 with the accreditation number D-PL-12076-01 and is valid until 21.04.2021. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 5 pages.</p> <p>Registration number of the certificate: D-PL-12076-01-05</p> <p>Frankfurt am Main, 11.01.2019  Dipl.-Ing. Uwe Zimmermann Head of Division</p> <p><small>See notes covered</small></p>	<p>Deutsche Akkreditierungsstelle GmbH</p> <p>Office Berlin Spittelmarkt 10 10117 Berlin</p> <p>Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main</p> <p>Office Braunschweig Bundesallee 100 38116 Braunschweig</p> <p>The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAkkS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.</p> <p>No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAkkS.</p> <p>The accreditation was granted pursuant to the Act on the Accreditation Body (AAkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAkkS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.</p> <p>The up-to-date state of membership can be retrieved from the following websites: EA: www.european-accreditation.org ILAC: www.ilac.org IAF: www.iaf.nu</p>

Note: The current certificate annex is published on the website (link see below) of the Accreditation Body DAkkS or may be received by CTC advanced GmbH on request

<https://www.dakks.de/as/ast/d/D-PL-12076-01-05.pdf>

END OF TEST REPORT