



IMQ S.p.A. - Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 - info@imq.it - www.imq.it

TEST REPORT

No. ARSO00149/2

performed in accordance with

FCC Rules: Code of Federal Regulations (CFR) no. 47
Part 15 Subpart C Section 15.249

PRODUCT	RF Module
MODEL(s) TESTED	SPSGRF-915
FCC ID	S9NSPSGRF
TRADE MARK(s)	STMicroelectronics

APPLICANT	STMicroelectronics S.r.l. ~ Centro Direzionale Colleoni - Palazzo Andromeda 3 I-20864 Agrate Brianza (MB)
------------------	--

Tested by	Robertino Torri	
Approved by	Roberto Colombo <i>[Laboratory manager]</i>	

Revision Sheet

Release No.	Date	Revision Description
Rev. 0	2014-10-17	First edition Digital signed - ARSO00149-2_TR_FCC 15.249_STMICROELECTRONICS_Modulo SPSGRF-915
Rev. 1	2014-12-12	Insert "Conducted emission test", "Field strength of HARMONICS average detector" and editorial adjustment Digital signed - ARSO00149-2 rev.1_TR_FCC 15.249_STMICROELECTRONICS_Modulo SPSGRF-915
Rev. 2	2015-01-13	Erased § 8 photographic documentation Digital signed - ARSO00149-2 rev.2_TR_FCC 15.249_STMICROELECTRONICS_Modulo SPSGRF-915

The results of tests and checks reported in this Test Report refer exclusively to the samples tested and described in the Report itself.
This Report shall not be reproduced partially without the written approval of IMQ S.p.A..



IMQ S.p.A. - Società con Socio Unico
 Via Quintiliano, 43 I-20138 MILANO
 tel 0250731 - info@imq.it - www.imq.it

1. GENERAL DATA

SAMPLE		
Samples received on	2014-09-25	(item sent and sampling by applicant)
IMQ reference samples	BEM	74535
Samples tested No.	1	
Object under analysis recognition	Not carried out	Except where stated, characteristics of products were taken from client description and were not verified by the laboratory
TEST LOCATION		
Testing dates	2014-09-25 ÷ 2014-10-10	
Testing laboratory.	IMQ S.p.A. - Via Quintiliano, 43 – I-20138 Milano	
Testing site	Viale Lombardia, 20 – I-20021 Bollate (MI) Via Quintiliano, 43 – I-20138 Milano	
ENVIRONMENTAL CONDITIONING		
Parameter	Measured	
Ambient Temperature	25 ÷ 35 °C	
Relative Humidity	50 ÷ 60 %	
Atmospheric Pressure	900 ÷ 1000 mbar	



IMQ S.p.A. - Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 - info@imq.it - www.imq.it

2. REFERENCE DOCUMENT

DOCUMENT		DATE	TITLE
<input checked="" type="checkbox"/>	47 CFR Part 15	2008	Radio Frequency Device
<input checked="" type="checkbox"/>	ANSI C63.4	2009	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
<input type="checkbox"/>	ANSI C63.10	2009	American National Standard for Testing Unlicensed Wireless Devices



IMQ S.p.A. - Società con Socio Unico
 Via Quintiliano, 43 I-20138 MILANO
 tel 0250731 - info@imq.it - www.imq.it

3. UNIT UNDER TEST (EUT) DETAILS

GENERAL DATA


Model tested	SPSGRF-915
FCC ID	S9NSPSGRF
Manufacturer	STMicroelectronics S.r.l. ~ Centro Direzionale Colleoni - Palazzo Andromeda 3 I-20864 Agrate Brianza (MB)
Equipment classification	According to the definition 15.3 (o) EUT is a Intentional Radiator operating within the bands 902 ÷ 928 MHz so it shall fulfill provisions of 47CFR Part 15 Subpart C – Intentional radiators – and Section 15.249
Type of equipment	Radio module
Power supply type	DC power supply 3.3 V DC
Power specification	3.3 V DC
Operating frequency	902.5 ÷ 927.5 MHz
Field strength	93,63 dB _μ V/m
Modulation	OOK and ASK
Channel Spacing	/
Antenna Type	Dedicated
Peripherals included (for system application)	None
Interfaces	None
Integrated interfaces	None
AC adapter	/

RF parameters will be those used on transceiver module during test for limits compliance in FCC certification.

Operation band MHz	Modulation	Data rate Min/Max [kbps]	Frequency deviation Min/Max [kHz]	Output power maximum [dBm]
902.5 ÷ 927.5	OOK / ASK	1/250	20/732	+6

4. TEST CONFIGURATION OF UNIT UNDER TEST

EUT PORTS

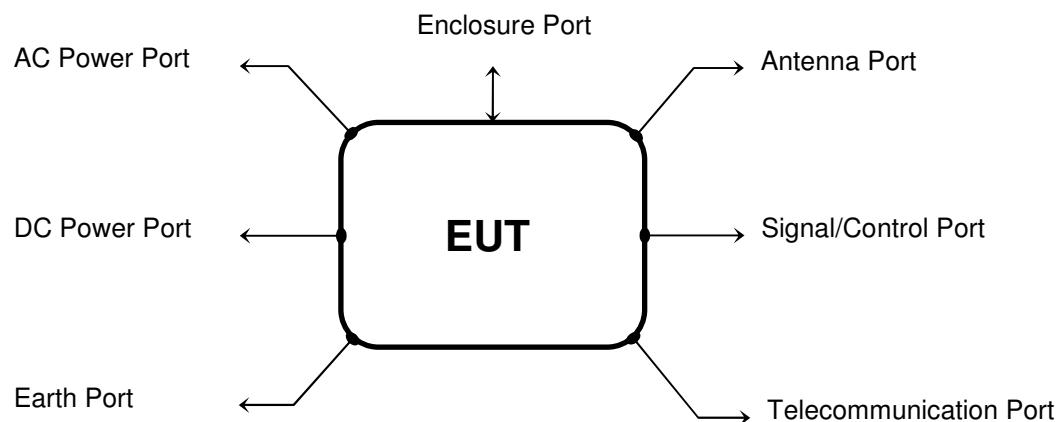

Port	Description	Max length
Enclosure	Not present (open frame)	/
AC power	Not present	/
DC power	DC power supply 3.3 V DC	/
Earth	/	/
Telecommunication	/	/
Signal	I/O pin (see also schematics data sheet)	/
Control	I/O pin (see also schematics data sheet)	/
Antenna	Dedicated	/

STATE OF THE EUT DURING TESTS

Ref.	Mode	Description
#1	Operating	<p>Continuous transmission (single channel transmission) 5V DC battery supply by dedicated dongle.</p> <p>The EUT is installed on module device board (dongle). The dongle is powered from the USB cable port. The USB cable is connected to 12 V DC battery through DC/DC adapter (12/5 V DC).</p> <p>The EUT is in continuously transmitting at the highest power with 100% approximately duty cycle.</p>



IMQ S.p.A. - Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 - info@imq.it - www.imq.it

SUPPORT EQUIPMENT

Defined as equipment needed for correct operation or loading of the EUT, but not considered as tested:

Equipment	Manufacturer	Model
Dongle furnished by manufacturer for supply and management of radio module	ST Microelectronics	PC92A V01

EUT TECHNICAL DOCUMENTATION

Document	Reference
None	/

5. METHODS OF MEASUREMENT

All compliance measurements have been carried out using the procedures described in the standard ANSI C63.4-2009 (excluding sub-par. 4.1.5.2, 5.7.9 and 14) and Section 15.31 of CFR47 Part 15 – Subpart A (General).

Additional test requirements have been adopted according to the reference Section indicated in the Test Table.

FREQUENCY RANGE INVESTIGATED

Radiated emission tests: from 9 kHz to tenth harmonic of fundamental.



IMQ S.p.A. - Società con Socio Unico
 Via Quintiliano, 43 I-20138 MILANO
 tel 0250731 - info@imq.it - www.imq.it

6. SUMMARY OF TEST RESULTS

POSSIBLE TEST CASE VERDICTS:	
Test object does meet the requirement	PASS
Test object does not meet the requirement	FAIL
Test case does not apply to the test object	N.A.
Test not performed	N.P.

CFR47 Part 15	TITLE	RESULT
§ 15.203	Antenna Requirements	PASS
§ 15.205 (a)	Restricted band of operation	PASS
§ 15.205 (b) § 15.215 (b) § 15.249 (d)	Radiated Emission 9kHz to 30MHz 30MHz to 10GHz	PASS
§ 15.207 (a)	Conducted emission	PASS
§ 15.215 (c)	Bandwidth of emission (20dB Bandwidth)	PASS
§ 15.249(a)	Field strength of fundamental	PASS
§ 15.249 (a)	Radiated emission measurement of harmonics	PASS
§ 1.1307(b)(1)	RF exposure evaluation	PASS



IMQ S.p.A. - Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 - info@imq.it - www.imq.it

7. TEST RESULTS

7.1 ANTENNA REQUIREMENTS

TEST REQUIREMENT

According to CFR 47 Part 15, section 15.203 / 15.204.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

Antenna specifications

N° of authorized antenna types	Not Applicable
Antenna type	Integral antenna
Maximum total gain	---
External power amplifiers	Not present

TEST RESULT

The EUT meets the requirements of sections 15.203 and 15.204.



IMQ S.p.A. - Società con Socio Unico
 Via Quintiliano, 43 I-20138 MILANO
 tel 0250731 - info@imq.it - www.imq.it

7.2 RESTRICTED BAND OF OPERATION

TEST REQUIREMENT

Test setup	ANSI C63.4
Test facility	Semi-anechoic chamber
Test distance	3 m
Frequency range	960 ÷ 1240
RBW bandwidth	100 kHz
VBW bandwidth	300 kHz
Detector	Peak
EUT operating condition	#1

LIMITS

Band of operations	Peak (dB μ V/m)	Average Limit (dB μ V/m)
Restricted bands (§ 15.205)	74	54
Other bands	According to § 15.209 or fundamental –20dB (which is greater)	According to § 15.209 or fundamental –20dB (which is greater)

TEST PROCEDURE


- 1) The EUT was placed on turntable which is 0.8 m above the ground plane
- 2) The turntable shall rotate from 0° to 360° degrees to determine the position of maximum emission level.
- 3) The EUT is positioned 3 m away from the receiving antenna which varied from 1 to 4 m to find the highest emission.
- 4) The measurements were made with EUT set to operate at 100% of duty cycle and maximum power with normal modulation
- 5) The receiving antenna was positioned in both horizontal and vertical polarization.




IMQ S.p.A. - Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 - info@imq.it - www.imq.it

MEASUREMENTS RESULTS AT LOWEST AND HIGHEST FREQUENCY TRANSMISSION

Modulation: ASK

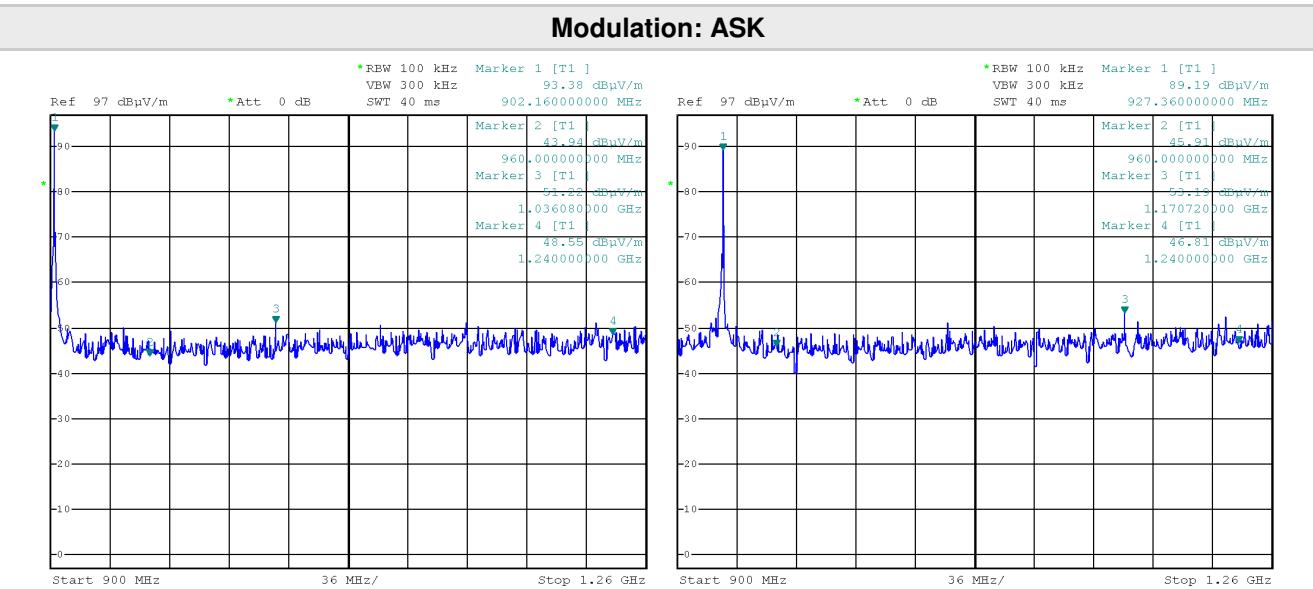

Modulation: OOK

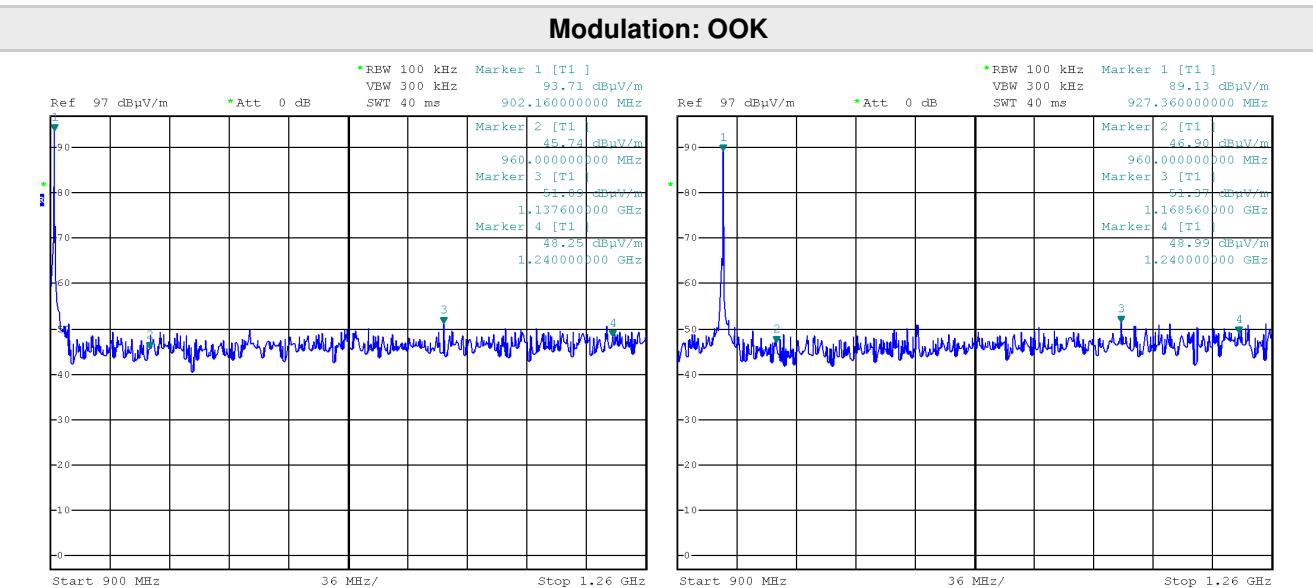

TEST RESULT

The EUT meets the requirements of sections 15.205 (a)



IMQ S.p.A. - Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 - info@imq.it - www.imq.it

7.3 RADIATED EMISSIONS

TEST REQUIREMENT	
Test setup	ANSI C63.4 § 5.5
Test facility	Semi-anechoic chamber below 1 GHz; for measurement above 1 GHz are used 2.4 m by 2.4 m RF absorbing material covering the ground plane between the antenna and the EUT
Test distance	3 meters
Frequency range	9 kHz to tenth harmonic of fundamental
IF bandwidth (below 30 MHz)	9 kHz
IF bandwidth (below 1,000 MHz)	120 kHz
IF bandwidth (above 1,000 MHz)	1 MHz
Deviation to test procedure	None
EUT operating condition	#1
Remark	(*) In accordance with part 15.31 (f) (2), where the measurement distance was specified to be 30 or 300 meters, a correction factor was applied in order to permit measurement to be performed at a separation distance. The applied formula for limits at 3 meter is: Extrapolation (dB) = 40log (300meter / 3meter) = +80dB Extrapolation (dB) = 40log (30meter / 3meter) = +40dB

LIMITS		
Band of operations	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)
Restricted bands (§ 15.205)	74	54
Other bands	According to § 15.209 or fundamental –20dB (which is greater)	According to § 15.209 or fundamental –20dB (which is greater)

TEST PROCEDURE	
1) The EUT was placed on turntable which is 0.8 m above the ground plane	
2) The turntable shall rotate from 0° to 360° degrees to determine the position of maximum emission level.	
3) The EUT is positioned 3 m away from the receiving antenna which varied from 1 to 4 m to find the highest emission.	
4) The measurements were made with the detector set to PEAK amplitude within a bandwidth of 120 kHz below 1000 MHz and 1 MHz above 1000 MHz.	
5) The receiving antenna was positioned in both horizontal and vertical polarization.	
6) The measurements with Quasi-Peak detector, below 1000 MHz are performed only for frequencies for which the Peak values are \geq Q.P. limit – 6 dB (♦ mark symbol).	




IMQ S.p.A. - Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 - info@imq.it - www.imq.it


MEASUREMENTS RESULTS

Modulation: ASK

Range: 9kHz ÷ 30 MHz

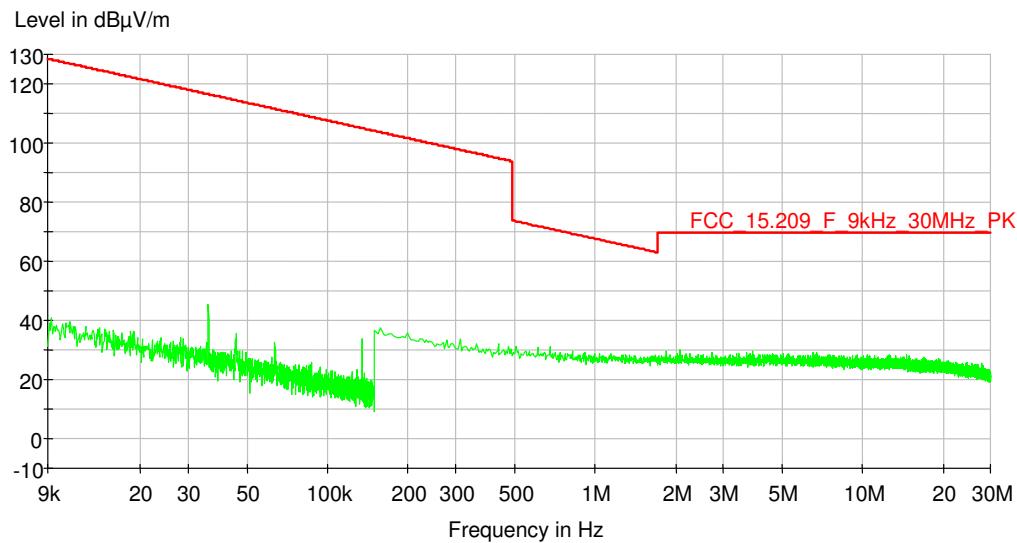


Range: 30 MHz ÷ 1000 MHz

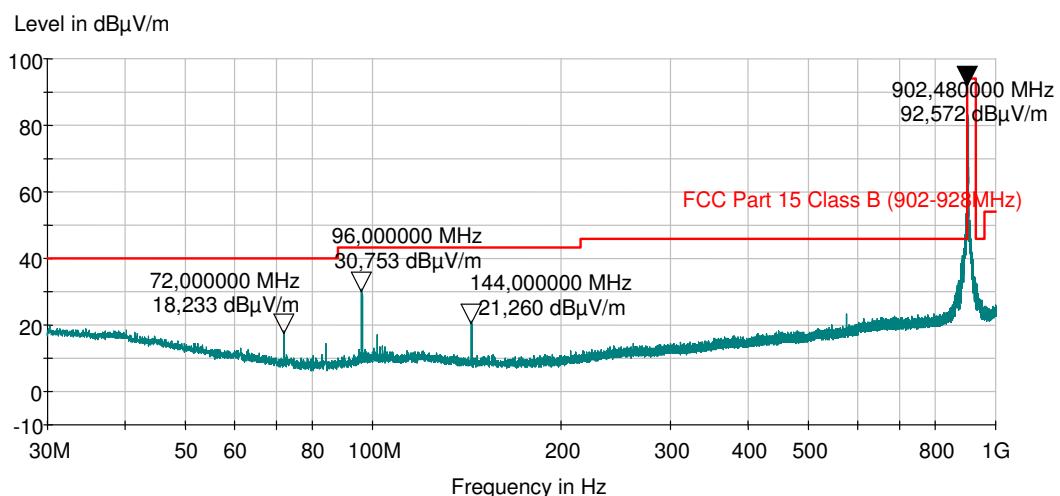


1000 MHz ÷ 10000 MHz


Lowest frequency

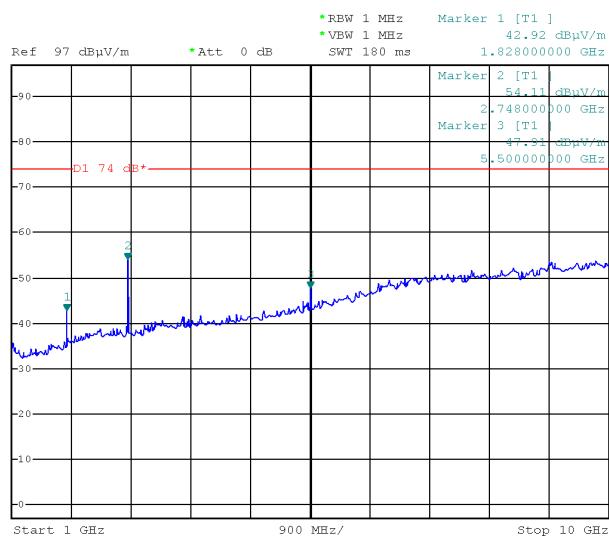

Middle frequency

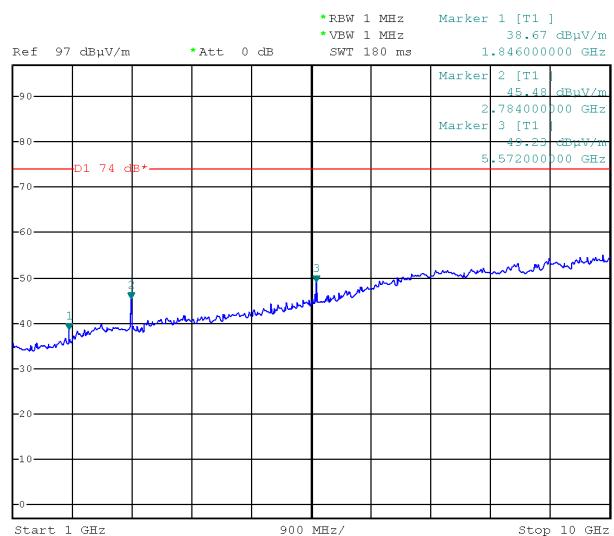

Highest frequency

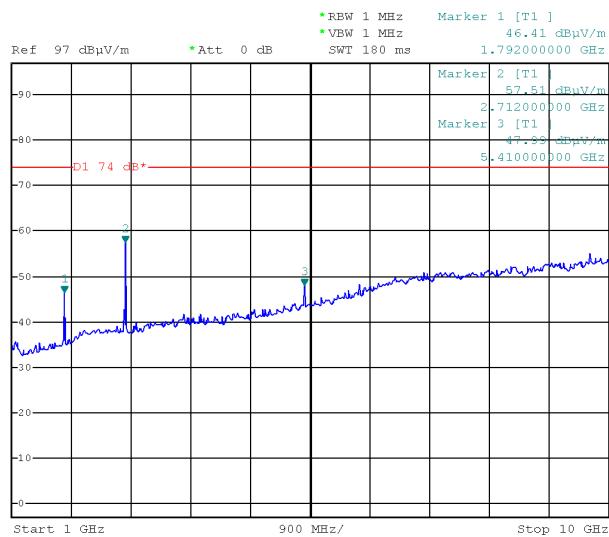





IMQ S.p.A. - Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 - info@imq.it - www.imq.it

Modulation: OOK

Range: 9kHz ÷ 30 MHz

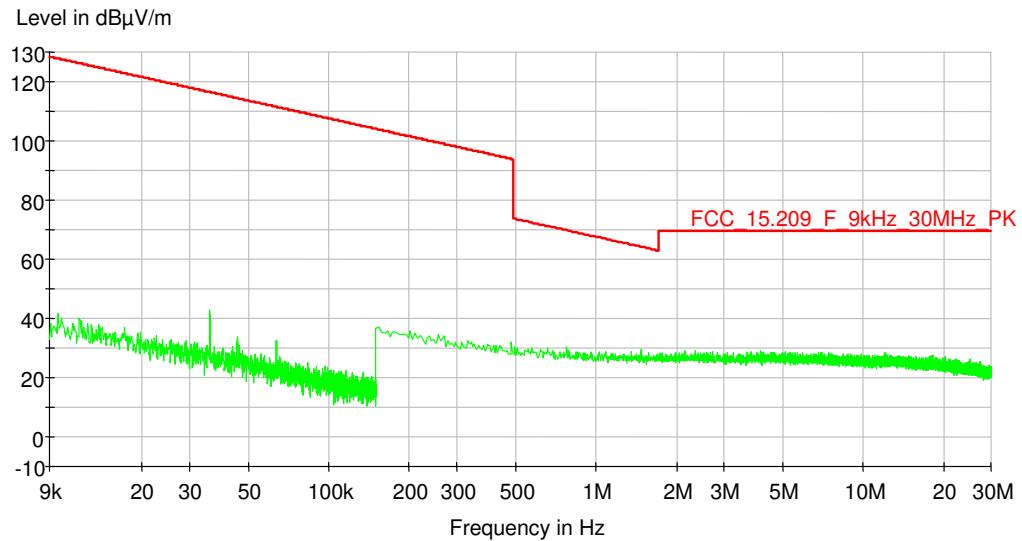


Range: 30 MHz ÷ 1000 MHz

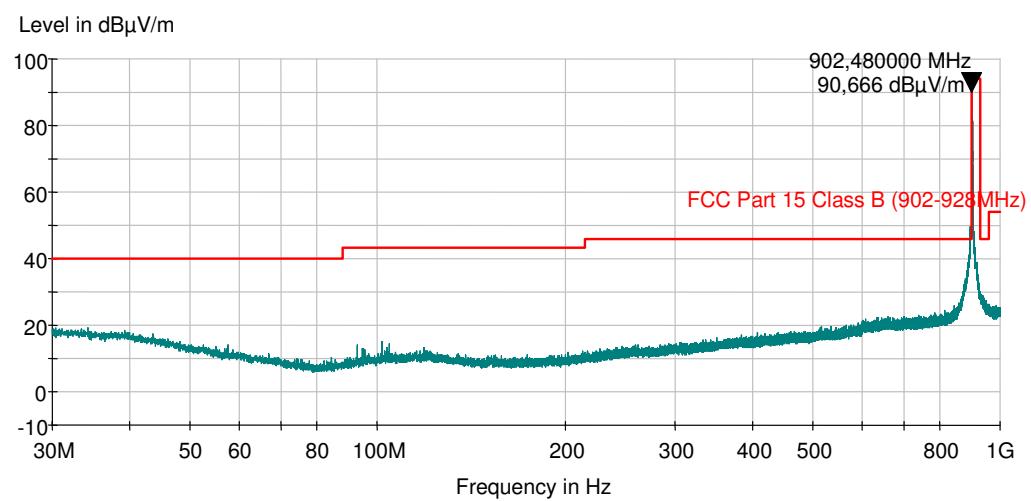


1000 MHz ÷ 10000 MHz


Lowest frequency

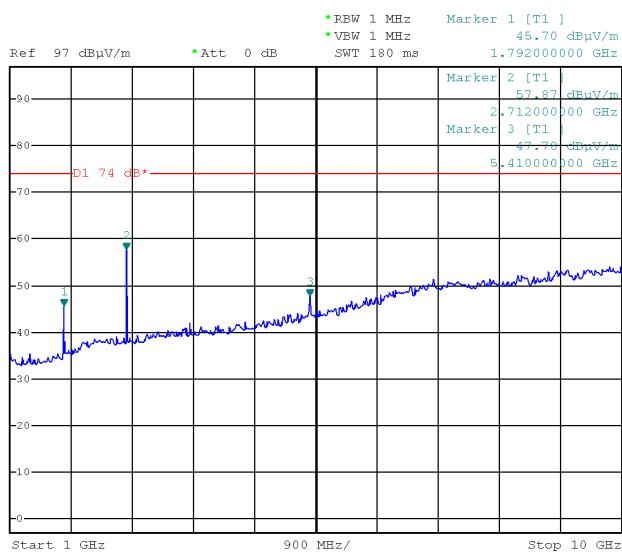

Middle frequency

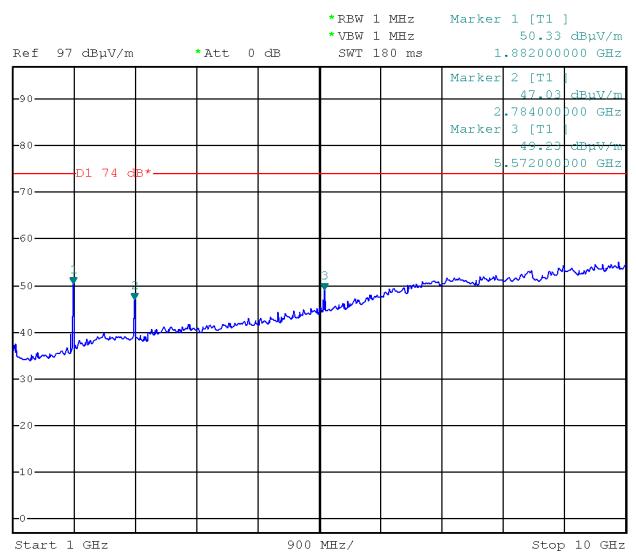

Highest frequency

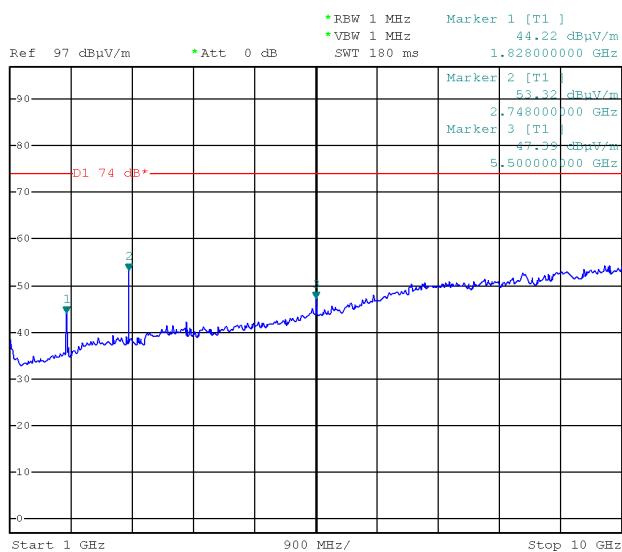

/

TEST RESULT

The EUT has been tested in 3 orthogonal axes at the frequencies lowest, middle and highest for each modulation.

The results reported are worst case.

The measurement of spurious emission of EUT in receiver mode is deemed to be fulfilled as no limits are exceeded in transmitter mode (condition considered more burdensome).

The EUT meets the requirements of sections 15.205 (b), 15.215 (b) and 15.249 (d).



IMQ S.p.A. - Società con Socio Unico
 Via Quintiliano, 43 I-20138 MILANO
 tel 0250731 - info@imq.it - www.imq.it

7.4 CONDUCTED EMISSION

TEST REQUIREMENT

Test setup	ANSI C63.4
Test facility	Shielded chamber
Frequency range	150 kHz – 30 MHz
IF bandwidth	9 kHz
EMC class	B
EUT operating condition	#1

LIMITS

Band of operations	Quasi-Peak (dB μ V)	Average Limit (dB μ V)
0.15 ÷ 0.5	66 ÷ 56	56 ÷ 46
0.5 ÷ 5	56	46
5 ÷ 30	60	50

TEST RESULT

The EUT meets the requirements of sections 15.207 (a).

TEST PROCEDURE

- 1) The EUT was placed on a wooden table of size, 80 cm by 80 cm, raised 80 cm in which is located 40 cm away from the vertical wall the shielded room.
- 2) Each EUT power cord input cord was individually connected through a 50 Ω /50 μ H LISN to the input power source.
- 3) Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
- 4) The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
- 5) The measurements were made with the detector set to PEAK and AVERAGE amplitude within a bandwidth of 9 kHz during the measurements.
- 6) The measurements with Quasi-Peak detector are performed only for frequencies for which the Peak values are \geq (Q.P. limit - 6 dB).




IMQ S.p.A. - Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 - info@imq.it - www.imq.it

MEASUREMENTS RESULTS

Conducted disturbance on DC dongle power port (battery supplied)


150 kHz÷30 MHz – PHASE LINE



Modulation: 2FSK


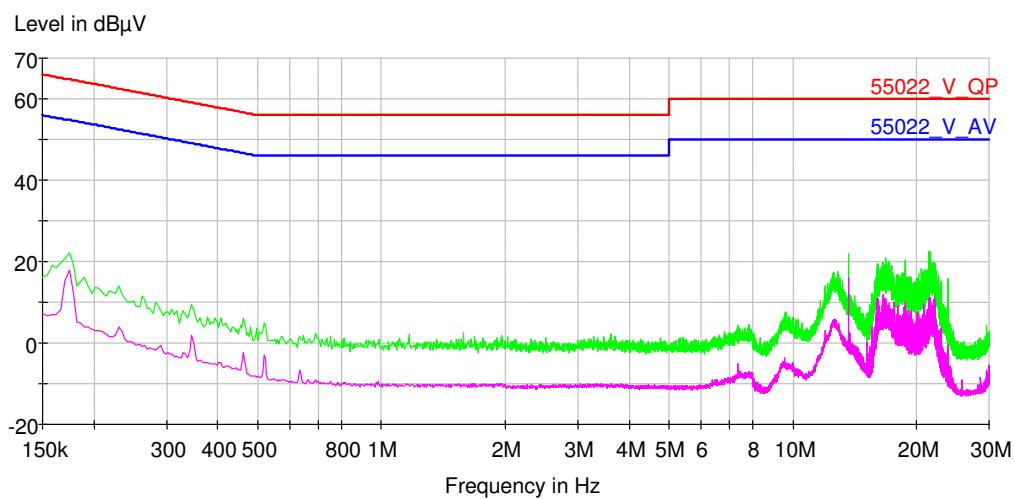


150 kHz÷30 MHz – NEUTRAL LINE

Modulation: 2FSK

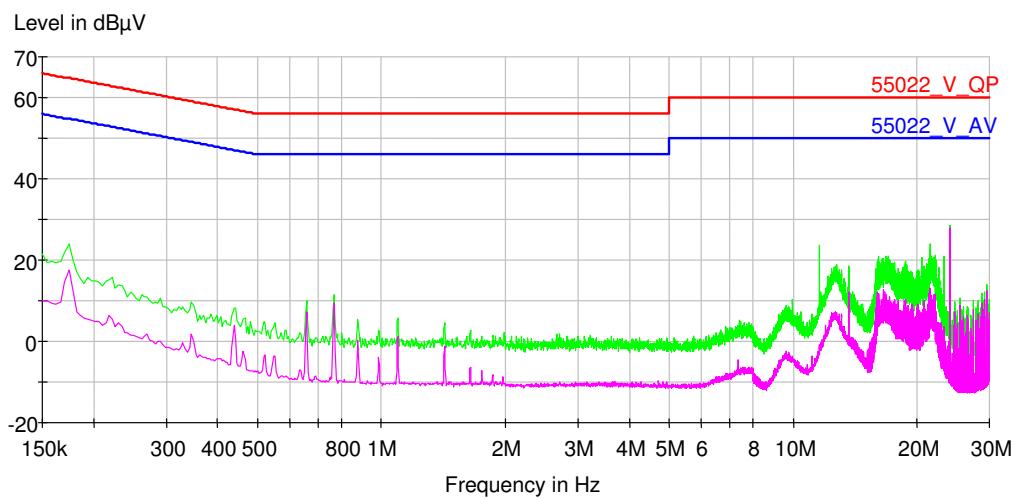

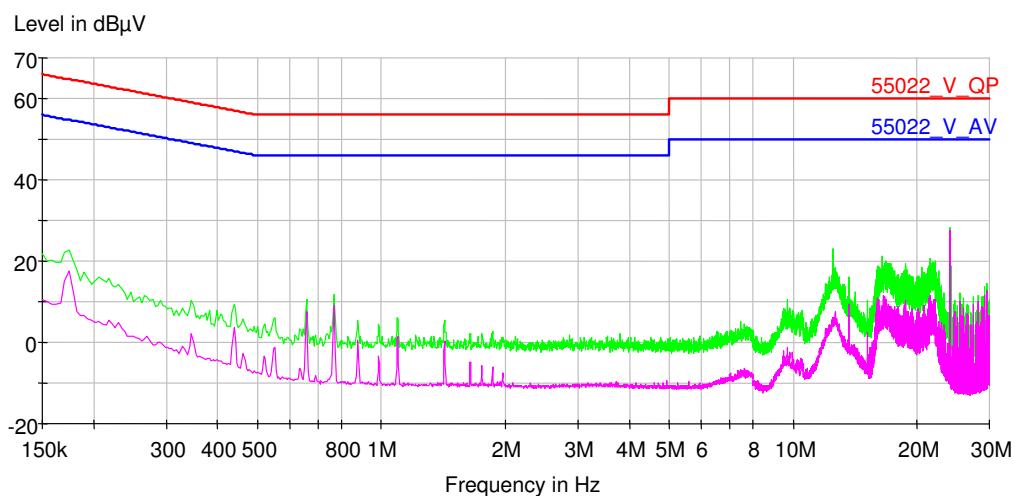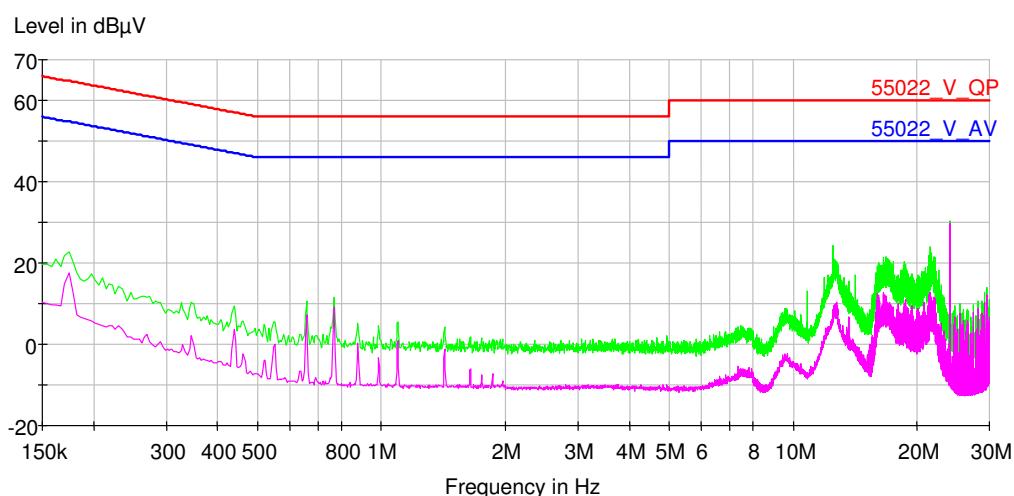MEASUREMENTS RESULTS**Conducted disturbance on DC dongle power port (battery supplied)****150 kHz÷30 MHz – PHASE LINE****Modulation: GFSK****150 kHz÷30 MHz – NEUTRAL LINE****Modulation: GFSK**

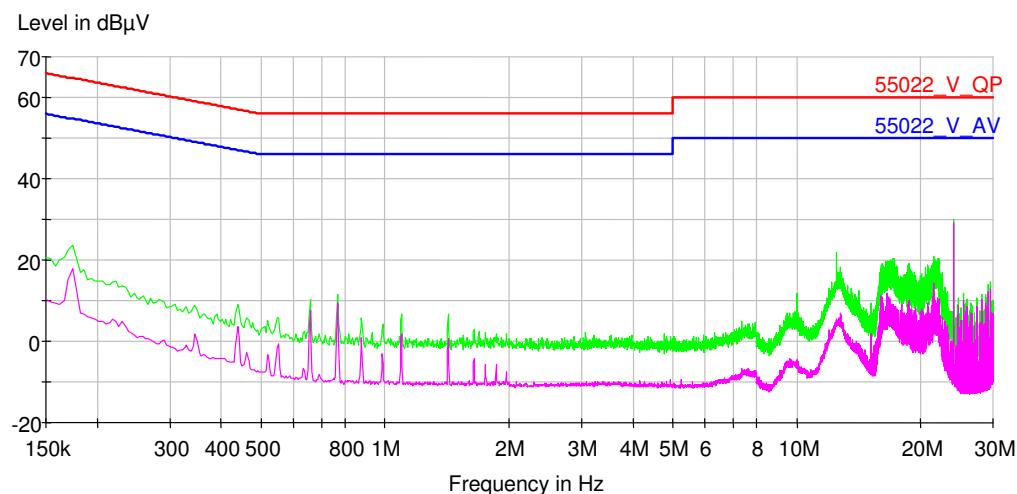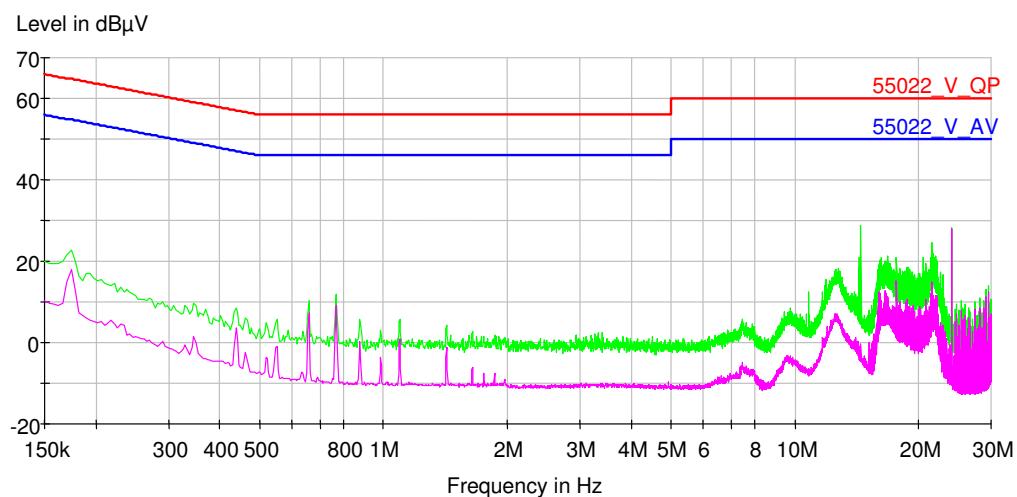MEASUREMENTS RESULTS**Conducted disturbance on DC dongle power port (battery supplied)****150 kHz÷30 MHz – PHASE LINE****Modulation: MSK****150 kHz÷30 MHz – NEUTRAL LINE****Modulation: MSK**



IMQ S.p.A. - Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 - info@imq.it - www.imq.it

7.5 BANDWIDTH OF EMISSIONS

TEST REQUIREMENT	
Spectrum analyzer settings	
Span	Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation
Resolution bandwidth (RBW)	10 kHz
Video bandwidth (VBW)	30 kHz
Sweep time (SWT)	Auto
Detector function	Peak
Trace	Max hold
Attenuator	/
Deviation to test procedure	None
EUT operating condition	#1
Remark	None


LIMITS	
20 dB below peak output power	




IMQ S.p.A. - Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 - info@imq.it - www.imq.it

Modulation: ASK


Lowest frequency

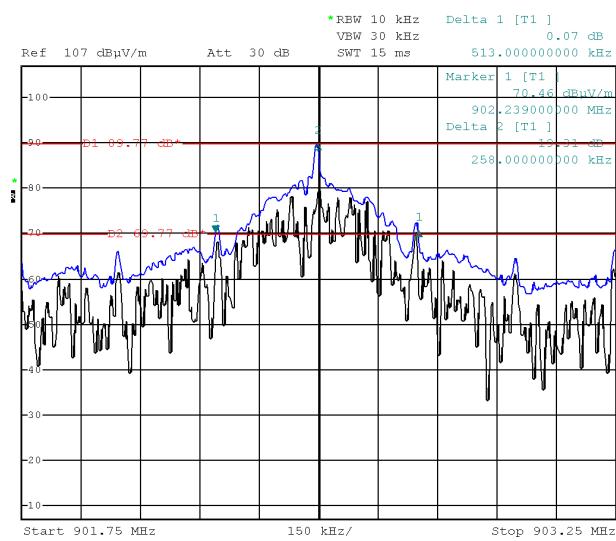

Middle frequency

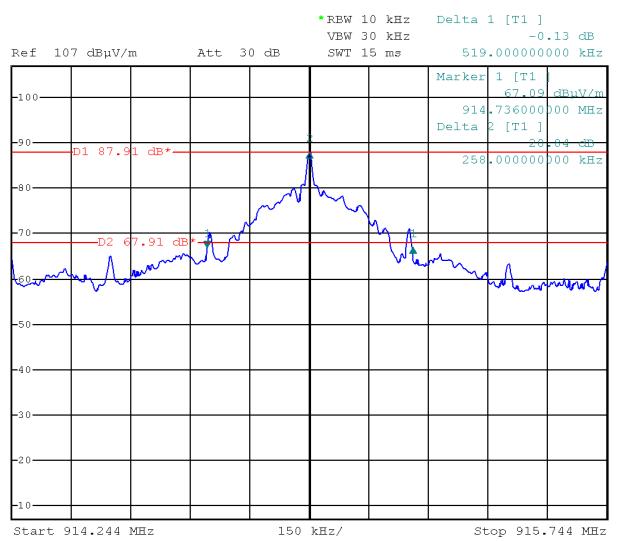

Highest frequency

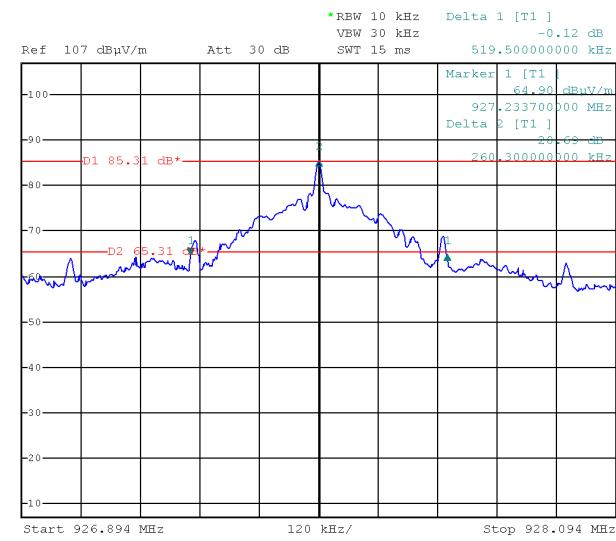


/




IMQ S.p.A. - Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 - info@imq.it - www.imq.it

Modulation: OOK


Lowest frequency

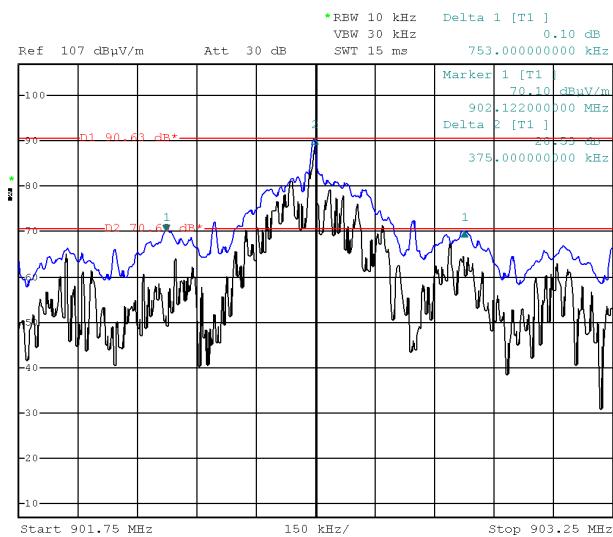

Middle frequency

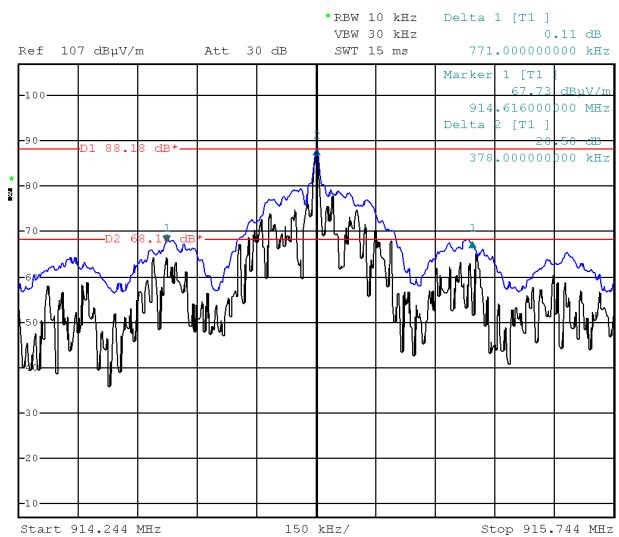

Highest frequency

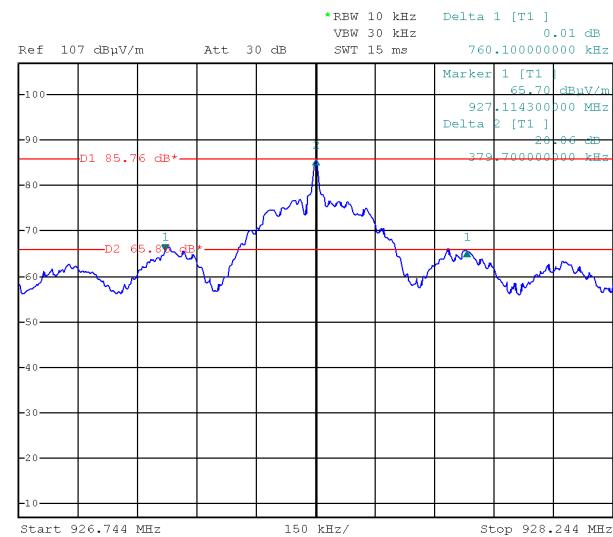

TEST RESULT

All out of band spurious emissions are more 20 dB below the in band power of the fundamental in accordance to section 15.215 (c).



IMQ S.p.A. - Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 - info@imq.it - www.imq.it

7.6 FIELD STRENGTH OF FUNDAMENTAL

TEST REQUIREMENT	
Spectrum analyzer settings	
Span	Wide enough to capture the peak level of the emission
Resolution bandwidth (RBW)	100 kHz
Video bandwidth (VBW)	Auto
Sweep time (SWT)	Auto
Detector function	Peak
Trace	Max hold
Attenuator	/
Deviation to test procedure	None
EUT operating condition	#1
Remark	None


TEST PROCEDURE	
1)	The EUT was placed on turntable which is 0.8 m above the ground plan
2)	The turntable shall rotate from 0° to 360° degrees to determine the position of maximum emission level.
3)	The EUT is positioned 3 m away from the receiving antenna which varied from 1 to 4 m to find the highest emission.
4)	The measurements were made with the detector set to PEAK amplitude within a bandwidth of 100 kHz.
5)	The receiving antenna was positioned in both horizontal and vertical polarization.

LIMITS	
94 dB μ V/m	


TEST RESULT	
The EUT meets the requirements of sections 15.249 (a).	

Modulation: ASK


Lowest frequency

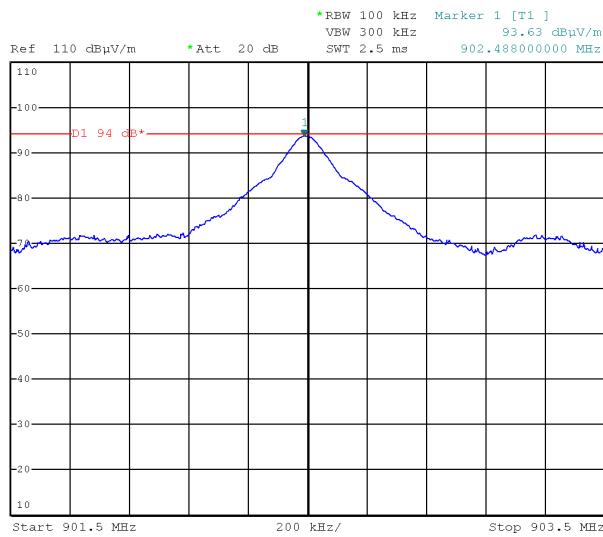

Middle frequency

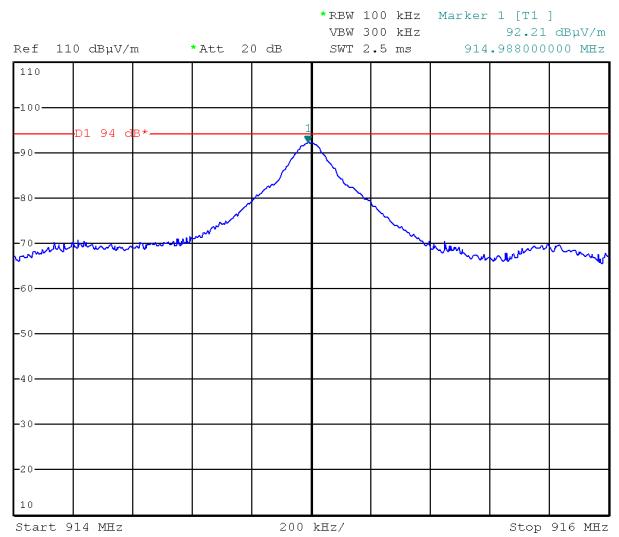


Highest frequency

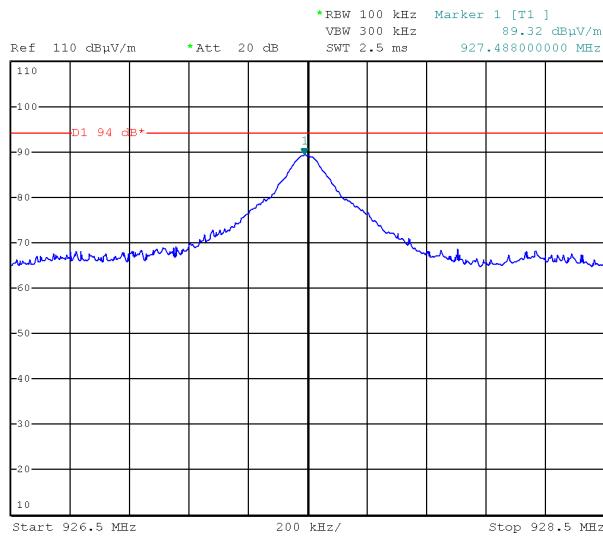


/

Modulation: OOK


Lowest frequency

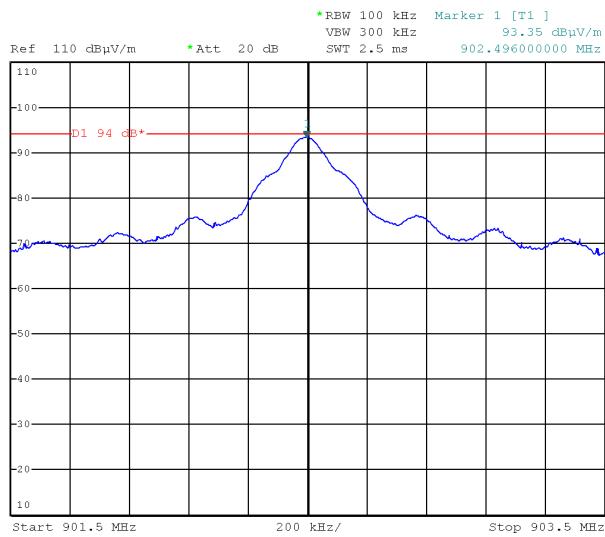

Middle frequency

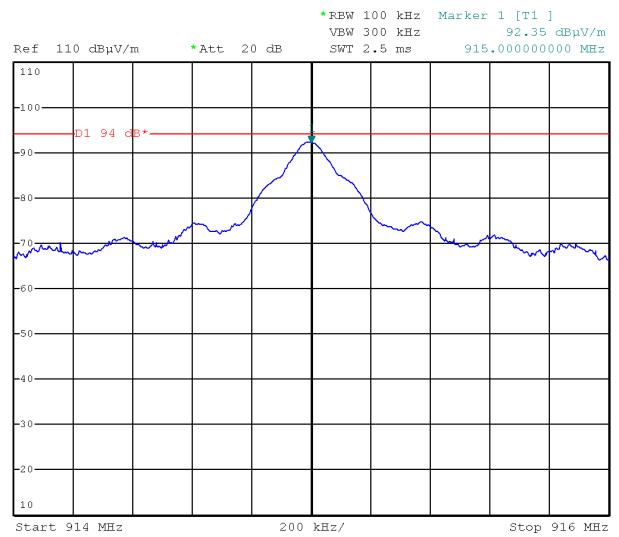

Highest frequency

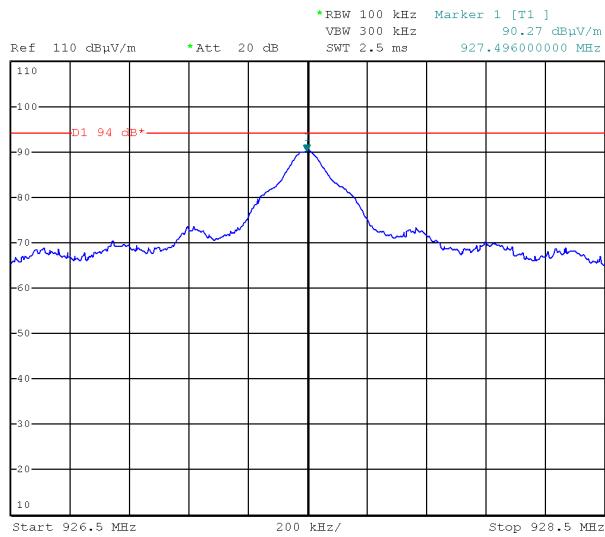

/



IMQ S.p.A. - Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 - info@imq.it - www.imq.it

7.7 FIELD STRENGTH OF HARMONICS

TEST REQUIREMENT

Spectrum analyzer settings

Resolution bandwidth (RBW)	1 MHz
Detector function	Peak
Trace	Max hold
Attenuator	/
Deviation to test procedure	None
EUT operating condition	#1
Remark	None

TEST PROCEDURE

- 1) The EUT was placed on turntable which is 0.8 m above the ground plan
- 2) The turntable shall rotate from 0° to 360° degrees to determine the position of maximum emission level.
- 3) The EUT is positioned 3 m away from the receiving antenna which varied from 1 to 4 m to find the highest emission.
- 4) The measurements were made with the detector set to PEAK amplitude within a bandwidth of 100 kHz.
- 5) The receiving antenna was positioned in both horizontal and vertical polarization.



IMQ S.p.A. - Società con Socio Unico
 Via Quintiliano, 43 I-20138 MILANO
 tel 0250731 - info@imq.it - www.imq.it

Modulation ASK

MEASUREMENTS RESULTS AT LOWEST FREQUENCY TRANSMISSION

Frequency MHz	Antenna polarization	Detector	Receiver reading dB μ V	Correction factor dB	Final value dB μ V/m	Limit dB μ V/m	Margin dB
1805	H	Peak	56.13	-8.45	47.68	74	-26.32
2707	H	Peak	62.52	-4.73	57.79	74	-16.21
5415	H	Peak	48.08	+1.47	49.55	74	-24.45

MEASUREMENTS RESULTS AT MIDDLE FREQUENCY TRANSMISSION

Frequency MHz	Antenna polarization	Detector	Receiver reading dB μ V	Correction factor dB	Final value dB μ V/m	Limit dB μ V/m	Margin dB
1830	H	Peak	54.68	-8.45	46.23	74	-27.77
2745	H	Peak	60.25	-4.73	55.52	74	-18.48
5490	H	Peak	48.60	+1.47	50.07	74	-23.93

MEASUREMENTS RESULTS AT HIGHEST FREQUENCY TRANSMISSION

Frequency MHz	Antenna polarization	Detector	Receiver reading dB μ V	Correction factor dB	Final value dB μ V/m	Limit dB μ V/m	Margin dB
1855	H	Peak	51.25	-8.45	42.80	74	-31.20
2782	H	Peak	54.17	-4.73	49.44	74	-24.56
5490	H	Peak	49.30	+1.47	50.77	74	-23.23



IMQ S.p.A. - Società con Socio Unico
 Via Quintiliano, 43 I-20138 MILANO
 tel 0250731 - info@imq.it - www.imq.it

MEASUREMENTS RESULTS AT LOWEST FREQUENCY TRANSMISSION

Frequency MHz	Antenna polarization	Detector	Receiver reading dB μ V	Correction factor dB	Final value dB μ V/m	Limit dB μ V/m	Margin dB
1805	H	Average	46.97	-8.45	38.52	54	-15.48
2707	H	Average	54.05	-4.73	49.32	54	-4.68
5415	H	Average	42.38	+1.47	43.85	54	-10.15

MEASUREMENTS RESULTS AT MIDDLE FREQUENCY TRANSMISSION

Frequency MHz	Antenna polarization	Detector	Receiver reading dB μ V	Correction factor dB	Final value dB μ V/m	Limit dB μ V/m	Margin dB
1830	H	Average	45.39	-8.45	36.94	54	-17.06
2745	H	Average	50.76	-4.73	46.03	54	-7.97
5490	H	Average	42.84	+1.47	44.31	54	-9.69

MEASUREMENTS RESULTS AT HIGHEST FREQUENCY TRANSMISSION

Frequency MHz	Antenna polarization	Detector	Receiver reading dB μ V	Correction factor dB	Final value dB μ V/m	Limit dB μ V/m	Margin dB
1855	H	Average	41.29	-8.45	32.84	54	-21.16
2782	H	Average	44.61	-4.73	39.88	54	-14.12
5490	H	Average	42.82	+1.47	44.29	54	-9.71



IMQ S.p.A. - Società con Socio Unico
 Via Quintiliano, 43 I-20138 MILANO
 tel 0250731 - info@imq.it - www.imq.it

Modulation OOK

MEASUREMENTS RESULTS AT LOWEST FREQUENCY TRANSMISSION

Frequency MHz	Antenna polarization	Detector	Receiver reading dB μ V	Correction factor dB	Final value dB μ V/m	Limit dB μ V/m	Margin dB
1805	H	Peak	56.33	-8.45	47.88	74	-26.12
2707	H	Peak	63.22	-4.73	58.49	74	-15.51
5415	H	Peak	48.19	+1.47	49.66	74	-24.34

MEASUREMENTS RESULTS AT MIDDLE FREQUENCY TRANSMISSION

Frequency MHz	Antenna polarization	Detector	Receiver reading dB μ V	Correction factor dB	Final value dB μ V/m	Limit dB μ V/m	Margin dB
1830	H	Peak	54.86	-8.45	46.41	74	-27.59
2745	H	Peak	61.25	-4.73	56.52	74	-17.48
5490	H	Peak	49.07	+1.47	50.54	74	-23.46

MEASUREMENTS RESULTS AT HIGHEST FREQUENCY TRANSMISSION

Frequency MHz	Antenna polarization	Detector	Receiver reading dB μ V	Correction factor dB	Final value dB μ V/m	Limit dB μ V/m	Margin dB
1855	H	Peak	51.71	-8.45	43.26	74	-30.74
2782	H	Peak	54.34	-4.73	49.61	74	-24.39
5490	H	Peak	48.98	+1.47	50.45	74	-23.55



IMQ S.p.A. - Società con Socio Unico
 Via Quintiliano, 43 I-20138 MILANO
 tel 0250731 - info@imq.it - www.imq.it

MEASUREMENTS RESULTS AT LOWEST FREQUENCY TRANSMISSION

Frequency MHz	Antenna polarization	Detector	Receiver reading dB μ V	Correction factor dB	Final value dB μ V/m	Limit dB μ V/m	Margin dB
1805	H	Average	48.70	-8.45	40.25	54	-13.75
2707	H	Average	55.59	-4.73	50.86	54	-3.14
5415	H	Average	42.07	+1.47	43.54	54	-10.46

MEASUREMENTS RESULTS AT MIDDLE FREQUENCY TRANSMISSION

Frequency MHz	Antenna polarization	Detector	Receiver reading dB μ V	Correction factor dB	Final value dB μ V/m	Limit dB μ V/m	Margin dB
1830	H	Average	46.67	-8.45	38.22	54	-15.78
2745	H	Average	52.79	-4.73	48.06	54	-5.94
5490	H	Average	42.96	+1.47	44.43	54	-9.57

MEASUREMENTS RESULTS AT HIGHEST FREQUENCY TRANSMISSION

Frequency MHz	Antenna polarization	Detector	Receiver reading dB μ V	Correction factor dB	Final value dB μ V/m	Limit dB μ V/m	Margin dB
1855	H	Average	42.40	-8.45	33.95	54	-20.06
2782	H	Average	46.59	-4.73	41.86	54	-12.14
5490	H	Average	43.36	+1.47	44.83	54	-9.17

TEST RESULT

All out of band spurious emissions are more 20 dB below the in band power of the fundamental.
 The EUT meets the requirements of sections 15.249 (a).



IMQ S.p.A. - Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 - info@imq.it - www.imq.it

7.8 RF EXPOSURE EVALUATION

TEST REQUIREMENT

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines § 1.1307(b)(1).

EUT classification (fixed, mobile or portable devices)	Portable according to § 2.1093(b) of this Chapter
Deviation to test procedure	None
EUT operating condition	#1
Remark	None

Limit for maximum permissible Exposure (MPE)

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Average Time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3÷3.0	614	1.63	(100)*	6
3.0÷30	1842/f	4.89/f	(900/f ²)*	6
30÷300	61.4	0.163	1.0	6
300÷1500	--	--	f/300	6
1500÷100,000	--	--	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3÷3.0	614	1.63	(100)*	30
3.0÷30	824/f	2.19/f	(180/f ²)*	30
30÷300	27.5	0.073	0.2	30
300÷1500	--	--	f/1500	30
1500÷100,000	--	--	1.0	30

F = Frequency in MHz

*Plane-wave equivalent power density

The distance from the device's transmitting antenna where the exposure level reaches the maximum permitted limit is calculated using the general equation:

$$S = P * G / 4\pi R^2$$

Where:

S = Power Density (mW/cm²)

P = Conducted power (mW)

G = Linear power gain relative to isotropic radiator (numeric gain)

R = Distance (cm)



IMQ S.p.A. - Società con Socio Unico
Via Quintiliano, 43 I-20138 MILANO
tel 0250731 - info@imq.it - www.imq.it

RF Exposure evaluation

Low threshold limit			
Exposure category	Frequency range f_{MHz}	Limit	Limit value (mW/cm^2)
General population	902.5	$f_{\text{MHz}}/1500$	0.602

Both conducted and radiated (EIRP) output power values must be compared to the threshold limit.

MEASUREMENTS RESULTS

highest output power (radiated) (dBm)	Power density @ 20 cm (mW/cm^2)	Distance where the exposure level reaches the limit (cm)	Limits (mW/cm^2)
-1.60	0,000228746	0.302	0.602

TEST RESULT

This value is less than the low threshold limit corresponding to the general population exposure category and therefore no SAR test is required.



IMQ S.p.A. - Società con Socio Unico
 Via Quintiliano, 43 I-20138 MILANO
 tel 0250731 - info@imq.it - www.imq.it

8. LIST OF MEASURING EQUIPMENT AND CALIBRATION INFORMATION

IMQ Serial Number	Instrument	Manufacturer	Type	Last Cal.	Cal. Period.	Calibration Company
P01709	Shielded semi-anechoic chamber	SIDT	/	03/2013	12	IMQ
S05562	EMI Receiver	Rohde & Schwarz	ESU 8	05/2014	12	ROHDE & SCHWARZ
S03629	Spectrum Analyzer	Rohde & Schwarz	FSP40	12/2013	12	I.N.RI.M.
S02349+S02350	Receiver	Rohde & Schwarz	ESMI + ESMI-RF	06/2014	12	I.N.RI.M.
S02508	Loop Antenna	Rohde & Schwarz	HFH2-Z2	01/2012	36	SEIBERSDORF
S06463	Bilog Antenna	Schwarzbeck	VULB9160	03/2013	36	NPL
S03463	Horn Antenna	Schwarzbeck	BBHA 9120D	09/2011	36	NPL
S03542	Preamplifier	Hewlett Packard	HP 8449B	06/2013	24	IMQ
S04193	Preamplifier	Bonn Elektronik	BLNA 0110-15C35	06/2013	24	IMQ
S04467	Crystal Detector	Agilent	8472B	/	/	/
S04159	Multimeter	Fluke	45	05/2014	12	IMQ
W-00124-ME+	Software for test automation	Rohde & Schwarz	EMC 32 Vers. 8.30	/	/	/

END OF TEST REPORT