

Plot 1

Date/Time: 9/2/2011 2:20:45 PM, Date/Time: 9/2/2011 2:26:36 PM

DUT: WiredTime; Serial: 80a56171

Communication System: CDMA RC3; Frequency: 836.52 MHz

Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.887$ mho/m; $\epsilon_r = 40.52$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(6.09, 6.09, 6.09);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, Version 52.6 (2);

Right-Hand-Side HSL/Touch Position_836MHz/Area Scan (11x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.766 mW/g

Right-Hand-Side HSL/Touch Position_836MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.868 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.894 W/kg

SAR(1 g) = 0.631 mW/g; SAR(10 g) = 0.450 mW/g

Maximum value of SAR (measured) = 0.734 mW/g

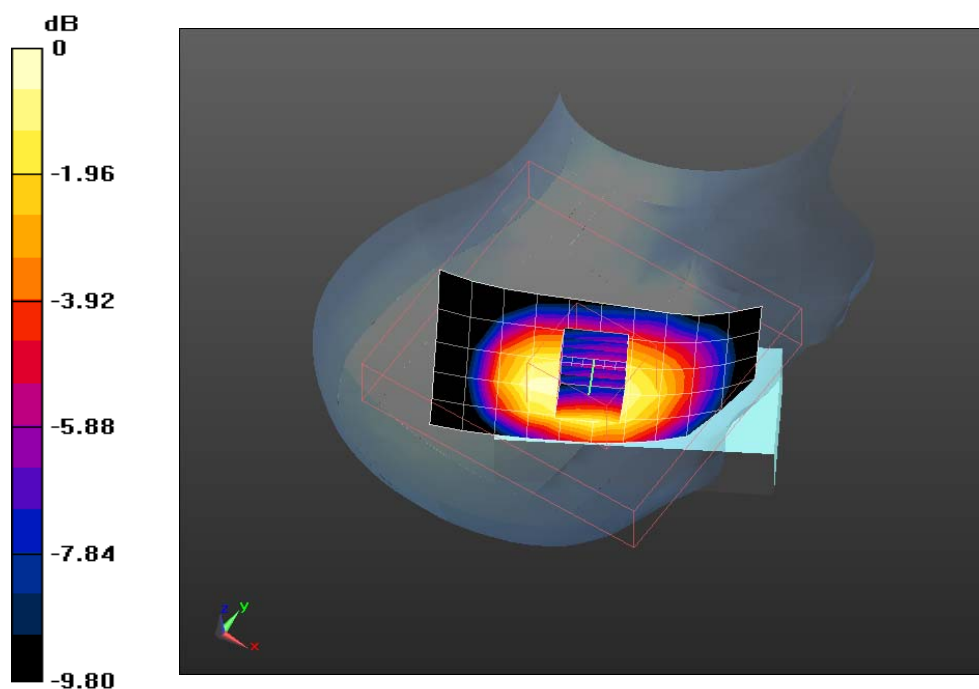

Plot 2

Date/Time: 9/8/2011 1:13:39 PM, Date/Time: 9/8/2011 1:20:31 PM

DUT: WiredTime; Serial: 80A56171

Communication System: CDMA RC3; Frequency: 836.52 MHz

Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.905$ mho/m; $\epsilon_r = 41.53$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(6.09, 6.09, 6.09);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, Version 52.6 (2);

Right-Hand-Side HSL 9-7/Tilt Position_836MHz/Area Scan (11x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.748 mW/g

Right-Hand-Side HSL 9-7/Tilt Position_836MHz/Zoom Scan (8x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.739 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.896 W/kg

SAR(1 g) = 0.590 mW/g; SAR(10 g) = 0.385 mW/g

Maximum value of SAR (measured) = 0.693 mW/g

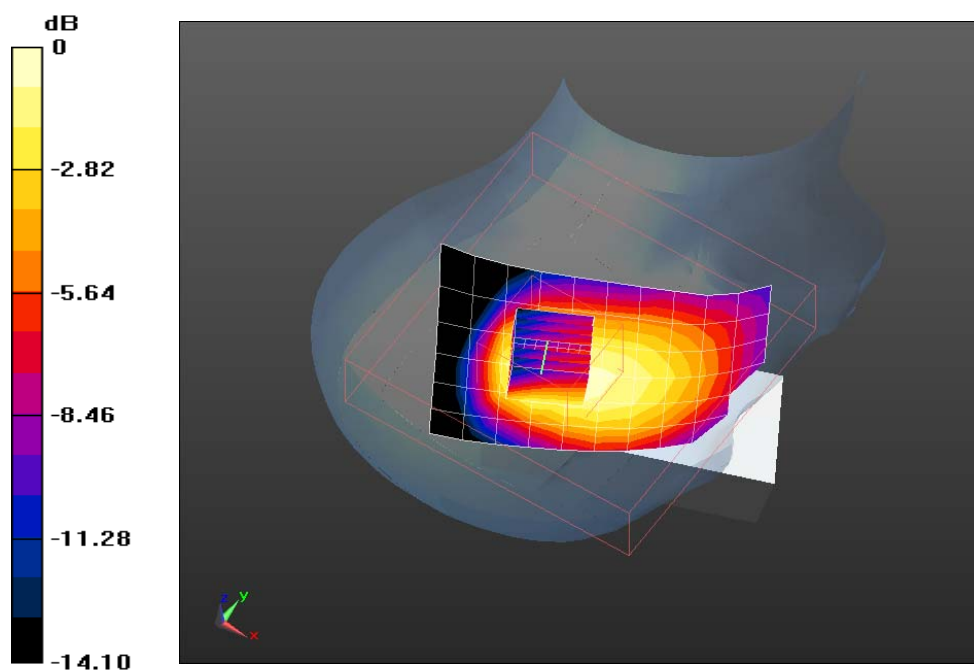

0 dB = 0.690mW/g

Plot 3

Date/Time: 9/2/2011 4:43:14 PM, Date/Time: 9/2/2011 5:00:15 PM

DUT: WiredTime; Serial: 80a56171

Communication System: CDMA RC3; Frequency: 836.52 MHz

Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.887$ mho/m; $\epsilon_r = 40.52$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(6.09, 6.09, 6.09);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, Version 52.6 (2);

Left-Hand-Side HSL/Touch Position_836MHz/Area Scan (11x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.687 mW/g

Left-Hand-Side HSL/Touch Position_836MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.532 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.895 W/kg

SAR(1 g) = 0.657 mW/g; SAR(10 g) = 0.458 mW/g

Maximum value of SAR (measured) = 0.771 mW/g

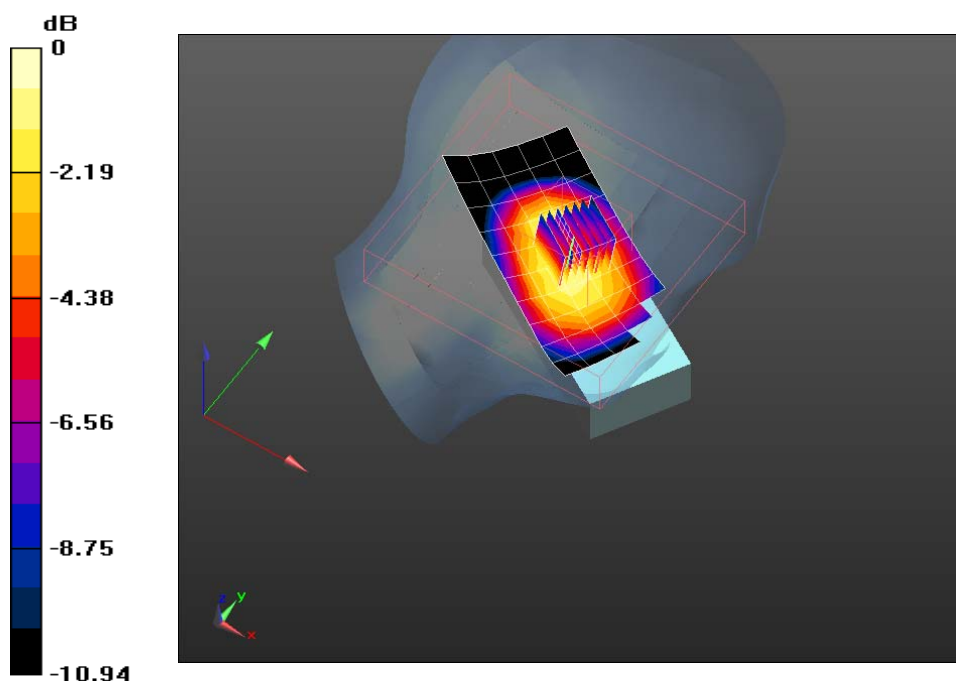

0 dB = 0.770mW/g

Plot 4

Date/Time: 9/2/2011 5:15:53 PM, Date/Time: 9/2/2011 5:22:52 PM

DUT: WiredTime; Serial: 80a56171

Communication System: CDMA RC3; Frequency: 836.52 MHz

Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.887$ mho/m; $\epsilon_r = 40.52$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(6.09, 6.09, 6.09);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, Version 52.6 (2);

Left-Hand-Side HSL/Tilt Position_836MHz/Area Scan (11x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.624 mW/g


Left-Hand-Side HSL/Tilt Position_836MHz/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.465 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.869 W/kg

SAR(1 g) = 0.549 mW/g; SAR(10 g) = 0.361 mW/g

Maximum value of SAR (measured) = 0.655 mW/g

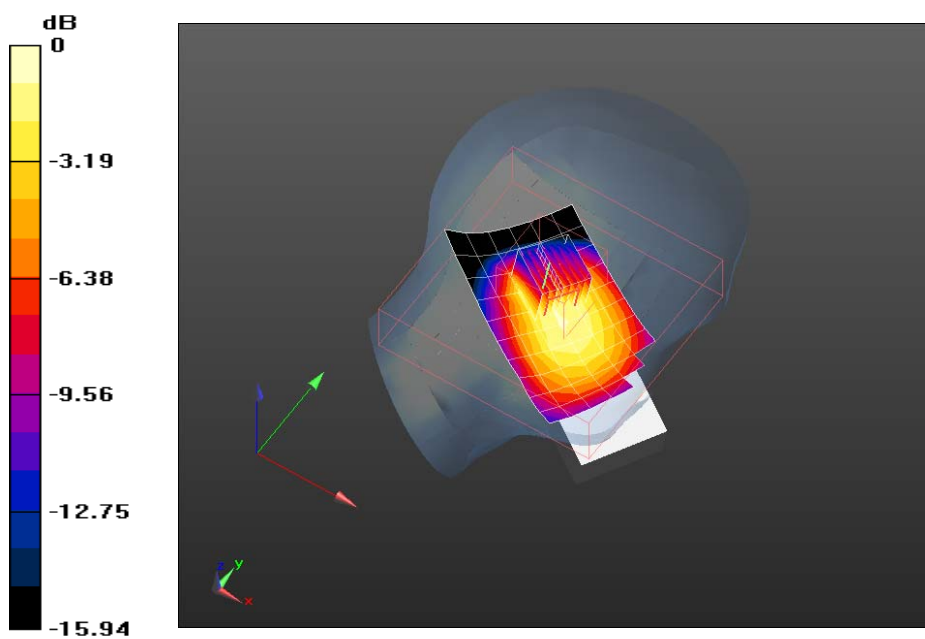

0 dB = 0.650mW/g

Plot 5

Date/Time: 9/2/2011 1:16:12 PM, Date/Time: 9/2/2011 1:22:49 PM

Test Laboratory: Cetecom Inc.

DUT: WiredTime; Type: Phone; Serial: 80A56171

Communication System: CDMA RC3; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.95$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3260; ConvF(5.12, 5.12, 5.12); Calibrated: 5/15/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1265; Calibrated: 5/13/2011
- Phantom: SAM Front; Type: QD000P40CD; Serial: TP-1637
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Right-Hand-Side HSL/Touch Position/Area Scan (11x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.542 mW/g


Right-Hand-Side HSL/Touch Position/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.524 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 2.312 W/kg

SAR(1 g) = 1.42 mW/g; SAR(10 g) = 0.846 mW/g

Maximum value of SAR (measured) = 1.707 mW/g

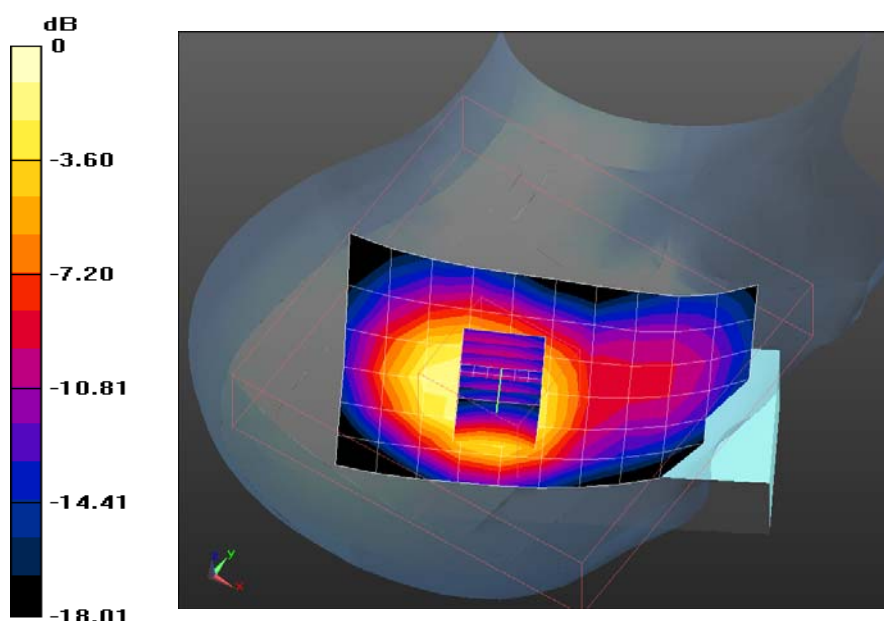

0 dB = 1.710mW/g

Plot 6

Date/Time: 9/2/2011 1:46:29 PM, Date/Time: 9/2/2011 1:56:37 PM

Test Laboratory: Cetecom Inc.

DUT: WiredTime; Type: Phone; Serial: 80A56171

Communication System: CDMA RC3; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.95$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3260; ConvF(5.12, 5.12, 5.12); Calibrated: 5/15/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1265; Calibrated: 5/13/2011
- Phantom: SAM Front; Type: QD000P40CD; Serial: TP-1637
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Right-Hand-Side HSL/Tilt Position/Area Scan (14x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.677 mW/g


Right-Hand-Side HSL/Tilt Position/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.159 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.469 W/kg

SAR(1 g) = 1.5 mW/g; SAR(10 g) = 0.829 mW/g

Maximum value of SAR (measured) = 1.800 mW/g

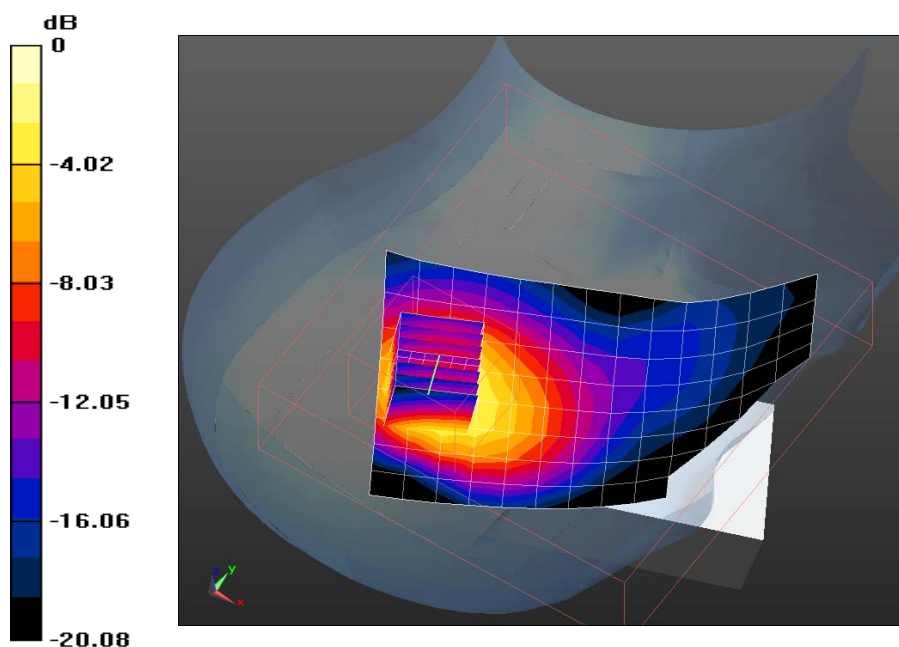

0 dB = 1.800mW/g

Plot 7

Date/Time: 9/2/2011 12:07:50 PM, Date/Time: 9/2/2011 12:14:33 PM

Test Laboratory: Cetecom Inc.

DUT: WiredTime; Type: Phone; Serial: 80A56171

Communication System: CDMA RC3; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.95$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3260; ConvF(5.12, 5.12, 5.12); Calibrated: 5/15/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1265; Calibrated: 5/13/2011
- Phantom: SAM Front; Type: QD000P40CD; Serial: TP-1637
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Left-Hand-Side HSL/Touch Position/Area Scan (11x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.581 mW/g


Left-Hand-Side HSL/Touch Position/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 33.120 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.070 W/kg

SAR(1 g) = 1.29 mW/g; SAR(10 g) = 0.814 mW/g

Maximum value of SAR (measured) = 1.537 mW/g

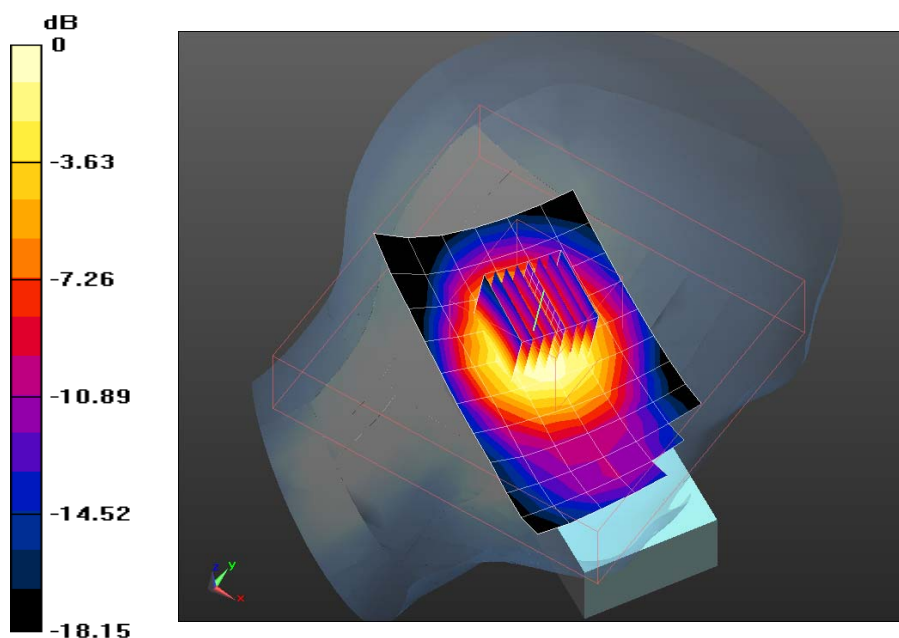

0 dB = 1.540mW/g

Plot 8

Date/Time: 9/2/2011 2:50:48 PM, Date/Time: 9/2/2011 2:57:16 PM

Test Laboratory: Cetecom Inc.

DUT: WiredTime; Type: Phone; Serial: 80A56171

Communication System: CDMA RC3; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.95$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3260; ConvF(5.12, 5.12, 5.12); Calibrated: 5/15/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1265; Calibrated: 5/13/2011
- Phantom: SAM Front; Type: QD000P40CD; Serial: TP-1637
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Left-Hand-Side HSL/Tilt Position/Area Scan (11x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.653 mW/g


Left-Hand-Side HSL/Tilt Position/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.730 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 2.302 W/kg

SAR(1 g) = 1.4 mW/g; SAR(10 g) = 0.780 mW/g

Maximum value of SAR (measured) = 1.702 mW/g

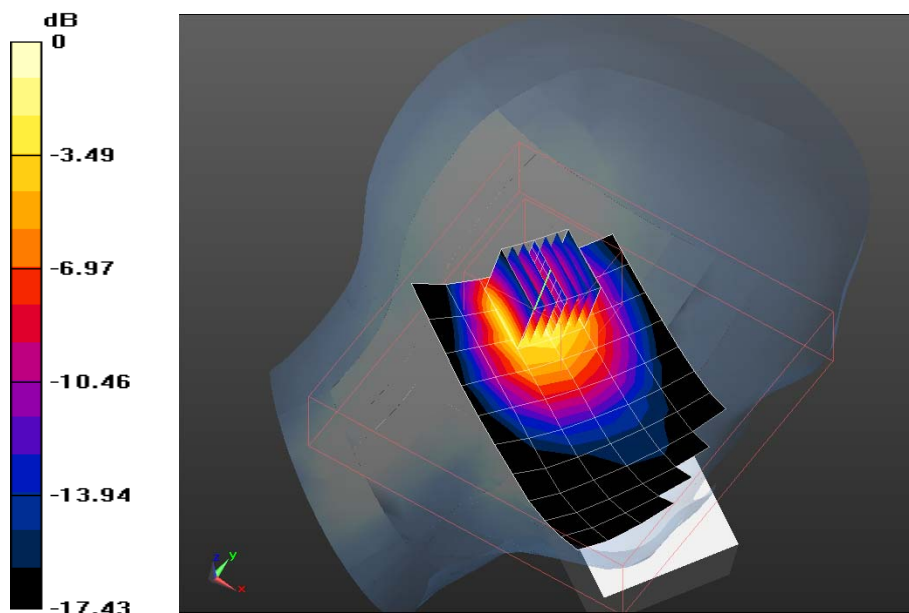

0 dB = 1.700mW/g

Plot 9

Date/Time: 9/9/2011 2:19:52 PM, Date/Time: 9/9/2011 2:26:24 PM

Test Laboratory: Cetecom Inc.

DUT: WiredTime; Type: Phone; Serial: 80A56171

Communication System: CDMA2000 RC3; Frequency: 1851.25 MHz

Medium parameters used: $f = 1851.25$ MHz; $\sigma = 1.414$ mho/m; $\epsilon_r = 39.59$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3260; ConvF(5.12, 5.12, 5.12); Calibrated: 5/15/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1265; Calibrated: 5/13/2011
- Phantom: SAM Front; Type: QD000P40CD; Serial: TP-1637
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Right-Hand Side HSL 9-9/Tilt Position_Low Channel/Area Scan (11x7x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.590 mW/g

Right-Hand Side HSL 9-9/Tilt Position_Low Channel/Zoom Scan (7x7x7)/Cube 0: Measurement grid:



dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.585 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 2.519 W/kg

SAR(1 g) = 1.52 mW/g; SAR(10 g) = 0.863 mW/g

Maximum value of SAR (measured) = 1.805 mW/g

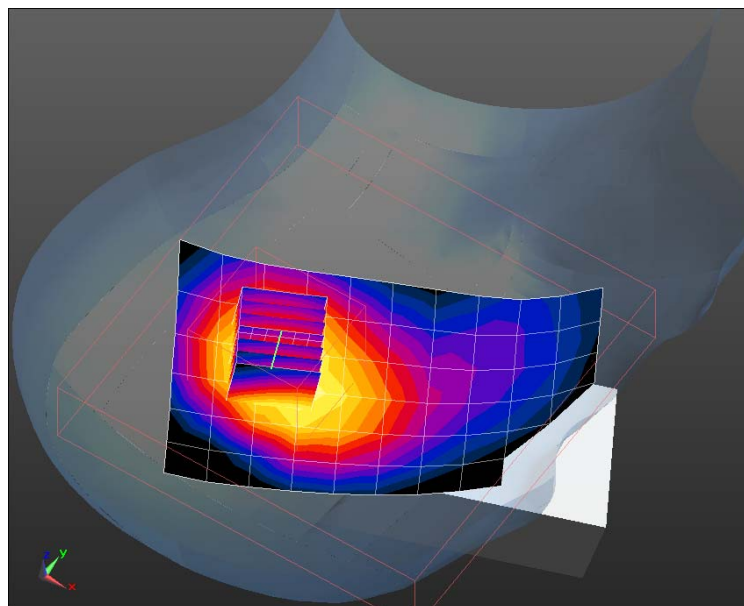

0 dB = 1.800mW/g

Plot 10

Date/Time: 9/2/2011 6:48:51 PM, Date/Time: 9/2/2011 6:55:00 PM

Test Laboratory: Cetecom Inc.

DUT: WiredTime; Type: Phone; Serial: 80A56171

Communication System: CDMA2000 RC3; Frequency: 1908.75 MHz

Medium parameters used: $f = 1908.75$ MHz; $\sigma = 1.438$ mho/m; $\epsilon_r = 38.67$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3260; ConvF(5.12, 5.12, 5.12); Calibrated: 5/15/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1265; Calibrated: 5/13/2011
- Phantom: SAM Front; Type: QD000P40CD; Serial: TP-1637
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Right-Hand-Side HSL/Tilt Position_High Channel/Area Scan (11x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.546 mW/g


Right-Hand-Side HSL/Tilt Position_High Channel/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.492 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 2.276 W/kg

SAR(1 g) = 1.36 mW/g; SAR(10 g) = 0.751 mW/g

Maximum value of SAR (measured) = 1.627 mW/g

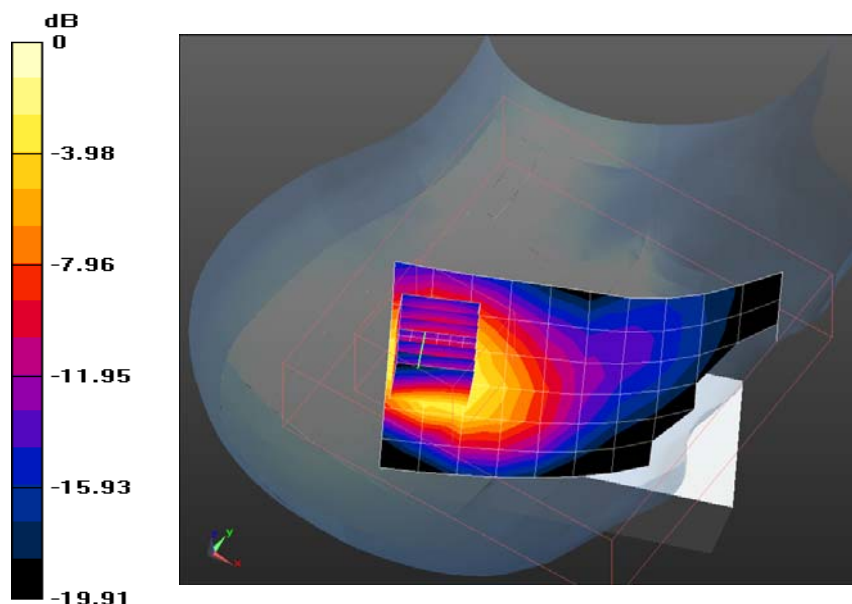

0 dB = 1.630mW/g

Plot 11

Date/Time: 9/9/2011 9:34:02 AM, Date/Time: 9/9/2011 9:40:24 AM

DUT: WiredTime; Serial: 80A56171

Communication System: CDMA RC3; Frequency: 836.52 MHz

Medium parameters used: $f = 836.52$ MHz; $\sigma = 1.017$ mho/m; $\epsilon_r = 55.42$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(6.05, 6.05, 6.05);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1092
- Measurement SW: DASY52, Version 52.6 (2);

Flat-Section MSL 9-8/Front 25mm_836MHz/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.373 mW/g


Flat-Section MSL 9-8/Front 25mm_836MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.387 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.456 W/kg

SAR(1 g) = 0.340 mW/g; SAR(10 g) = 0.251 mW/g

Maximum value of SAR (measured) = 0.382 mW/g

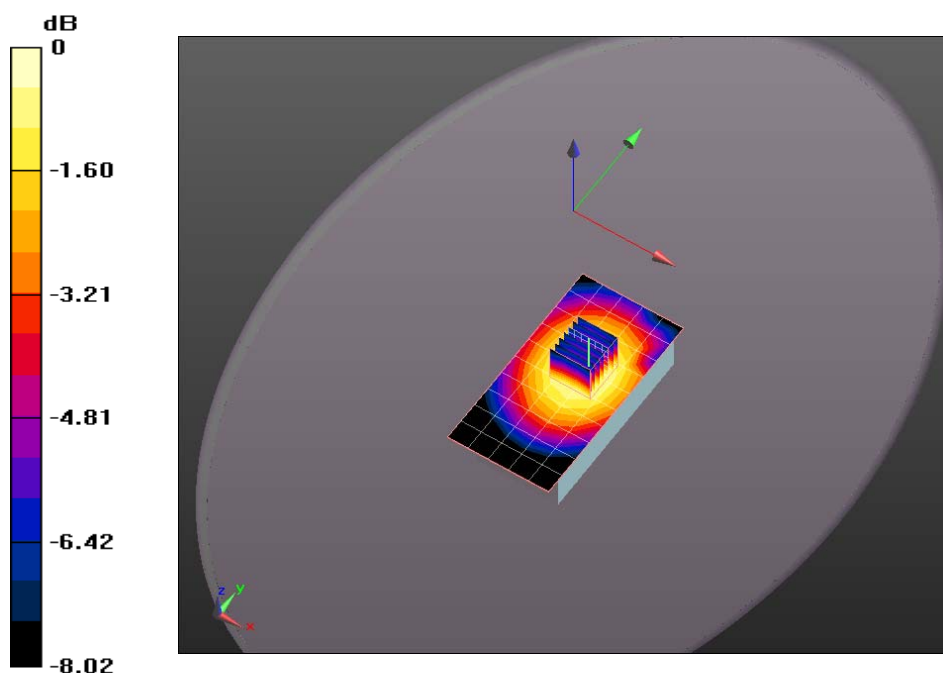

0 dB = 0.380mW/g

Plot 12

Date/Time: 9/9/2011 10:03:38 AM, Date/Time: 9/9/2011 10:10:00 AM

DUT: WiredTime; Serial: 80A56171

Communication System: CDMA RC3; Frequency: 836.52 MHz

Medium parameters used: $f = 836.52$ MHz; $\sigma = 1.017$ mho/m; $\epsilon_r = 55.42$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(6.05, 6.05, 6.05);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1092
- Measurement SW: DASY52, Version 52.6 (2);

Flat-Section MSL 9-8/Back 25mm_836MHz/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.387 mW/g


Flat-Section MSL 9-8/Back 25mm_836MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.933 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.494 W/kg

SAR(1 g) = 0.373 mW/g; SAR(10 g) = 0.276 mW/g

Maximum value of SAR (measured) = 0.417 mW/g

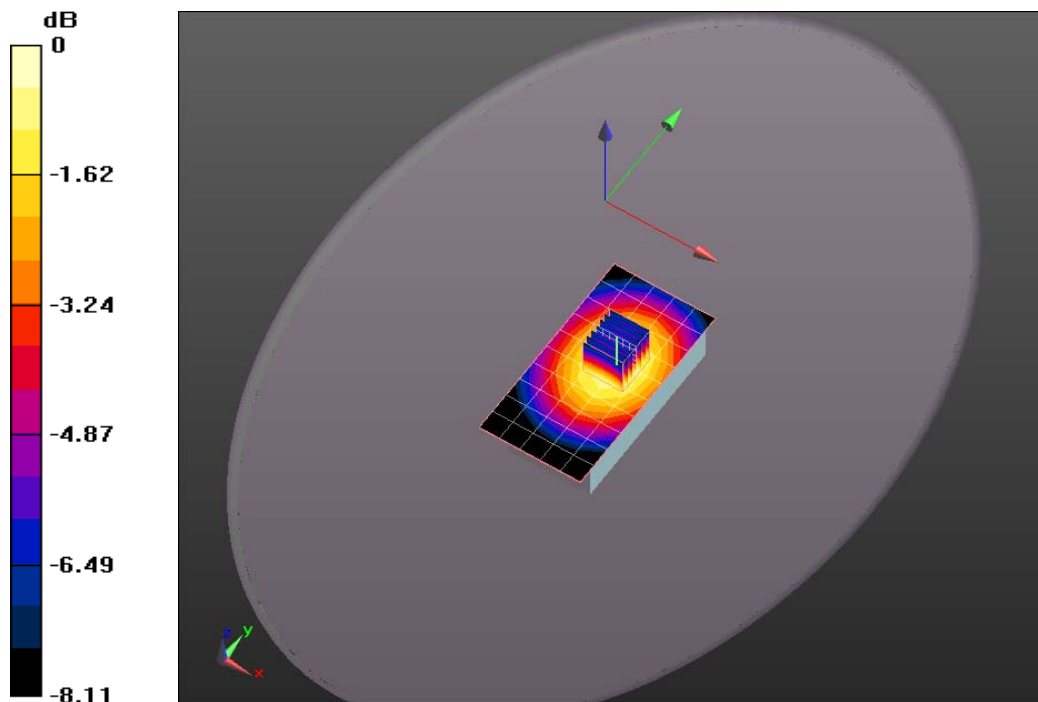

0 dB = 0.420mW/g

Plot 13

Date/Time: 9/6/2011 1:56:43 PM, Date/Time: 9/6/2011 2:04:42 PM

DUT: WiredTime; Serial: 80A56171

Communication System: CDMA RC3; Frequency: 836.52 MHz

Medium parameters used: $f = 836.52$ MHz; $\sigma = 1.008$ mho/m; $\epsilon_r = 55.75$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(6.05, 6.05, 6.05);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1092
- Measurement SW: DASY52, Version 52.6 (2);

Flat-Section MSL/Front w/ Case_836MHz/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.523 mW/g


Flat-Section MSL/Front w/ Case_836MHz/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.081 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.681 W/kg

SAR(1 g) = 0.338 mW/g; SAR(10 g) = 0.201 mW/g

Maximum value of SAR (measured) = 0.450 mW/g

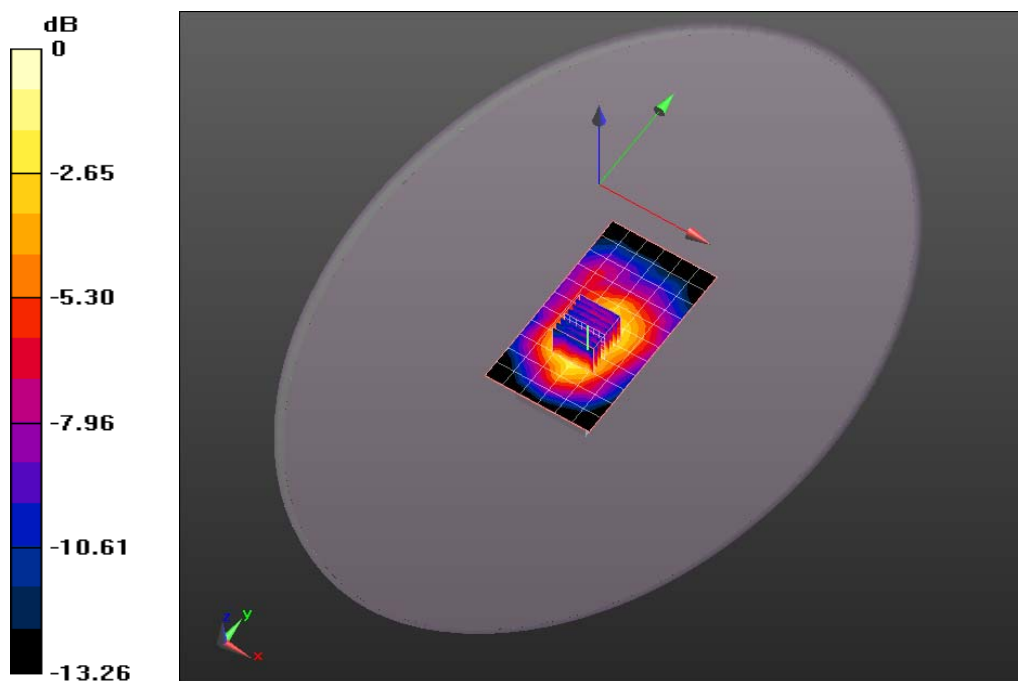

0 dB = 0.450mW/g

Plot 14

Date/Time: 9/7/2011 8:56:58 AM, Date/Time: 9/7/2011 9:04:16 AM

DUT: WiredTime; Serial: 80A56171

Communication System: CDMA RC3; Frequency: 836.52 MHz

Medium parameters used: $f = 836.52$ MHz; $\sigma = 1.008$ mho/m; $\epsilon_r = 55.75$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(6.05, 6.05, 6.05);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1092
- Measurement SW: DASY52, Version 52.6 (2);

Flat-Section MSL/Back w/ Case_836MHz/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.208 mW/g


Flat-Section MSL/Back w/ Case_836MHz/Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.823 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.931 W/kg

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.631 mW/g

Maximum value of SAR (measured) = 1.317 mW/g

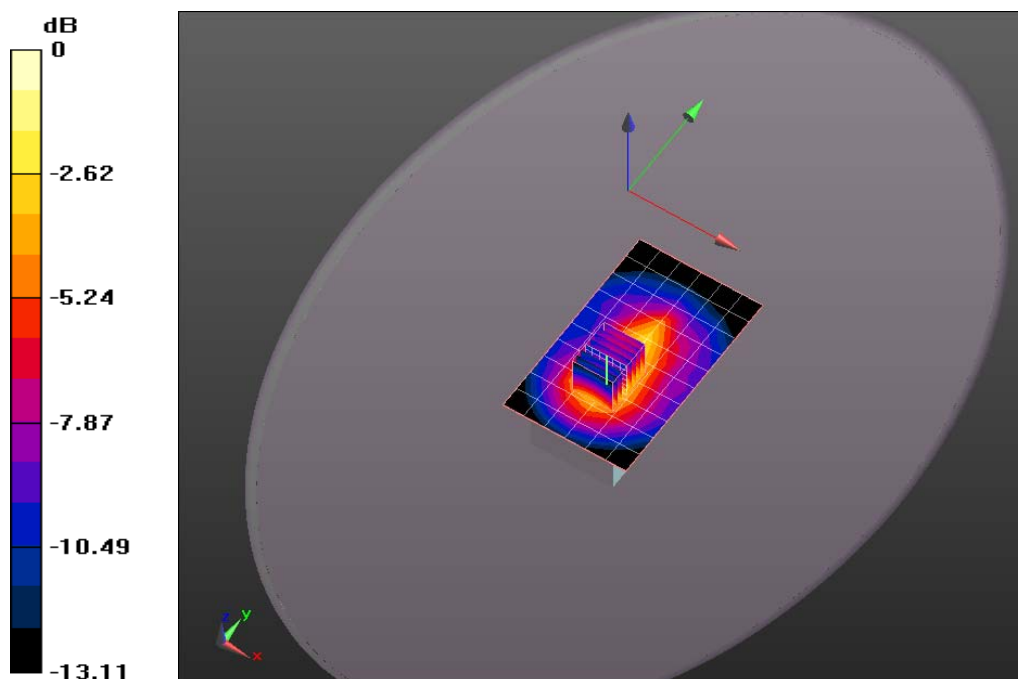

0 dB = 1.320mW/g

Plot 15

Date/Time: 9/7/2011 8:32:18 AM, Date/Time: 9/7/2011 8:39:38 AM

DUT: WiredTime; Serial: 80A56171

Communication System: CDMA RC3; Frequency: 824.7 MHz

Medium parameters used: $f = 824.7$ MHz; $\sigma = 0.996$ mho/m; $\epsilon_r = 55.94$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(6.05, 6.05, 6.05);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1092
- Measurement SW: DASY52, Version 52.6 (2);

Flat-Section MSL/Back w/ Case_Lo Ch. 824MHz/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.015 mW/g


Flat-Section MSL/Back w/ Case_Lo Ch. 824MHz/Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.952 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.626 W/kg

SAR(1 g) = 0.866 mW/g; SAR(10 g) = 0.514 mW/g

Maximum value of SAR (measured) = 1.090 mW/g

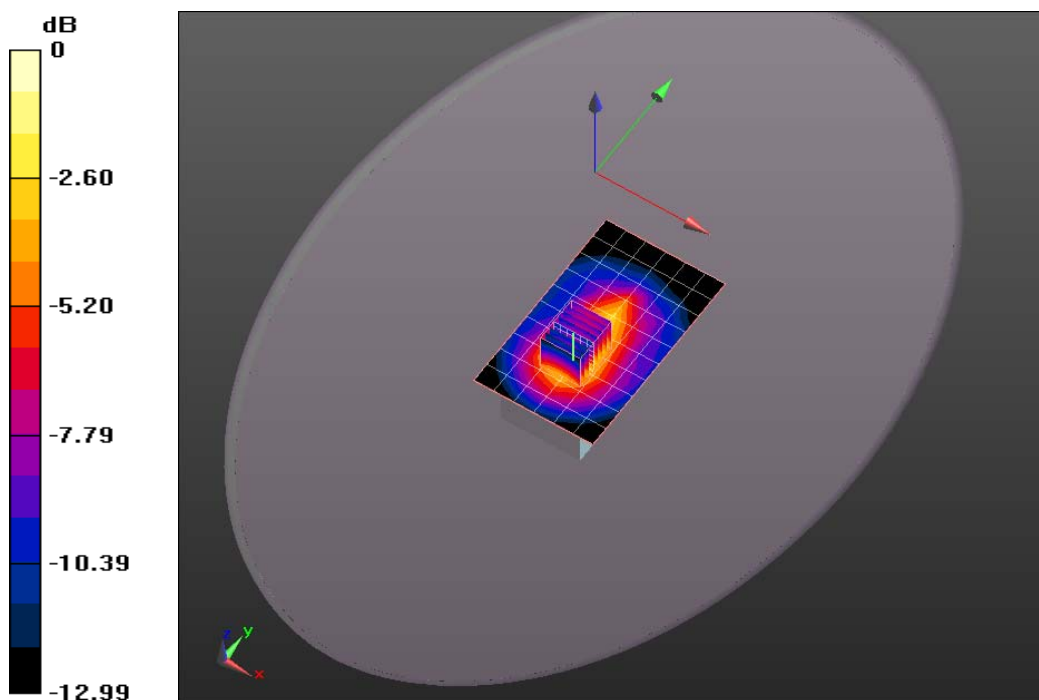

0 dB = 1.090mW/g

Plot 16

Date/Time: 9/7/2011 8:08:09 AM, Date/Time: 9/7/2011 8:15:26 AM

DUT: WiredTime; Serial: 80A56171

Communication System: CDMA RC3; Frequency: 848.31 MHz

Medium parameters used: $f = 848.31$ MHz; $\sigma = 1.018$ mho/m; $\epsilon_r = 55.62$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(6.05, 6.05, 6.05);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1092
- Measurement SW: DASY52, Version 52.6 (2);

Flat-Section MSL/Back w/ Case_Hi Ch. 848MHz/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.594 mW/g

Flat-Section MSL/Back w/ Case_Hi Ch. 848MHz/Zoom Scan (7x8x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.924 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.946 W/kg

SAR(1 g) = 0.510 mW/g; SAR(10 g) = 0.314 mW/g

Maximum value of SAR (measured) = 0.648 mW/g

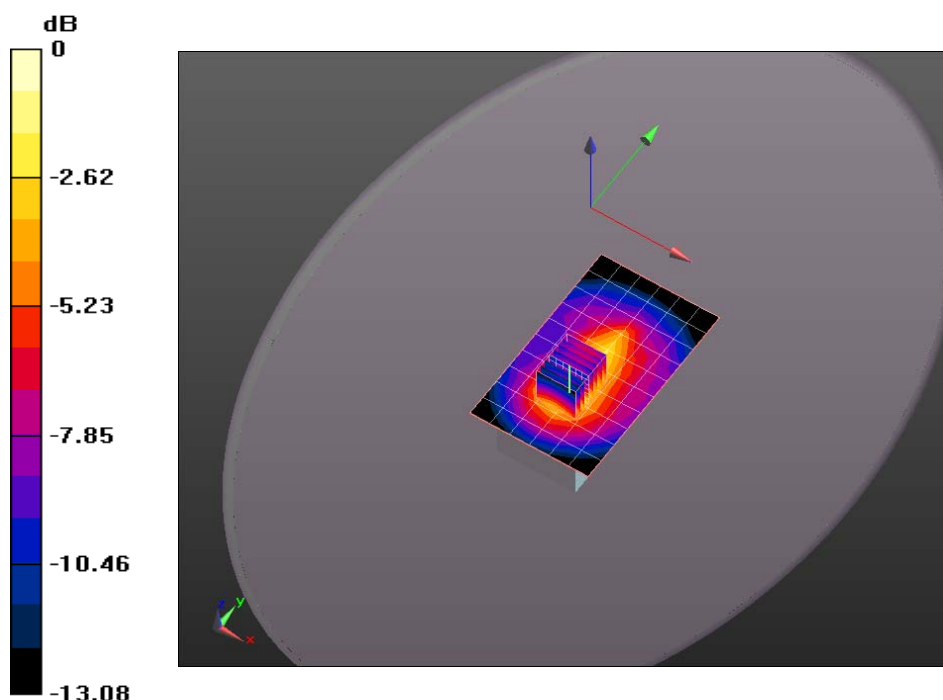

0 dB = 0.650mW/g

Plot 17

Date/Time: 9/9/2011 10:36:09 AM, Date/Time: 9/9/2011 10:42:43 AM

Test Laboratory: Cetecom Inc.

DUT: WiredTime; Type: Phone; Serial: 80A56171

Communication System: CDMA RC3; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.474$ mho/m; $\epsilon_r = 53.96$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3260; ConvF(4.64, 4.64, 4.64); Calibrated: 5/15/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1265; Calibrated: 5/13/2011
- Phantom: SAM Back; Type: QD000P40CD; Serial: TP-1638
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Flat Section MSL 9-8/Front 25mm/Area Scan (6x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.154 mW/g


Flat Section MSL 9-8/Front 25mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.340 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.210 W/kg

SAR(1 g) = 0.138 mW/g; SAR(10 g) = 0.089 mW/g

Maximum value of SAR (measured) = 0.161 mW/g

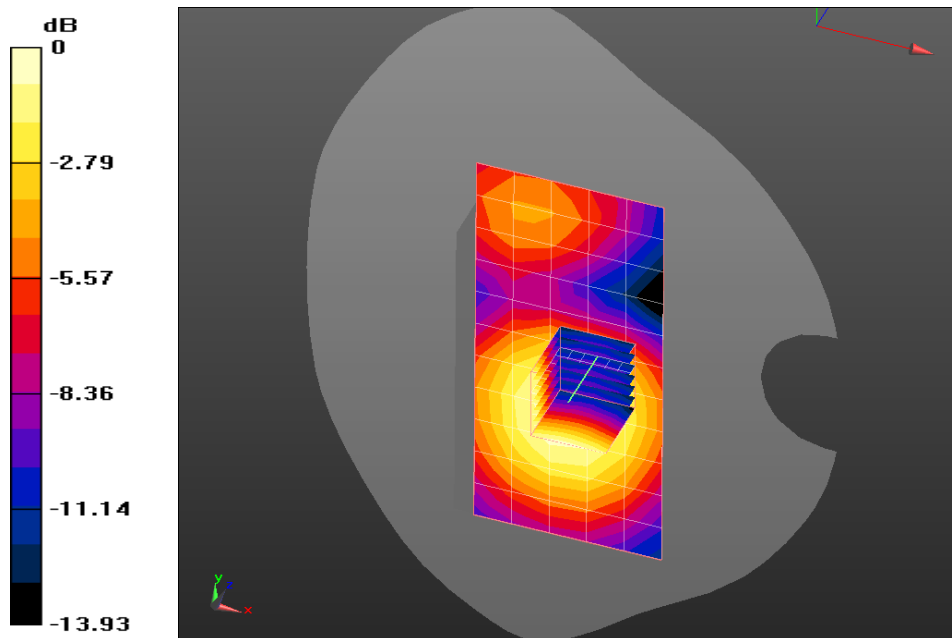

0 dB = 0.160mW/g

Plot 18

Date/Time: 9/8/2011 4:19:44 PM, Date/Time: 9/8/2011 4:26:16 PM

Test Laboratory: Cetecom Inc.

DUT: WiredTime; Type: Phone; Serial: 80A56171

Communication System: CDMA RC3; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.474$ mho/m; $\epsilon_r = 53.96$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3260; ConvF(4.64, 4.64, 4.64); Calibrated: 5/15/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1265; Calibrated: 5/13/2011
- Phantom: SAM Back; Type: QD000P40CD; Serial: TP-1638
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Flat Section MSL 9-8/Back 25mm/Area Scan (6x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.108 mW/g


Flat Section MSL 9-8/Back 25mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.323 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.094 mW/g; SAR(10 g) = 0.060 mW/g

Maximum value of SAR (measured) = 0.109 mW/g

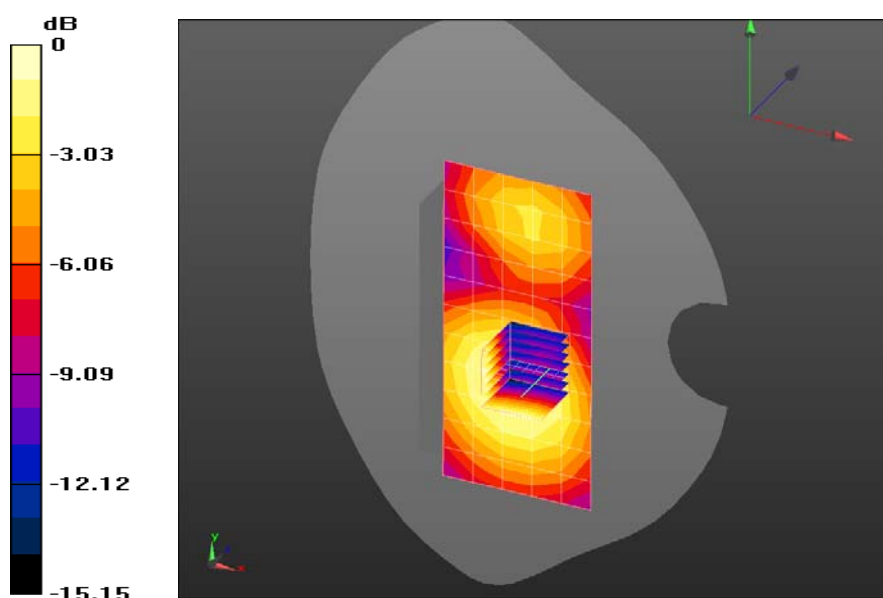

0 dB = 0.110mW/g

Plot 19

Date/Time: 9/7/2011 11:33:58 AM, Date/Time: 9/7/2011 11:40:26 AM

Test Laboratory: Cetecom Inc.

DUT: WiredTime; Type: Phone; Serial: 80A56171

Communication System: CDMA RC3; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.483$ mho/m; $\epsilon_r = 53.96$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3260; ConvF(4.64, 4.64, 4.64); Calibrated: 5/15/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1265; Calibrated: 5/13/2011
- Phantom: SAM Back; Type: QD000P40CD; Serial: TP-1638
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Flat-Section MSL/Front 0mm with Case/Area Scan (6x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.328 mW/g


Flat-Section MSL/Front 0mm with Case/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.928 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.499 W/kg

SAR(1 g) = 0.264 mW/g; SAR(10 g) = 0.149 mW/g

Maximum value of SAR (measured) = 0.327 mW/g

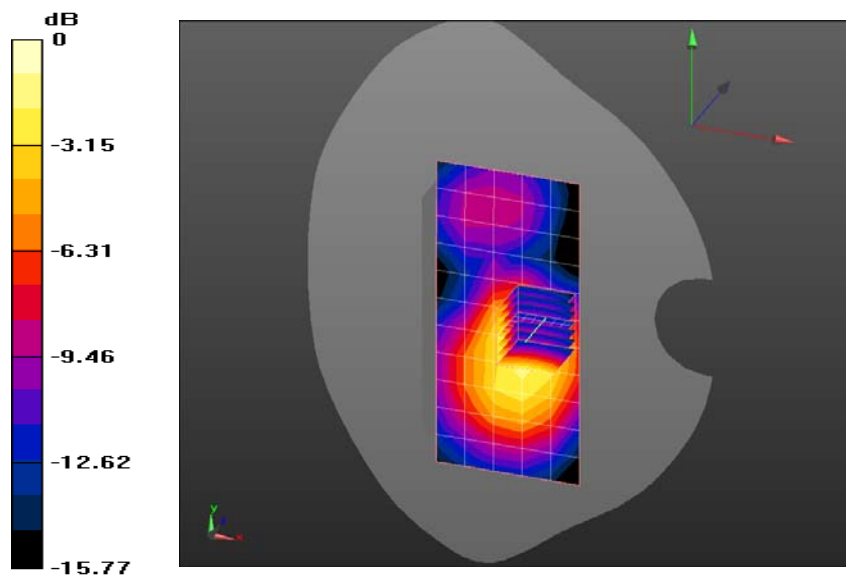

0 dB = 0.330mW/g

Plot 20

Date/Time: 9/7/2011 11:10:24 AM, Date/Time: 9/7/2011 11:16:50 AM

Test Laboratory: Cetecom Inc.

DUT: WiredTime; Type: Phone; Serial: 80A56171

Communication System: CDMA RC3; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.483$ mho/m; $\epsilon_r = 53.96$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3260; ConvF(4.64, 4.64, 4.64); Calibrated: 5/15/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1265; Calibrated: 5/13/2011
- Phantom: SAM Back; Type: QD000P40CD; Serial: TP-1638
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Flat-Section MSL/Back 0mm with Case/Area Scan (6x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.480 mW/g


Flat-Section MSL/Back 0mm with Case/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.099 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.777 W/kg

SAR(1 g) = 0.425 mW/g; SAR(10 g) = 0.240 mW/g

Maximum value of SAR (measured) = 0.520 mW/g

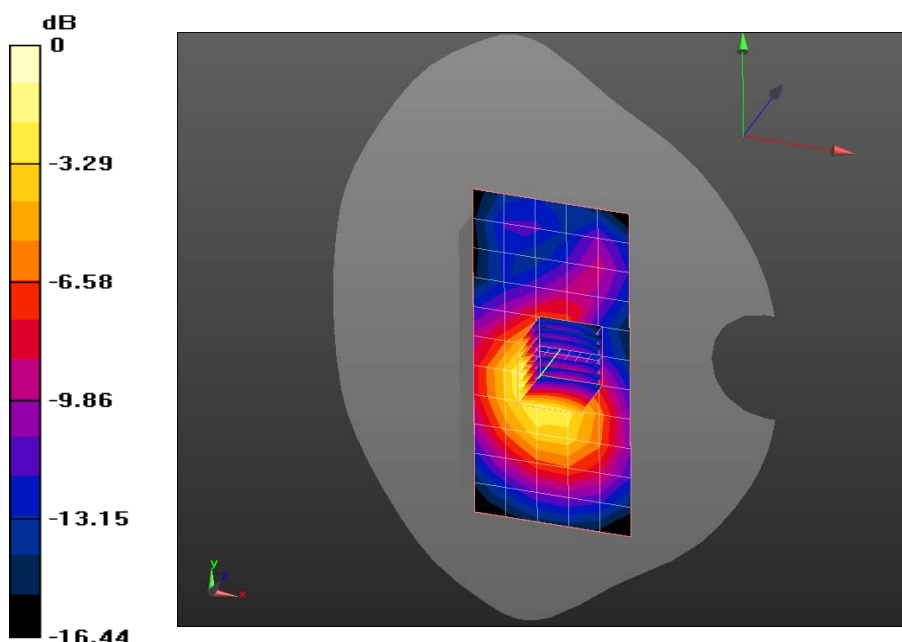

0 dB = 0.520mW/g

Plot 21

Date/Time: 9/2/2011 12:15:10 PM, Date/Time: 9/2/2011 12:18:48 PM

DUT: Dipole 835 MHz - D835V2 - SN4d113; Serial: D835V2 - SN:4d113

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.885$ mho/m; $\epsilon_r = 40.52$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(6.09, 6.09, 6.09);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, Version 52.6 (2);

System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=1W, dist=3.0mm (ES-Probe)/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 10.498 mW/g


System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=1W, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 118.0 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 14.693 W/kg

SAR(1 g) = 9.82 mW/g; SAR(10 g) = 6.41 mW/g

Maximum value of SAR (measured) = 11.457 mW/g

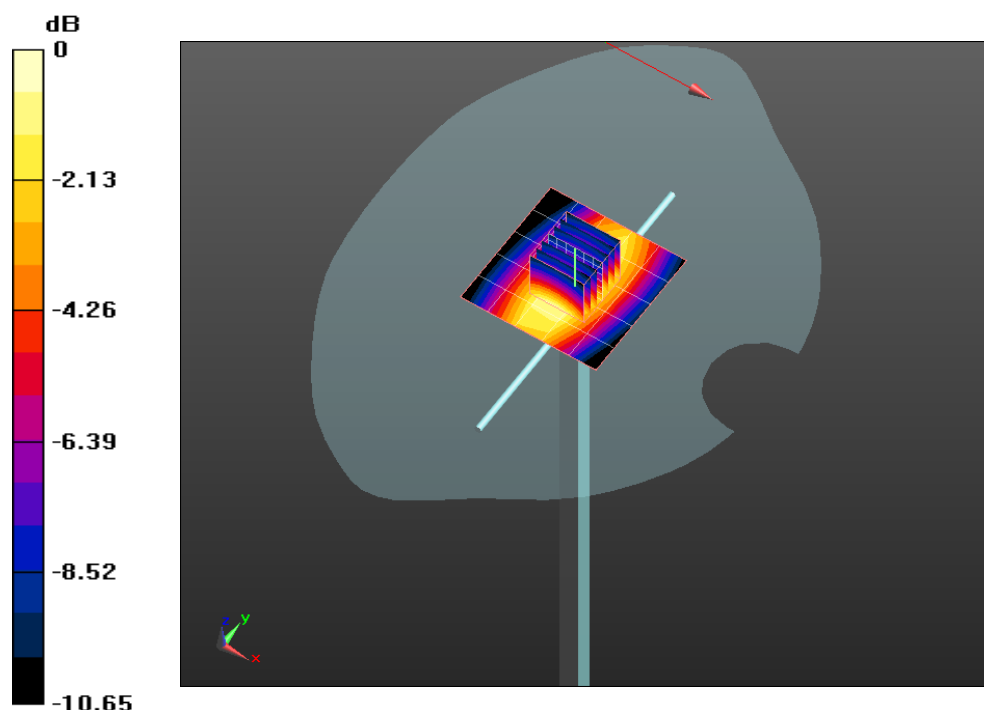

0 dB = 11.460mW/g

Plot 22

Date/Time: 9/7/2011 4:07:44 PM, Date/Time: 9/7/2011 4:11:27 PM

DUT: Dipole 835 MHz - D835V2 - SN4d113; Serial: D835V2 - SN:4d113

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.904$ mho/m; $\epsilon_r = 41.58$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(6.09, 6.09, 6.09);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: SAM; Type: QD 000 P40 CC; Serial: 1592
- Measurement SW: DASY52, Version 52.6 (2);

System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=1W, dist=3.0mm (ES-Probe)/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 10.199 mW/g


System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=1W, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 116.1 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 14.535 W/kg

SAR(1 g) = 9.69 mW/g; SAR(10 g) = 6.35 mW/g

Maximum value of SAR (measured) = 11.331 mW/g

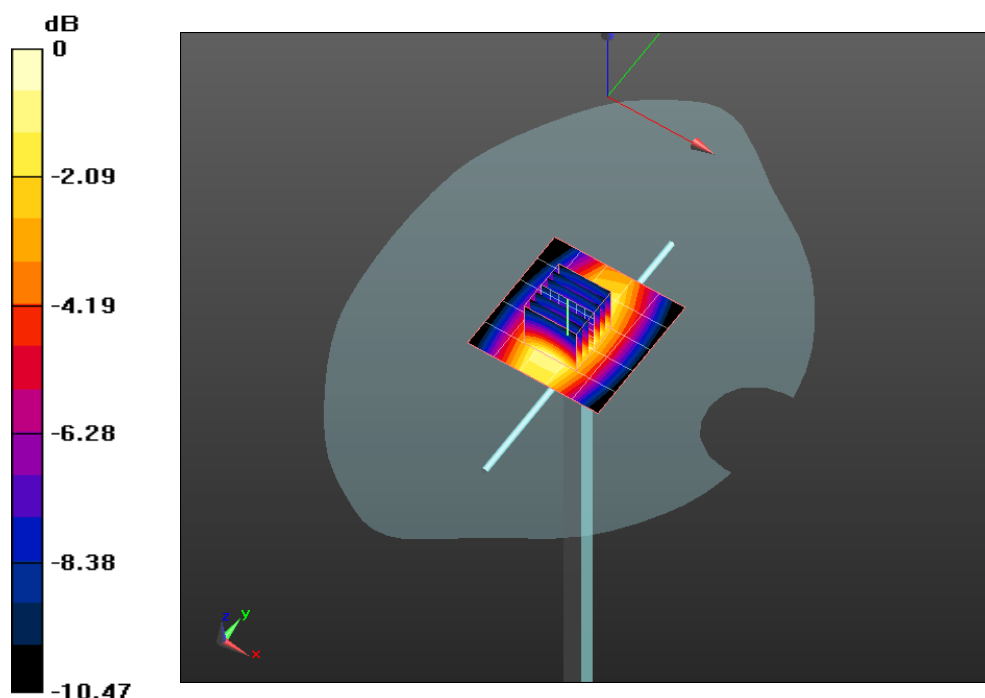

0 dB = 11.330mW/g

Plot 23

Date/Time: 9/6/2011 11:15:31 AM, Date/Time: 9/6/2011 11:19:09 AM

DUT: Dipole 835 MHz - D835V2 - SN4d113; Serial: D835V2 - SN:4d113

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 1.008$ mho/m; $\epsilon_r = 55.78$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(6.05, 6.05, 6.05);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1092
- Measurement SW: DASY52, Version 52.6 (2);

System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=1W, dist=3.0mm (ES-Probe)/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 11.693 mW/g


System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=1W, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 108.3 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 15.088 W/kg

SAR(1 g) = 10.3 mW/g; SAR(10 g) = 6.76 mW/g

Maximum value of SAR (measured) = 12.019 mW/g

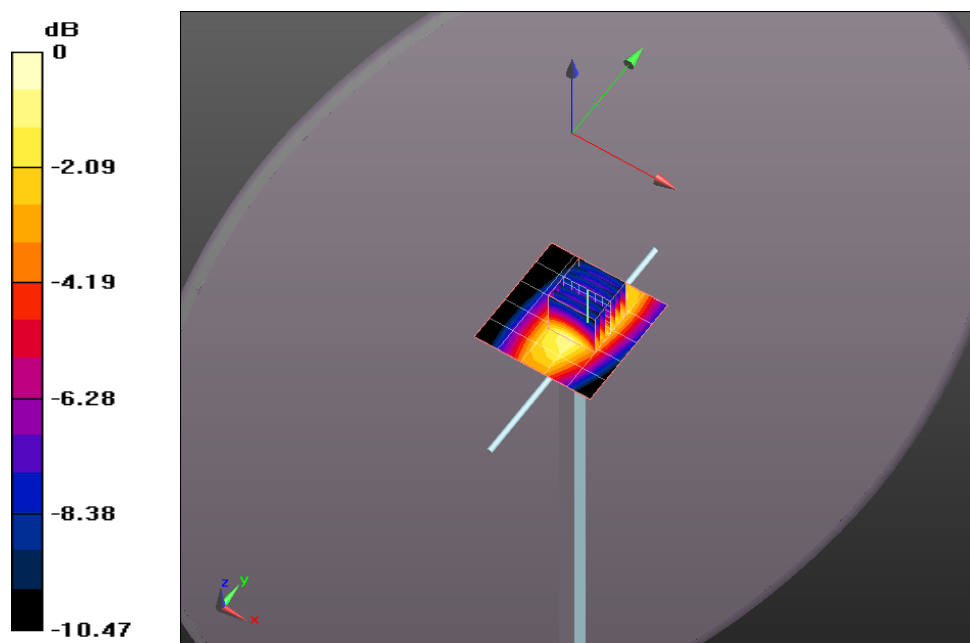

0 dB = 12.020mW/g

Plot 24

Date/Time: 9/8/2011 4:21:48 PM, Date/Time: 9/8/2011 4:25:28 PM

DUT: Dipole 835 MHz - D835V2 - SN4d113; Serial: D835V2 - SN:4d113

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 1.016$ mho/m; $\epsilon_r = 55.48$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3244; ConvF(6.05, 6.05, 6.05);
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1233; Calibrated: 10/13/2010
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1092
- Measurement SW: DASY52, Version 52.6 (2);

System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=1W, dist=3.0mm (ES-Probe)/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 12.200 mW/g


System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=1W, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 124.8 V/m; Power Drift = -0.85 dB

Peak SAR (extrapolated) = 15.992 W/kg

SAR(1 g) = 10.6 mW/g; SAR(10 g) = 6.96 mW/g

Maximum value of SAR (measured) = 12.485 mW/g

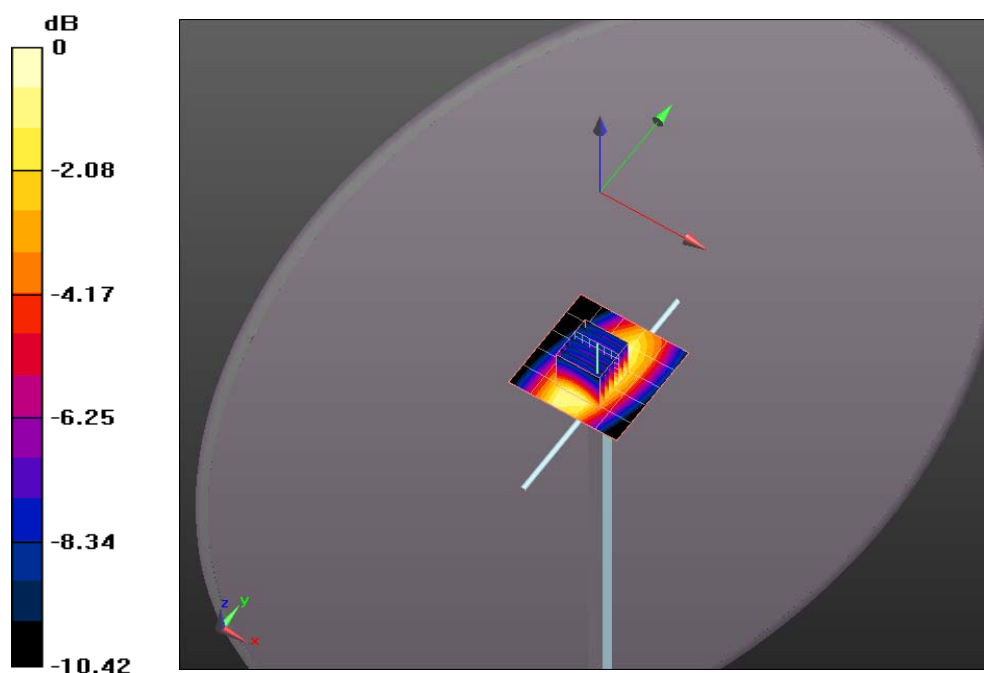

Plot 25

Date/Time: 9/2/2011 11:16:51 AM, Date/Time: 9/2/2011 11:20:47 AM

Test Laboratory: Cetecom Inc.

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d135

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.444$ mho/m; $\epsilon_r = 38.73$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3260; ConvF(5.12, 5.12, 5.12); Calibrated: 5/15/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1265; Calibrated: 5/13/2011
- Phantom: SAM Front; Type: QD000P40CD; Serial: TP-1637
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=1W, dist=3.0mm (ES-Probe)/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 35.187 mW/g


System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=1W, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 191.3 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 76.553 W/kg

SAR(1 g) = 40.1 mW/g; SAR(10 g) = 20.5 mW/g

Maximum value of SAR (measured) = 44.922 mW/g

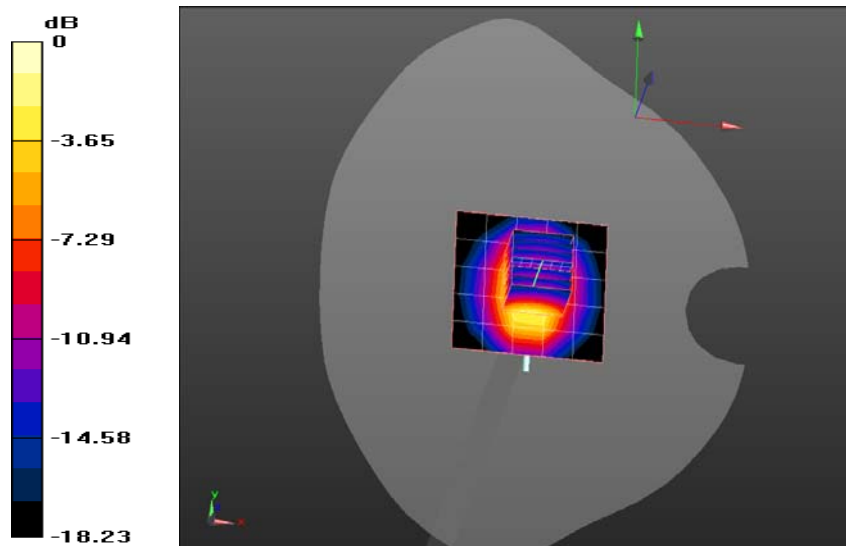

0 dB = 44.920mW/g

Plot 26

Date/Time: 9/9/2011 10:04:16 AM, Date/Time: 9/9/2011 10:07:40 AM

Test Laboratory: Cetecom Inc.

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d135

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.436$ mho/m; $\epsilon_r = 38.81$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3260; ConvF(5.12, 5.12, 5.12); Calibrated: 5/15/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1265; Calibrated: 5/13/2011
- Phantom: SAM Front; Type: QD000P40CD; Serial: TP-1637
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=1W, dist=3.0mm (ES-Probe)/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 37.195 mW/g


System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=1W, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 192.8 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 77.533 W/kg

SAR(1 g) = 40.3 mW/g; SAR(10 g) = 20.5 mW/g

Maximum value of SAR (measured) = 45.357 mW/g

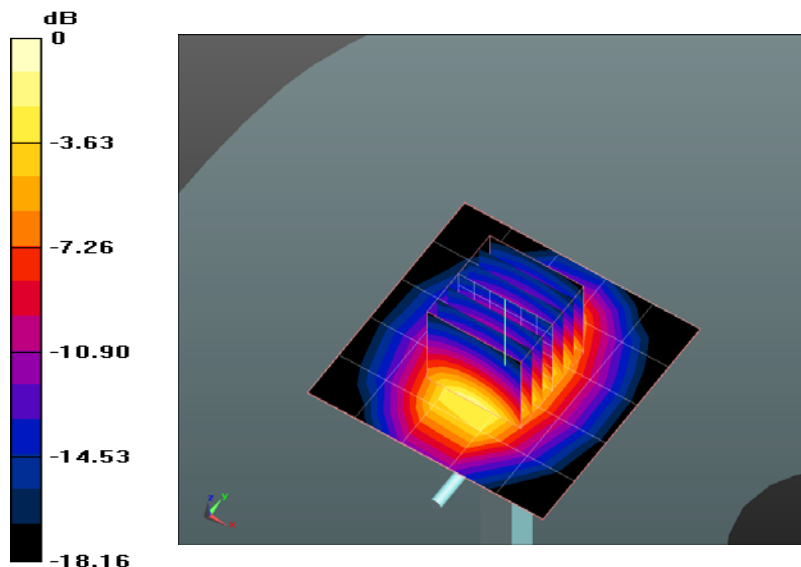

0 dB = 45.360mW/g

Plot 27

Date/Time: 9/6/2011 3:34:14 PM, Date/Time: 9/6/2011 3:37:41 PM

Test Laboratory: Cetecom Inc.

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d135

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.481$ mho/m; $\epsilon_r = 53.69$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3260; ConvF(4.64, 4.64, 4.64); Calibrated: 5/15/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1265; Calibrated: 5/13/2011
- Phantom: SAM Back; Type: QD000P40CD; Serial: TP-1638
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=1W, dist=3.0mm (ES-Probe)/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 32.324 mW/g


System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=1W, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 181.6 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 70.353 W/kg

SAR(1 g) = 38 mW/g; SAR(10 g) = 19.6 mW/g

Maximum value of SAR (measured) = 42.777 mW/g

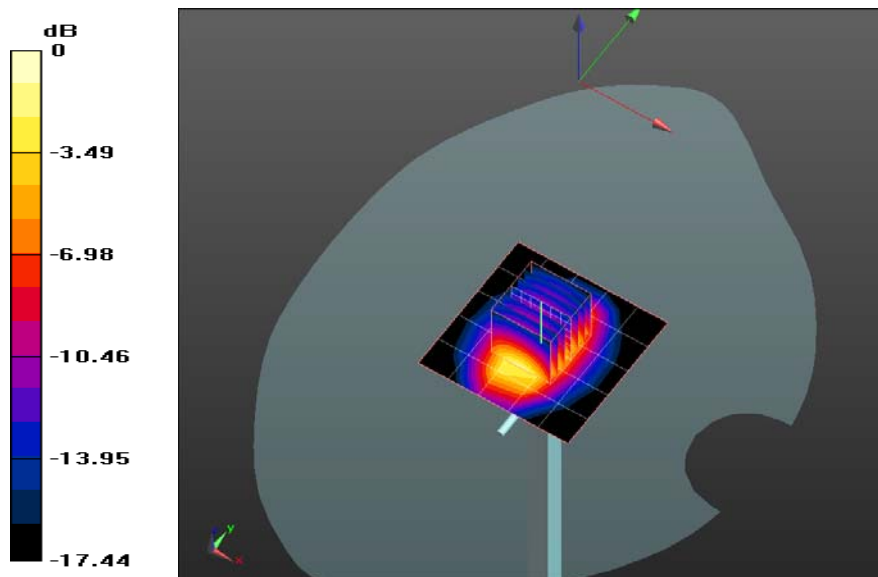

0 dB = 42.780mW/g

Plot 28

Date/Time: 9/8/2011 3:19:13 PM, Date/Time: 9/8/2011 3:22:41 PM

Test Laboratory: Cetecom Inc.

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d135

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.475$ mho/m; $\epsilon_r = 53.72$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3260; ConvF(4.64, 4.64, 4.64); Calibrated: 5/15/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1265; Calibrated: 5/13/2011
- Phantom: SAM Back; Type: QD000P40CD; Serial: TP-1638
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=1W, dist=3.0mm (ES-Probe)/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 34.751 mW/g


System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=1W, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 187.3 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 69.607 W/kg

SAR(1 g) = 37.5 mW/g; SAR(10 g) = 19.5 mW/g

Maximum value of SAR (measured) = 42.357 mW/g

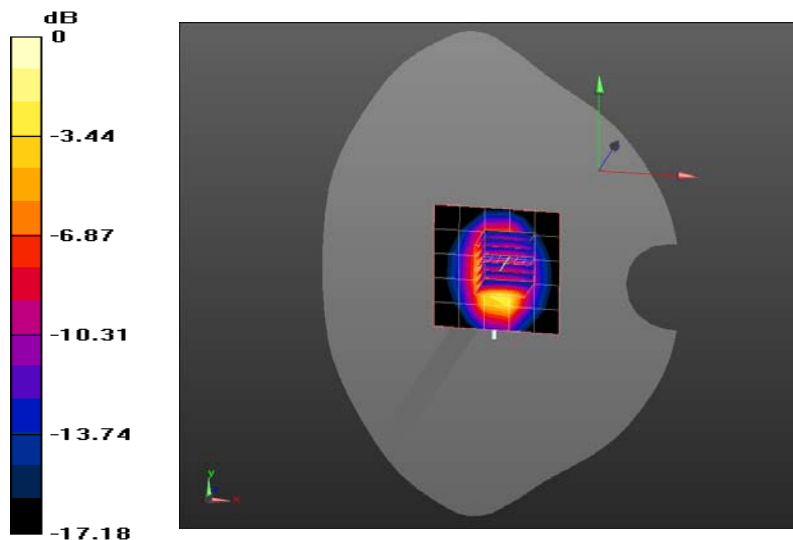

0 dB = 42.360mW/g