



[www.nemko.com](http://www.nemko.com)



**Test Report:**

83533-9R1TRFWL

**Applicant:**

Ingrid Inc.  
920 Cassatt Rd. Suite 220  
Berwyn, PA  
19312 USA

**Apparatus:**

GEC1000

**FCC ID:**

S9PGEC1000

**In Accordance With:**

FCC Part 15 Subpart C, 15.247  
FHSS System and Digitally Modulated Radiators  
902-928MHz, 2400 - 2483.5 MHz, 5725-5850MHz

**Tested By:**

Nemko Canada Inc.  
303 River Road  
Ottawa, Ontario  
K1V 1H2

**Authorized By:**

A handwritten signature in blue ink, appearing to read 'Jason Nixon'.

Jason Nixon, Telecom Specialist

**Date:**

May 15, 2007

**Total Number of Pages:**

30

## Report Summary

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C. Radiated tests were conducted in accordance with ANSI C63.4-2003. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.

The assessment summary is as follows:

|                                |                               |
|--------------------------------|-------------------------------|
| <b>Apparatus Assessed:</b>     | GEC1000                       |
| <b>Specification:</b>          | FCC Part 15 Subpart C, 15.247 |
| <b>Compliance Status:</b>      | Complies                      |
| <b>Exclusions:</b>             | None                          |
| <b>Non-compliances:</b>        | None                          |
| <b>Report Release History:</b> | Original Release              |

Author: Heng Lin      EMC / Wireless Specialist

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025.

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

## TABLE OF CONTENTS

|                                                                                                                                               |           |
|-----------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| <b>Report Summary.....</b>                                                                                                                    | <b>2</b>  |
| <b>Section 1 : Equipment Under Test.....</b>                                                                                                  | <b>4</b>  |
| 1.1 Product Identification .....                                                                                                              | 4         |
| 1.2 Samples Submitted for Assessment.....                                                                                                     | 4         |
| 1.3 Technical Specifications of the EUT .....                                                                                                 | 4         |
| <b>Section 2 : Test Conditions.....</b>                                                                                                       | <b>5</b>  |
| 2.1 Specifications .....                                                                                                                      | 5         |
| 2.2 Deviations From Laboratory Test Procedures .....                                                                                          | 5         |
| 2.3 Test Environment .....                                                                                                                    | 5         |
| 2.4 Test Equipment.....                                                                                                                       | 5         |
| <b>Section 3 : Observations .....</b>                                                                                                         | <b>6</b>  |
| 3.1 Modifications Performed During Assessment .....                                                                                           | 6         |
| 3.2 Record Of Technical Judgements .....                                                                                                      | 6         |
| 3.3 EUT Parameters Affecting Compliance .....                                                                                                 | 6         |
| 3.4 Test Deleted.....                                                                                                                         | 6         |
| 3.5 Additional Observations .....                                                                                                             | 6         |
| <b>Section 4 : Results Summary .....</b>                                                                                                      | <b>7</b>  |
| 4.1 FCC Part 15 Subpart C : Test Results .....                                                                                                | 8         |
| <b>Appendix A : Test Results.....</b>                                                                                                         | <b>9</b>  |
| Clause 15.207(a) Powerline Conducted Emissions .....                                                                                          | 9         |
| Clause 15.209(a) Radiated Emissions within Restricted Bands .....                                                                             | 11        |
| Clause 15.247(a)(1) Frequency hopping systems .....                                                                                           | 15        |
| Clause 15.247(a)(1)(iii) Frequency hopping systems operating in the 2400-2483.5 MHz band .....                                                | 16        |
| Clause 15.247(b)(1) Maximum peak output power of Frequency hopping systems operating in the 2400-2483.5 MHz band and 5725-5850 MHz band ..... | 21        |
| Clause 15.247(d) Radiated Emissions Not in Restricted Bands .....                                                                             | 24        |
| <b>Appendix B : Setup Photographs .....</b>                                                                                                   | <b>28</b> |
| <b>Appendix C : Block Diagram of Test Setups.....</b>                                                                                         | <b>30</b> |

## Section 1 : Equipment Under Test

### 1.1 Product Identification

The Equipment Under Test was identified as follows:

GEC1000

### 1.2 Samples Submitted for Assessment

The following samples of the apparatus have been submitted for type assessment:

| Sample No. | Description                                                   | Serial No. |
|------------|---------------------------------------------------------------|------------|
|            |                                                               |            |
| 7          | GEC1000                                                       | None       |
| 8          | GEC1000                                                       | None       |
| 21         | Switching mode power supply<br>(PN# PSC0101. MN# PSAA05A-060) | None       |
|            |                                                               |            |

The first samples were received on: March 30, 2007

### 1.3 Technical Specifications of the EUT

|                             |                                    |
|-----------------------------|------------------------------------|
| <b>Manufacturer:</b>        | Ingrid Inc.                        |
| <b>Operating Frequency:</b> | 2401.47 – 2482.71 MHz              |
| <b>Peak Output Power:</b>   | 20.46 dBm (Conducted Output Power) |
| <b>Emission Designator</b>  | F1D                                |
| <b>Modulation:</b>          | GFSK                               |
| <b>Antenna Data:</b>        | Integrated PCB Antenna, 3 dBi      |

## Section 2 : Test Conditions

### 2.1 Specifications

The apparatus was assessed against the following specifications:

FCC Part 15 Subpart C, 15.247

FHSS System and Digitally Modulated Radiators

902-928MHz, 2400 - 2483.5 MHz, 5725-5850MHz

### 2.2 Deviations From Laboratory Test Procedures

No deviations were made from laboratory test procedures.

### 2.3 Test Environment

All tests were performed under the following environmental conditions:

|                    |   |                          |
|--------------------|---|--------------------------|
| Temperature range  | : | 15 – 30 °C               |
| Humidity range     | : | 20 - 75 %                |
| Pressure range     | : | 86 - 106 kPa             |
| Power supply range | : | +/- 5% of rated voltages |

### 2.4 Test Equipment

| Equipment                  | Manufacturer    | Model No.     | Asset/Serial No. | Next Cal.   |
|----------------------------|-----------------|---------------|------------------|-------------|
| Receiver/Spectrum Analyzer | Rohde & Schwarz | ESU           | FA002043         | Oct. 24/07  |
| LISN                       | Rohde & Schwarz | ENV216        | FA002023         | Aug. 28/07  |
| Spectrum Analyzer          | Rohde & Schwarz | FSU           | FA001877         | Jan. 16/08  |
| Receiver                   | Rohde & Schwarz | ESVS-30       | FA001445         | July 14/07  |
| Biconical (2) Antenna      | EMCO            | 3109          | FA000904         | Sept. 12/07 |
| Log Periodic Antenna #2    | EMCO            | 3148          | FA001355         | May 16/07   |
| Horn Antenna #1            | EMCO            | 3115          | FA000649         | Feb. 26/08  |
| Horn Antenna #2            | EMCO            | 3115          | FA000825         | Jan. 30/08  |
| Horn 18 – 26.5 GHz         | Electro-Metrics | SH-50/60-1    | FA000479         | COU         |
| 1.0 – 2.0 GHz Amplifier    | JCA             | 12-400        | FA001498         | Aug. 02/07  |
| 2.0 – 4.0 GHz Amplifier    | JCA             | 24-600        | FA001496         | Aug. 02/07  |
| 4.0 – 8.0 GHz Amplifier    | JCA             | 48-600        | FA001497         | Aug. 02/07  |
| 5.0 – 18.0 GHz Amplifier   | NARDA           | DWT-186N23U40 | FA001409         | COU         |
| 18.0 – 26.0 GHz Amplifier  | NARDA           | BBS-1826N612  | FA001550         | COU         |

COU – Calibrate on Use

NCR – No Calibration Required

## **Section 3 : Observations**

### **3.1 Modifications Performed During Assessment**

No modifications were performed during assessment.

### **3.2 Record Of Technical Judgements**

No technical judgements were made during the assessment.

### **3.3 EUT Parameters Affecting Compliance**

The user of the apparatus could not alter parameters that would affect compliance.

### **3.4 Test Deleted**

No Tests were deleted from this assessment.

### **3.5 Additional Observations**

There were no additional observations made during this assessment.

## **Section 4 : Results Summary**

This section contains the following:

FCC Part 15 Subpart C : Test Results

The column headed 'Required' indicates whether the associated clauses were invoked for the apparatus under test. The following abbreviations are used:

- N      No : not applicable / not relevant.
- Y      Yes : Mandatory i.e. the apparatus shall conform to these tests.
- N/T    Not Tested, mandatory but not assessed. (See section 3.4 Test deleted)

The results contained in this section are representative of the operation of the apparatus as originally submitted.

**4.1 FCC Part 15 Subpart C : Test Results**

| Part 15           | Test Description                                                                                                           | Required | Result |
|-------------------|----------------------------------------------------------------------------------------------------------------------------|----------|--------|
| 15.31(e)          | Variation of power supply                                                                                                  | Y        | PASS   |
| 15.207(a)         | Powerline Conducted Emissions                                                                                              | Y        | PASS   |
| 15.209(a)         | Radiated Emissions within Restricted Bands                                                                                 | Y        | PASS   |
| 15.247(a)(1)      | Frequency hopping systems                                                                                                  | Y        | PASS   |
| 15.247(a)(1)(i)   | Frequency hopping systems operating in the 902-928 MHz band                                                                | N        |        |
| 15.247(a)(1)(ii)  | Frequency hopping systems operating in the 5725-5850 MHz band                                                              | N        |        |
| 15.247(a)(1)(iii) | Frequency hopping systems operating in the 2400-2483.5 MHz band                                                            | Y        | PASS   |
| 15.247(a)(2)      | Systems using digital modulation techniques                                                                                | N        |        |
| 15.247(b)(1)      | Maximum peak output power of Frequency hopping systems operating in the 2400-2483.5 MHz band and 5725-5850 MHz band        | Y        | PASS   |
| 15.247(b)(2)      | Maximum peak output power of Frequency hopping systems operating in the 902-928 MHz band                                   | N        |        |
| 15.247(b)(3)      | Maximum peak output power of systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands | N        |        |
| 15.247(b)(4)      | Maximum peak output power                                                                                                  | N        |        |
| 15.247(c)(1)      | Fixed point-to-point Operation with directional antenna gains greater than 6 dBi                                           | N        |        |
| 15.247(c)(2)      | Transmitters operating in the 2400-2483.5 MHz band that emit multiple directional beams                                    | N        |        |
| 15.247(d)         | Radiated Emissions Not in Restricted Bands                                                                                 | Y        | PASS   |
| 15.247(e)         | Power Spectral Density for Digitally Modulated Devices                                                                     | N        |        |
| 15.247(f)         | Time of Occupancy for Hybrid Systems                                                                                       | N        |        |

Notes:



## Appendix A : Test Results

### Clause 15.207(a) Powerline Conducted Emissions

|                                                  |            |           |
|--------------------------------------------------|------------|-----------|
| Frequency of Conducted limit (dBuV)              |            |           |
| Emission (MHz)                                   | Quasi-peak | Average   |
| 0.15-0.5                                         | 66 to 56*  | 56 to 46* |
| 0.5-5                                            | 56         | 46        |
| 5-30                                             | 60         | 50        |
| * Decreases with the logarithm of the frequency. |            |           |

### Test Conditions:


|                            |                |                     |          |
|----------------------------|----------------|---------------------|----------|
| <b>Sample Number:</b>      | 8, 21          | <b>Temperature:</b> | 20       |
| <b>Date:</b>               | April 16, 2007 | <b>Humidity:</b>    | 40       |
| <b>Modification State:</b> | 0              | <b>Tester:</b>      | Heng Lin |
|                            |                | <b>Laboratory:</b>  | Ottawa   |

**Test Results:** See Attached Plots.


### Additional Observations:

All measurements for conducted emissions were performed using a Peak detector, Average detector and Quasi-Peak detector with 9 kHz RBW.

## AC Mains Phase Line - 120VAC, 60Hz

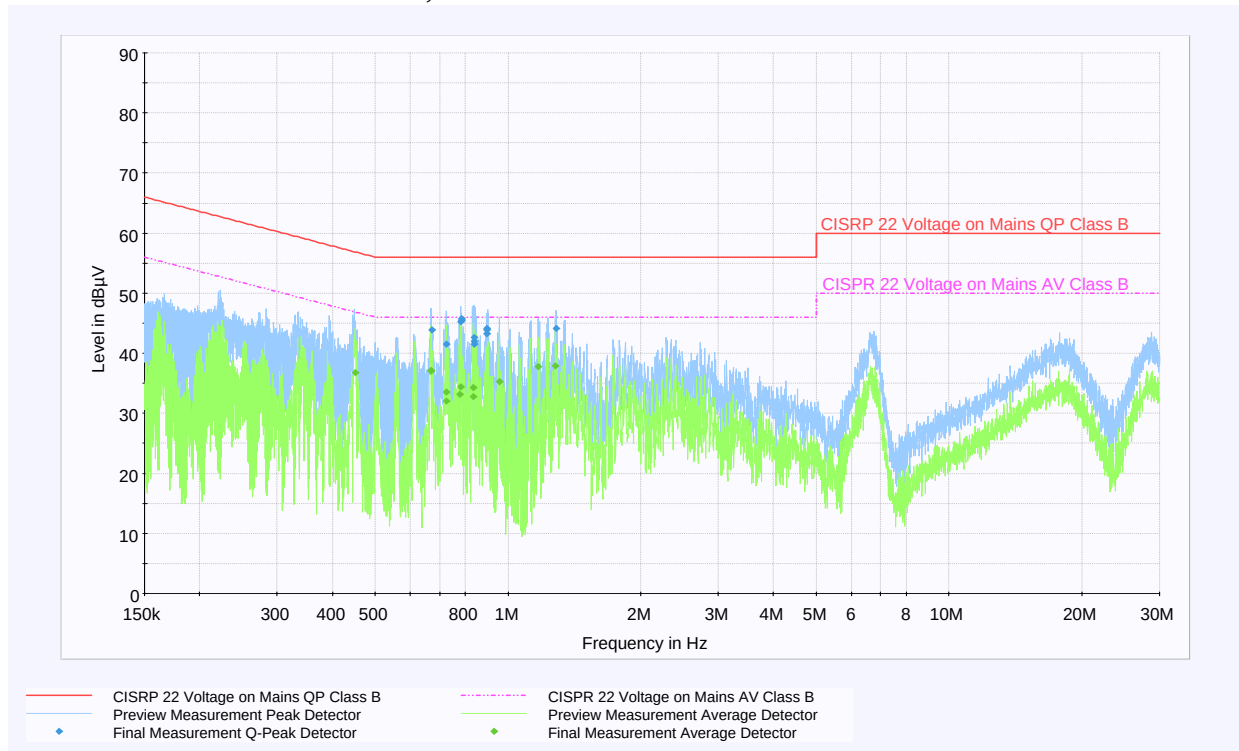

## AC Mains Neutral Line – 120VAC, 60Hz

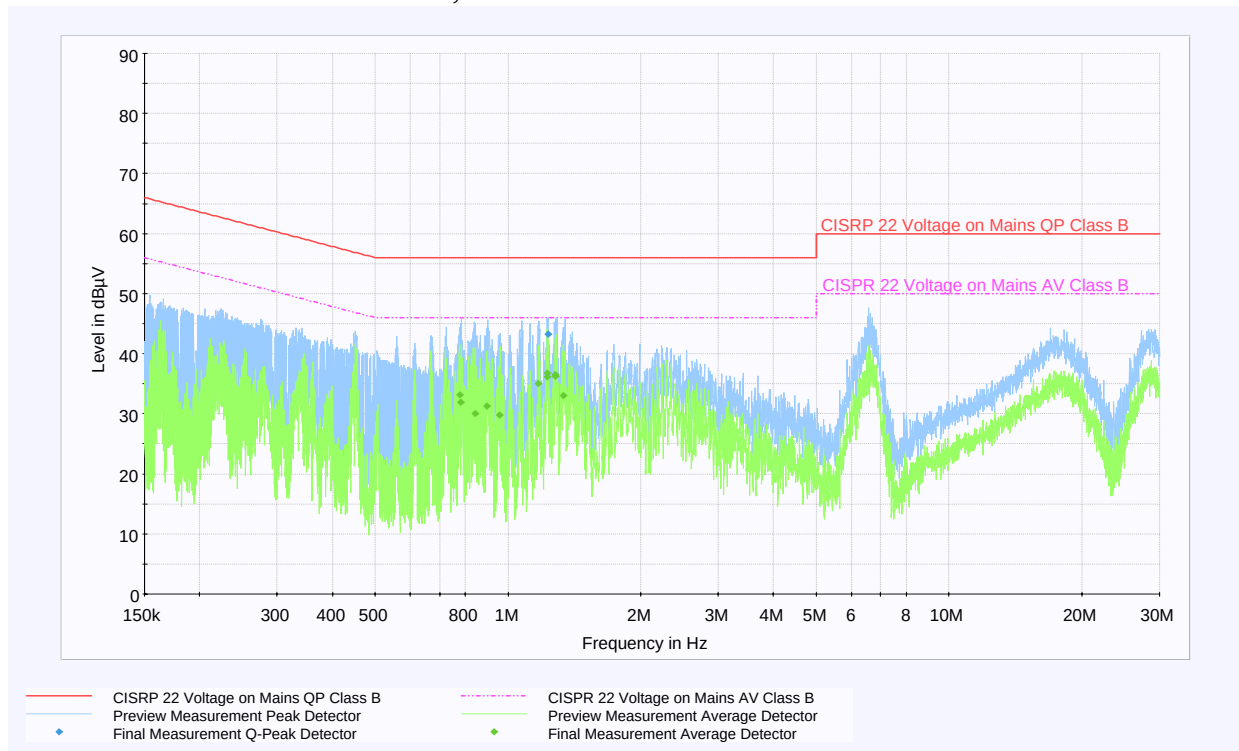

**Clause 15.209(a) Radiated Emissions within Restricted Bands**

Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency<br>(MHz) | Field Strength<br>(microvoltsmeter) | Measurement Distance<br>(meters) |
|--------------------|-------------------------------------|----------------------------------|
| 0.009-0.490        | 2400/F (kHz)                        | 300                              |
| 0.490-1.705        | 24000/F (kHz)                       | 30                               |
| 1.705-30.0         | 30                                  | 30                               |
| 30-88              | 100                                 | 3                                |
| 88-216             | 150                                 | 3                                |
| 216-960            | 200                                 | 3                                |
| Above 960          | 500                                 | 3                                |

**Test Conditions:**

|                            |              |                     |          |
|----------------------------|--------------|---------------------|----------|
| <b>Sample Number:</b>      | 8            | <b>Temperature:</b> | 20       |
| <b>Date:</b>               | May 03, 2007 | <b>Humidity:</b>    | 40       |
| <b>Modification State:</b> | 0            | <b>Tester:</b>      | Heng Lin |
|                            |              | <b>Laboratory:</b>  | Ottawa   |

**Test Results:**

See Attached Table for Results

**Additional Observations:**

The Spectrum was searched from 30MHz to the 10<sup>th</sup> Harmonic.


These results apply to emissions found in the Restricted bands defined in FCC Part 15 Subpart C, 15.205.

All measurements for radiated emissions within the restricted bands were performed using a Peak detector with 100 kHz / 300 kHz RBW / VBW below 1 GHz and a Peak and Average Detector with 1 MHz / 3 MHz RBW / VBW above 1 GHz at a distance of 3 meters.

Only emission within 20 dB below the limit line were reported.

| Frequency<br>(MHz)                                                                                                                                                                                                                                                                                                                                  |           | Ant.  | Polarity | RCVD<br>Signal<br>(dBuV) | Ant.<br>Factor<br>(dB) | Amp.<br>Gain<br>(dB) | Duty<br>Cycle<br>Corr. | Cable<br>Loss<br>(dB) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-------|----------|--------------------------|------------------------|----------------------|------------------------|-----------------------|-------------------------------|-------------------|----------------|----------|
| 1                                                                                                                                                                                                                                                                                                                                                   | 7324.9200 | Horn2 | V        | 69.0                     | 36.4                   | 55.7                 | -39.17                 | 11.9                  | 61.5                          | 74.0              | 12.5           | Peak     |
|                                                                                                                                                                                                                                                                                                                                                     |           |       |          |                          |                        |                      |                        |                       | 22.33                         | 54.0              | 31.67          | Average  |
| 2                                                                                                                                                                                                                                                                                                                                                   | 7324.9200 | Horn2 | H        | 69.9                     | 36.3                   | 55.7                 | -39.17                 | 11.9                  | 62.3                          | 74.0              | 11.7           | Peak     |
|                                                                                                                                                                                                                                                                                                                                                     |           |       |          |                          |                        |                      |                        |                       | 22.92                         | 54.0              | 31.08          | Average  |
| 3                                                                                                                                                                                                                                                                                                                                                   | 7446.8400 | Horn2 | H        | 65.1                     | 36.3                   | 55.7                 | -39.17                 | 12.3                  | 58.1                          | 74.0              | 15.9           | Peak     |
|                                                                                                                                                                                                                                                                                                                                                     |           |       |          |                          |                        |                      |                        |                       | 18.93                         | 54.0              | 35.07          | Average  |
| Note:<br><div>Antenna Legend: BC = Biconical, BL = Bilog, LP = Log Periodic, Horn = Horn, ED = EMCO Dipole</div> <div>Detector Legend: Below 1GHz, Peak detector with 100 KHz RBW</div> <div>Above 1GHz, Peak detector with 1MHz RBW</div> <div>The spectrum was investigated for radiated emissions from 30 MHz to 10<sup>th</sup> Harmonic.</div> |           |       |          |                          |                        |                      |                        |                       |                               |                   |                |          |

### Duty Cycle Correction Factor:

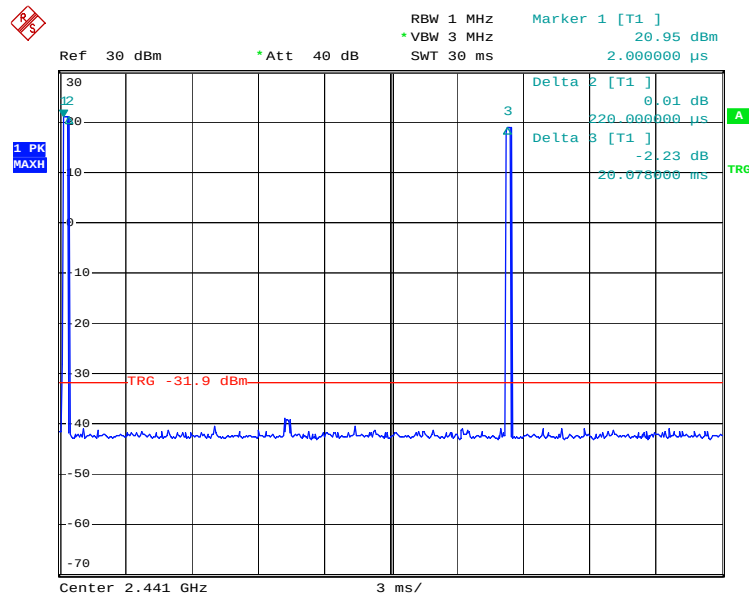

Lower bandedge

Date: 7.MAY.2007 13:50:35


$$T_{\text{ON}}: \quad 220 \mu\text{s}$$
$$T_{ON} + T_{OFF} : 20.078 \text{ ms}$$

$$\text{Duty Cycle} = T_{\text{ON}} / (T_{\text{ON}} + T_{\text{OFF}}) \times 100\% = 0.22 / 20.078 \times 100\% = 2\%$$

Transmission-on-time within 100 milliseconds period:  $T = 1.1 \text{ ms}$

$$\text{Duty Cycle Correction} = 20 \log_{10}(T / 100\text{ms}) = 20 \log_{10}(1.1 \text{ ms} / 100 \text{ ms}) = -39.17 \text{ dB}$$

## Delta Marker Measurement for 2.4835MHz Band Edge

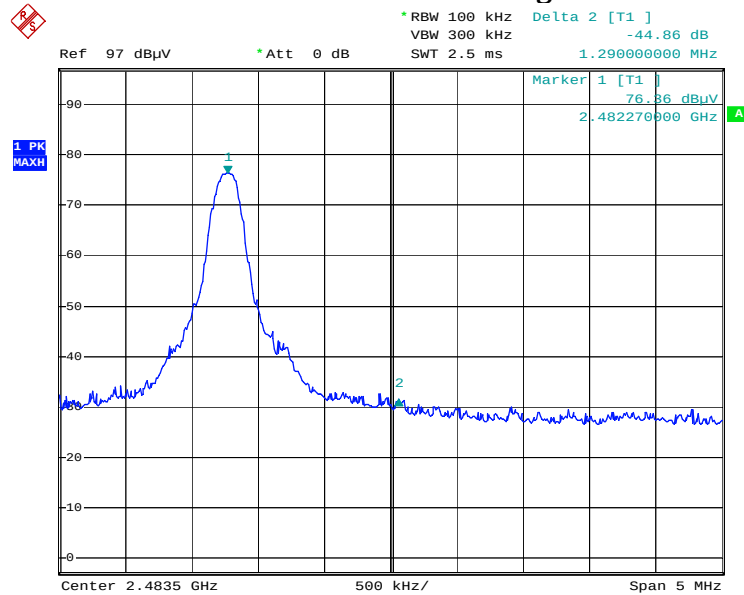

Date: 3.MAY.2007 15:28:47

Measured Field Strength for High Channel in 1 MHz RBW = 110.4 dBμV/m

Delta Marker = -44.86 dB

Therefore, Peak Field Strength = 110.4 dBμV/m – 44.86 dB = 65.54 dBμV/m

Limit = 74 dBμV/m

Average Field Strength = 65.54 dBμV/m – 39.17dB(Duty Cycle) = 26.37 dBμV/m


Limit = 54 dBμV/m

**Clause 15.247(a)(1) Frequency hopping systems**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

**Test Conditions:**

|                     |                |              |          |
|---------------------|----------------|--------------|----------|
| Sample Number:      | 7              | Temperature: | 22       |
| Date:               | April 26, 2007 | Humidity:    | 35       |
| Modification State: | 0              | Tester:      | Heng Lin |
|                     |                | Laboratory:  | Ottawa   |

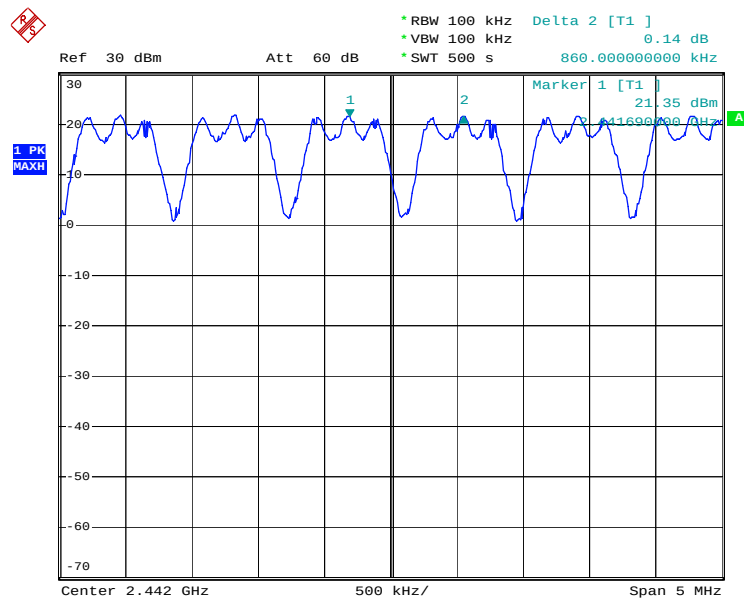**Test Results:****Channel Spacing:**

Date: 26.APR.2007 16:18:51

**Clause 15.247(a)(1)(iii) Frequency hopping systems operating in the 2400-2483.5 MHz band**


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used

**Test Conditions:**

|                     |                |              |          |
|---------------------|----------------|--------------|----------|
| Sample Number:      | 7              | Temperature: | 22       |
| Date:               | April 20, 2007 | Humidity:    | 40       |
| Modification State: | 0              | Tester:      | Heng Lin |
|                     |                | Laboratory:  | Ottawa   |


**Test Results:**

**Number of Hopping channel = 95 Channels**  
**Maximum 20dB Bandwidth = 680 kHz**  
**Time of Occupancy = 8.91 msec in 30 seconds**

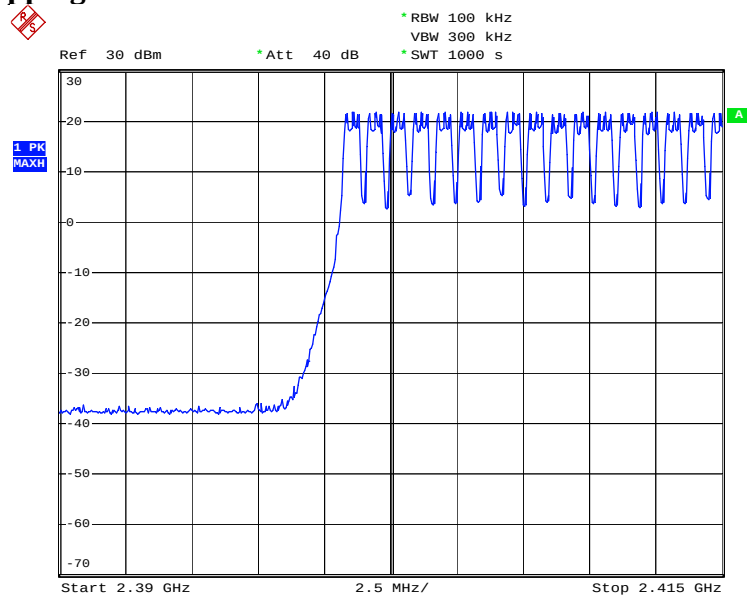
**Number of Hopping Channels:**

Date: 30.APR.2007 17:29:59




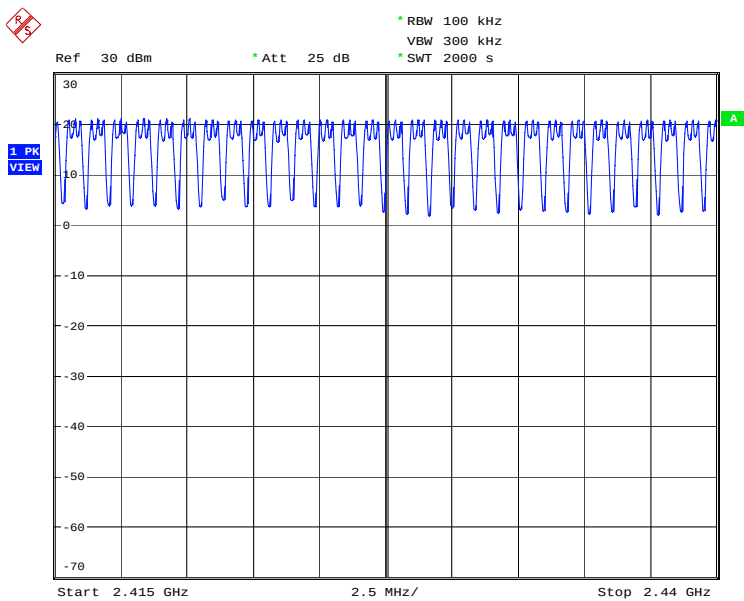

Date: 19.APR.2007 14:15:12

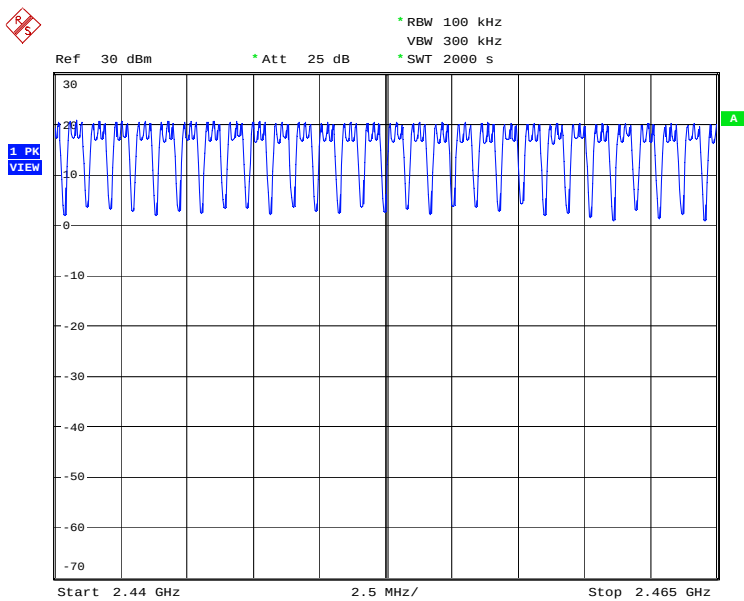


Date: 18.APR.2007 17:00:59

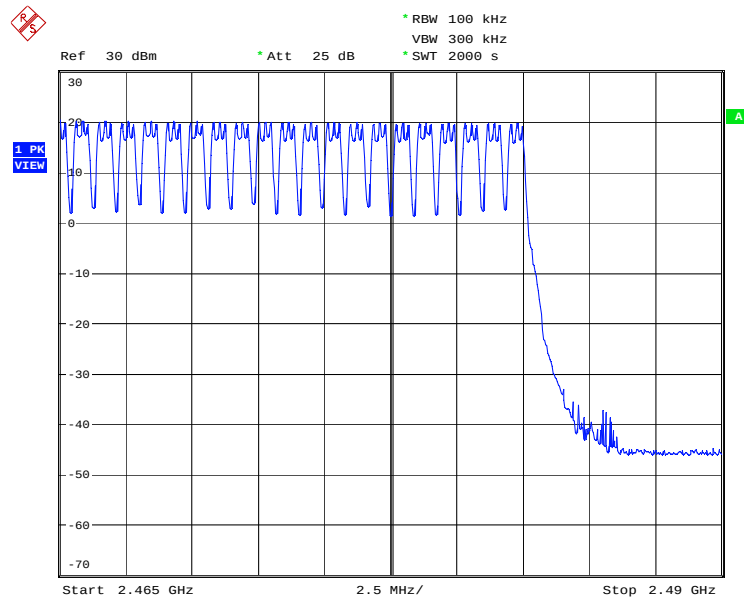


Date: 18.APR.2007 15:23:22

## 20dB Bandwidth: Low Channel

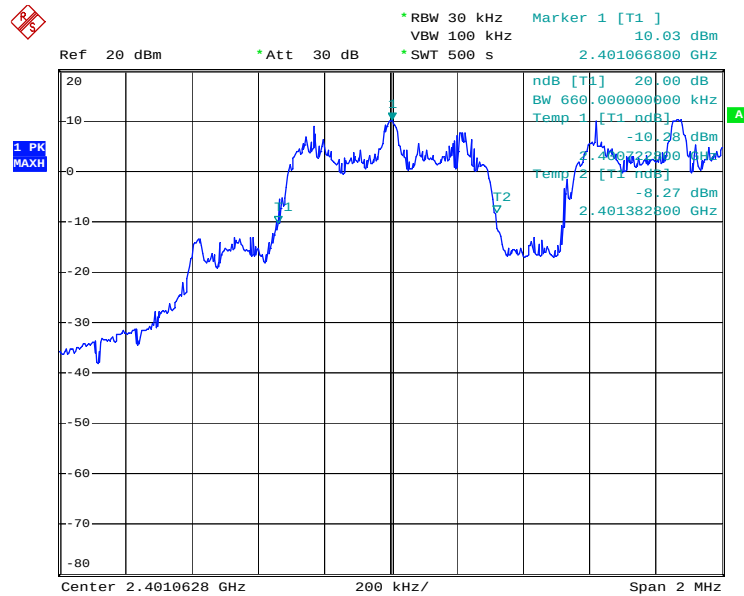


Date: 9.MAY.2007 16:12:46

## Mid Channel

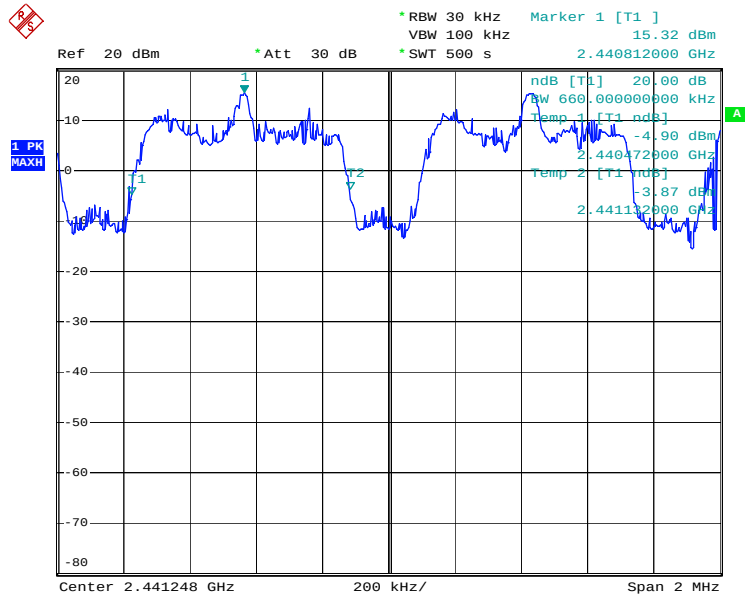


Date: 9.MAY.2007 14:47:22


## High Channel

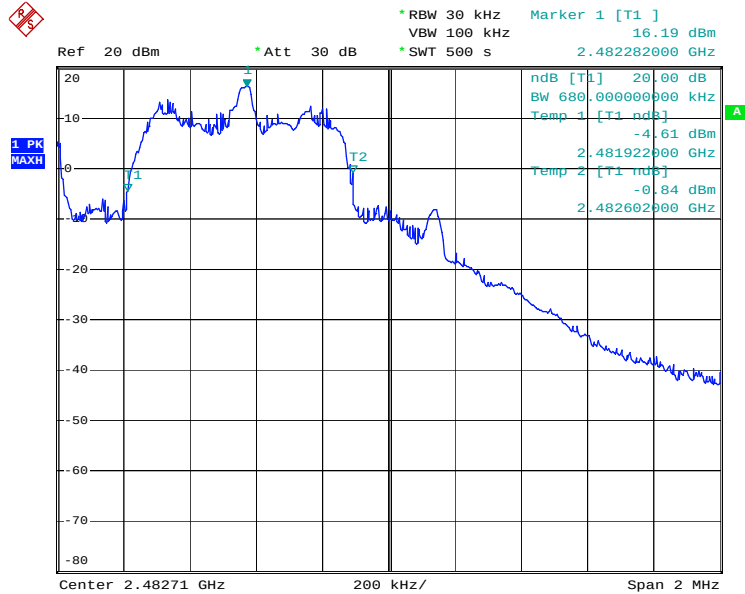

Date: 9.MAY.2007 14:18:04

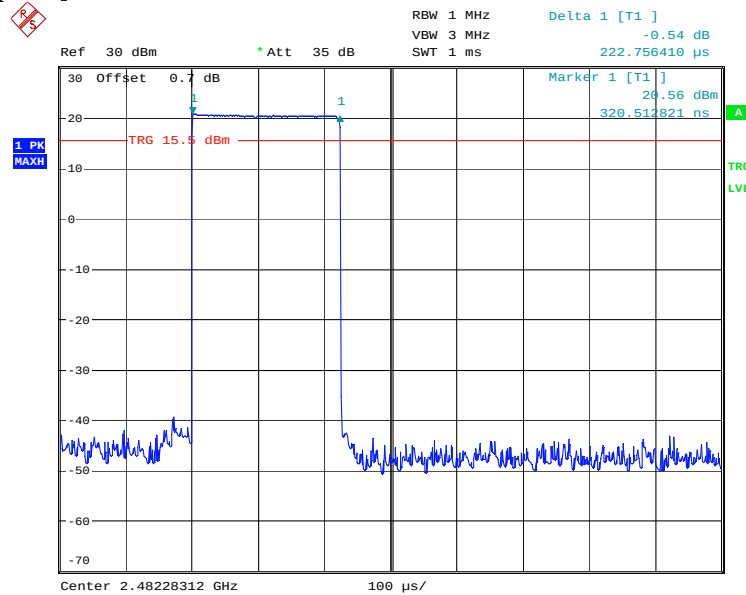**Time of Occupancy:**

Date: 2.MAY.2007 09:49:48

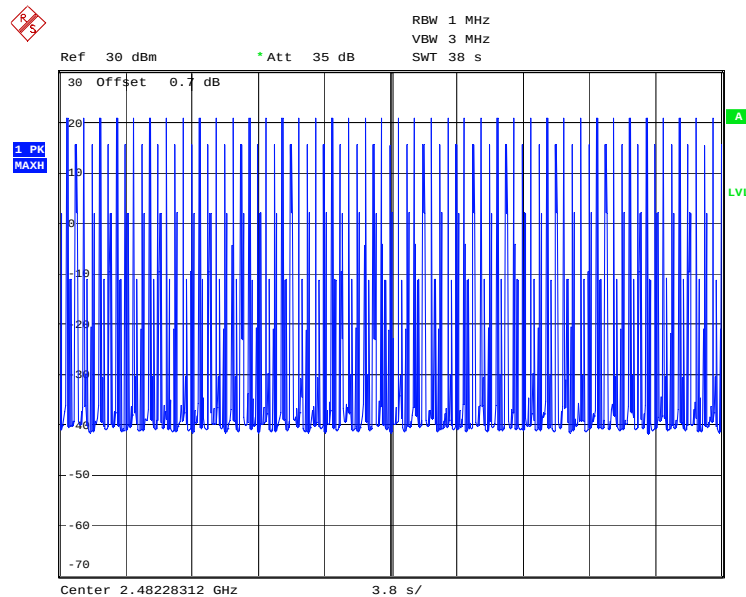

Date: 2.MAY.2007 09:46:58

Required Reference Time Frame:

$$T_{\text{Ref}} = 0.4 \text{ s} \times 95 = 38 \text{ s}$$

Number of Hits in 38 seconds:

40 hits

Time of occupancy Within 38 seconds Frame:

$$222.75641 \text{ μs} \times 40 \text{ hits} = 8.91 \text{ ms}$$

**Clause 15.247(b)(1) Maximum peak output power of Frequency hopping systems operating in the 2400-2483.5 MHz band and 5725-5850 MHz band**

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

**Test Conditions:**

|                            |                |                     |          |
|----------------------------|----------------|---------------------|----------|
| <b>Sample Number:</b>      | 7              | <b>Temperature:</b> | 22       |
| <b>Date:</b>               | April 30, 2007 | <b>Humidity:</b>    | 45       |
| <b>Modification State:</b> | 0              | <b>Tester:</b>      | Heng Lin |
|                            |                | <b>Laboratory:</b>  | Ottawa   |

**Test Results:****Conducted Output Power:**


Measured output power = 20.46 dBm  
 Maximum output power = 20.46 dBm + 3 dBi = 23.46 dBm EIRP  
 Limit = 36dBm EIRP

The output power was measured at +/-15% of the supply voltage and found that there was no change.

Note: The EUT was modified by the manufacturer to perform conducted measurements.


| Channel Range | Measured Output Power (W) |           |
|---------------|---------------------------|-----------|
| Low           | 20.46 dBm                 | 111.17 mW |
| Mid           | 20.35 dBm                 | 108.39 mW |
| High          | 19.40 dBm                 | 87.10 mW  |

Low Channel:

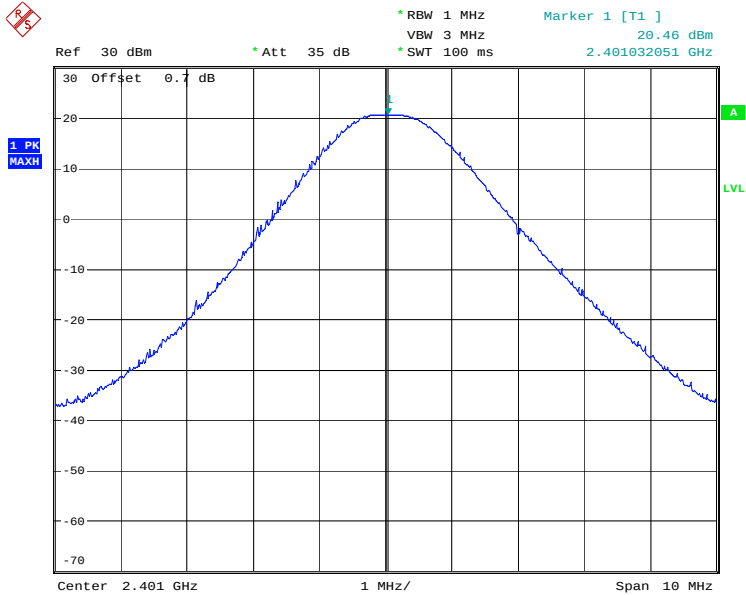


Date: 30.APR.2007 10:32:58

Mid Channel:

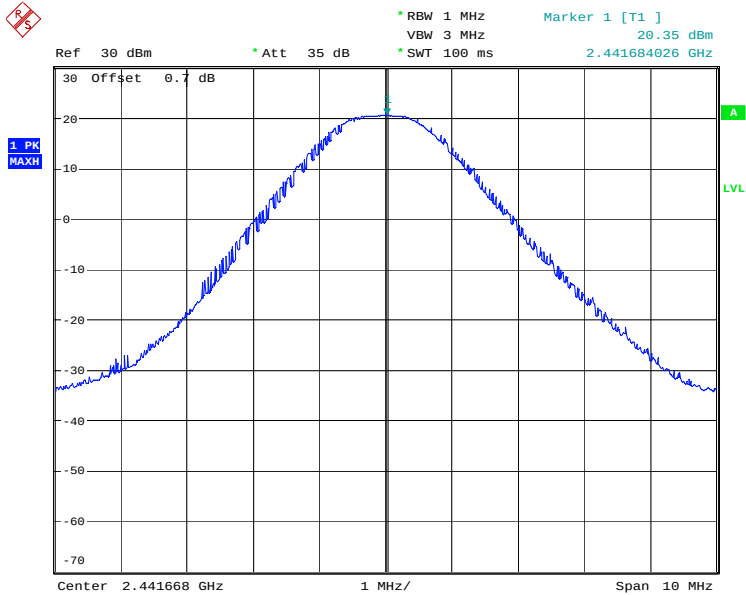

Date: 30.APR.2007 10:32:06

High Channel:

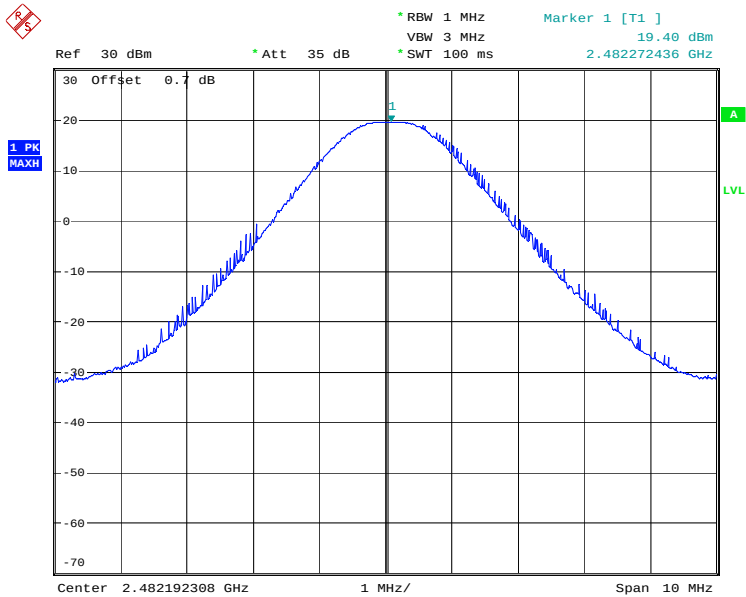

Date: 30.APR.2007 10:33:45

### **Clause 15.247(d) Radiated Emissions Not in Restricted Bands**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


### Test Conditions:

|                            |              |                     |          |
|----------------------------|--------------|---------------------|----------|
| <b>Sample Number:</b>      | 7            | <b>Temperature:</b> | 21       |
| <b>Date:</b>               | May 01, 2007 | <b>Humidity:</b>    | 45       |
| <b>Modification State:</b> | 0            | <b>Tester:</b>      | Heng Lin |
|                            |              | <b>Laboratory:</b>  | Ottawa   |

### Test Results:

See Attached Table and Plots.


## Conducted Spurious Emission Low Channel

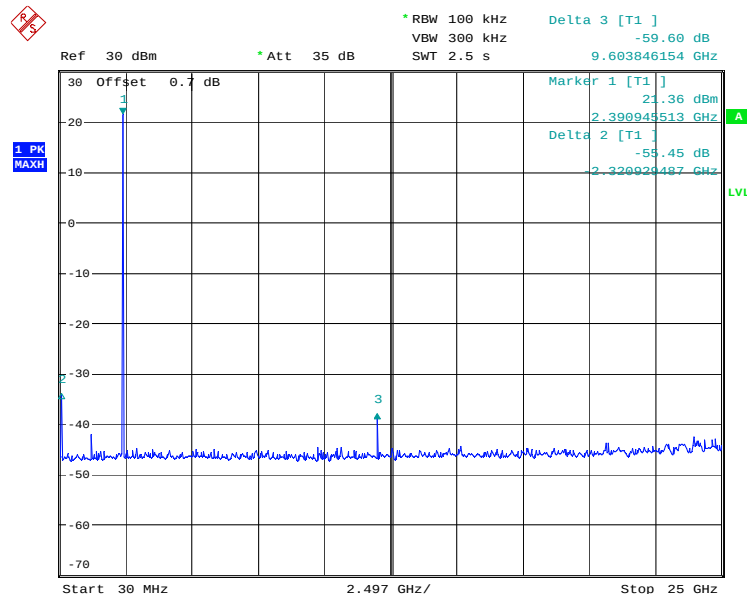

Date: 1.MAY.2007 15:07:57




Mid Channel

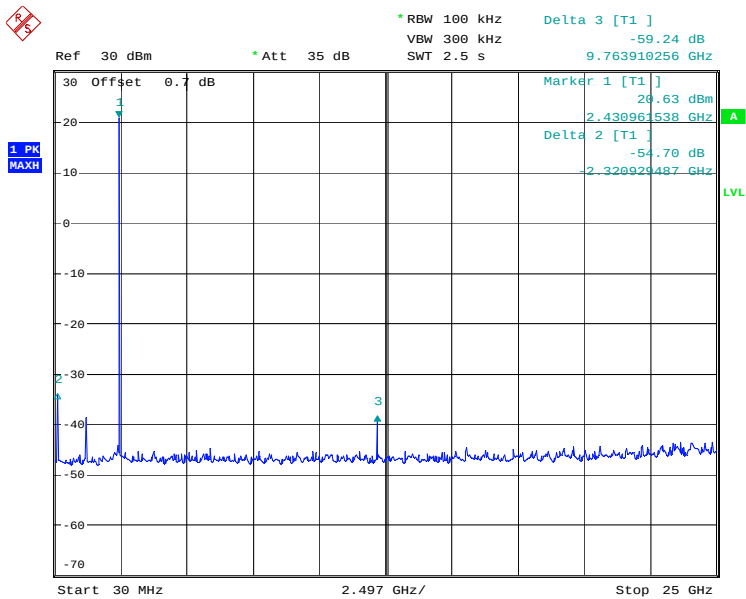


Date: 1.MAY.2007 15:08:42

High Channel

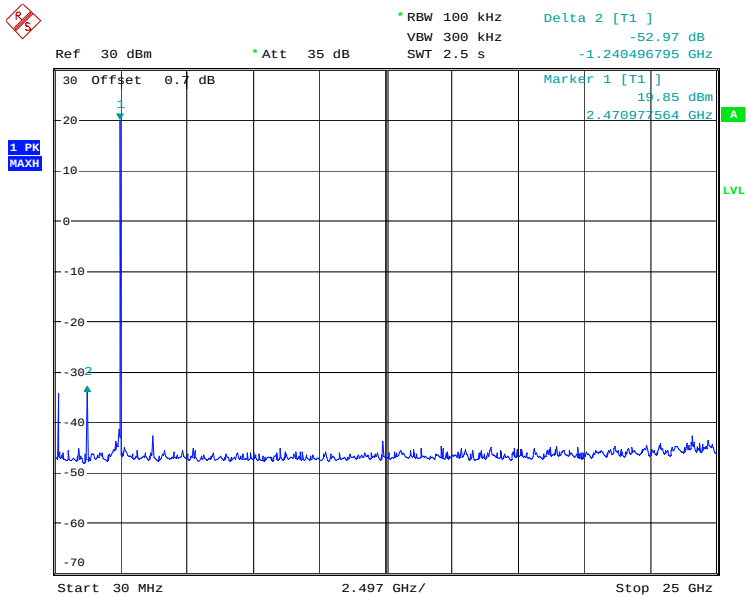


Date: 1.MAY.2007 15:09:27

### Lower Band Edge Hopping On:

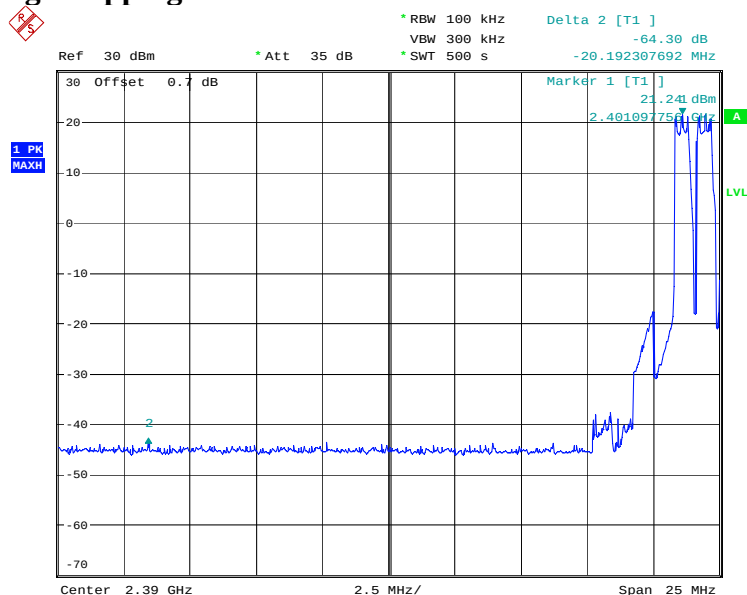


Date: 30.APR.2007 13:19:51

### Lower Band Edge Hopping Off:

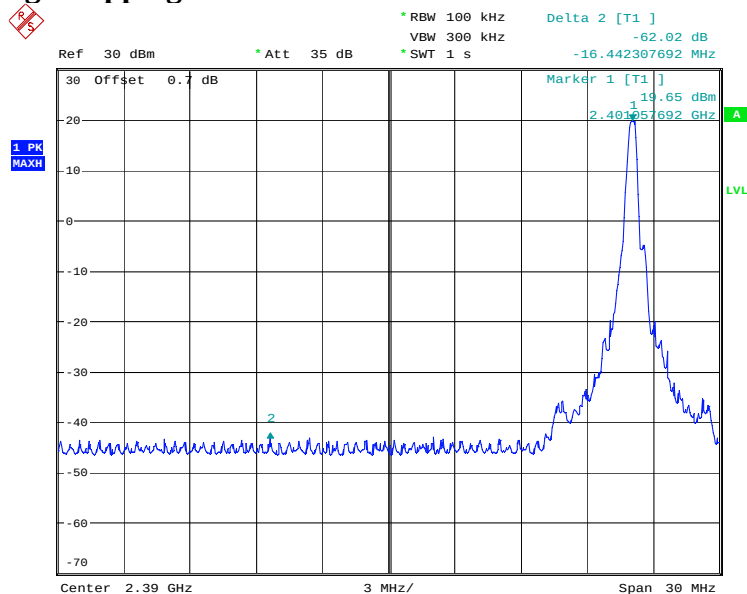


Date: 30.APR.2007 12:29:16

## Upper Band Edge Hopping On:

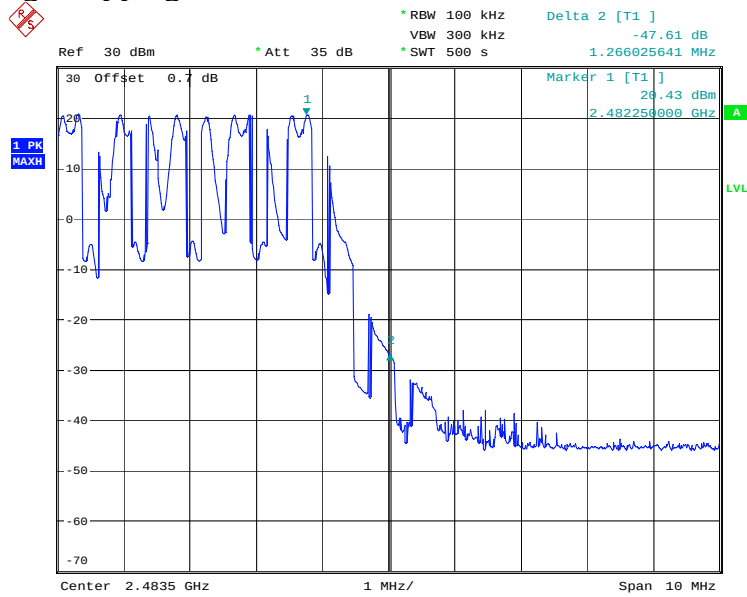

Date: 30.APR.2007 13:57:44

## Upper Band Edge Hopping Off:

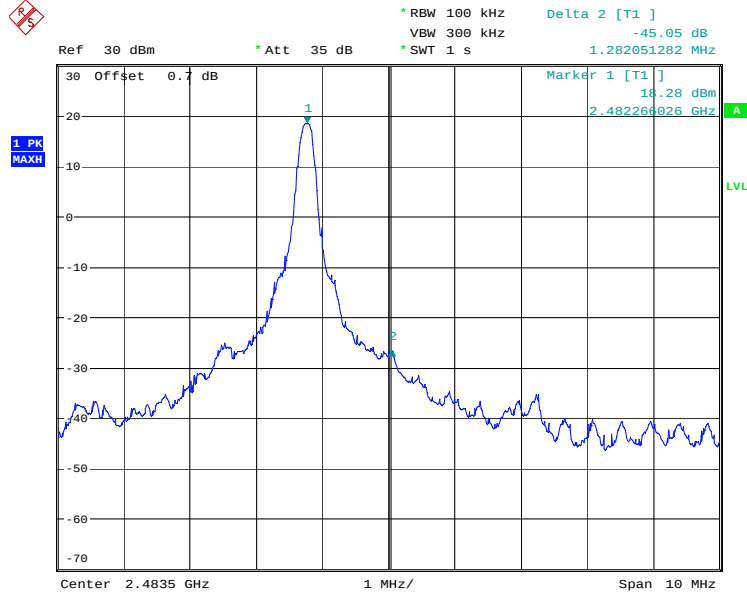

Date: 30.APR.2007 12:34:02

## **Appendix B : Setup Photographs**

### **Conducted Emission at Mains Port**



### **Conducted Emissions Setup:**




**Spurious Emissions Setup:**



Appendix C : Block Diagram of Test Setups

Test Site For Radiated Emissions

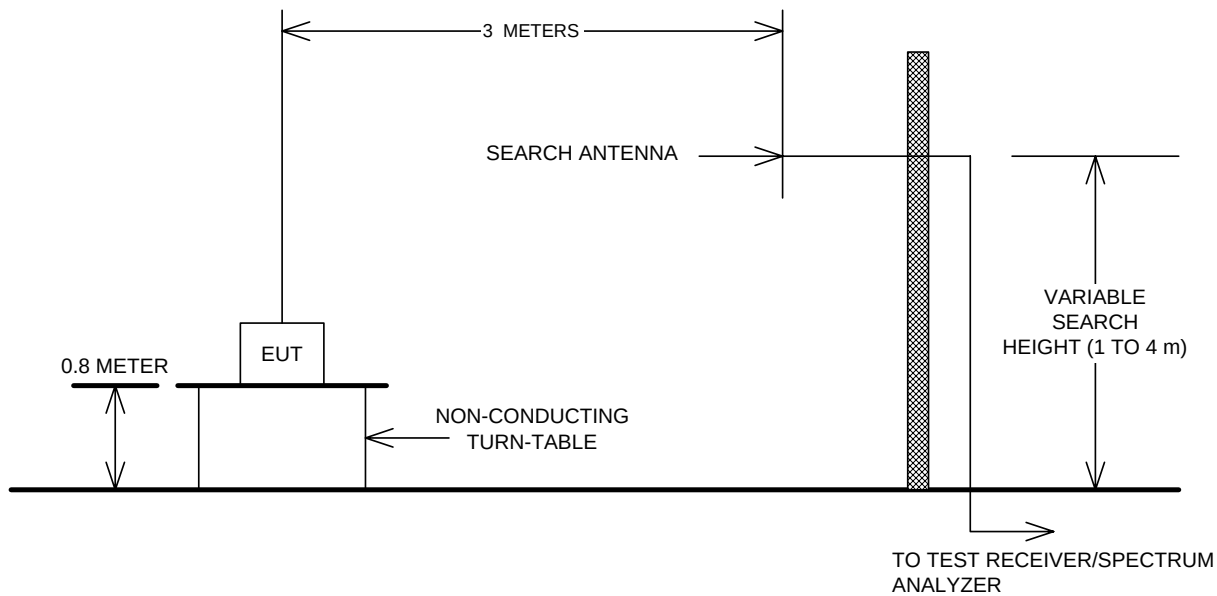

Conducted Emissions

