

TITLE: PLI Evaluation Report (RFI)
DRAWING: Q539704W.DWG
BY: Laura Bramschreiber and Clyde Pineda

FCC ID: SAX5397X

Page 18 of 60
Issued: 22 Jun 2004
Approved: Lee Pulver


2.0 Mandatory Labeling and Operators' Manual Information and Shipping Documents

2.1 Label

The illustration on the next page shows the actual FCC label (three times the actual size) with the appropriate wording. Note the letters "EMI" on the label, which abbreviate "Electromagnetic Interference". Organizations like the Federal Communications Commission and their respective limits are listed on the label.

Also notice the letters "NRTL", which abbreviate "Nationally Recognized Testing Laboratory" as recommended by OSHA and the National Electrical Code for the United States. For Pulver Laboratories product Certification labels used for safety Certification, the phrase "SAFETY" appears on the label. Safety Certifying organizations like Pulver Laboratories are listed on the label adjacent to the testing standards used during equipment evaluation.

A rough sketch of the label location is shown below.

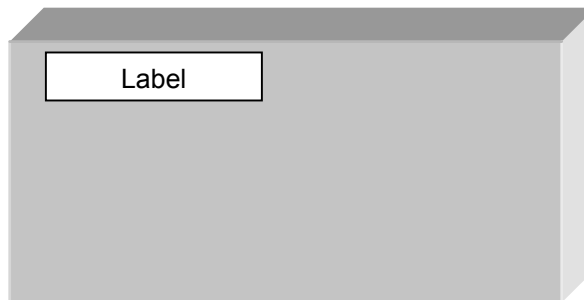

Component side of the EUT

TITLE: PLI Evaluation Report (RFI)
DRAWING: Q539704W.DWG
BY: Laura Bramschreiber and Clyde Pineda

FCC ID: SAX5397X

Page 19 of 60
Issued: 22 Jun 2004
Approved: Lee Pulver

Label Illustration
{three times the size of actual FCC Label}

FCC ID: SAX5397X

2.2 Operators' Manual Information

2.2.1 Insert the following information directly into the operators' manual to meet the requirements of product safety and Radio Frequency Interference (RFI) rules and regulations.

CAUTIONS

- (1) Use a shielded data cable connection between the parallel or serial data ports and peripherals of this equipment.
- (2) Network connections may consist of non-shielded CAT 5 cable.

WARNINGS

- (1) A non-shielded power cord may be used to connect AC power to every component and peripheral of the system.

2.3 **FCC User Information** - Place the following statements in the front of the operators' manual so that the user of the EUT is aware of its interference potential. If available, provide additional information to the user about corrective measures.