

hp

REF -20.0 dBm


AT 10 dB

PEAK
LOG
10
dB/

Worst Case: 50% duty Cycle

Average factor = -6.0 dB

VA SB
SC VC
CORR

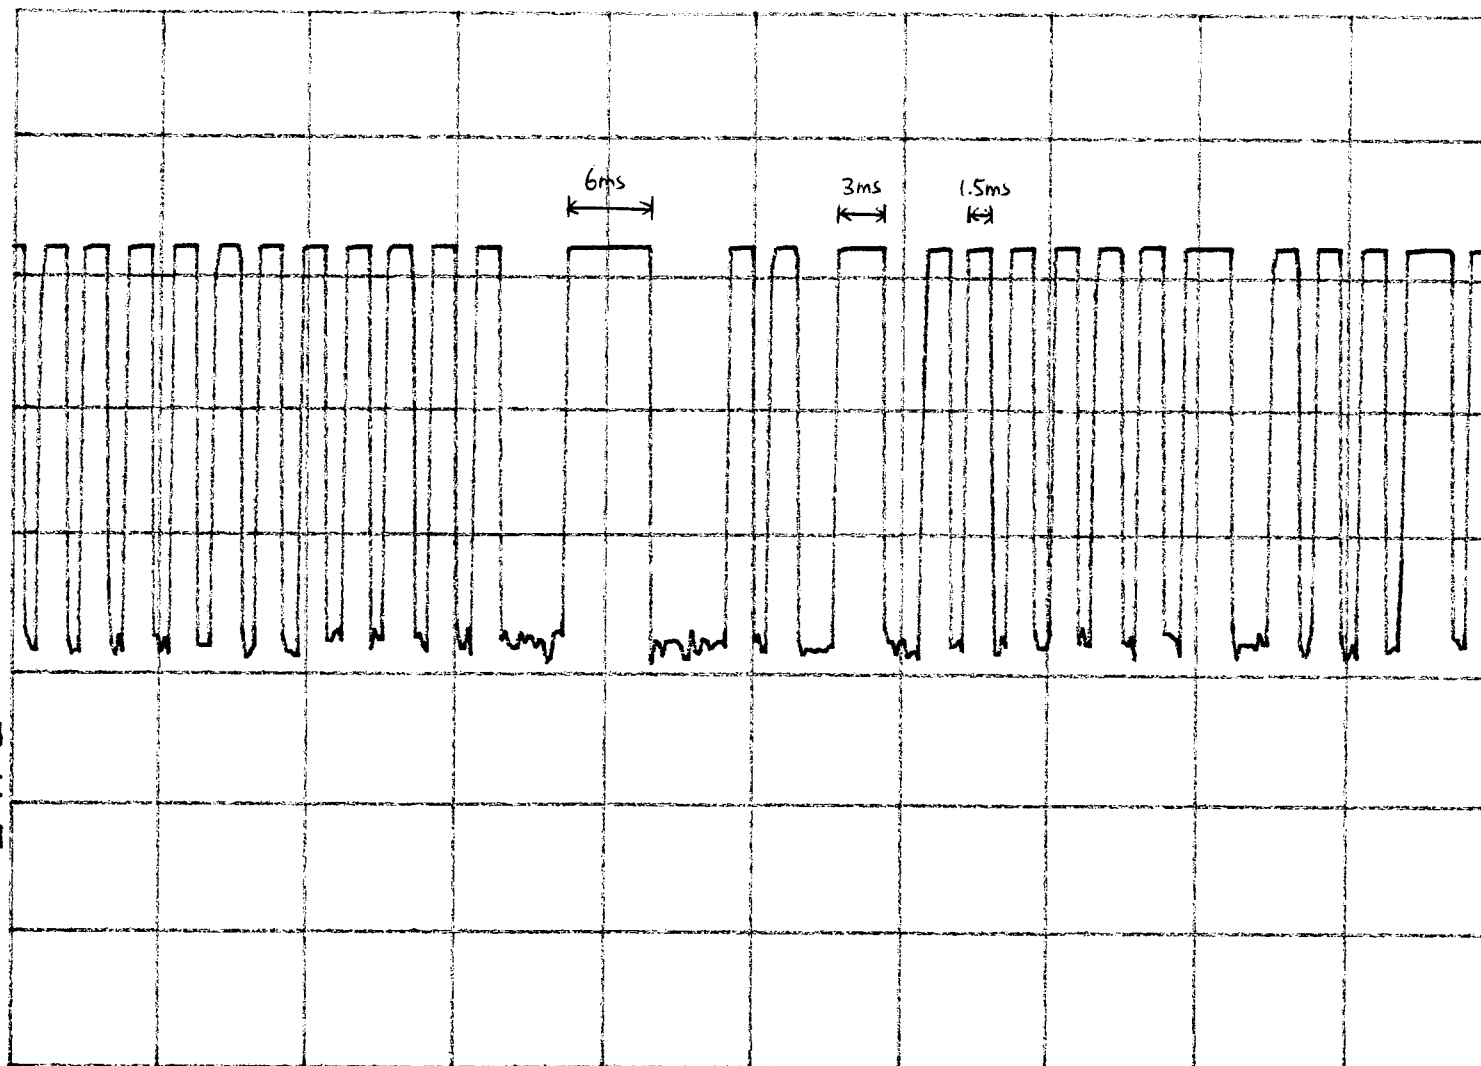

CENTER 433.945 MHz

SPAN 0 Hz

#RES BW 3.0 MHz

#VBW 3 MHz

#SWP 100 msec

hp

REF -20.0 dBm


AT 10 dB

PEAK

LOG

10

dB/

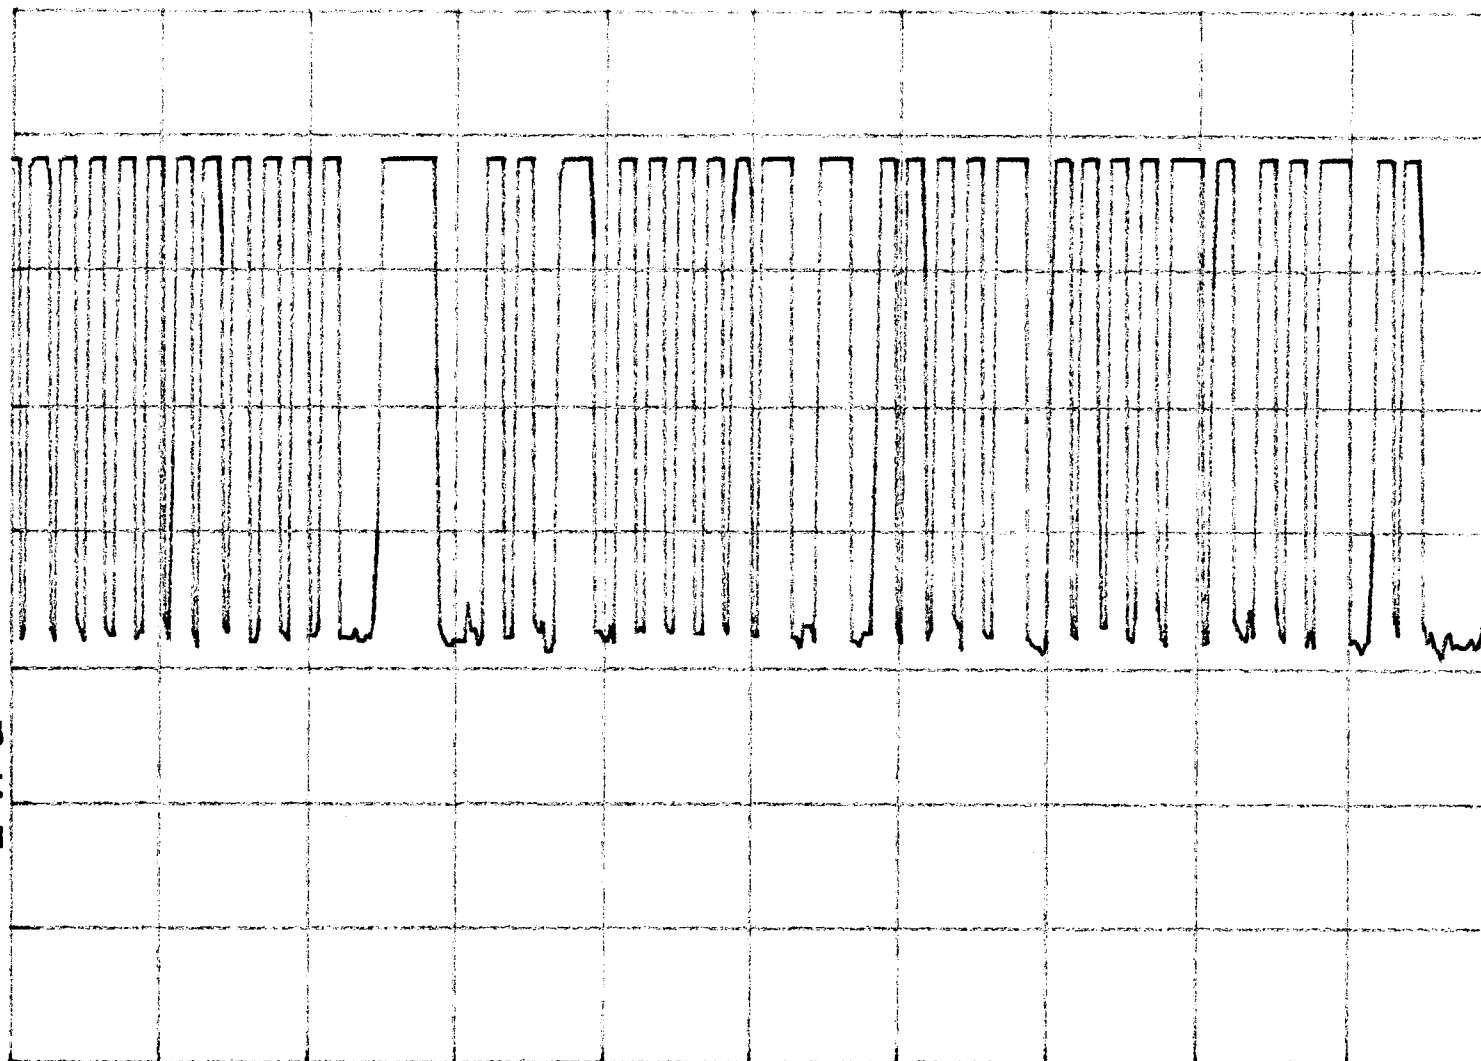

VA SB

SC VC

CORR

CENTER 433.945 MHz

SPAN 0 Hz

#RES BW 3.0 MHz

#VBW 3 MHz

#SWP 150 msec

hp

REF -20.0 dBm

AT 10 dB

MKR 388.75 msec

-33.68 dBm

PEAK

LOG


10

dB/

VA SB

SC VC

CORR

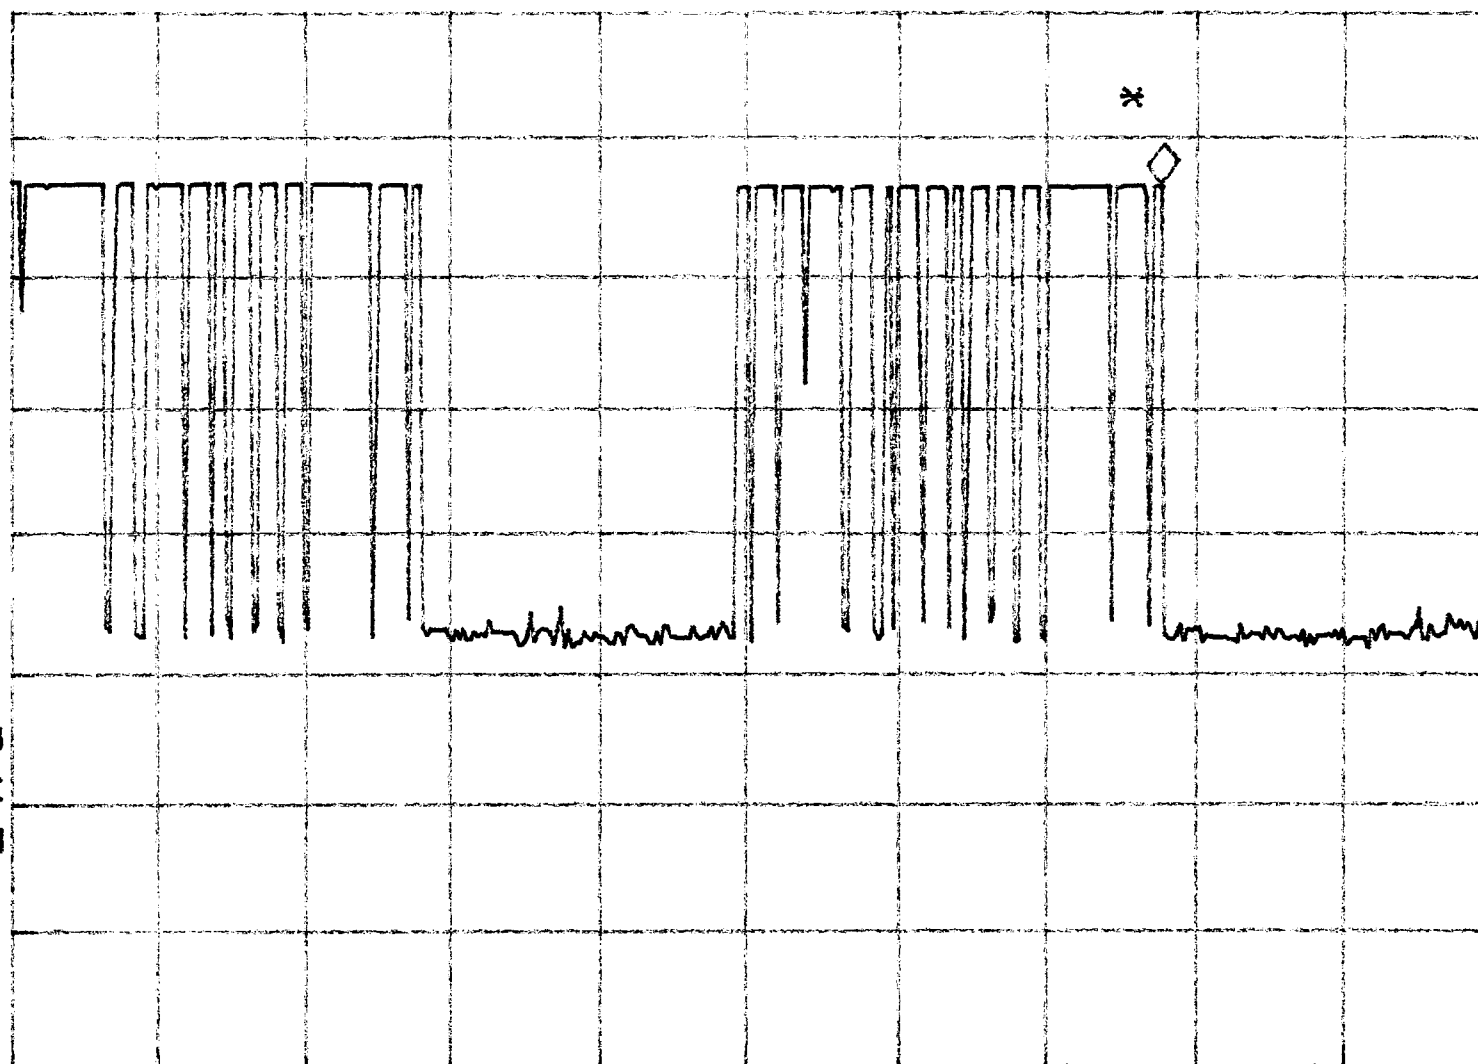

CENTER 433.945 MHz

#RES BW 3.0 MHz

#VBW 3 MHz

SPAN 0 Hz

#SWP 500 msec

hp

MKR 29.625 sec

REF -14.0 dBm

AT 10 dB

-.21 dB

PEAK

LOG

10

dB/



VA SB

SC VC

CORR

CENTER 433.923 MHz

SPAN 0 Hz

#RES BW 3.0 MHz

#VBW 3 MHz

#SWP 50.0 sec