



Underwriters  
Laboratories

FCC ID : SBDK612  
Test report No. : 30CE0195-SH-01-A  
Page : 1 of 56  
Issued date : November 18, 2009

## RADIO TEST REPORT

Test Report No.: 30CE0195-SH-01-A

Applicant : BRIDGESTONE CORPORATION  
Brand Name : BRIDGESTONE  
Type of Equipment : TPMS (Tire Pressure Monitoring System)  
Model No. : K612 (TAG READER)  
FCC ID : SBDK612  
Test regulation : FCC Part15 Subpart C: 2009  
Test result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by any agency of the Federal Government.
6. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.

Date of test: November 3 to 12, 2009

Tested by:

T. Arai

Tatsuya Arai  
EMC Service

&

G. Ishiwata

Go Ishiwata  
EMC Service

H. Shirasawa

Hikaru Shirasawa  
EMC Service

Approved by:

I. Isozaki

Ichiro Isozaki  
Group Leader of Shonan EMC lab.



The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.  
 There is no testing item of "Non-accreditation".

**UL Japan, Inc.**  
**Shonan EMC Lab.**  
1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400  
Facsimile: +81 463 50 6401

MF060d (06.08.09)

<b>Table of Contents</b>	<b>Page</b>
<b>1 Applicant information</b>	<b>3</b>
<b>2 Equipment under test (E.U.T.)</b>	<b>3</b>
<b>3 Test specification, procedures and results</b>	<b>5</b>
<b>4 System test configuration</b>	<b>8</b>
<b>5 Conducted Emissions</b>	<b>10</b>
<b>6 Carrier frequency separation</b>	<b>11</b>
<b>7 20dB bandwidth &amp; Occupied bandwidth (99%)</b>	<b>11</b>
<b>8 Number of hopping frequency</b>	<b>11</b>
<b>9 Dwell time</b>	<b>11</b>
<b>10 Maximum peak output power</b>	<b>11</b>
<b>11 Out of band emissions (Antenna port conducted)</b>	<b>11</b>
<b>12 Out of band emissions (Radiated)</b>	<b>12</b>
<b><u>Contents of Appendixes</u></b>	<b>13</b>
<b>APPENDIX 1: Photographs of test setup</b>	<b>14</b>
<b>APPENDIX 2: Test data</b>	<b>17</b>
<b>APPENDIX 3: Test instruments</b>	<b>56</b>

## 1 Applicant information

Company Name : BRIDGESTONE CORPORATION  
Brand Name : BRIDGESTONE  
Address : 3-1-1, Ogawahigashi-Cho, Kodaira-Shi, Tokyo, 187-8531 Japan  
Telephone Number : +81-42-342-6326  
Facsimile Number : +81-42-342-6596  
Contact Person : Toshihiro Miyazaki

## 2 Equipment under test (E.U.T.)

### 2.1 Identification of E.U.T.

Type of Equipment : TPMS (Tire Pressure Monitoring System)  
Model No. : K612 (TAG READER)  
Serial No. : TR035  
Rating : DC3V/0.2A  
Country of Mass-production : Japan  
Condition of EUT : Production prototype  
(Not for Sale: This sample is equivalent to mass-produced items.)  
Modification of EUT : No modification by the test lab.  
Receipt Date of Sample : October 30, 2009

### 2.2 Product description

Model: K612 (referred to as the EUT in this report) is a TAG READER.  
TAG READER is normally used only in the vicinity of dual tire of heavy vehicle in outdoor.  
TAG READER does not do transmission at the same time of Bluetooth and 125kHz.  
Clock frequency : 8MHz (CPU)

#### [Bluetooth(Ver.2.0+EDR)]

Equipment type : Transceiver  
Frequency of operation : 2402-2480MHz  
Other Clock Frequency : 26MHz  
Bandwidth & channel spacing : 1MHz  
Type of modulation : FHSS (GFSK,  $\pi/4$ DQPSK, 8DPSK)  
Mode of Operation : Simplex  
Operating voltage : DC 2.8 to 3.3V  
Antenna type : Chip Ceramic Antenna  
Antenna gain with cable loss : 2dBi  
Antenna connector type : -  
ITU code : F1D, G1D  
Method of Frequency Generation : Synthesizer  
Operation temperature range : -10 to +50 deg.C.

---

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

**[Transmitter\*1)]**

Equipment type	:	Transmitter
Frequency of operation	:	125.00kHz
Other Clock Frequency	:	8MHz
Type of modulation	:	ASK
Mode of Operation	:	Simplex
Antenna type	:	Ferrite Bar Antenna
Antenna connector type	:	No connector
ITU code	:	A1D
Method of Frequency Generation	:	Crystal
Operating voltage	:	DC 2.8 to 3.3V
Operation temperature range	:	-10 to +50 deg.C.

**[Receiver\*2)]**

Equipment type	:	Receiver
Type of Receiver	:	Super-heterodyne
Frequency of operation	:	433.92MHz
Other Clock Frequency	:	52.9MHz
Intermediate Frequency	:	10.7MHz
Type of modulation	:	FSK
Mode of Operation	:	Simplex
Antenna type	:	Loop Antenna
Operating voltage	:	DC 2.8 to 3.3V
Operation temperature range	:	-10 to +50 deg.C.

\*1) Reference: EUT also this function Refer to 30CE0195-SH-01-B

\*2) Reference: EUT also this function Refer to 30CE0195-SH-01-C

FCC Part15.31 (e)

The Bluetooth transmitter is provided with stable power supply (DC 3.0 V), therefore, the equipment complies power supply regulation.

FCC Part15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the transmitter. Therefore, the equipment complies with the antenna requirement of Section 15.203.

---

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

### 3 Test specification, procedures and results

#### 3.1 Test specification

Test specification : FCC Part 15 Subpart C: 2009, final revised on February 27, 2009  
 Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators  
 Section 15.207 Conducted limits  
 Section 15.209 Radiated emission limits, general requirements  
 Section 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz,  
 and 5725-5850MHz

The EUT complies with FCC Part 15 Subpart B: 2009, final revised on February 27, 2009. Refer to the test report 30CE0195-SH-01-C.

#### 3.2 Procedures & Results

Item	Test Procedure	Specification	Remarks	Deviation	Worst Margin	Results
Conducted emission	ANSI C63.4:2003 7. AC powerline conducted emission measurements	FCC Section 15.207	-	N/A *1)	22.5dB (0.43910MHz, N, QP)	Complied
Carrier frequency separation	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (a)(1)	Conducted	N/A	*See data.	Complied
20dB bandwidth	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (a)(1)	Conducted	N/A		Complied
Number of hopping frequency	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (a)(1)(iii)	Conducted	N/A		Complied
Dwell time	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (a)(1)(iii)	Conducted	N/A		Complied
Maximum peak output power	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (b)(1)	Conducted	N/A		Complied
Band edge compliance & Spurious emission	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (d) Section15.209	Conducted/ Radiated	N/A *1)	1.5dB (4804.00MHz, Vertical, Tx 2402MHz, DH5)	Complied

Note: UL Japan's EMI Work Procedures No.QPM05 and QPM15.

\*1) Radiated tests were performed on stand-alone basis since EUT is not assumed to be used with AC adaptor normally. However, as it is possible that EUT is connected AC adaptor, conducted emission test were done for only confirmation.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

### 3.3 Addition to standard

Item	Test Procedure	Specification	Remarks	Worst Margin	Results
Occupied bandwidth (99%)	ANSI C63.4:2003 13. Measurement of intentional radiators RSS-Gen 4.6.1	RSS-Gen 4.6.1	Conducted	-	Complied

\* Other than above, no addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

	No.1 Semi-anechoic chamber (±)	No.2 Semi-anechoic chamber (±)	No.3 Semi-anechoic chamber (±)
<b>Radiated emission (3m)</b>			
30-300MHz	4.4 dB	4.3 dB	4.5 dB
300-1000MHz	4.3 dB	4.2 dB	4.5 dB
1GHz<	5.7 dB	5.6 dB	5.6 dB

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

Antenna port conducted test	(±)
Below 1GHz	1.1dB
1-3GHz	1.2dB
3-18GHz	2.9dB
18-26.5GHz	3.4dB

The data listed in this test report has enough margin, more than site margin.

Power Measurement uncertainty above 1GHz (with a 95% confidence level) for this test was: (±) 0.8dB

Frequency Measurement uncertainty (with a 95% confidence level) for this test was: (±) 2.1%

Bandwidth Measurement uncertainty (with a 95% confidence level) for this test was: (±) 5.4%

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

### 3.5 Test location

UL Japan, Inc. Shonan EMC Lab.

1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN

Telephone number : +81 463 50 6400

Facsimile number : +81 463 50 6401

JAB Accreditation No. : RTL02610

No.1/ No.2/ No.3 anechoic chamber has been fully described in a report submitted to FCC office, and accepted on April 17, 2009 (Registration No.: 697847).

IC Registration No. : 2973D-1 (No1 anechoic chamber)

2973D-2 (No2 anechoic chamber)

2973D-3 (No3 anechoic chamber)

Test room	Width x Depth x Height (m)	Test room	Width x Depth x Height (m)
No.1 Semi-anechoic chamber	20.6 x 11.3 x 7.65 Maximum measurement distance: 10m	No.1 Shielded room	6.8 x 4.1 x 2.7
No.2 Semi-anechoic chamber	20.6 x 11.3 x 7.65 Maximum measurement distance: 10m	No.2 Shielded room	6.8 x 4.1 x 2.7
No.3 Semi-anechoic chamber	12.7 x 7.7 x 5.35 Maximum measurement distance: 5m	No.3 Shielded room	6.3 x 4.7 x 2.7
No.4 Full-anechoic chamber	8.1 x 5.1 x 3.55	No.4 Shielded room	4.4 x 4.7 x 2.7
		No.5 Shielded room	7.8 x 6.4 x 2.7
		No.6 Shielded room	7.8 x 6.4 x 2.7

### 3.6 Test setup, Data of EMI & Test instruments

Refer to Appendix 1 to 3.

---

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

## 4 System test configuration

### 4.1 Justification

The system was configured in typical fashion (as a customer would normally use it) for testing.

Test item	Operating mode	Tested frequency
Conducted emission	Transmitting Hopping OFF (DH5) Payload: PRBS9	2402MHz*1)
Carrier frequency separation	Transmitting Hopping ON (DH5/3DH5)/Inquiry, Payload: PRBS9	-
20dB bandwidth	Transmitting Hopping OFF (DH5/3DH5)/Inquiry, Payload: PRBS9	2402MHz, 2441MHz, 2480MHz
Number of hopping frequency	Transmitting Hopping ON (DH5/3DH5)/Inquiry, Payload: PRBS9	-
Dwell time	Transmitting (Hopping ON) -DH1, -DH3, -DH5 -3DH1, -3DH3, -3DH5 -Inquiry	-
Maximum peak output power	Transmitting Hopping OFF (DH5/3DH5)/Inquiry, Payload: PRBS9 -DH5 -2DH5 -3DH5	2402MHz, 2441MHz, 2480MHz
Band edge compliance & Spurious emission (Conducted) (Radiated)	Transmitting (DH5/3DH5), Payload: PRBS9 -Hopping ON/Inquiry -Hopping OFF	Band edge compliance: 2402MHz, 2480MHz  Spurious emission: 2402MHz, 2441MHz, 2480MHz(Tx)
99% occupied bandwidth	Transmitting (DH5/3DH5), Payload: PRBS9 -Hopping ON -Hopping OFF	2402MHz, 2441MHz, 2480MHz

\*1) There is no difference between channels therefore measurement was performed with representative channel.

\*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload (except Dwell time test)

\*Remarks: Test was not performed at AFH mode, because the decrease of number of channel (min: 20ch) at AFH mode does not influence on the output power and bandwidth of the EUT.

However, the limit level 125mW of AFH mode was used due to the overlap of the bandwidth.

**UL Japan, Inc.**


**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

#### 4.2 Configuration and peripherals

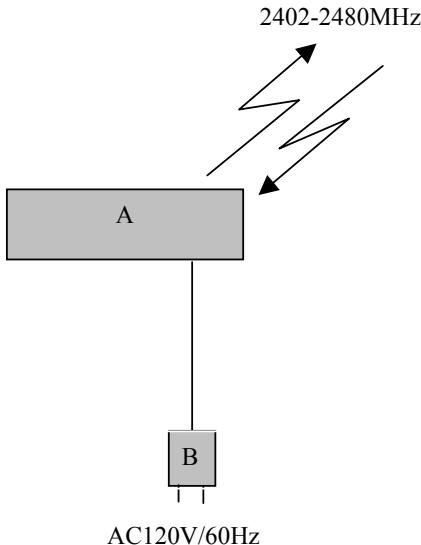

\* Test data was taken under worse case conditions.

#### Description of EUT and support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	TAG READER	K612	TR035	YOKOWO Co., Ltd.	EUT
B	AC Adaptor *1	US318-06	612-0290293	UNIFIVE	EUT

\*1) Conducted Emission test only.

#### List of cables used

No.	Name	Length (m)	Shield	
			Cable	Connector
1	DC Cable	1.8	Unshielded	Unshielded

---

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

## 5 Conducted emission

## 5.1 Operating environment

The test was carried out in No.3 shielded room.

Temperature : See test data  
Humidity : See test data

## 5.2 Test configuration

EUT was placed on a platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane. The table is made of Styrofoam and covered with polyvinyl chloride. That has very low permittivity. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT was aligned and was flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from LISN DC cable was bundled in center. They were folded back and for the forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane. Each EUT current-carrying power lead, except the ground (safety) lead, was individually connected through a LISN to the input power source. Photographs of the set up are shown in Appendix 1.

### 5.3 Test conditions

Frequency range : 0.15 - 30MHz  
EUT position : Table top  
EUT operation mode : Transmitting (2402MHz)

## 5.4 Test procedure

The AC Mains Terminal Continuous disturbance Voltage had been measured with the EUT within a screened room. The EUT was connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection has been performed. The measurements had been performed with a quasi-peak detector and if required, an average detector. The conducted emission measurements were made with the following detector of the test receiver.

Detector Type : Quasi-Peak/ Average  
IF Bandwidth : 9kHz

## 5.5 Results

Summary of the test results : Pass

Date : November 4, 2009 Test engineer : Hikaru Shirasawa

## 6 Carrier frequency separation

### Test procedure

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass

## 7 20dB bandwidth & Occupied bandwidth (99%)

### Test procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.

The channel separation in Hopping mode and Inquiry mode was separated by 25kHz and 2/3 of the 20dB bandwidth.

Summary of the test results: Pass

## 8 Number of hopping frequency

### Test procedure

The Number of Hopping Frequency was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass

## 9 Dwell time

### Test procedure

The Dwell time was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass

## 10 Maximum peak output power

### Test procedure

The Maximum Peak Output Power was measured with a power meter connected to the antenna port.

Summary of the test results: Pass

## 11 Out of band emissions (Antenna port conducted)

### Test procedure

The Out of Band Emissions was measured with a spectrum analyzer connected to the antenna port.

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a conducted measurement.

Summary of the test results: Pass

---

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

## 12 Out of band emissions (Radiated)

### 12.1 Operating environment

The test was carried out in No.3 Semi-anechoic chamber.

### 12.2 Test configuration

EUT was placed on a platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane. The table is made of Styrofoam and covered with polyvinyl chloride. That has very low permittivity. The configuration was set in accordance with ANSI C63.4: 2003. Photographs of the set up are shown in Appendix 1.

### 12.3 Test conditions

Frequency range : 30MHz - 26GHz  
Test distance : 3m

### 12.4 Test procedure

The Radiated Electric Field Strength intensity has been measured with a ground plane and at a distance of 3m. The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

Measurements were performed with QP, PK, and AV detector.

The radiated emission measurements were made with the following detector function of the test receiver.

Frequency	Below 1GHz	Above 1GHz
Instrument used	Test Receiver	Spectrum Analyzer
Detector IF Bandwidth	QP: BW 120kHz	PK: RBW: 1MHz/VBW: 1MHz, AV*1): RBW: 1MHz VBW: 300Hz (Pulse noise) 10Hz (No pulse noise)
Measuring antenna	Biconical (30-300MHz) Logperiodic (300MHz-1GHz)	Horn

\*1) When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

	Below 1GHz	Above 1GHz
Horizontal	Y	Y
Vertical	Z	X

### 12.5 Band edge

Band edge level at 2390MHz and 2483.5MHz is below the limits of FCC 15.209 and band edge level at 2400MHz is below the 20dBc. Refer to the data.

### 12.6 Results

Summary of the test results : Pass \*No noise was detected above the 5<sup>th</sup> order harmonics.

---

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401

### **APPENDIX 1: Photographs of test setup**

Page 14 : Conducted emission  
Page 15 : Radiated emission  
Page 16 : Pre-check of the worst position

### **APPENDIX 2: Test data**

Page 17 : Conducted Emission  
Page 18 - 21 : 20dB bandwidth and Carrier frequency separation  
Page 22- 24 : Number of hopping frequency  
Page 25- 28 : Dwell time  
Page 29 : Maximum peak output power  
Page 30 - 40 : Out of band emissions (Antenna Port Conducted)  
Page 41 - 52 : Out of band emissions (Radiated)  
Page 53 : Duty cycle  
Page 54 - 56 : Occupied bandwidth (99%)

### **APPENDIX 3: Test instruments**

Page 57 : Test instruments

---

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone: +81 463 50 6400

Facsimile: +81 463 50 6401